


Service Manual

Plasma TV



TH-50PV30A
TH-50PV30H
TH-50PV30M
TH-50PV30R

GPH6DA Chassis

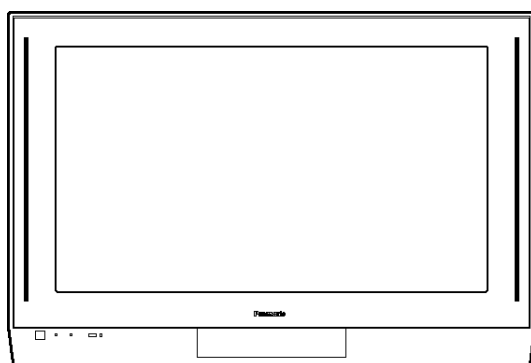

Please file and use this manual together with the service manual for Model No.TH-50PV30E,
 Order No.04-SM-008.

Specifications

Power Source	220 V - 240 V 50 Hz / 60 Hz A.C.
Power Consumption	
Normal use	498 W
Standby	1.8 W
Power-OFF	1.0 W
Plasma Display panel	
Drive method	AC type
Aspect Ratio	16:9
Contrast Ratio	3000:1
Screen size (No.of pixels)	50-inch
	1,106 mm (W) × 622 mm (H) × 1,269 mm (diagonal)
	1,049,088 (1,366 (W) × 768 (H)) [4,098 × 768 dots]
Sound	
Speaker	Woofer ϕ 80 mm × 2, Tweeter 16 mm × 73 mm × 8
Audio Output	26 W [8 W +8 W, 5 W +5 W] (10 %THD)
Headphone	M3 (3.5 mm) Jack × 1
Applicable signals	
Colour System	NTSC, PAL, PAL60, SECAM, Modified NTSC
Scanning format	525 (480) / 60i • 60p, 625 (575) / 50i • 50p, 1125 / 50i, 1125 / 60i, 1250i / 50

Panasonic®

© 2004 Matsushita Electric Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

PC signals

XGA display

VGA, SVGA, XGA

SXGA, UXGA (compressed)

Horizontal scanning frequency 15 - 110 kHz

Vertical scanning frequency 48 - 120 Hz

**Receiving System
(TH-50PV30H/M/R)**

21 Systems		Function	21 Systems		Function	21 Systems		Function
1	PAL B, G, H	Reception of broadcast transmissions and Playback from Video Cassette Tape Recorders.	8	NTSC 4.43/5.5 MHz	Playback from Special VCR's or DVD	15	PAL 60 Hz/5.5 MHz	Playback from Special Disc Players and Special VCR's or DVD
2	PAL I		9	NTSC 4.43/6.0 MHz		16	PAL 60 Hz/6.0 MHz	
3	PAL D, K		10	NTSC 4.43/6.5 MHz		17	PAL 60 Hz/6.5 MHz	
4	SECAM B, G		11	NTSC 3.58/5.5 MHz		18	SECAM 60 Hz/5.5 MHz	
5	SECAM D, K		12	NTSC 3.58/6.0 MHz		19	SECAM 60 Hz/6.0 MHz	
6	SECAM K1		13	NTSC 3.58/6.5 MHz		20	SECAM 60 Hz/6.5MHz	
7	NTSC M (NTSC 3.58/4.5 MHz)		14	SECAM I		21	NTSC 50 Hz/ 4.5 MHz	

**Receiving System
(TH-50PV30A)**

1. PAL B/G	Reception of Off air broadcasts
2. NTSC 4.43	Playback from Video Tape Recorders
3. NTSC 3.58	Playback from Special Video Tape Recorders and Special Video Disc Players
4. PAL 60Hz	(Via the AV Sockets)only. .

**Receiving Channels
(TH-50PV30H/M/R)
Two tuner model**

Regular TV

VHF BAND

2-12 (PAL/SECAM B, K1)

0-12 (PAL B AUST.)

1-9 (PAL B N.Z)

1-12 (PAL/SECAM D)

1-12 (NTSC M Japan)

2-13 (NTSC M U.S.A)

UHF BAND

21-69 (PAL G, H, I/SECAM G, K, K1)

28-69 (PAL AUST.)

13-57 (PAL D, K)

13-62 (NTSC M Japan)

14-69 (NTSC M U.S.A)

CATV

S1-S20 (OSCAR)

1-125 (U.S.A CATV)

C13-C49 (JAPAN)

S21-S41 (HYPER)

Z1-Z37 (CHINA)

5A, 9A (AUST.)

**Receiving Channels
(TH-50PV30A)
One tuner model**

VHF 0 to 12

PAL B

UHF 21 to 69

PAL G

S'1 to S'3

HYPER TUNER

S1 to S41

OUTPUT

AUDIO OUT

AUDIO L-R (RCA Pin Type × 2)

0.5 Vrms

VIDEO OUT

VIDEO (RCA Pin Type)

1.0 Vp-p (75 Ω)

INPUT

AV1-Rear

VIDEO (RCA Pin Type)

1.0 Vp-p (75 Ω)

	S-VIDEO (MINI DIN 4-pin)	Y:1.0 Vp-p (75 Ω) C:0.286 Vp-p (75 Ω)
	AUDIO L-R (RCA Pin Type × 2)	0.5 Vrms
AV2-Rear	VIDEO (RCA Pin Type)	1.0 Vp-p (75 Ω)
	AUDIO L-R (RCA Pin Type × 2)	0.5 Vrms
	Y	1.0 Vp-p (including synchronization)
	P _B /P _R	±0.35 Vp-p
AV3-Front	VIDEO (RCA Pin Type)	1.0 Vp-p (75 Ω)
	S-VIDEO (MINI DIN 4-pin)	Y:1.0 Vp-p (75 Ω) C:0.286 Vp-p (75 Ω)
	AUDIO L-R (RCA Pin Type × 2)	0.5 Vrms
AV4-Rear	VIDEO (RCA Pin Type)	1.0 Vp-p (75 Ω)
	AUDIO L-R (RCA Pin Type × 2)	0.5 Vrms
	Y	1.0 Vp-p (including synchronization)
	P _B /P _R	± 0.35 Vp-p
PC	(HIGH-DENSITY D-SUB 15PIN)	R, G, B/0.7 Vp-p (75-ohm)
		HD, VD/1.0 -5.0 Vp-p (high impedance)
Others	SD Card slot × 1, PC Card slot × 1	
ANT-Rear	UHF/VHF	
Operating Conditions	Temperature :0 ° - 40 °C	
	Humidity :20 % - 80 %RH (non-condensing)	
Accessories Supplied		
Remote Control Transmitter	EUR7635040	
Batteries	2 × R6 (AA) Size	
Clamper	TMME206 × 2	
Ferrite core	Large size × 3, Small size × 5	
Dimensions (W × H × D)	1,329 mm × 870 mm × 139 mm	
Mass (Weight)	55.0 kg	

Notes:

- Design and specifications are subject to change without notice. Mass and dimensions shown are approximate.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

	Page		Page
1 Difference PCB structure sheet	5	5.10. JG-Board	27
1.1. TH-50PV30H/M/R	5	5.11. G-Board	29
1.2. TH-50PV30A	5	6 Block and Schematic Diagrams	31
2 Service Hint	6	6.1. Main Block Diagram	31
3 Option Description	7	6.2. PF-Board Block Diagram	32
4 IIC mode structure (following items value is sample data.) ..	8	6.3. PF-Board Schematic Diagram	33
5 Conductor Views	9	6.4. P-Board Block Diagram	34
5.1. PF-Board	9	6.5. P-Board (1 of 6) Schematic Diagram	35
5.2. P-Board	11	6.6. P-Board (2 of 6) Schematic Diagram	36
5.3. T, TA and TB-Board	14	6.7. P-Board (3 of 6) Schematic Diagram	37
5.4. H-Board	15	6.8. P-Board (4 of 6) Schematic Diagram	38
5.5. DG-Board	17	6.9. P-Board (5 of 6) Schematic Diagram	39
5.6. D-Board	19	6.10. P-Board (6 of 6) Schematic Diagram	40
5.7. SC-Board	21	6.11. H, T, TA and TB-Board Block Diagram	41
5.8. SS-Board	24	6.12. T, TA and TB-Board Schematic Diagram	42
5.9. K-Board	26	6.13. H-Board (1 of 2) Schematic Diagram	43

6.14. H-Board (2 of 2) Schematic Diagram	44
6.15. DG-Board (1 of 2) Block Diagram	45
6.16. DG-Board (2 of 2) Block Diagram	46
6.17. DG-Board (1 of 8) Schematic Diagram	47
6.18. DG-Board (2 of 8) Schematic Diagram	48
6.19. DG-Board (3 of 8) Schematic Diagram	49
6.20. DG-Board (4 of 8) Schematic Diagram	50
6.21. DG-Board (5 of 8) Schematic Diagram	51
6.22. DG-Board (6 of 8) Schematic Diagram	52
6.23. DG-Board (7 of 8) Schematic Diagram	53
6.24. DG-Board (8 of 8) Schematic Diagram	54
6.25. D-Board (1 of 2) Block Diagram	55
6.26. D-Board (2 of 2) Block Diagram	56
6.27. D-Board (1 of 14) Schematic Diagram	57
6.28. D-Board (2 of 14) Schematic Diagram	58
6.29. D-Board (3 of 14) Schematic Diagram	59
6.30. D-Board (4 of 14) Schematic Diagram	60
6.31. D-Board (5 of 14) Schematic Diagram	61
6.32. D-Board (6 of 14) Schematic Diagram	62
6.33. D-Board (7 of 14) Schematic Diagram	63
6.34. D-Board (8 of 14) Schematic Diagram	64
6.35. D-Board (9 of 14) Schematic Diagram	65
6.36. D-Board (10 of 14) Schematic Diagram	66

6.37. D-Board (11 of 14) Schematic Diagram	67
6.38. D-Board (12 of 14) Schematic Diagram	68
6.39. D-Board (13 of 14) Schematic Diagram	69
6.40. D-Board (14 of 14) Schematic Diagram	70
6.41. SC-Board Block Diagram	71
6.42. SC-Board (1 of 3) Schematic Diagram	72
6.43. SC-Board (2 of 3) Schematic Diagram	73
6.44. SC-Board (3 of 3) Schematic Diagram	74
6.45. SS, S, SS2 and SS3-Board Block Diagram	75
6.46. SS-Board (1 of 2) Schematic Diagram	76
6.47. SS-Board (2 of 2), SS2-Board and SS3-Board Schematic Diagram	77
6.48. K-Board Schematic Diagram	78
6.49. JG-Board Block Diagram	79
6.50. JG-Board (1 of 2) Schematic Diagram	80
6.51. JG-Board (2 of 2) Schematic Diagram	81
6.52. G-Board Schematic Diagram	82

7 Parts Location 83

8 Packing Exploded Views 84

9 Mechanical Replacement Parts List 86

10 Replacement Parts List 88

10.1. Replacement Parts List Notes	88
10.2. Electrical Replacement Parts List	89

1 Difference PCB structure sheet

1.1. TH-50PV30H/M/R


BOARD NAME	TH-50PV30E	TH-50PV30H/M/R	REMARKS
C1	TNPA2903		
C2	TNPA2904		
C3	TNPA2905		
C4	TNPA2906		
C5	TNPA2907		
C6	TNPA2908		
SS2	TNPA2919		
SS3	TNPA2920		
PA	TNPA2989AC		
S	TNPA2990AC		
SU	TNPA3128		
SD	TNPA3129		
K	TNPA2988AC	TNPA2988AE	CHANGED
JG	TNPA3151AC	TNPA3151AD	CHANGED
H	TNPA3115AC	TNPA3432	CHANGED
P	TNPA2890AB	TNPA3461	CHANGED
G	TNPA3320	TXN/G1UFSA	CHANGED
T	TNPA3116	-----	DELETED
TA	-----	TNPA3433	ADDED
TB	-----	TNPA3434	ADDED
DG	TNPA3114AC	TXNDG1UHSR	CHANGED
PF	TNPA2926AB	TXNPF1UGSH	CHANGED
SC	TNPA2914AB	TXNSC20QNS	CHANGED
SS	TNPA2918AC	TXNSS20RTS	CHANGED
D	TNPA2824AT	TZTNP01UGSE	CHANGED

1.2. TH-50PV30A


BOARD NAME	TH-50PV30E	TH-50PV30A	REMARKS
C1	TNPA2903		
C2	TNPA2904		
C3	TNPA2905		
C4	TNPA2906		
C5	TNPA2907		
C6	TNPA2908		
SS2	TNPA2919		
SS3	TNPA2920		
PA	TNPA2989AC		
S	TNPA2990AC		
SU	TNPA3128		
SD	TNPA3129		
K	TNPA2988AC	TNPA2988AE	CHANGED
JG	TNPA3151AC	TNPA3151AD	CHANGED
H	TNPA3115AC	TNPA3432AB	CHANGED
P	TNPA2890AB	TNPA3461	CHANGED
G	TNPA3320	TXN/G1UFSA	CHANGED
T	TNPA3116	TXN/T1UFSA	CHANGED
DG	TNPA3114AC	TXNDG1UGSA	CHANGED
PF	TNPA2926AB	TXNPF1UGSH	CHANGED
SC	TNPA2914AB	TXNSC20QNS	CHANGED
SS	TNPA2918AC	TXNSS20RTS	CHANGED
D	TNPA2824AT	TZTNP01UGSE	CHANGED

2 Service Hint

Stand the unit used for pedestal.

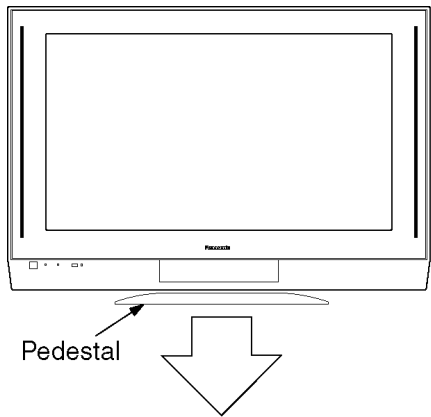


Remove the Rear Cover.

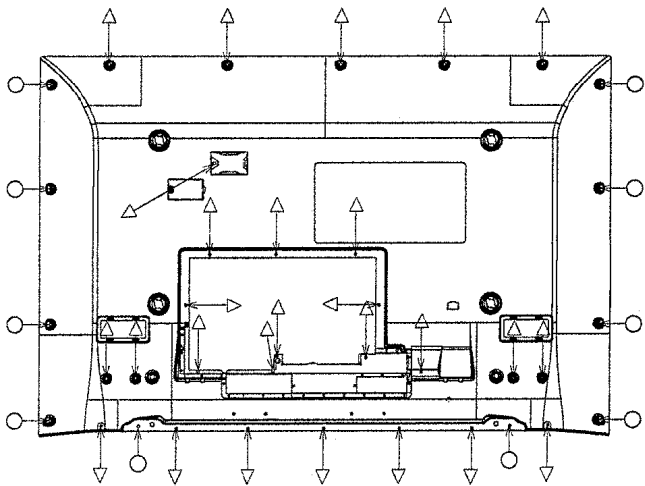

Remove: 10 screws (➡)
27 screws (⇨)

Service position.

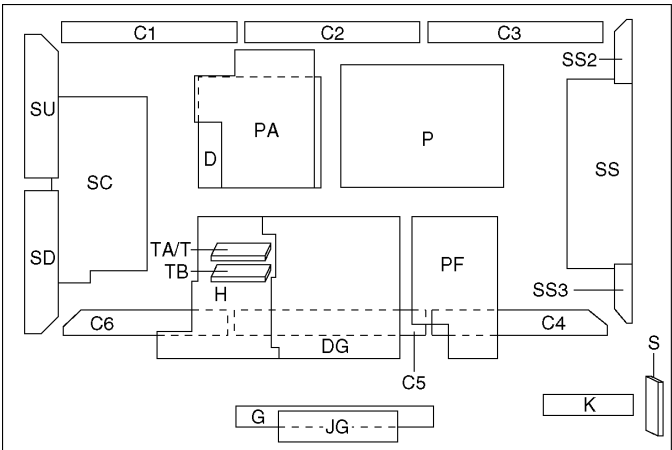

Board Name	Function
C1	DATA DRIVER (UPPER RIGHT)
C2	DATA DRIVER (UPPER CENTER)
C3	DATA DRIVER (UPPER LEFT)
C4	DATA DRIVER (LOWER LEFT)
C5	DATA DRIVER (LOWER CENTER)
C6	DATA DRIVER (LOWER RIGHT)
D	DIGITAL SIGNAL PROCESS
DG	DIGITAL CORE, MICOM
G	FRONT TERMINAL, SWITCH
H	REAR TERMINAL
JG	SD CARD/PC CARD, JPEG I/F D/A
K	LED, REMOTE, POWER SWITCH
P	POWER SUPPLY
PA	DC/DC, AUDIO
PF	LINE FILTER
S	POWER SWITCH
SC	SCAN DRIVE
SD	SCAN OUT (DOWN)
SS	SUSTAIN DRIVE
SS2	SUSTAIN CONNECTION (UP)
SS3	SUSTAIN CONNECTION (DOWN)
SU	SCAN OUT (UP)
T	TUNER
TA	MAIN TUNER
TB	SUB TUNER

T-BOARD --- TH-50PV30A ONLY


TA-BOARD --- TH-50PV30H/M/R ONLY

TB-BOARD --- TH-50PV30H/M/R ONLY

3 Option Description

	Cont	CIS	MEast	HK	Aust		
	Continental	CIS	Saudi Arabia Kuwait	Hong Kong Malaysia Singapore	Aust	Europe	Asia
option 1	8F	AF	AF	AF	AD		
b0	1	1	1	1	1	Colour system	Auto(1)
b1	1	1	1	1	0		SECAM(1)
b2	1	1	1	1	1		NTSC(1)
b3	1	1	1	1	1		M-NTSC(1)
b4	0	0	0	0	0	3:2 pulldown	enable(1)
b5	0	1	1	1	1	YUV for MW	enable(1)
b6	0	0	0	0	0	free	
b7	1	1	1	1	1	3D-COMB in the menu	Setup menu(0), Picture menu(1)
option 2	0	FF	FF	FF	6		
b0	0	1	1	1	0	CH Plan	ASIA / M.E. / HKUK / CHINA(1)
b1	0	1	1	1	1		NZ/INDNES(1)
b2	0	1	1	1	1		AUSTRALIA(1)
b3	0	1	1	1	0		E.EUROPE(1)
b4	0	1	1	1	0		SPECIAL(1)
b5	0	1	1	1	0		AMERICA(1)
b6	0	1	1	1	0		CATV(1)
b7	0	1	1	1	0		JAPAN(1)
option 3	B5	37	37	37	B5		
b0	1	1	1	1	1	sub picture	without sub-picture(0), with sub-picture(1)
b1	0	1	1	1	0	2tuner	2tuner(1), 1tuner(0)
b2	1	1	1	1	1	VGA	enable(1)
b3	0	0	0	0	0	AVS	enable(1)
b4	1	1	1	1	1	Wide (16:9)	16:9 (1), 4:3 (0) (change multi window/aspect operation)
b5	1	1	1	1	1	JPEG	enable(1)
b6	0	0	0	0	0	SIF	1 only(0), BG only(1)
b7	1	0	0	0	1		1/BG/DK/L(2), BG/DK(3)
option 4	11	E2	E2	E2	22		
b0	1	0	0	0	0	A2 enable	enable(1)
b1	0	1	1	1	1		not use
b2	0	0	0	0	0		not use
b3	0	0	0	0	0		not use
b4	1	0	0	0	0	NICAM enable	enable(1)
b5	0	1	1	1	1		not use
b6	0	1	1	1	0		not use
b7	0	1	1	1	0		not use
option 5	0	DE	DE	DE	10		
b0	0	0	0	0	0	A2 select 6.5MHz	5.742MHz(0) 6.742MHz(1)
b1	0	1	1	1	0	NICAM priority	ASIA/M.E.(1)
b2	0	1	1	1	0		HK/UK(1)
b3	0	1	1	1	0		CHINA(1)
b4	0	1	1	1	1		NZ/INDN(1)
b5	0	0	0	0	0		AUSTR(1)
b6	0	1	1	1	0		E.EURO(1)
b7	0	1	1	1	0		SPECIAL(1)
option 6	E0	60	62	60	E0		
b0	0	0	0	0	0	Ext. HV input	without HV input(0) / with HV input(1)
b1	0	0	1	0	0	SASO enable	SASO enable(1)
b2	0	0	0	0	0	Noise mute	Noise mute enable(0)
b3	0	0	0	0	0	Monitor out AV1 mute	Monitor out AV1 mute(1)
b4	0	1	0	0	0	Tuner no refresh	Refresh tuner (0), no refresh (1)
b5	1	1	1	1	1	Tuner	IACO tuner (1), Others (0)
b6	1	1	1	1	1	HYPER	UHF only(0), UHF/MHF (1)
b7	1	0	0	0	1	IF L2C	I2C controlled Tuner IF module (1)
option 7	7F	C06	C6	C8	C6		
b0	1	0	0	0	0	Power up EC-Mode	Power on EC enable (1)
b1	1	1	1	1	1	CH Blanking	Blanking enable (1)
b2	1	1	1	1	1	AV Blanking	Blanking enable (1)
b3	1	0	0	0	0	Auto WIDE	WSS enable only in aspect Auto (0), WSS always enable
b4	1	0	0	0	0	Volume correction	TV Volume correction enable (1)
b5	1	0	0	0	0	AVLink	Q-Link off selectable in menu (1)
b6	1	1	1	1	1	MPX/NICAM display	Display NICAM (0), Display MPX (1)
b7	0	1	1	1	1	Owner ID	not use
option 8	D0	50	50	70	D1		
b0	0	0	0	0	1	Teletext CH Refresh	not use
b1	0	0	0	0	0	Geomagnetic Sensor	Geomagnetic sensor enable(1)
b2	0	0	0	0	0	Geomagnetic Polarity	Geomagnetic polarity +(0), -(1)
b3	0	0	0	0	0	RF Attenuation	Enable(1)
b4	1	1	1	1	1	Fine tuning	Enable(1)
b5	0	0	0	1	0	Search speed	Slow(1) Fast(0)
b6	1	1	1	1	1	TEXT	Enable(1)
b7	1	0	0	0	1	TEXT TOP	TOP enable (1)
option 9	8C	08	08	08	08		
b0	0	0	0	0	0	Dolby	Dolby enable (1)
b1	0	0	0	0	0	3D Subwoofer	Subwoofer enable (1) Dolby model should be 0.
b2	1	0	0	0	0	Dolby Virtual	Dolby Virtual enable (1)
b3	1	1	1	1	1	Amp	with Amp(0) / without Amp(1)
b4	0	0	0	0	0	SoundExt.DA	without SoundExt.DA(0) / with SoundExt.DA(1)
b5	0	0	0	0	0	Shipping Sound menu	MUSIC(0) / CINEMA(1)
b6	0	0	0	0	0	Volume curve	Volume curve 1(0), curve2(1)
b7	1	0	0	0	0	LIPS/NIC IC	External LIPS/NIC IC enable (1)
option10	00	05	07	06	05		
b0	0	1	1	0	1	OSD language	not use
b1	0	0	1	1	0	ACI all country / lang	ACI enable(1), only Netherlands(0)
b2	0	1	1	1	1	ACI auto MP / Lower pos	ACI auto multi package enable (1)
b3	0	0	0	0	0	ACI offset	ACI offset for VCR prog. enable(1)
b4	0	0	0	0	0	Blue Back	not use
b5	0	0	0	0	0	Aspect Auto	Reserved
b6	0	0	0	0	0	S1/S1 Detection	Reserved
b7	0	0	0	0	0	Protect 5V detect	Protection input enable(1)
option11	99	C8	C8	C8	98		
b0	1	0	0	0	0	Acuity Demo	enable(1)
b1	0	0	0	0	0	Picture Shift	enable(1)
b2	0	0	0	0	0	Shop mode	enable(1)
b3	1	1	1	1	1	User aspect Just	enable(1)
b4	1	0	0	0	1	User aspect 14:9	enable(1)
b5	0	0	0	0	0	NICAM C4 bit	enable(1)
b6	0	1	1	1	0	ID-1	enable(1)
b7	1	1	1	1	1	1080i	enable(1)
option12	40	41	41	41	43		
b0	0	1	1	1	1	Area Option	Asia(1), europe(0)
b1	0	0	0	0	1	Australia	not use
b2	0	0	0	0	0	Ireland/India	Ireland(1)
b3	0	0	0	0	0	UK	UK(1)
b4	0	0	0	0	0	MELCOA	not use
b5	0	0	0	0	0	28 inch	28 inch (1) when only Large size=0, Wide=1, PTV=0
b6	1	1	1	1	1	Large size	52(1)/42(0) for PTV, 36(1)/32(0) for Wide, 34(1)/29(0) for 4:3
b7	0	0	0	0	0	JPEG auto on	on(1)
option13	81	C1	C1	C1	C7		
b0	4	4	4	4	4	Temporary	
b1	0	0	0	0	1	Tuner IF (38.9MHz)	38.9MHz(0), 39.5MHz(1)
b2	0	0	0	0	1	New ALBD	ALBD14.9 & Zoom3 disable(1)
b3	0	0	0	0	0	WSS detection in AV	enable(1)
b4	0	0	0	0	0	free	
b5	0	0	0	0	0	TEXTmode initialize	enable(1), disable when TV(0)
b6	0	1	1	1	1	MSP select	MSP3411G, MSP4410K(1)
b7	1	1	1	1	1	Black-level correction	enable GC2S+ IAJo, YOS control(1)

4 IIC mode structure (following items value is sample data.)

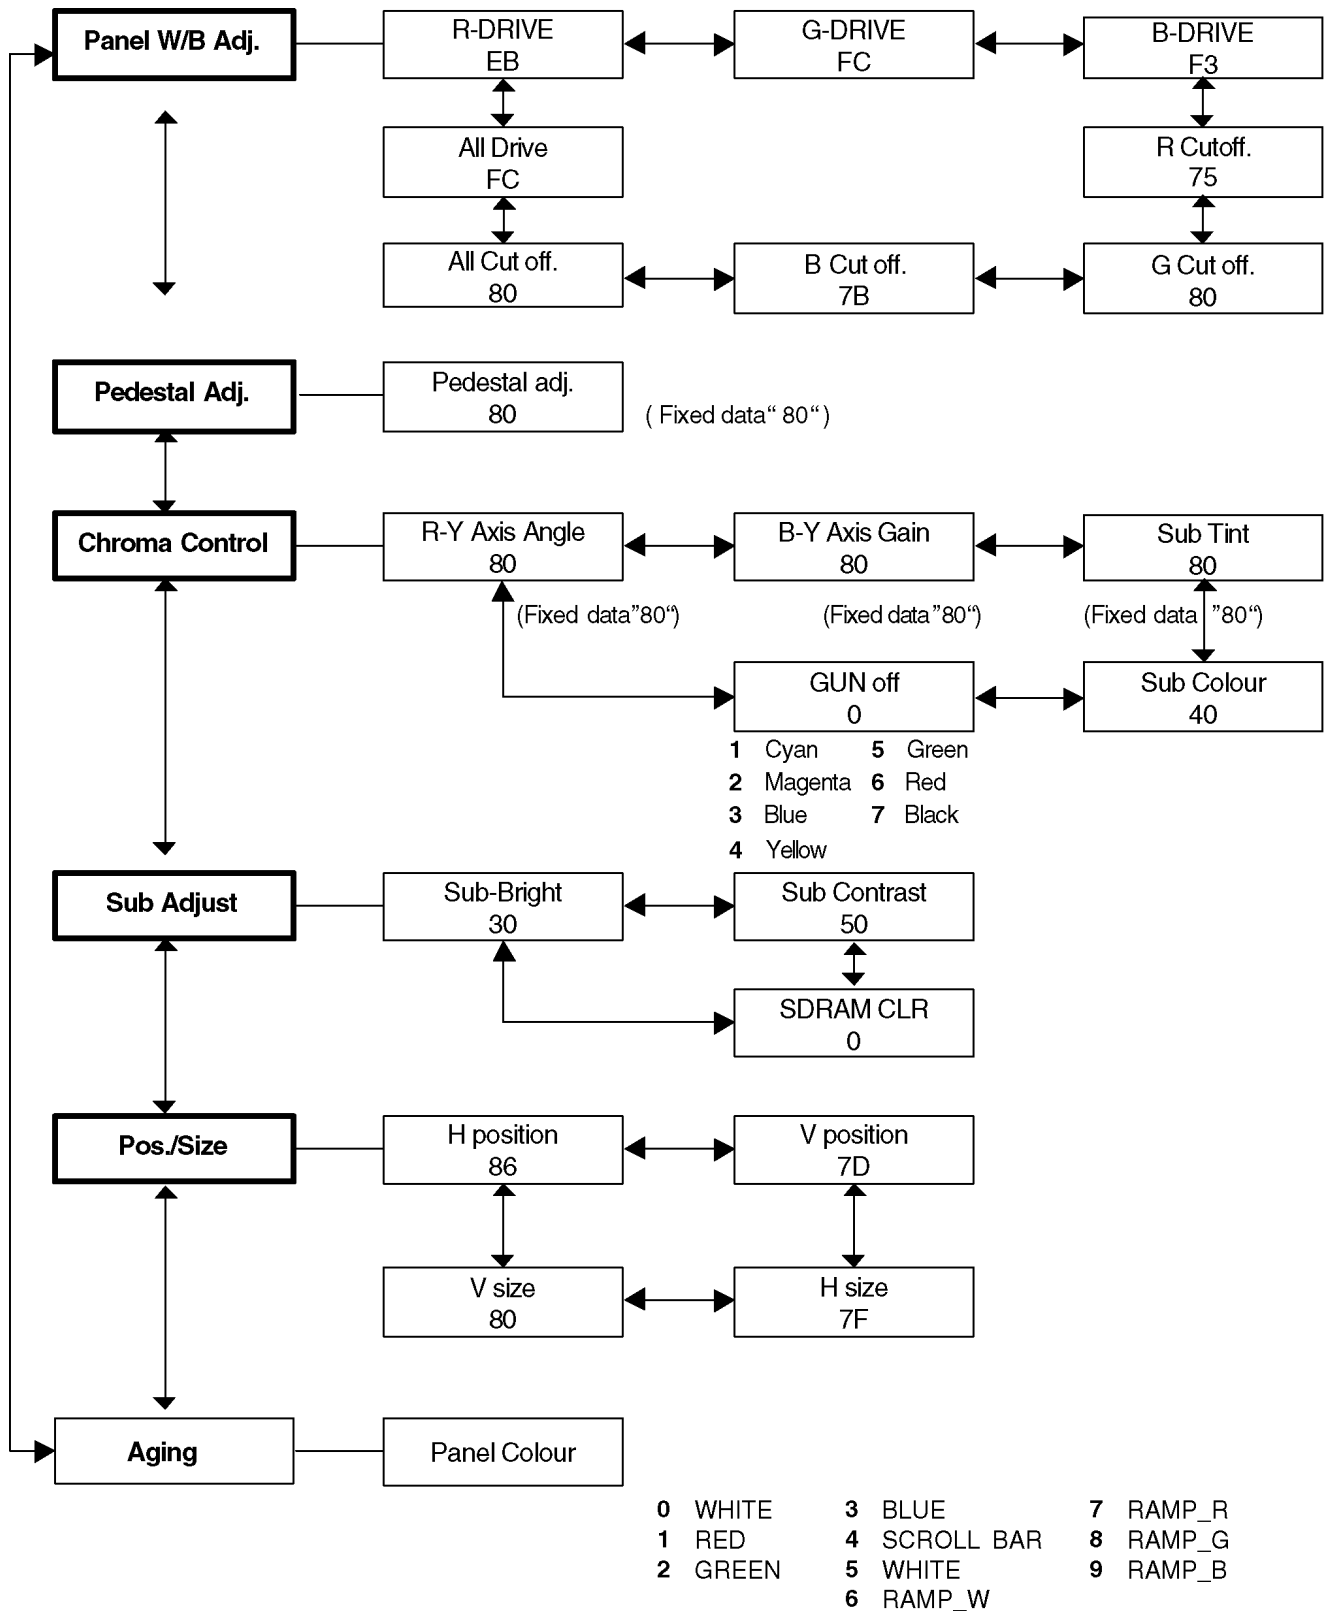


exit : MENU button


These are selected by OK button of Remote control and to exit, press the MENU button.

6
5
4
3
2
1

PF-BOARD (COMPONENT SIDE)
TXNPF1UGSH

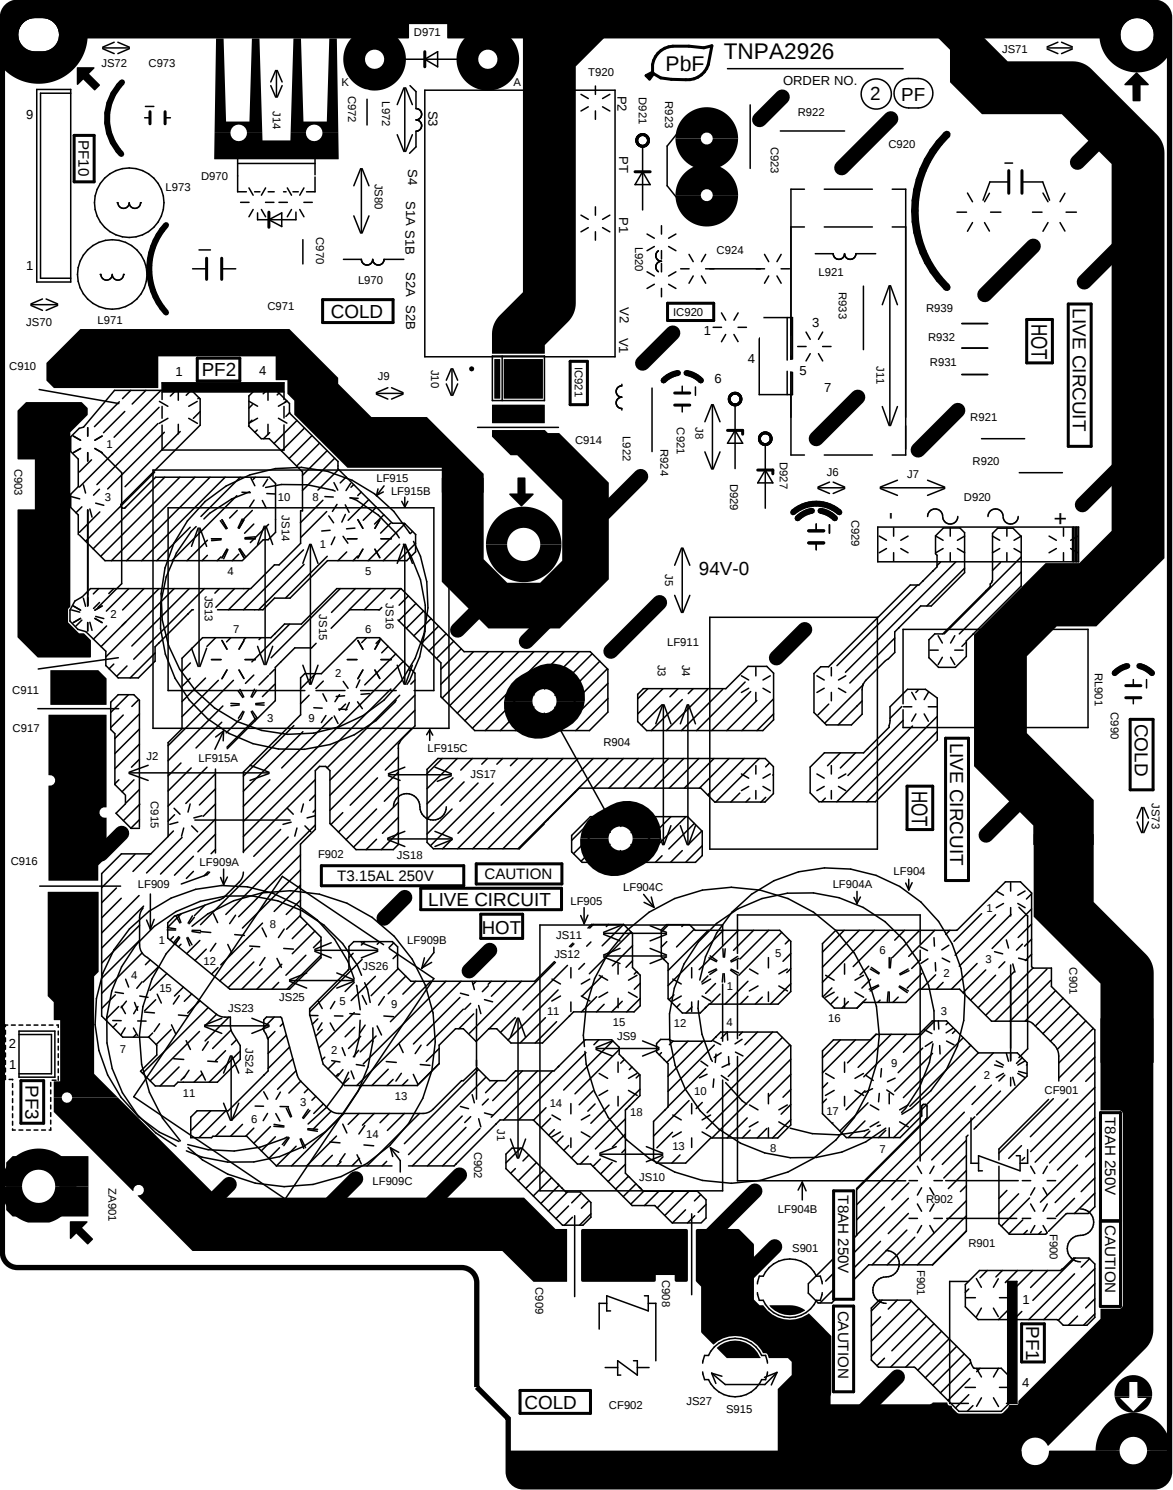

TH-50PV30A/H/M/R
PF-BOARD TXNPF1UGSH

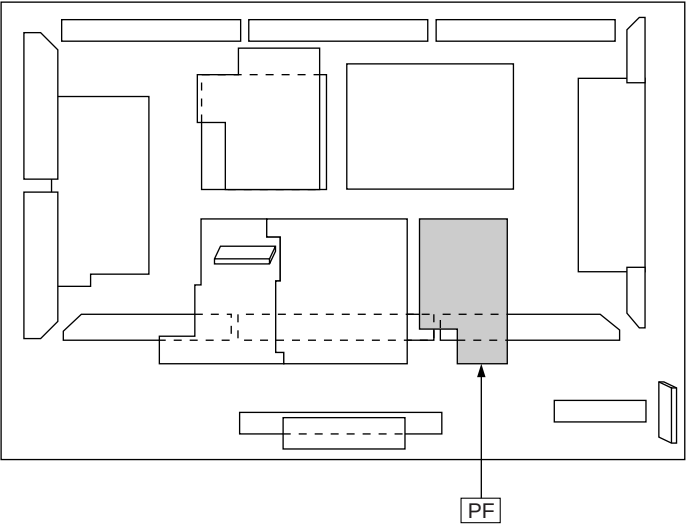


Parts Location


PF-BOARD (COMPONENT SIDE)			
IC			
IC920	C-5		
IC921	C-5		

TH-50PV30A/H/M/R
PF-BOARD TXNPF1UGSH

5.2. P-Board

P-BOARD (FOIL SIDE)
TNPA3461

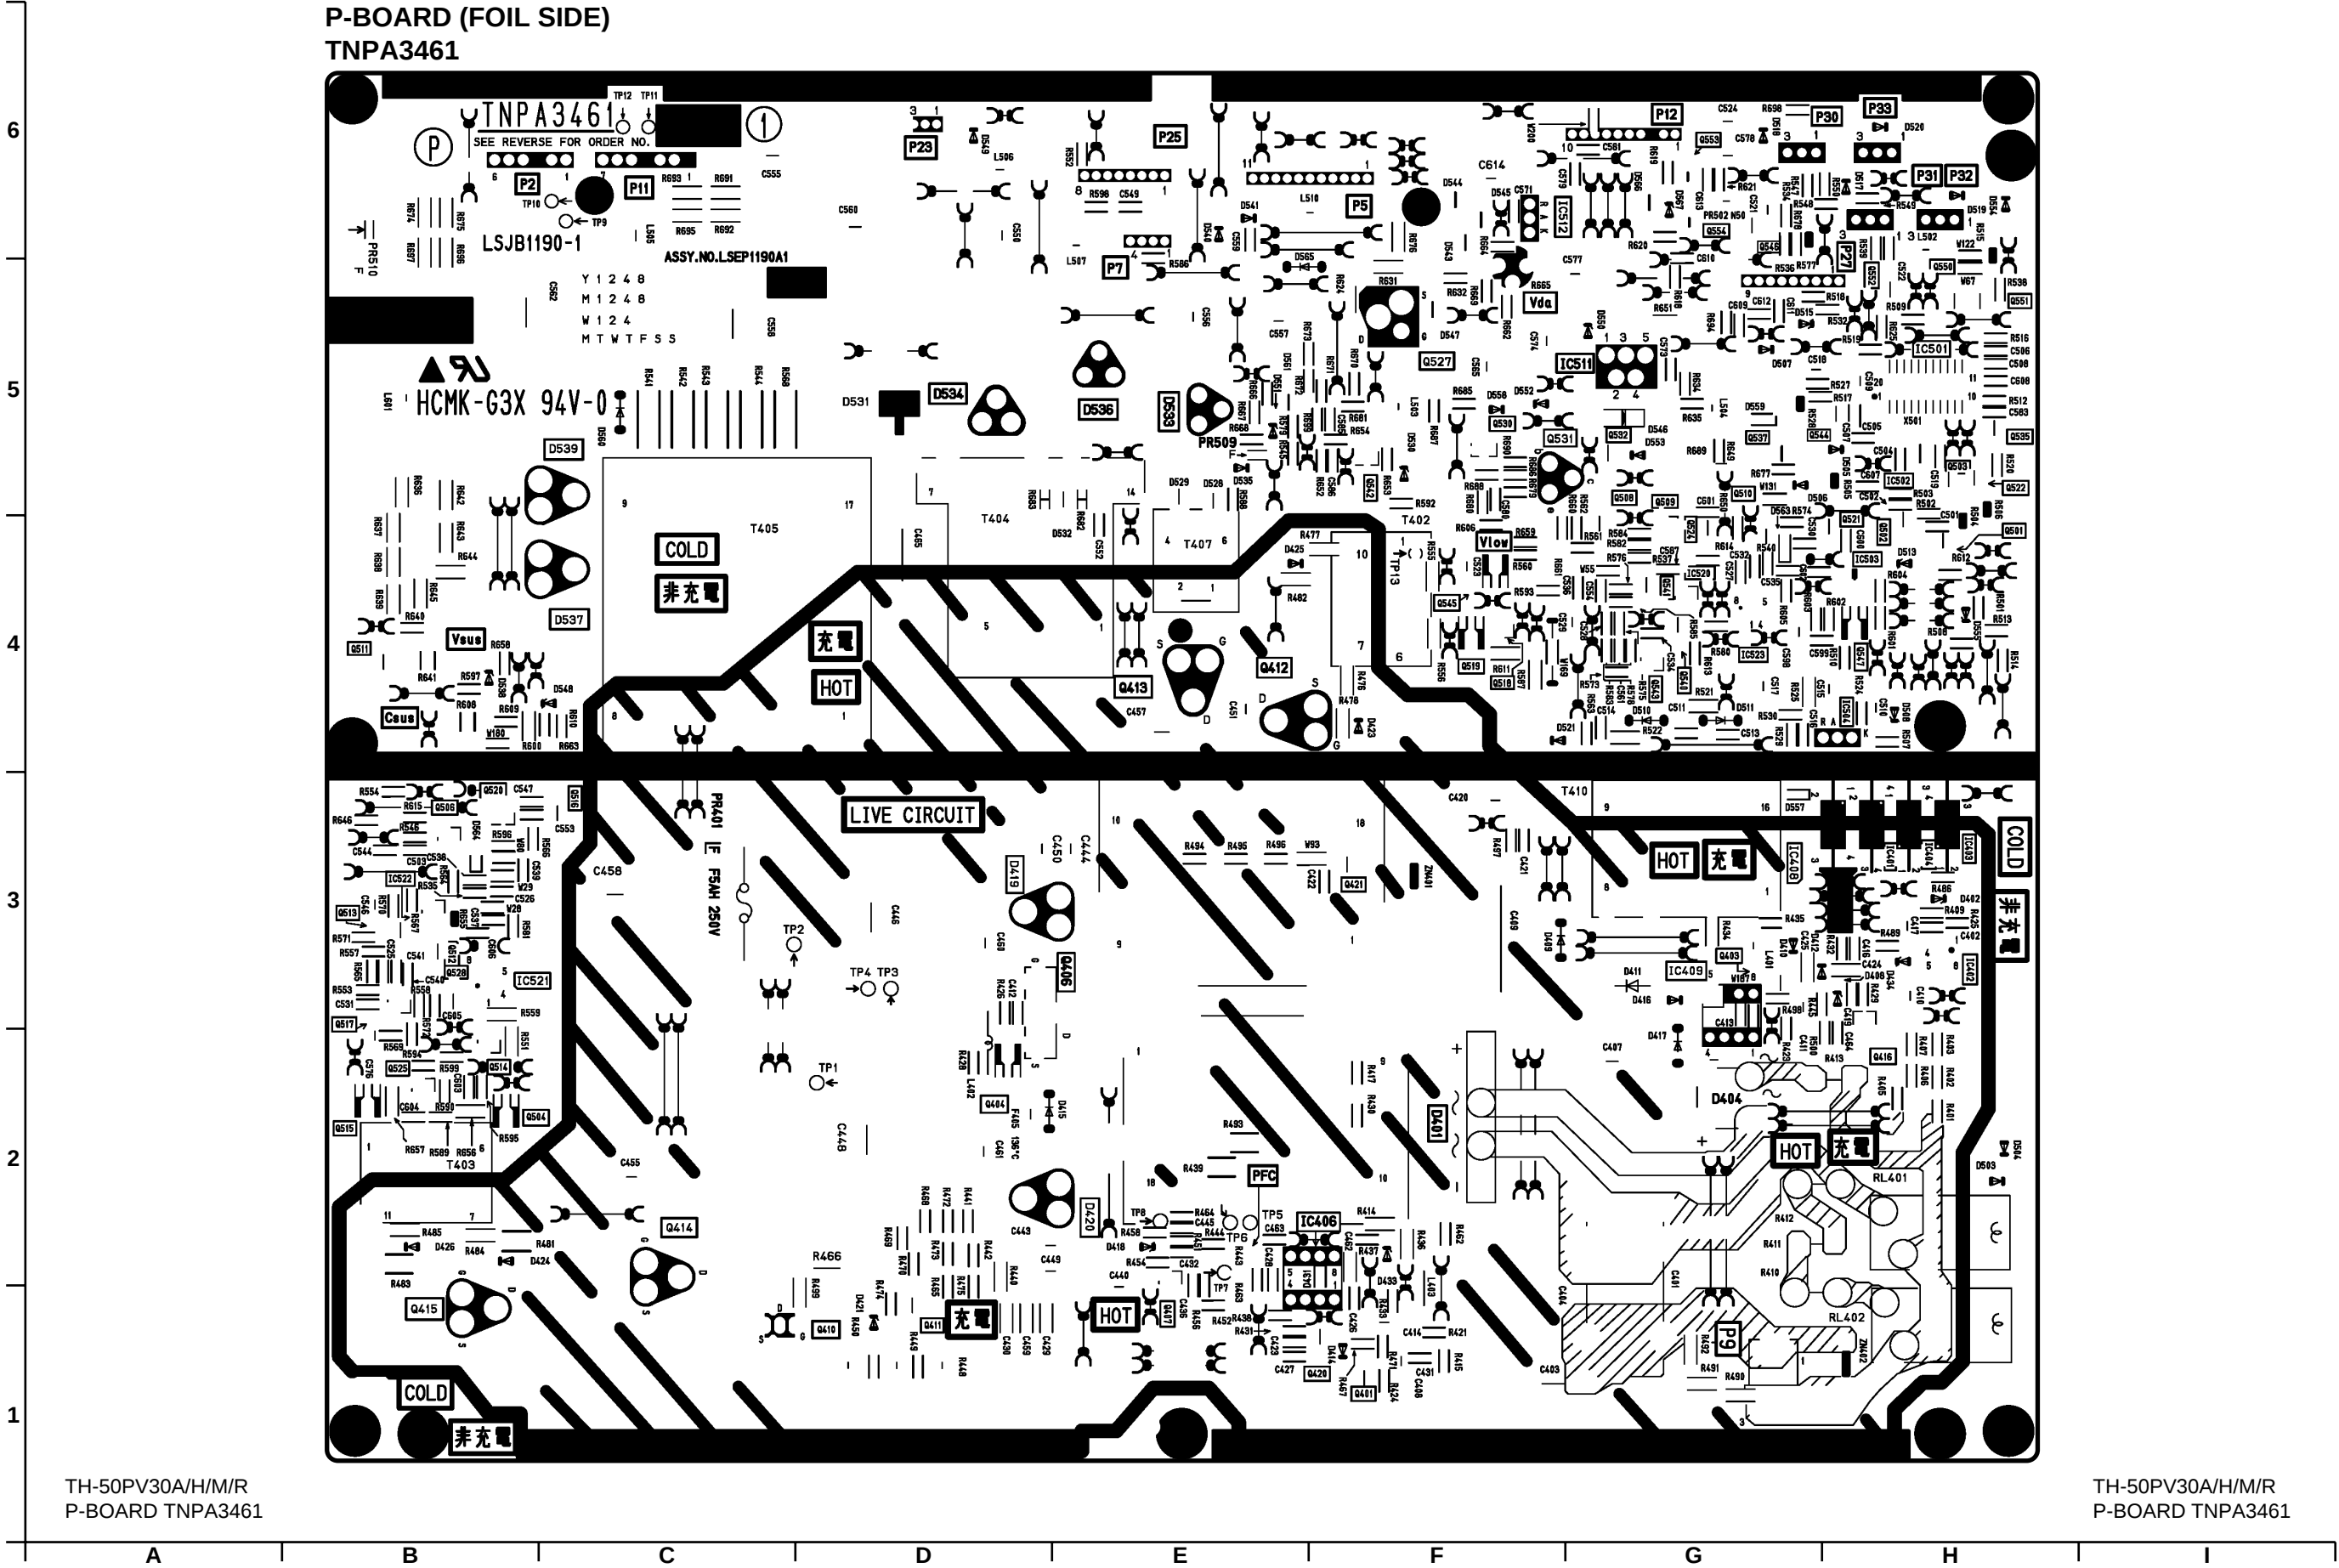

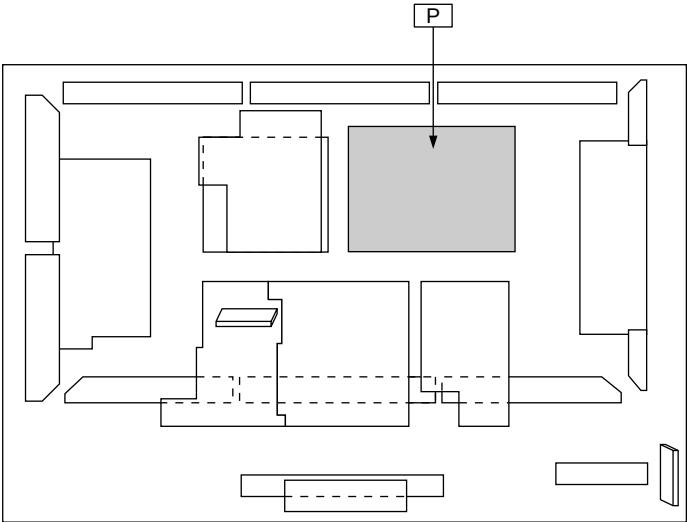


Parts Location

P-BOARD (FOIL SIDE)							
IC		TRANSISTOR				TP	
IC401	H-3	Q401	F-1	Q517	B-3	TP1	D-2
IC402	H-3	Q403	G-3	Q518	C-3	TP2	D-3
IC403	H-3	Q404	D-2	Q519	F-4	TP3	D-3
IC404	H-3	Q406	E-3	Q520	B-3	TP4	D-3
IC408	G-3	Q407	E-1	Q521	H-4	TP5	E-2
IC409	G-3	Q410	D-1	Q522	H-5	TP6	E-2
IC501	H-5	Q411	D-1	Q524	G-4	TP7	E-1
IC502	H-5	Q412	E-4	Q527	F-5	TP8	E-2
IC503	H-4	Q413	E-4	Q528	B-3	TP9	C-6
IC504	H-4	Q414	C-2	Q530	F-5	TP10	C-6
IC511	G-5	Q415	B-1	Q531	F-5	TP11	C-6
IC512	F-6	Q416	H-2	Q532	G-5	TP12	C-6
IC520	G-4	Q420	F-1	Q535	H-5		
IC521	B-3	Q421	F-3	Q537	G-5		
IC522	B-3	Q501	H-4	Q540	G-4		
IC523	G-4	Q502	H-4	Q541	G-4		
		Q503	H-5	Q542	F-5		
		Q504	B-2	Q543	G-4		
		Q506	B-3	Q544	G-5		
		Q508	G-5	Q545	F-4		
		Q509	G-5	Q546	G-6		
		Q510	G-5	Q547	H-4		
		Q511	B-4	Q550	H-5		
		Q512	B-3	Q551	H-5		
		Q513	B-3	Q552	H-5		
		Q514	B-2	Q553	G-6		
		Q515	B-2	Q554	G-6		

Parts Location

P-BOARD (COMPONENT SIDE)			
IC		TRANSISTOR	
IC406	D-1	Q406	E-2
IC409	C-3	Q410	G-1
IC504	B-3	Q412	E-3
IC511	C-5	Q413	E-4
IC512	D-6	Q414	G-2
		Q415	H-2
		Q527	D-6
		Q531	C-5


P-BOARD (COMPONENT SIDE)
TNPA3461

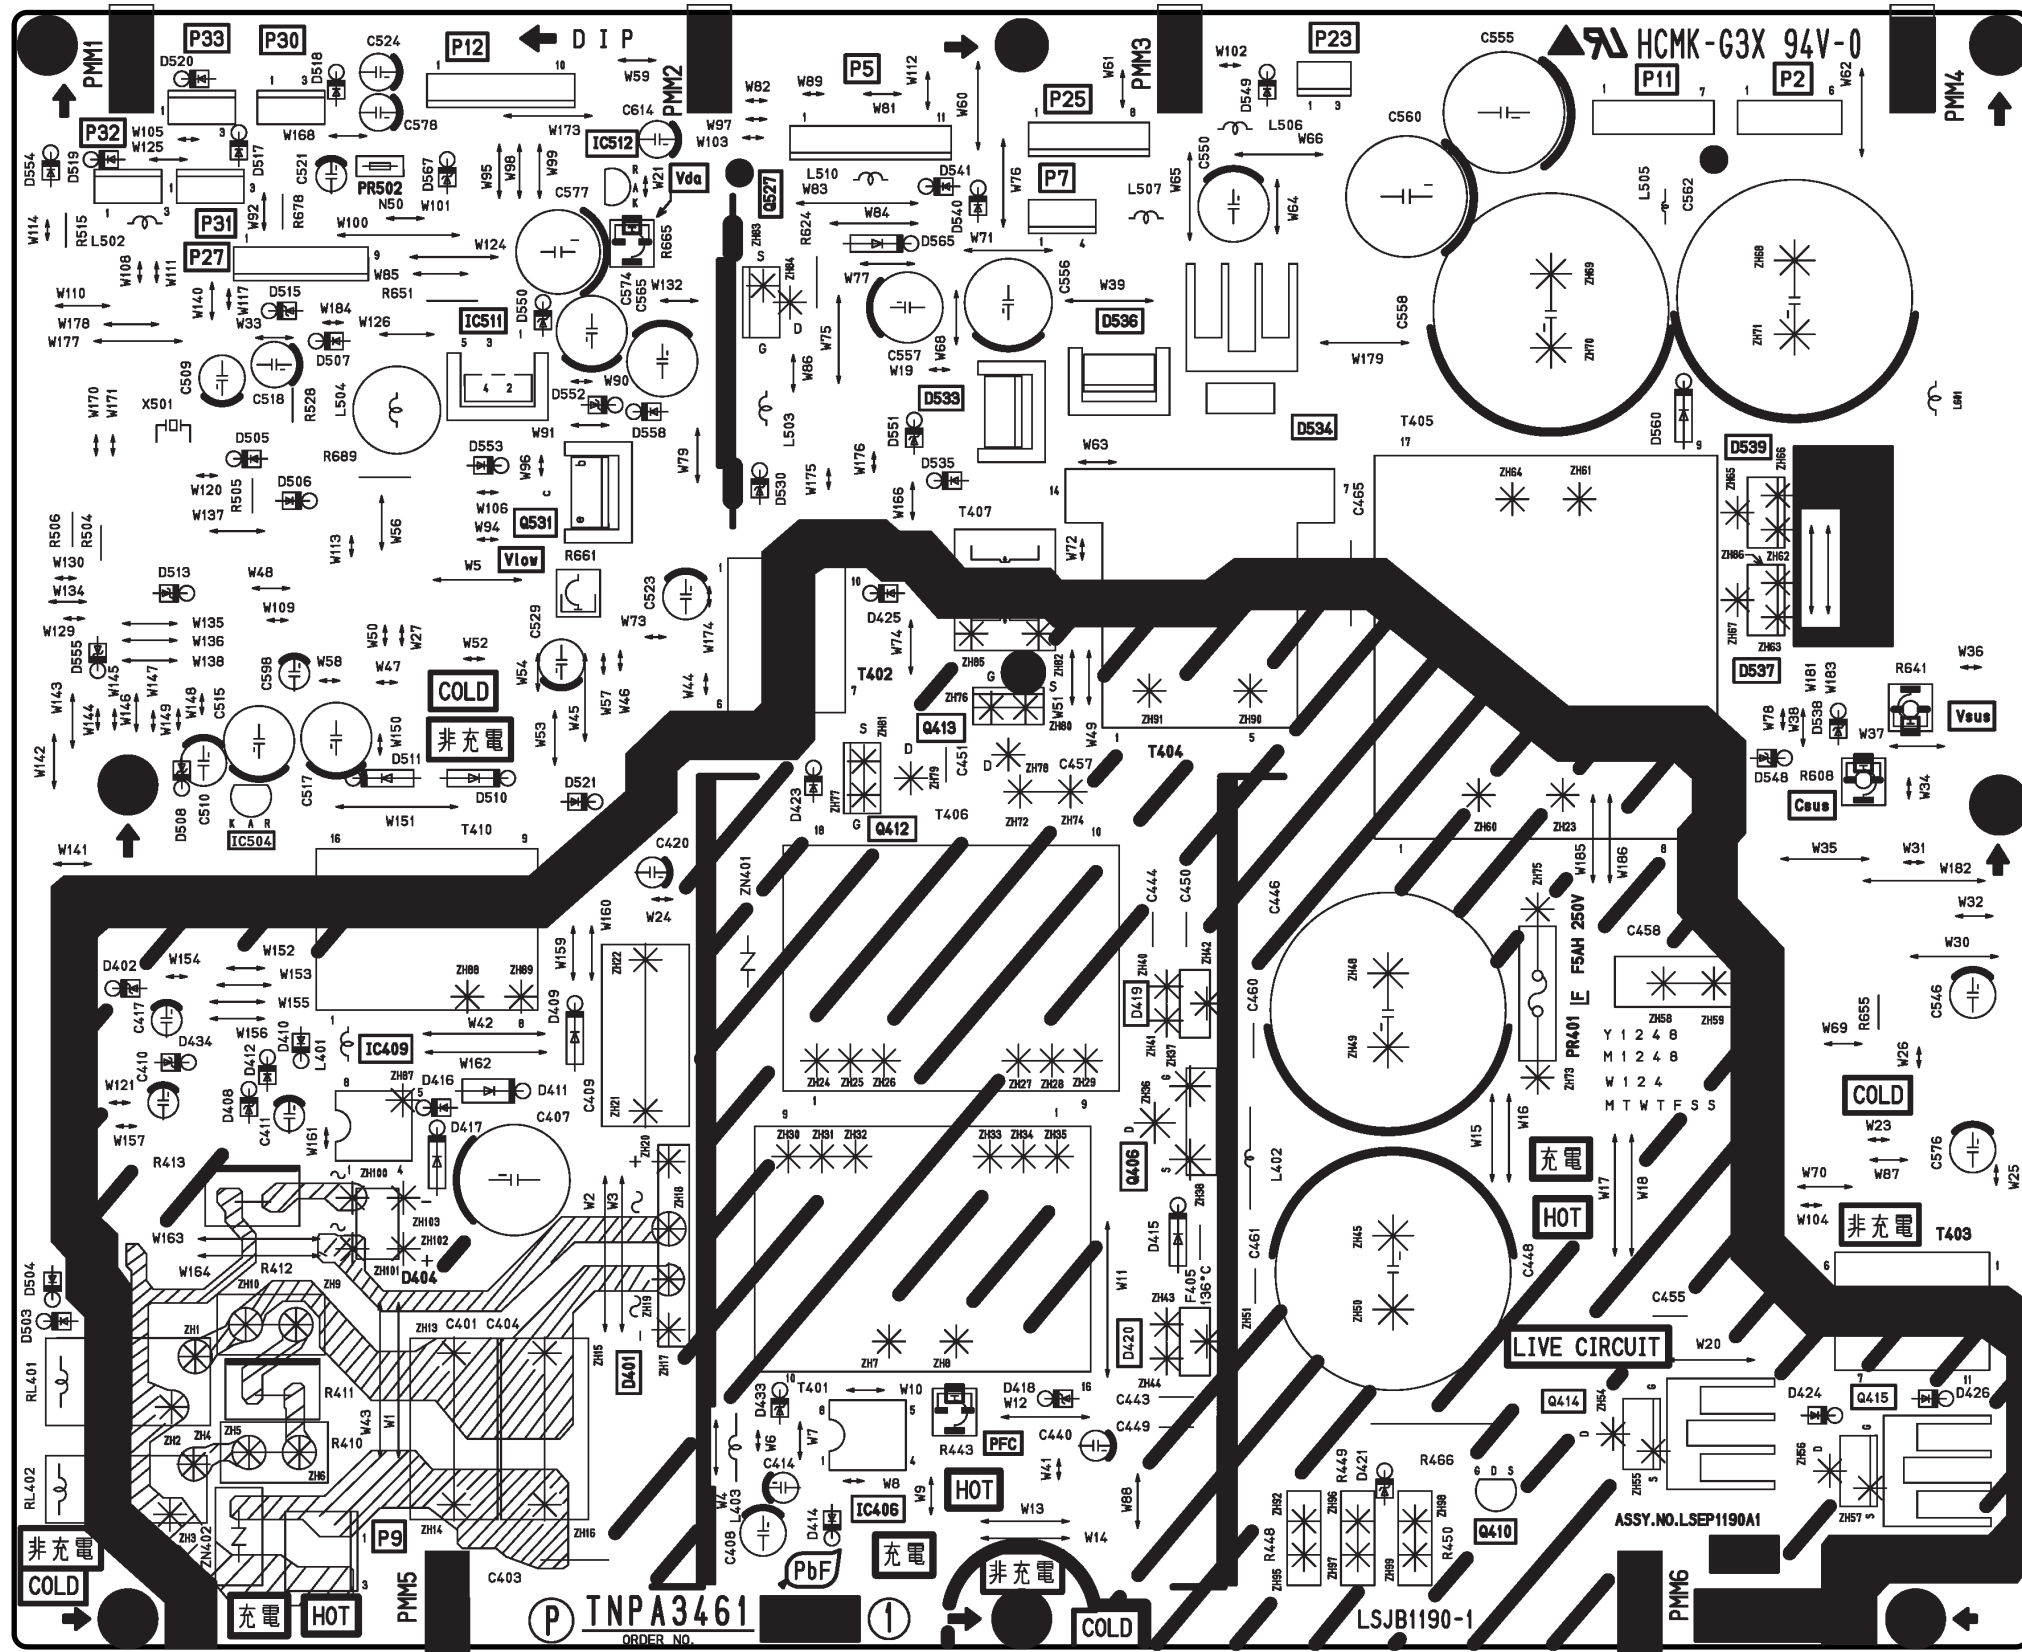



TH-50PV30A/H/M/R
P-BOARD TNPA3461

TH-50PV30A/H/M/R
P-BOARD TNPA3461

5.3. T, TA and TB-Board

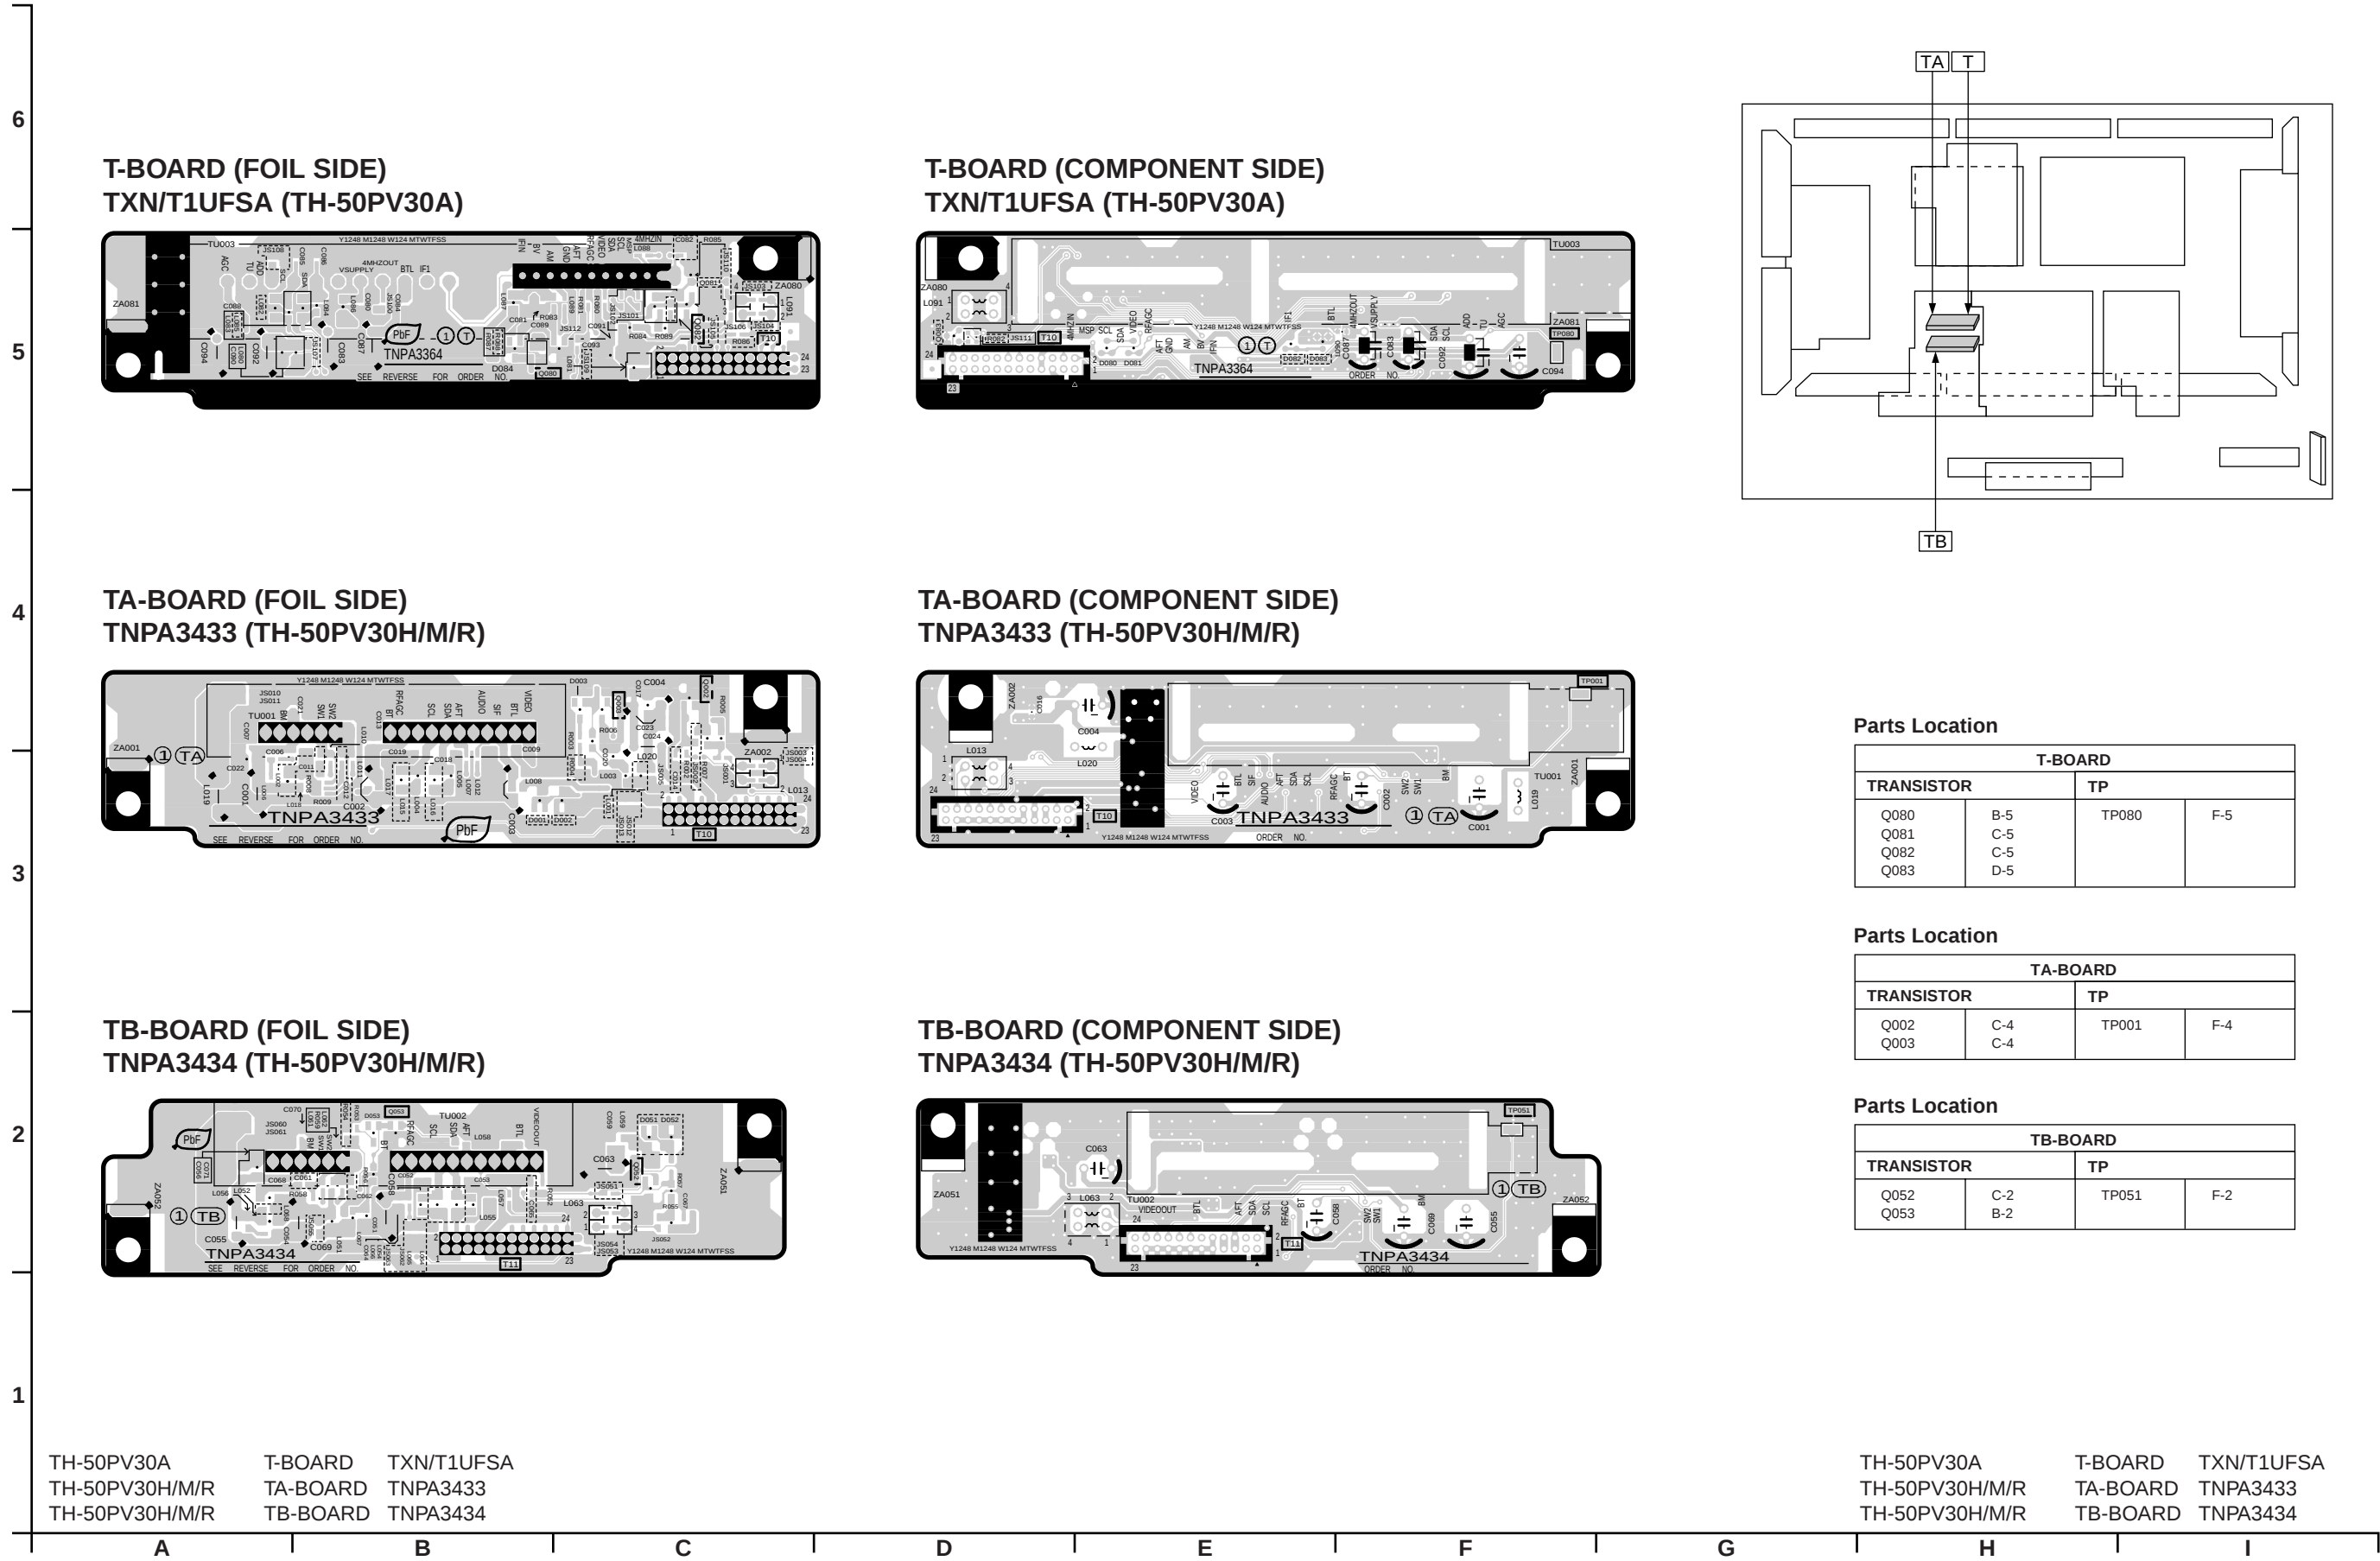

5.4. H-Board

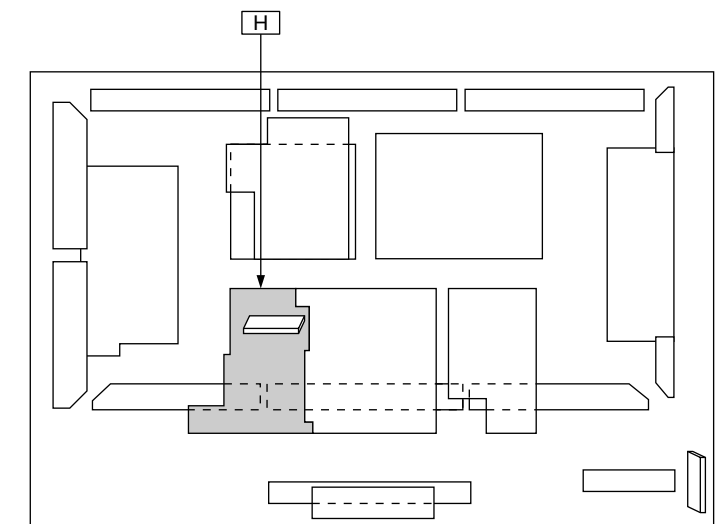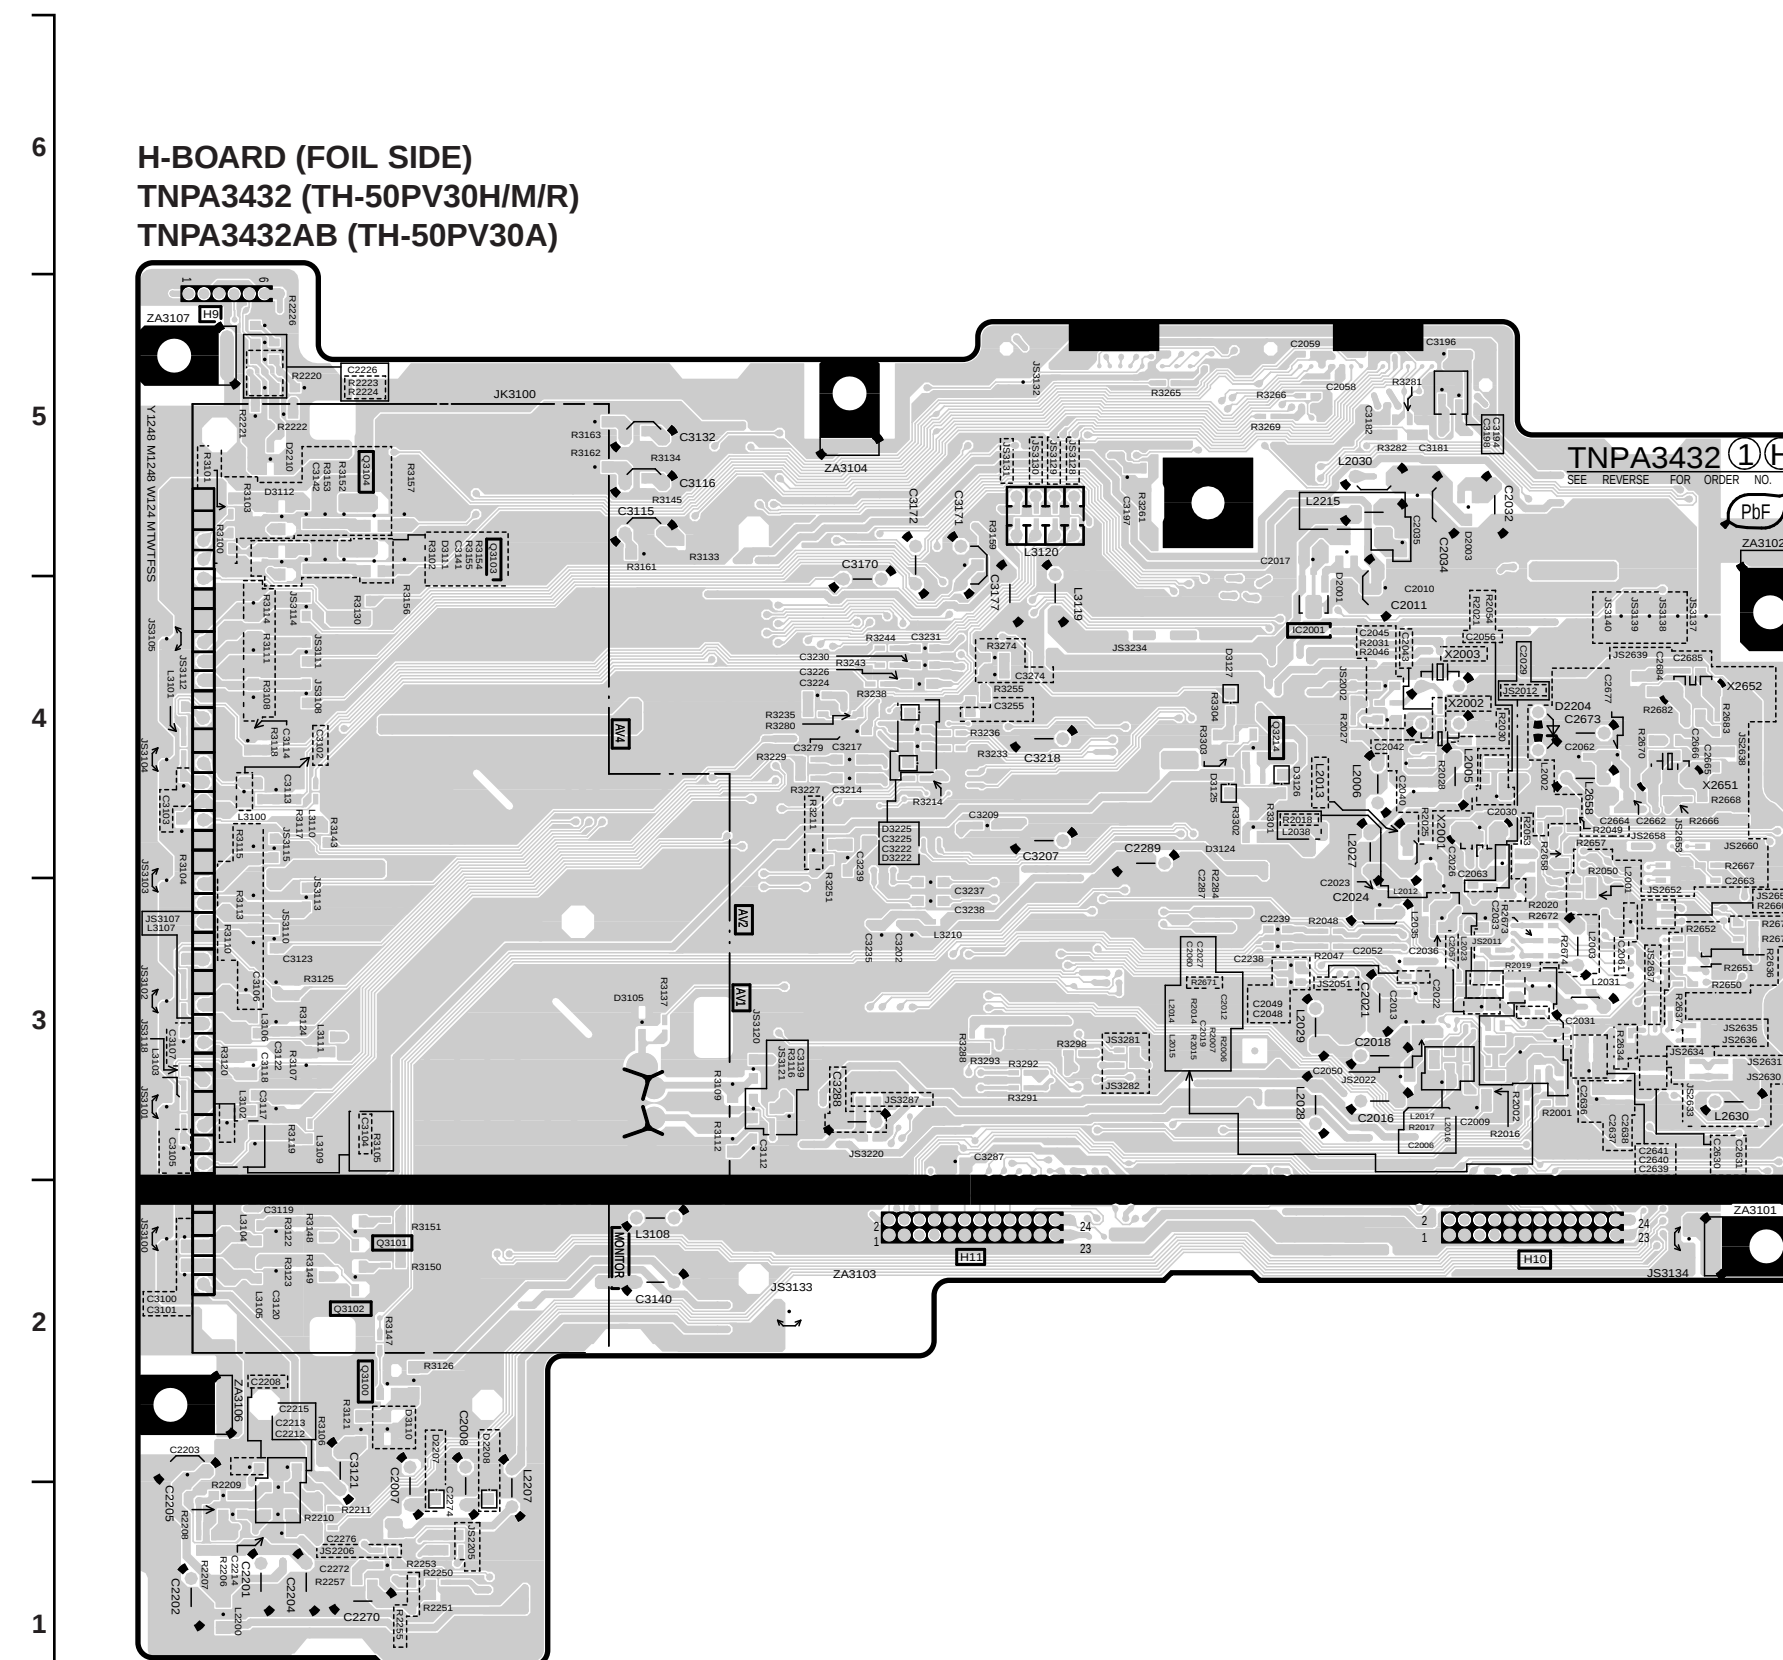



Parts Location

H-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC2001	E-4	Q3100	B-2
		Q3101	B-2
		Q3102	A-2
		Q3103	B-5
		Q3104	B-5
		Q3214	E-4

TH-50PV30H/M/R	H-BOARD	TNPA3432
TH-50PV30A	H-BOARD	TNPA3432AB


TH-50PV30H/M/R	H-BOARD	TNPA3432
TH-50PV30A	H-BOARD	TNPA3432AB

3
—
2
—
1

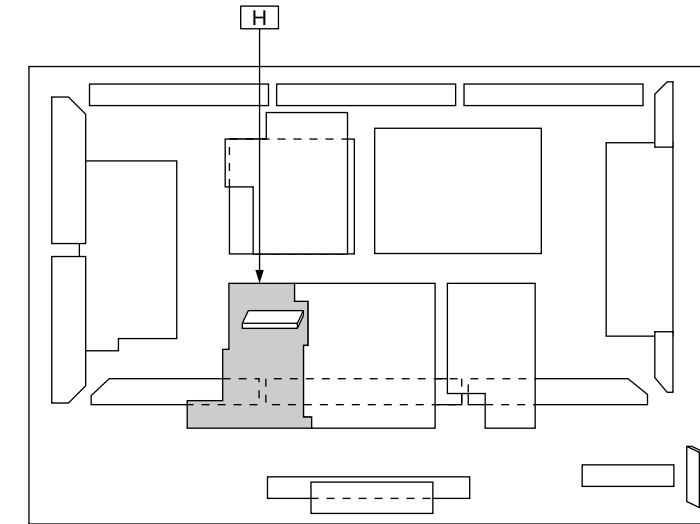



H-BOARD (COMPONENT SIDE)			
IC		Q2203	E-1
IC2002	B-4	Q2204	E-1
IC2003	B-4	Q3170	D-5
IC2004	A-5	Q3171	D-5
IC2200	F-1	Q3172	D-5
IC2206	C-3	Q3173	D-5
IC2207	E-1	Q3174	D-5
IC2651	A-3	Q3175	D-5
IC2652	A-3	Q3202	D-3
IC2653	A-4	Q3203	D-3
IC2654	B-4	Q3208	C-4
IC2655	A-4	Q3209	C-4
IC2670	A-3	Q3210	C-4
IC3200	C-3	Q3211	C-4
IC3280	C-2	Q3220	C-2
IC3281	D-3	Q3221	C-2
IC3290	C-3	Q3222	C-2
		Q3223	D-3
TRANSISTOR		TP	
Q2003	C-3	TP3108	B-5
Q2004	C-3	TP3109	B-5
Q2006	B-4	TP3110	A-4
Q2007	A-5	TP3111	B-5
Q2008	A-5	TP3117	B-3
Q2012	A-4	TP3119	A-5
Q2202	F-2		

5.5. DG-Board

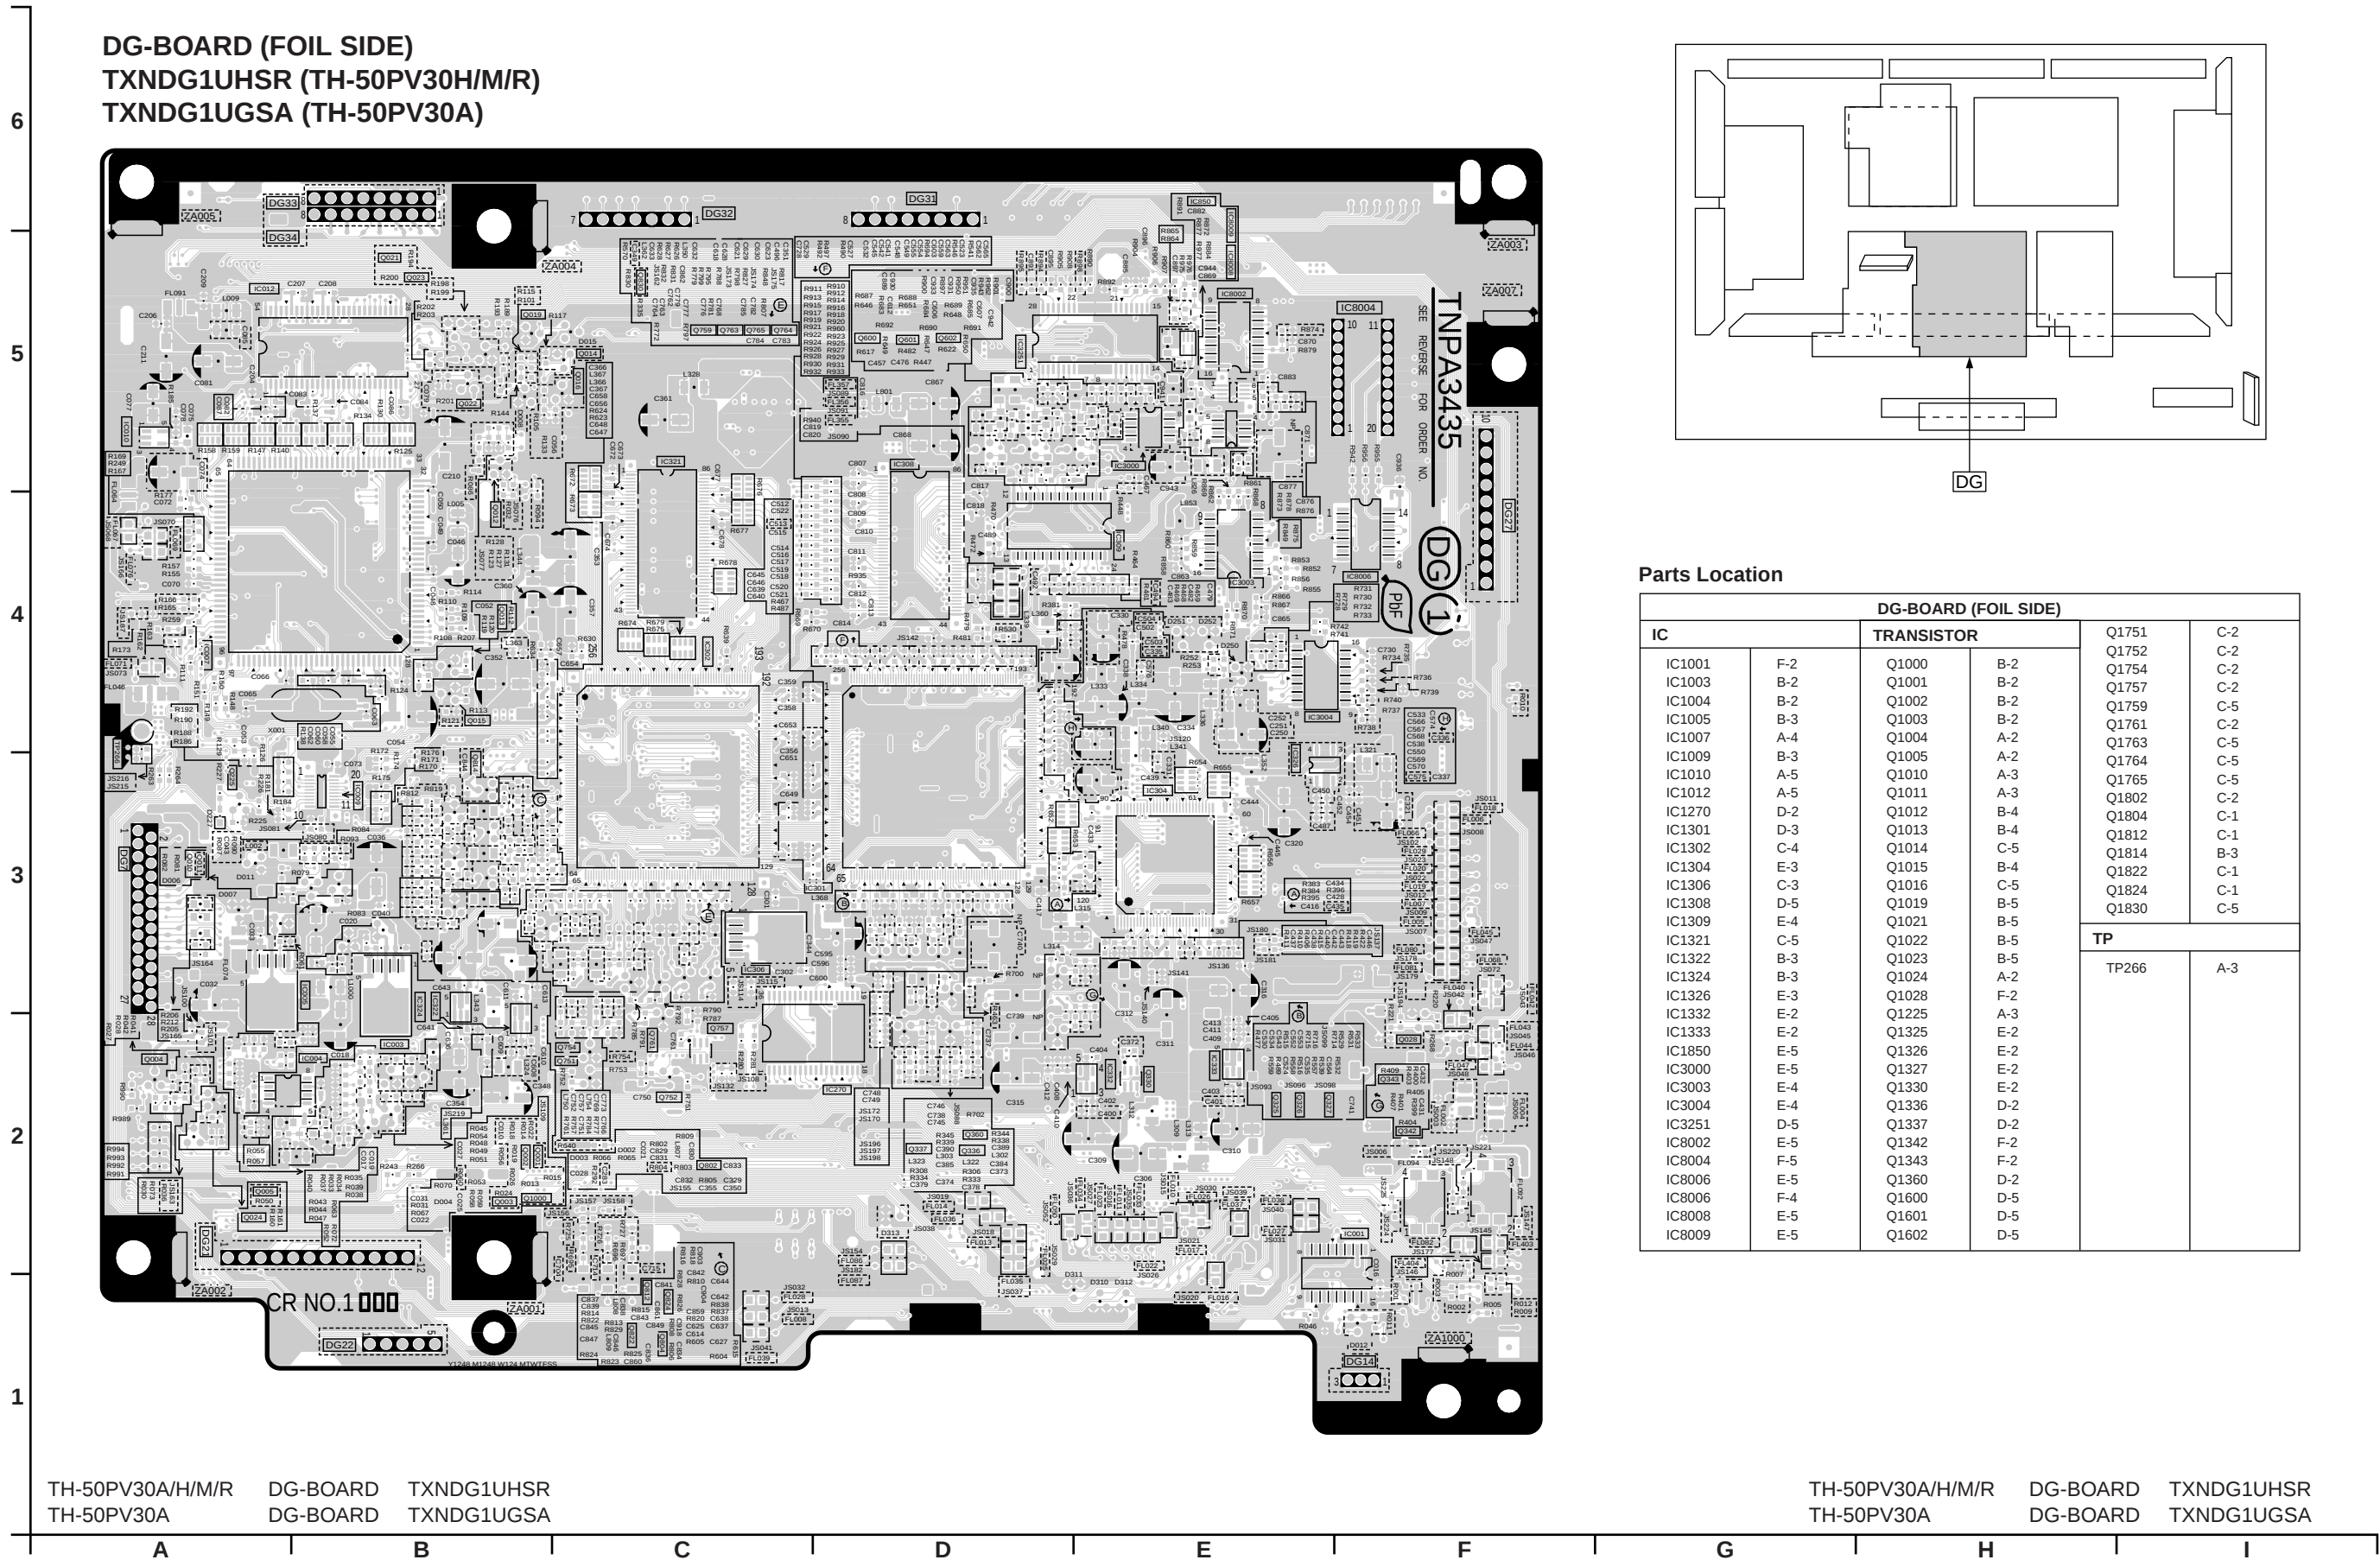

DG-BBOARD (COMPONENT SIDE)
TXNDG1UHSR (TH-50PV30H/M/R)
TXNDG1UGSA (TH-50PV30A)

6
5
4
3
2
1

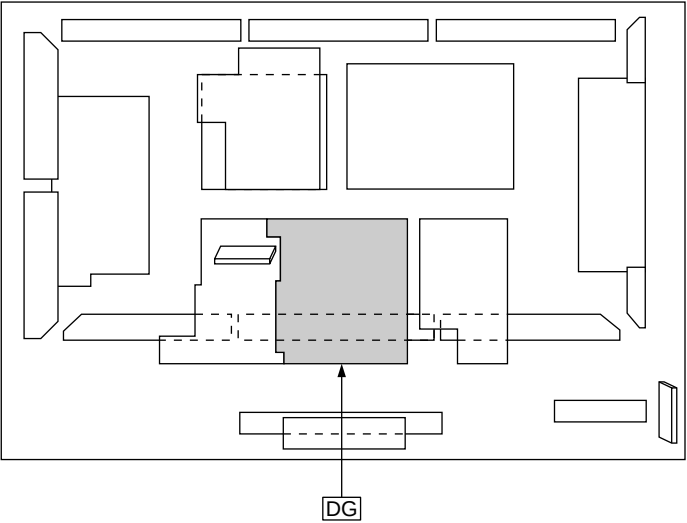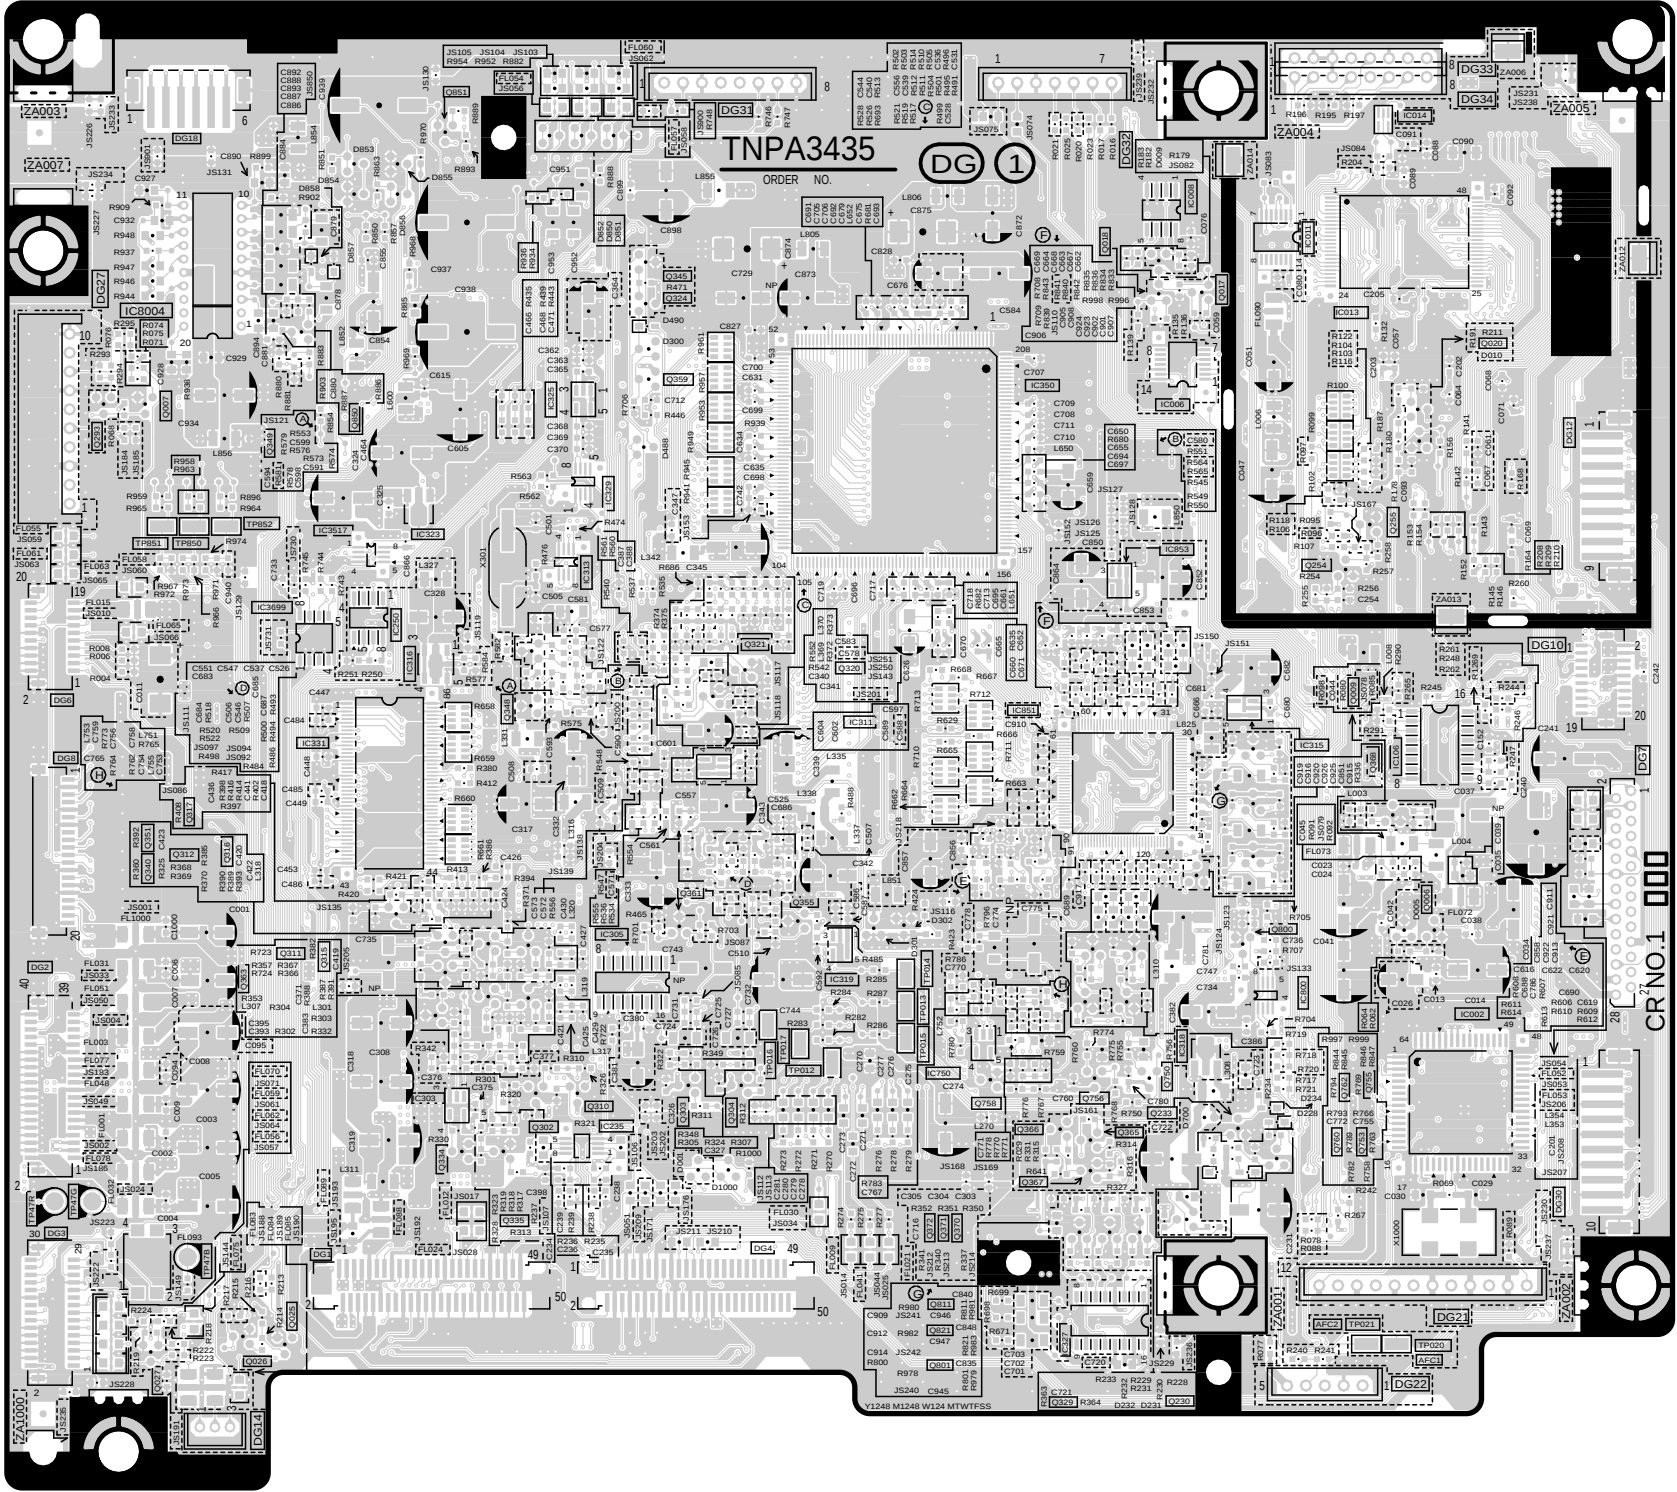

Parts Location

DG-BBOARD (COMPONENT SIDE)					
IC		TRANSISTOR			
IC1002	F-2	Q1006	E-3	Q1361	C-3
IC1006	E-4	Q1007	A-4	Q1363	B-3
IC1008	E-5	Q1009	E-3	Q1365	D-2
IC1011	E-5	Q1017	E-5	Q1366	D-2
IC1013	E-5	Q1018	D-5	Q1367	D-2
IC1014	E-5	Q1020	F-5	Q1368	E-3
IC1106	E-3	Q1025	B-1	Q1370	D-2
IC1235	C-2	Q1026	B-1	Q1371	D-2
IC1250	B-4	Q1027	A-1	Q1372	D-2
IC1303	B-2	Q1230	E-1	Q1750	E-2
IC1305	C-3	Q1233	E-2	Q1753	E-2
IC1311	D-3	Q1254	E-4	Q1755	E-2
IC1313	C-4	Q1255	E-4	Q1756	D-2
IC1315	E-3	Q1293	A-4	Q1758	D-2
IC1316	B-4	Q1302	C-2	Q1760	E-2
IC1318	E-2	Q1303	C-2	Q1762	E-2
IC1319	D-3	Q1304	C-2	Q1800	E-3
IC1323	B-4	Q1310	C-2	Q1801	D-1
IC1325	C-4	Q1311	B-3	Q1811	D-2
IC1327	D-1	Q1312	A-3	Q1821	D-1
IC1329	C-4	Q1315	B-3	Q1850	B-4
IC1331	B-3	Q1316	A-3	Q1851	B-5
IC1350	D-5	Q1317	A-3	TP	
IC1750	D-2	Q1320	D-4	TP012	C-2
IC1800	E-2	Q1321	C-4	TP013	D-2
IC1851	D-3	Q1324	C-5	TP014	D-3
IC1853	E-4	Q1329	D-1	TP015	D-2
IC3517	B-4	Q1334	B-2	TP016	C-2
IC3699	B-4	Q1335	B-2	TP017	C-2
IC8004	A-5	Q1340	A-3	TP020	E-1
		Q1345	C-5	TP021	E-1
		Q1348	B-3	TP47B	A-2
		Q1349	B-4	TP47G	A-2
		Q1351	A-3	TP47R	A-2
		Q1355	C-3	TP850	A-4
		Q1359	C-5	TP851	A-4
				TP852	B-4

TH-50PV30A/H/M/R
TH-50PV30A

DG-BBOARD
DG-BBOARD

TXNDG1UHSR
TXNDG1UGSA

A

B

C

D

E

F

G

H

I


TH-50PV30A/H/M/R
TH-50PV30A

DG-BBOARD
DG-BBOARD

TXNDG1UHSR
TXNDG1UGSA

5.6. D-Board

D-BOARD (FOIL SIDE)
TZTNP01UGSE

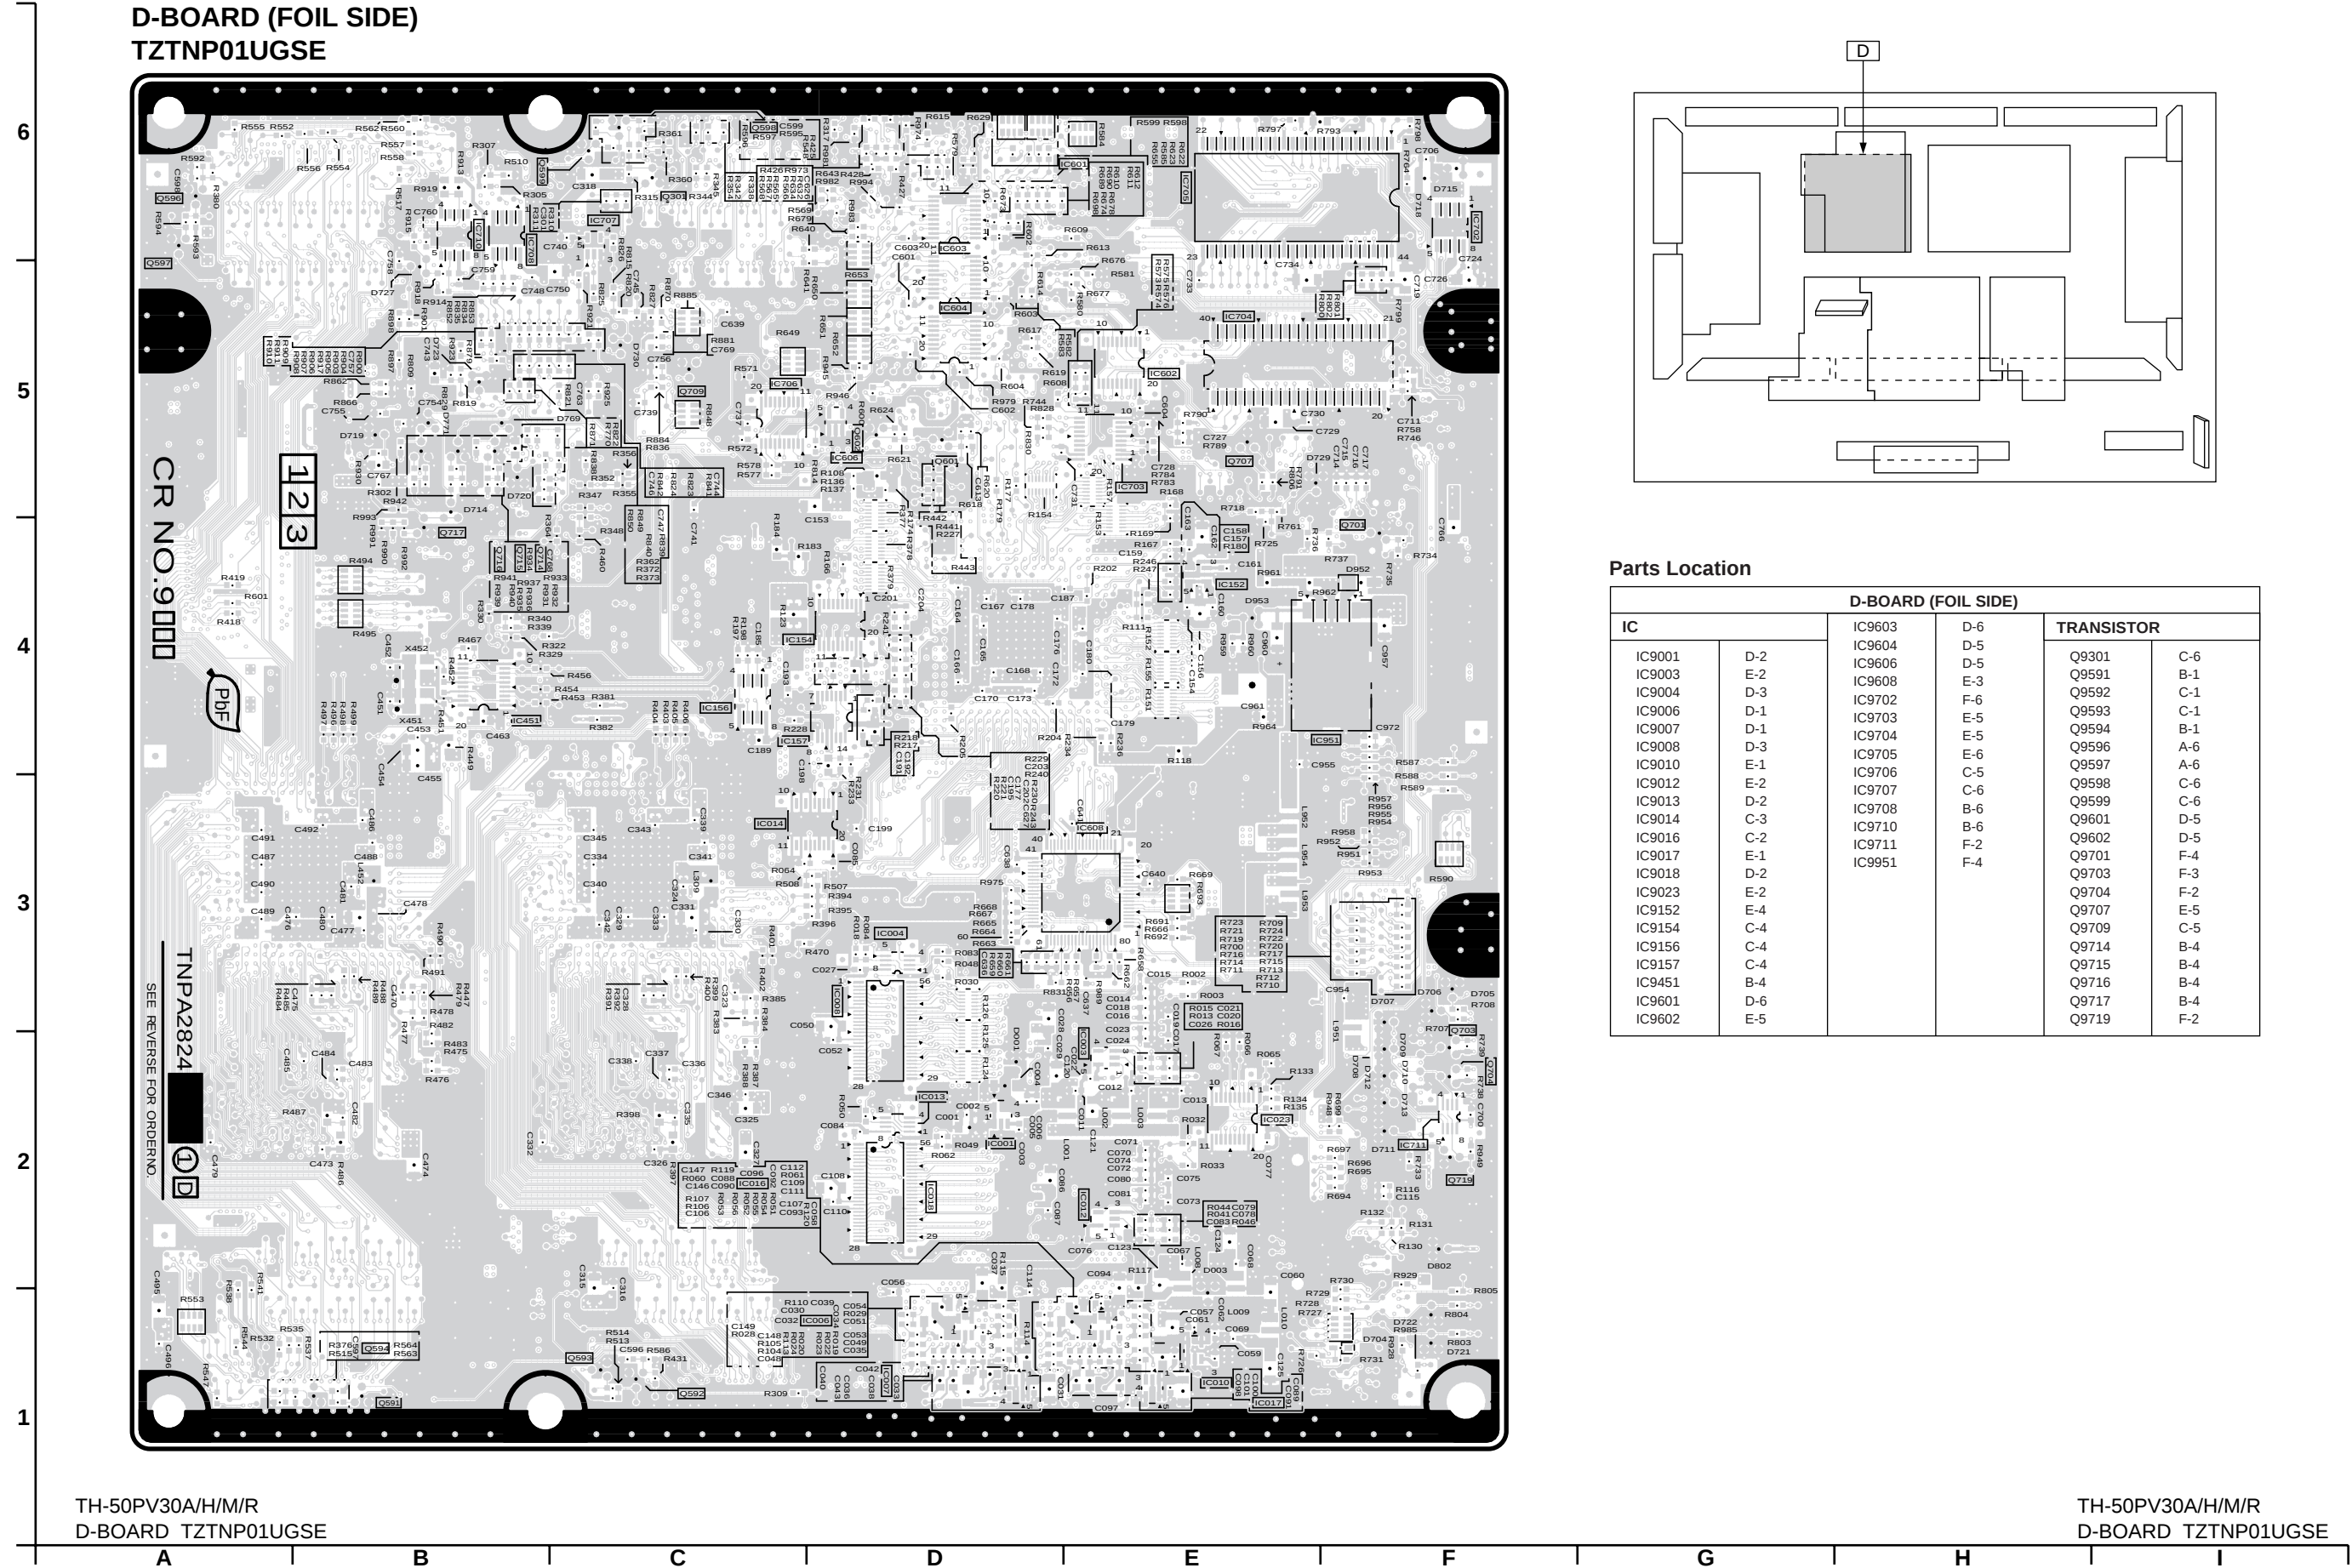



Parts Location

D-BOARD (FOIL SIDE)					
IC			D-6	TRANSISTOR	
IC9001	D-2	IC9603	D-6	Q9301	C-6
IC9003	E-2	IC9604	D-5	Q9591	B-1
IC9004	D-3	IC9606	D-5	Q9592	C-1
IC9006	D-1	IC9702	F-6	Q9593	C-1
IC9007	D-1	IC9703	E-5	Q9594	B-1
IC9008	D-3	IC9704	E-5	Q9596	A-6
IC9010	E-1	IC9705	E-6	Q9597	A-6
IC9012	E-2	IC9706	C-5	Q9598	C-6
IC9013	D-2	IC9708	B-6	Q9599	C-6
IC9014	C-3	IC9710	B-6	Q9601	D-5
IC9016	C-2	IC9711	F-2	Q9602	D-5
IC9017	E-1	IC9951	F-4	Q9701	F-4
IC9018	D-2			Q9703	F-3
IC9023	E-2			Q9704	F-2
IC9152	E-4			Q9707	E-5
IC9154	C-4			Q9709	C-5
IC9156	C-4			Q9714	B-4
IC9157	C-4			Q9715	B-4
IC9451	B-4			Q9716	B-4
IC9601	D-6			Q9717	B-4
IC9602	E-5			Q9719	F-2

TH-50PV30A/H/M/R
D-BOARD TZTNP01UGSE

TH-50PV30A/H/M/R
D-BOARD TZTNP01UGSE

D-BOARD (COMPONENT SIDE)
TZTNP01UGSE

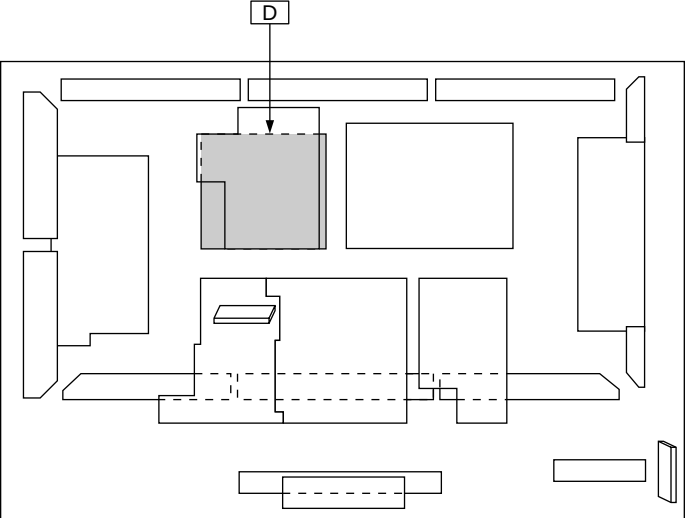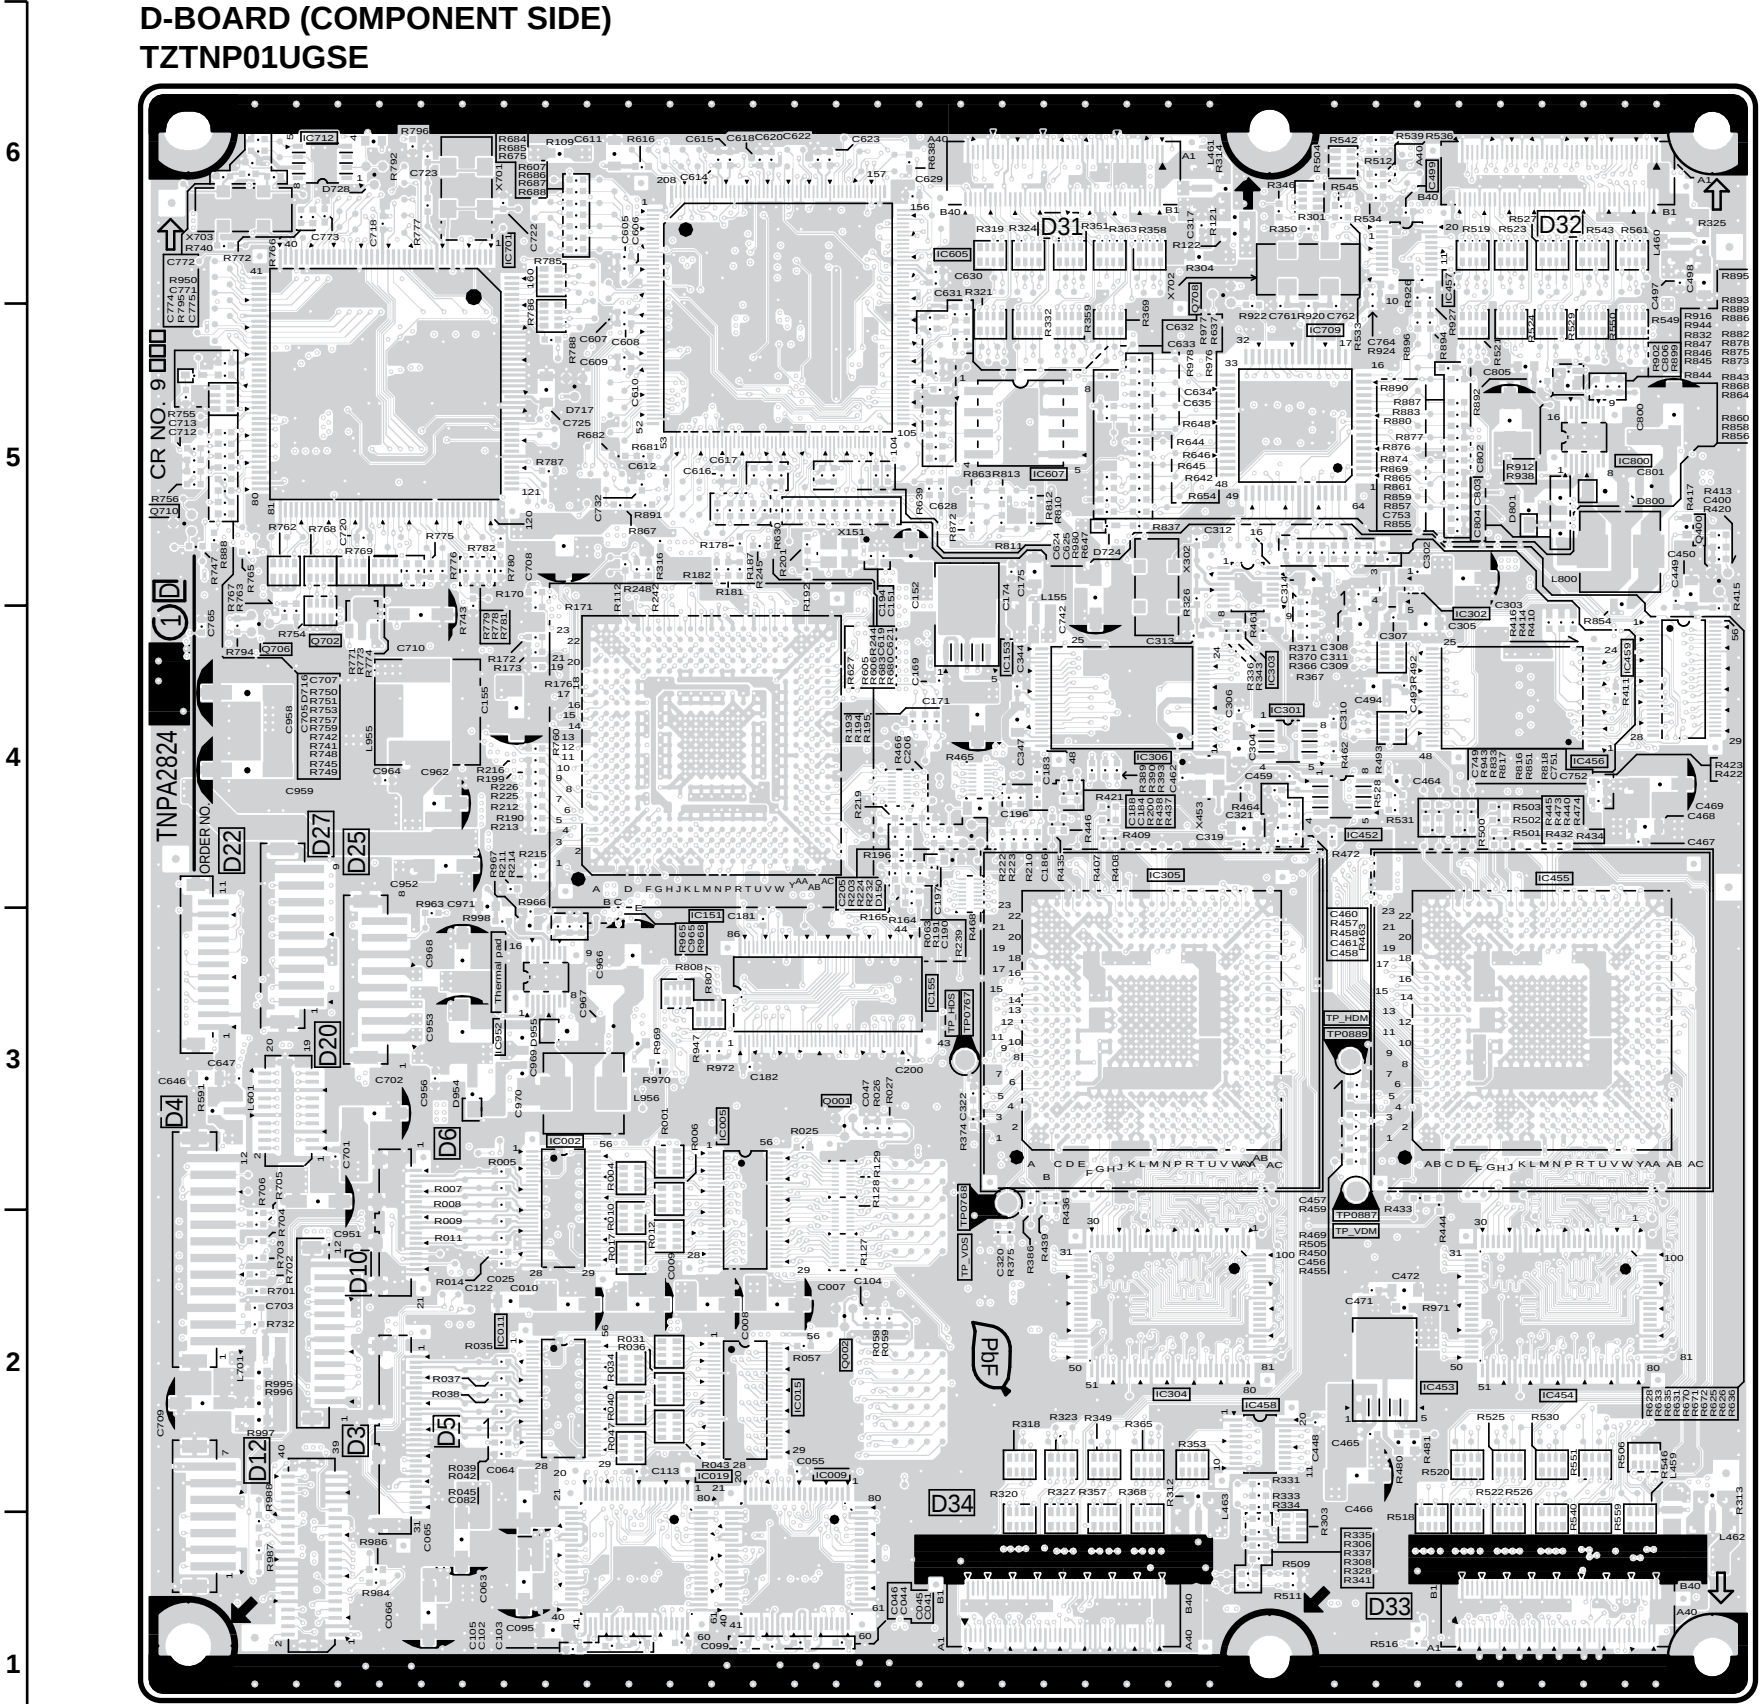



Parts Location

D-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR		TP	
IC9002	B-3	IC9459	F-4	TP0767	D-3
IC9005	C-3	IC9515	C-4	TP0768	D-3
IC9009	C-2	IC9605	C-6	TP0887	E-3
IC9011	B-2	IC9607	D-5	TP0889	E-3
IC9015	C-2	IC9701	B-6		
IC9019	C-2	IC9709	E-5		
IC9153	D-4	IC9712	A-6		
IC9156	C-3	IC9800	F-5		
IC9301	E-4				
IC9302	E-4				
IC9303	E-4				
IC9304	D-2				
IC9305	D-4				
IC9306	D-4				
IC9452	E-4				
IC9453	E-2				
IC9454	F-2				
IC9455	F-3				
IC9456	F-4				
IC9457	E-6				
IC9458	E-2				

5.7. SC-Board

SC-BOARD (FOIL SIDE)
TXNSC20QNS

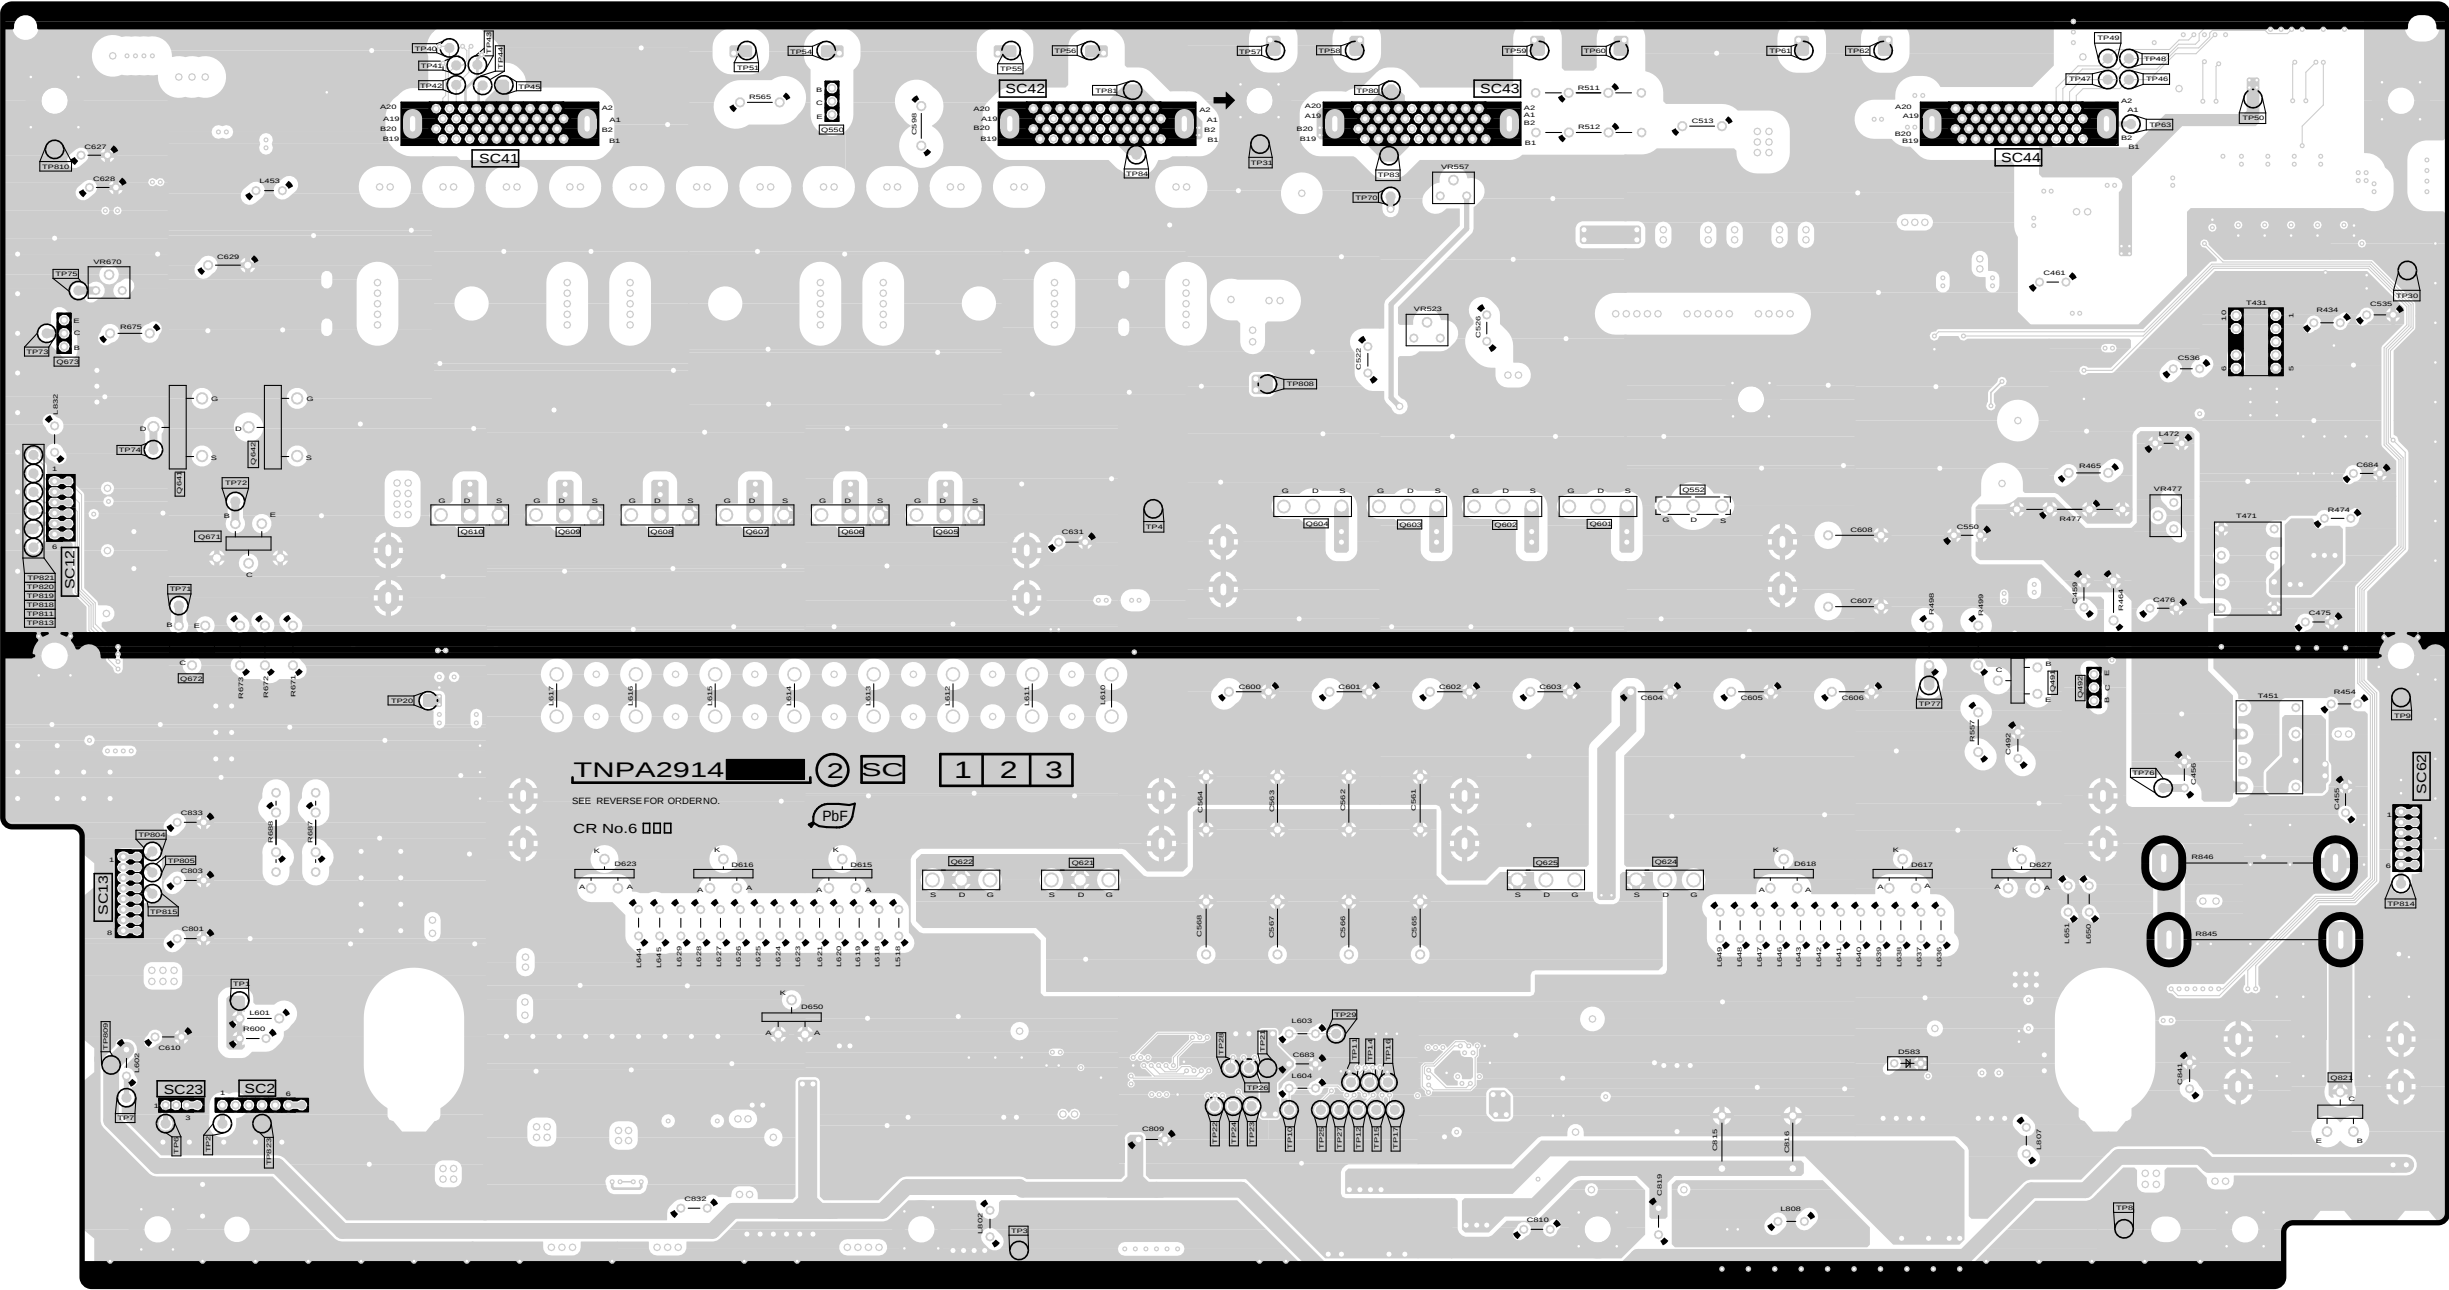

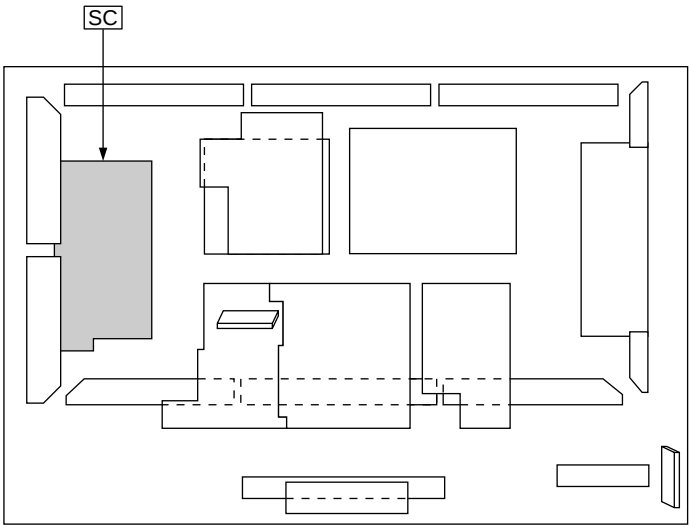


Parts Location

SC-BOARD (FOIL SIDE)					
TRANSISTOR		TP			
Q6491	H-3	TP1	B-2	TP55	D-5
Q6492	H-3	TP2	D-2	TP56	D-5
Q6550	D-5	TP3	A-2	TP57	E-5
Q6552	F-4	TP4	E-4	TP58	E-5
Q6601	F-4	TP6	A-2	TP59	F-5
Q6602	F-4	TP7	A-2	TP60	F-5
Q6603	E-4	TP8	H-2	TP61	G-5
Q6604	E-4	TP9	I-3	TP62	G-5
Q6605	D-4	TP10	E-2	TP63	H-5
Q6606	D-4	TP11	E-2	TP70	E-5
Q6607	C-4	TP12	E-2	TP71	A-4
Q6608	C-4	TP14	E-2	TP72	B-4
Q6609	C-4	TP15	E-2	TP73	A-4
Q6610	B-4	TP16	E-2	TP74	A-4
Q6621	D-3	TP17	E-2	TP75	A-5
Q6622	D-3	TP20	B-3	TP76	H-3
Q6624	F-3	TP21	E-2	TP77	G-3
Q6625	F-3	TP22	E-2	TP80	E-5
Q6641	A-4	TP23	E-2	TP81	E-5
Q6642	B-4	TP24	E-2	TP83	E-5
Q6671	A-4	TP25	E-2	TP84	E-5
Q6672	A-3	TP26	E-2	TP6804	A-3
Q6673	A-4	TP27	E-2	TP6806	A-3
Q6821	I-2	TP28	E-2	TP6808	E-4
		TP29	E-2	TP6809	A-2
		TP30	I-5	TP6810	A-5
		TP31	E-5	TP6811	A-4
		TP40	B-5	TP6813	A-4
		TP41	B-5	TP6814	I-3
		TP42	B-5	TP6815	A-3
		TP43	B-5	TP6818	A-4
		TP44	B-5	TP6819	A-4
		TP45	B-5	TP6820	A-4
		TP46	H-5	TP6821	A-4
		TP47	H-5	TP6822	B-2
		TP48	H-5		
		TP49	H-5		
		TP50	H-5		
		TP51	C-5		
		TP54	C-5		

Parts Location

SC-BOARD (COMPONENT SIDE)							
IC		IC6801	I-3	Q6541	F-5	Q6624	D-3
IC6431	B-5	IC6802	D-2	Q6542	F-5	Q6625	D-3
IC6434	A-5	IC6803	G-2	Q6543	F-5	Q6627	F-2
IC6451	B-3	IC6804	H-4	Q6544	F-5	Q6628	F-2
IC6452	B-4	IC6805	C-2	Q6545	F-5	Q6629	D-2
IC6453	B-5	TRANSISTOR		Q6546	G-5	Q6630	D-2
IC6454	B-5	Q6308	G-4	Q6547	G-5	Q6641	H-4
IC6455	B-5	Q6431	A-4	Q6548	G-5	Q6642	H-4
IC6456	A-4	Q6432	A-5	Q6549	G-5	Q6645	H-5
IC6457	B-5	Q6435	A-5	Q6550	F-5	Q6646	H-5
IC6458	A-4	Q6436	A-5	Q6551	D-5	Q6671	H-4
IC6459	B-4	Q6451	A-3	Q6552	C-4	Q6672	H-4
IC6467	B-4	Q6453	A-3	Q6553	G-4	Q6673	I-5
IC6471	B-4	Q6458	A-3	Q6554	H-4	Q6811	D-2
IC6472	B-4	Q6471	A-4	Q6555	G-5	Q6812	C-2
IC6480	A-4	Q6472	A-4	Q6556	C-5	Q6813	G-2
IC6491	B-3	Q6474	A-4	Q6558	H-5	Q6814	G-2
IC6501	A-5	Q6475	A-4	Q6561	C-5	Q6815	F-2
IC6502	B-5	Q6476	B-5	Q6562	C-5	Q6816	F-2
IC6503	B-5	Q6477	B-5	Q6563	C-5	Q6817	G-2
IC6504	C-5	Q6491	B-3	Q6564	C-5	Q6818	G-2
IC6505	A-5	Q6492	B-3	Q6567	B-5	Q6819	F-2
IC6506	A-5	Q6512	C-5	Q6581	C-2	Q6820	F-2
IC6507	A-5	Q6513	B-5	Q6590	E-4	Q6821	A-2
IC6508	A-5	Q6520	D-5	Q6600	E-5	Q6822	D-2
IC6509	A-5	Q6521	E-5	Q6601	D-4	Q6823	D-2
IC6510	B-4	Q6522	B-4	Q6602	D-4	Q6824	C-2
IC6511	C-5	Q6523	E-4	Q6603	D-4	TP	
IC6512	B-4	Q6524	D-5	Q6604	E-4	TP6803	I-4
IC6521	E-5	Q6525	E-5	Q6605	F-4	TP15V	I-2
IC6541	E-5	Q6526	E-5	Q6606	F-4	TPAVAD	B-4
IC6542	C-5	Q6530	E-4	Q6607	G-4	TPCVDA	C-2
IC6543	B-5	Q6531	F-4	Q6609	G-4	TPSC1	D-5
IC6581	B-2	Q6532	F-4	Q6610	G-4	TPSC4	F-2
IC6601	E-4	Q6533	F-4	Q6611	E-4	TPSOS1	E-2
IC6602	F-2	Q6534	F-4	Q6612	E-4	TPSOS2	I-4
IC6603	D-2	Q6535	F-4	Q6613	E-4	TPVBK	H-5
IC6604	H-5	Q6536	G-4	Q6614	E-4	TPVDA	B-2
IC6605	E-2	Q6537	G-4	Q6616	E-2	TPVSCN	B-4
IC6606	D-2	Q6538	G-4	Q6617	E-2	TPVSET	C-3
IC6607	E-2	Q6539	G-4	Q6621	E-3	TPVSUS	H-3
IC6671	I-5	Q6540	E-5	Q6622	F-3		


SC-BEARD (COMPONENT SIDE)
TXNSC20QNS

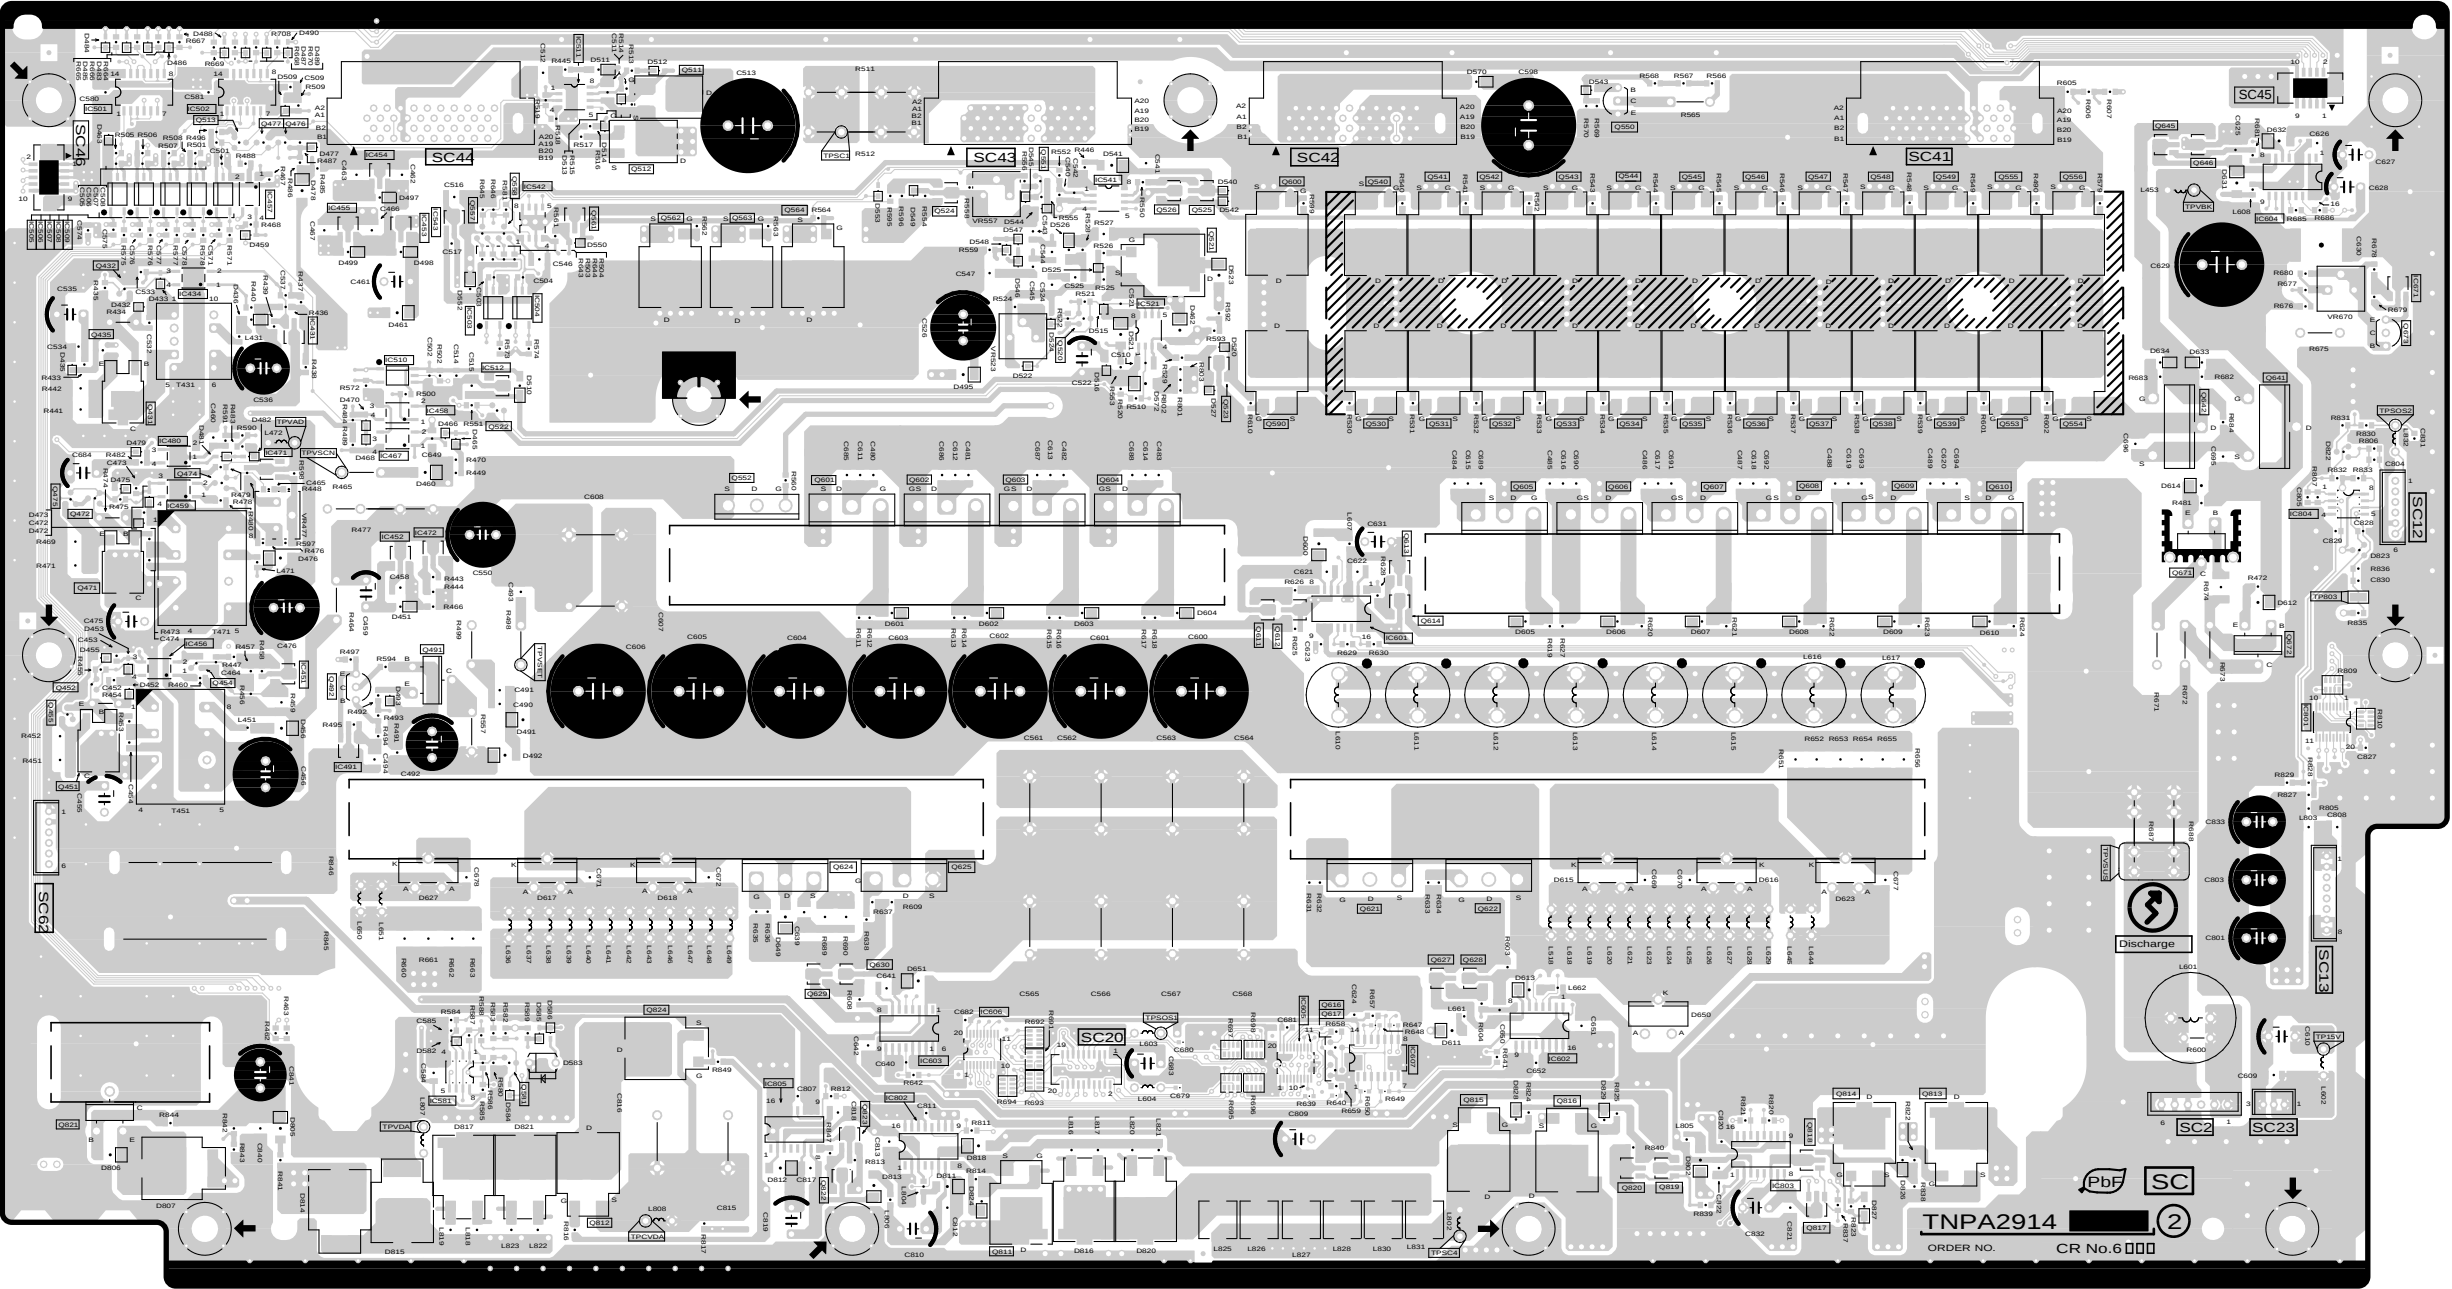

TH-50PV30A/H/M/R
SC-BEARD TXNSC20QNS

TH-50PV30A/H/M/R
SC-BEARD TXNSC20QNS


5.8. SS-Board

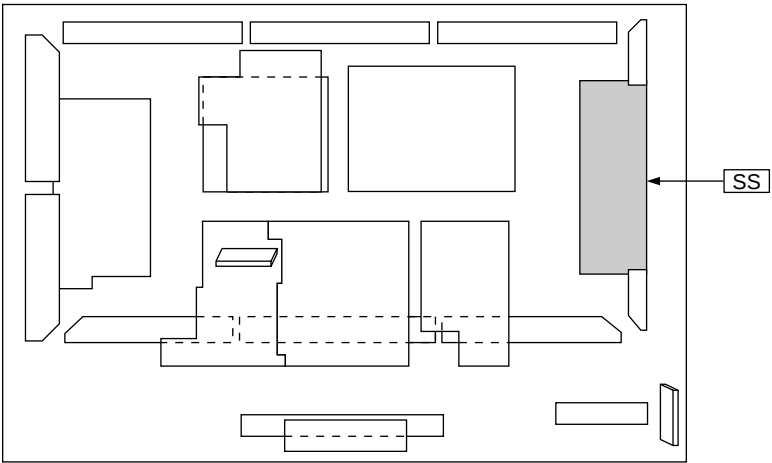

Parts Location

SS-BOARD (FOIL SIDE)					
TRANSISTOR		TP			
Q6711	C-2	TP1	A-4	TP23	A-2
Q6712	C-2	TP2	A-4	TP24	B-2
Q6713	C-2	TP3	A-4	TP25	C-2
Q6714	C-2	TP4	F-2	TP26	E-2
Q6715	D-2	TP5	B-4	TP27	E-2
Q6716	E-2	TP6	A-4	TP28	F-2
Q6717	E-2	TP7	B-4	TP29	D-2
Q6718	E-2	TP8	B-4	TP30	A-2
Q6719	E-2	TP9	B-4	TP31	G-2
Q6720	F-2	TP10	B-4	TP32	A-2
Q6721	C-3	TP11	A-3	TP33	A-2
Q6722	C-3	TP12	B-4	TP6904	A-3
Q6723	E-3	TP13	A-2	TP6905	G-3
Q6724	E-3	TP14	A-2	TP6910	G-3
Q6731	F-2	TP15	A-2	TP6911	A-2
Q6738	G-2	TP16	A-2	TP6913	A-3
Q6739	F-2	TP17	A-2	TP6914	A-3
Q6921	G-3	TP18	A-2	TP6915	G-3
		TP19	A-2	TP6918	A-2
		TP20	A-2	TP6919	A-2
		TP21	A-2	TP6920	A-2
		TP22	A-2	TP6921	A-2
				TP6923	A-3

SS-BOARD (FOIL SIDE)
TXNSS20RTS

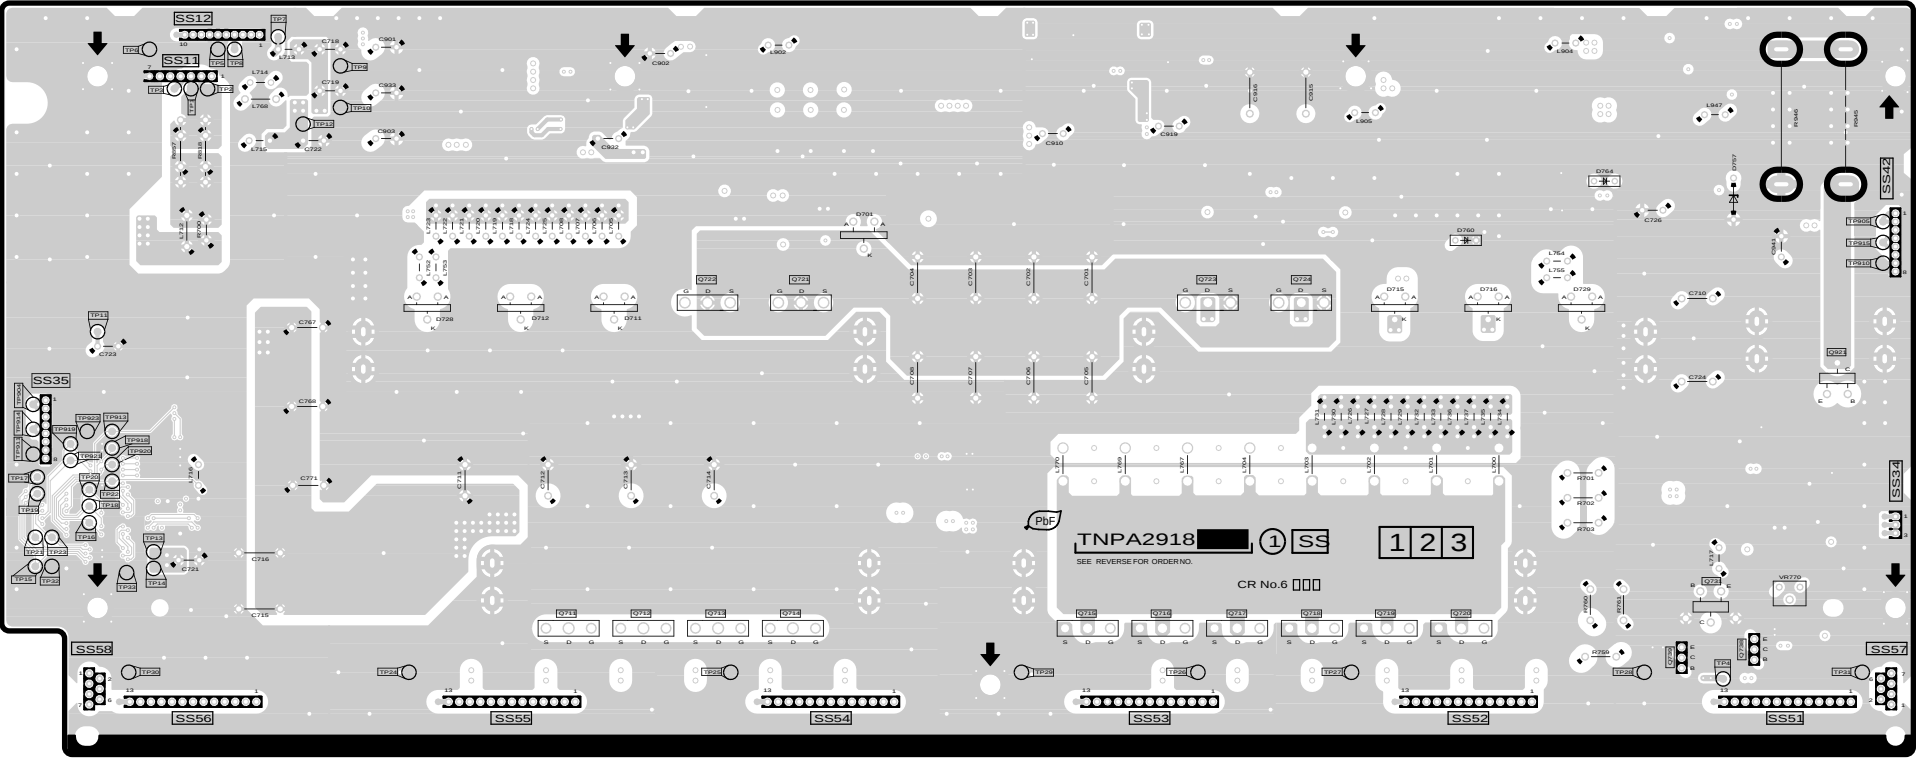


TH-50PV30A/H/M/R
SS-BOARD TXNSS20RTS


TH-50PV30A/H/M/R
SS-BOARD TXNSS20RTS

6
5
4
3
2
1

SS-BBOARD (COMPONENT SIDE)
TXNSS20RTS

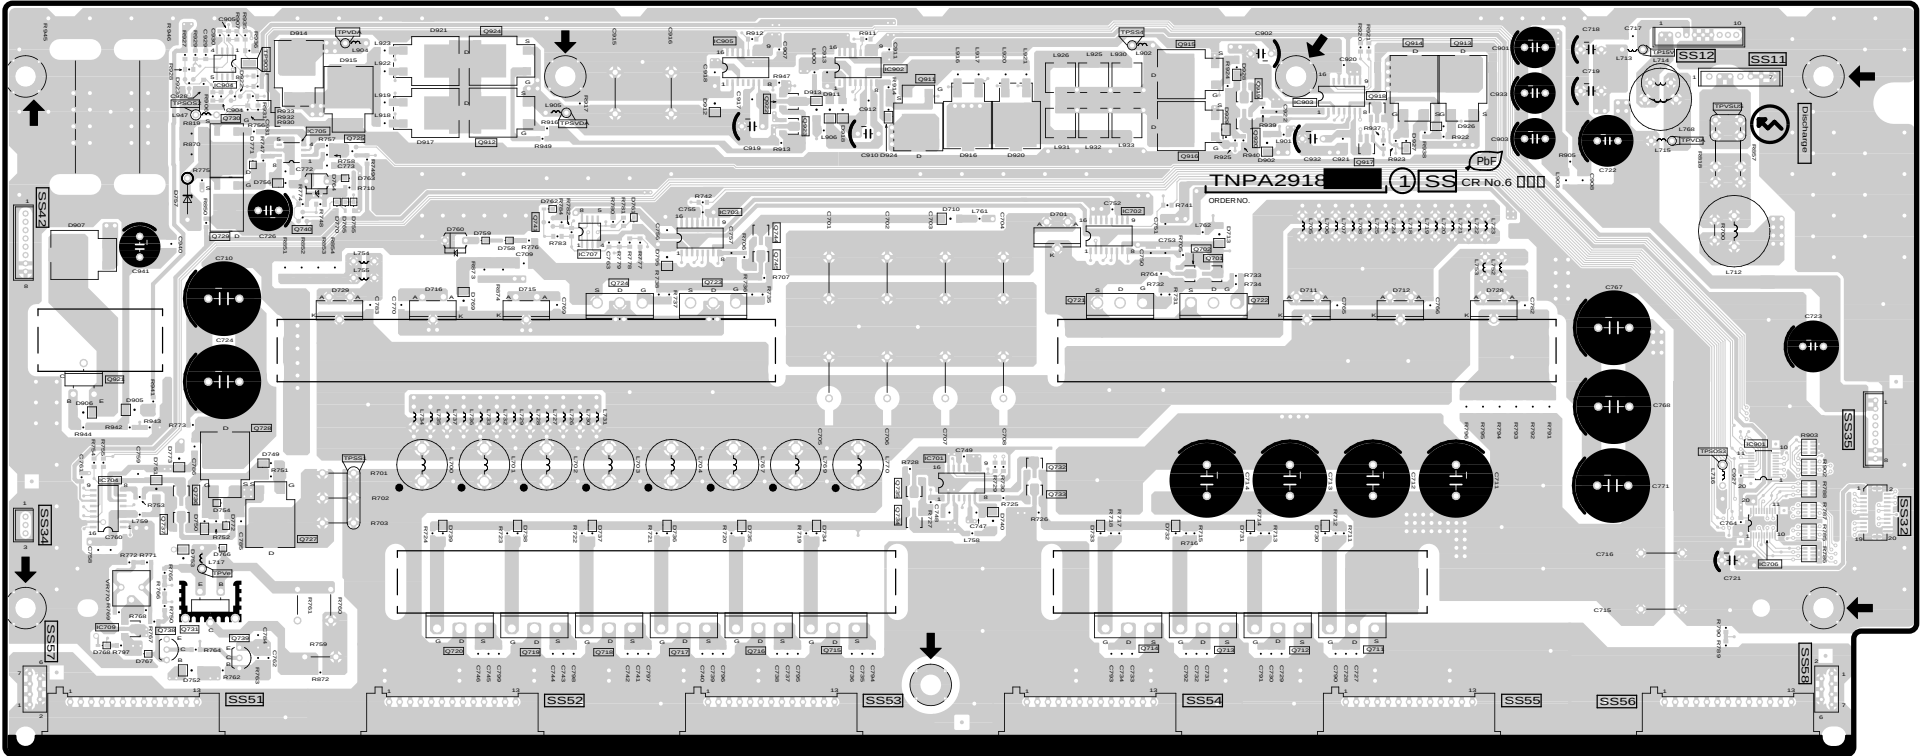

TH-50PV30A/H/M/R
SS-BBOARD TXNSS20RTS

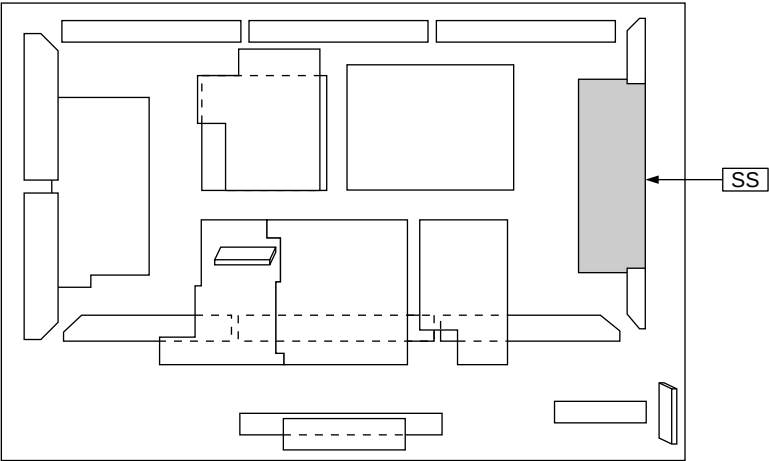



Parts Location

SS-BBOARD (COMPONENT SIDE)					
IC		Q6718		Q6912	
IC6701	D-2	Q6719	C-2	Q6913	F-4
IC6702	E-3	Q6720	B-2	Q6914	E-4
IC6703	C-3	Q6721	D-3	Q6915	E-4
IC6704	A-2	Q6722	E-3	Q6916	E-4
IC6705	B-4	Q6723	C-3	Q6917	E-4
IC6706	G-2	Q6724	C-3	Q6918	E-4
IC6707	C-3	Q6725	B-4	Q6919	E-4
IC6709	A-2	Q6727	B-2	Q6920	E-4
IC6901	G-3	Q6728	B-3	Q6921	A-3
IC6902	D-4	Q6729	A-3	Q6922	C-4
IC6903	E-4	Q6730	A-4	Q6923	C-4
IC6904	A-4	Q6731	A-2	Q6924	B-4
IC6905	C-4	Q6732	D-3	TP	
TRANSISTOR		Q6733	D-2		
		Q6734	D-2	TP6903	B-4
Q6701	E-3	Q6735	D-2	TP15V	F-4
Q6702	E-3	Q6736	A-2	TPSOS2	A-4
Q6711	E-2	Q6737	A-2	TPSOS3	F-3
Q6712	E-2	Q6738	A-2	TPSS1	B-2
Q6713	E-2	Q6739	B-2	TPSS4	E-4
Q6714	E-2	Q6740	B-3	TPSVDA	C-4
Q6715	D-2	Q6741	C-3	TPVDA	B-4
Q6716	C-2	Q6744	C-3	TPVDA	F-4
Q6717	C-2	Q6745	C-3	TPVe	A-2
		Q6911	D-4	TPVSUS	G-4

TH-50PV30A/H/M/R
SS-BBOARD TXNSS20RTS

5.9. K-Board

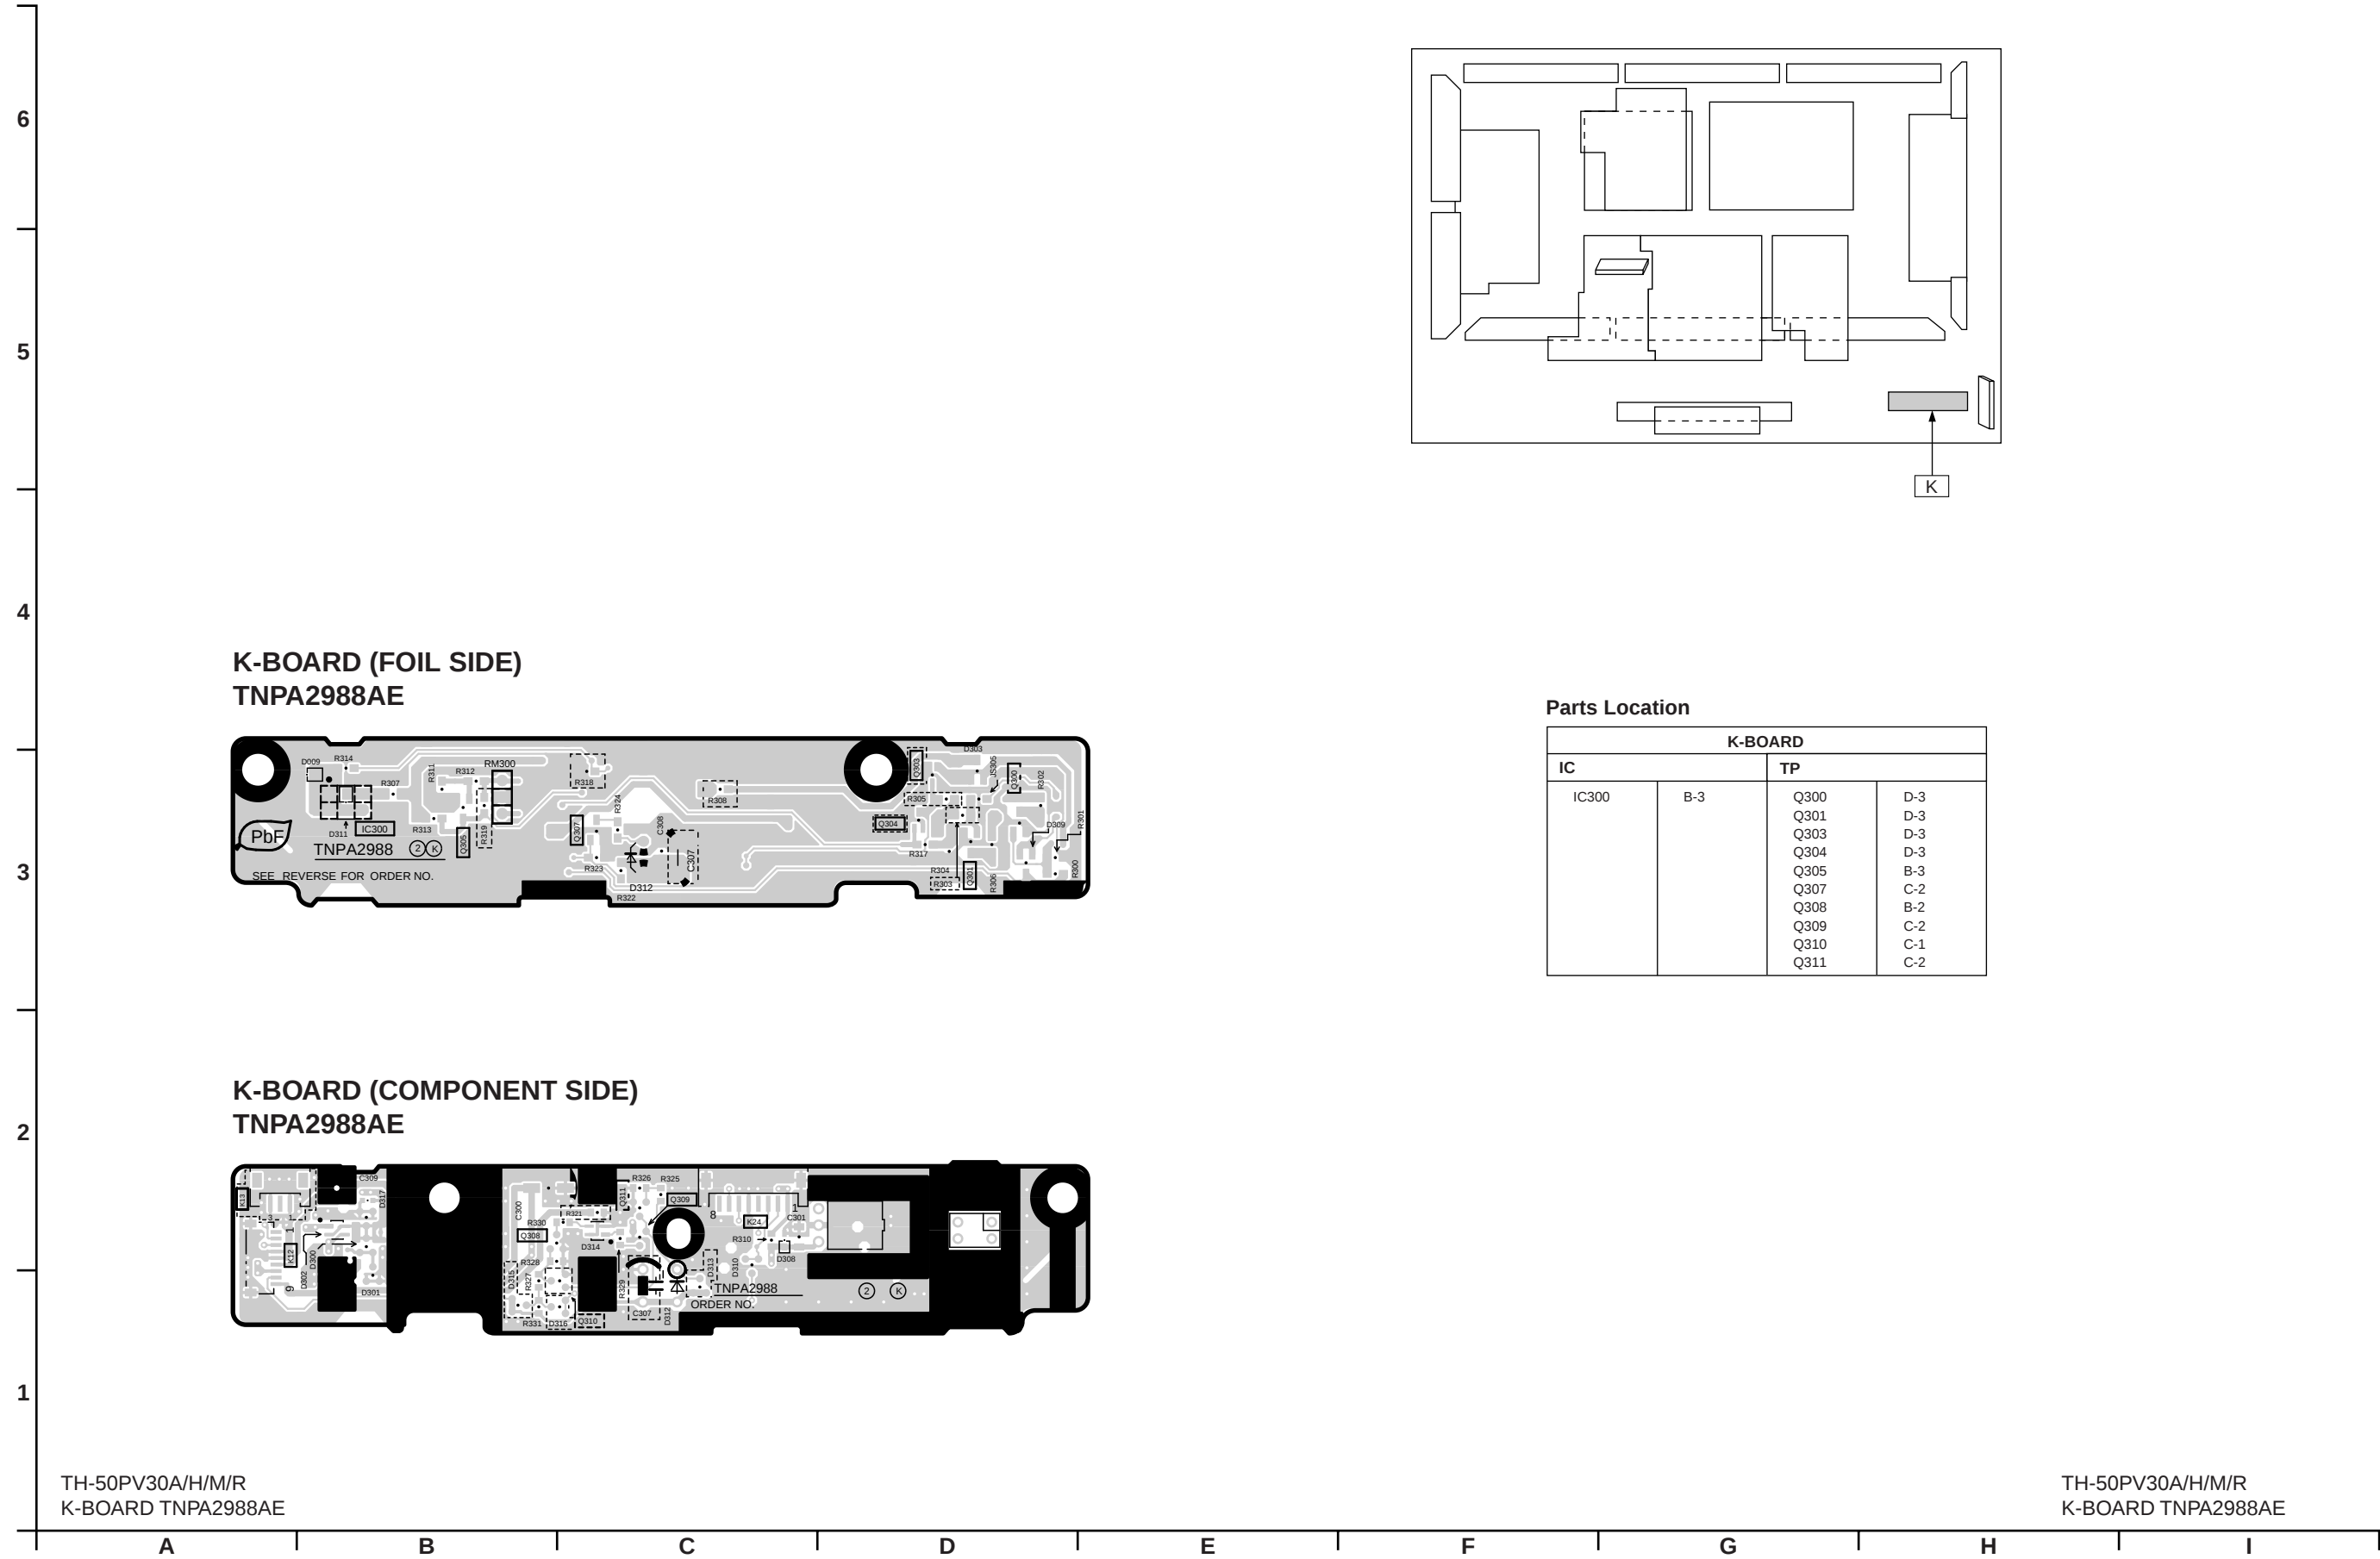


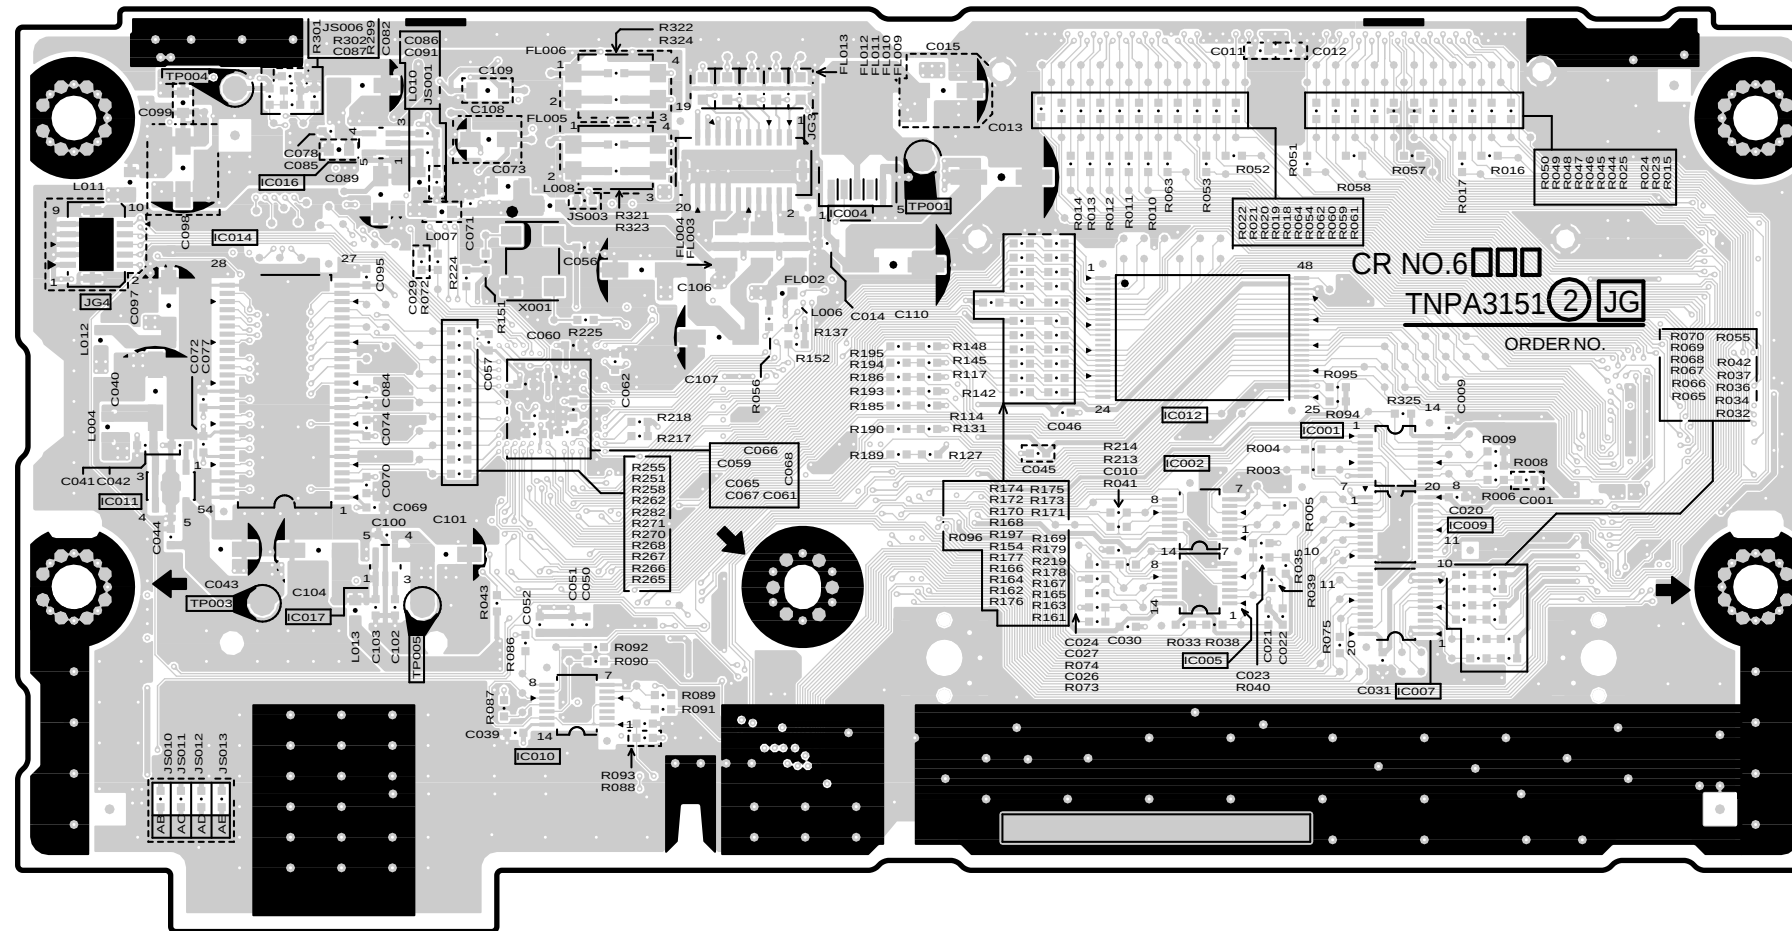

JG-BOARD (COMPONENT SIDE)			
IC		TP	
IC6001	F-3	TP6001	D-4
IC6002	E-3	TP6003	B-2
IC6004	D-4	TP6004	B-4
IC6005	E-2	TP6005	B-2
IC6007	F-2		
IC6009	F-3		
IC6010	C-2		
IC6011	B-3		
IC6012	E-3		
IC6014	B-3		
IC6016	B-4		
IC6017	B-3		


TH-50PV30A/H/M/R
JG-BOARD TNPA3151AD

5.11. G-Board

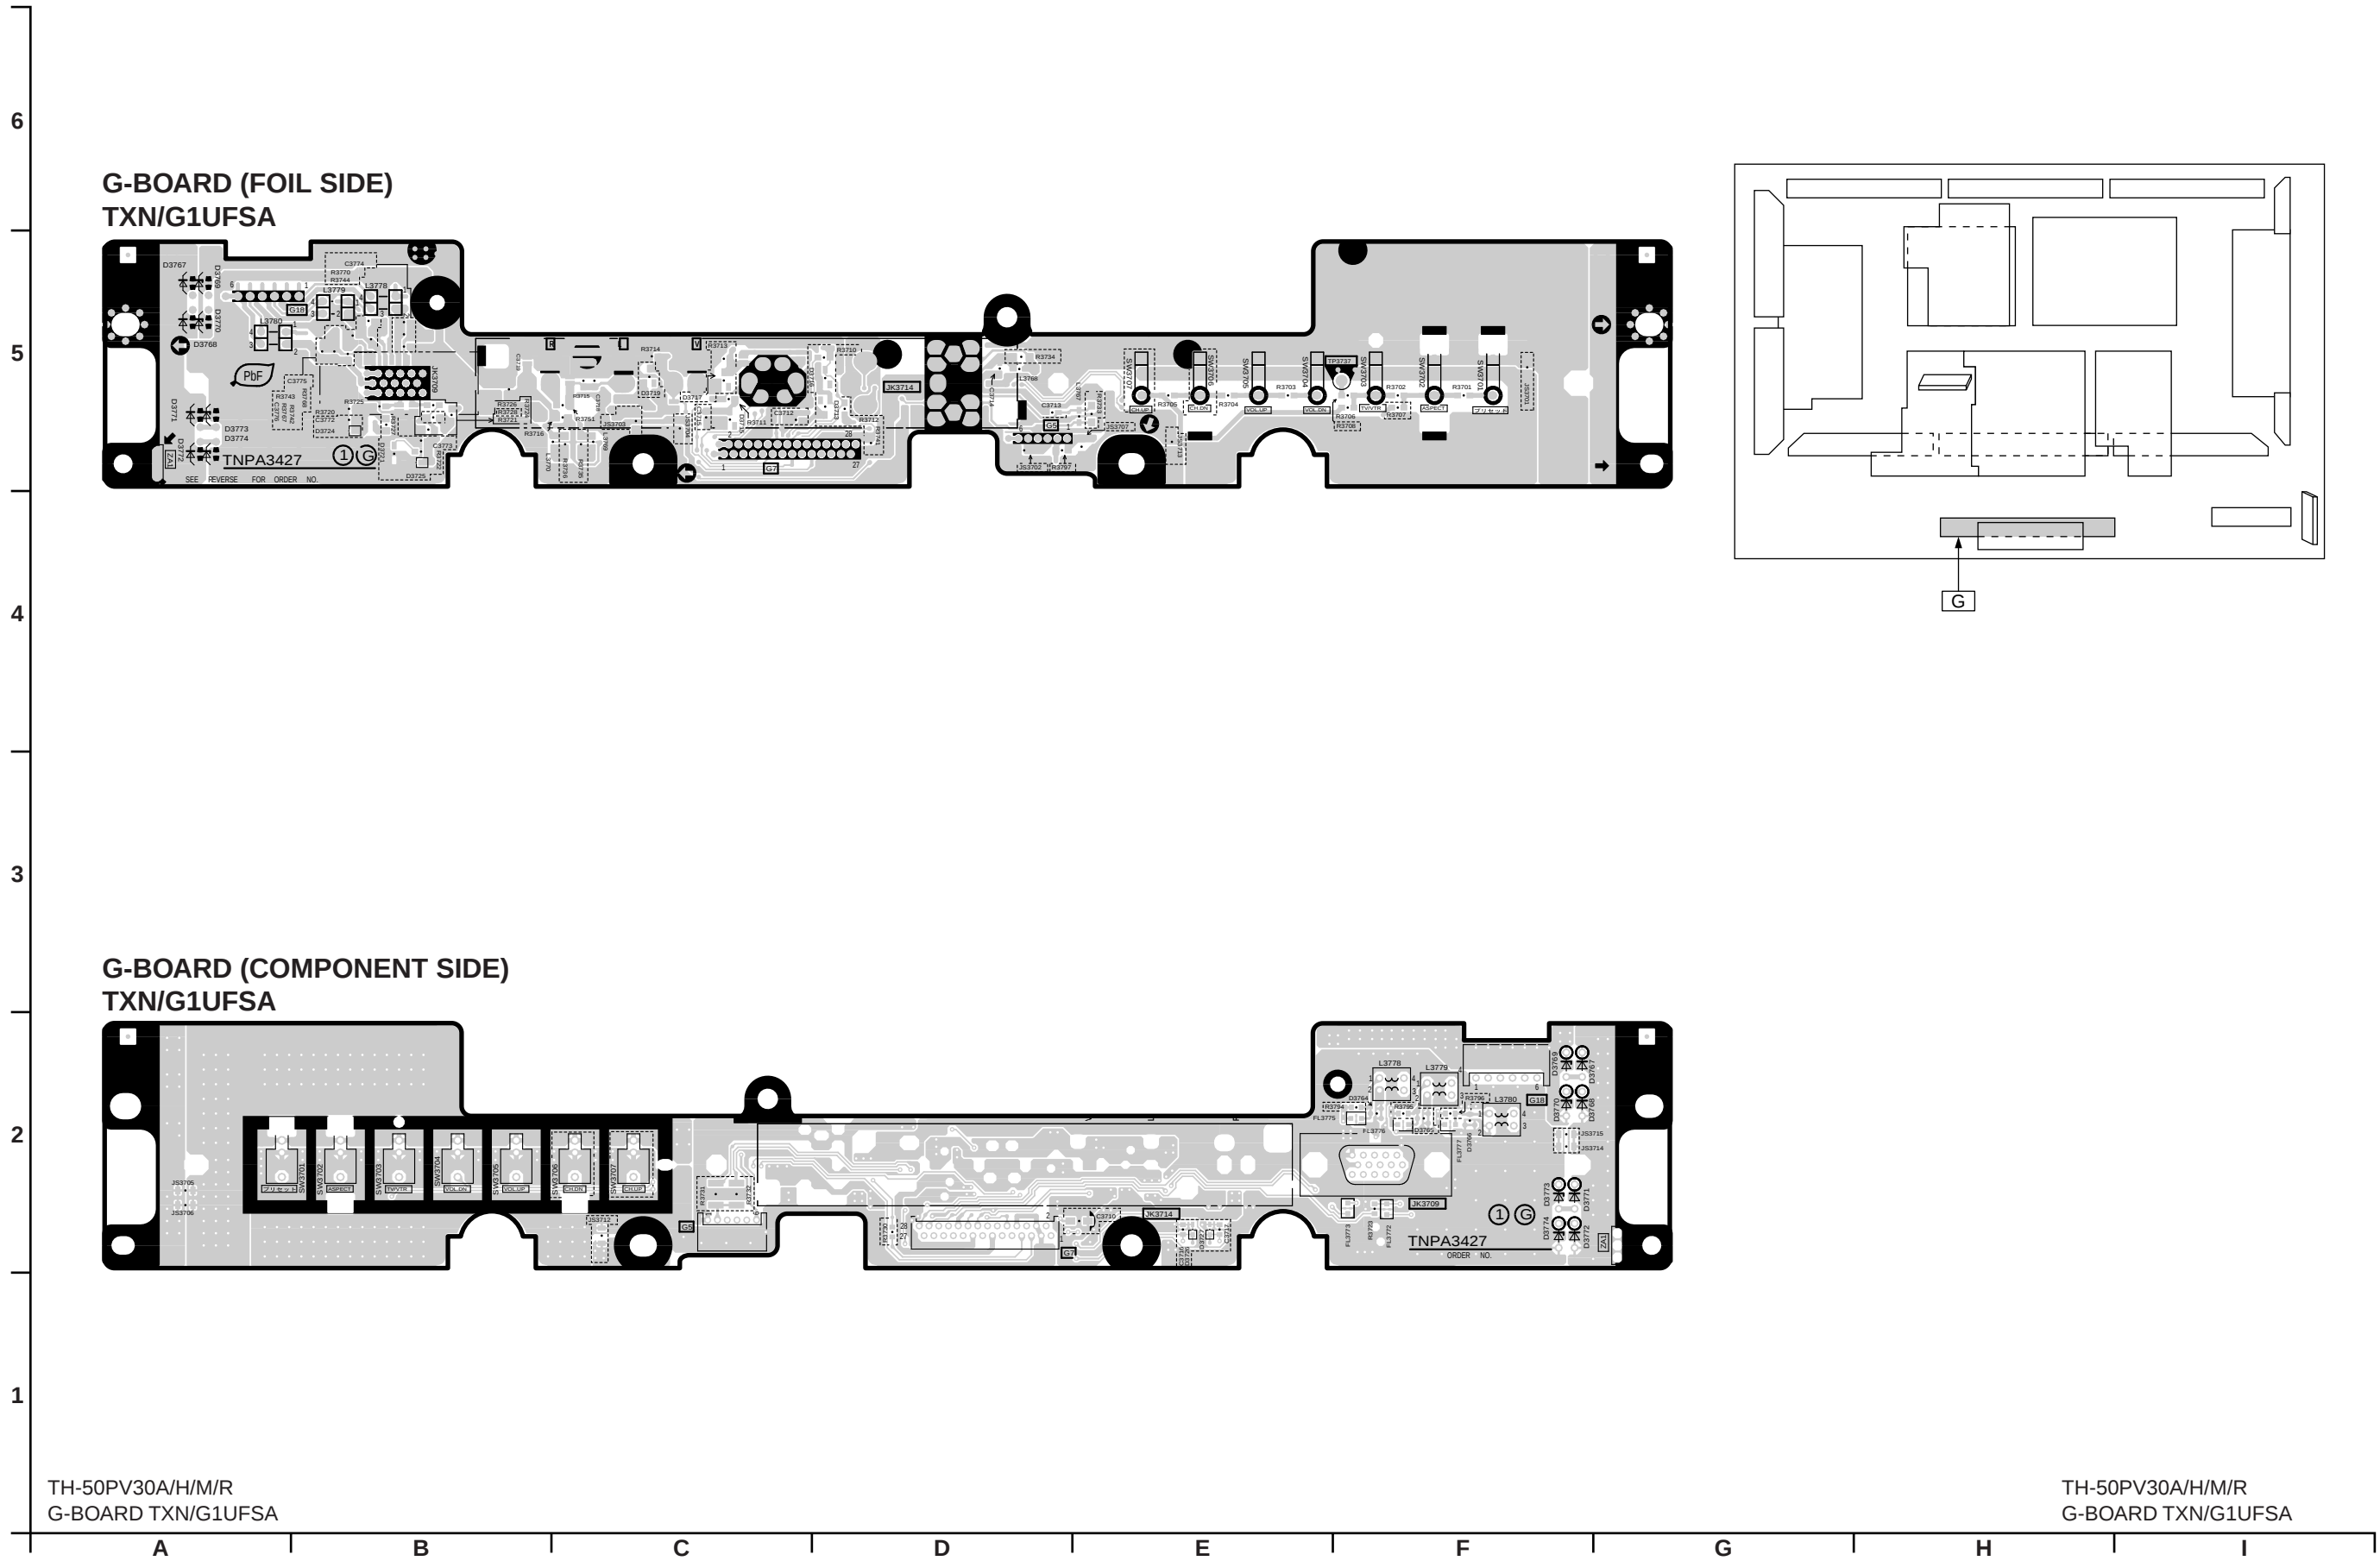


6 Block and Schematic Diagrams

6.1. Main Block Diagram

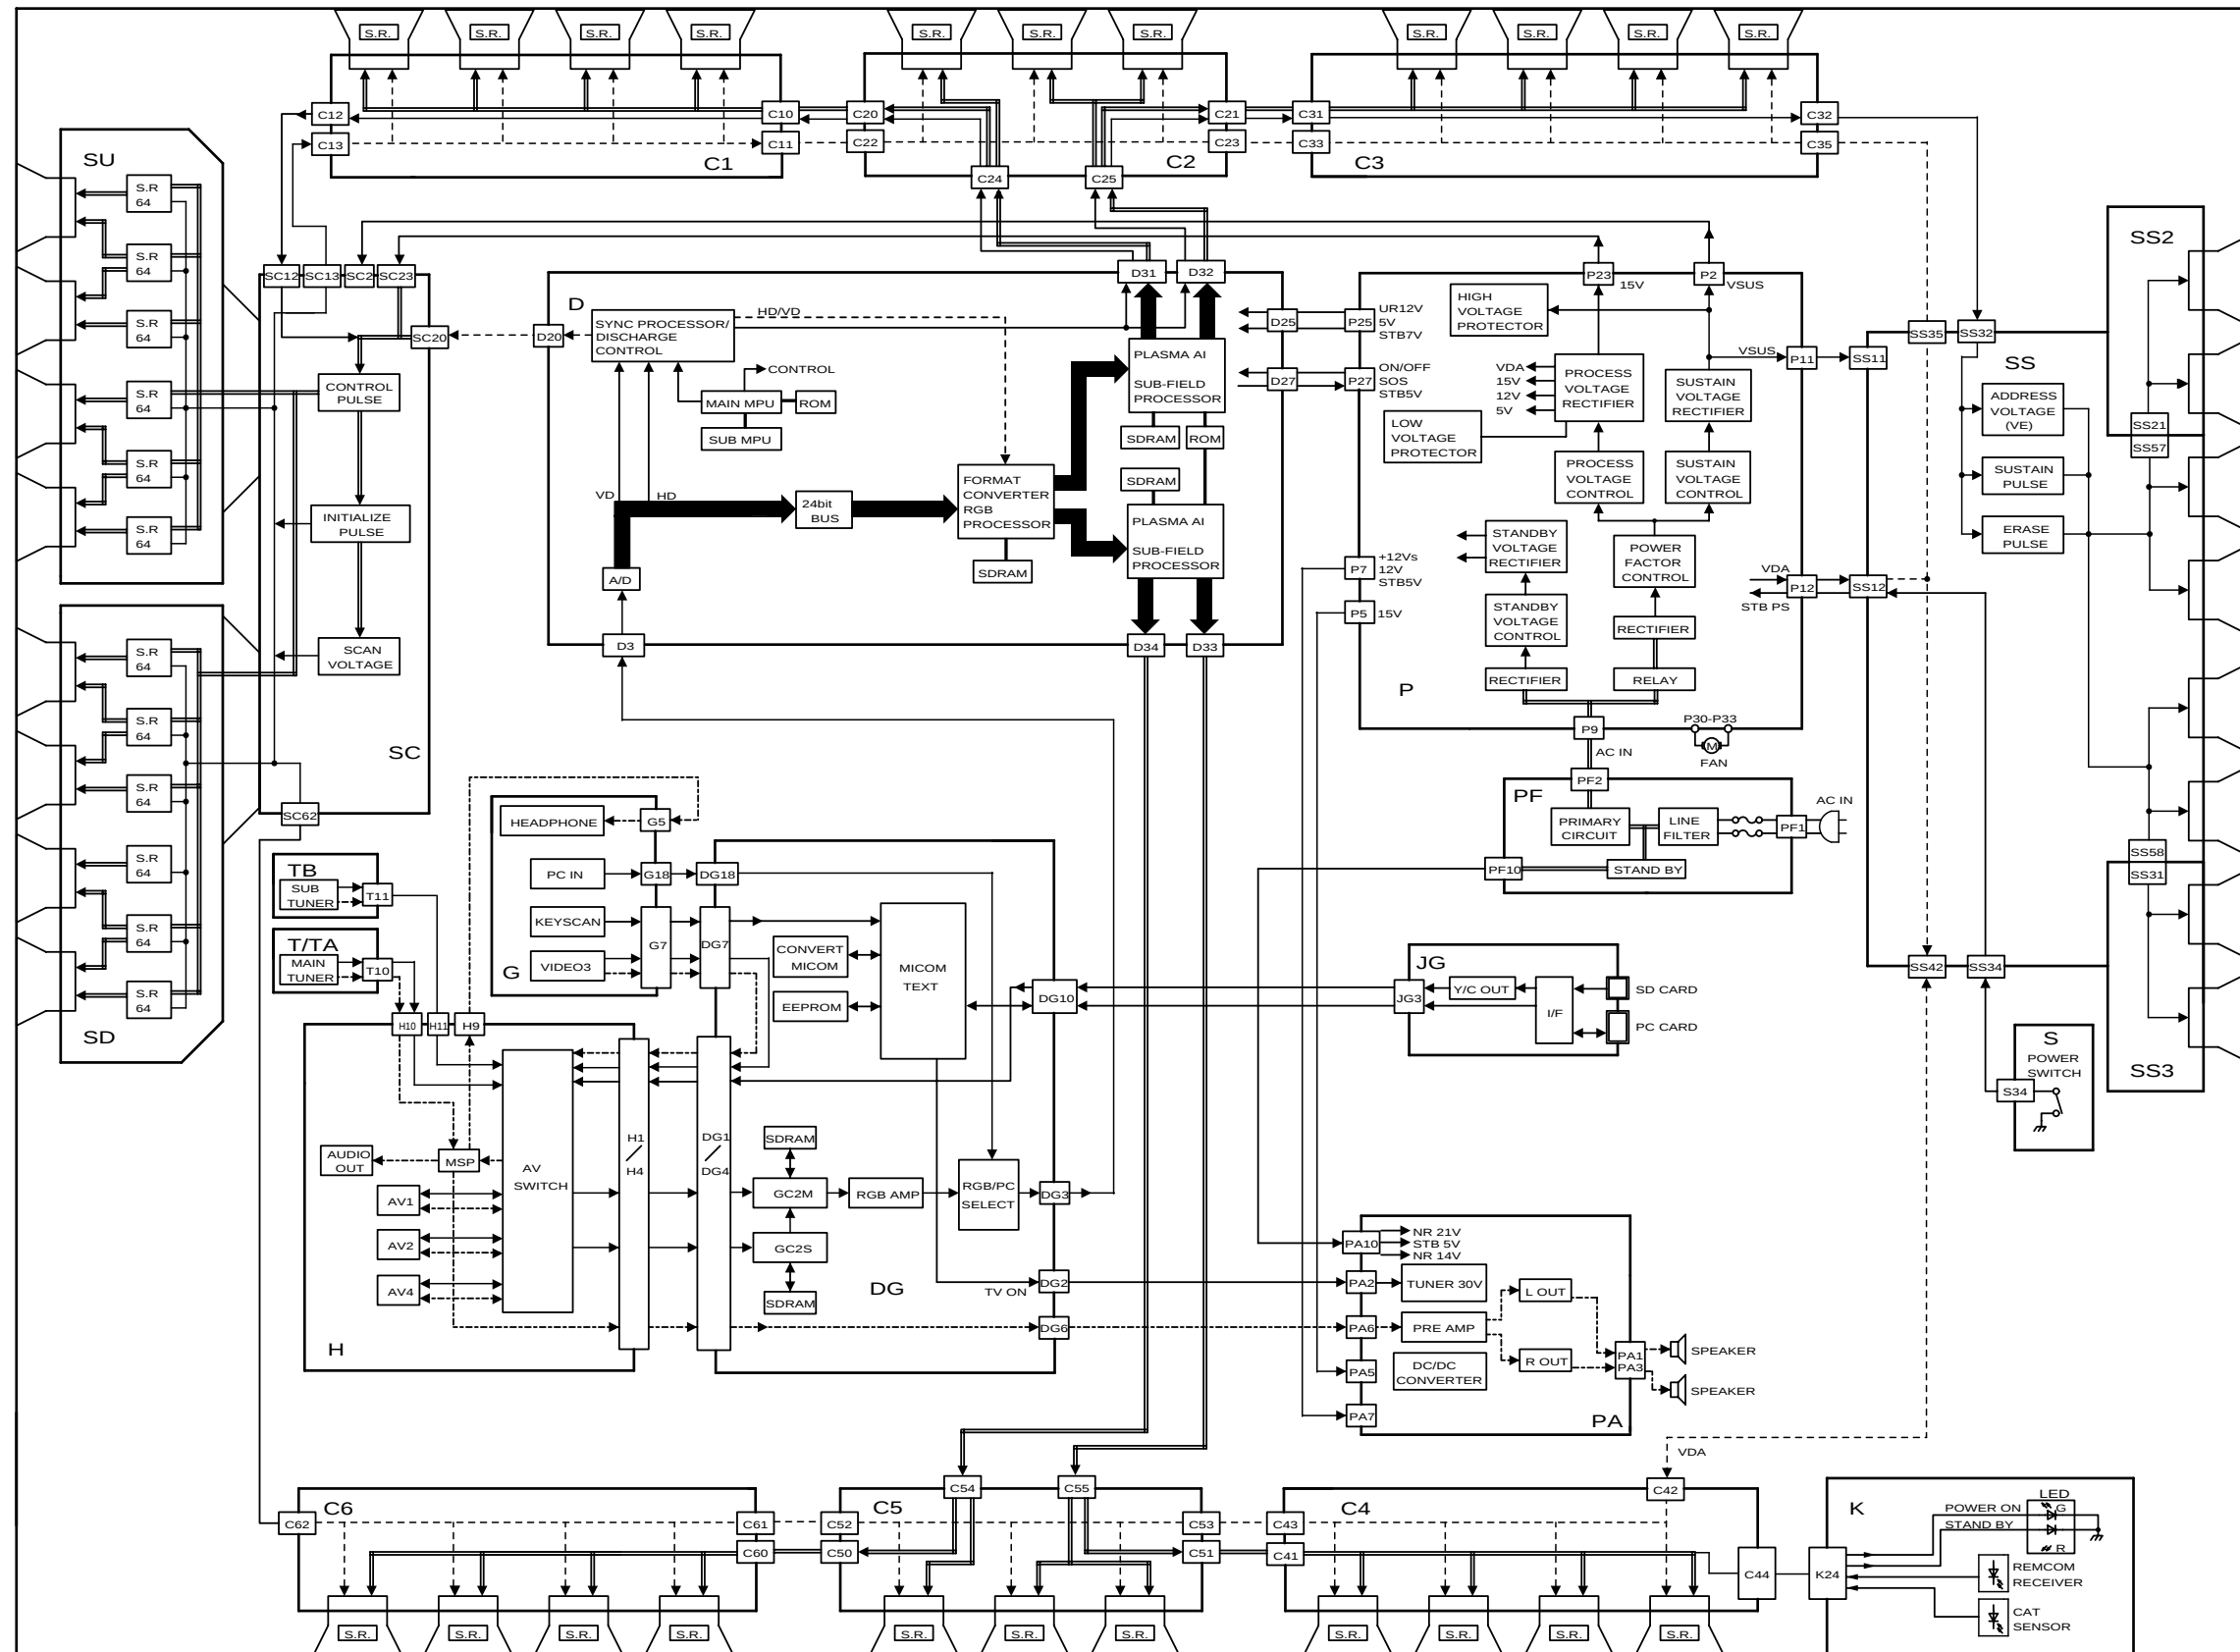TH-50PV30A/H/M/R
Main Block DiagramTH-50PV30A/H/M/R
Main Block Diagram


6.2. PF-Board Block Diagram

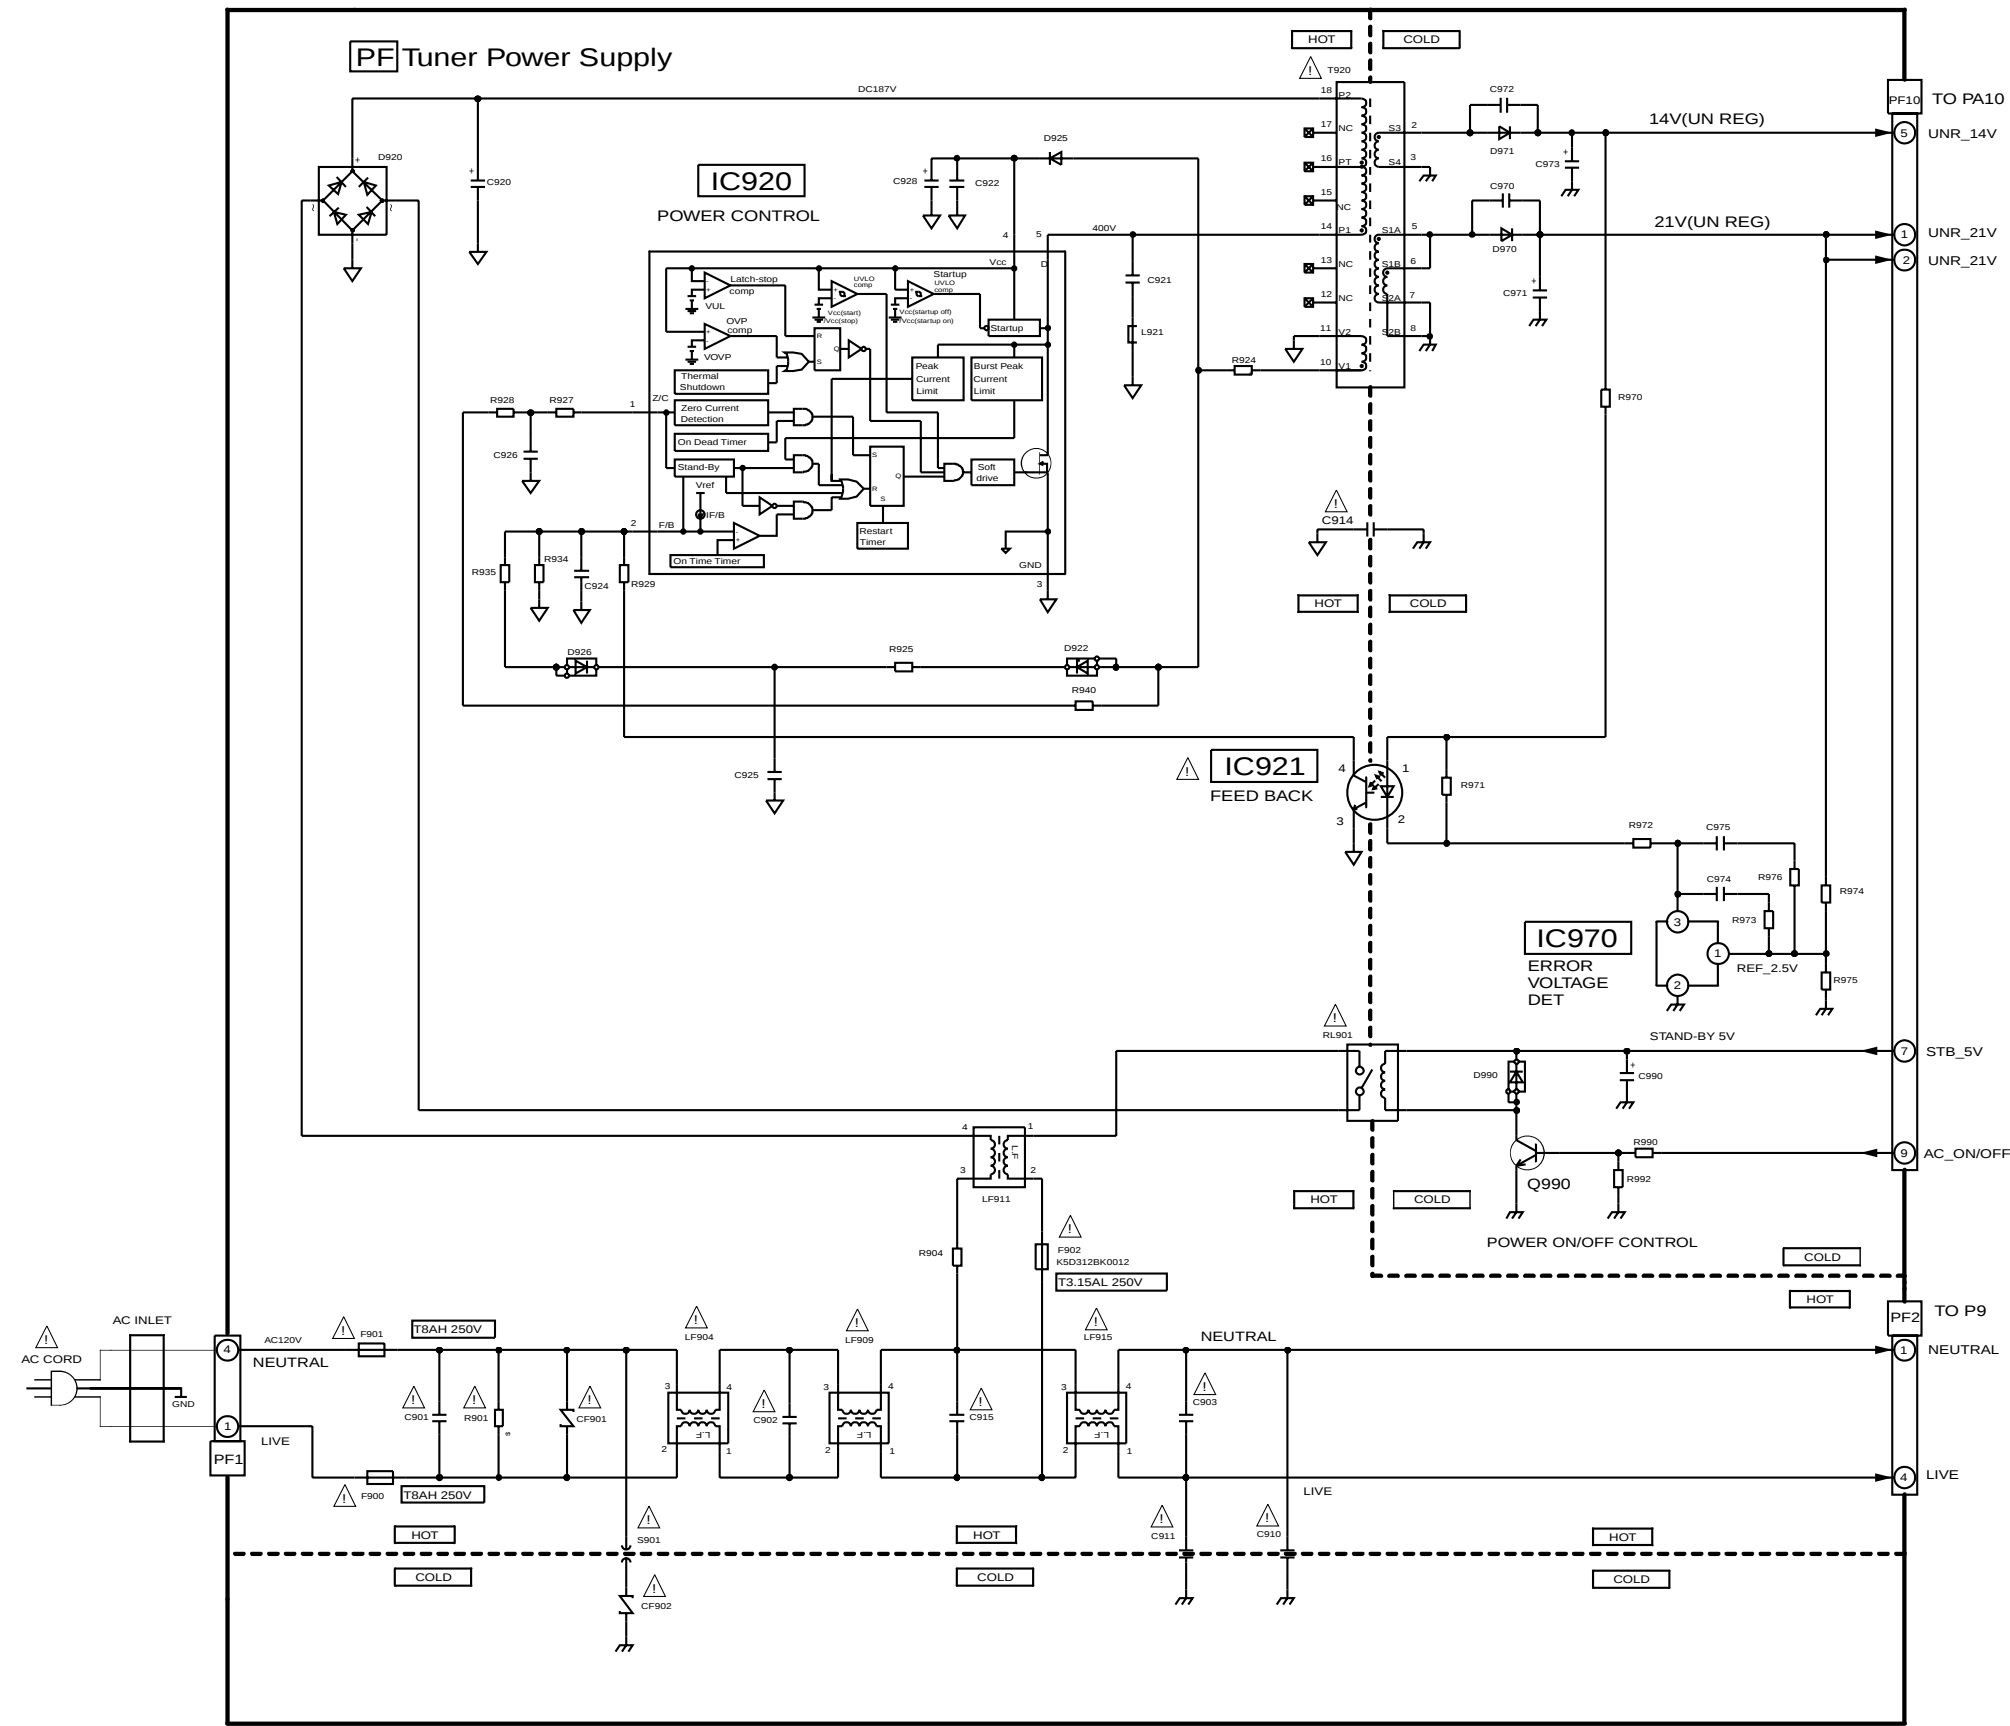


TH-50PV30A/H/M/R
PF-Board Block Diagram

TH-50PV30A/H/M/R
PF-Board Block Diagram


6.3. PF-Board Schematic Diagram

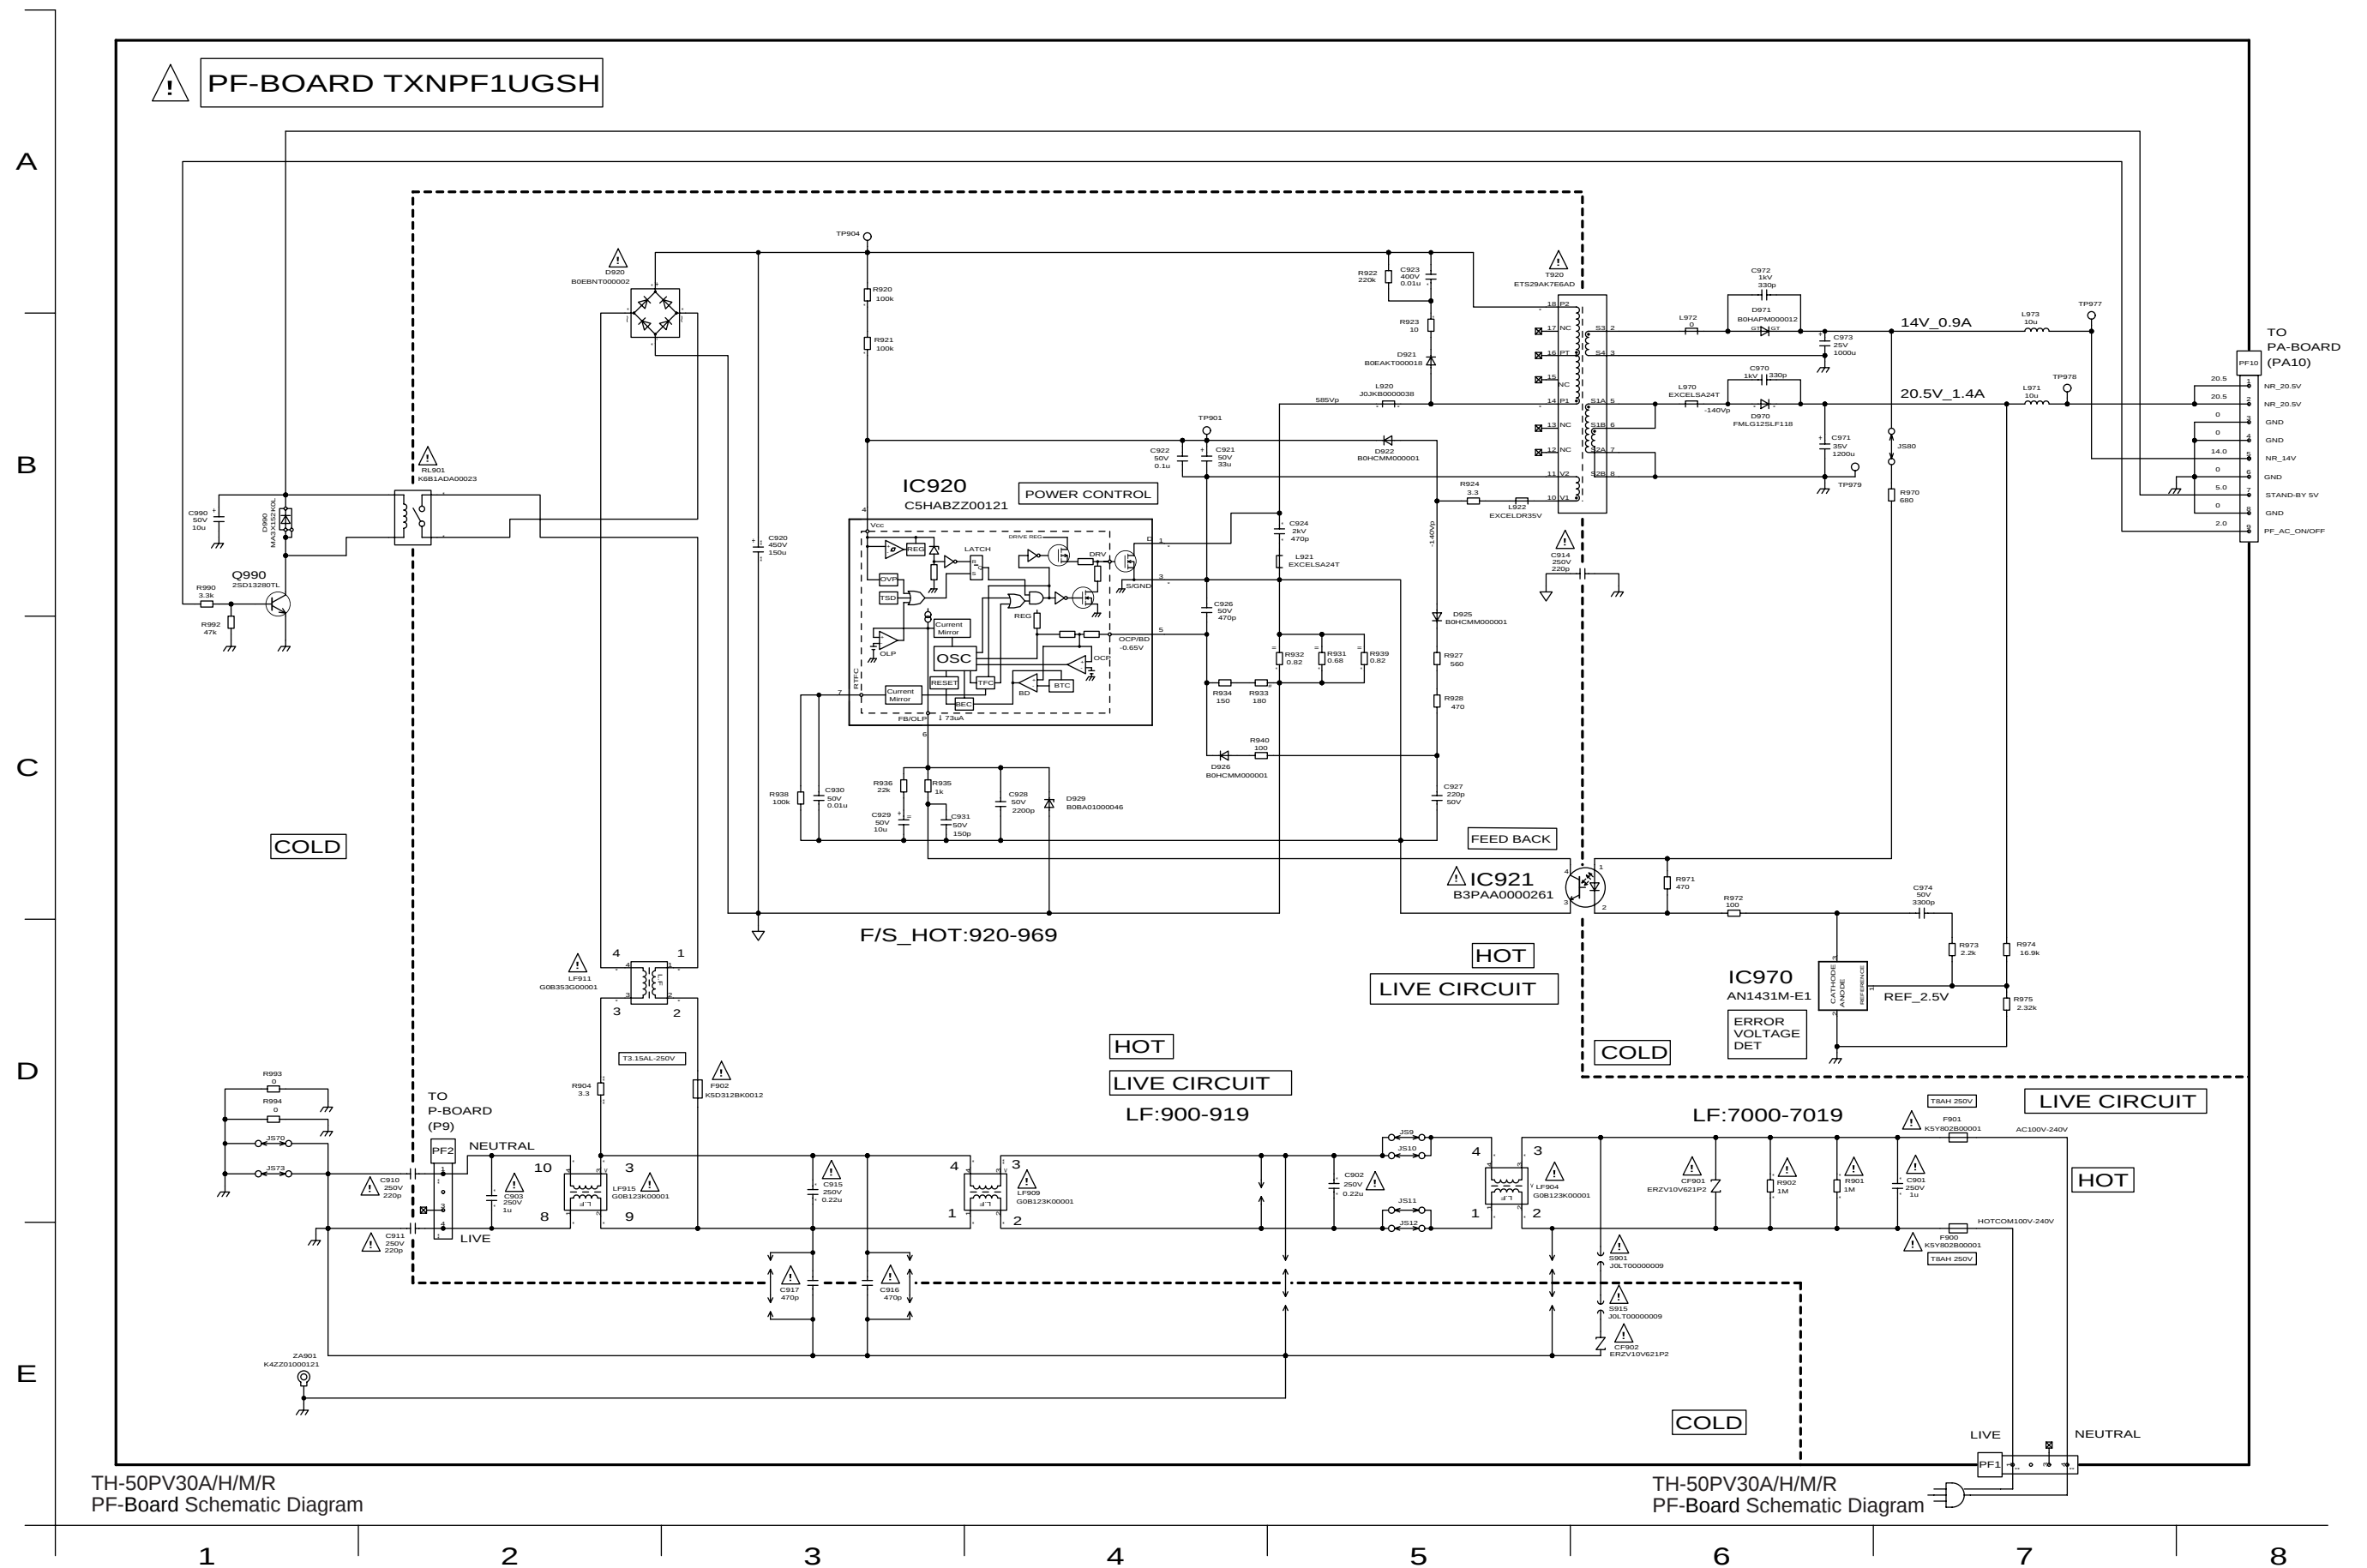


6.5. P-Board (1 of 6) Schematic Diagram

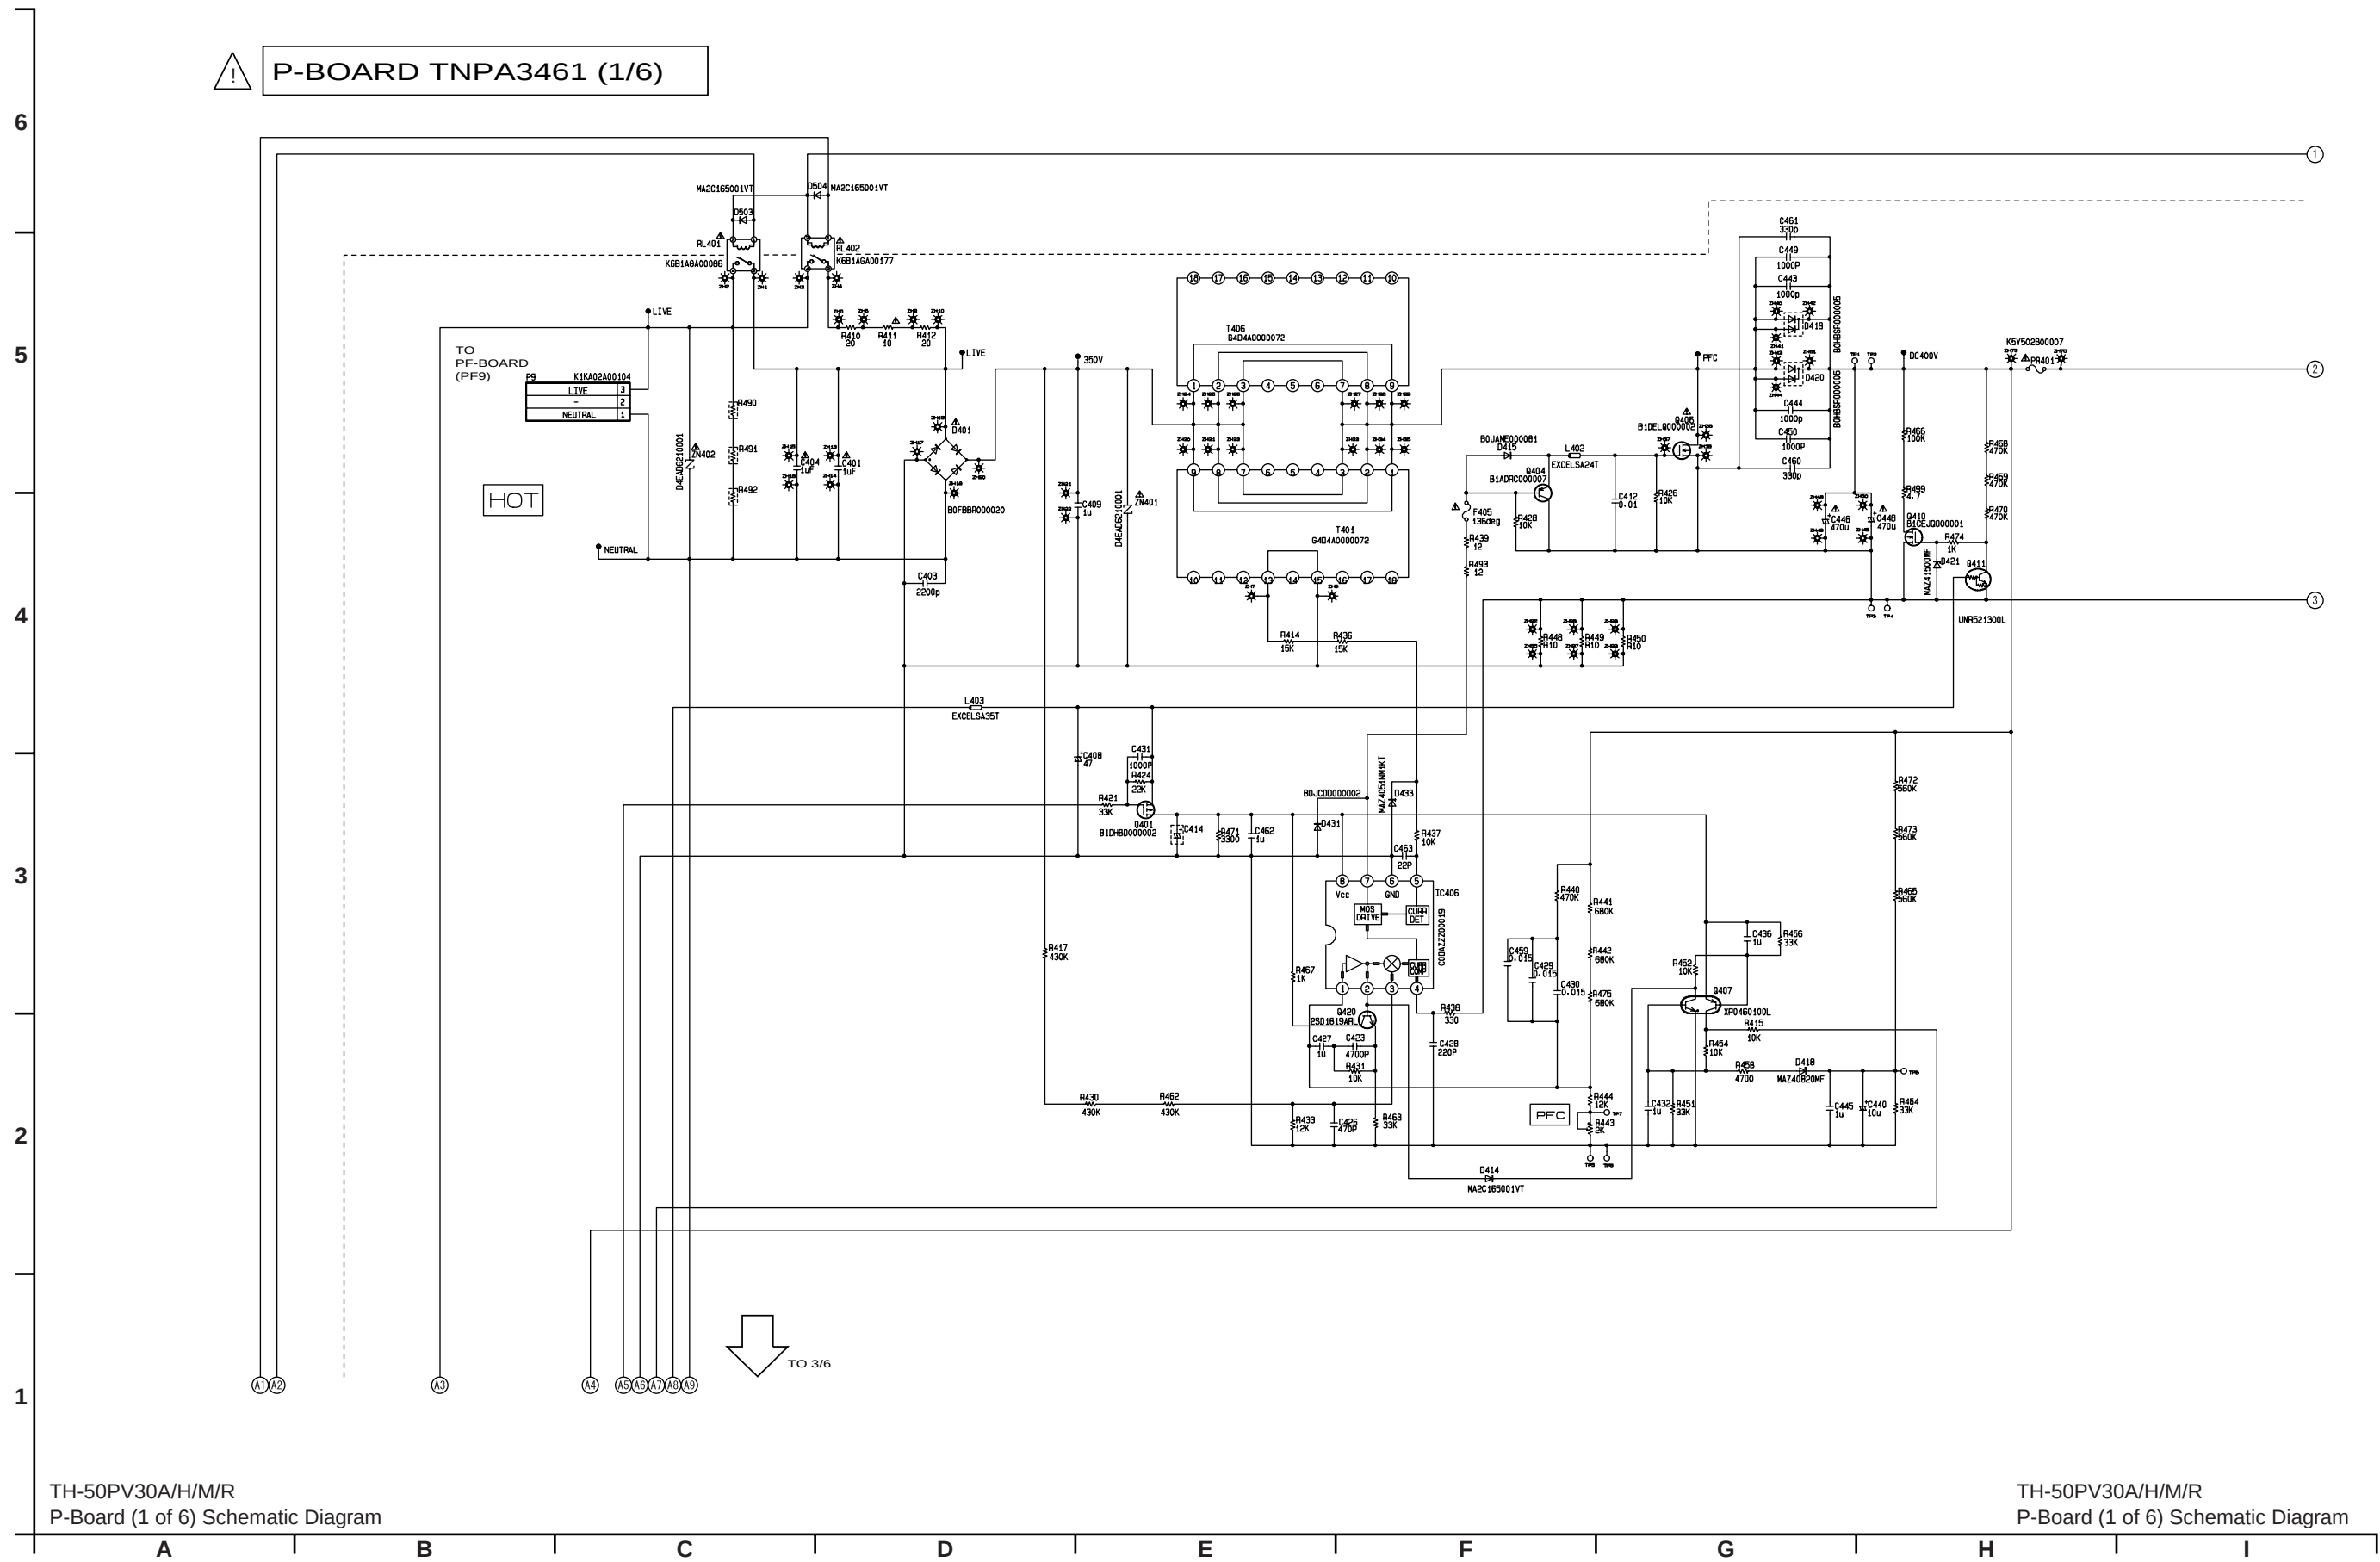


6.6. P-Board (2 of 6) Schematic Diagram

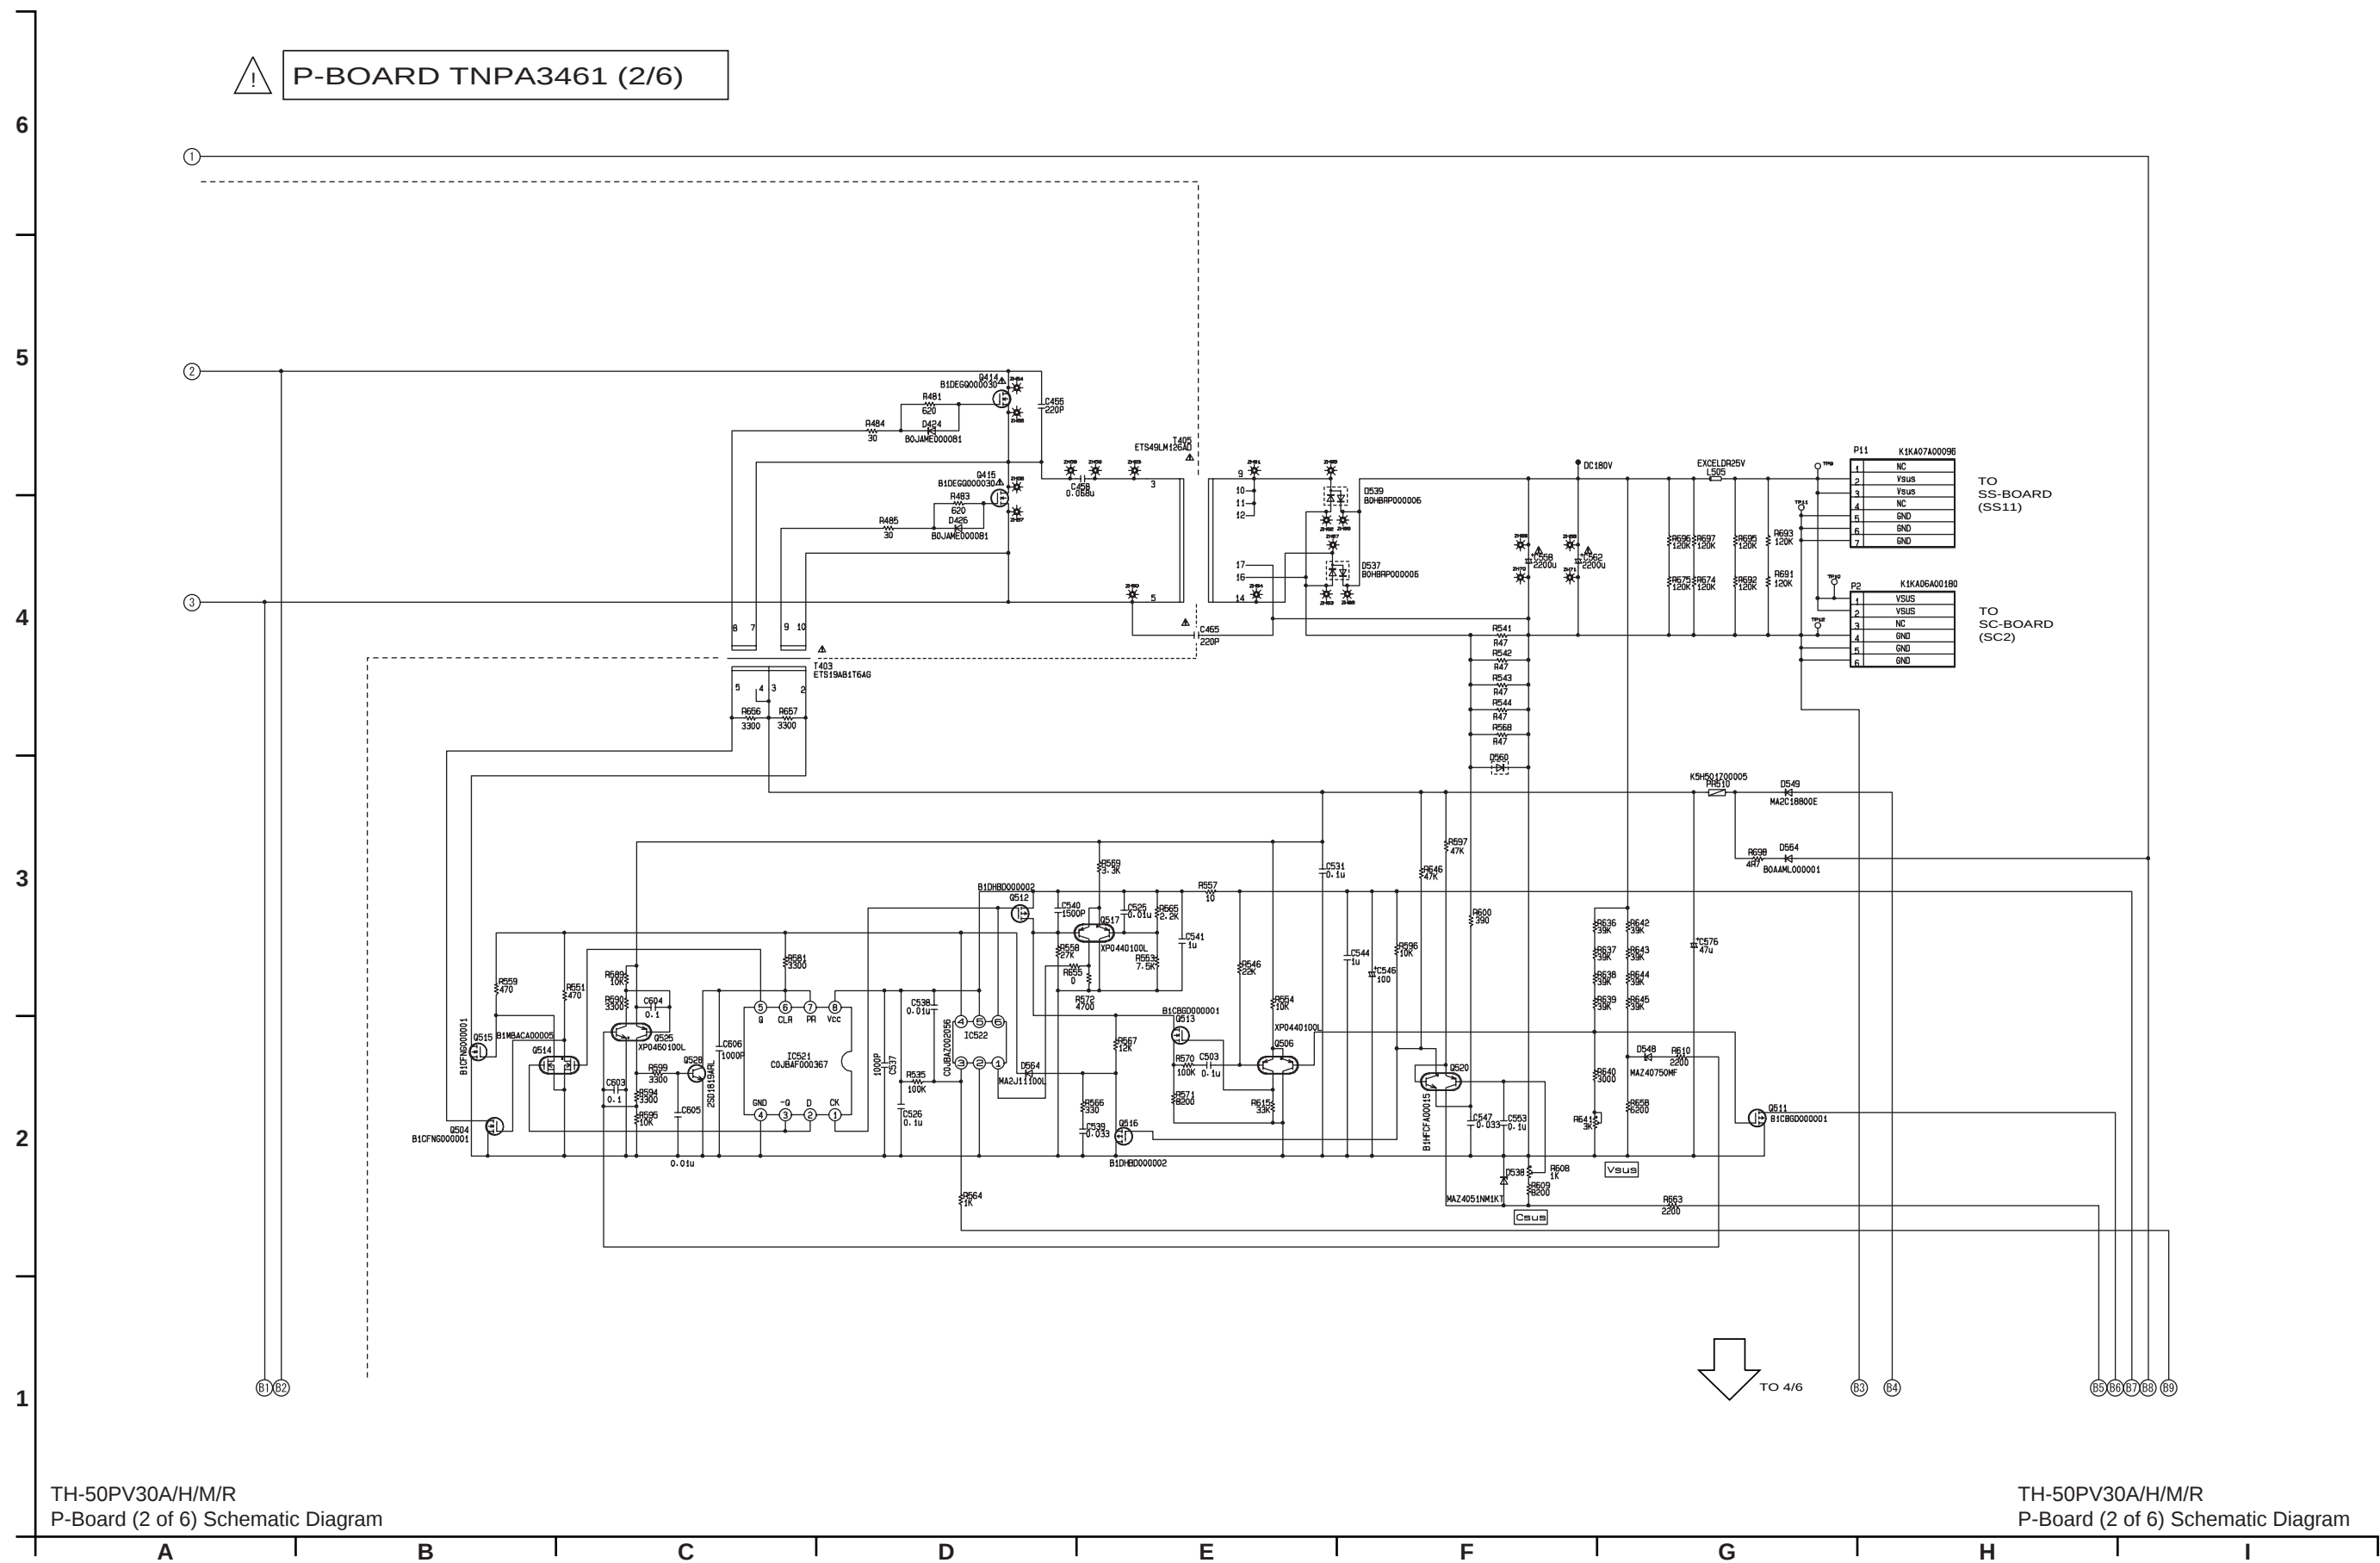


6.7. P-Board (3 of 6) Schematic Diagram

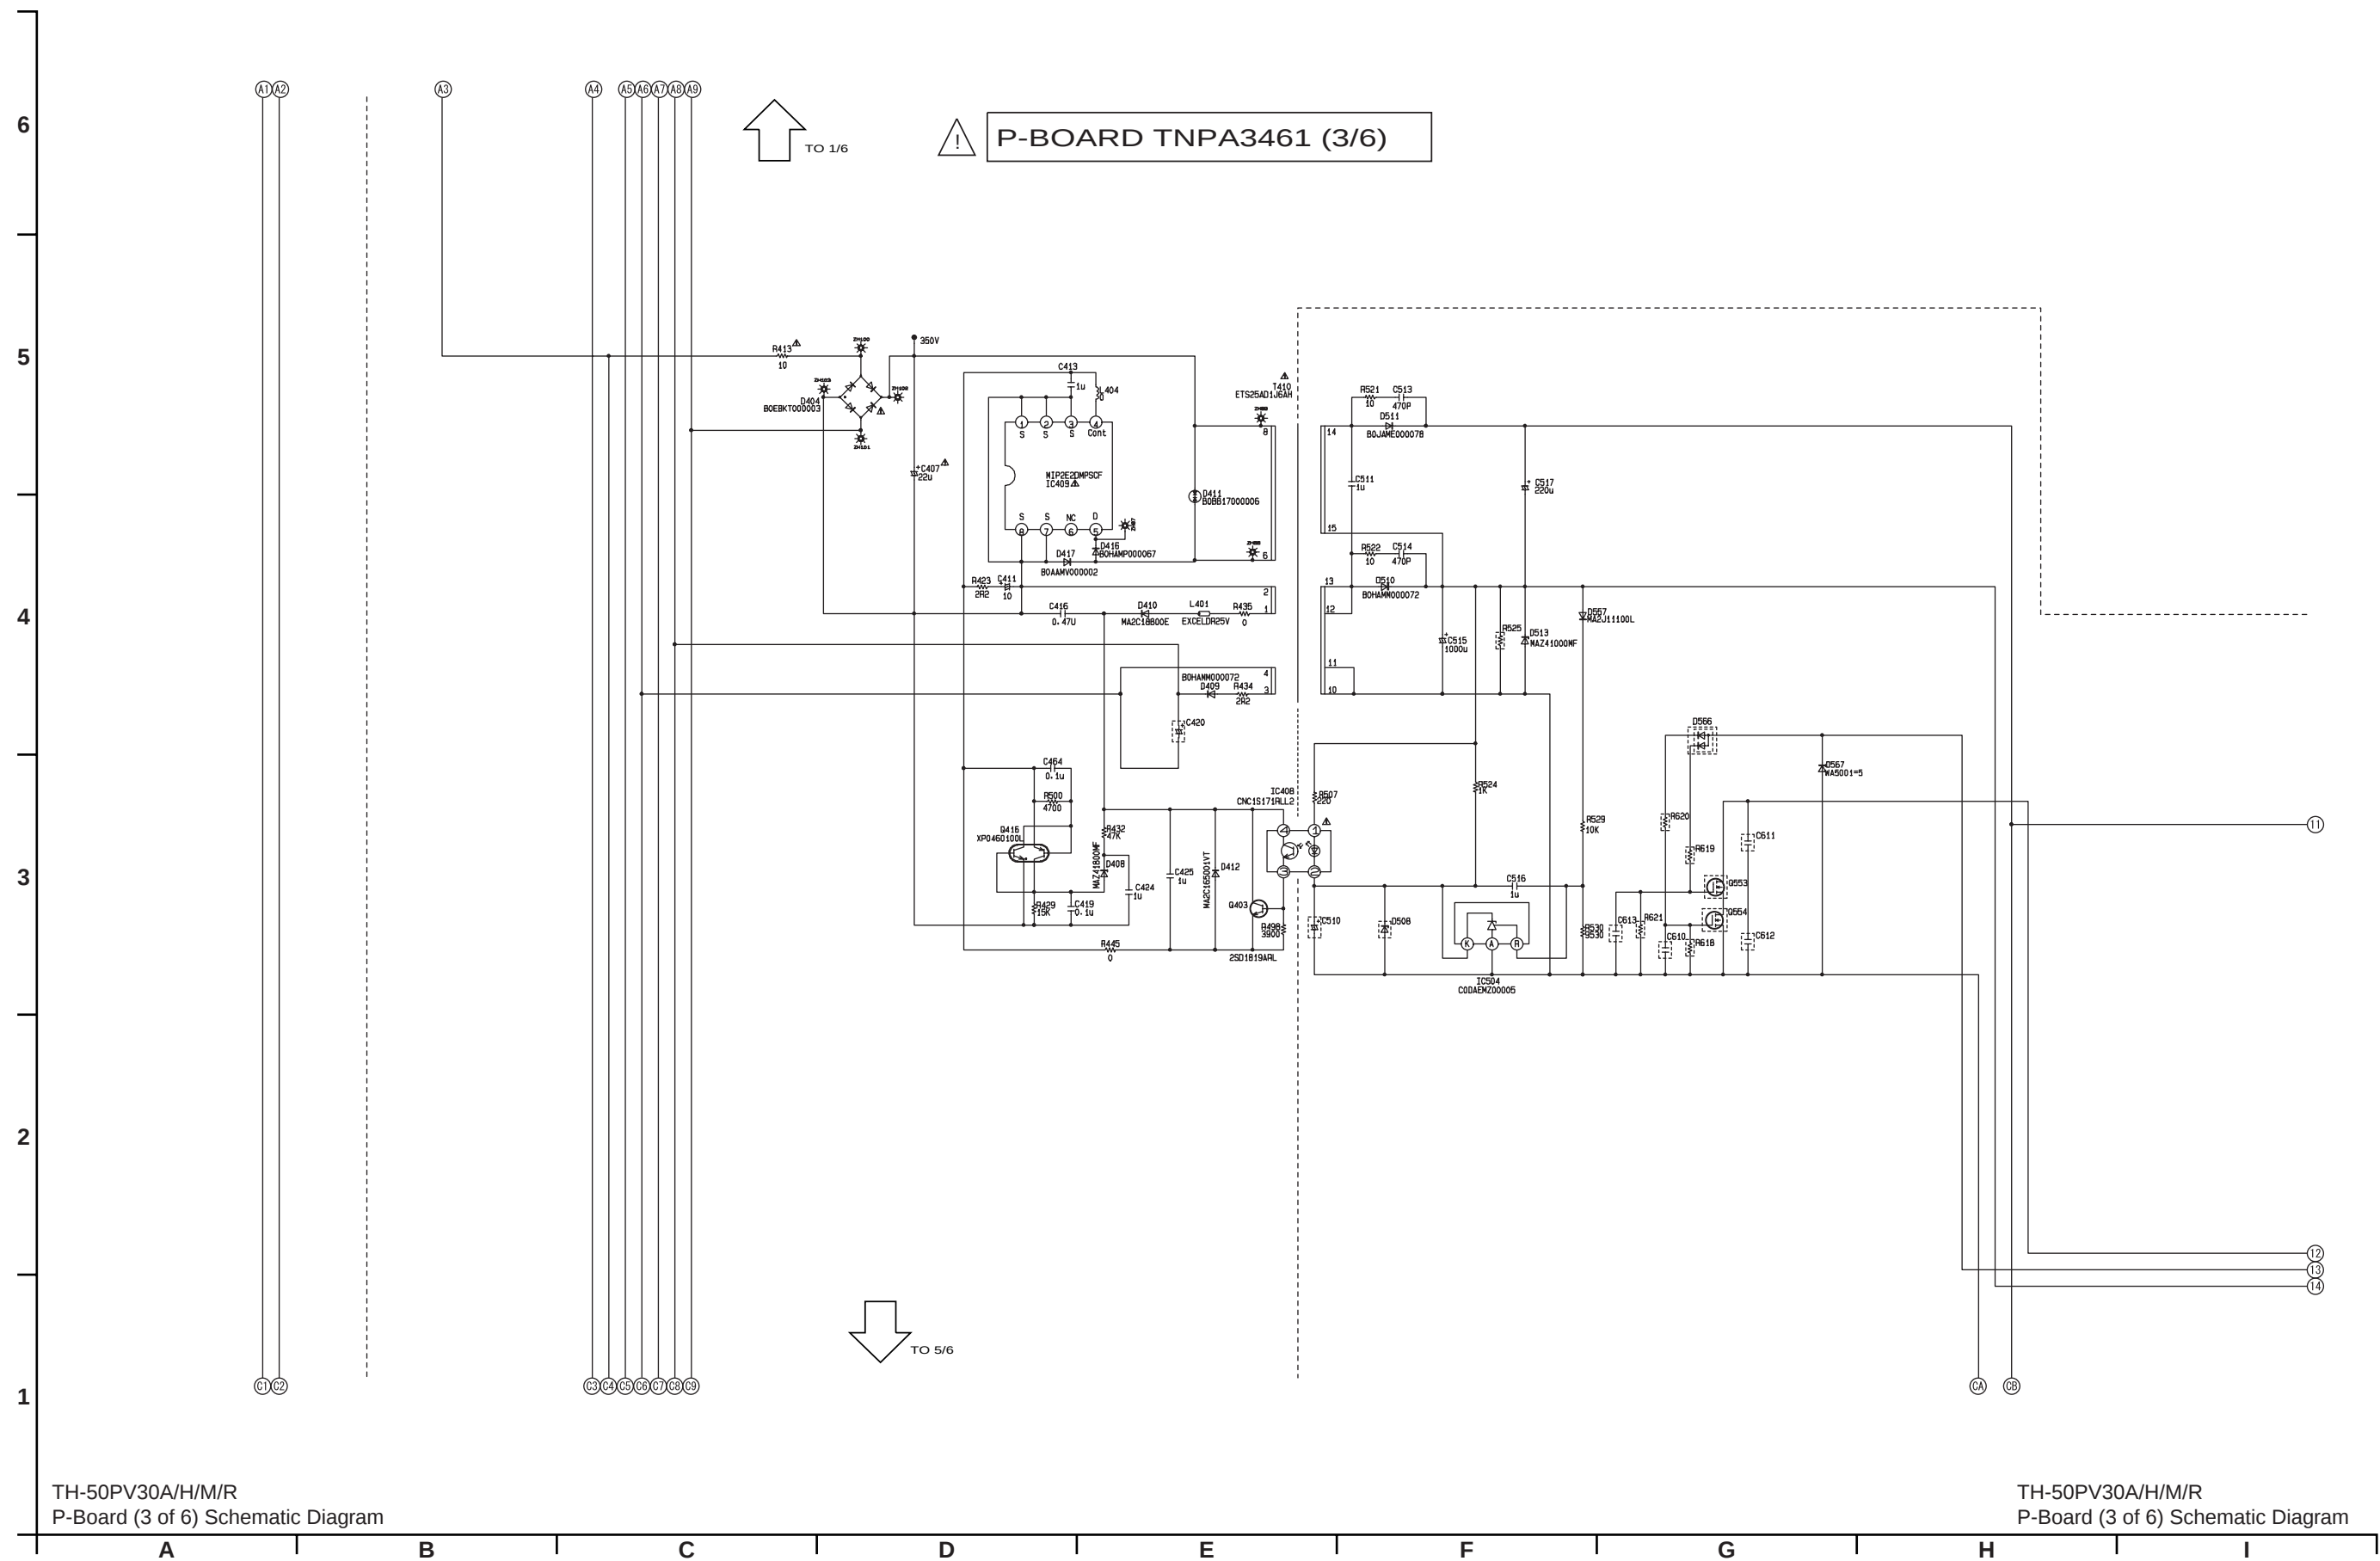


6.8. P-Board (4 of 6) Schematic Diagram

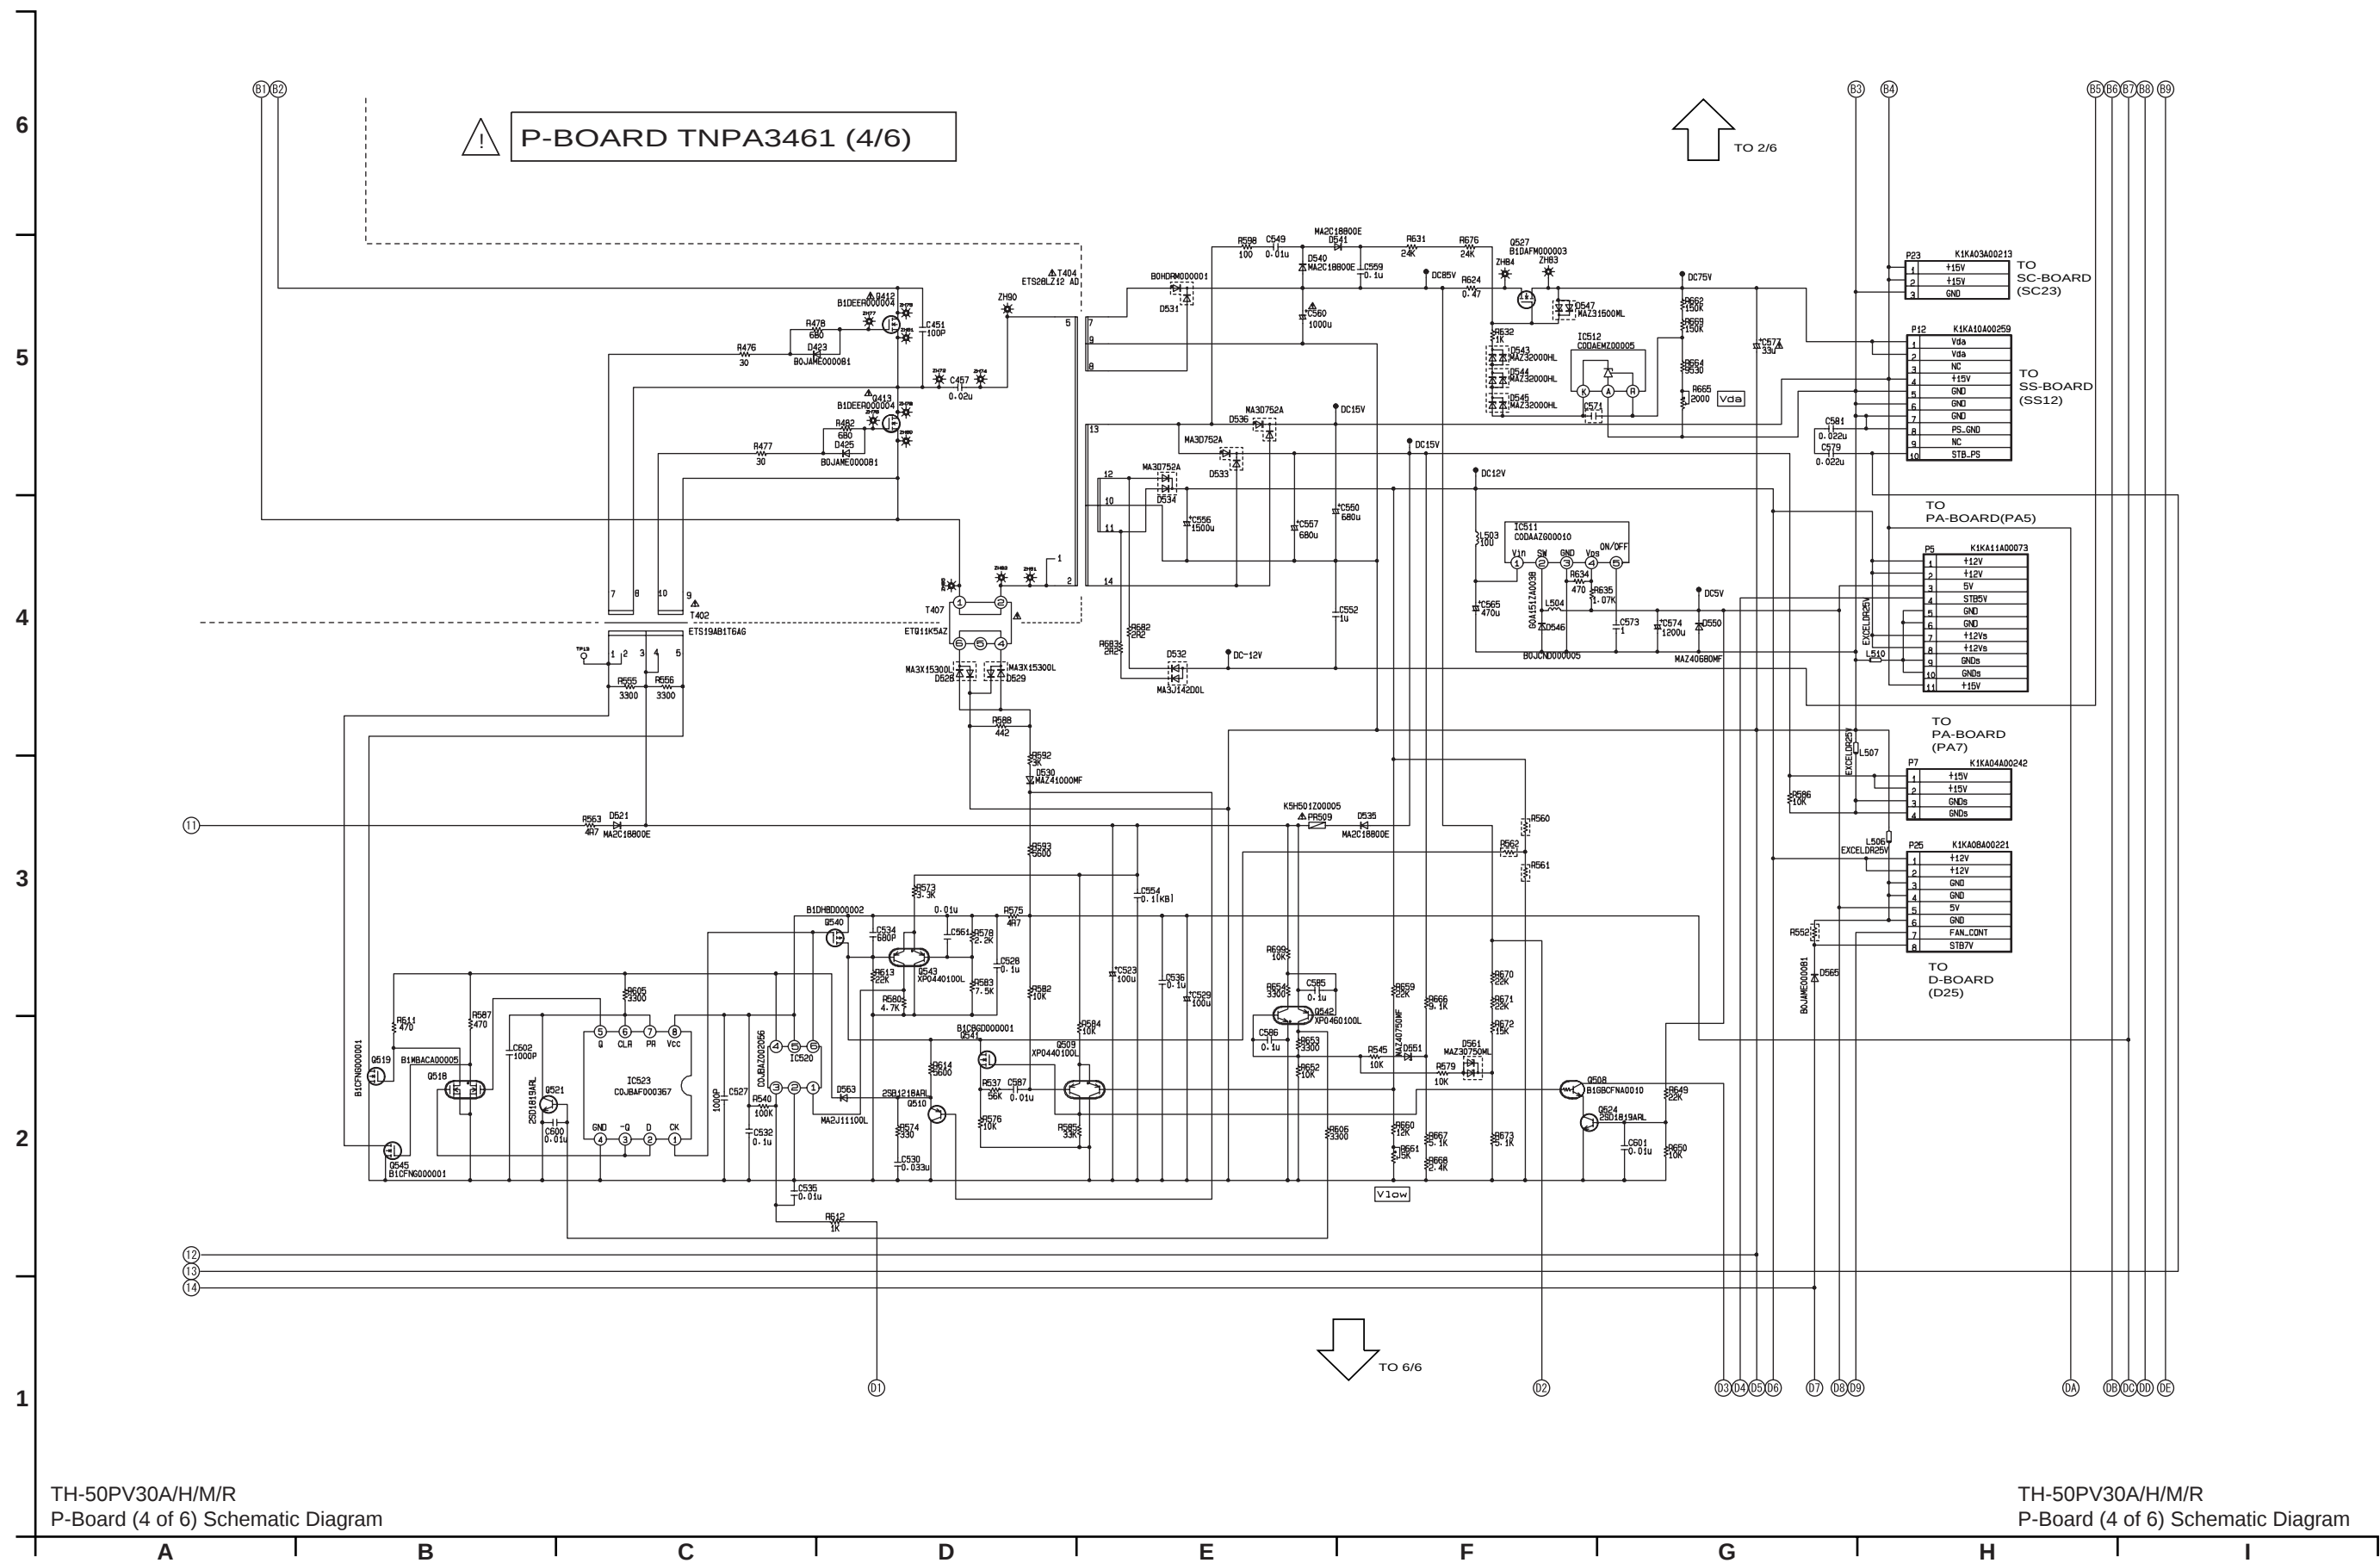


6.9. P-Board (5 of 6) Schematic Diagram

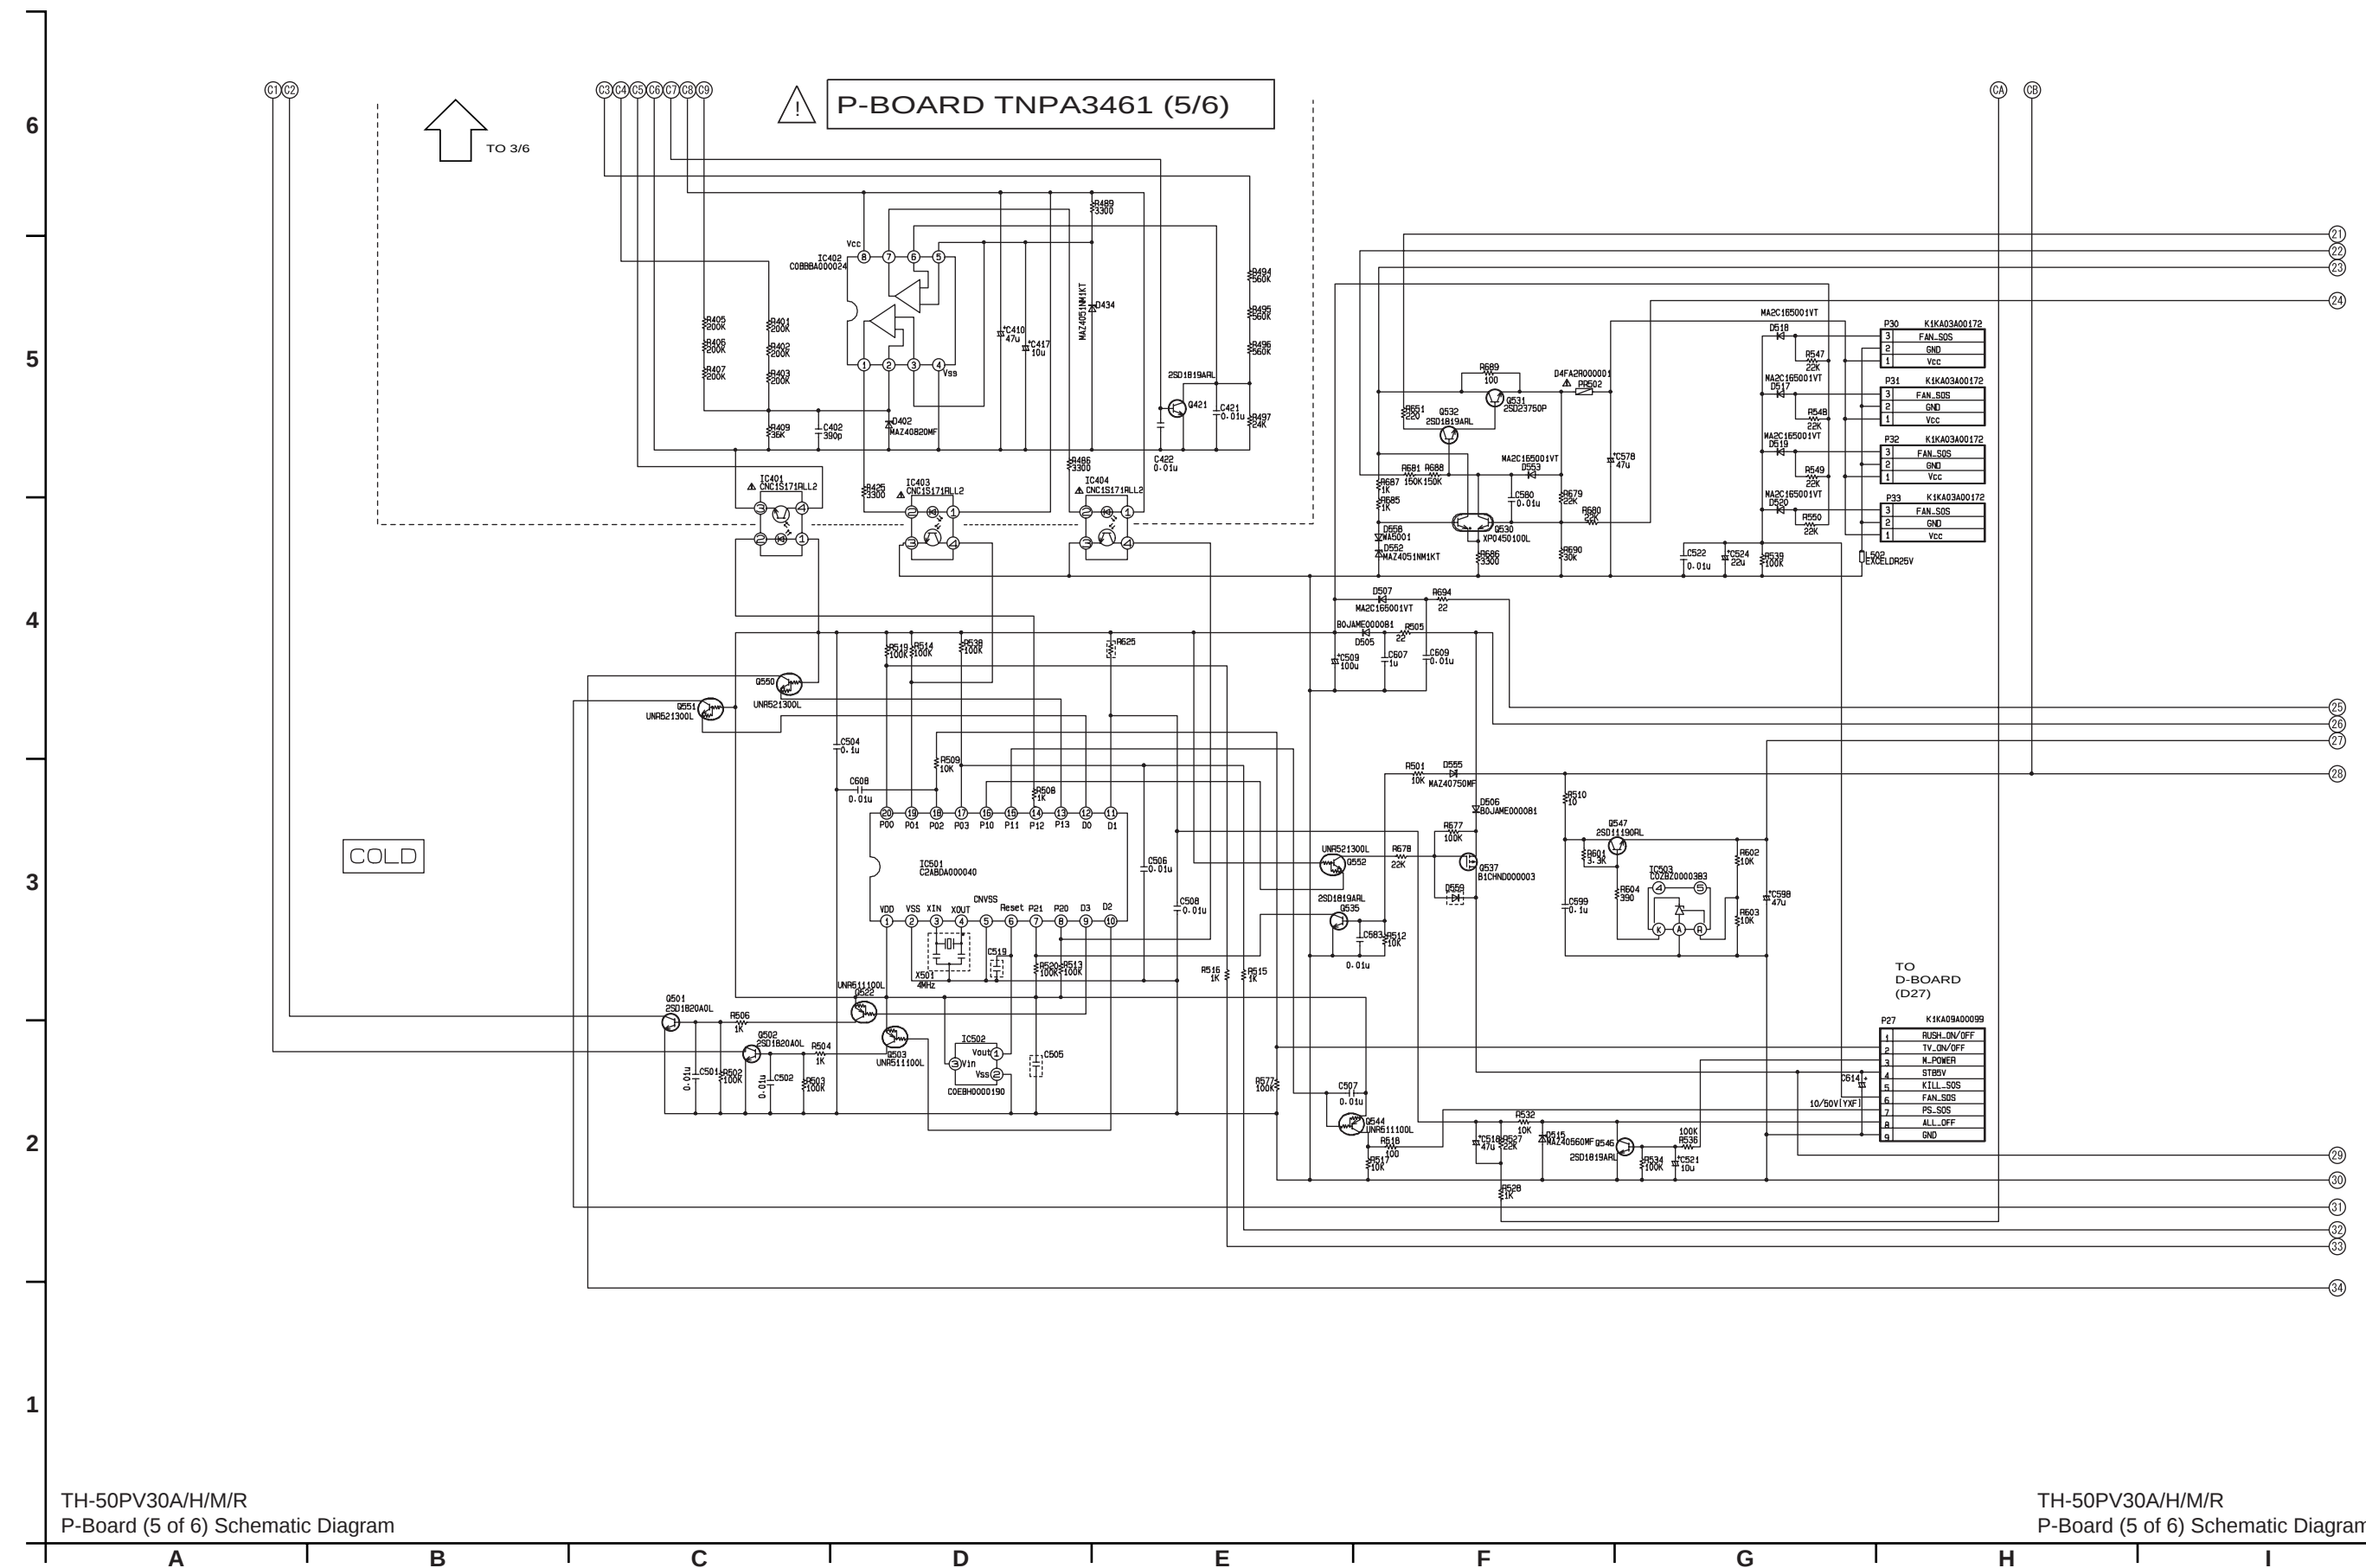

6.10. P-Board (6 of 6) Schematic Diagram

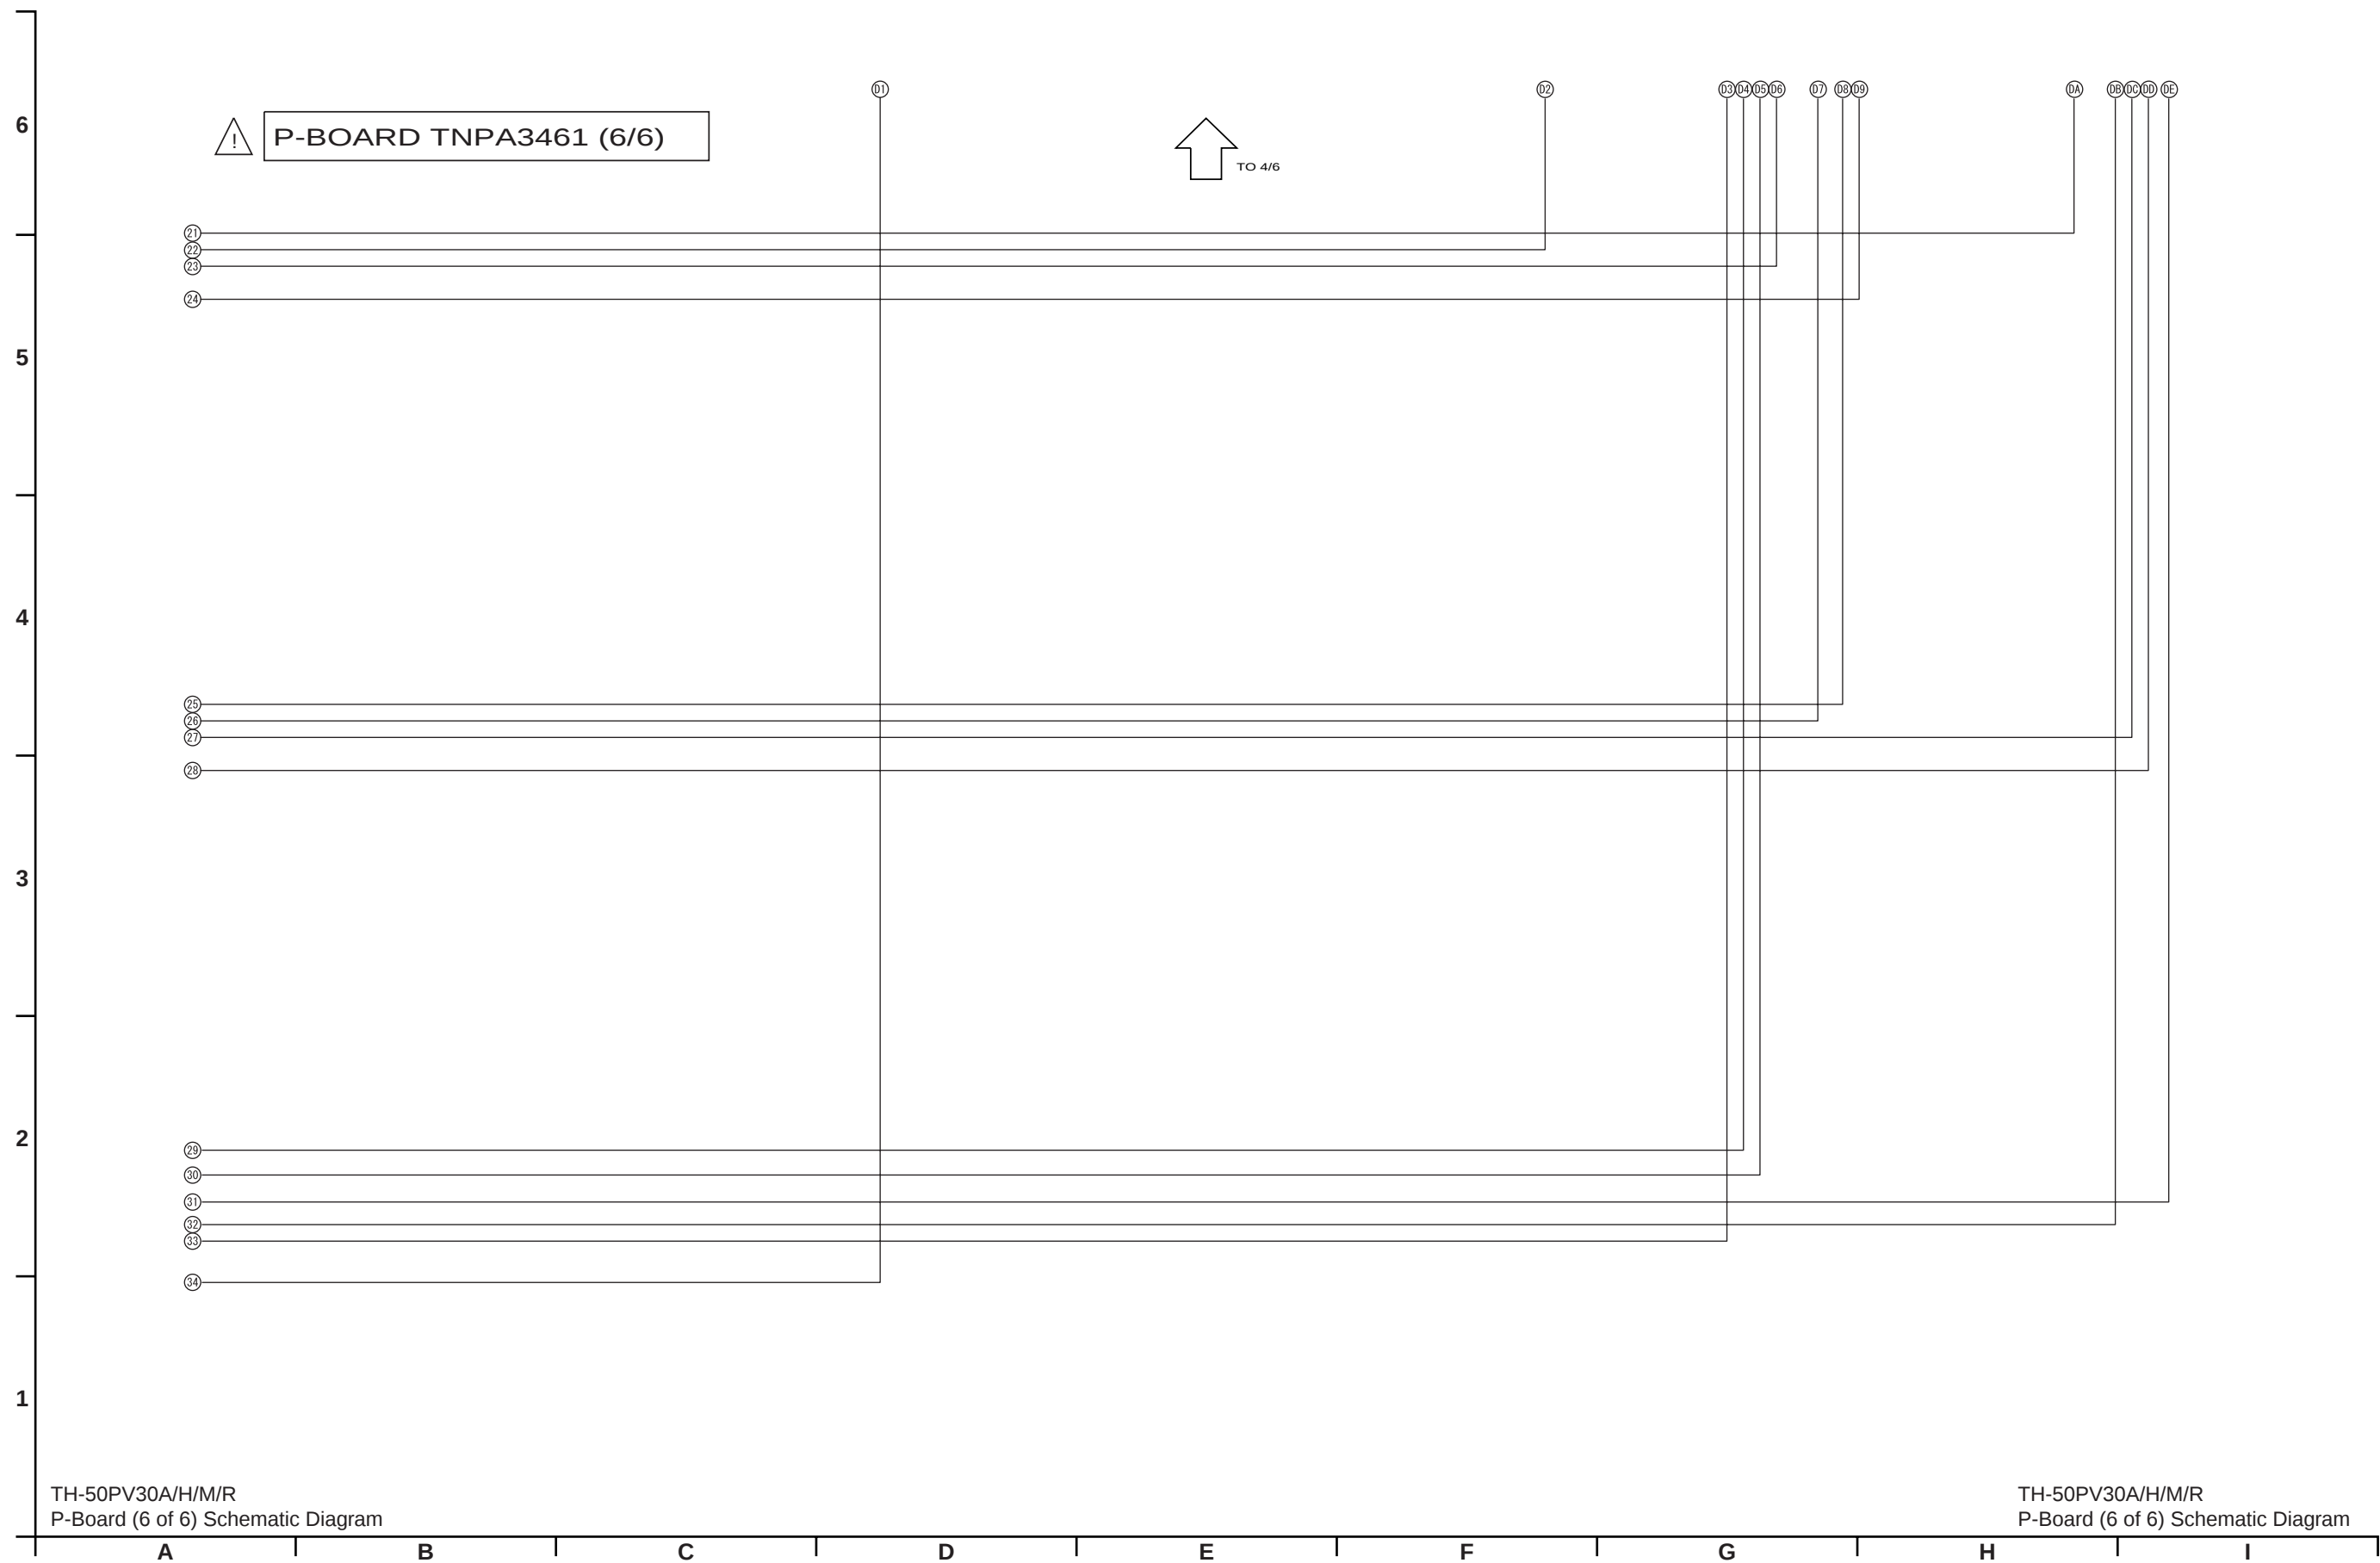


6.11. H, T, TA and TB-Board Block Diagram

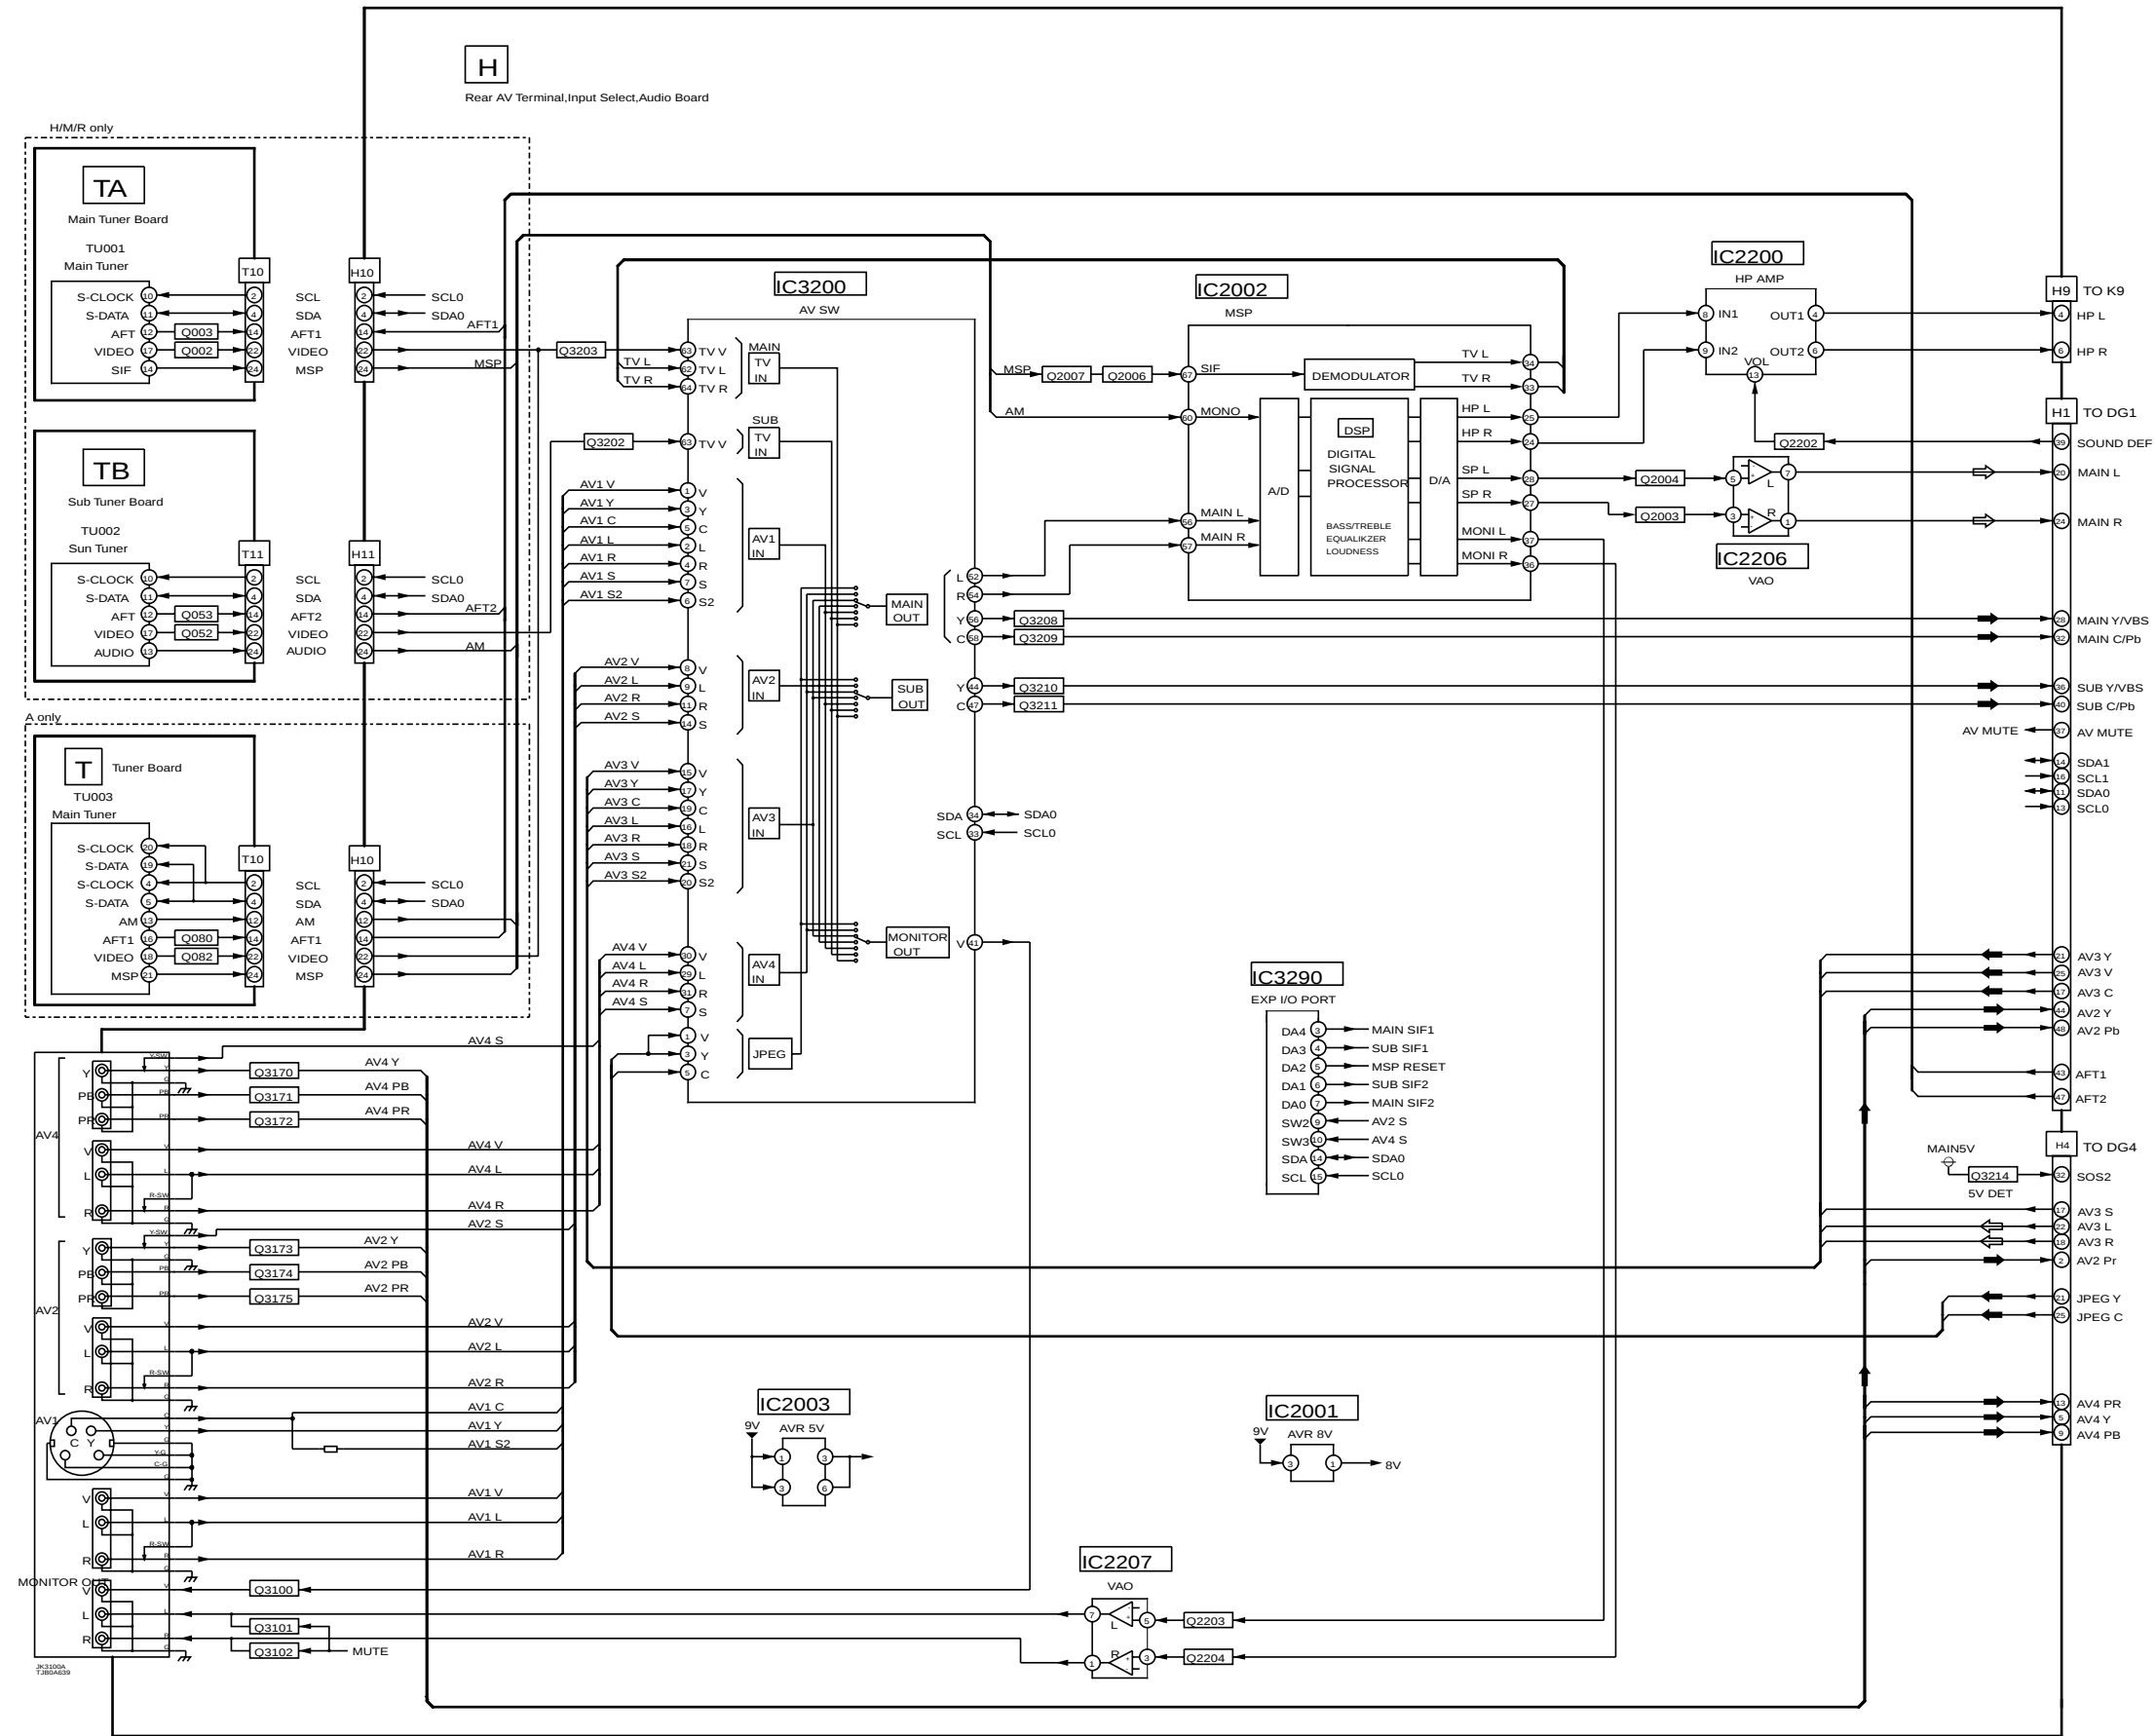


TH-50PV30A/H/M/R
H, T, TA, and TB-Board Block Diagram

TH-50PV30A/H/M/R
H, T, TA, and TB-Board Block Diagram


6.12. T, TA and TB-Board Schematic Diagram

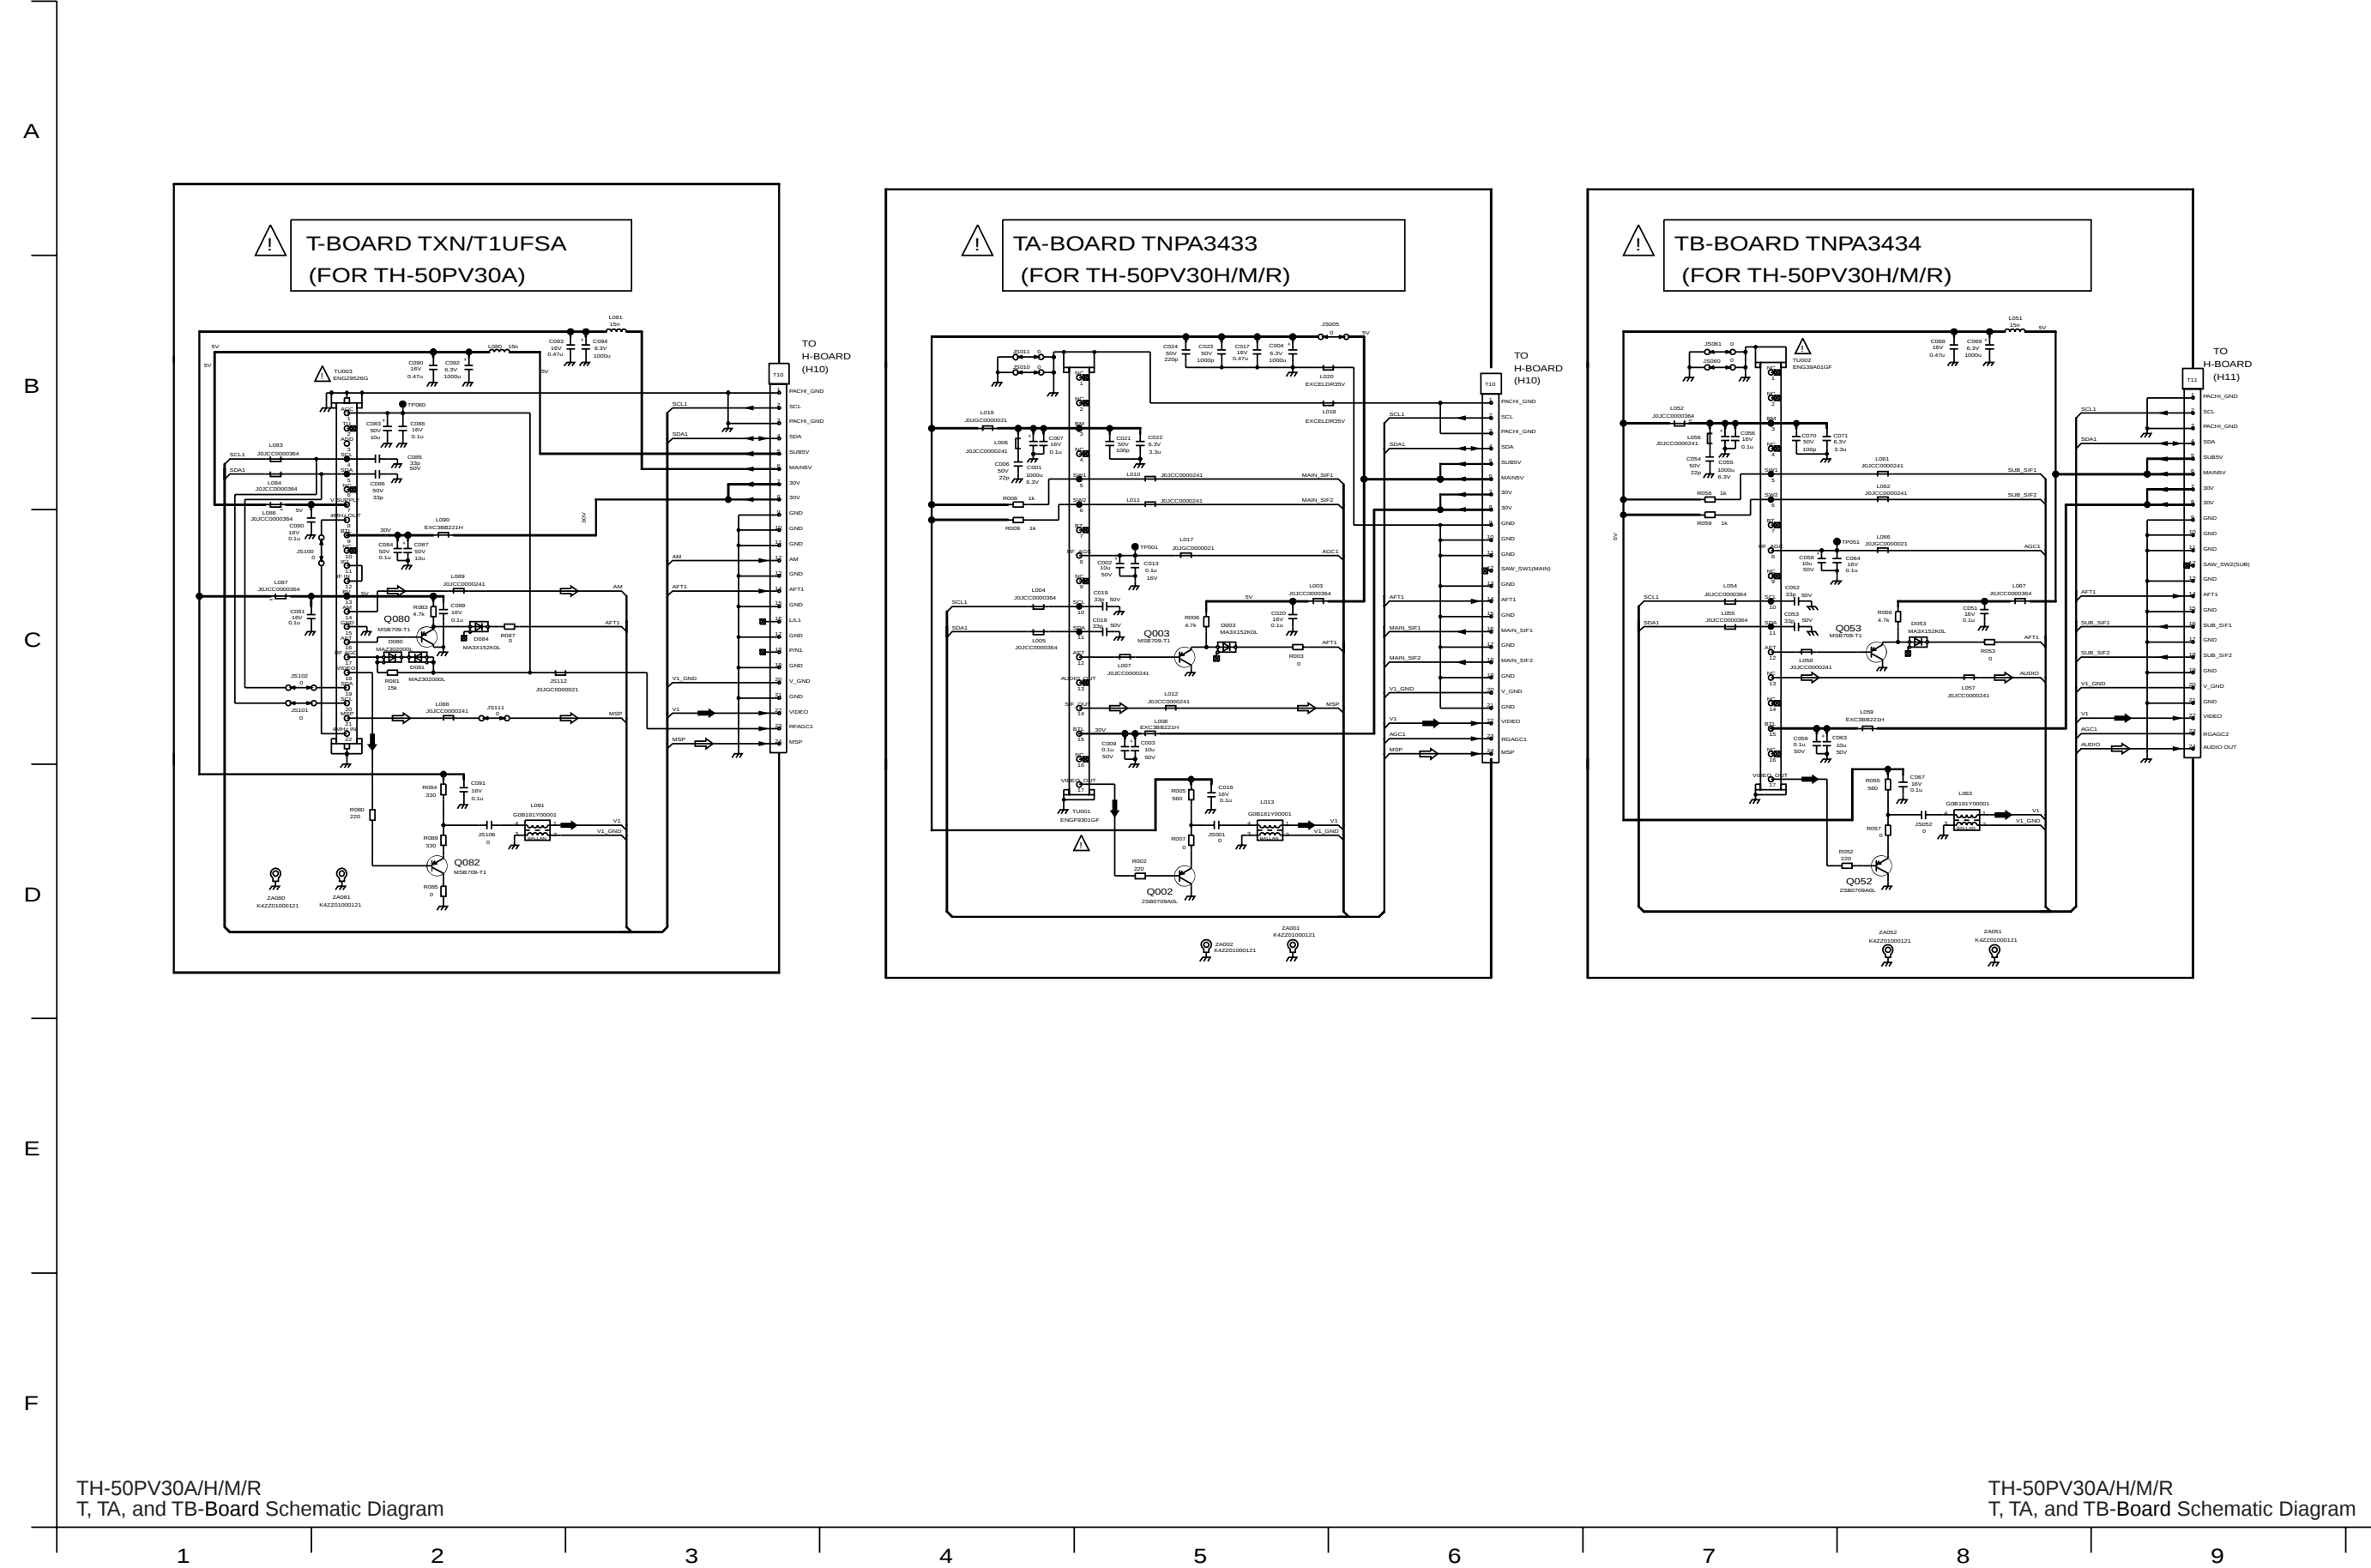


6.13. H-Board (1 of 2) Schematic Diagram

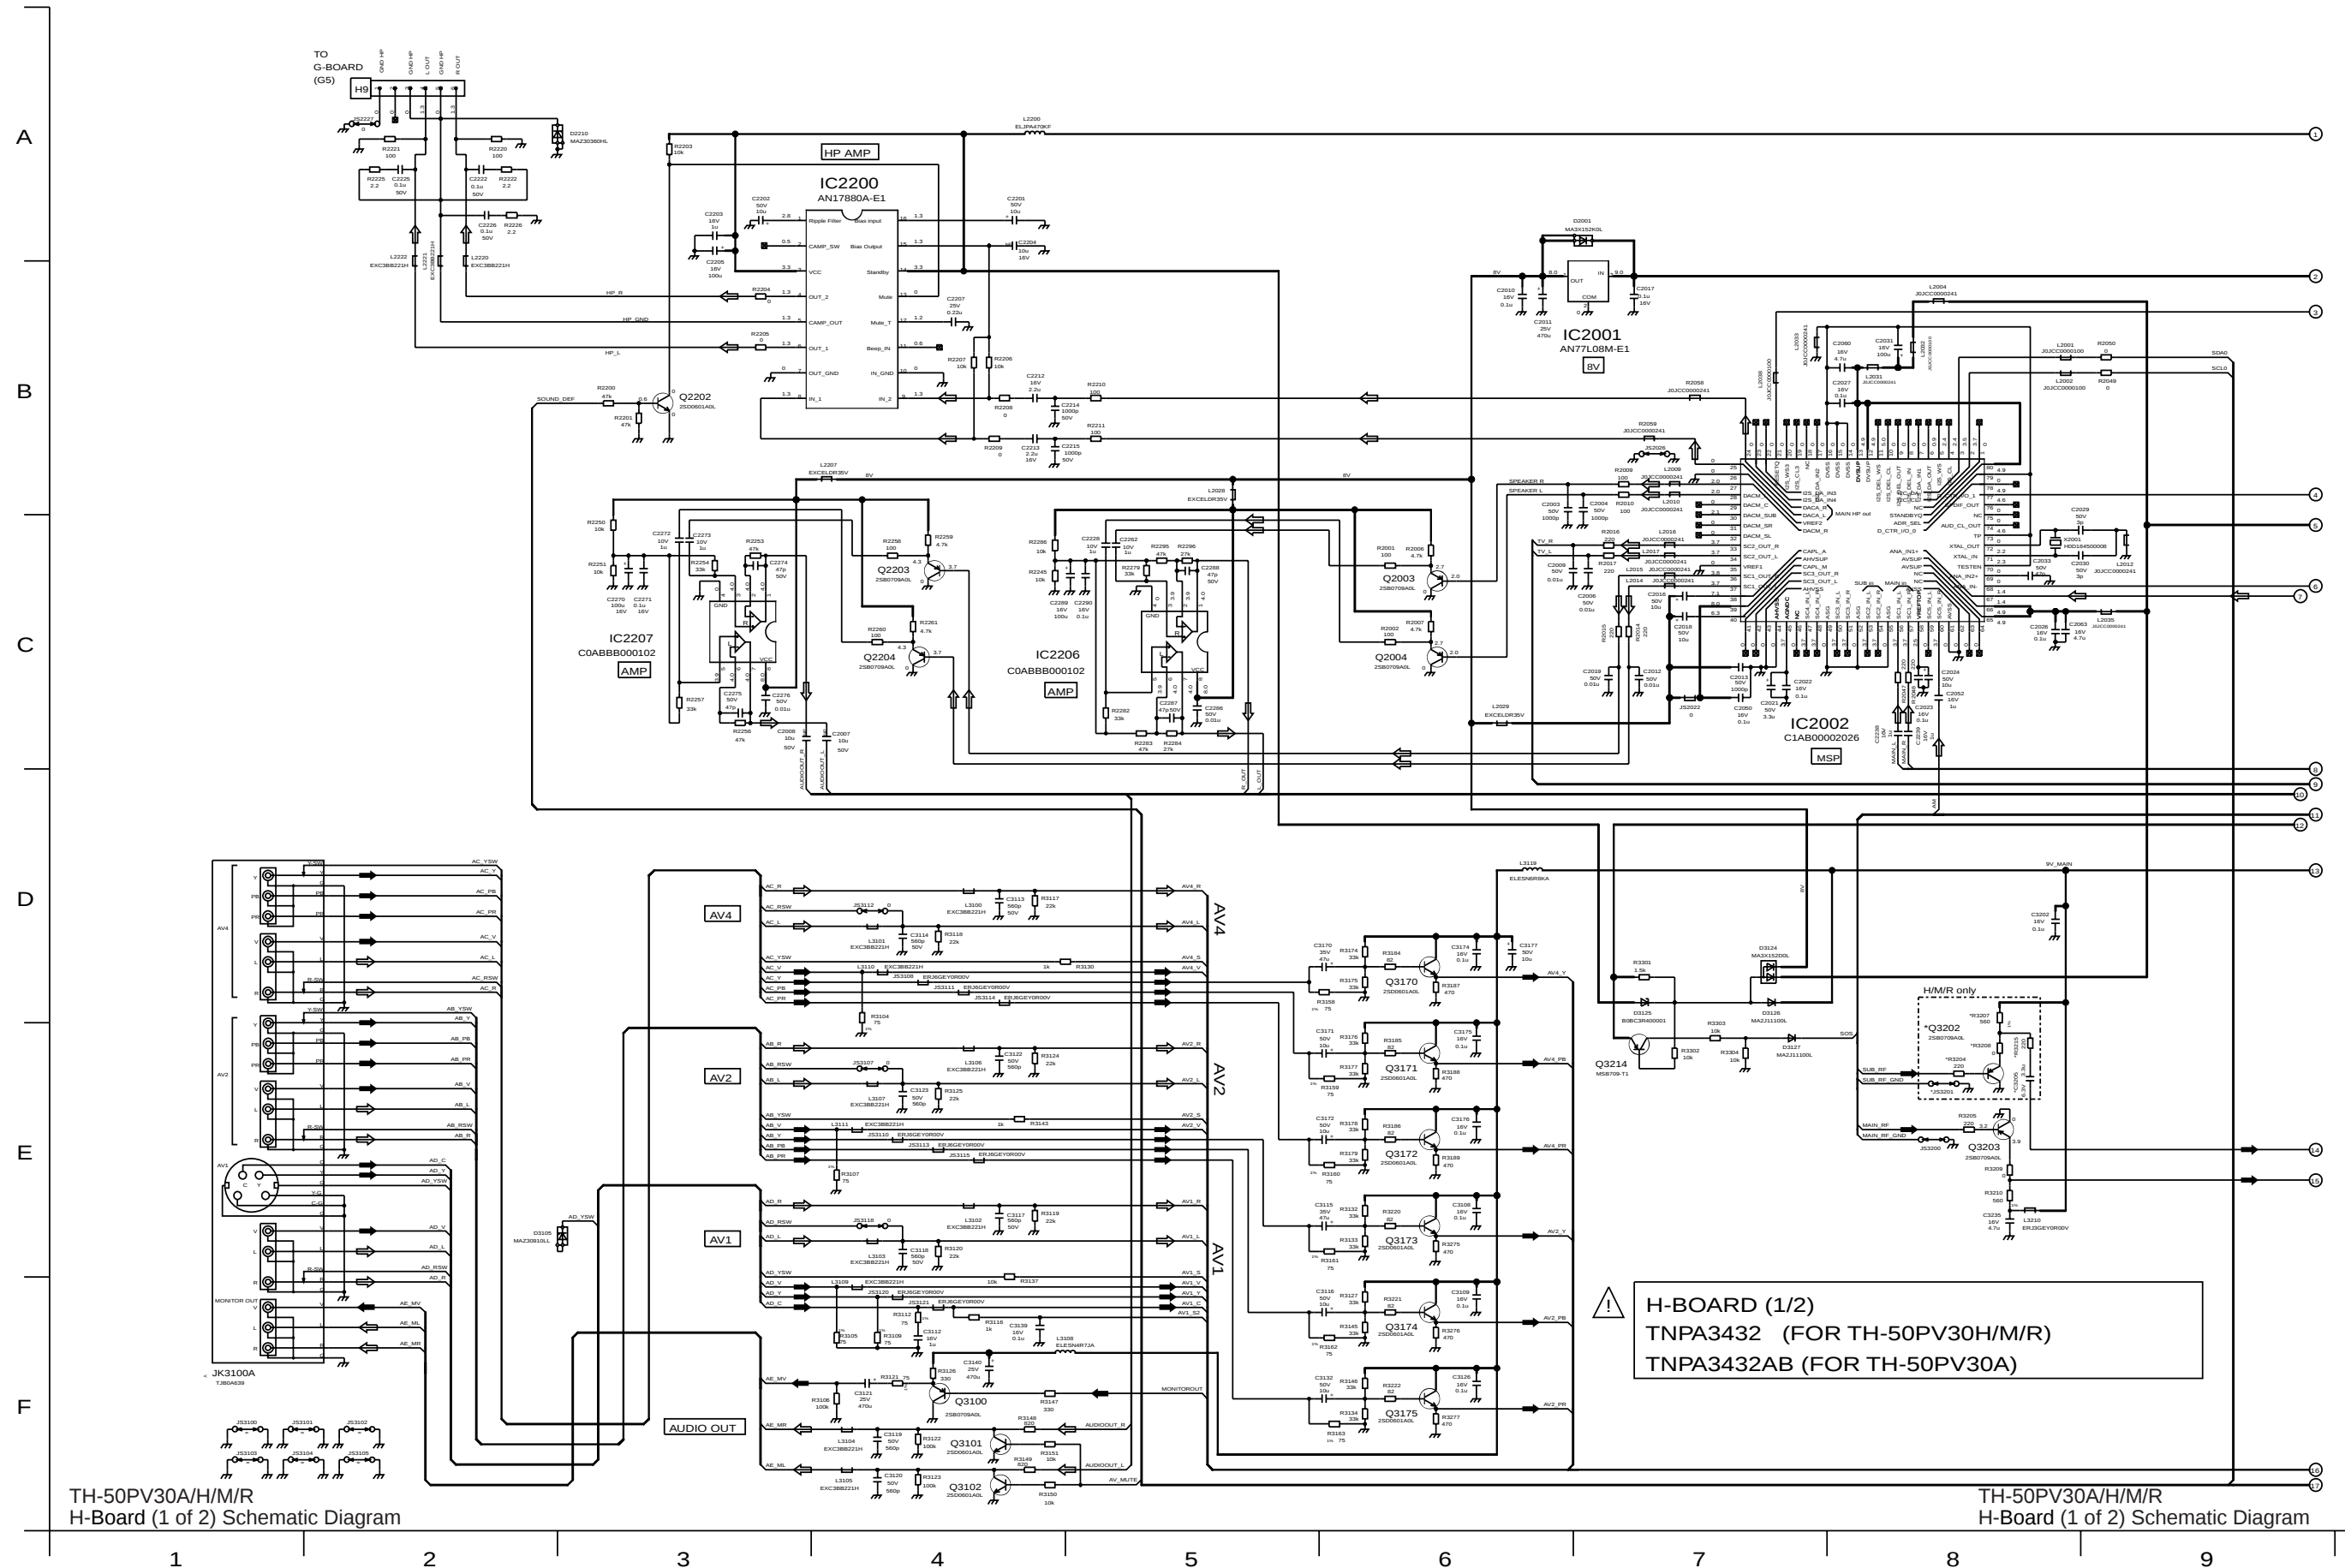

6.14. H-Board (2 of 2) Schematic Diagram

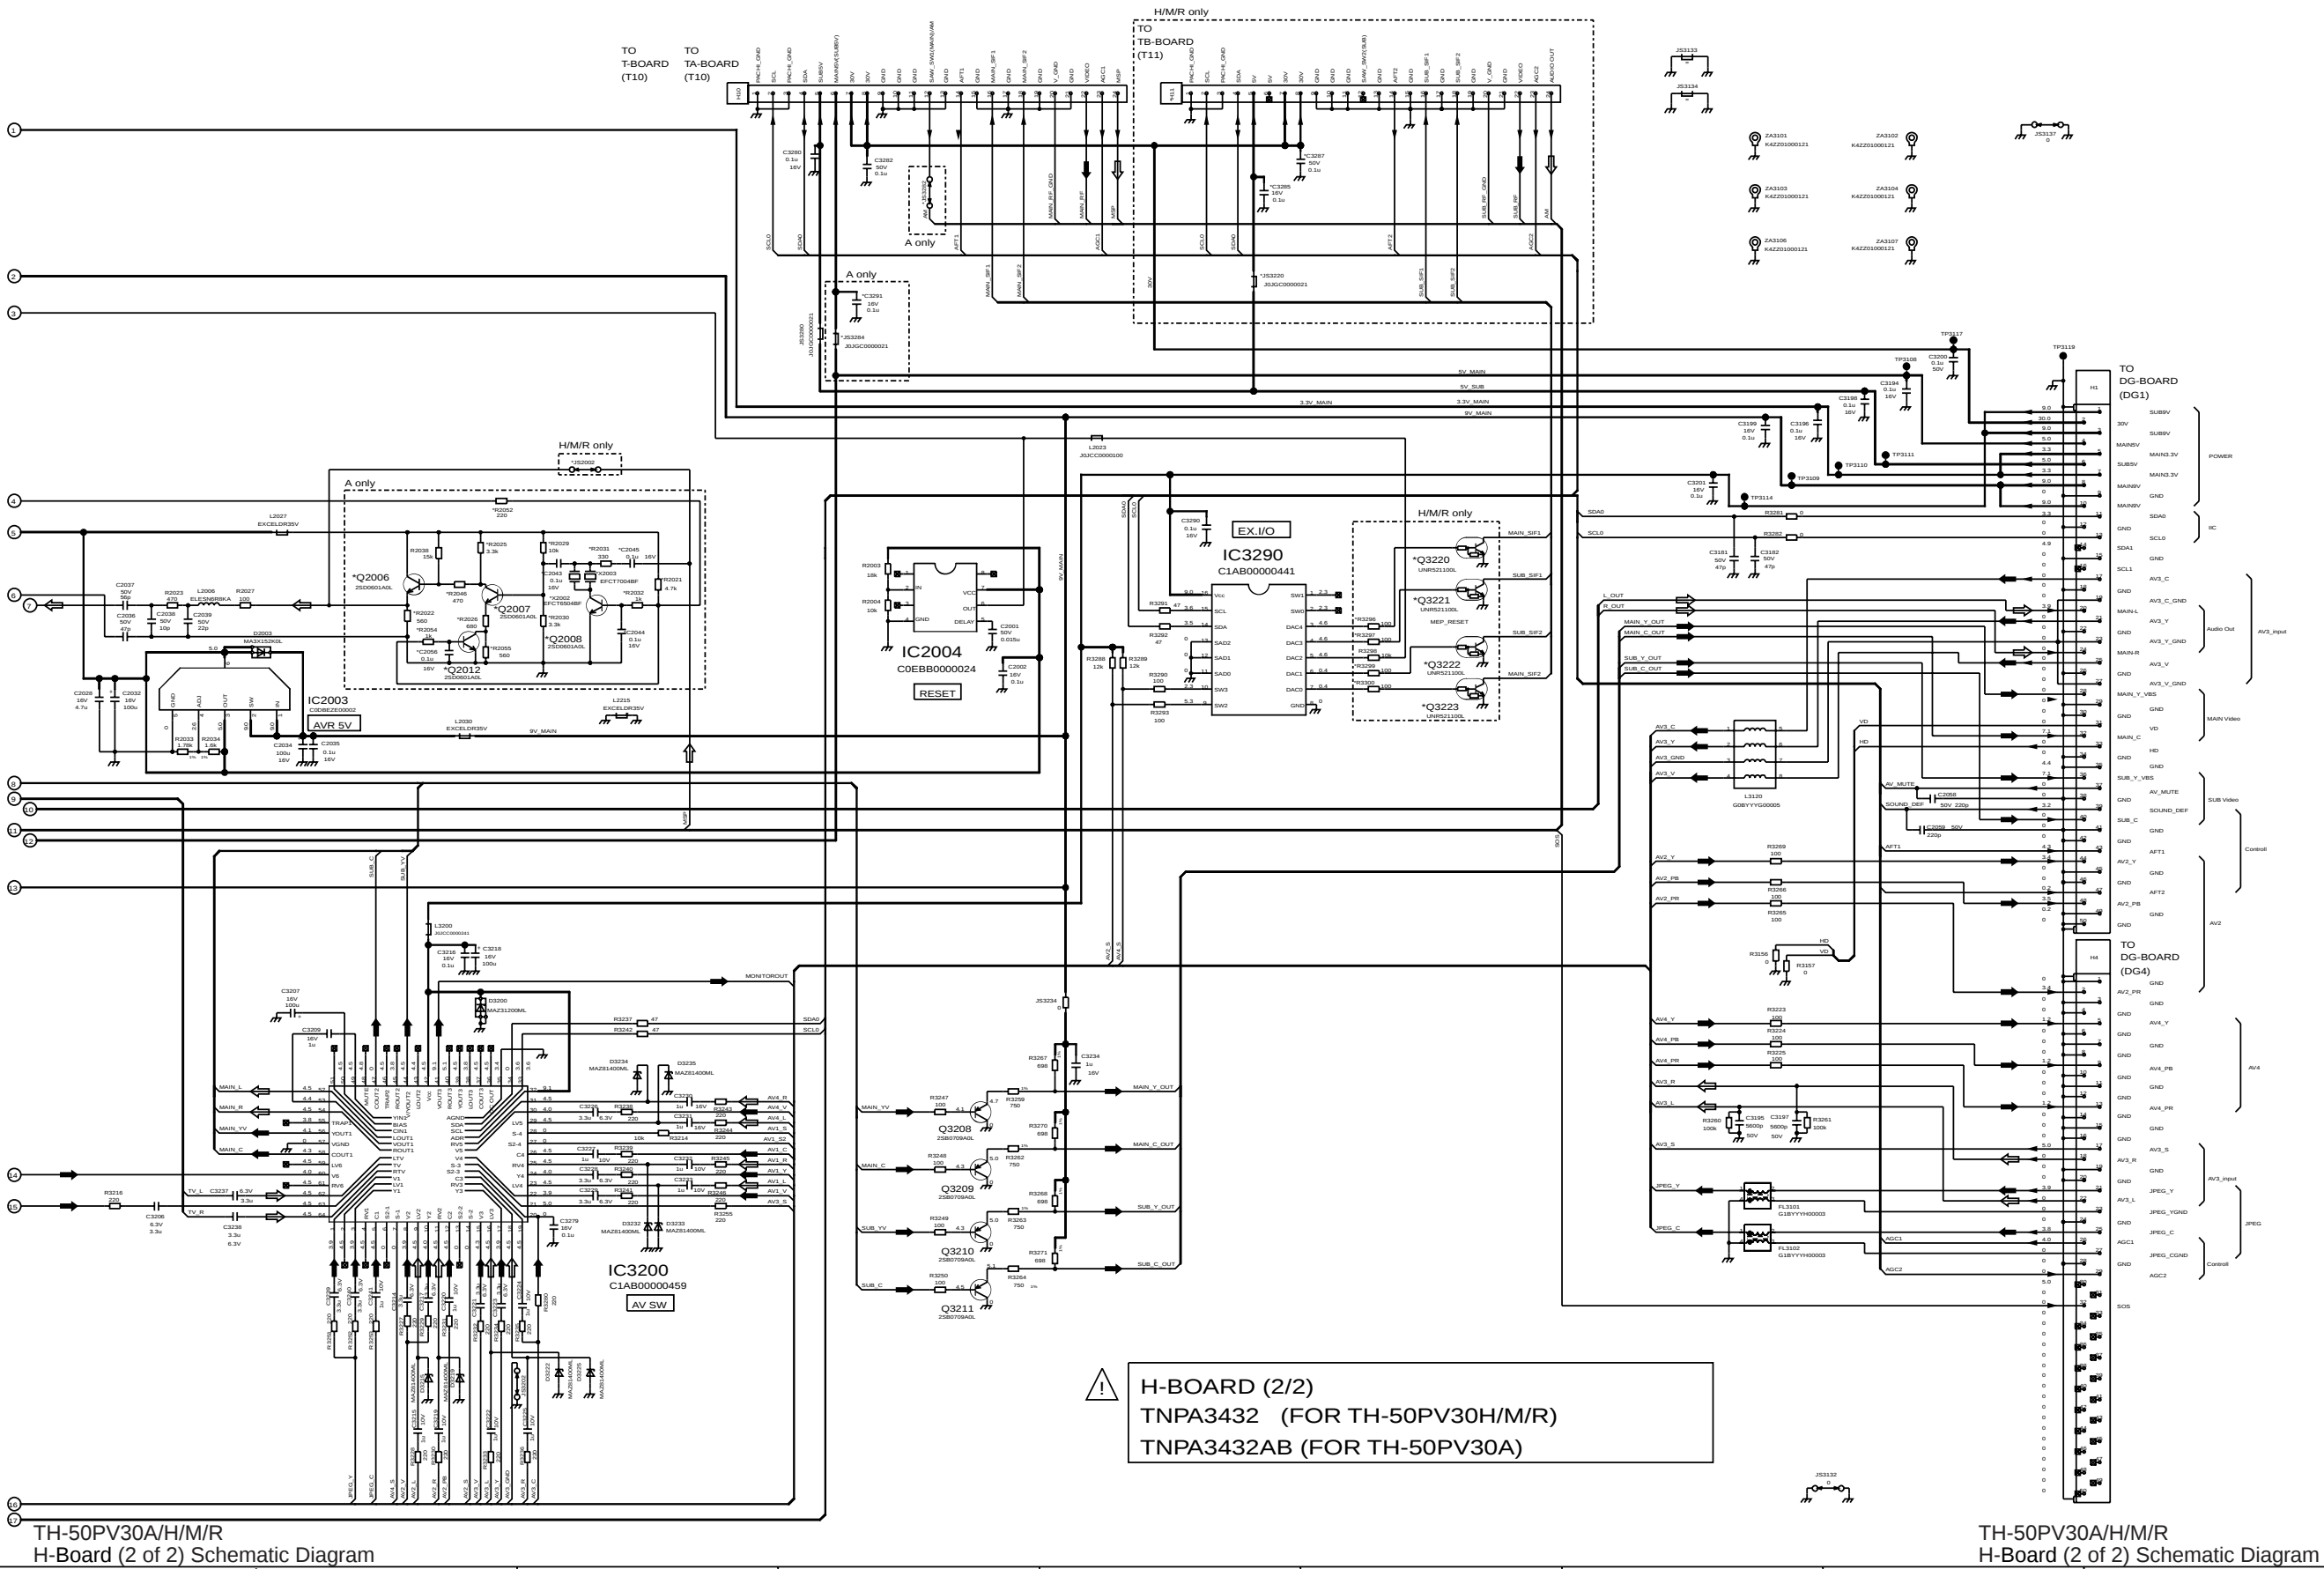


6.15. DG-Board (1 of 2) Block Diagram

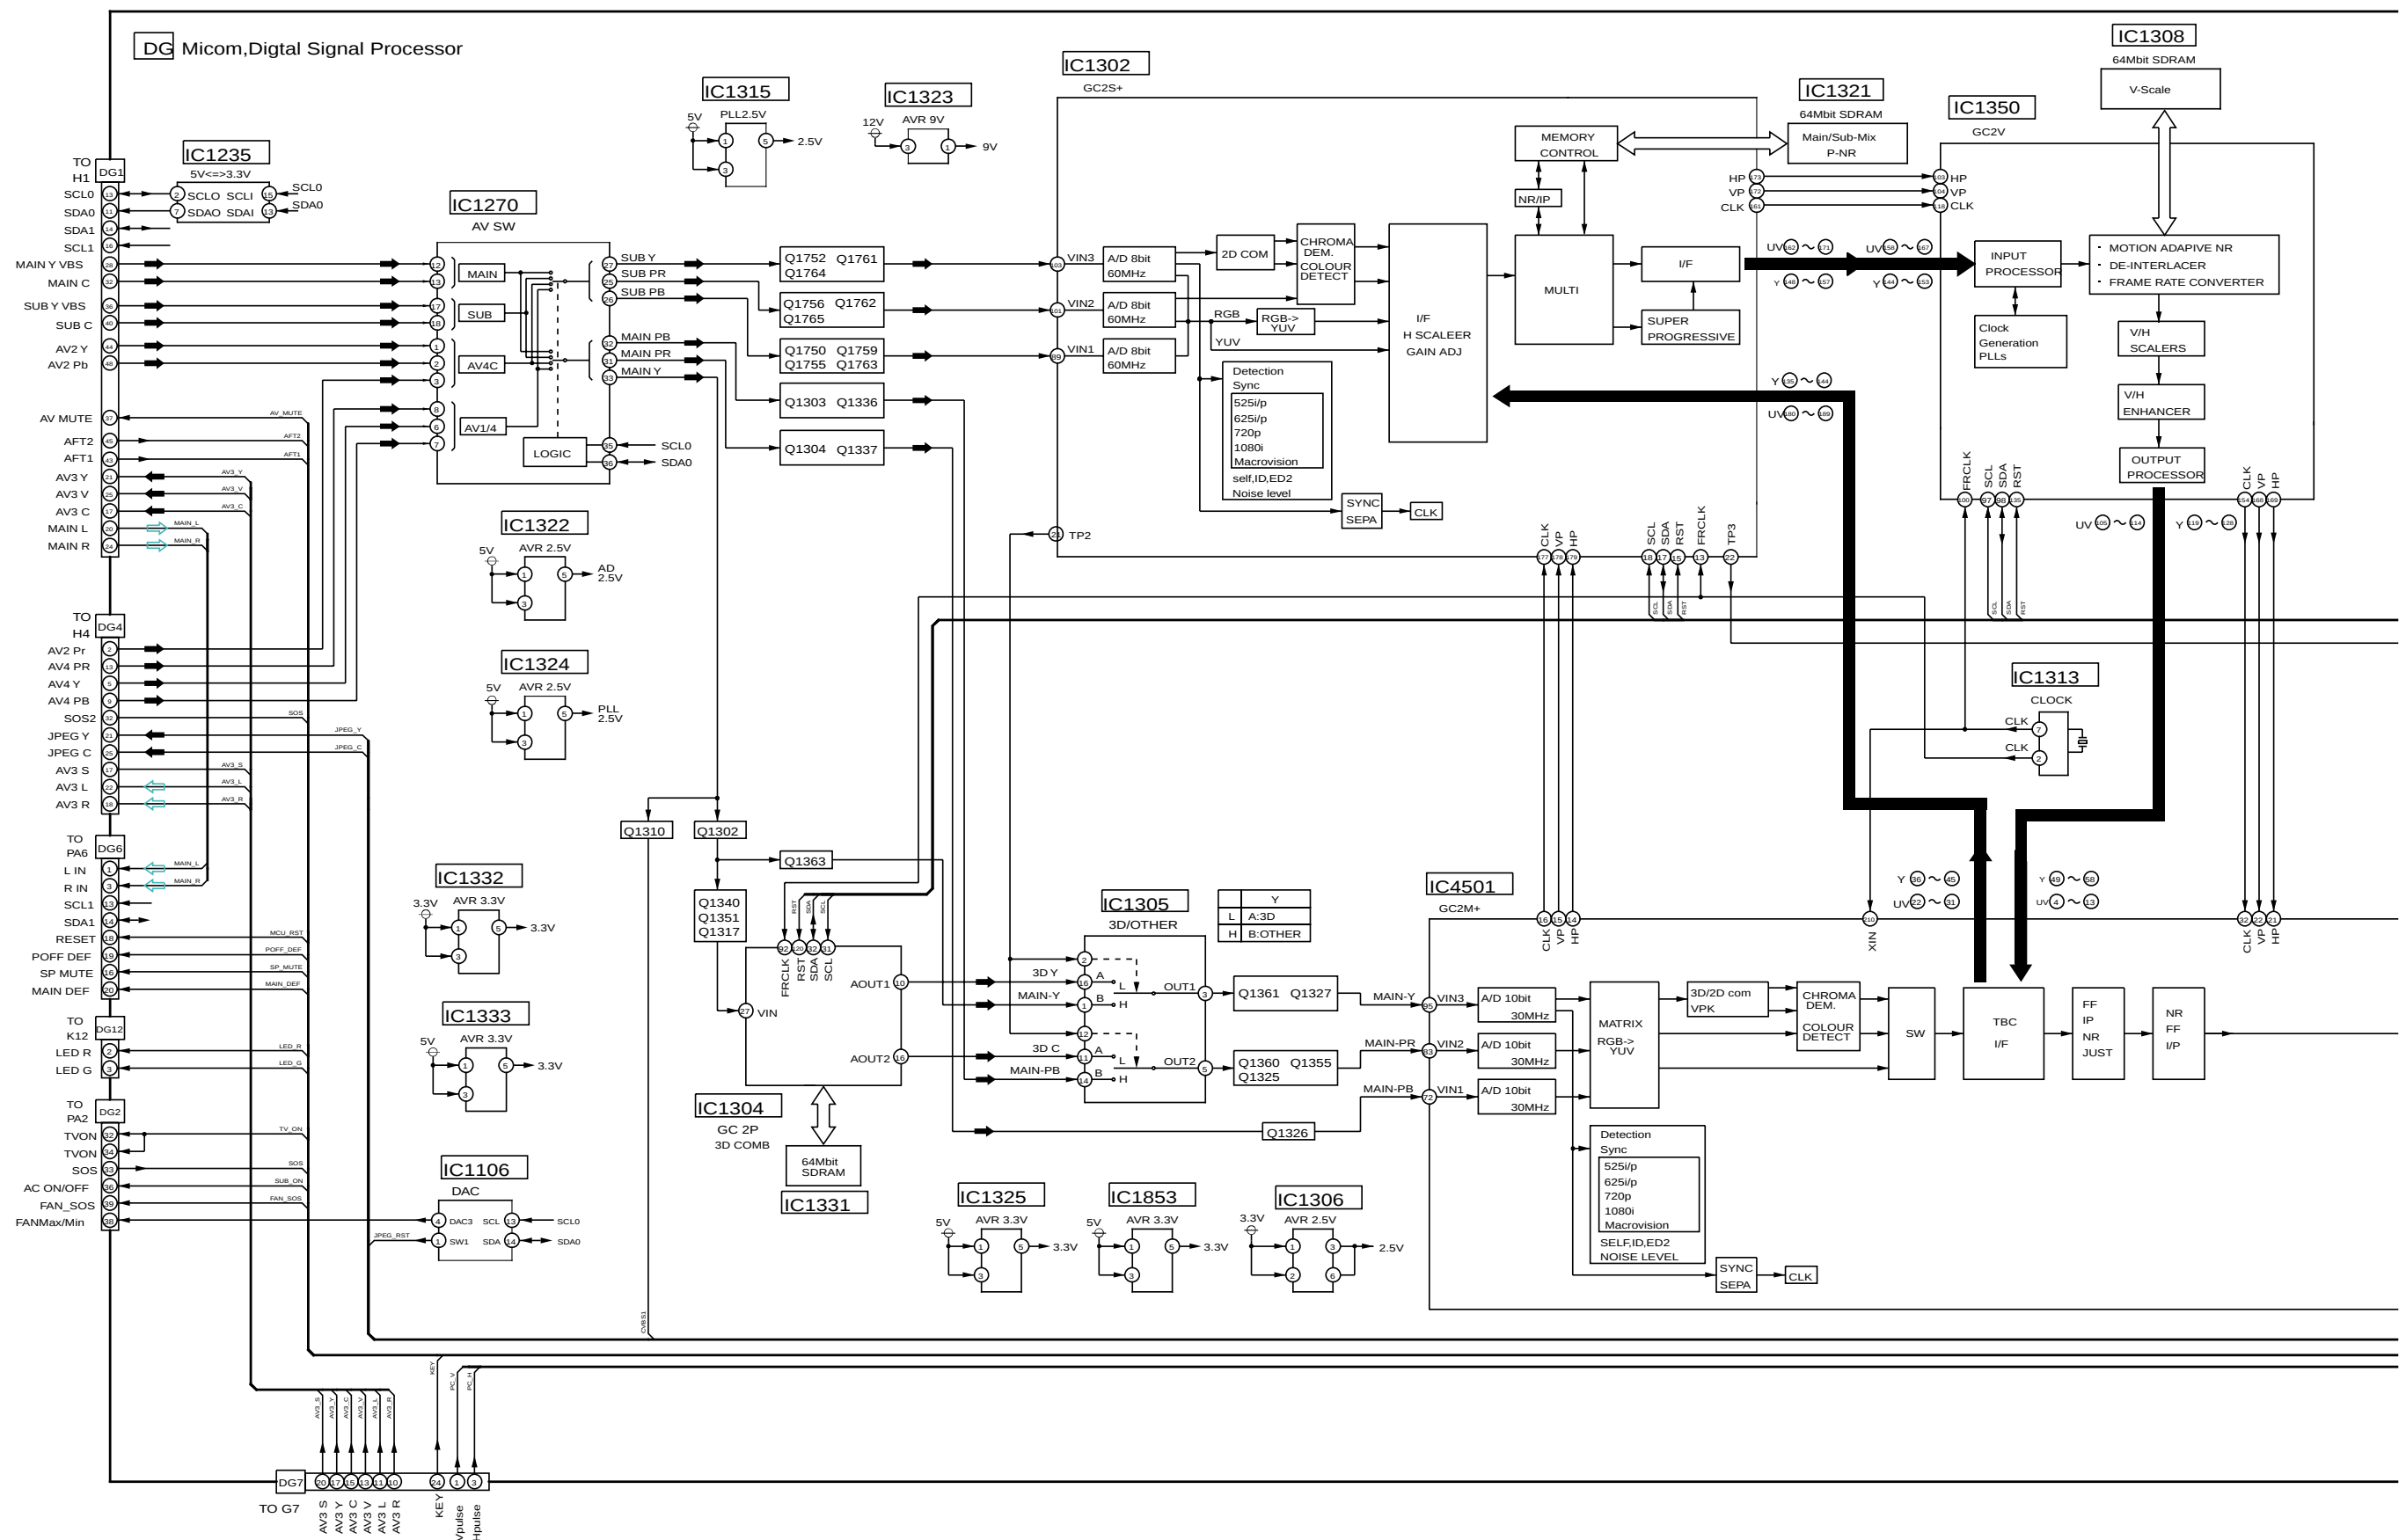


TH-50PV30A/H/M/R
DG-Board (1 of 2) Block Diagram

TH-50PV30A/H/M/R
DG-Board (1 of 2) Block Diagram

6.17. DG-Board (1 of 8) Schematic Diagram

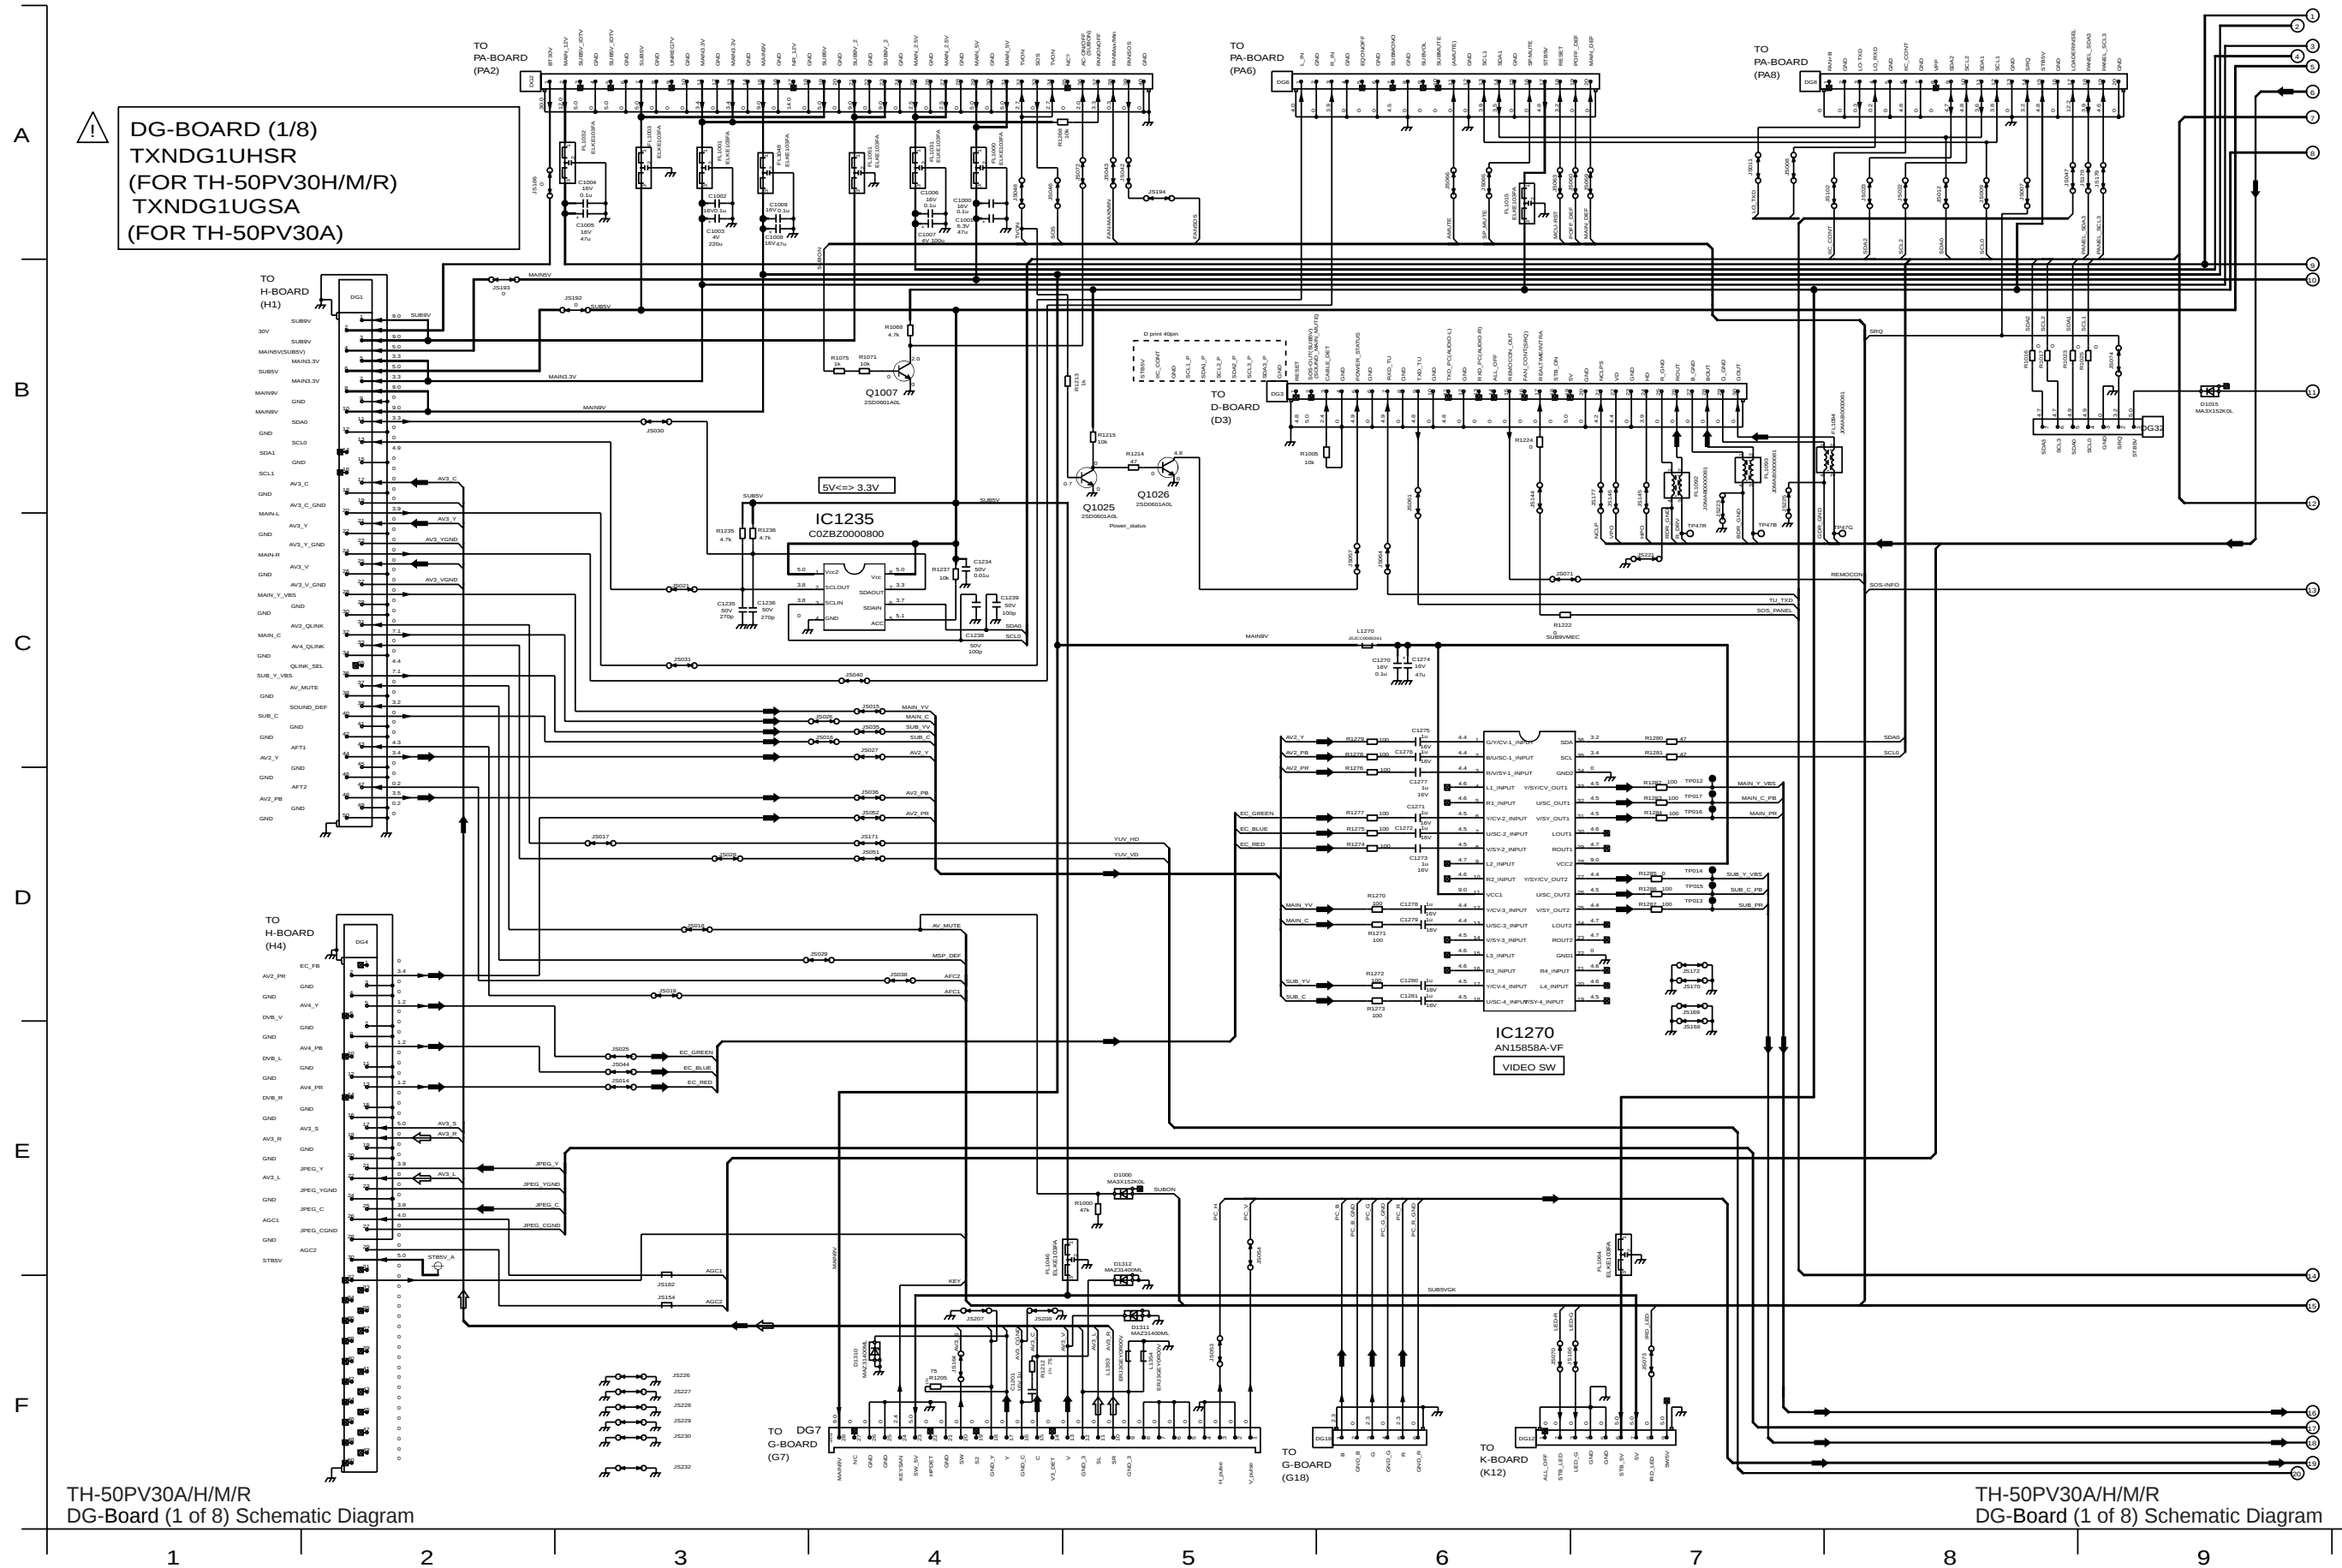


6.18. DG-Board (2 of 8) Schematic Diagram

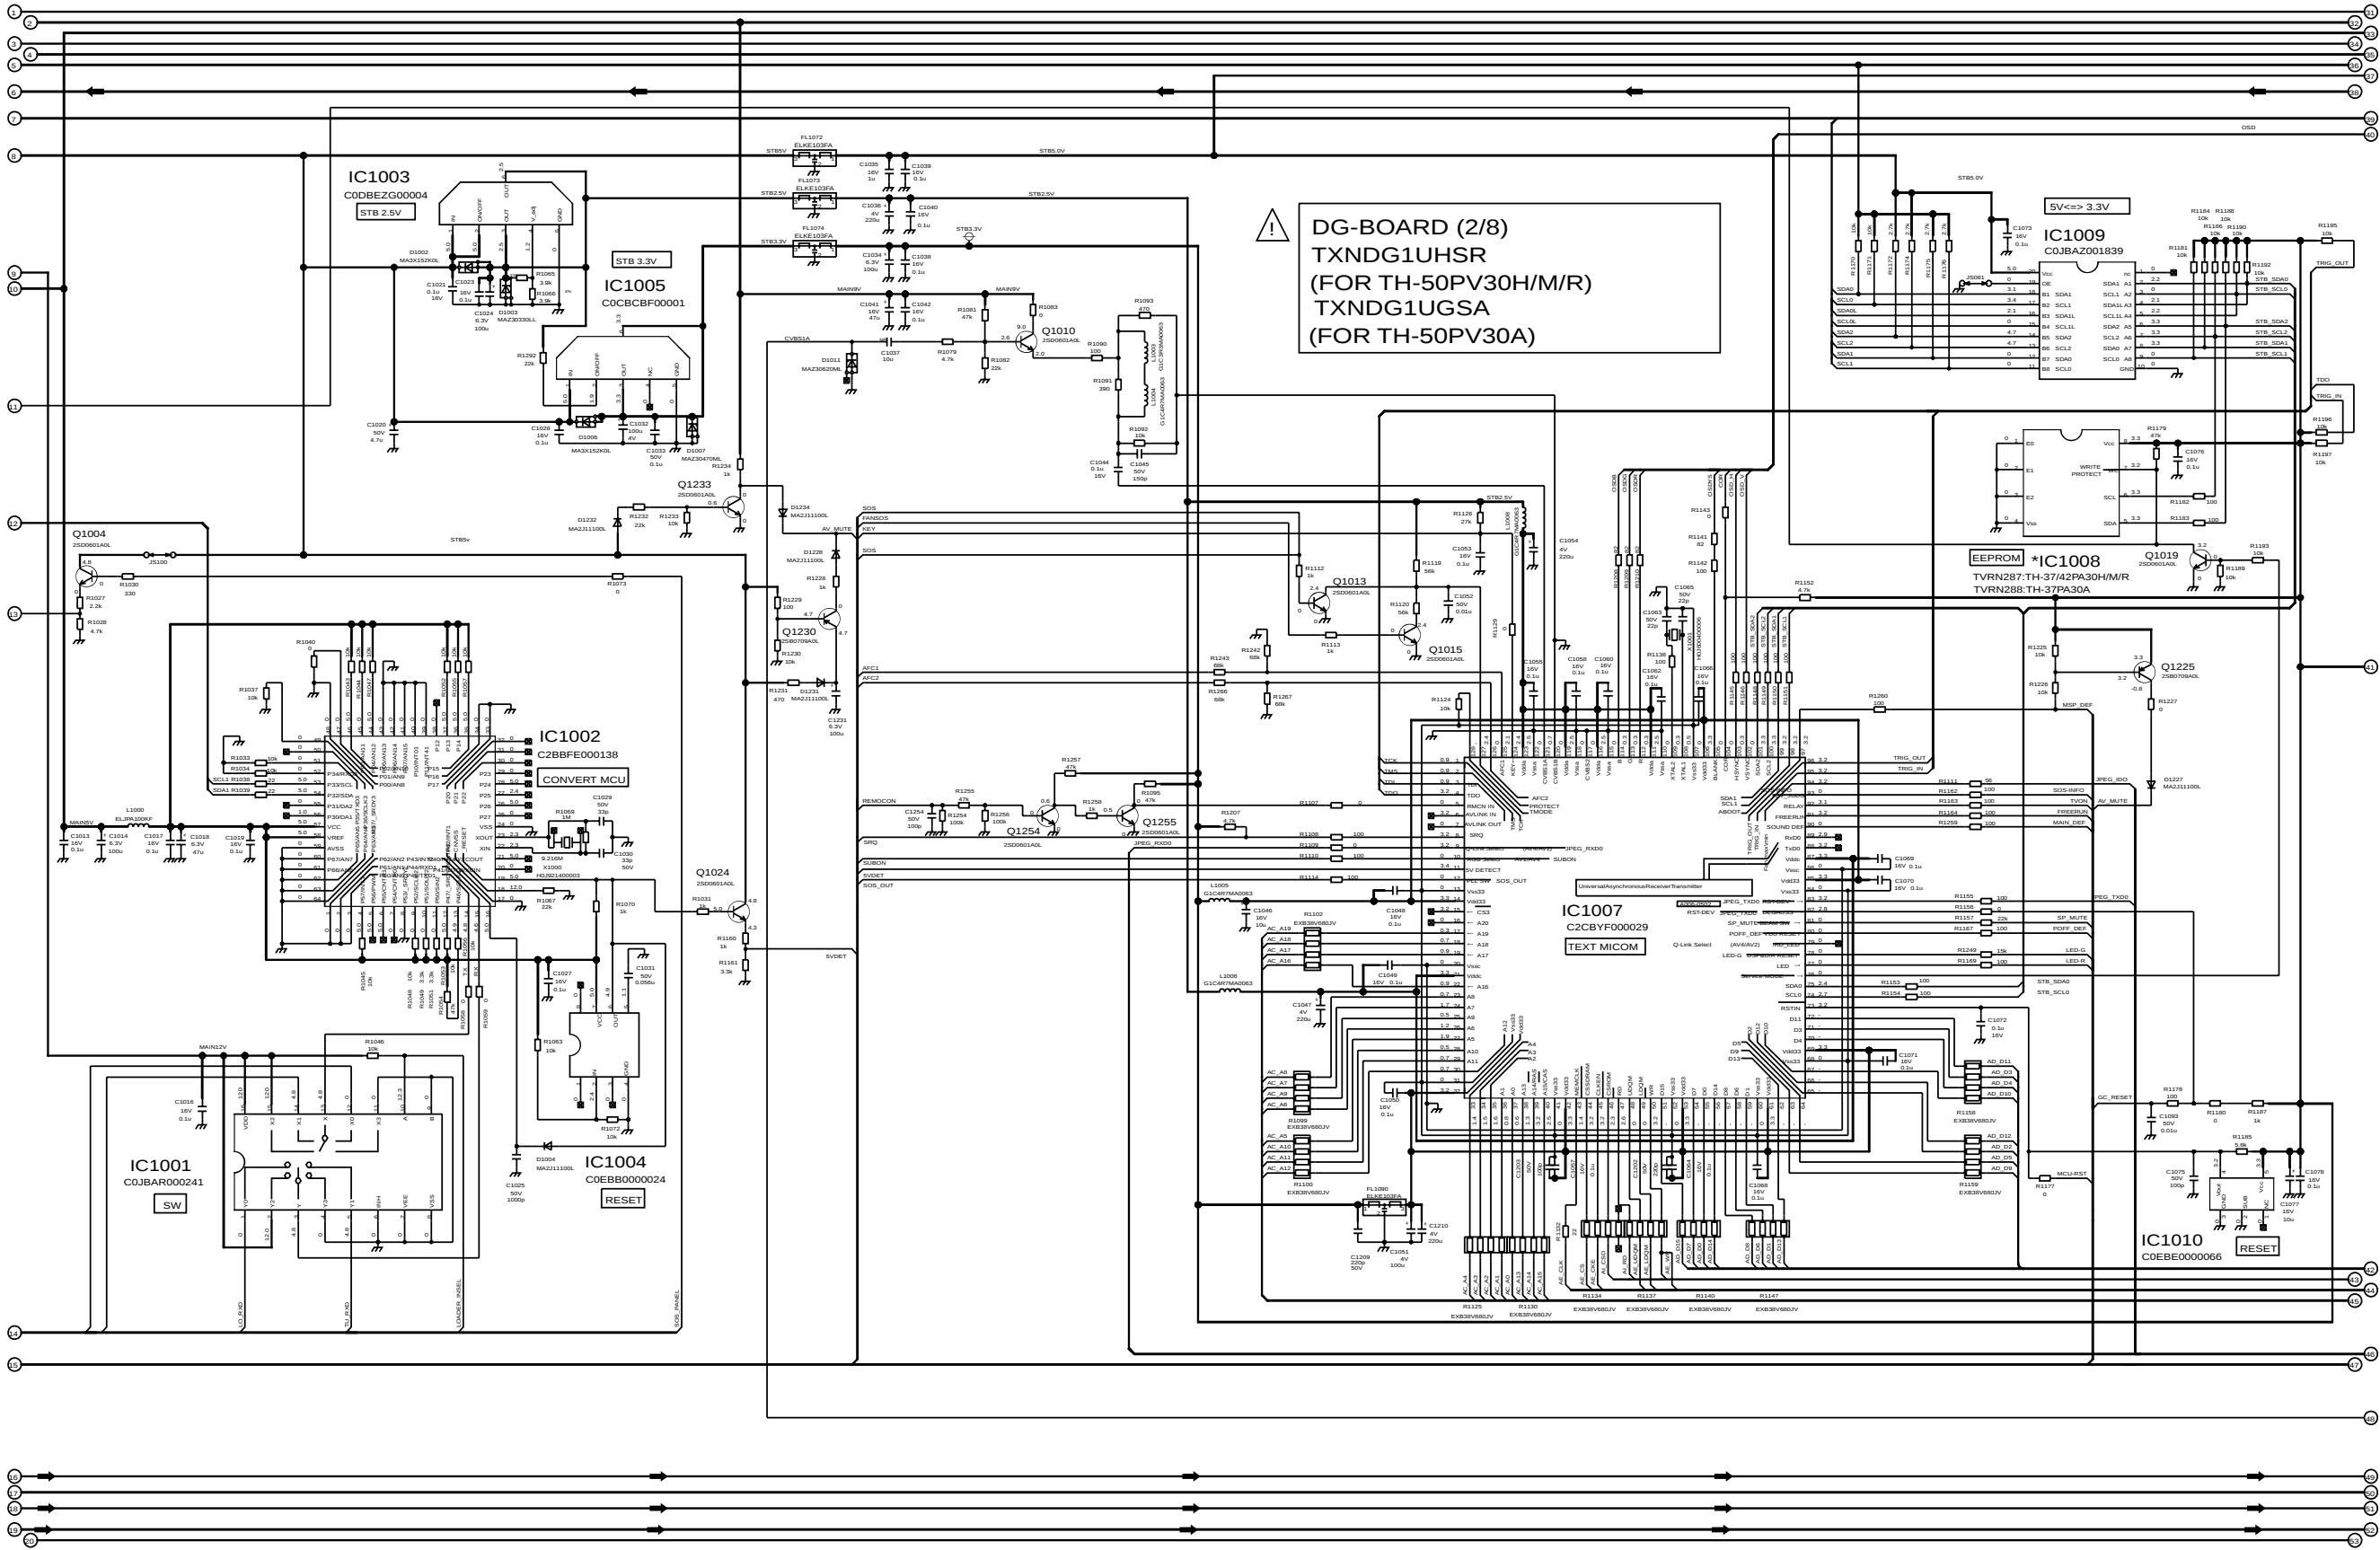


TH-50PV30A/H/M/R
DG-Board (2 of 8) Schematic Diagram

TH-50PV30A/H/M/R
DG-Board (2 of 8) Schematic Diagram

6.19. DG-Board (3 of 8) Schematic Diagram

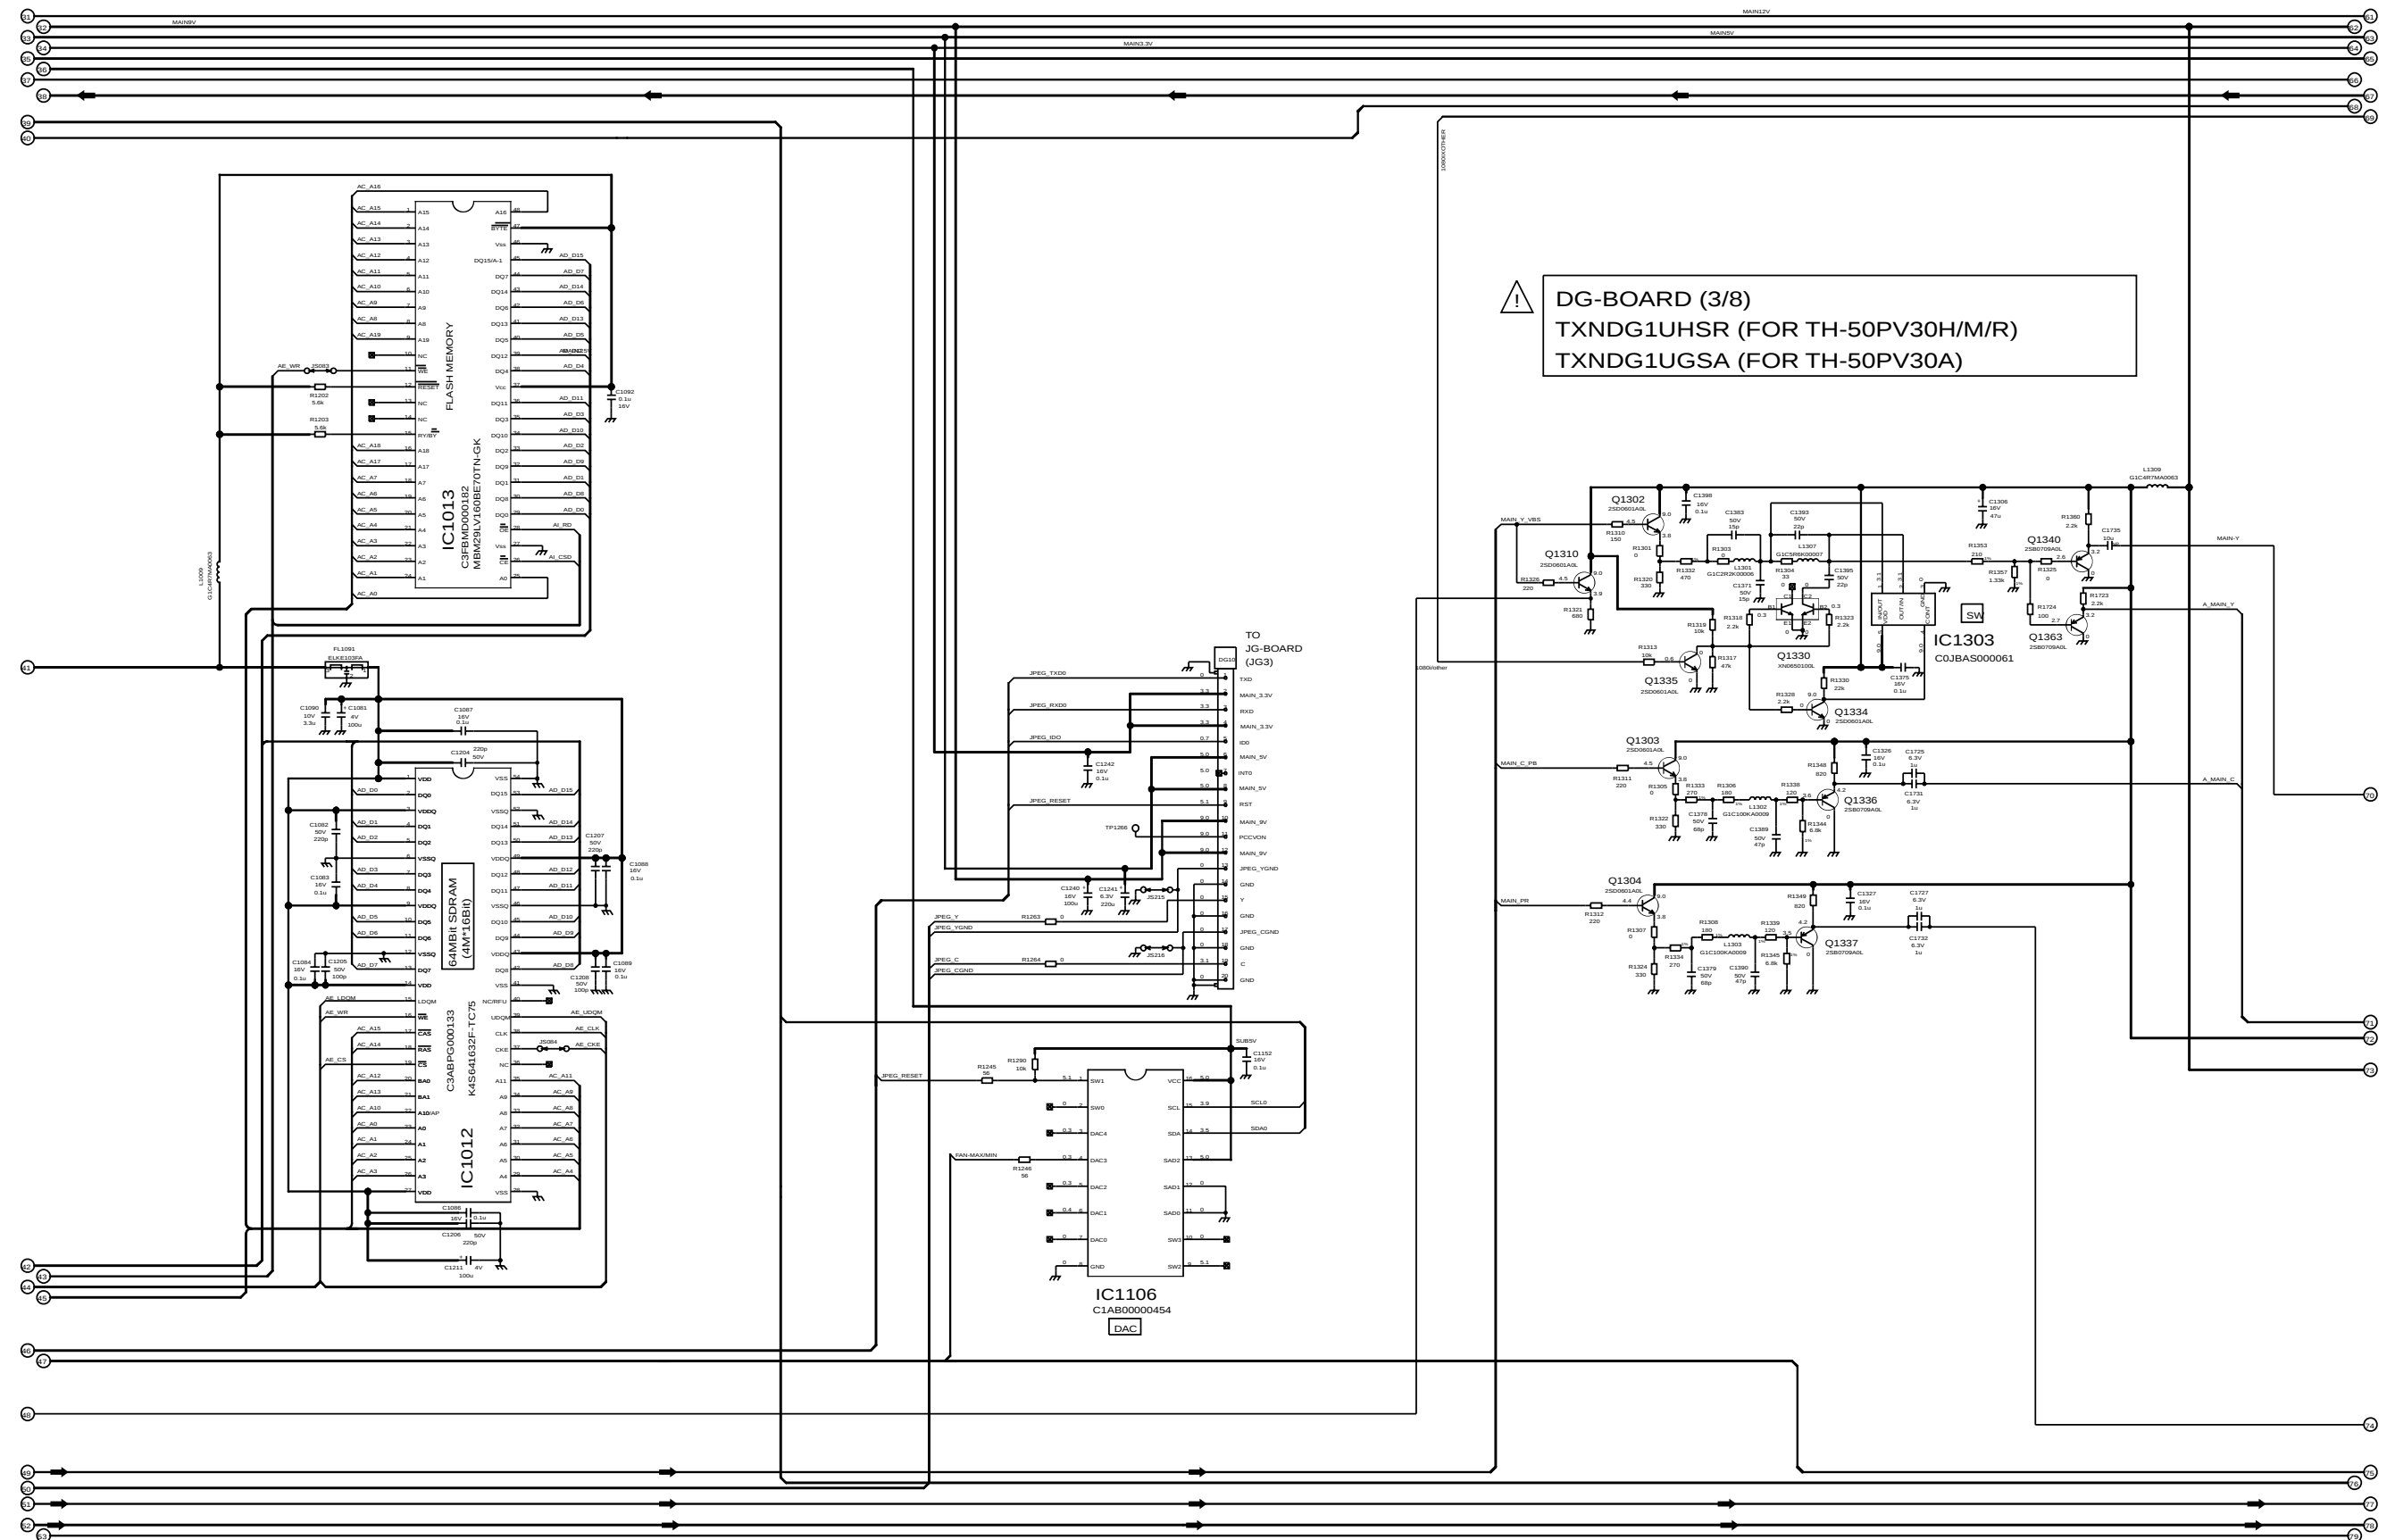TH-50PV30A/H/M/R
DG-Board (3 of 8) Schematic DiagramTH-50PV30A/H/M/R
DG-Board (3 of 8) Schematic Diagram


6.21. DG-Board (5 of 8) Schematic Diagram

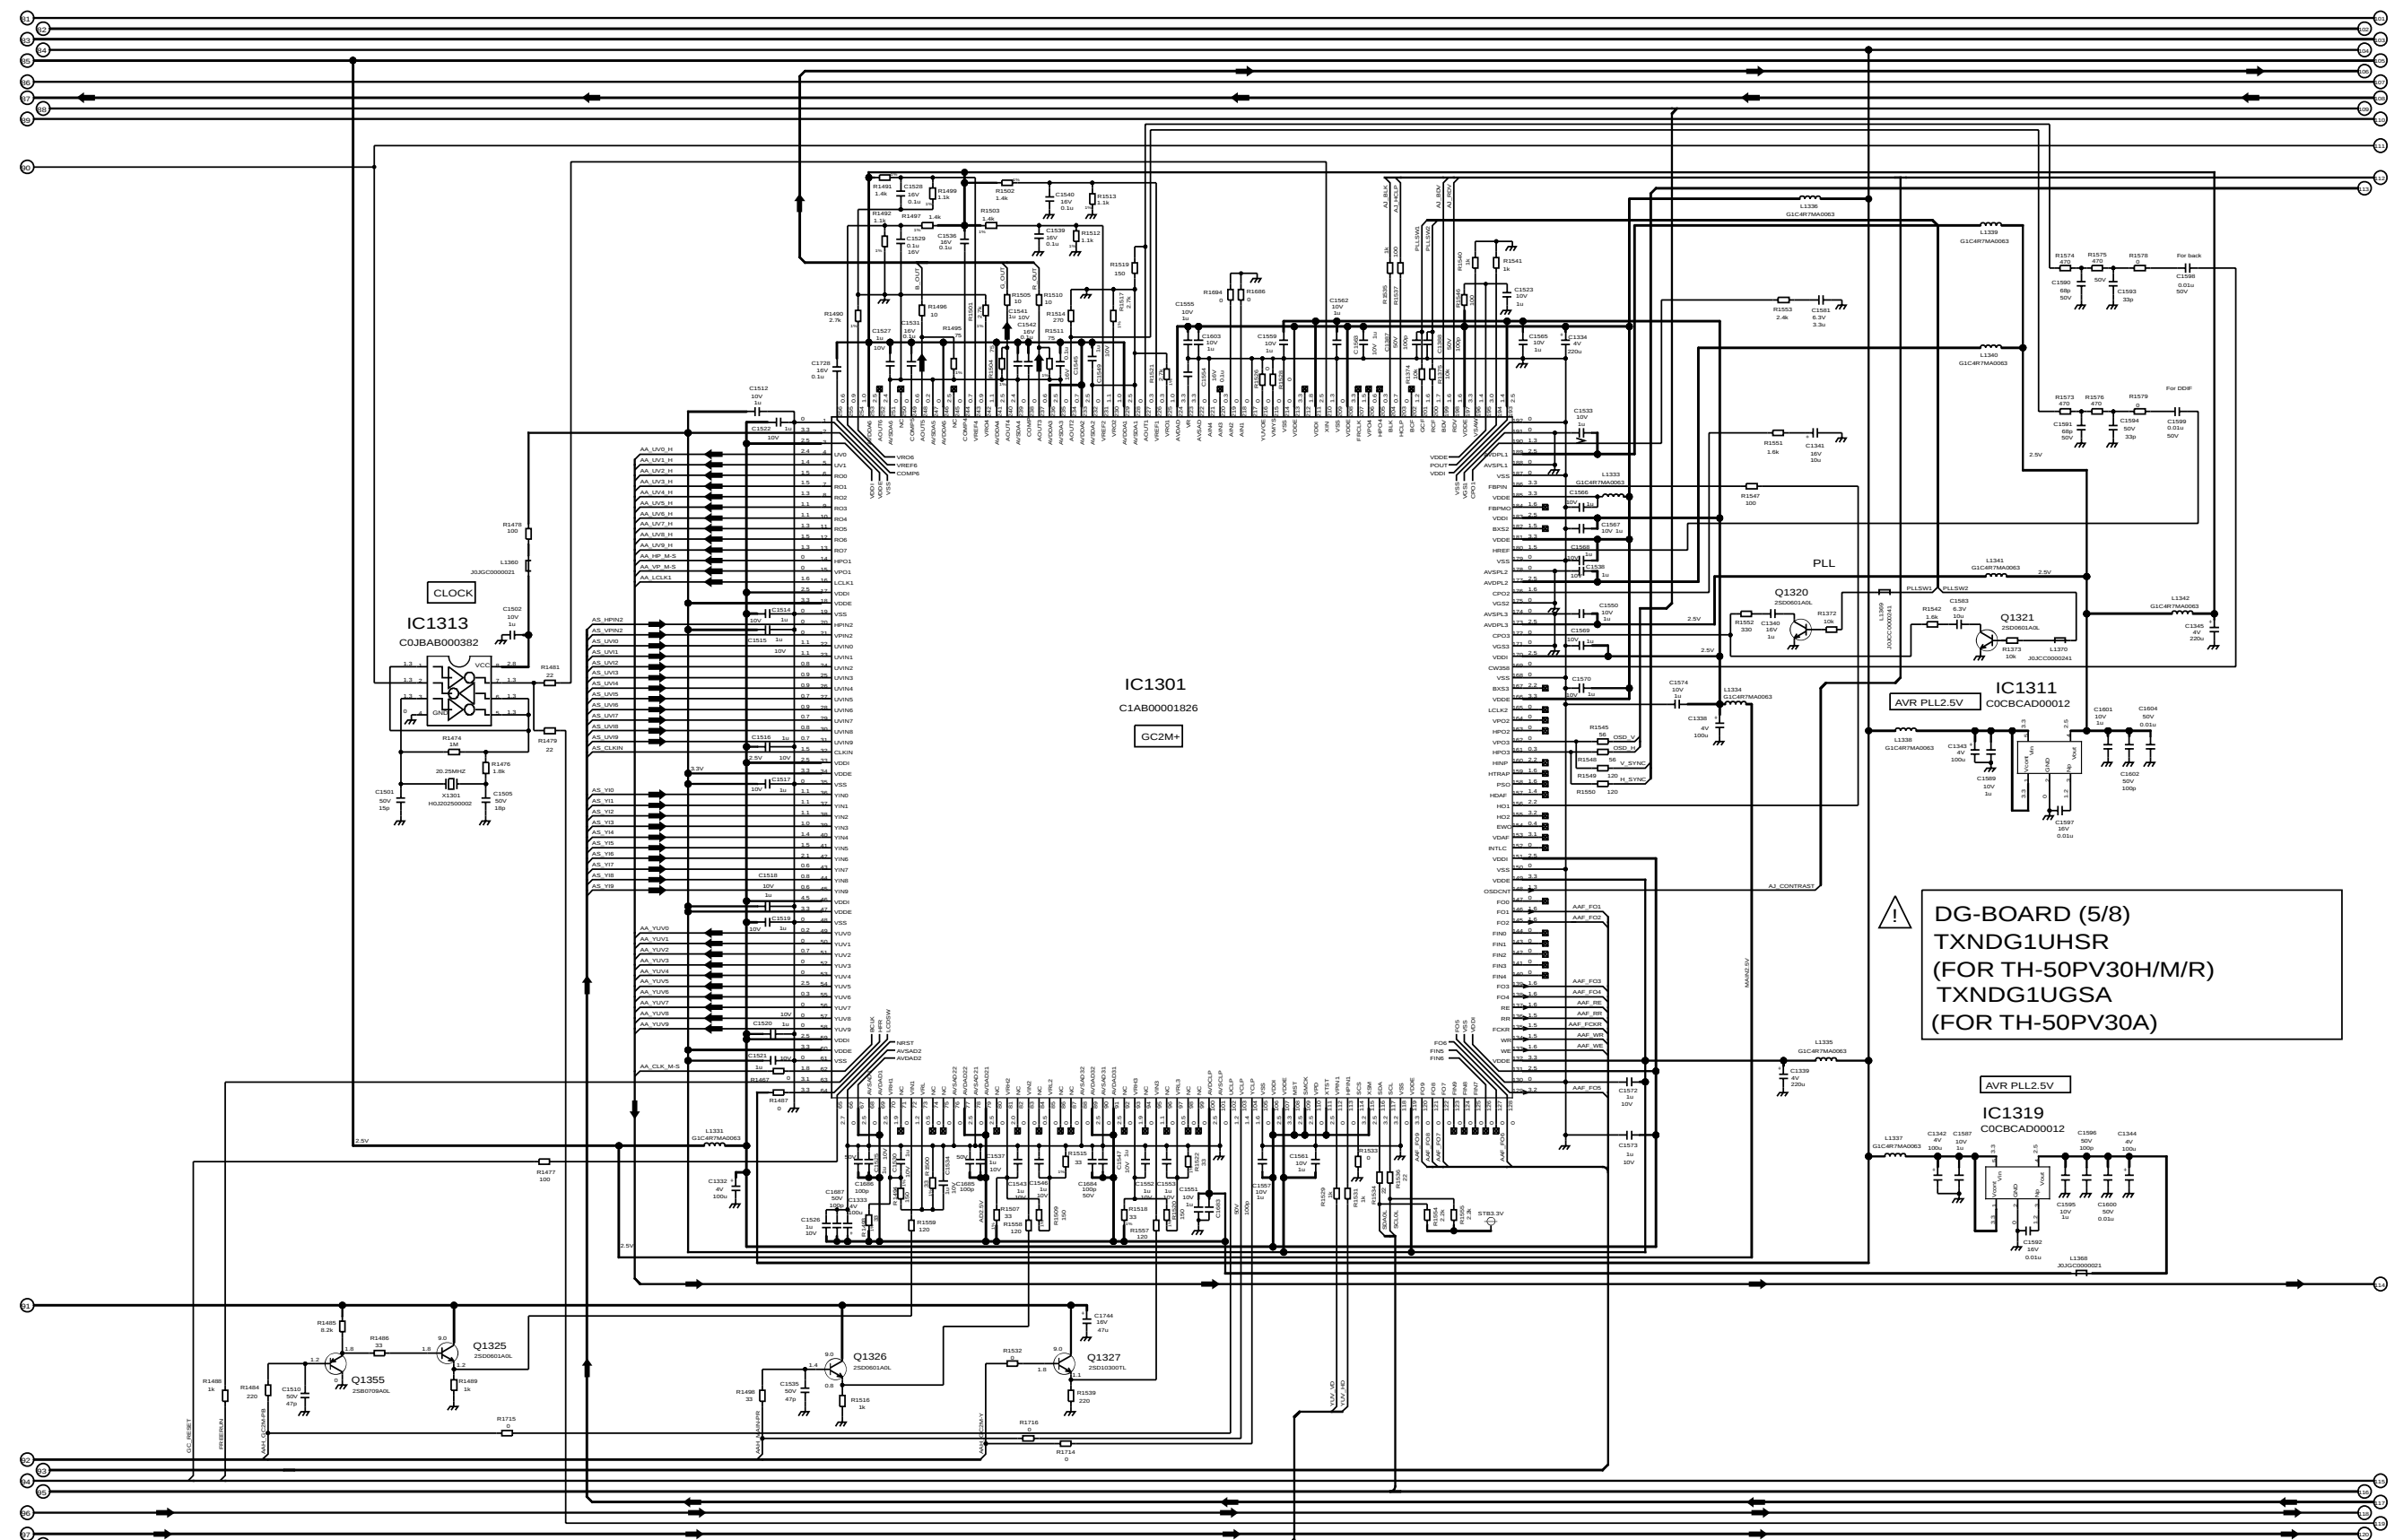

TH-50PV30A/H/M/R
DG-Board (5 of 8) Schematic Diagram

TH-50PV30A/H/M/R
DG-Board (5 of 8) Schematic Diagram


6.22. DG-Board (6 of 8) Schematic Diagram

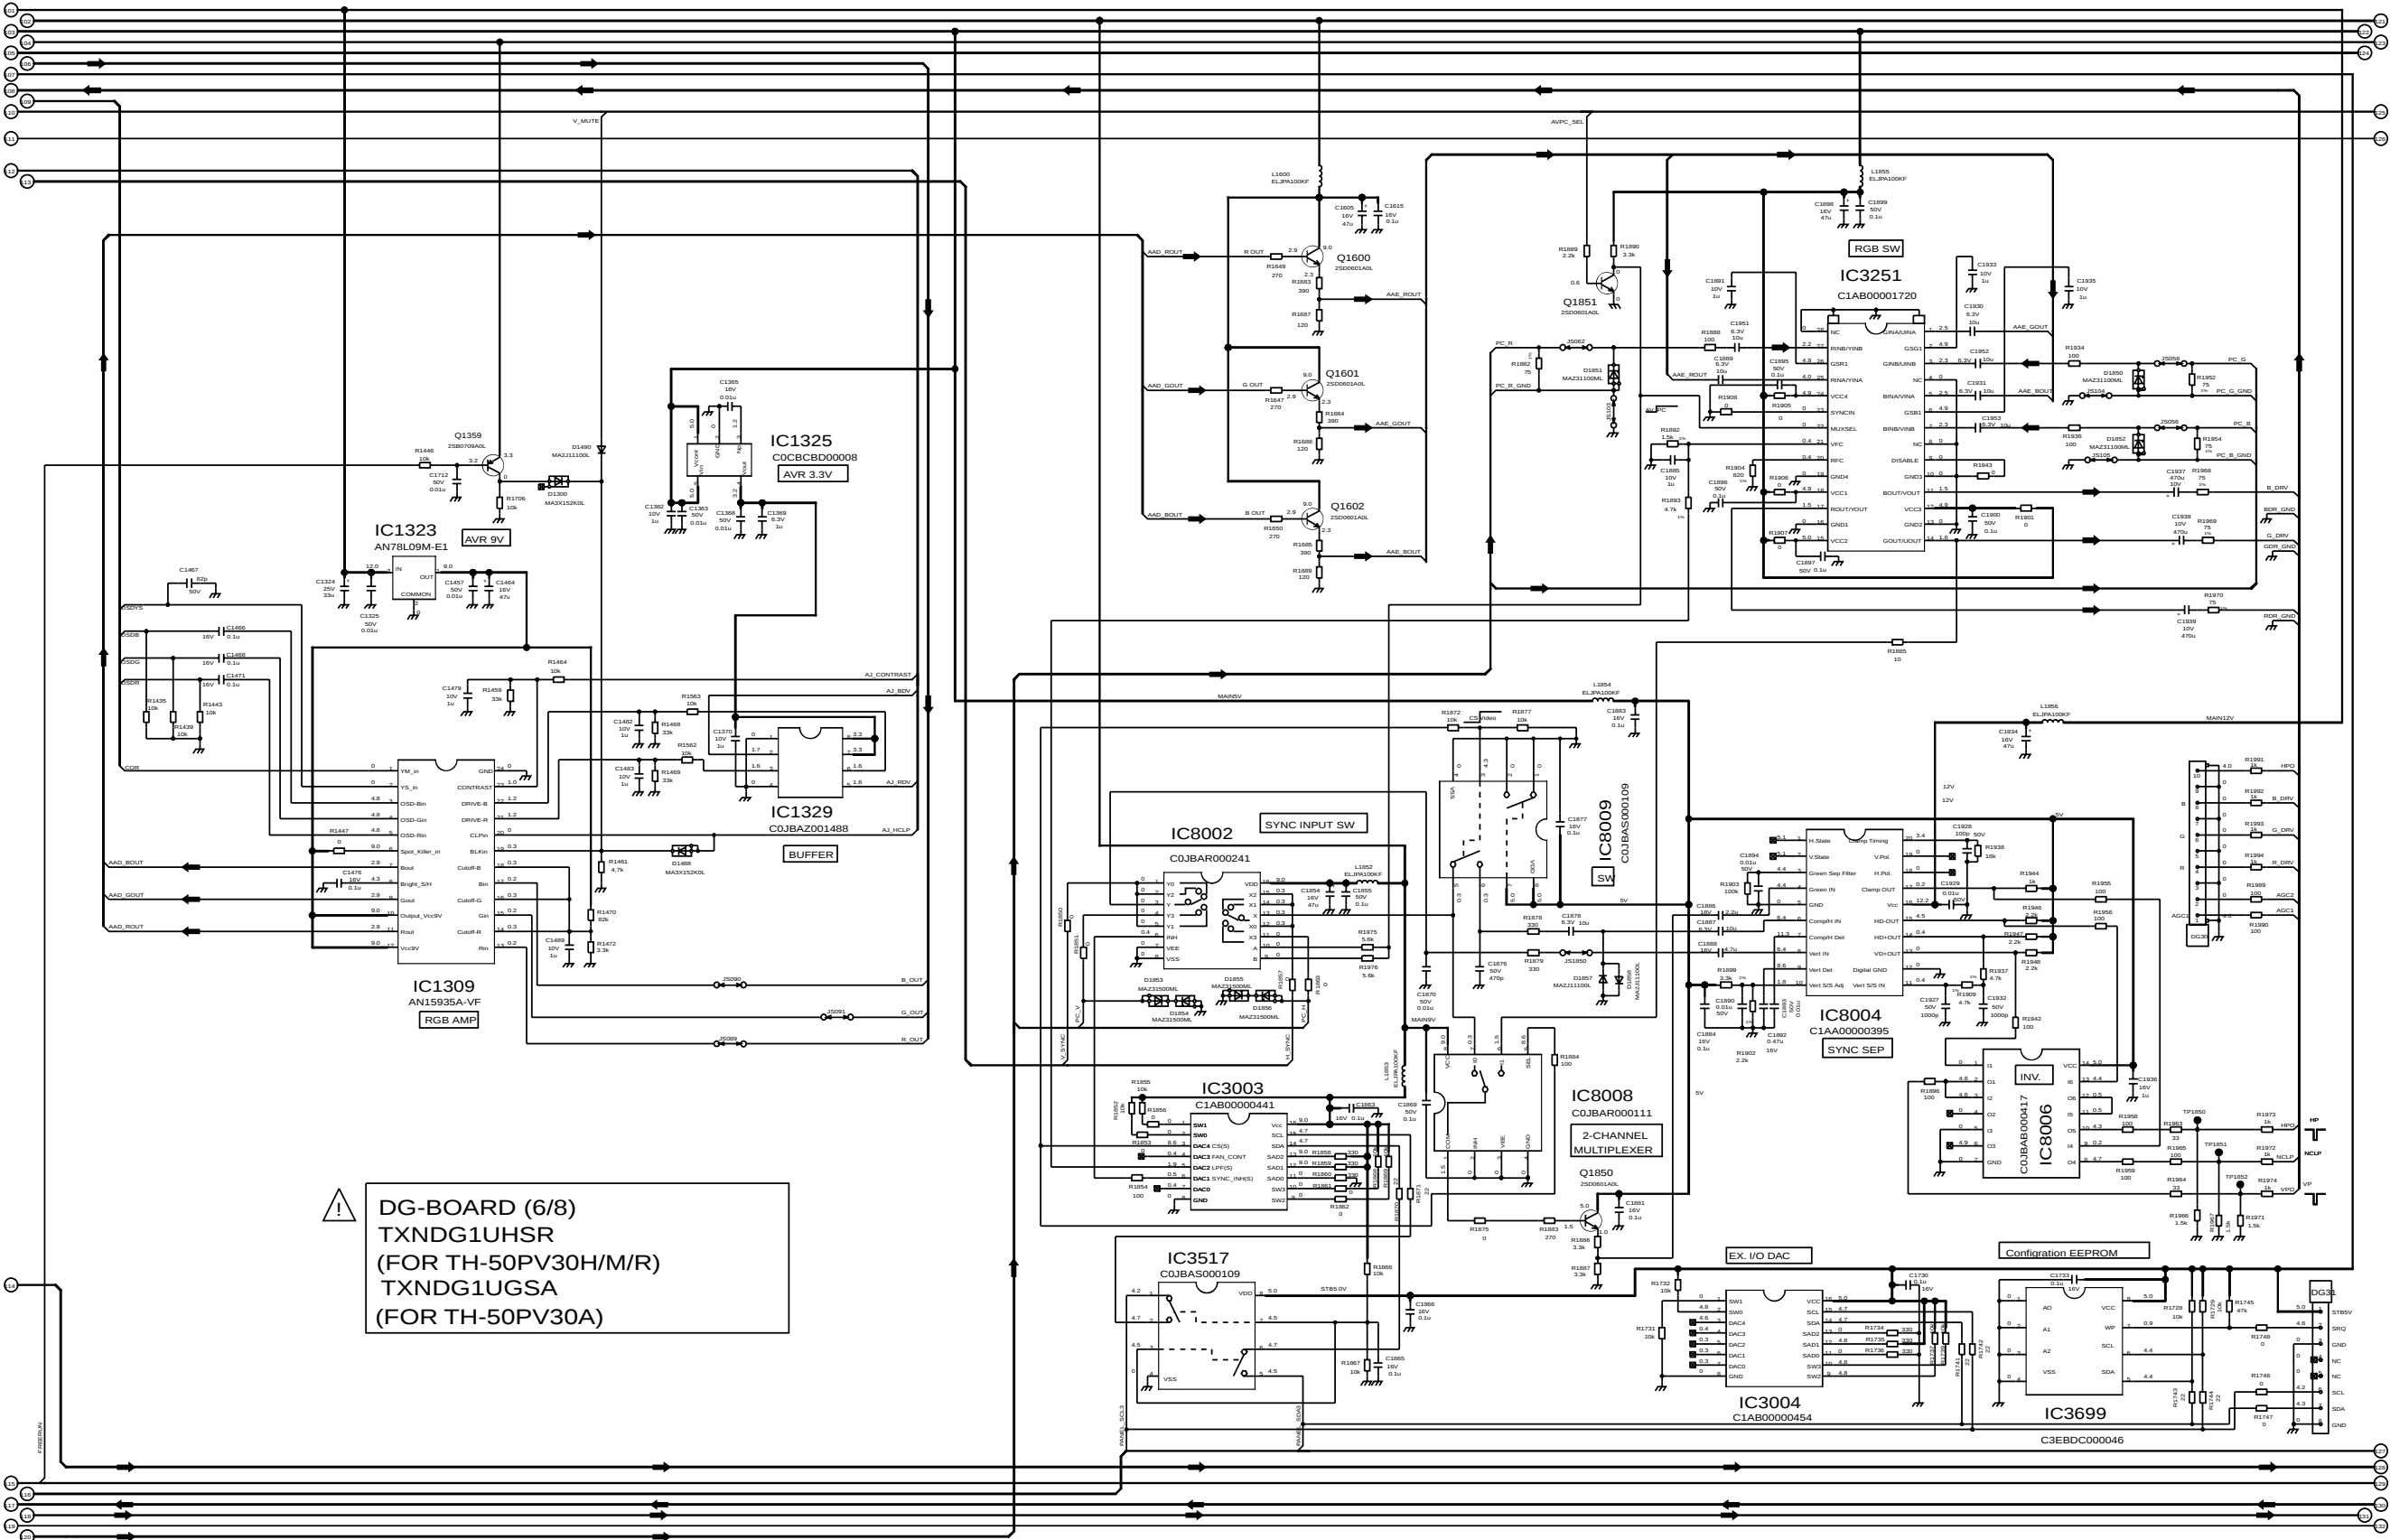

TH-50PV30A/H/M/R
DG-Board (6 of 8) Schematic Diagram

TH-50PV30A/H/M/R
DG-Board (6 of 8) Schematic Diagram


6.24. DG-Board (8 of 8) Schematic Diagram

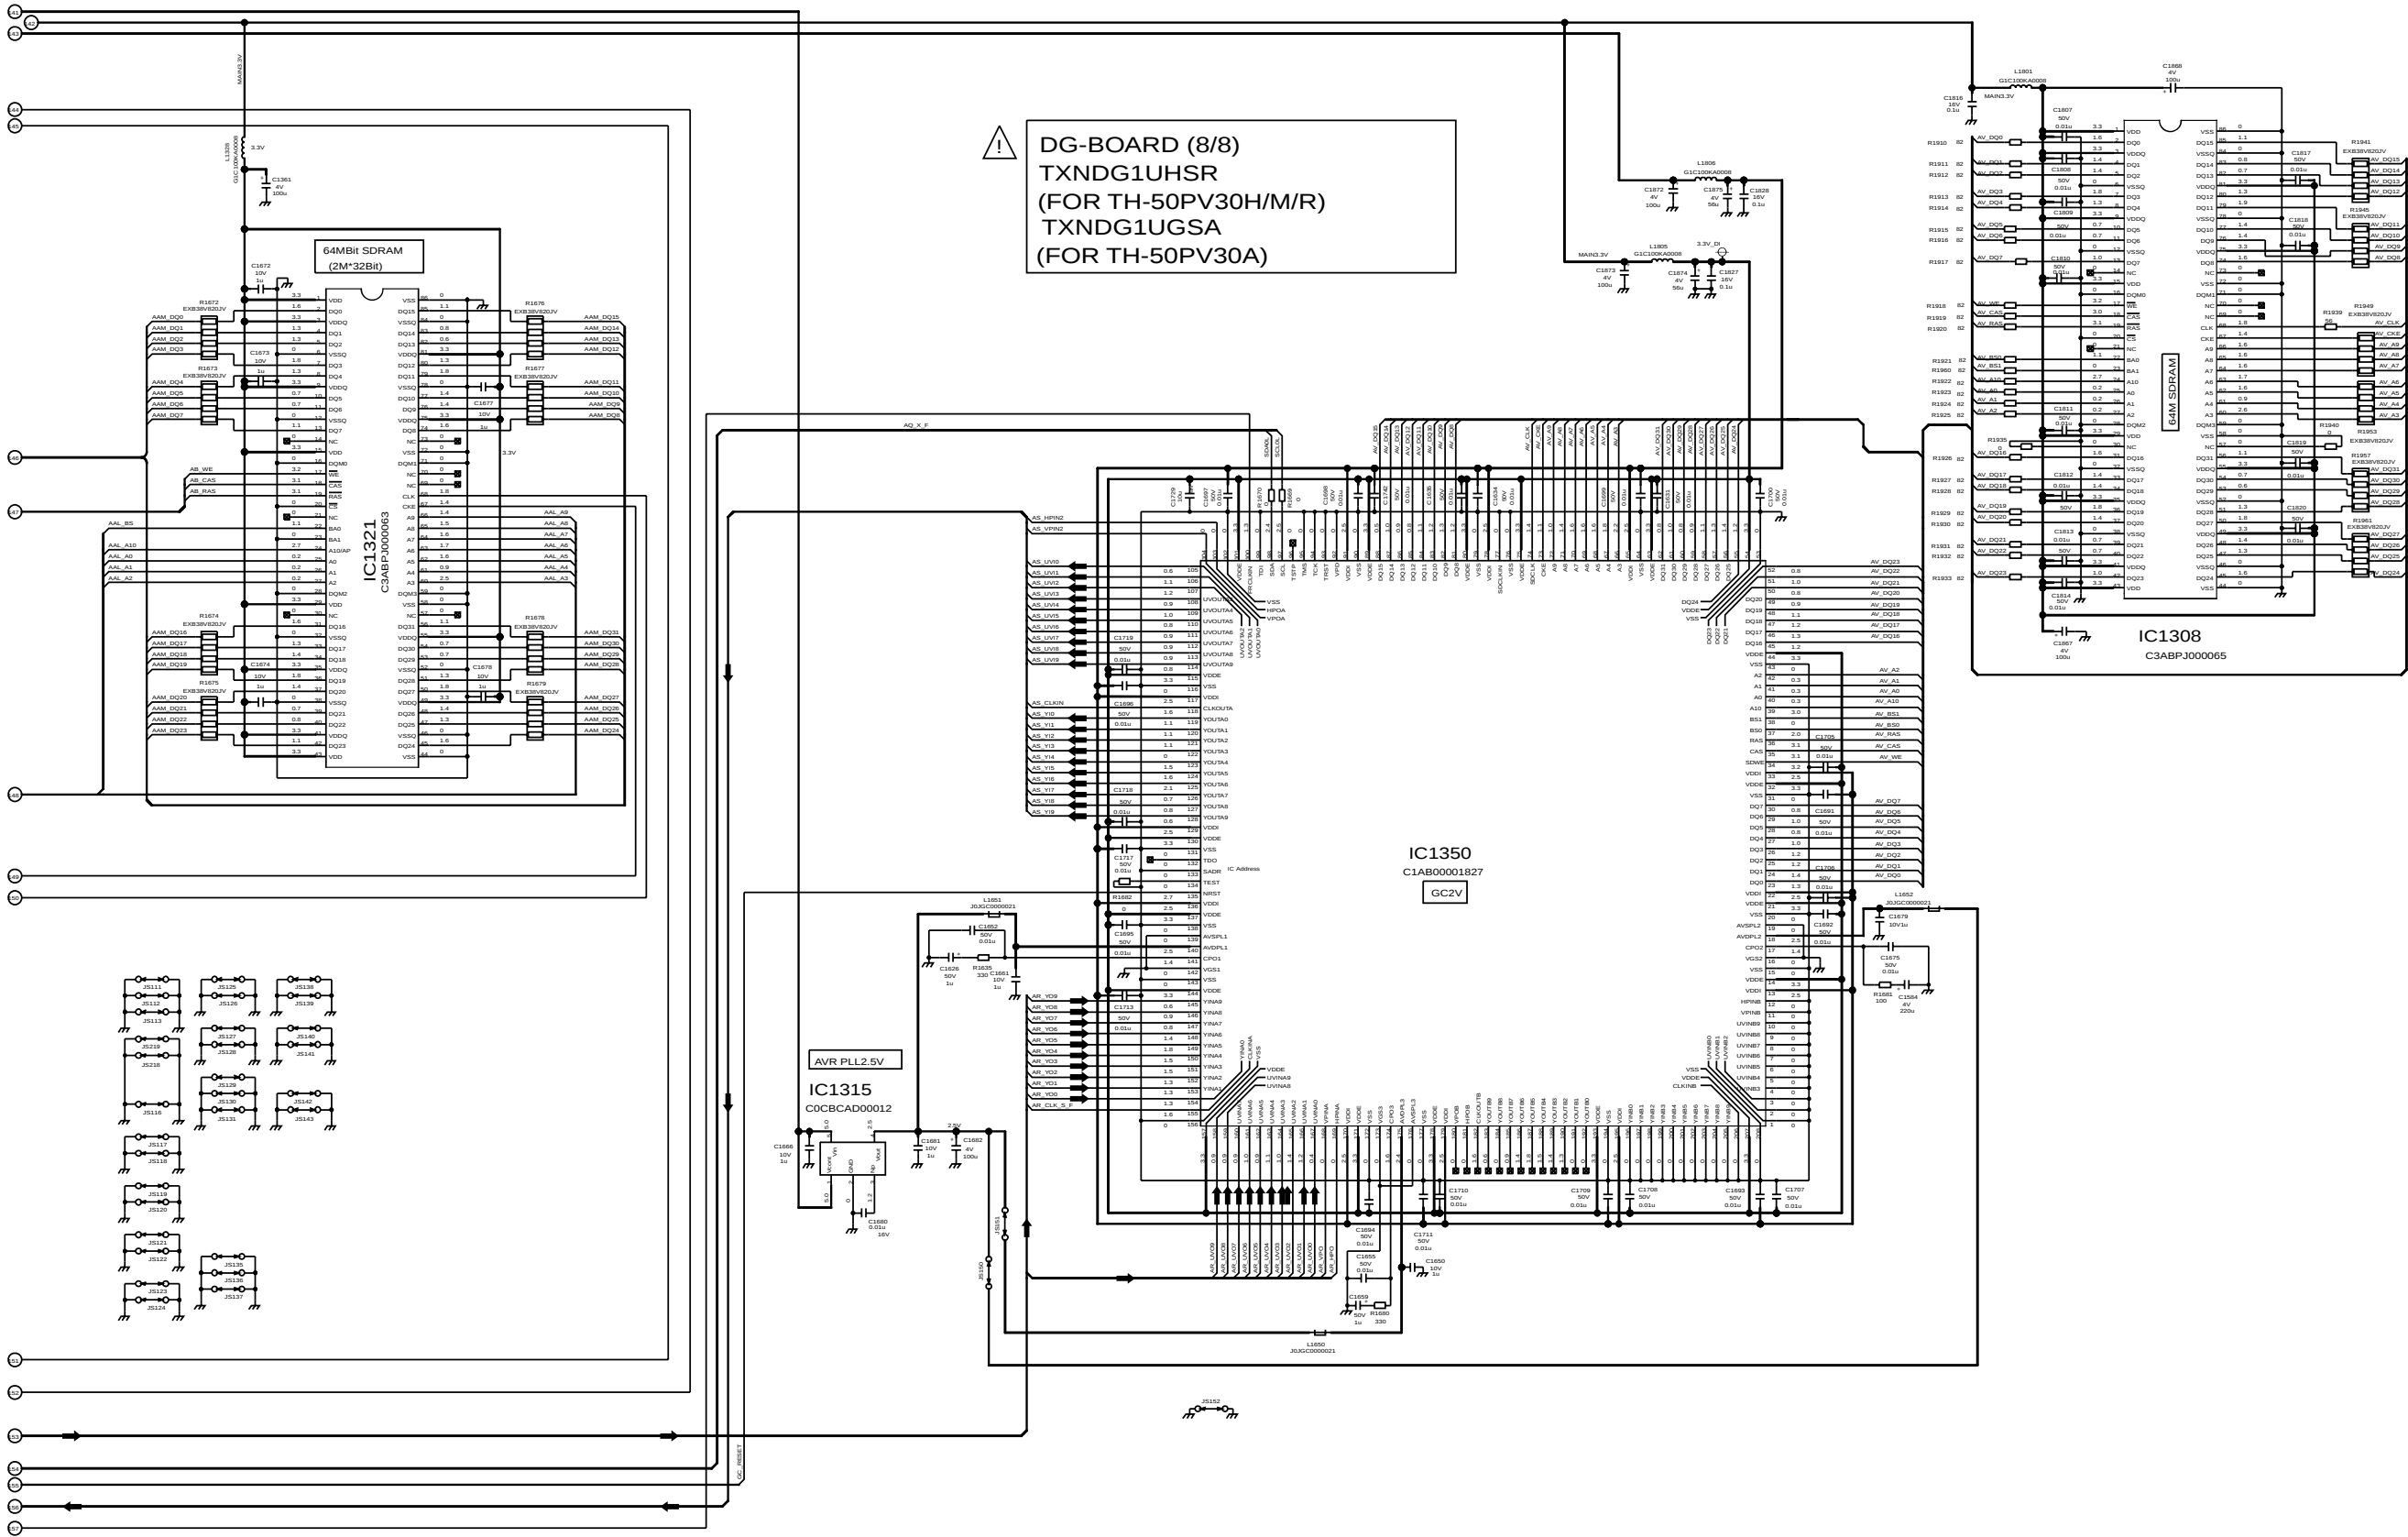


TH-50PV30A/H/M/R
DG-Board (8 of 8) Schematic Diagram

TH-50PV30A/H/M/R
DG-Board (8 of 8) Schematic Diagram

6.25. D-Board (1 of 2) Block Diagram

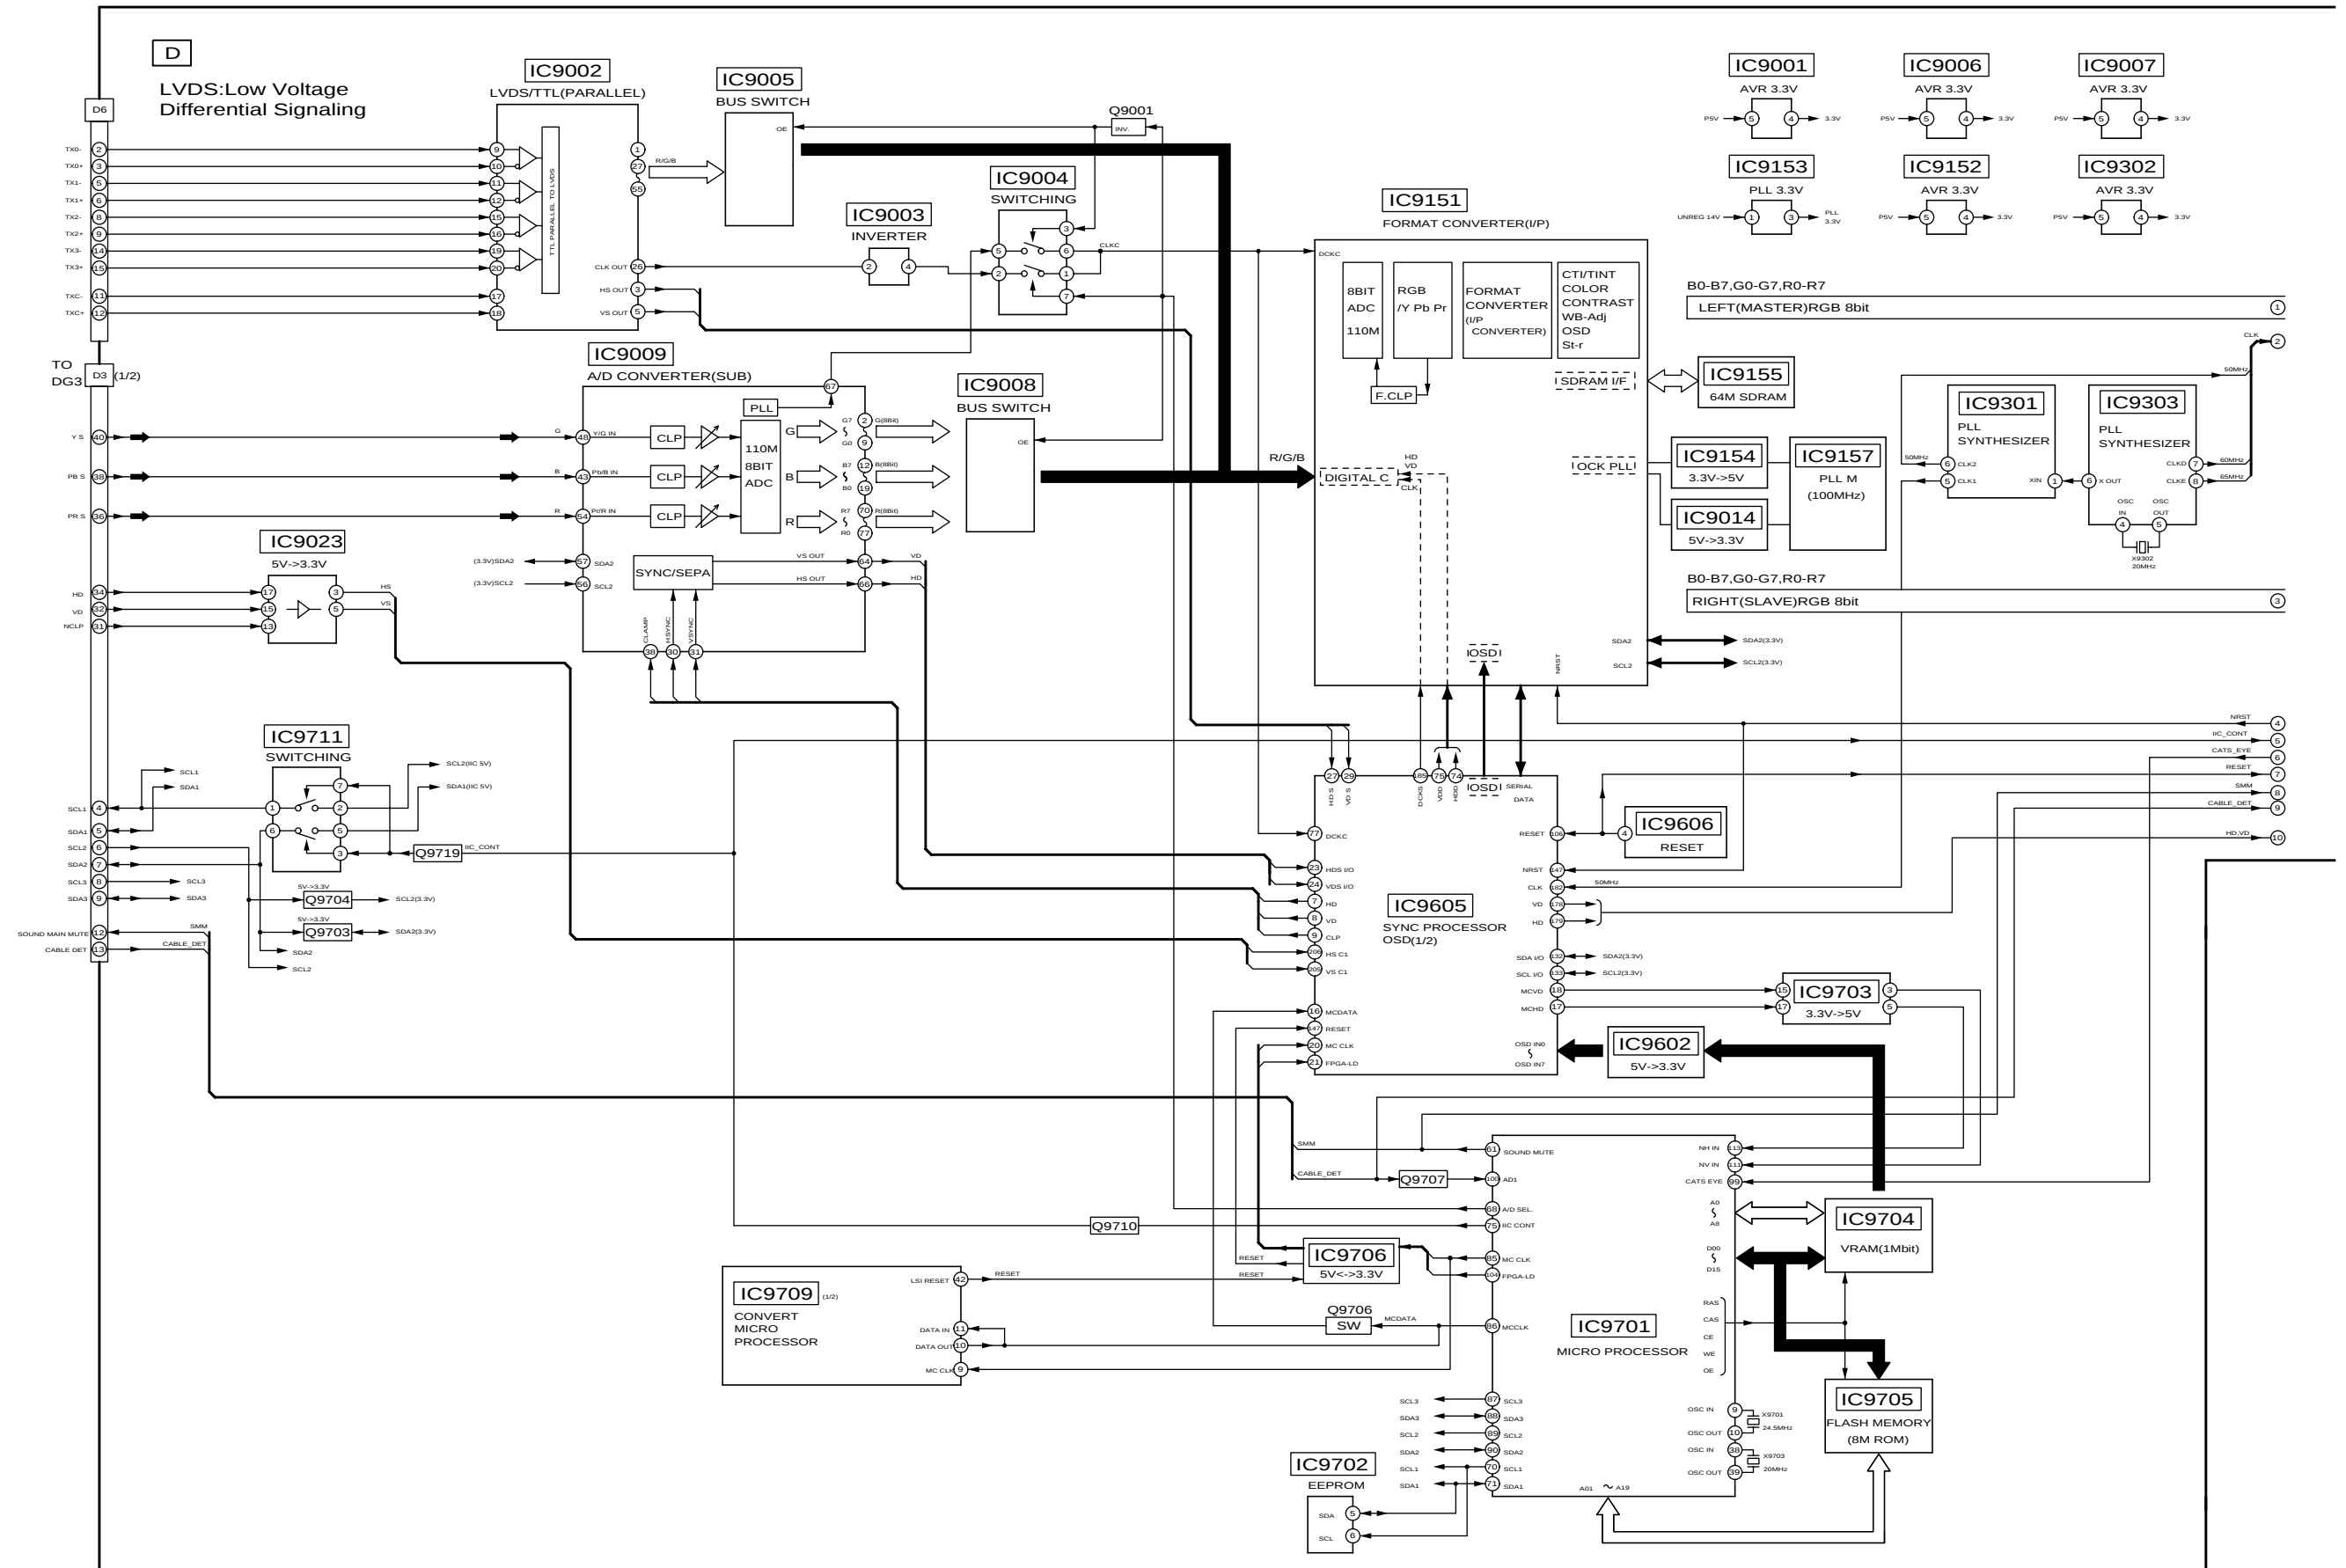TH-50PV30A/H/M/R
D-Board Block DiagramTH-50PV30A/H/M/R
D-Board Block Diagram


6.26. D-Board (2 of 2) Block Diagram

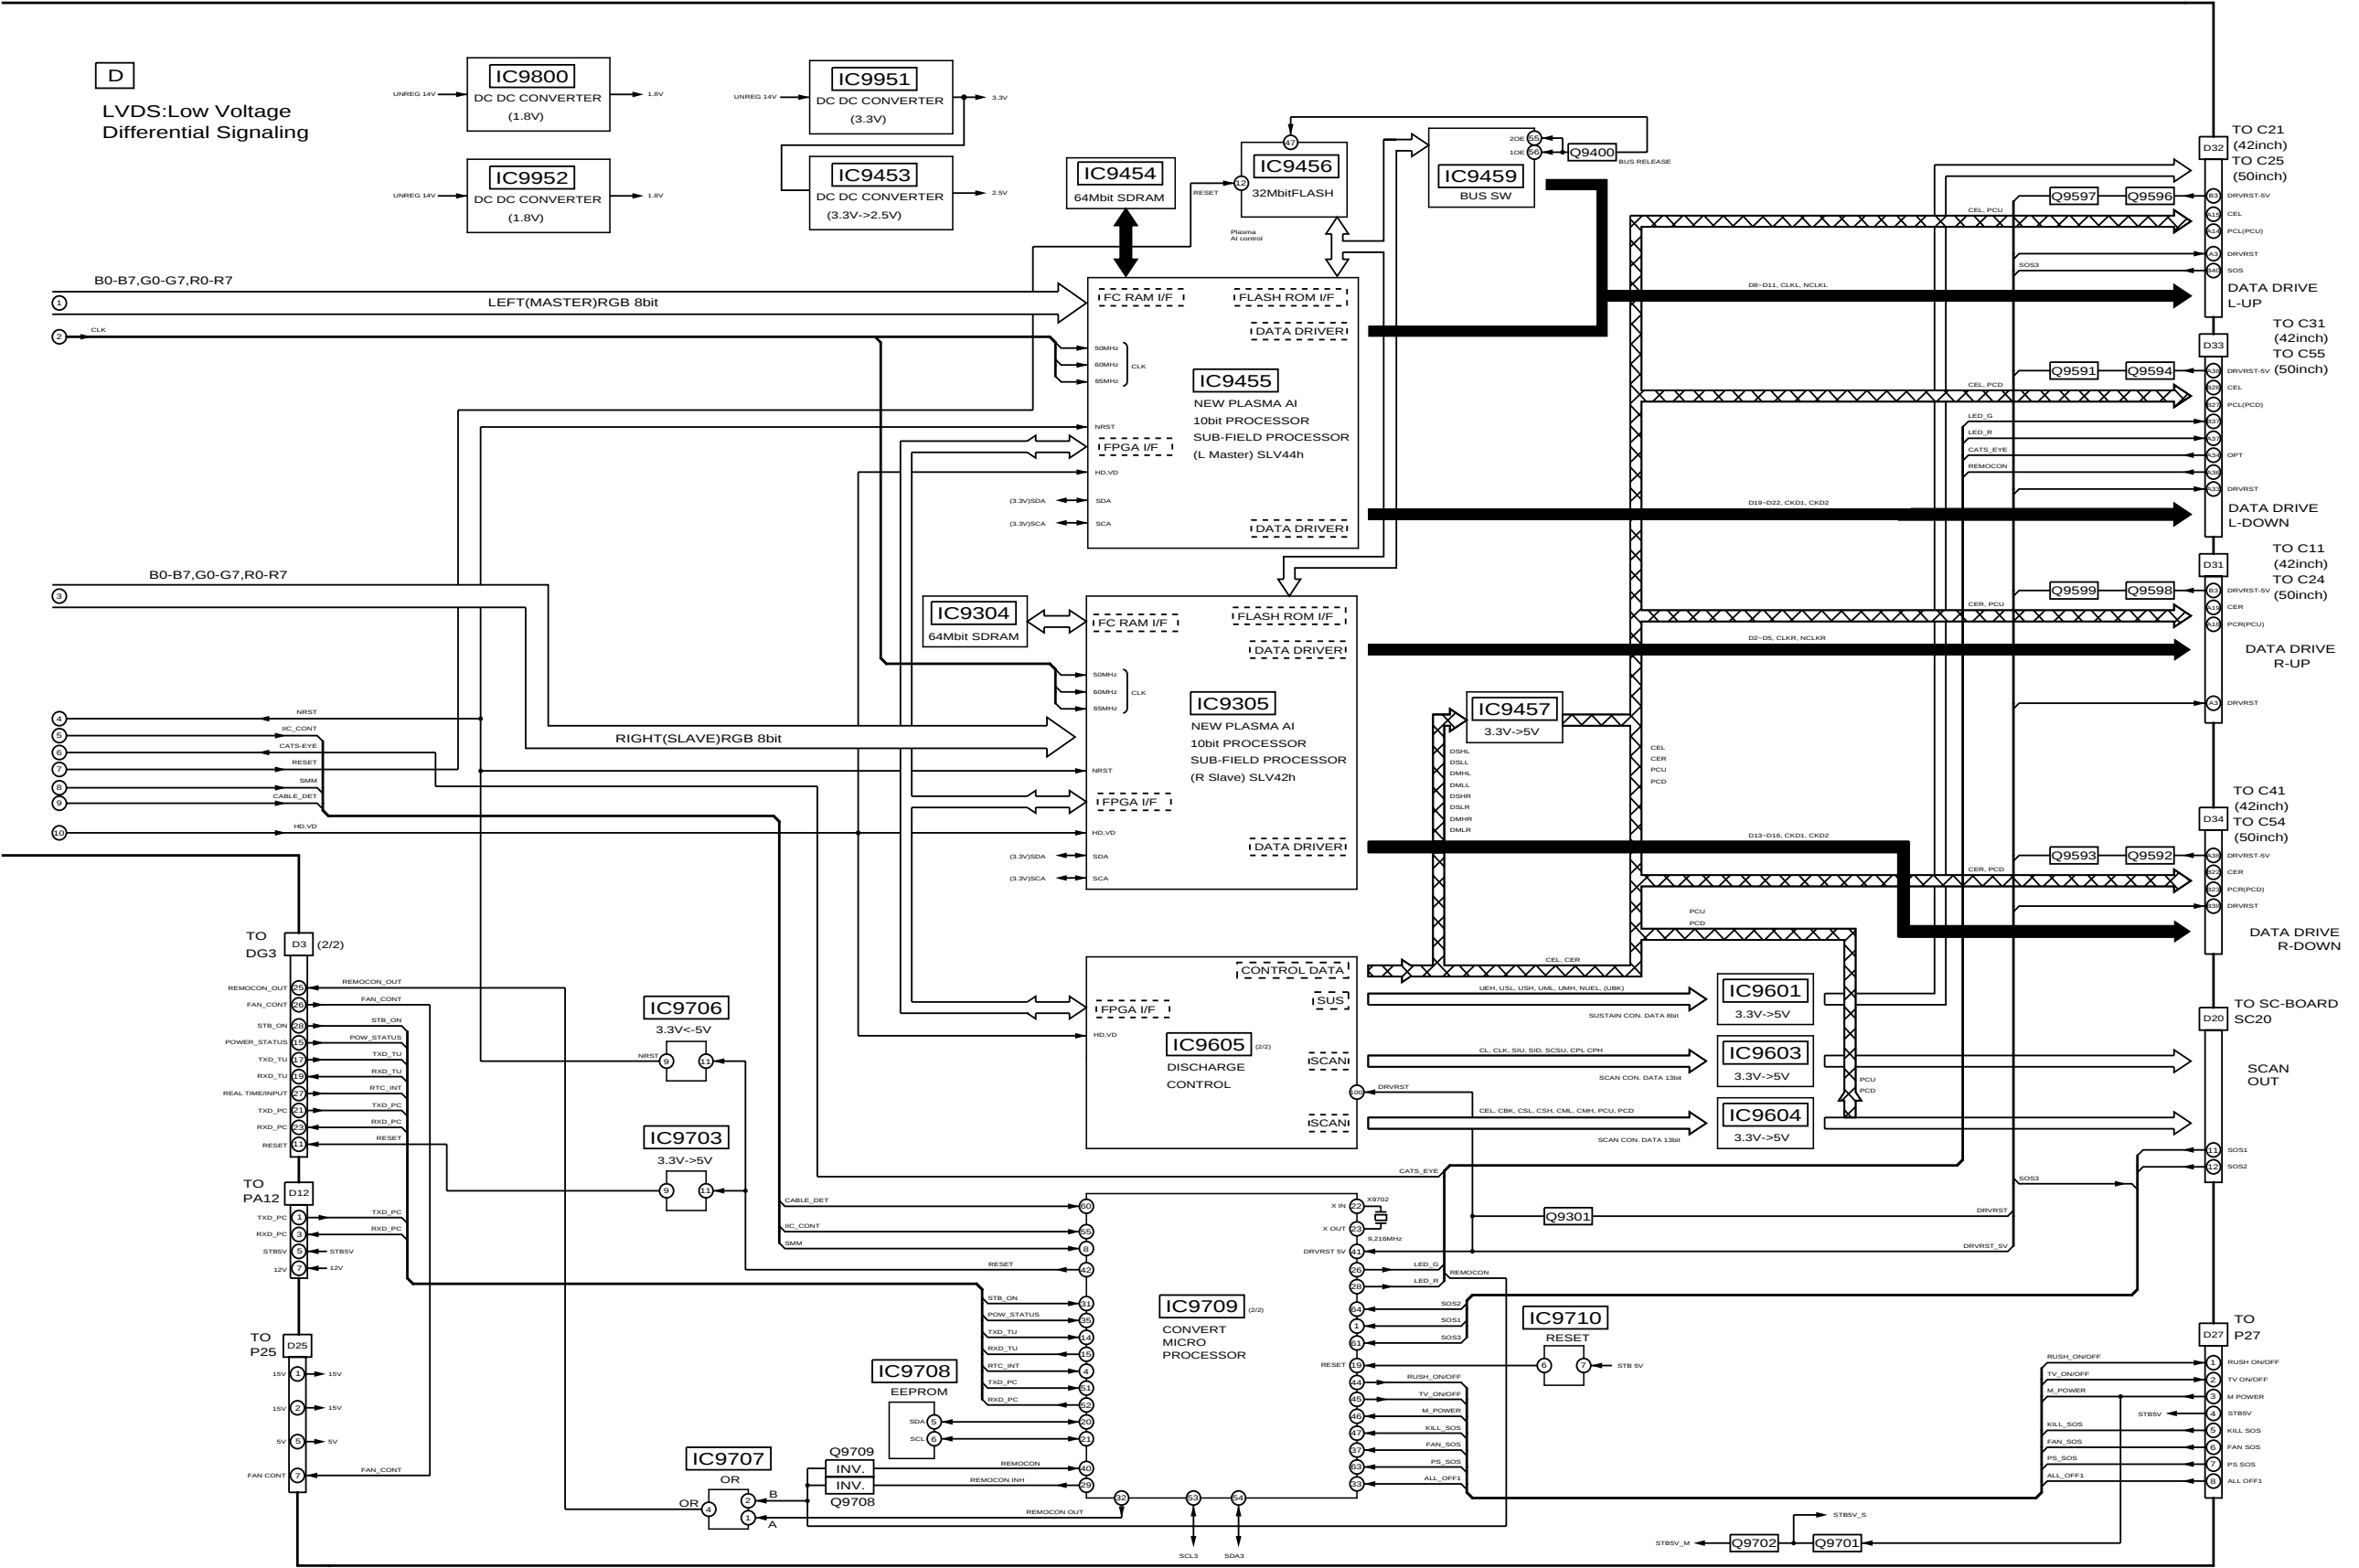

TH-50PV30A/H/M/R
D-Board Block Diagram


TH-50PV30A/H/M/R
D-Board Block Diagram

6.27. D-Board (1 of 14) Schematic Diagram

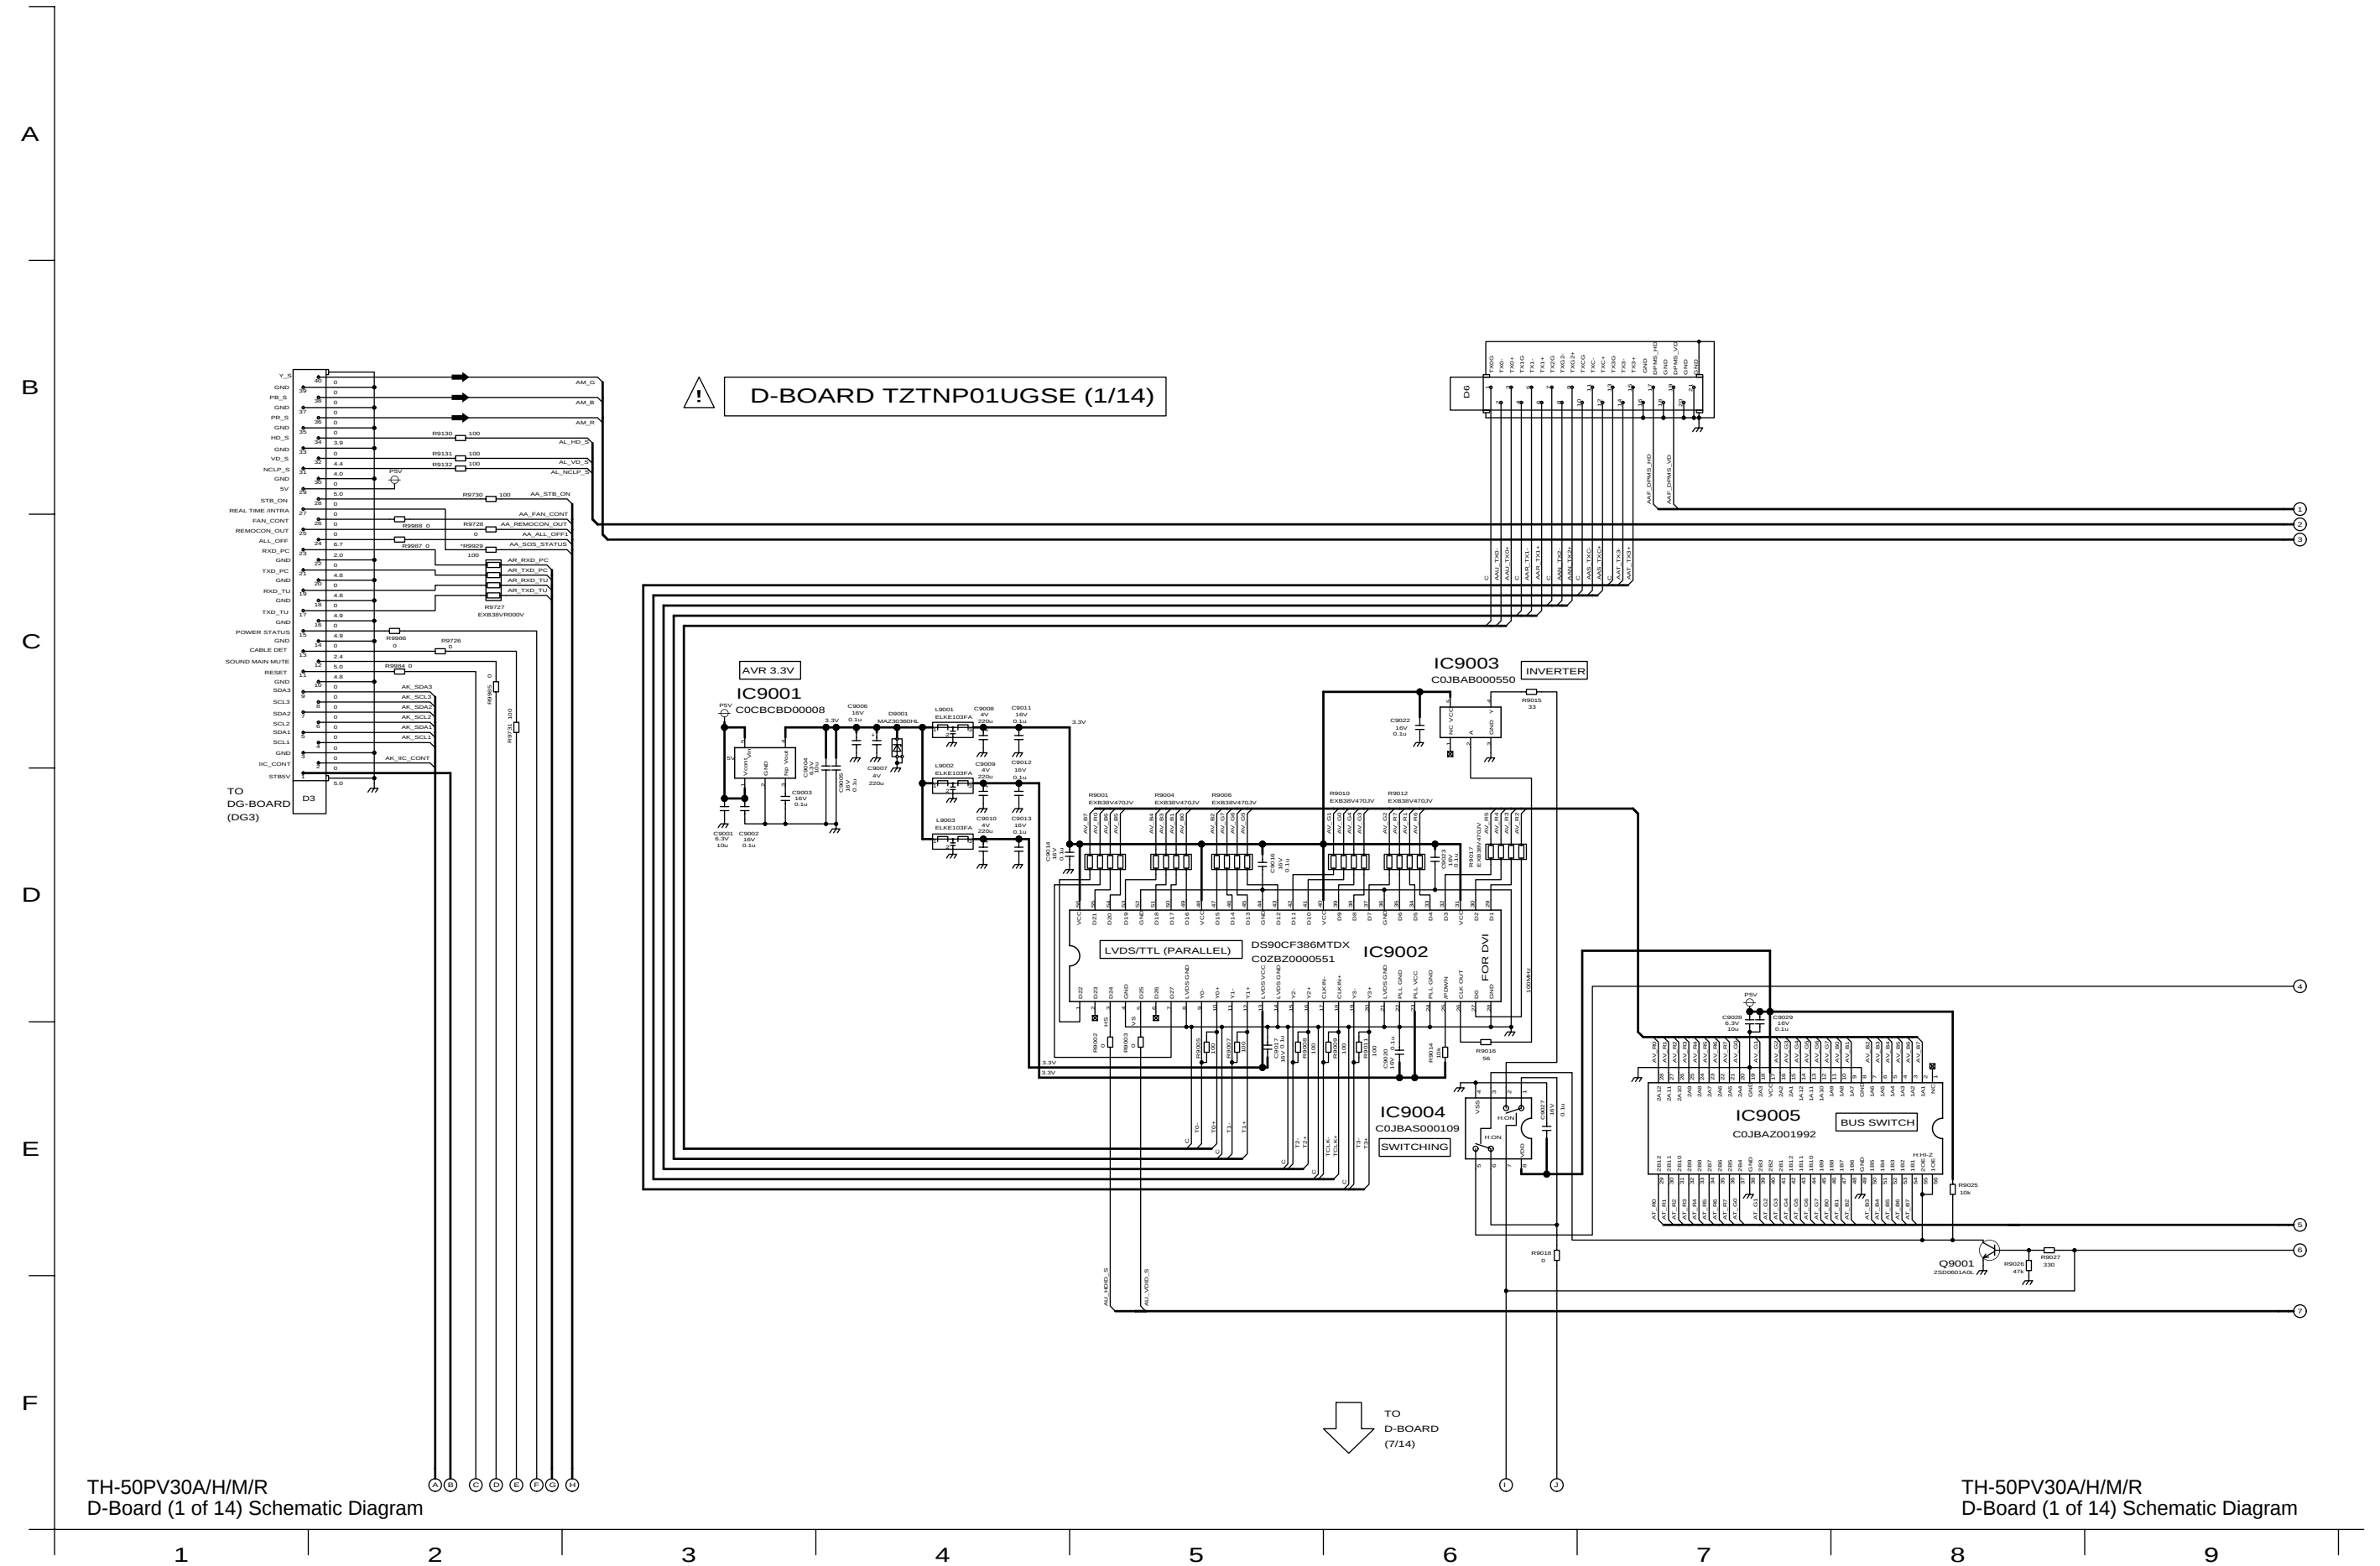

6.28. D-Board (2 of 14) Schematic Diagram


! D-BOARD TZTNP01UGSE (2/14)

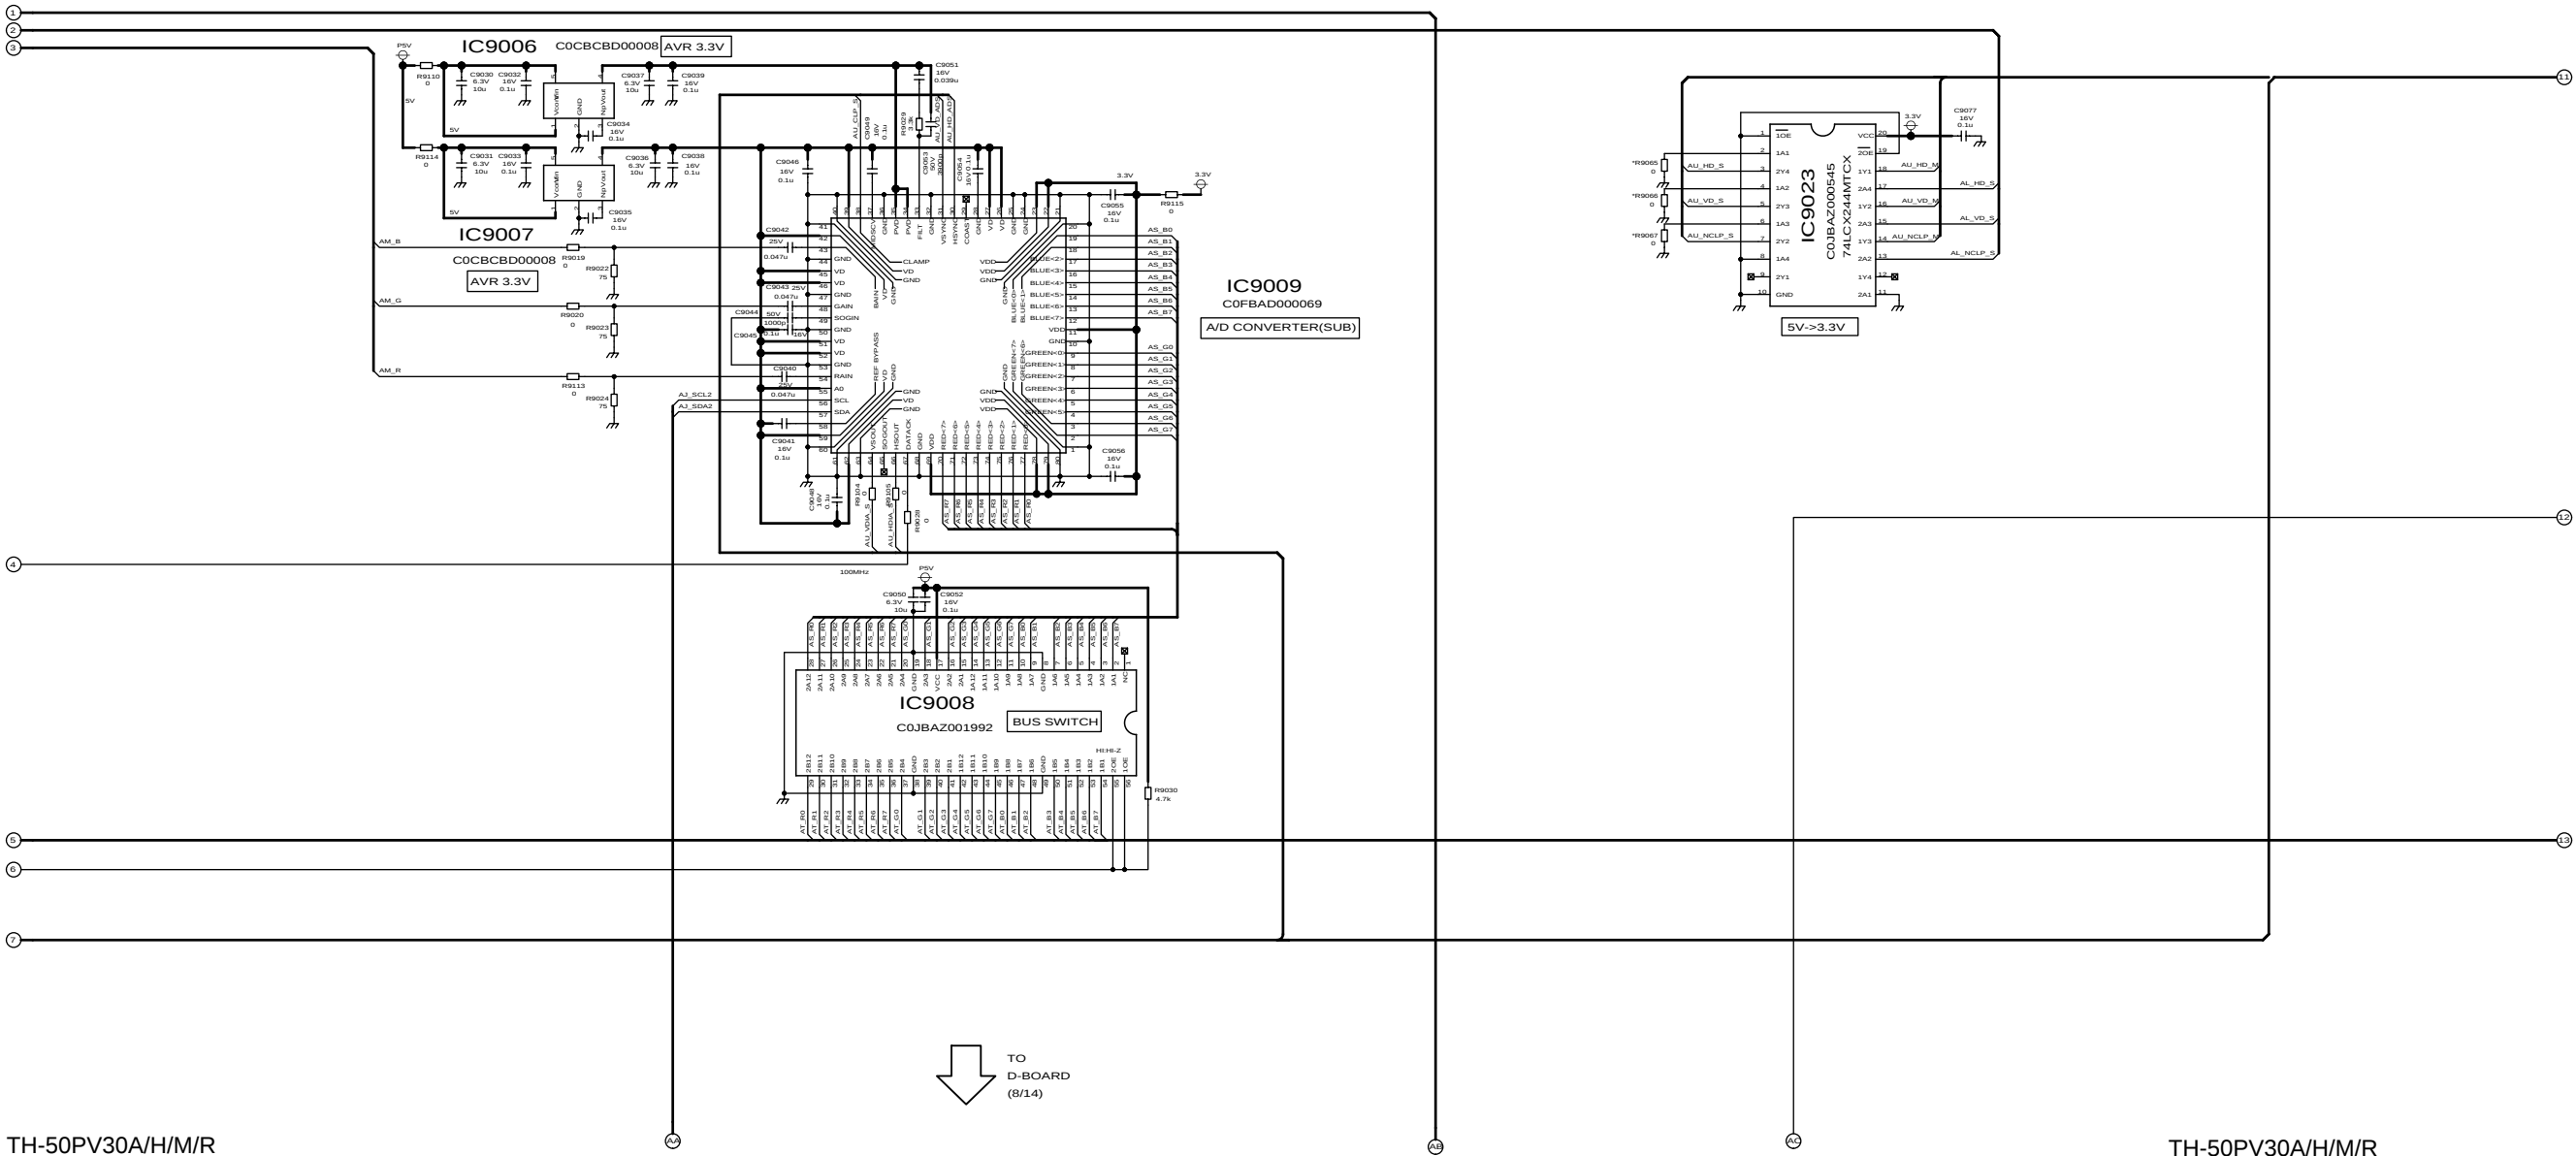

TH-50PV30A/H/M/R
D-Board (2 of 14) Schematic Diagram


TH-50PV30A/H/M/R
D-Board (2 of 14) Schematic Diagram

6.29. D-Board (3 of 14) Schematic Diagram

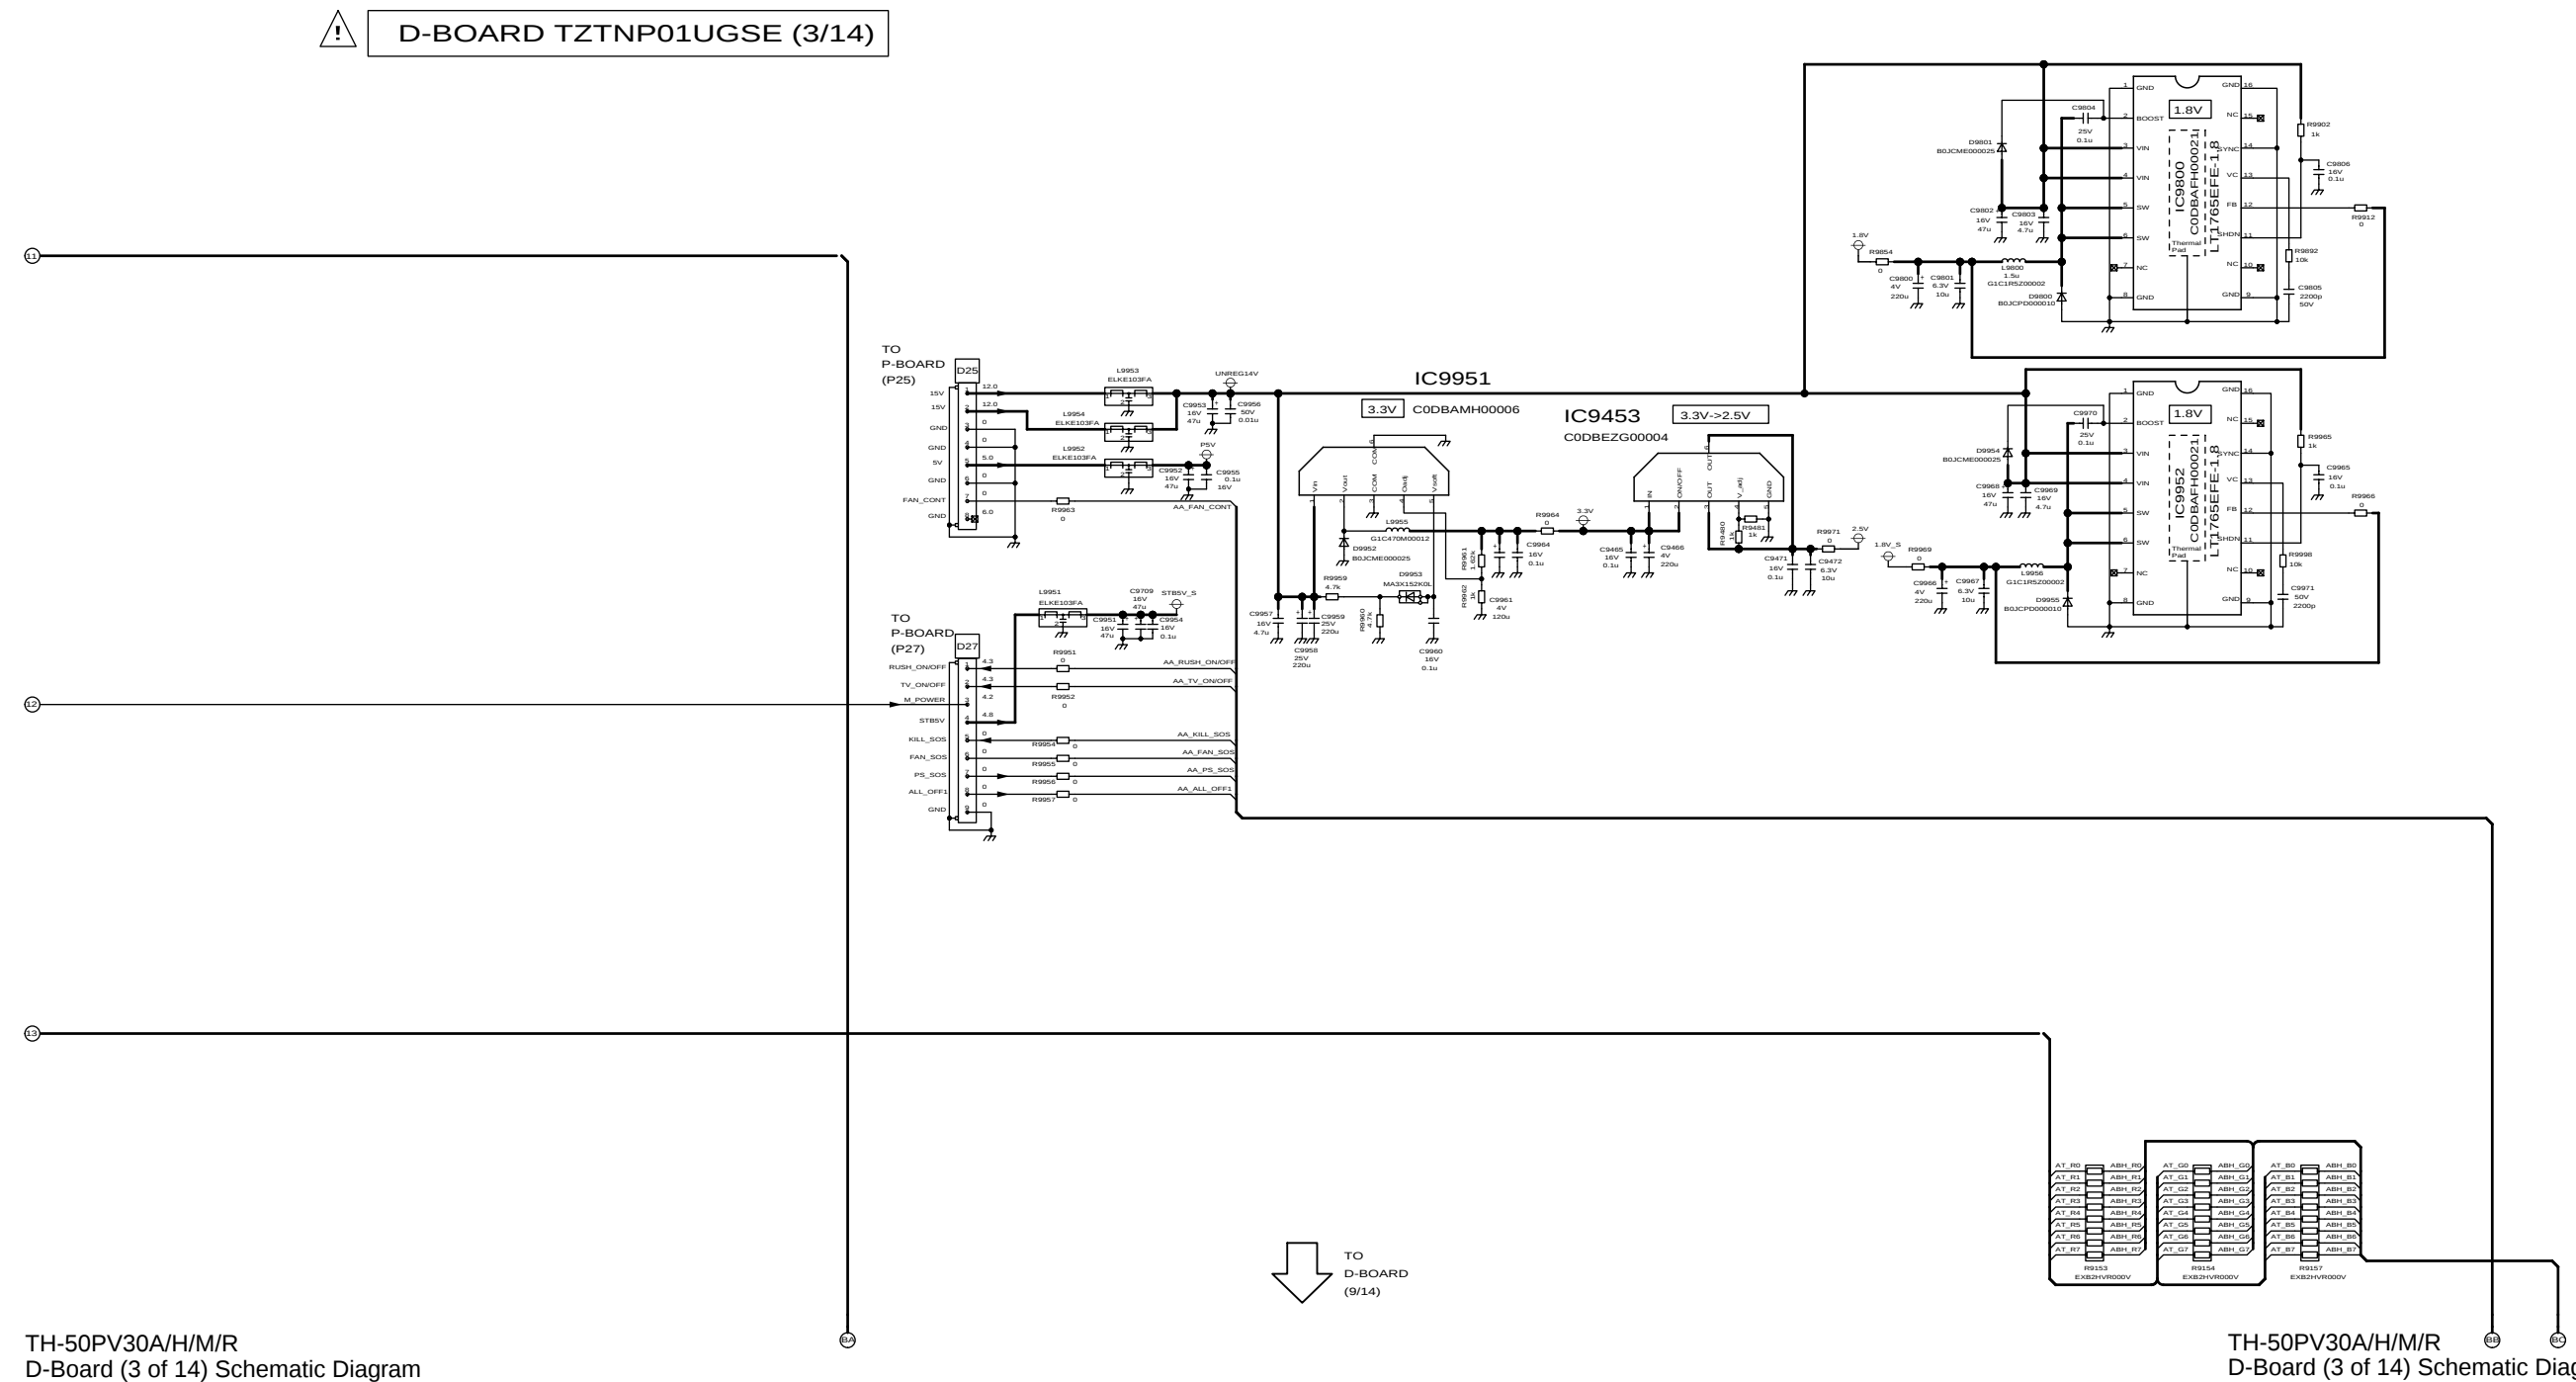

6.30. D-Board (4 of 14) Schematic Diagram

! D-BOARD TZTNP01UGSE (4/14)

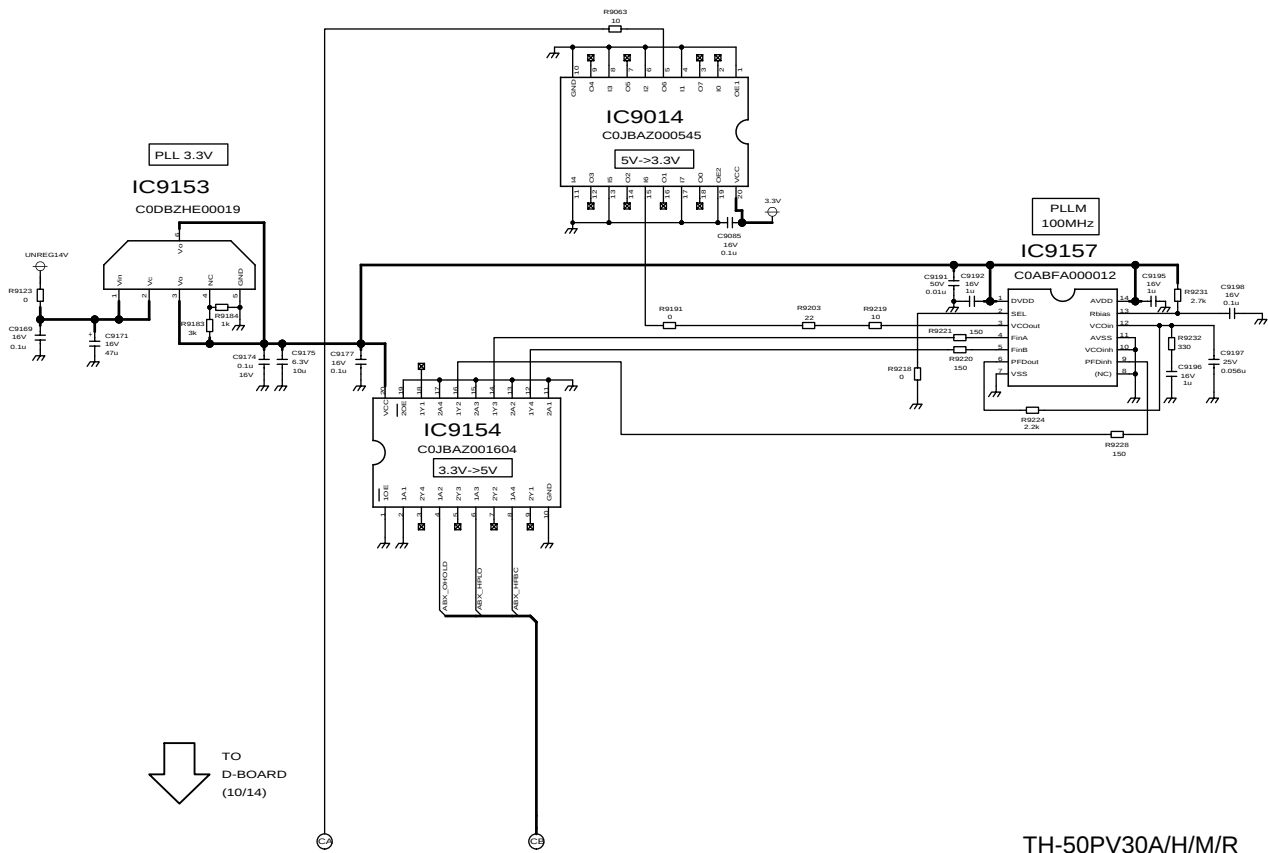


TH-50PV30A/H/M/R
D-Board (4 of 14) Schematic Diagram

TH-50PV30A/H/M/R
D-Board (4 of 14) Schematic Diagram

6.31. D-Board (5 of 14) Schematic Diagram


! D-BOARD TZTNP01UGSE (5/14)

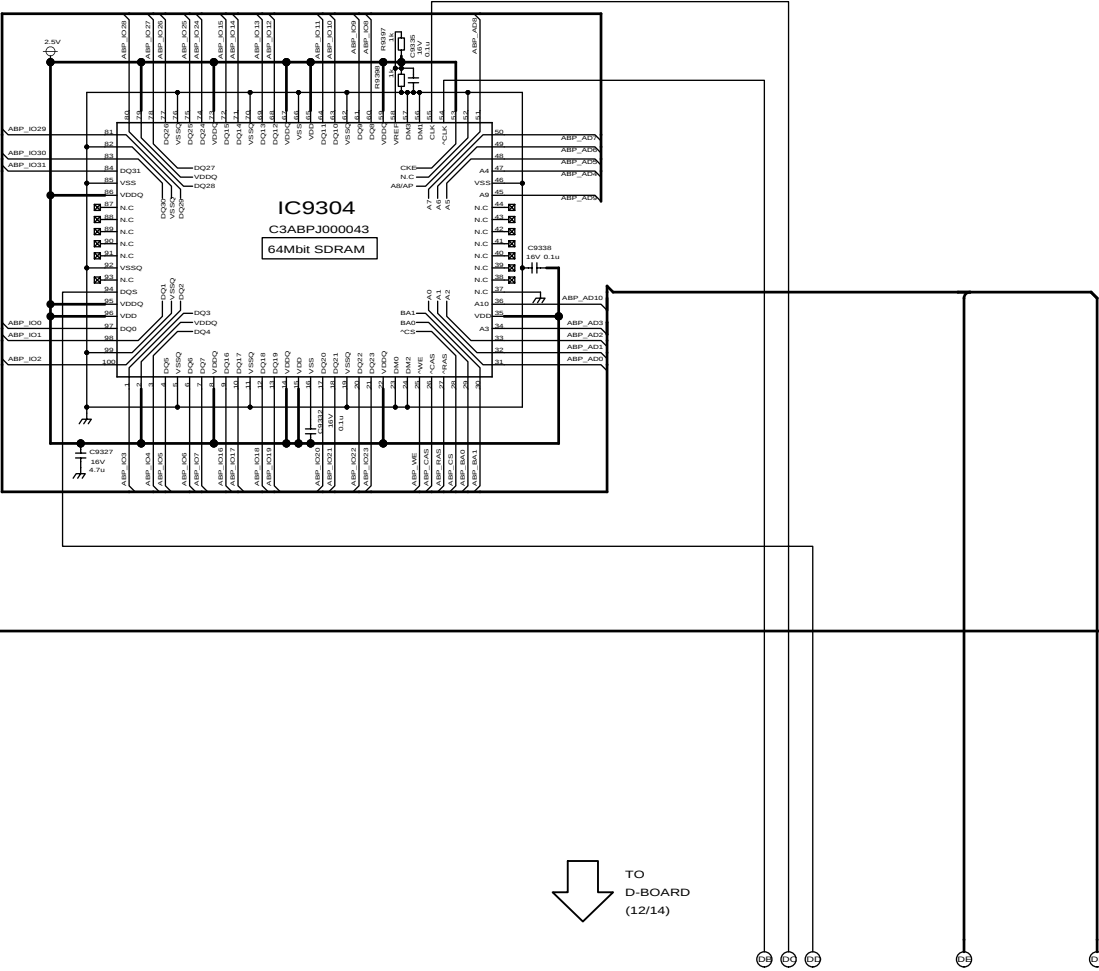

TH-50PV30A/H/M/R
D-Board (5 of 14) Schematic Diagram


TH-50PV30A/H/M/R
D-Board (5 of 14) Schematic Diagram

6.33. D-Board (7 of 14) Schematic Diagram

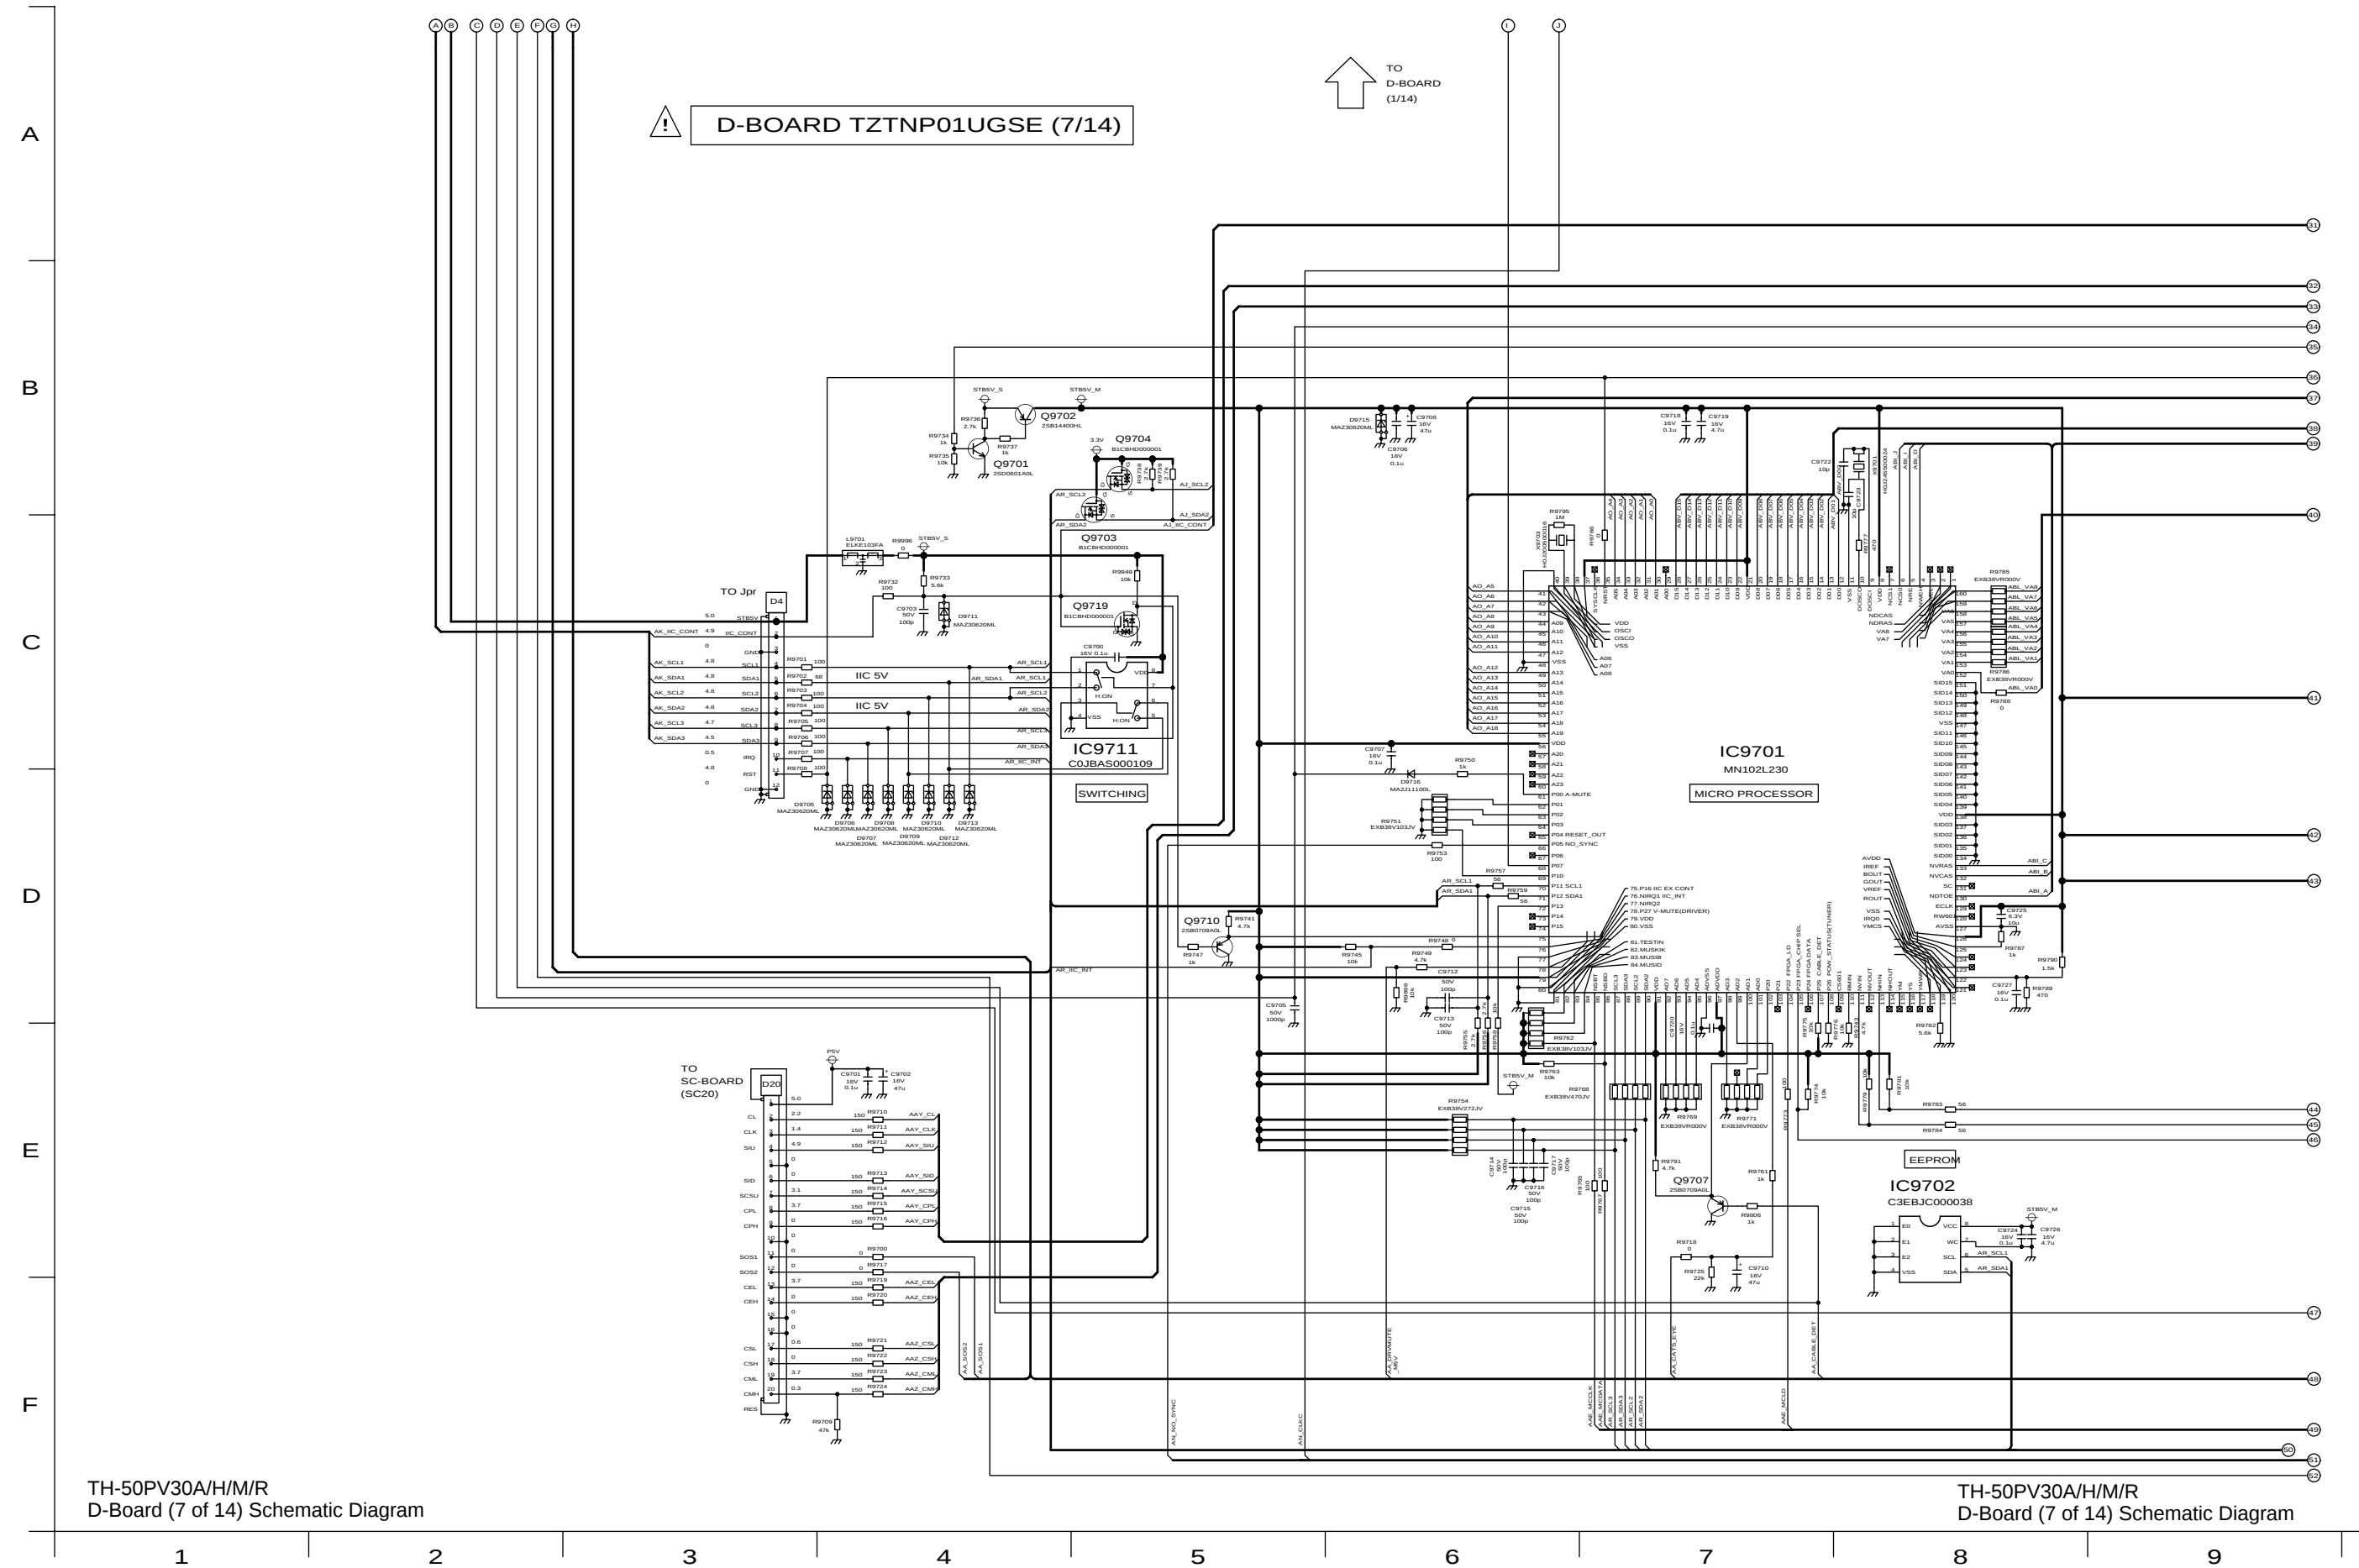




6.35. D-Board (9 of 14) Schematic Diagram

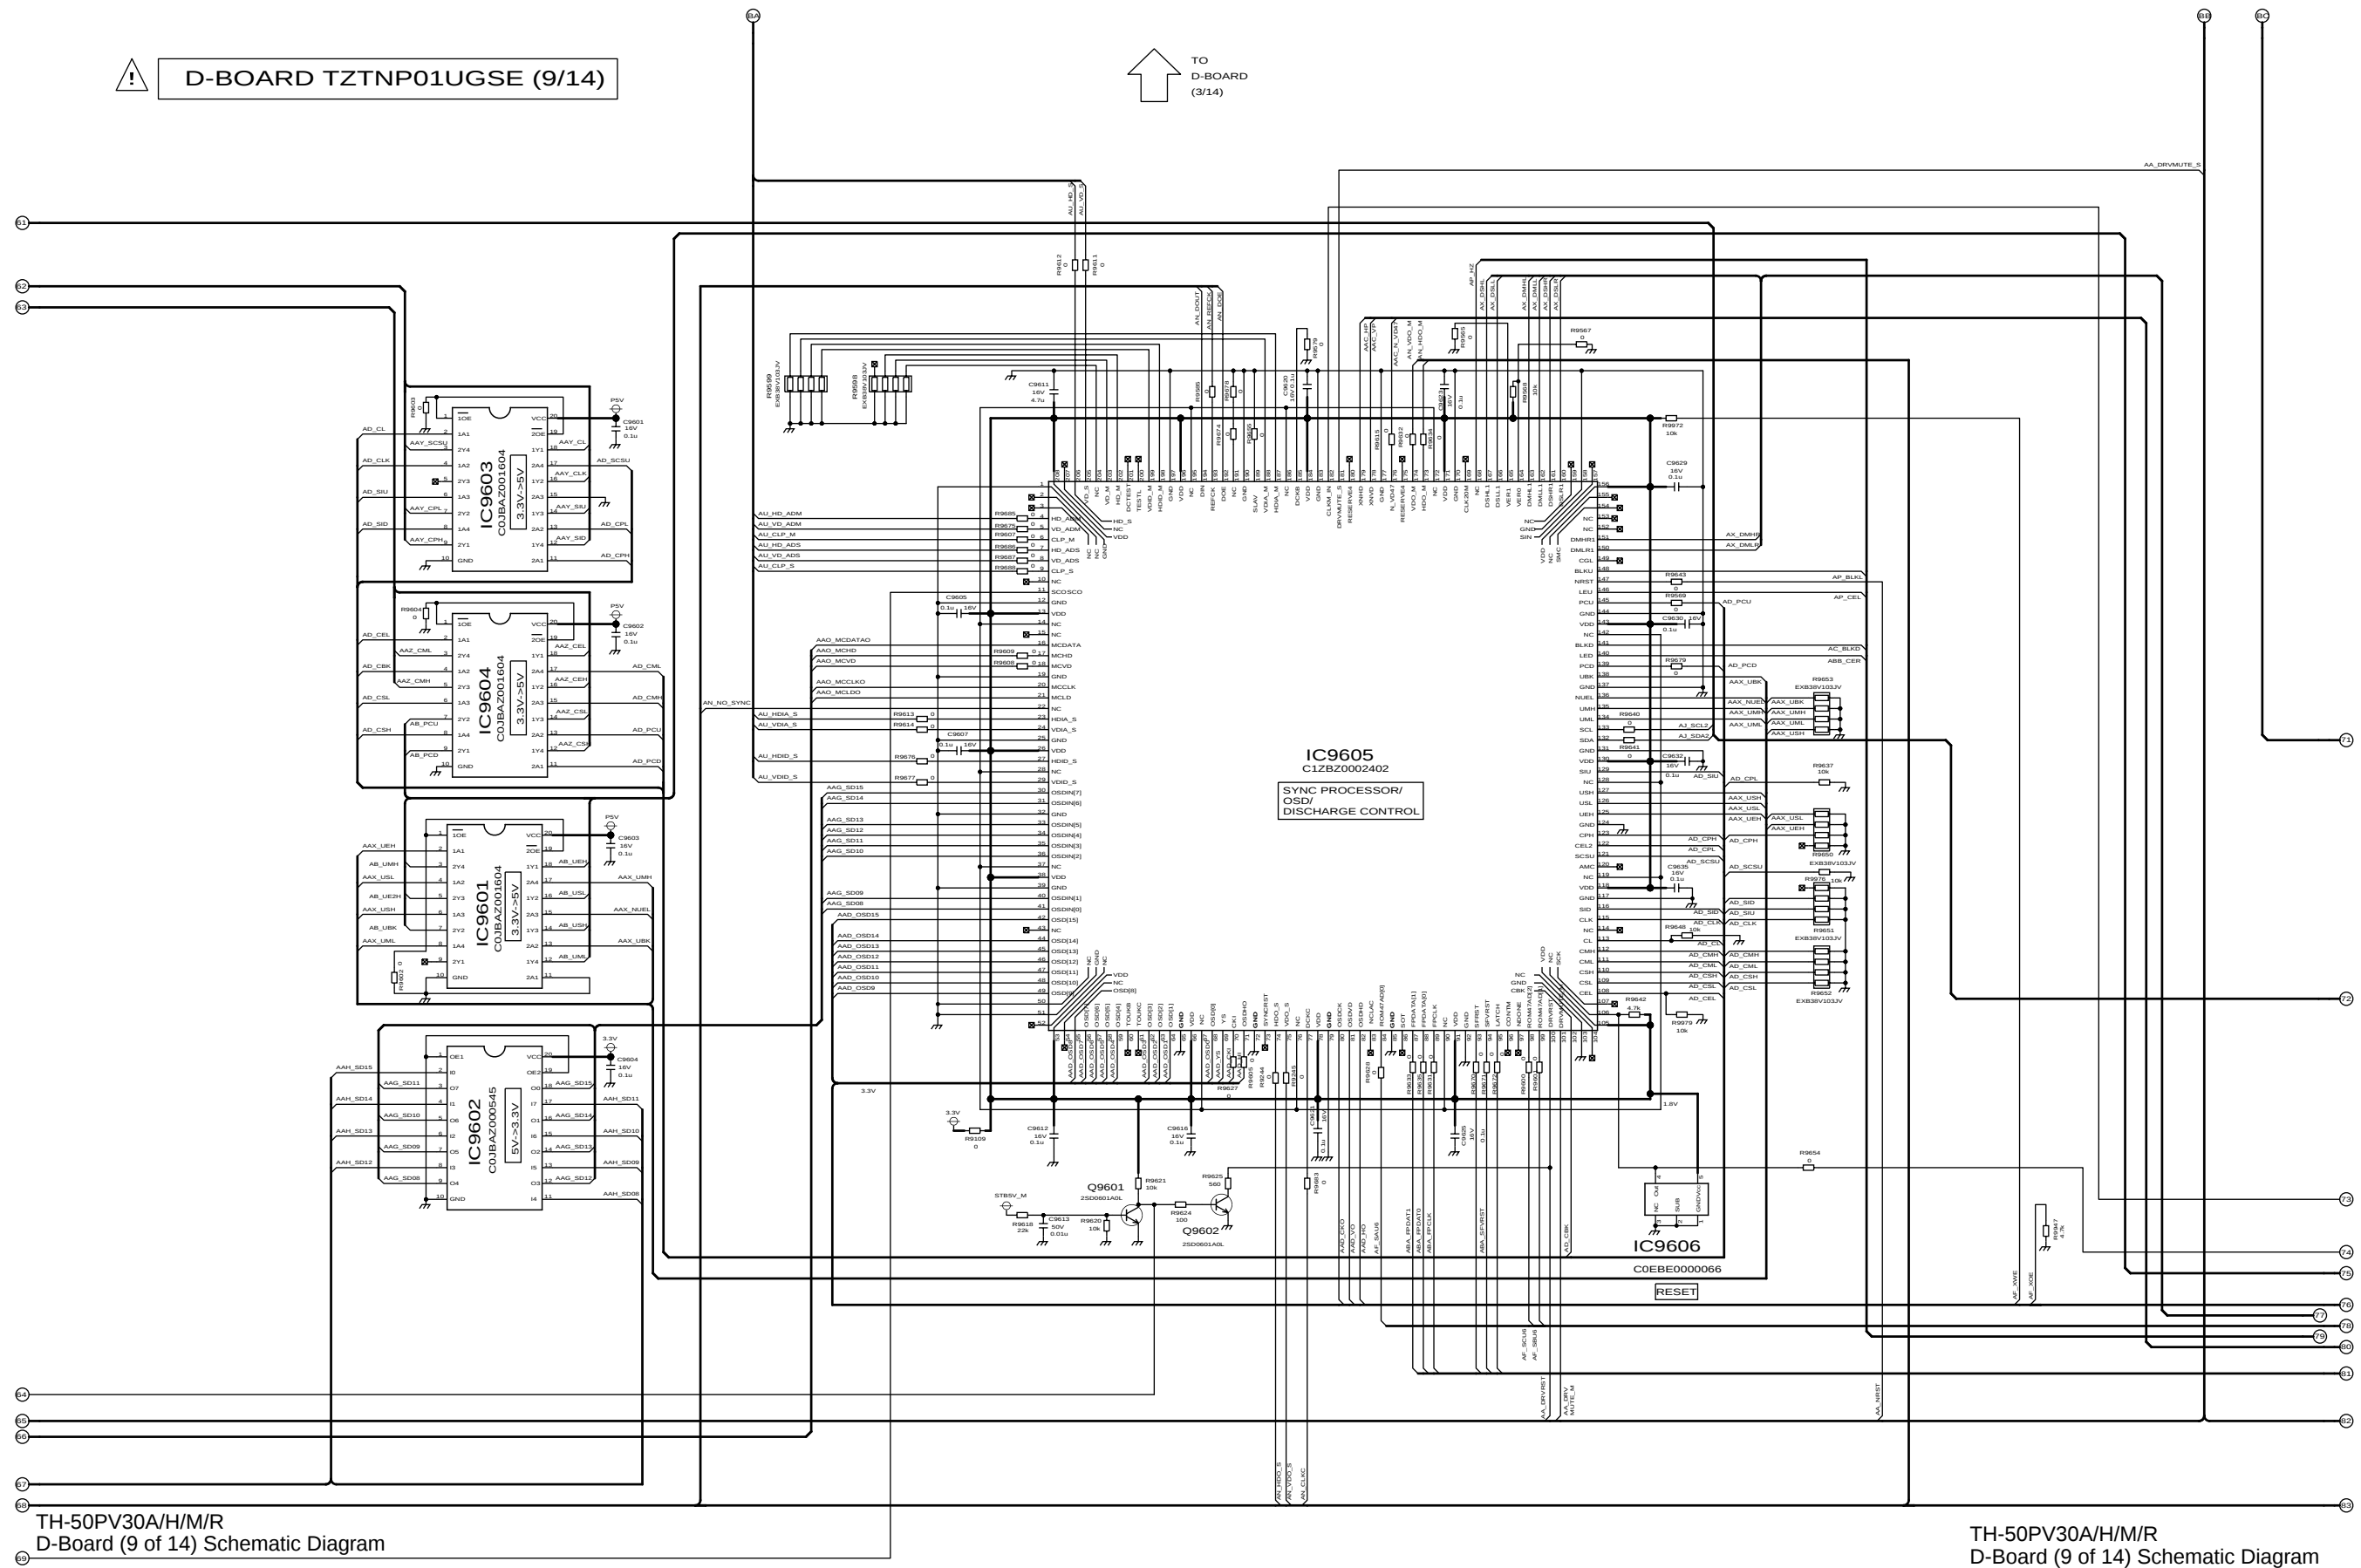


6.36. D-Board (10 of 14) Schematic Diagram

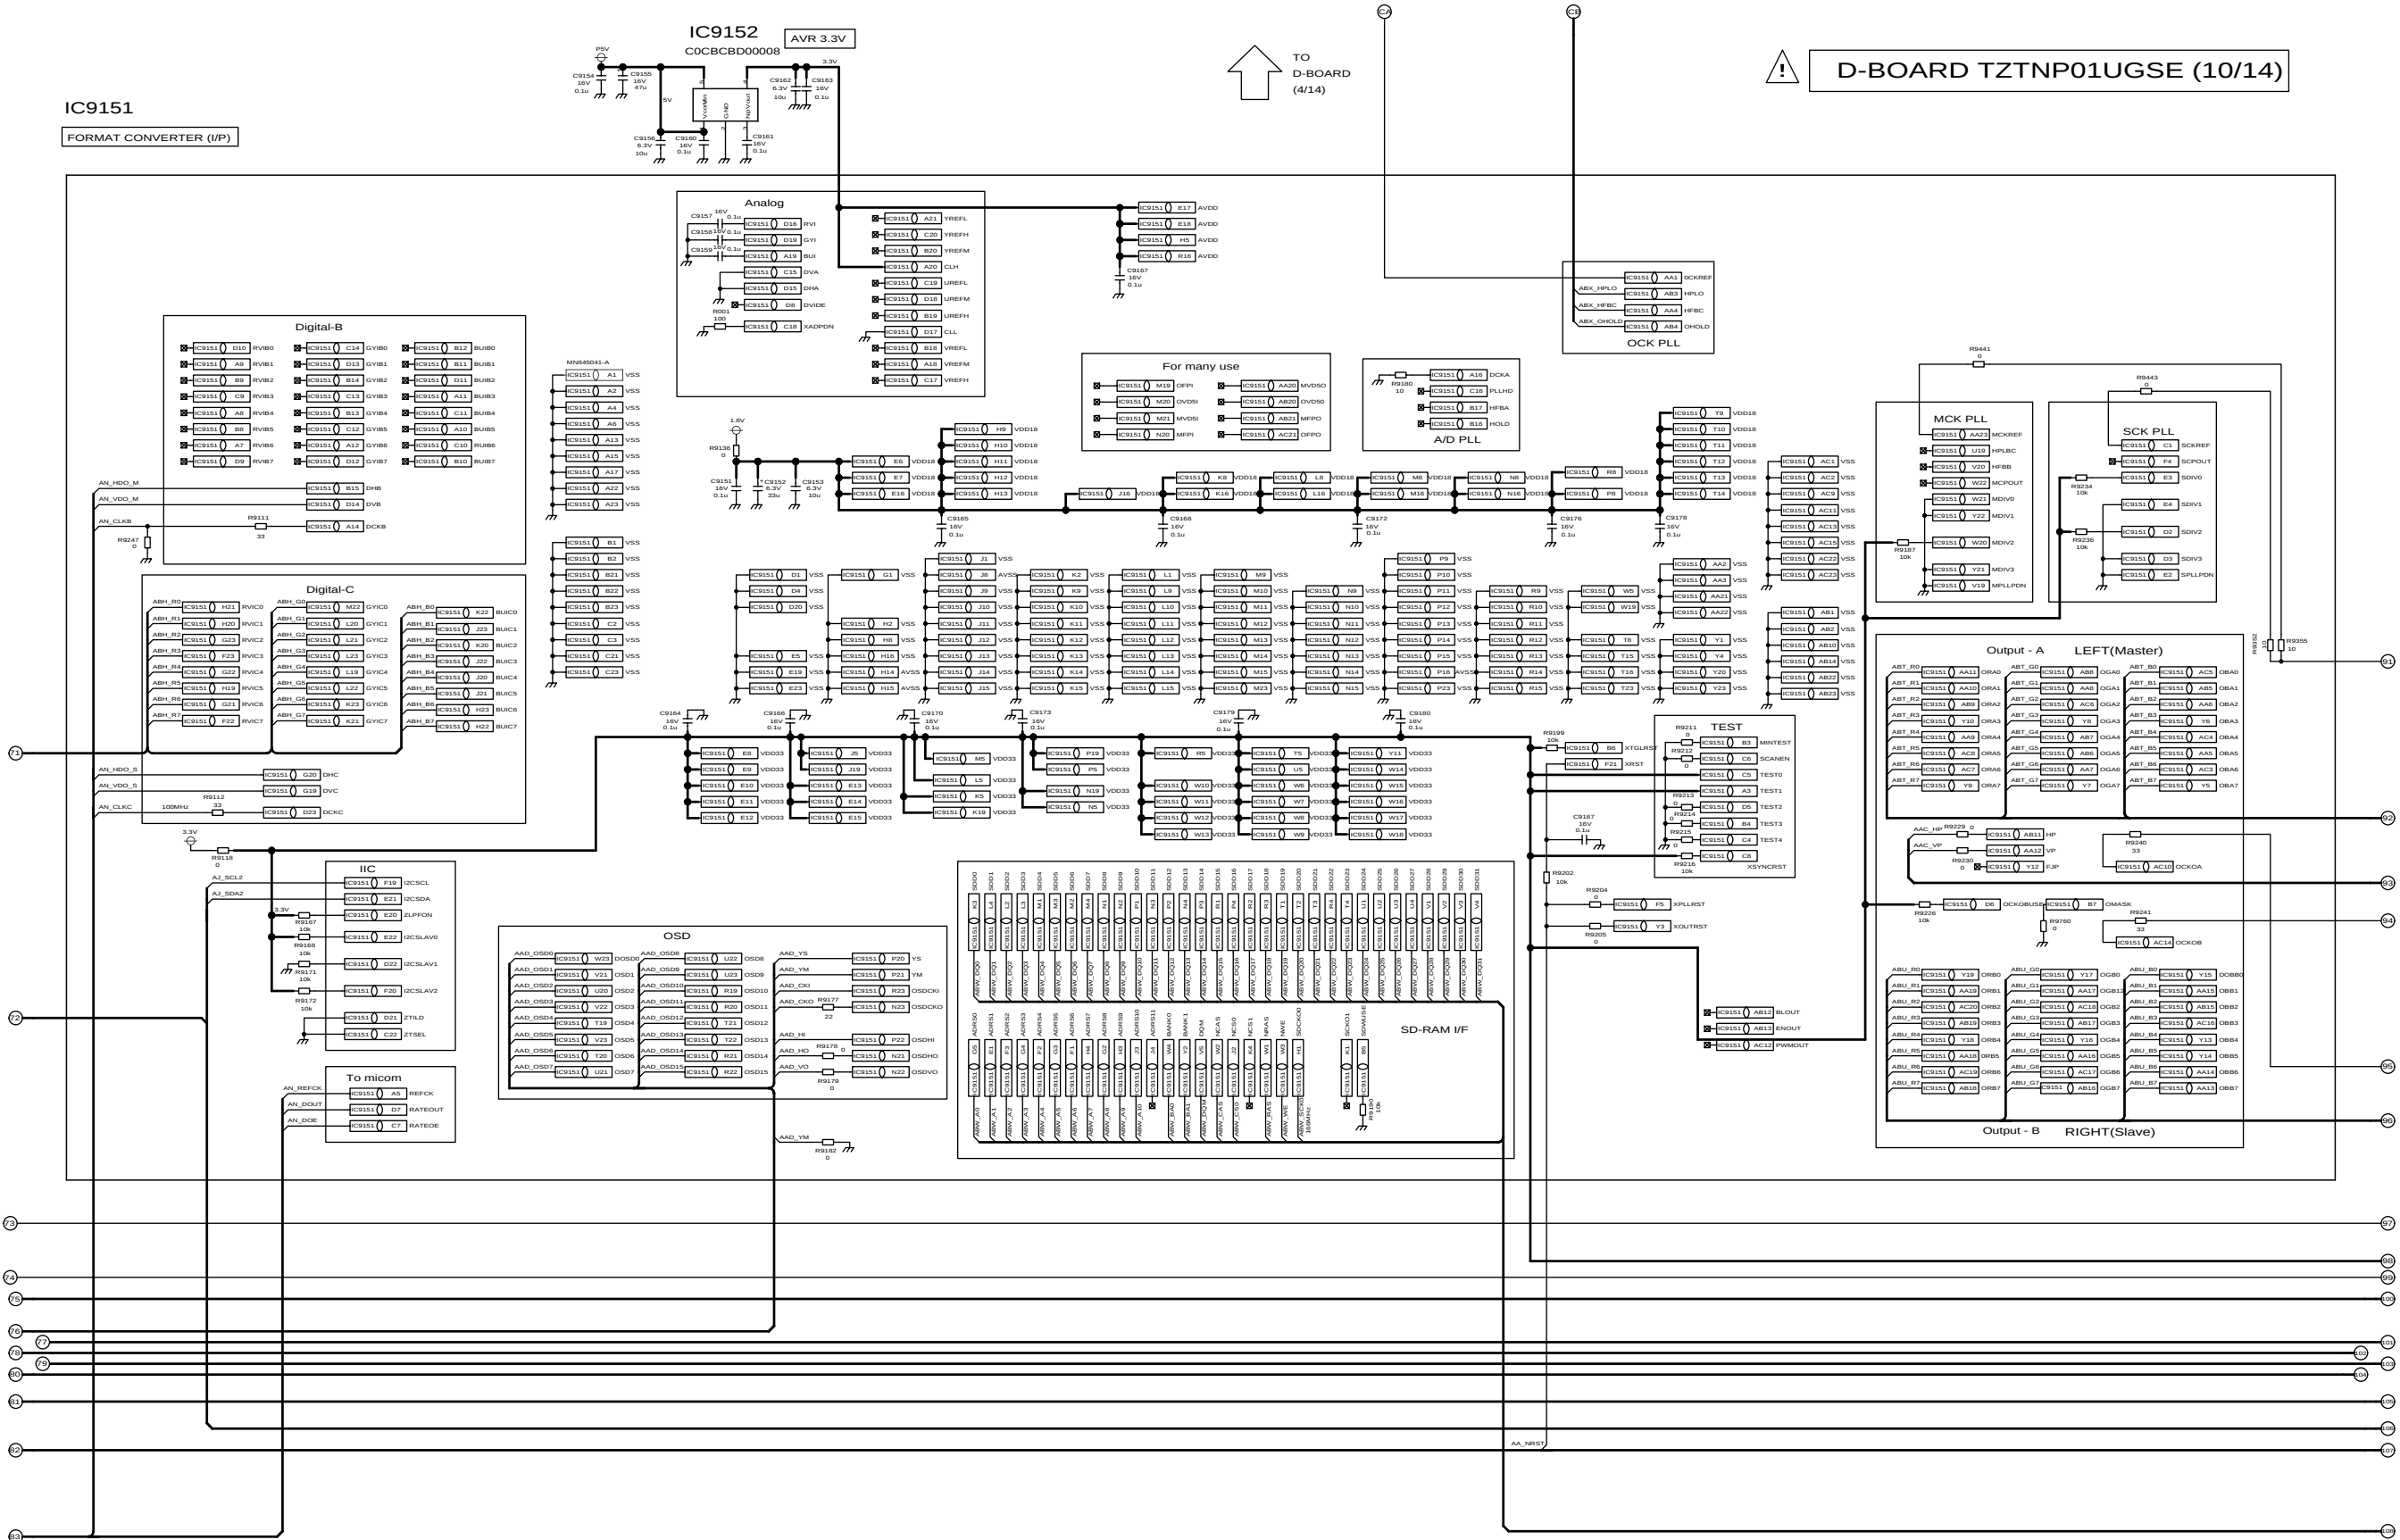


TH-50PV30A/H/M/R
D-Board (10 of 14) Schematic Diagram

TH-50PV30A/H/M/R
D-Board (10 of 14) Schematic Diagram


6.37. D-Board (11 of 14) Schematic Diagram

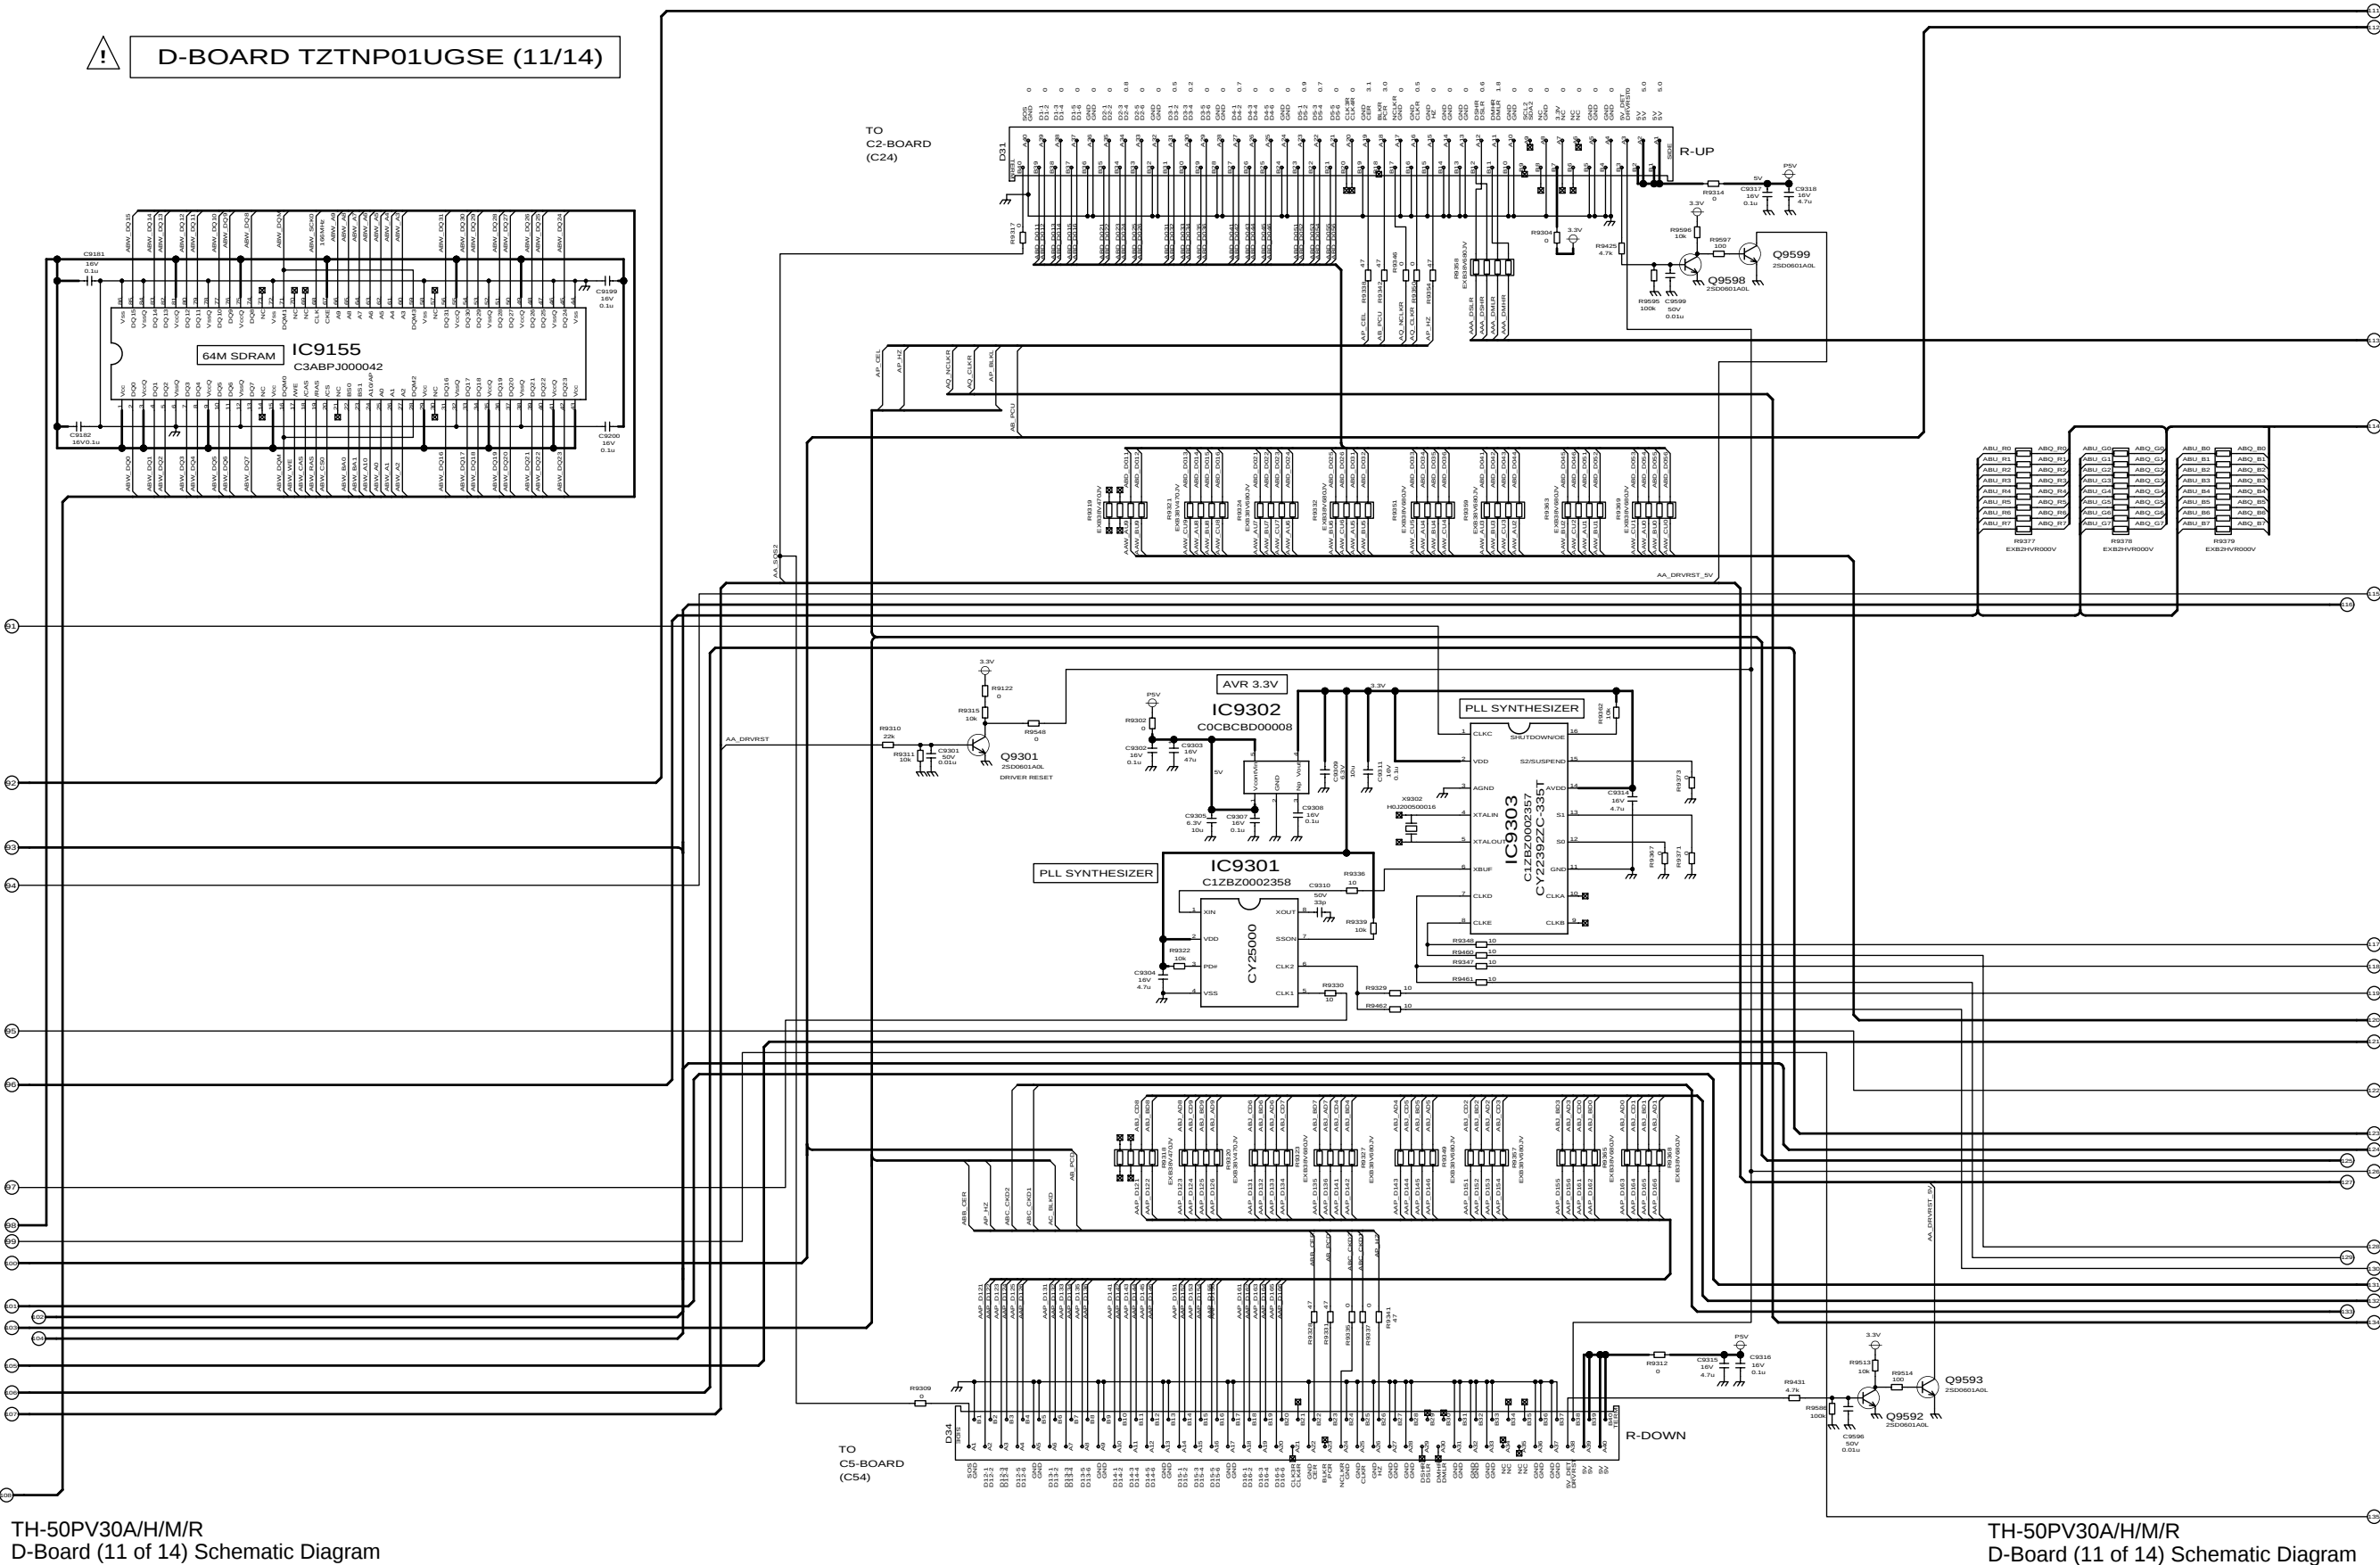

6.38. D-Board (12 of 14) Schematic Diagram

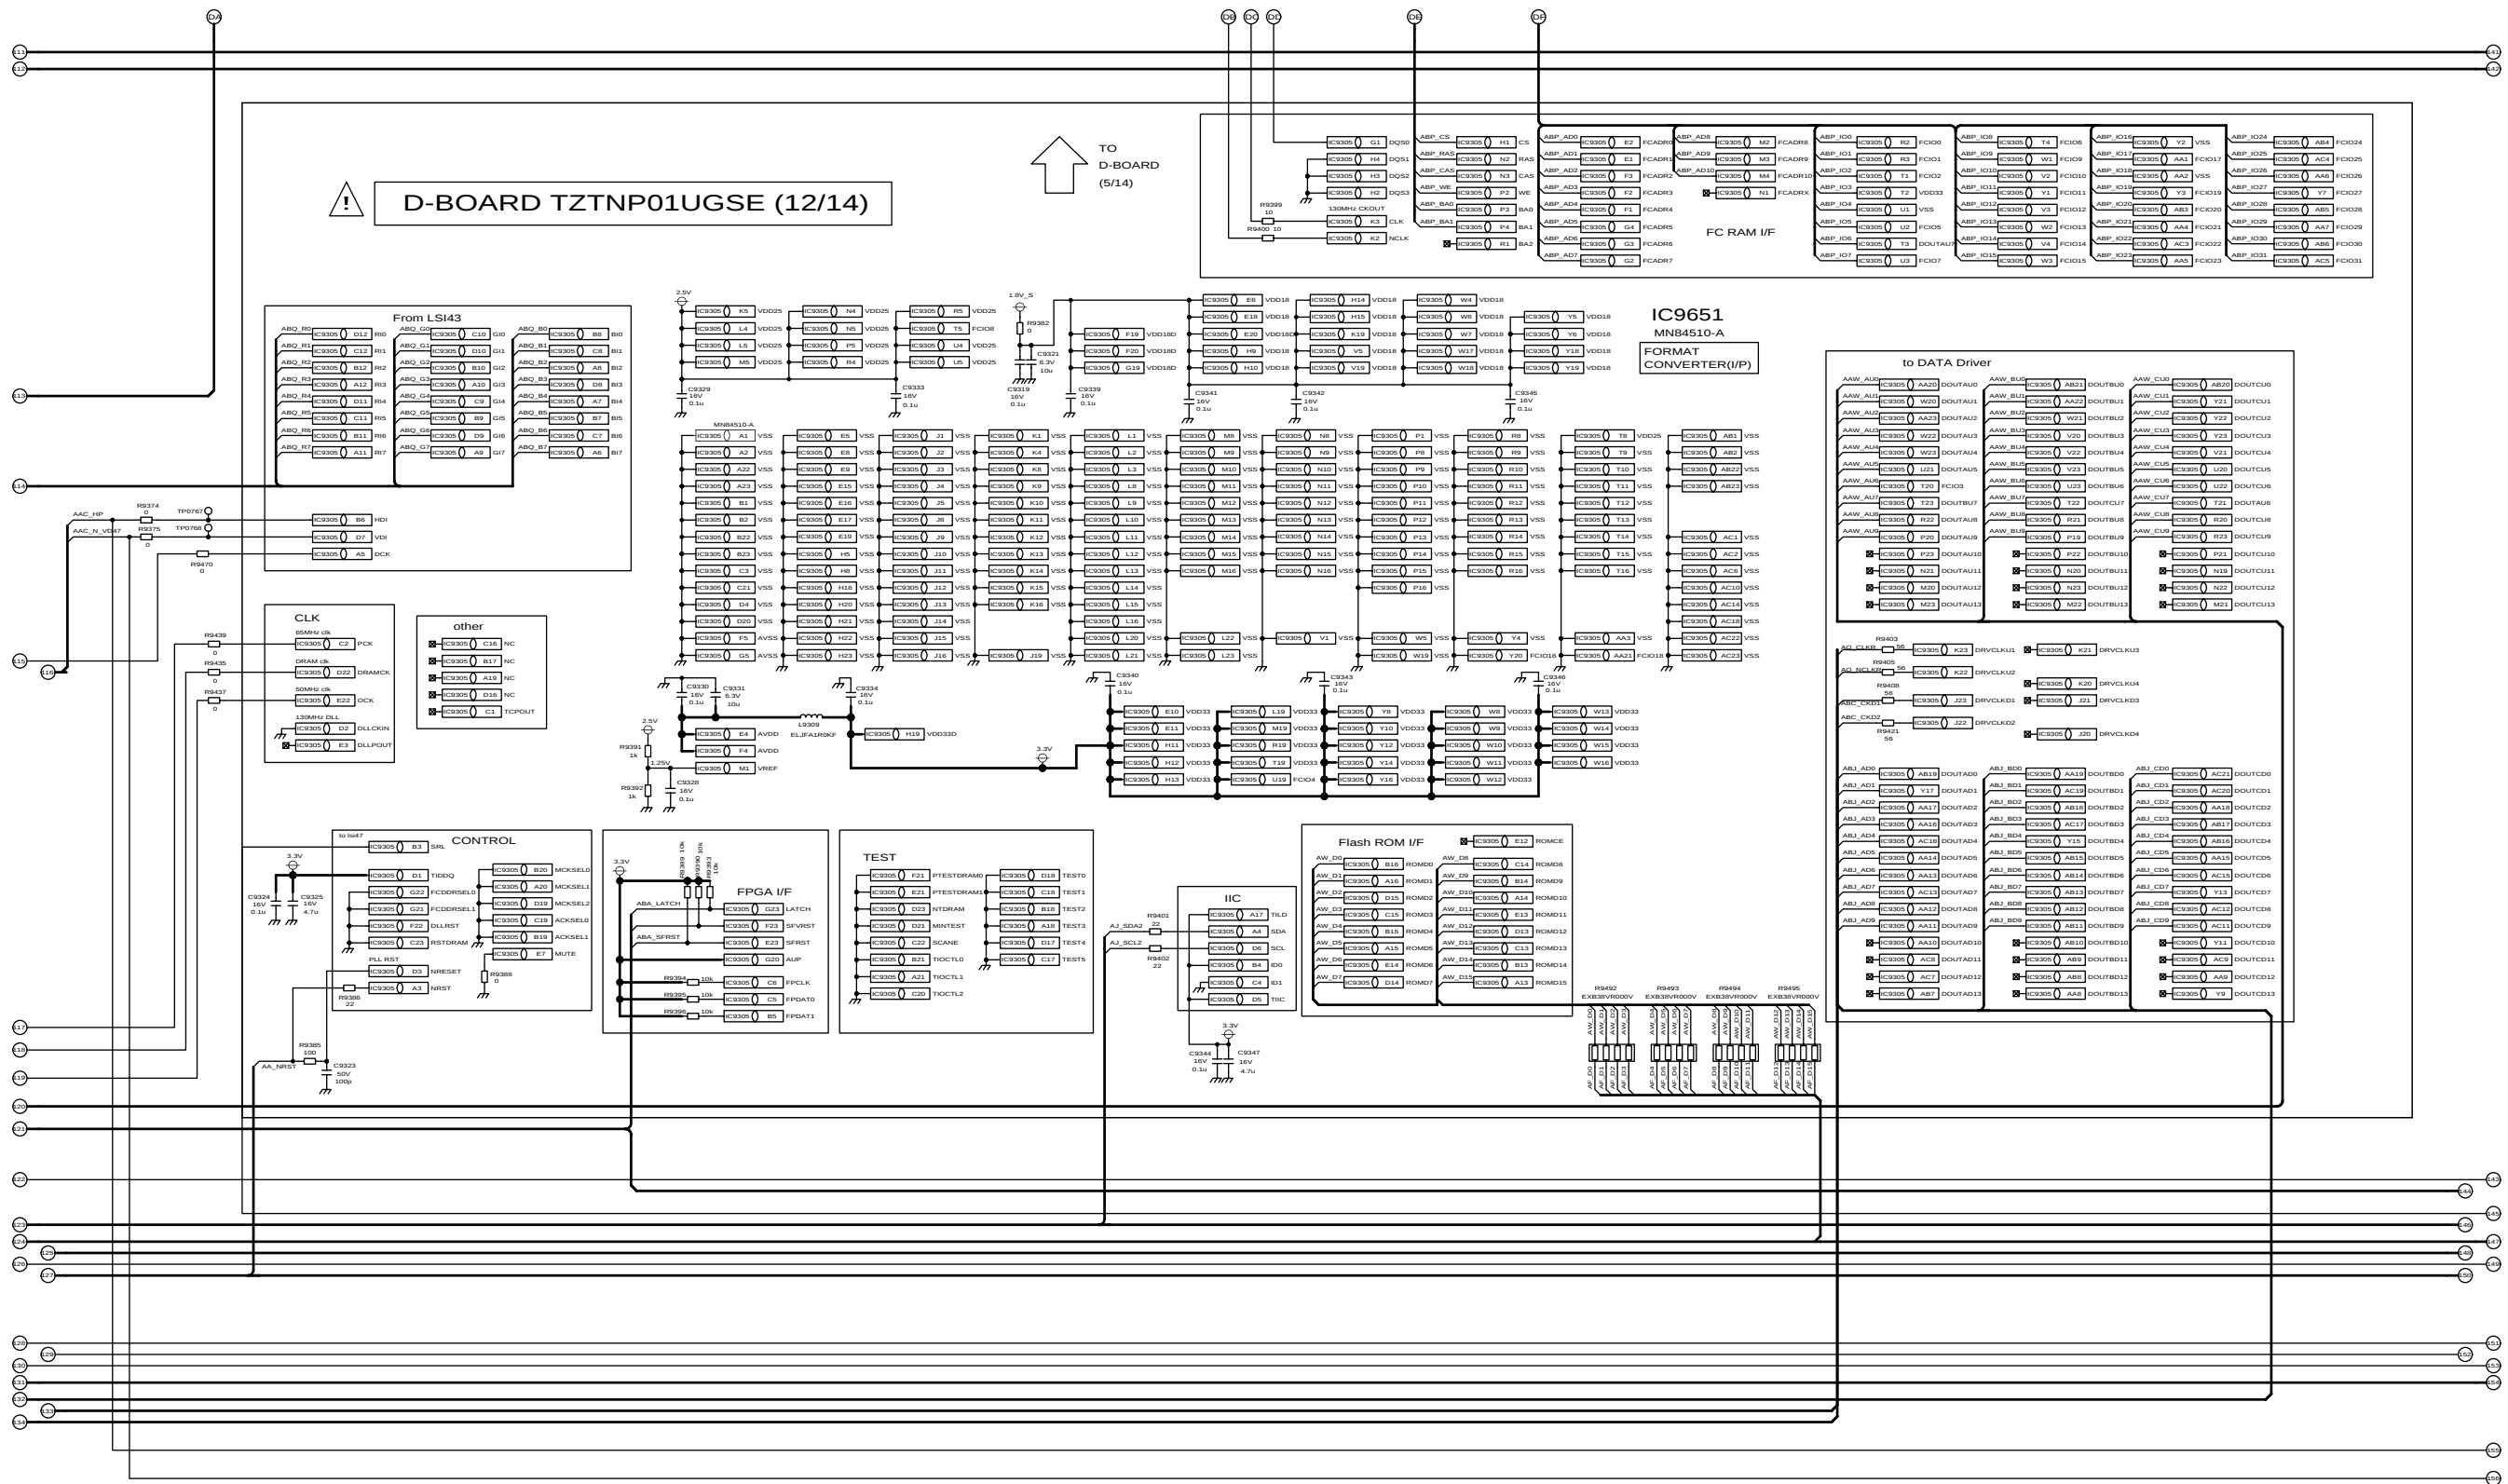


6.39. D-Board (13 of 14) Schematic Diagram

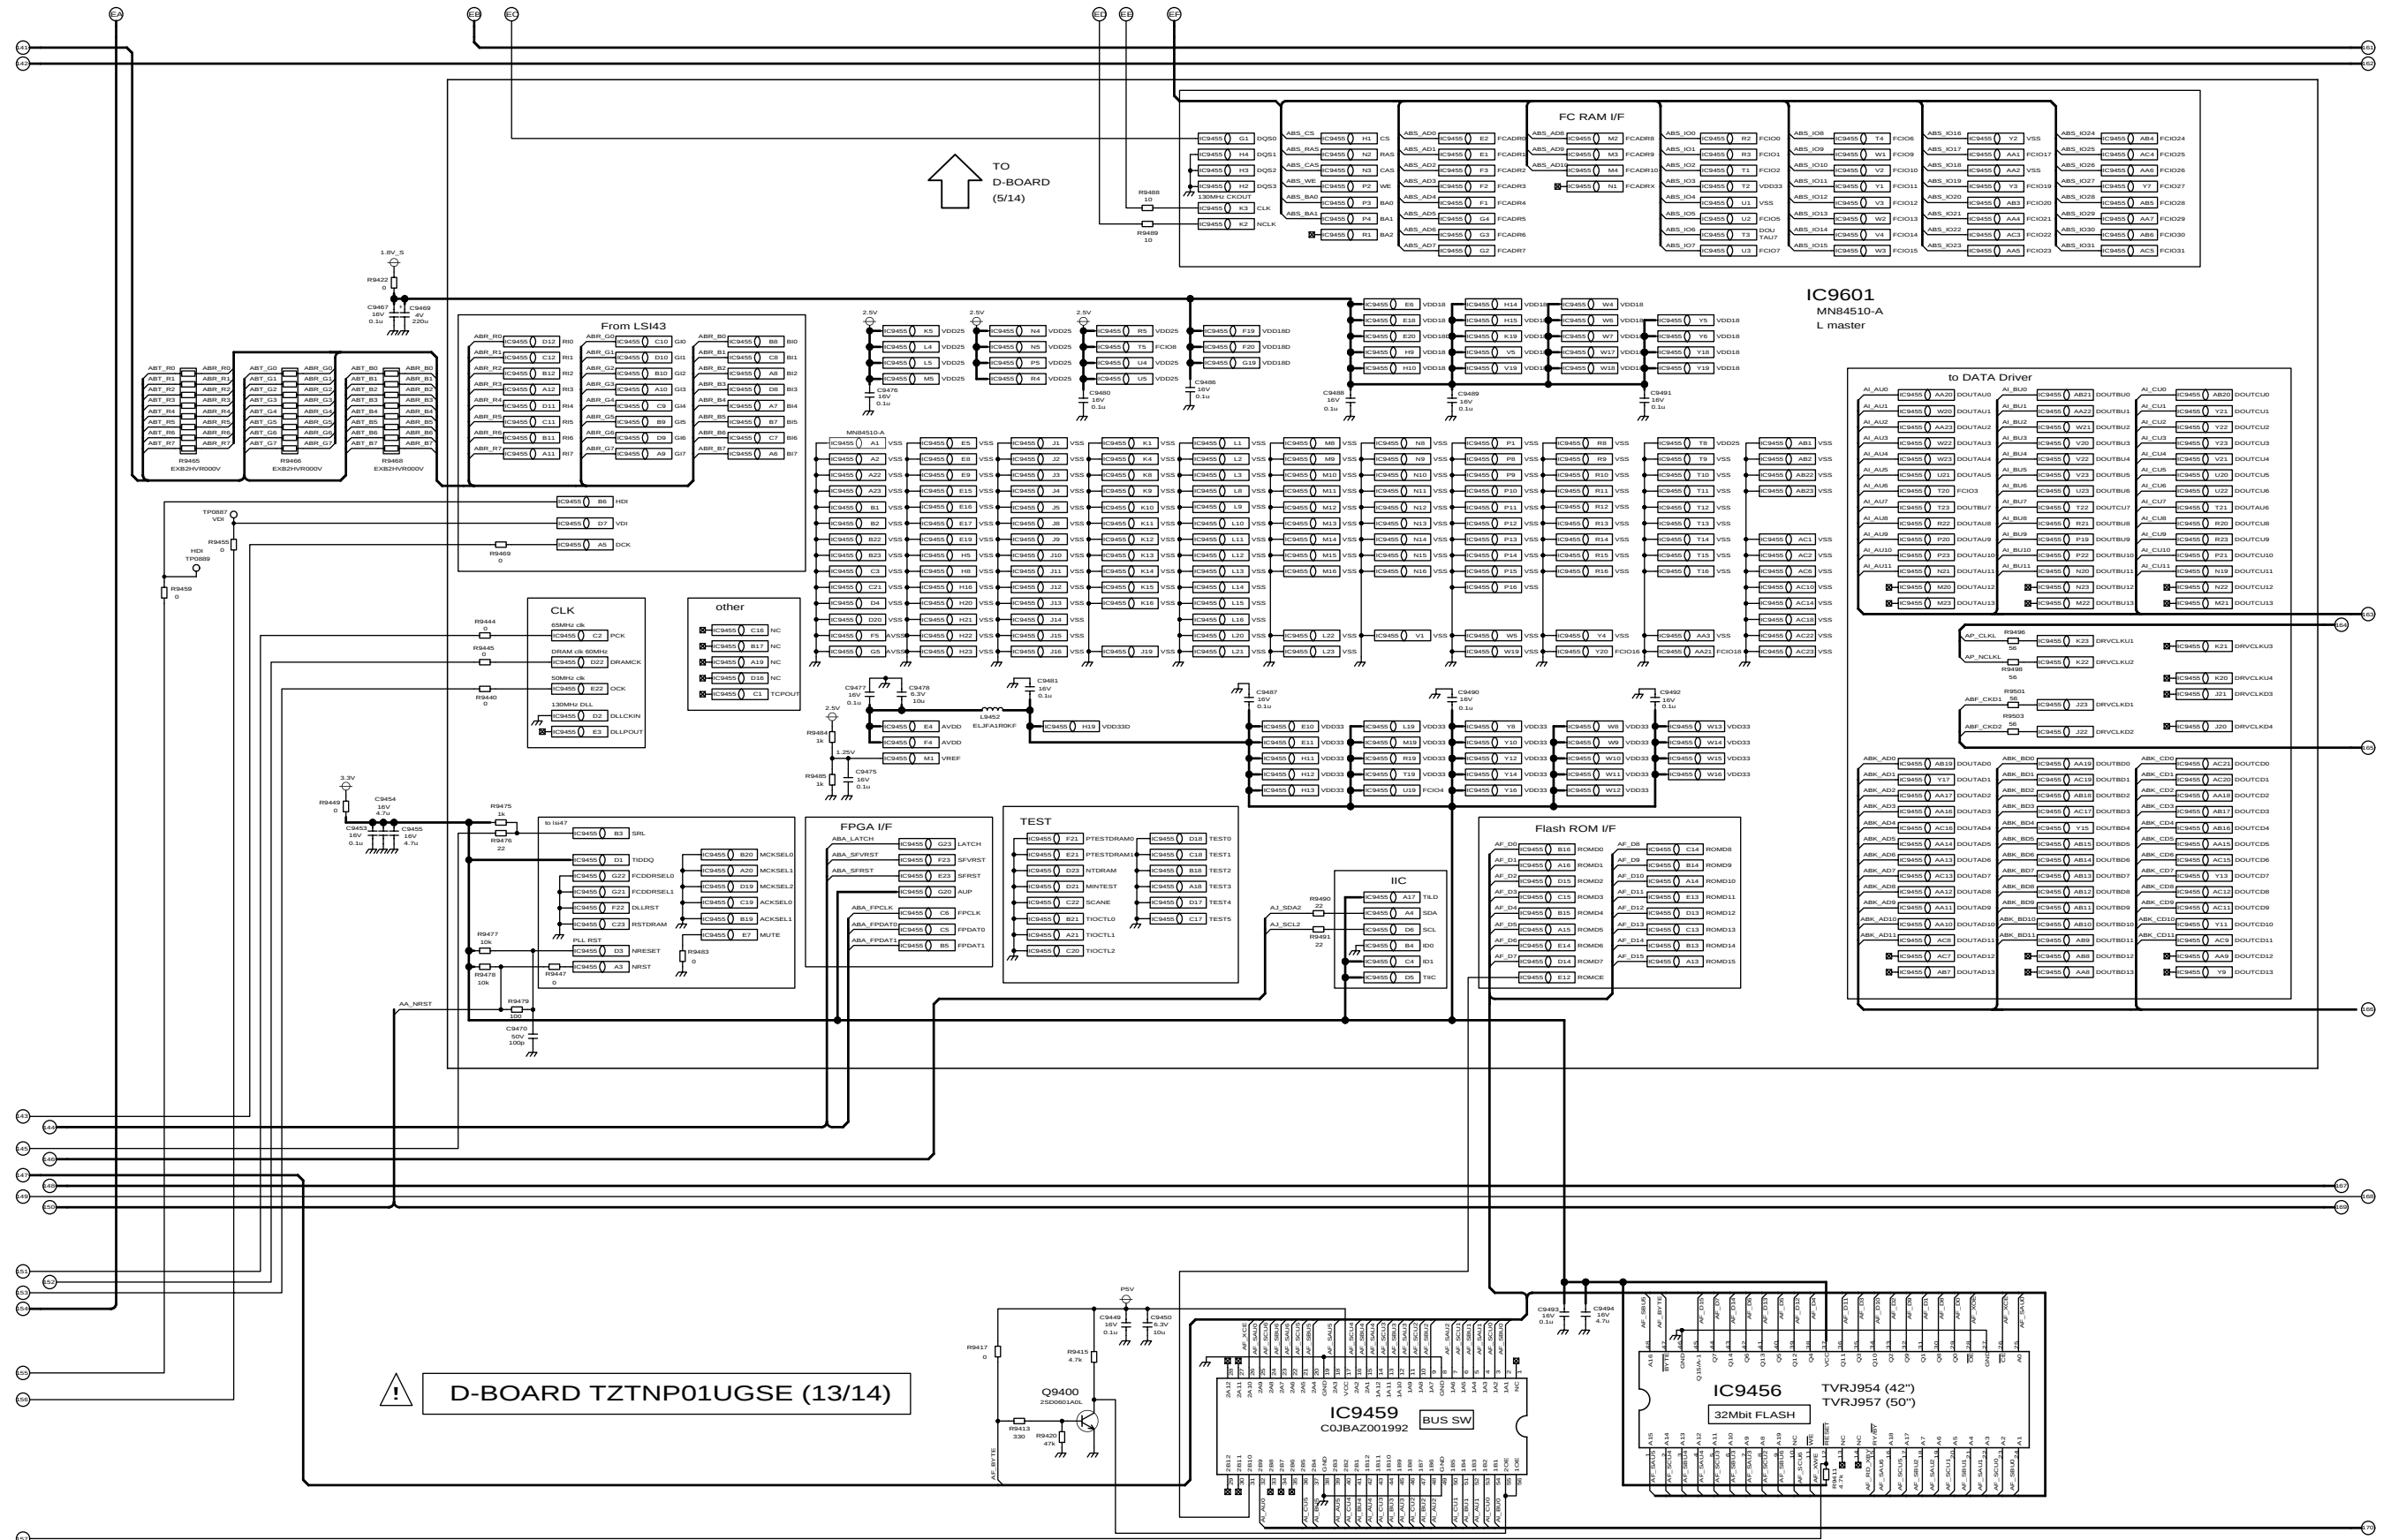

TH-50PV30A/H/M/R
D-Board (13 of 14) Schematic Diagram

TH-50PV30A/H/M/R
D-Board (13 of 14) Schematic Diagram

6.40. D-Board (14 of 14) Schematic Diagram

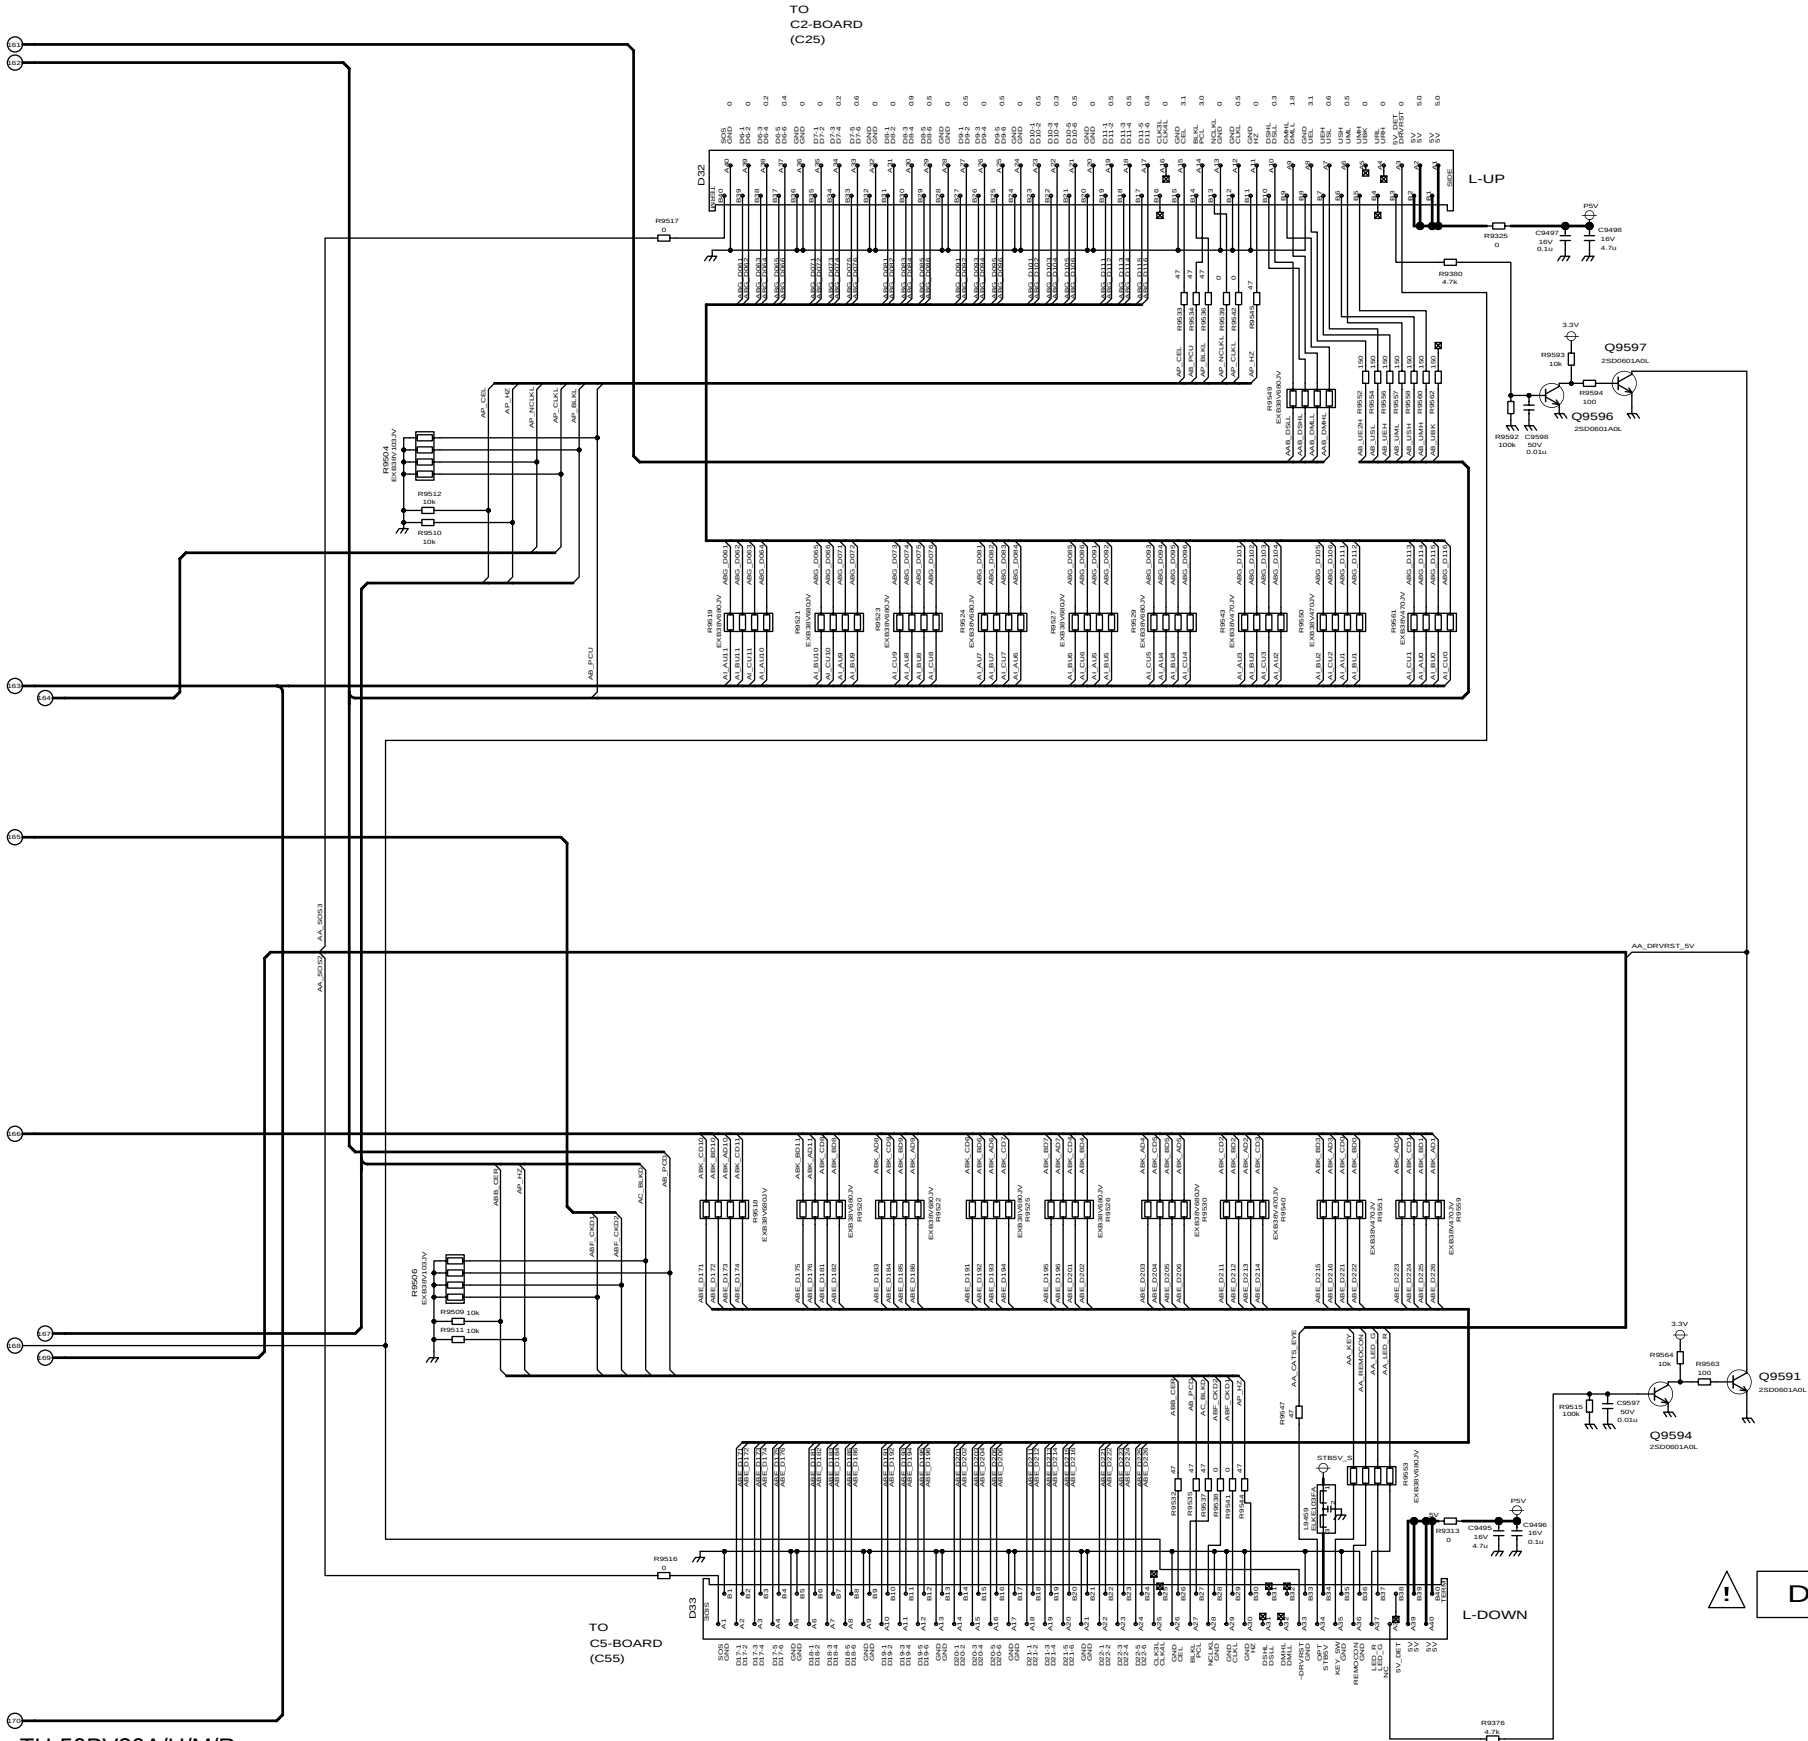


D-BOARD TZTNP01UGSE (14/14)

TH-50PV30A/H/M/R
D-Board (14 of 14) Schematic Diagram

TH-50PV30A/H/M/R
D-Board (14 of 14) Schematic Diagram


6.41. SC-Board Block Diagram

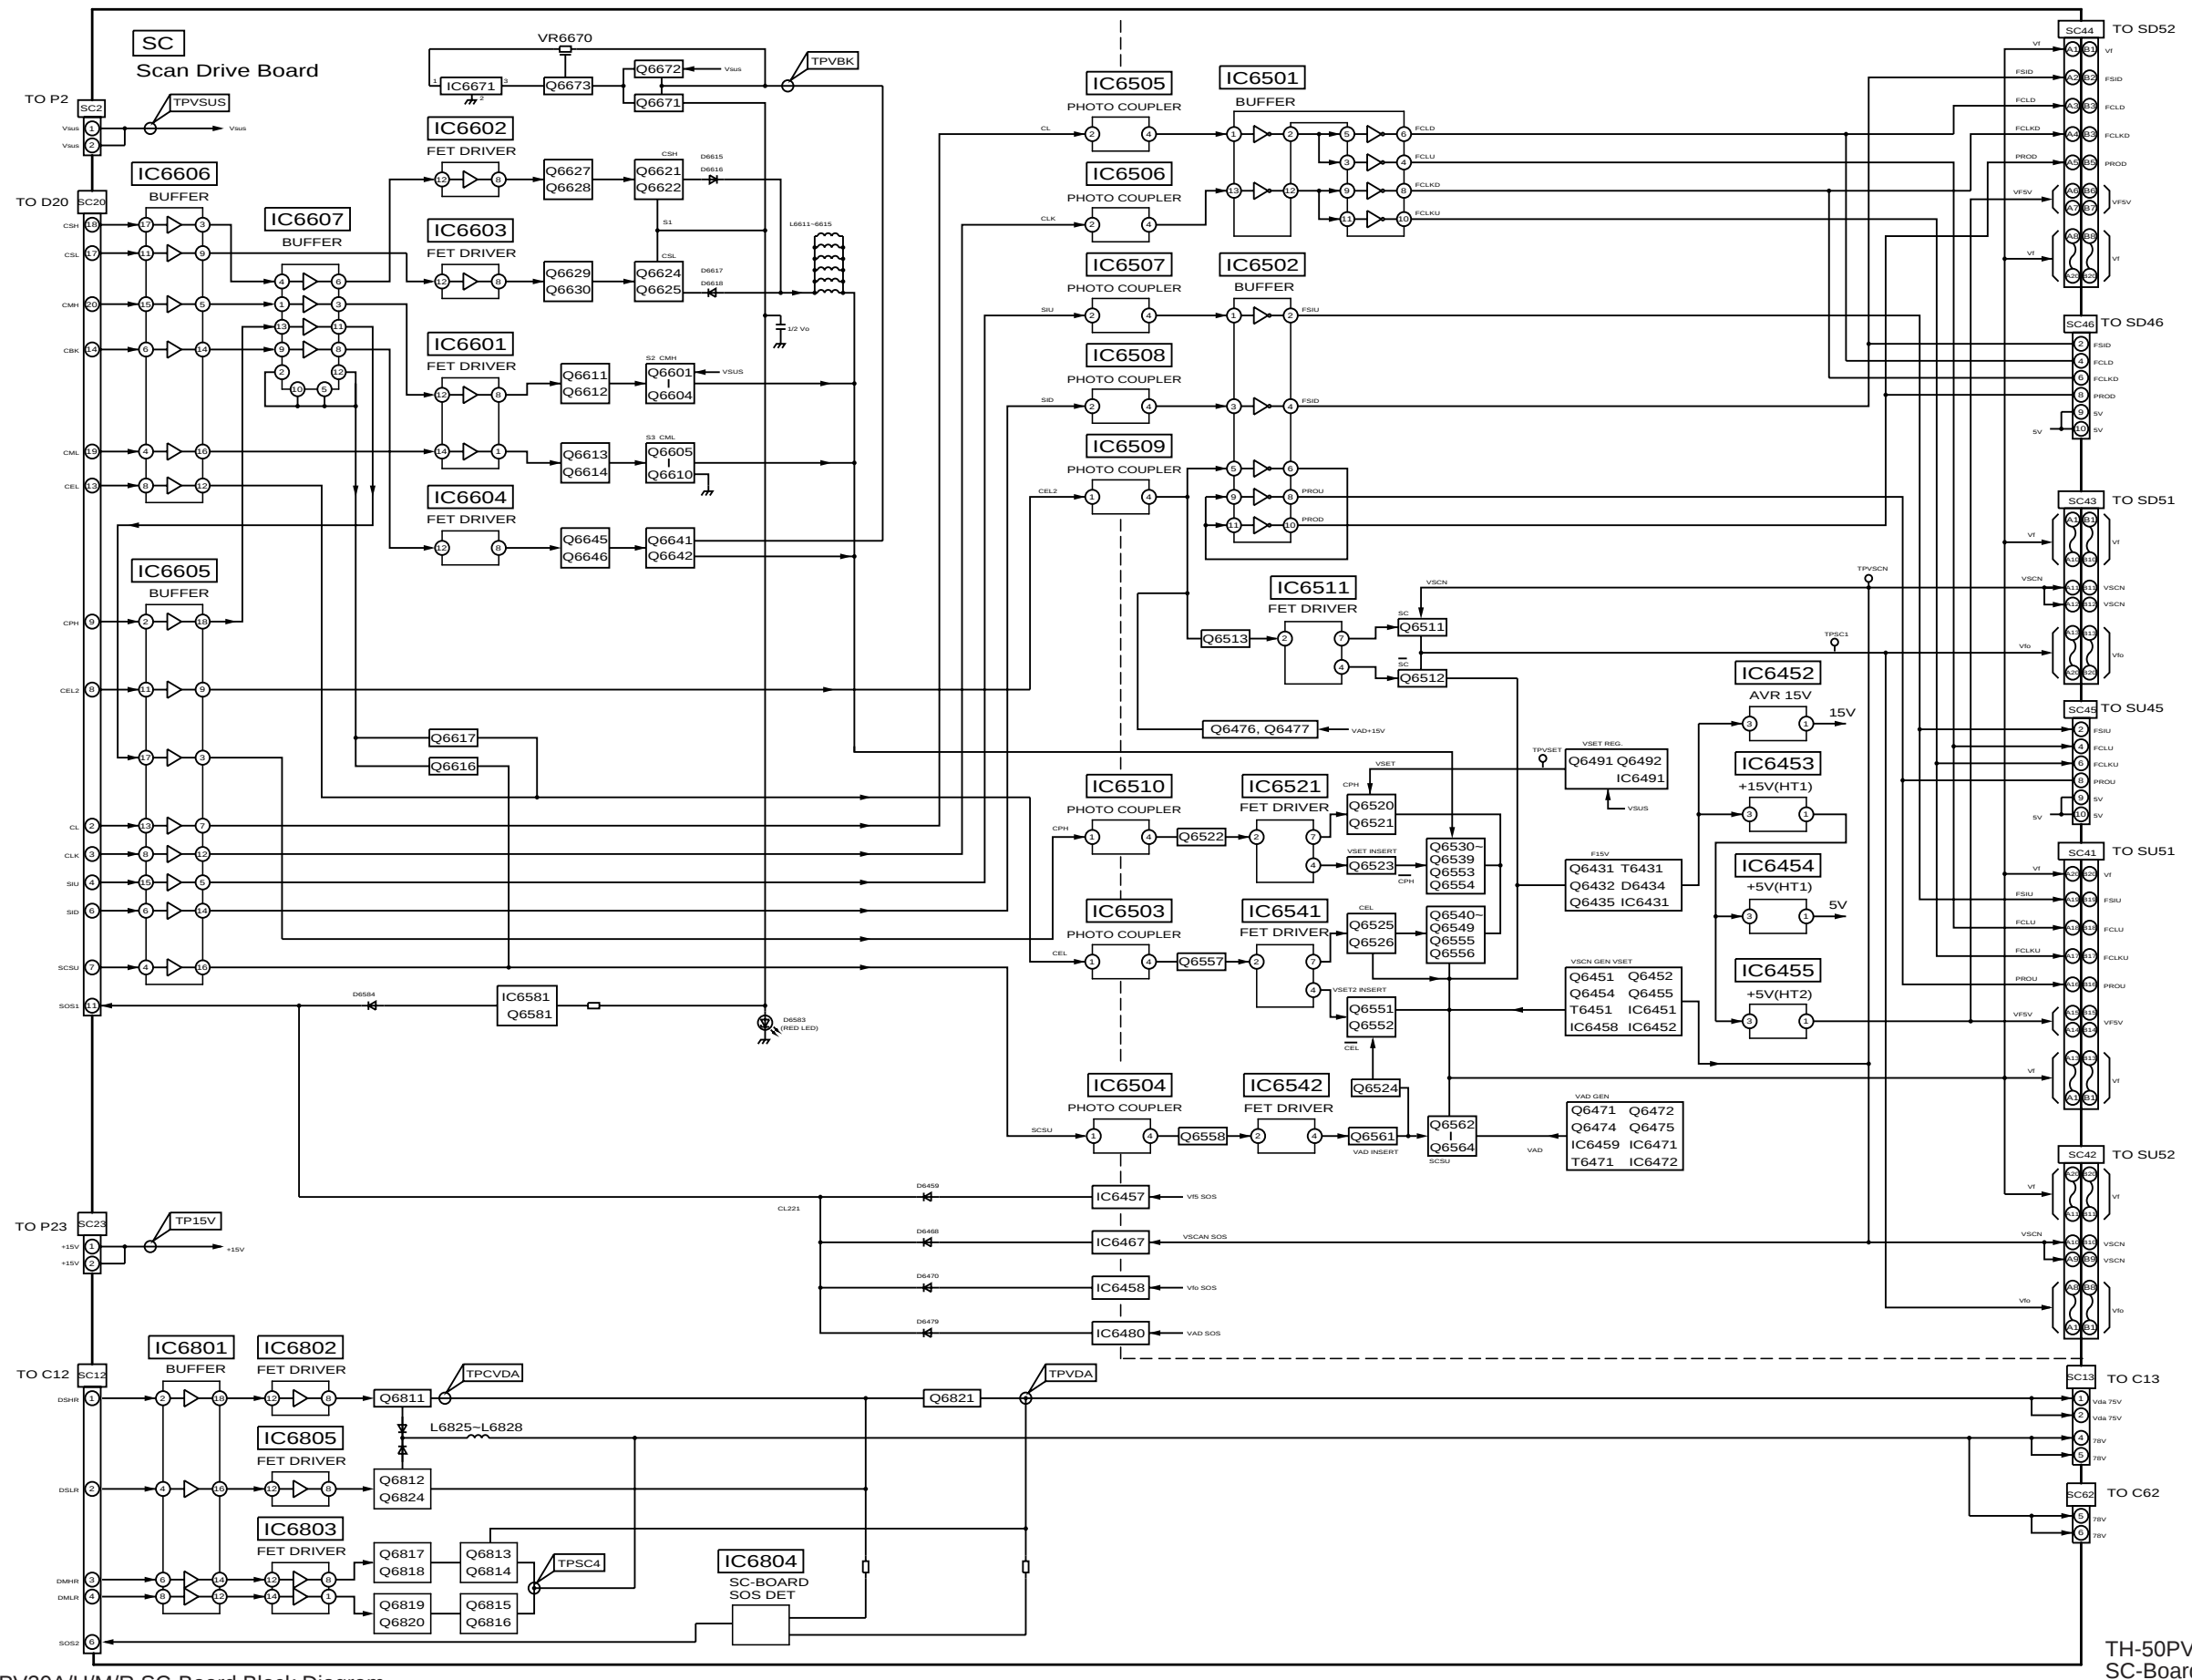

TH-50PV30A/H/M/R SC-Board Block Diagram

TH-50PV30A/H/M/R
SC-Board Block Diagram


6.42. SC-Board (1 of 3) Schematic Diagram

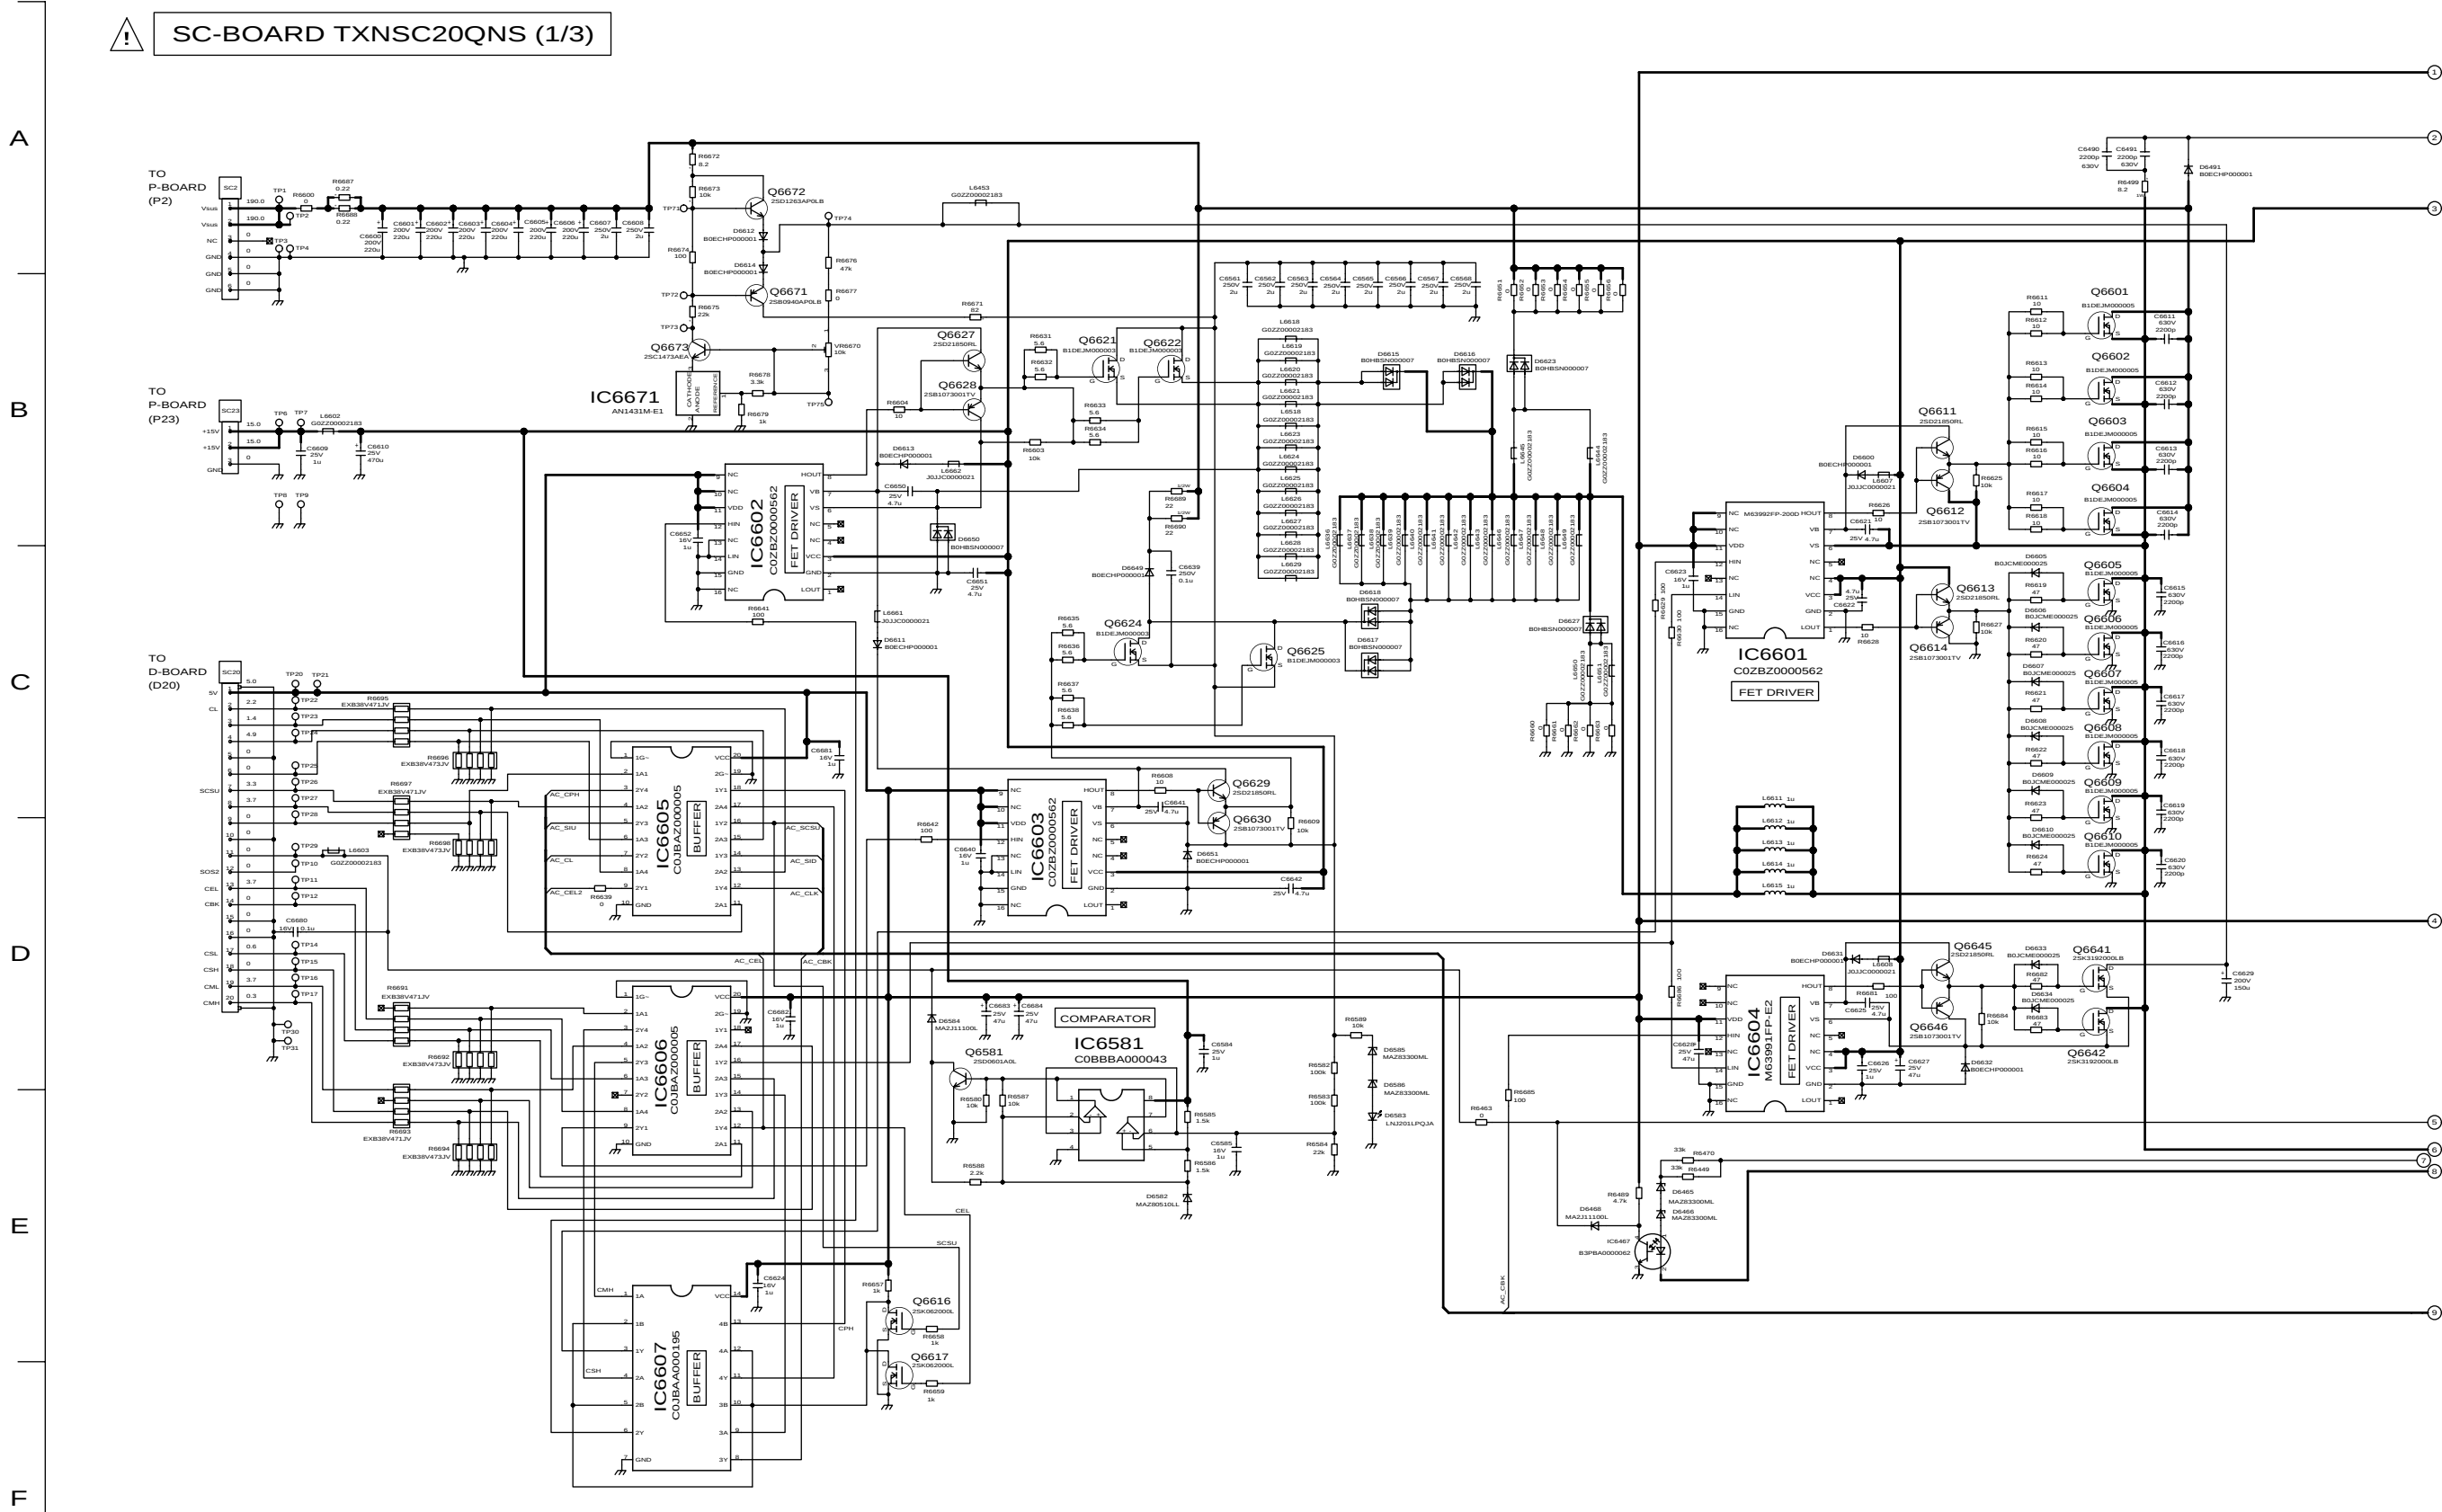

TH-50PV30A/H/M/R
SC-Board (1 of 3) Schematic Diagram

TH-50PV30A/H/M/R
SC-Board (1 of 3) Schematic Diagram


6.43. SC-Board (2 of 3) Schematic Diagram

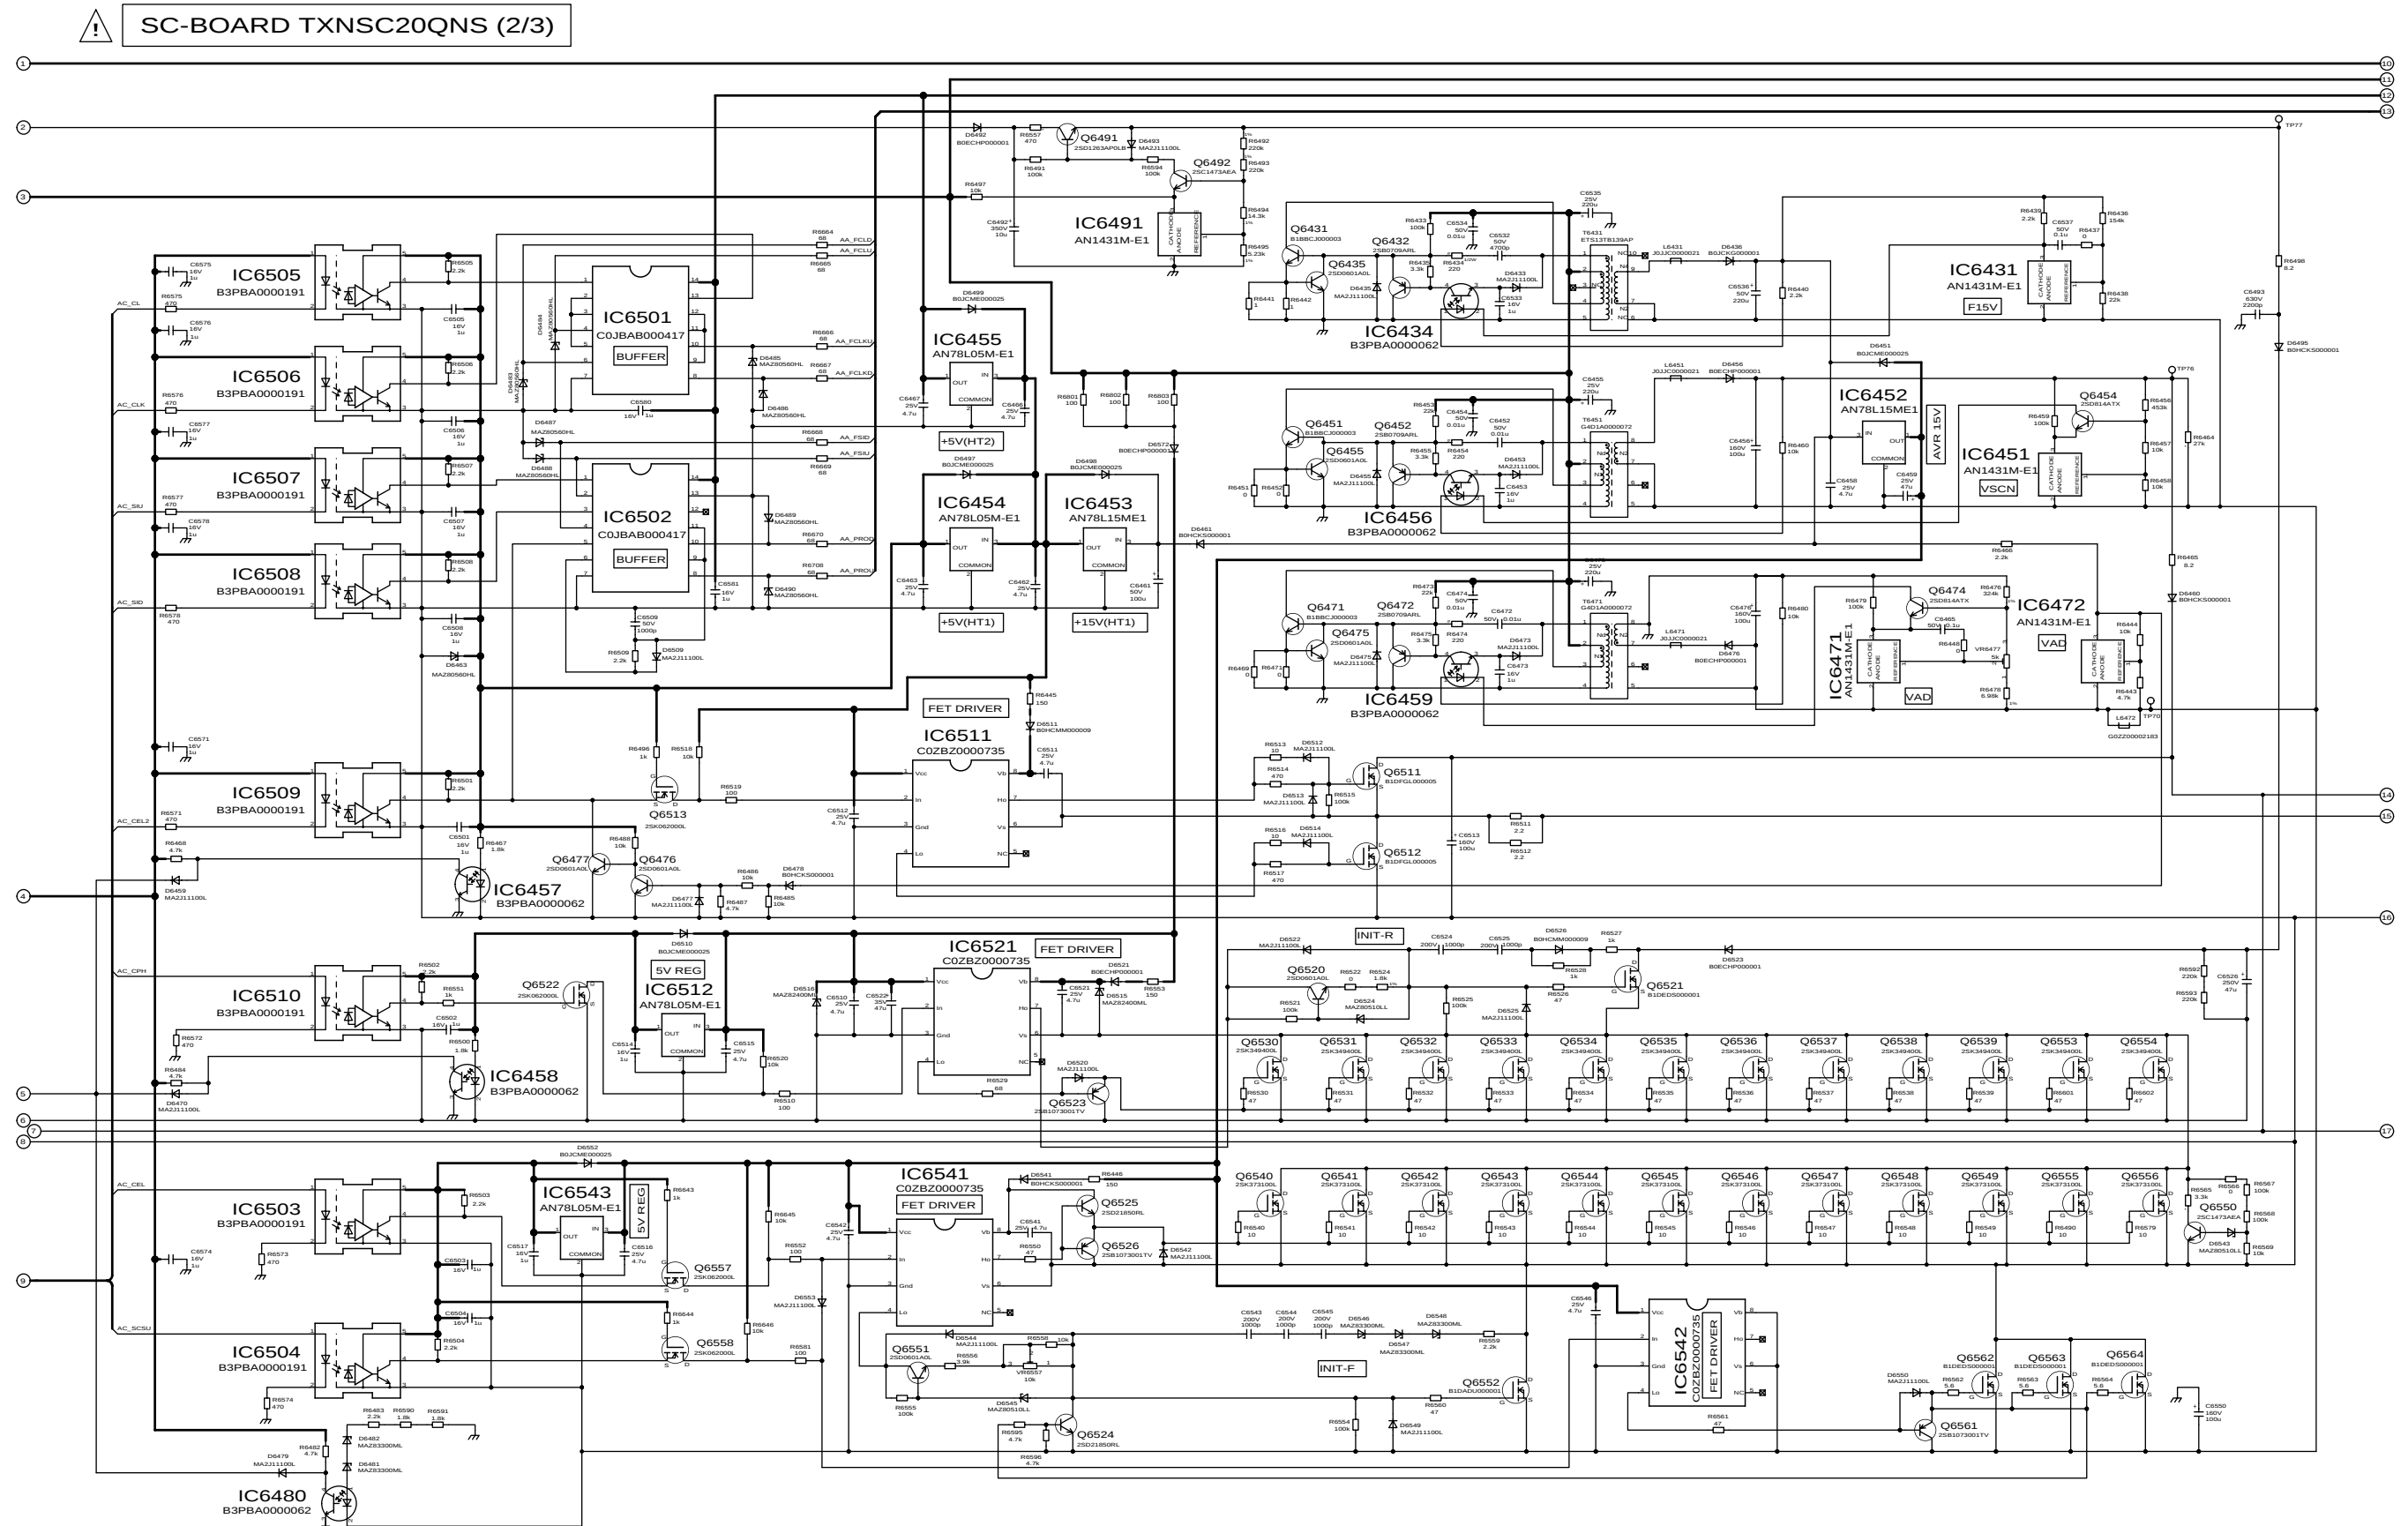

TH-50PV30A/H/M/R
SC-Board (2 of 3) Schematic Diagram

TH-50PV30A/H/M/R
SC-Board (2 of 3) Schematic Diagram


6.45. SS, S, SS2 and SS3-Board Block Diagram

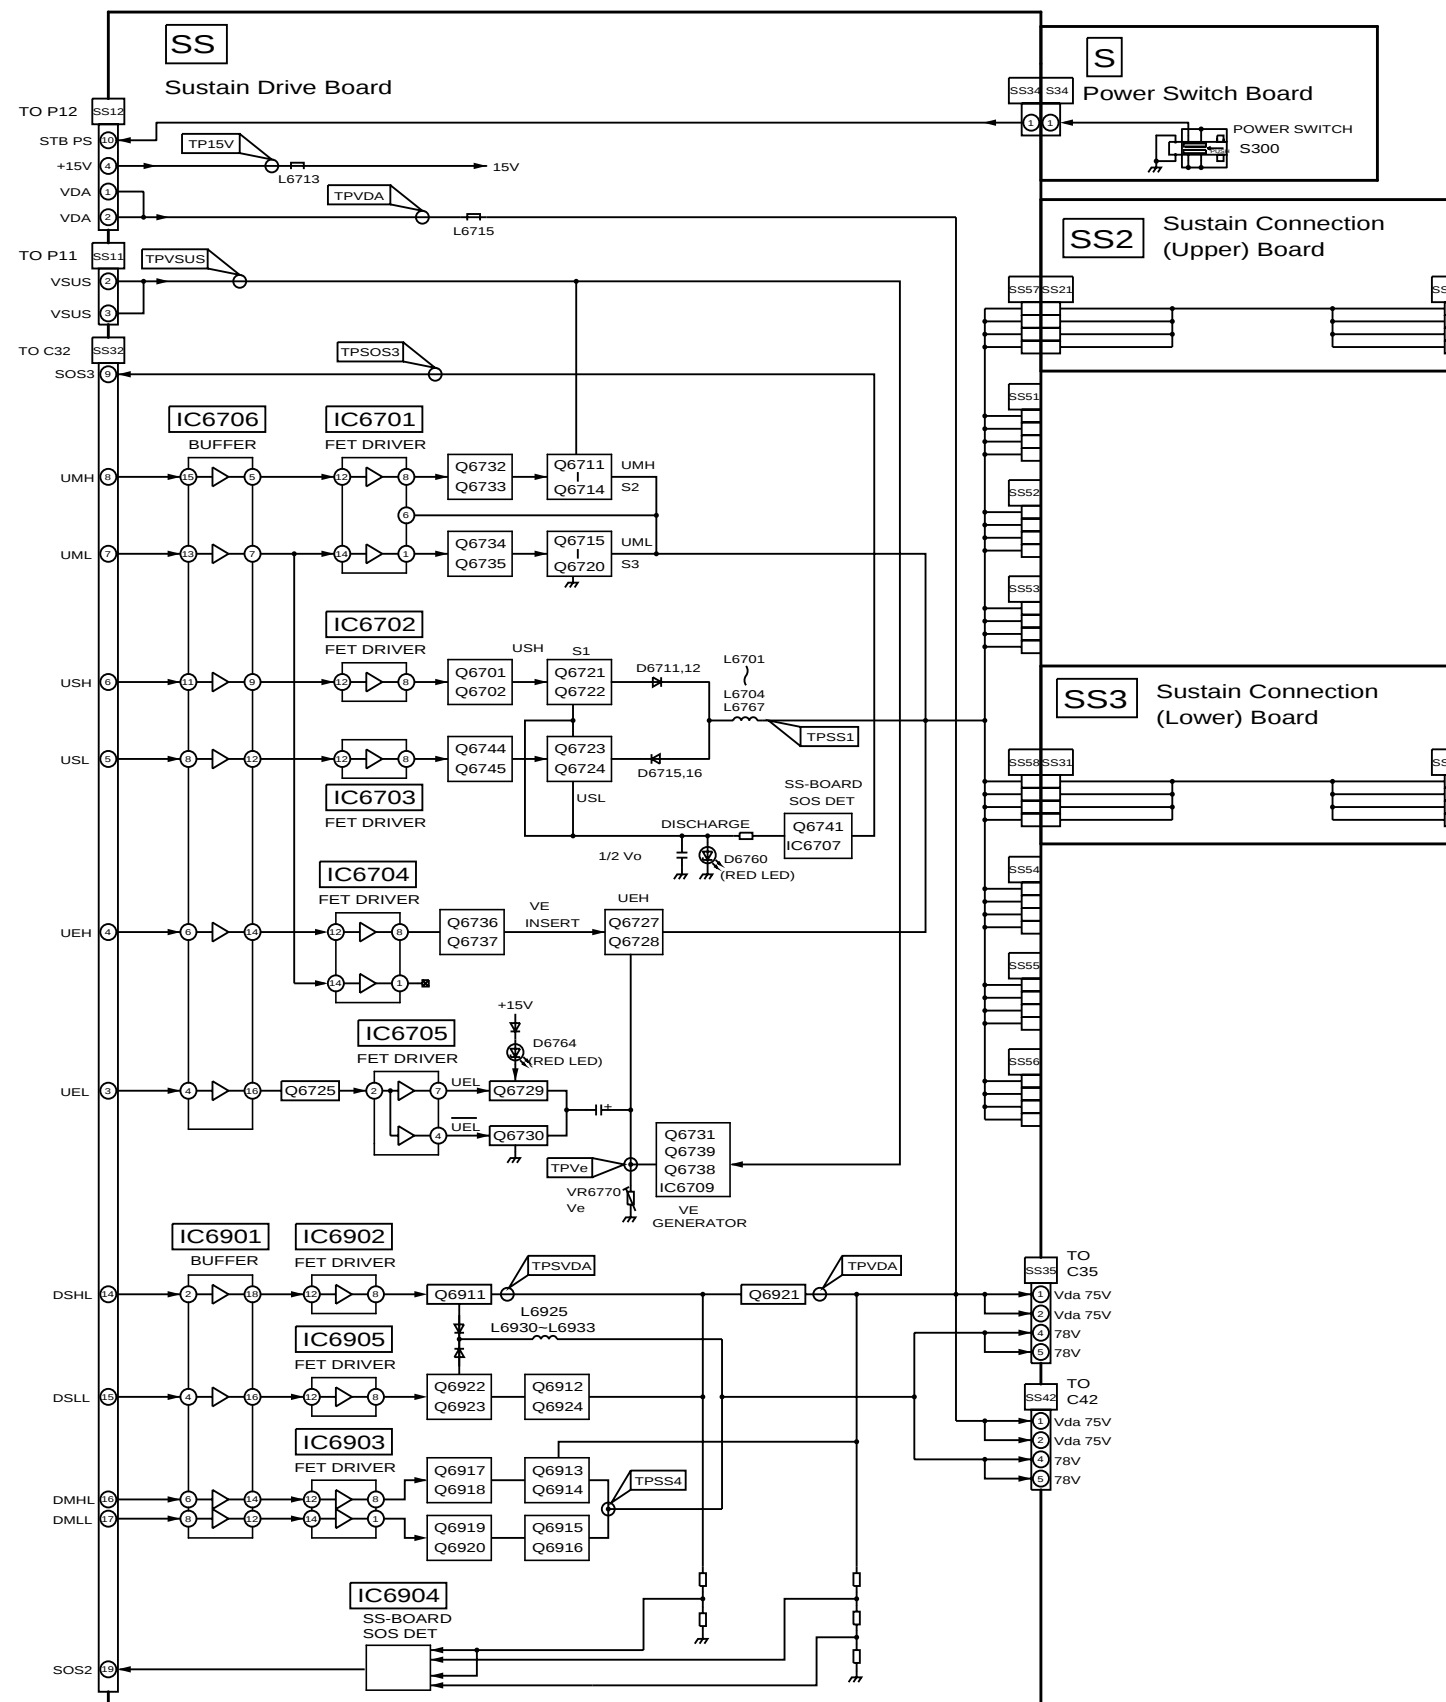


TH-50PV30A/H/M/R SS,S,SS2 and SS3-Board Block Diagram

TH-50PV30A/H/M/R SS,S,SS2 and SS3-Board Block Diagram


6.46. SS-Board (1 of 2) Schematic Diagram

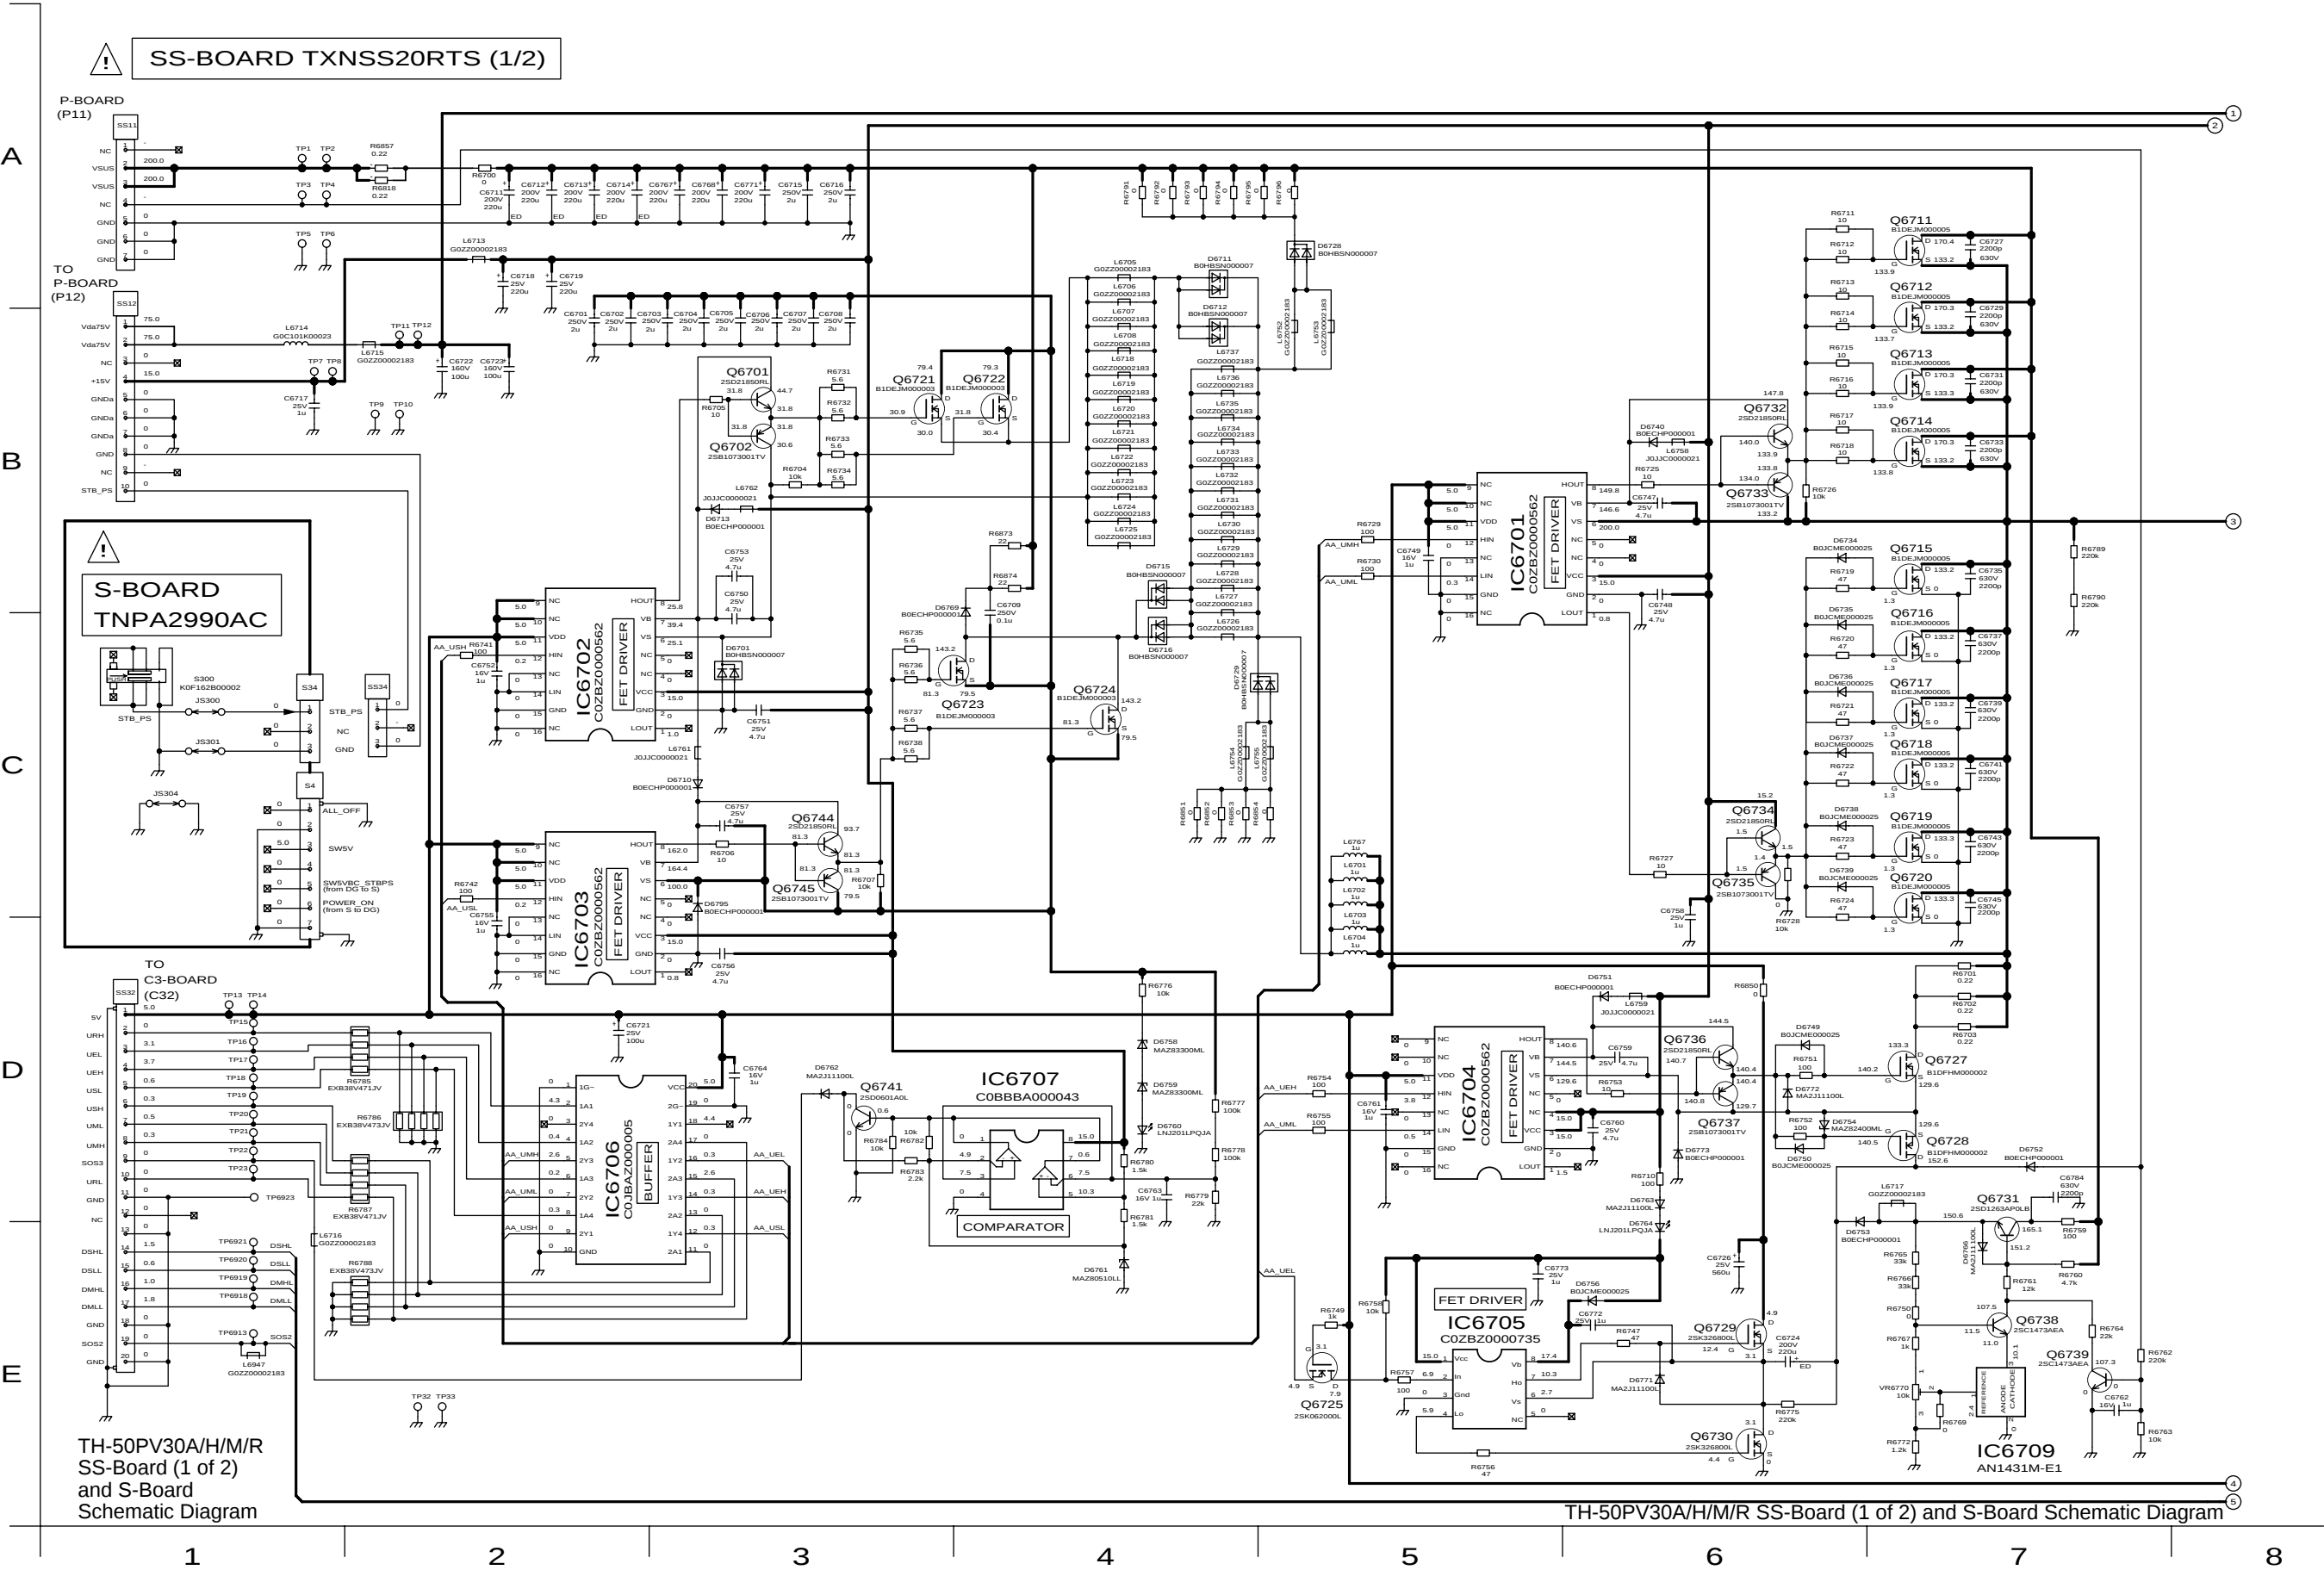


6.47. SS-Board (2 of 2), SS2-Board and SS3-Board Schematic Diagram

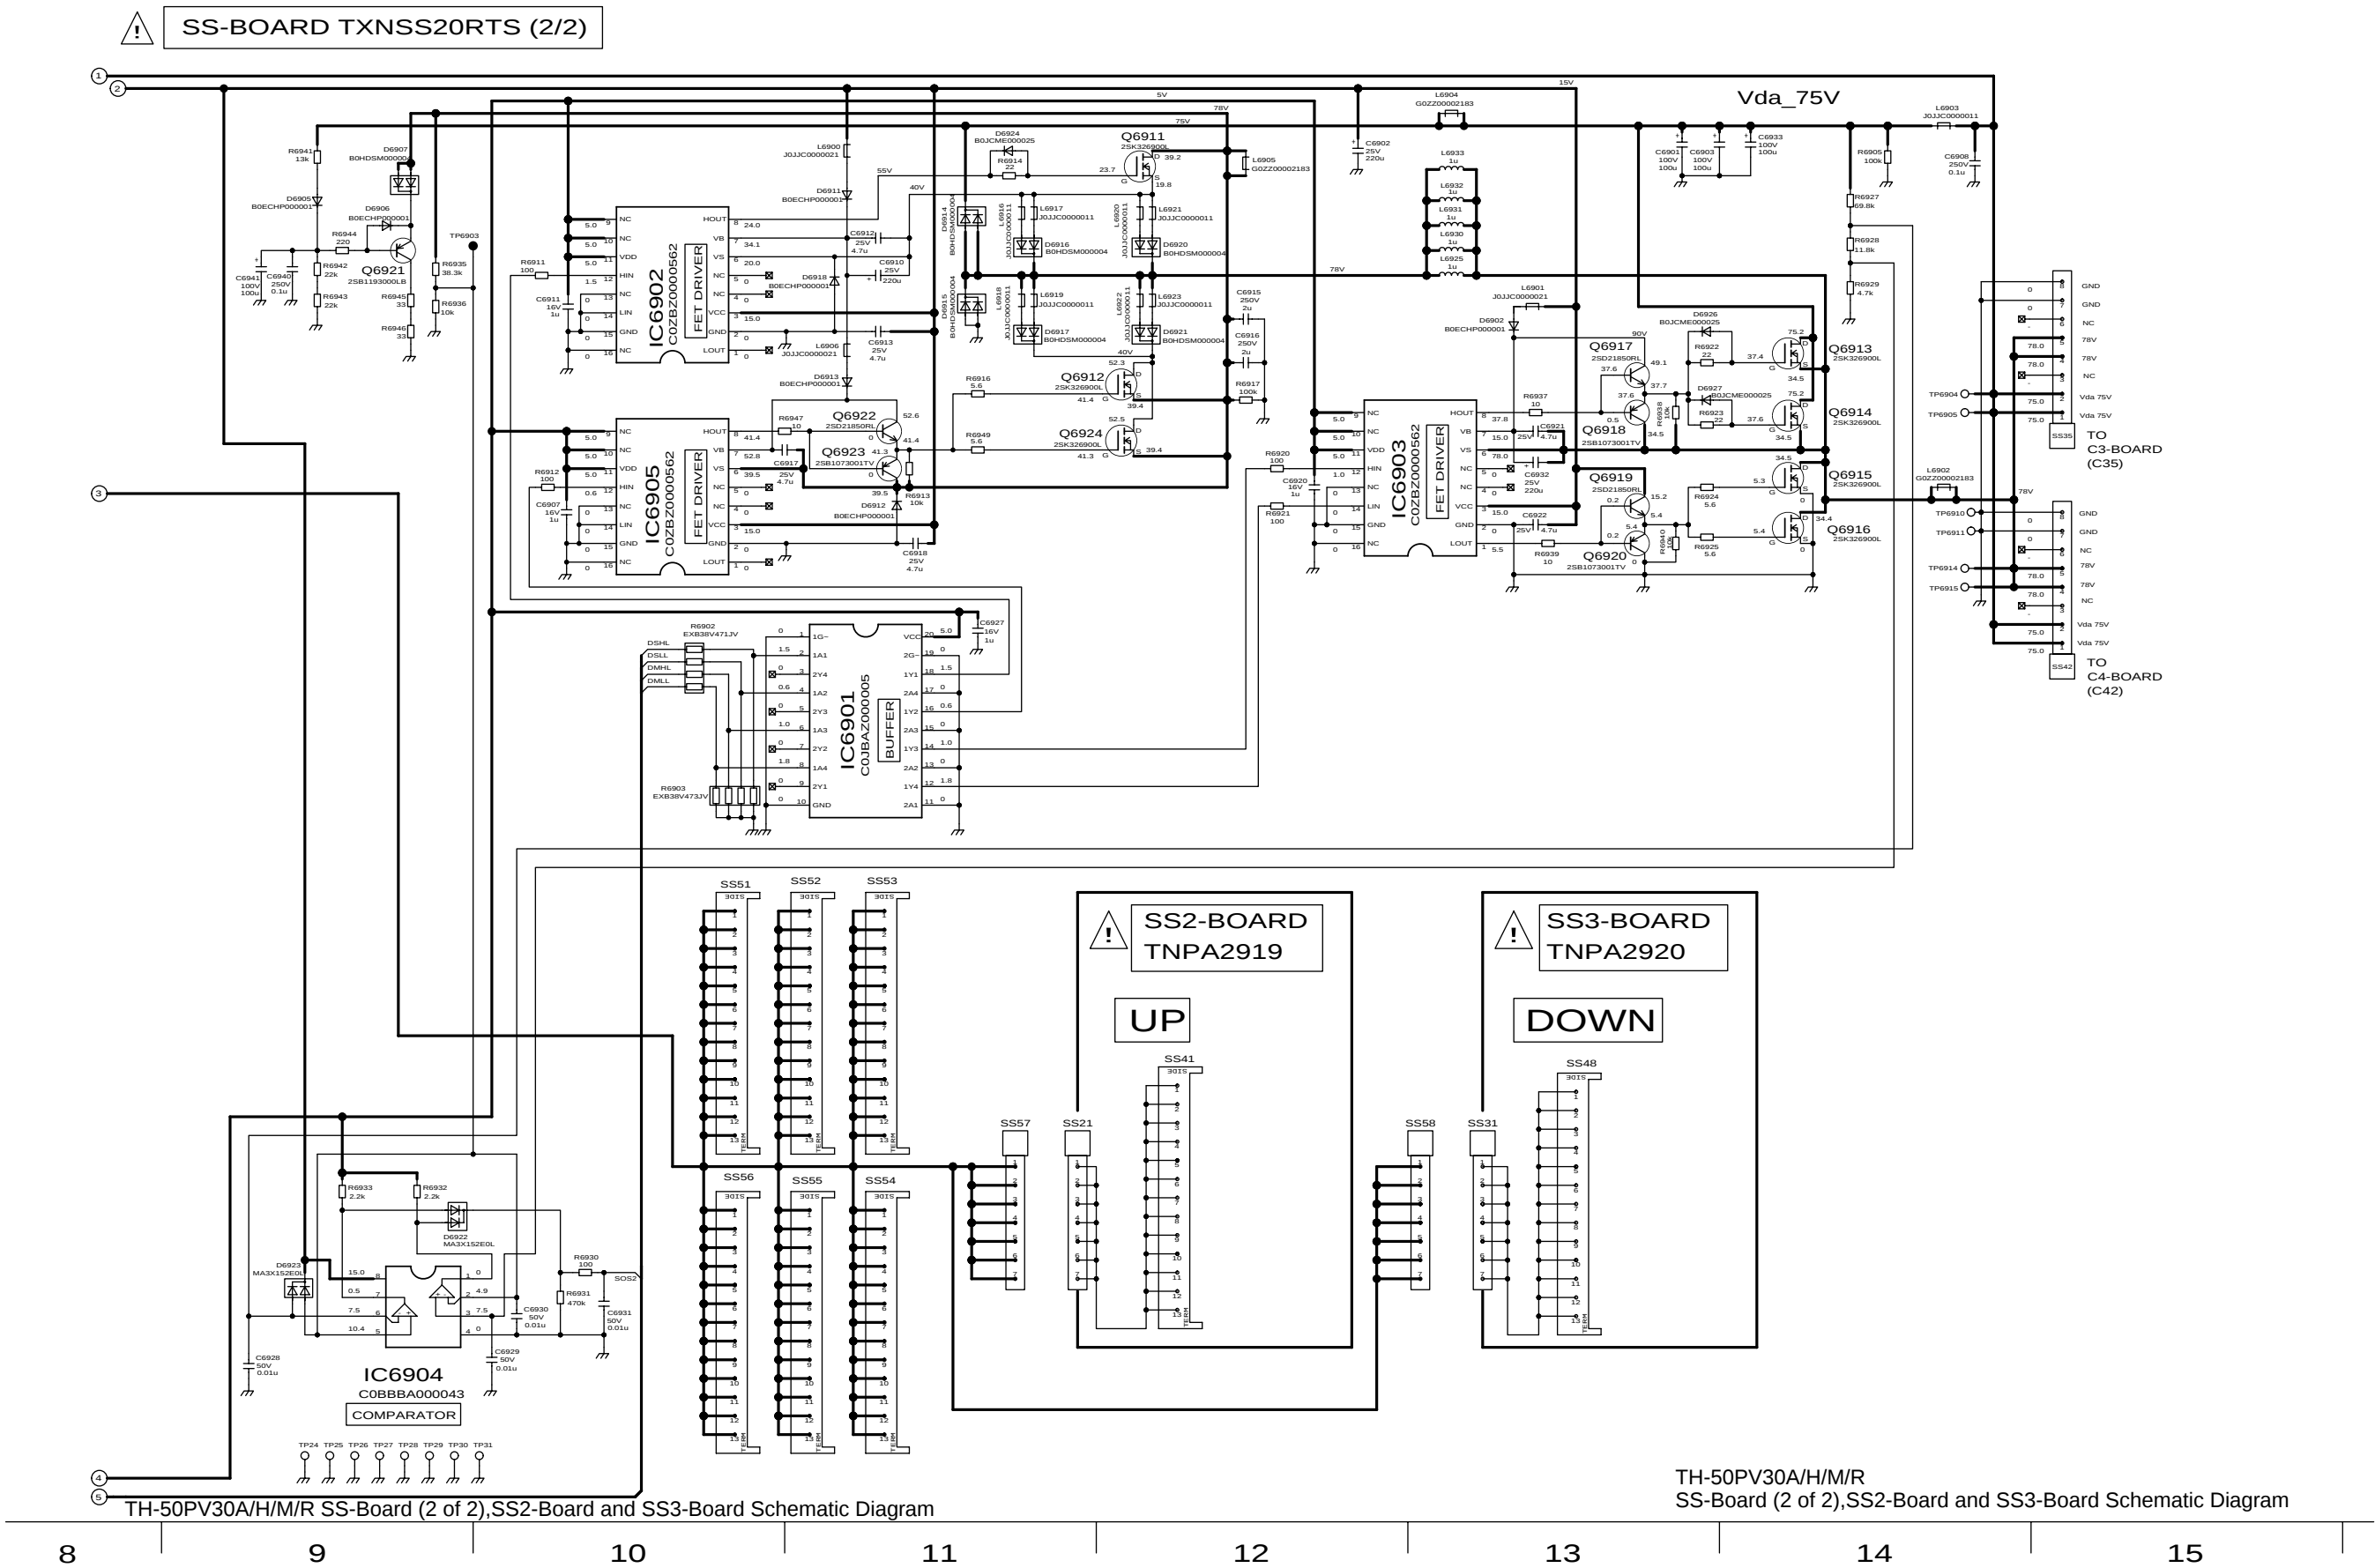


6.49. JG-Board Block Diagram

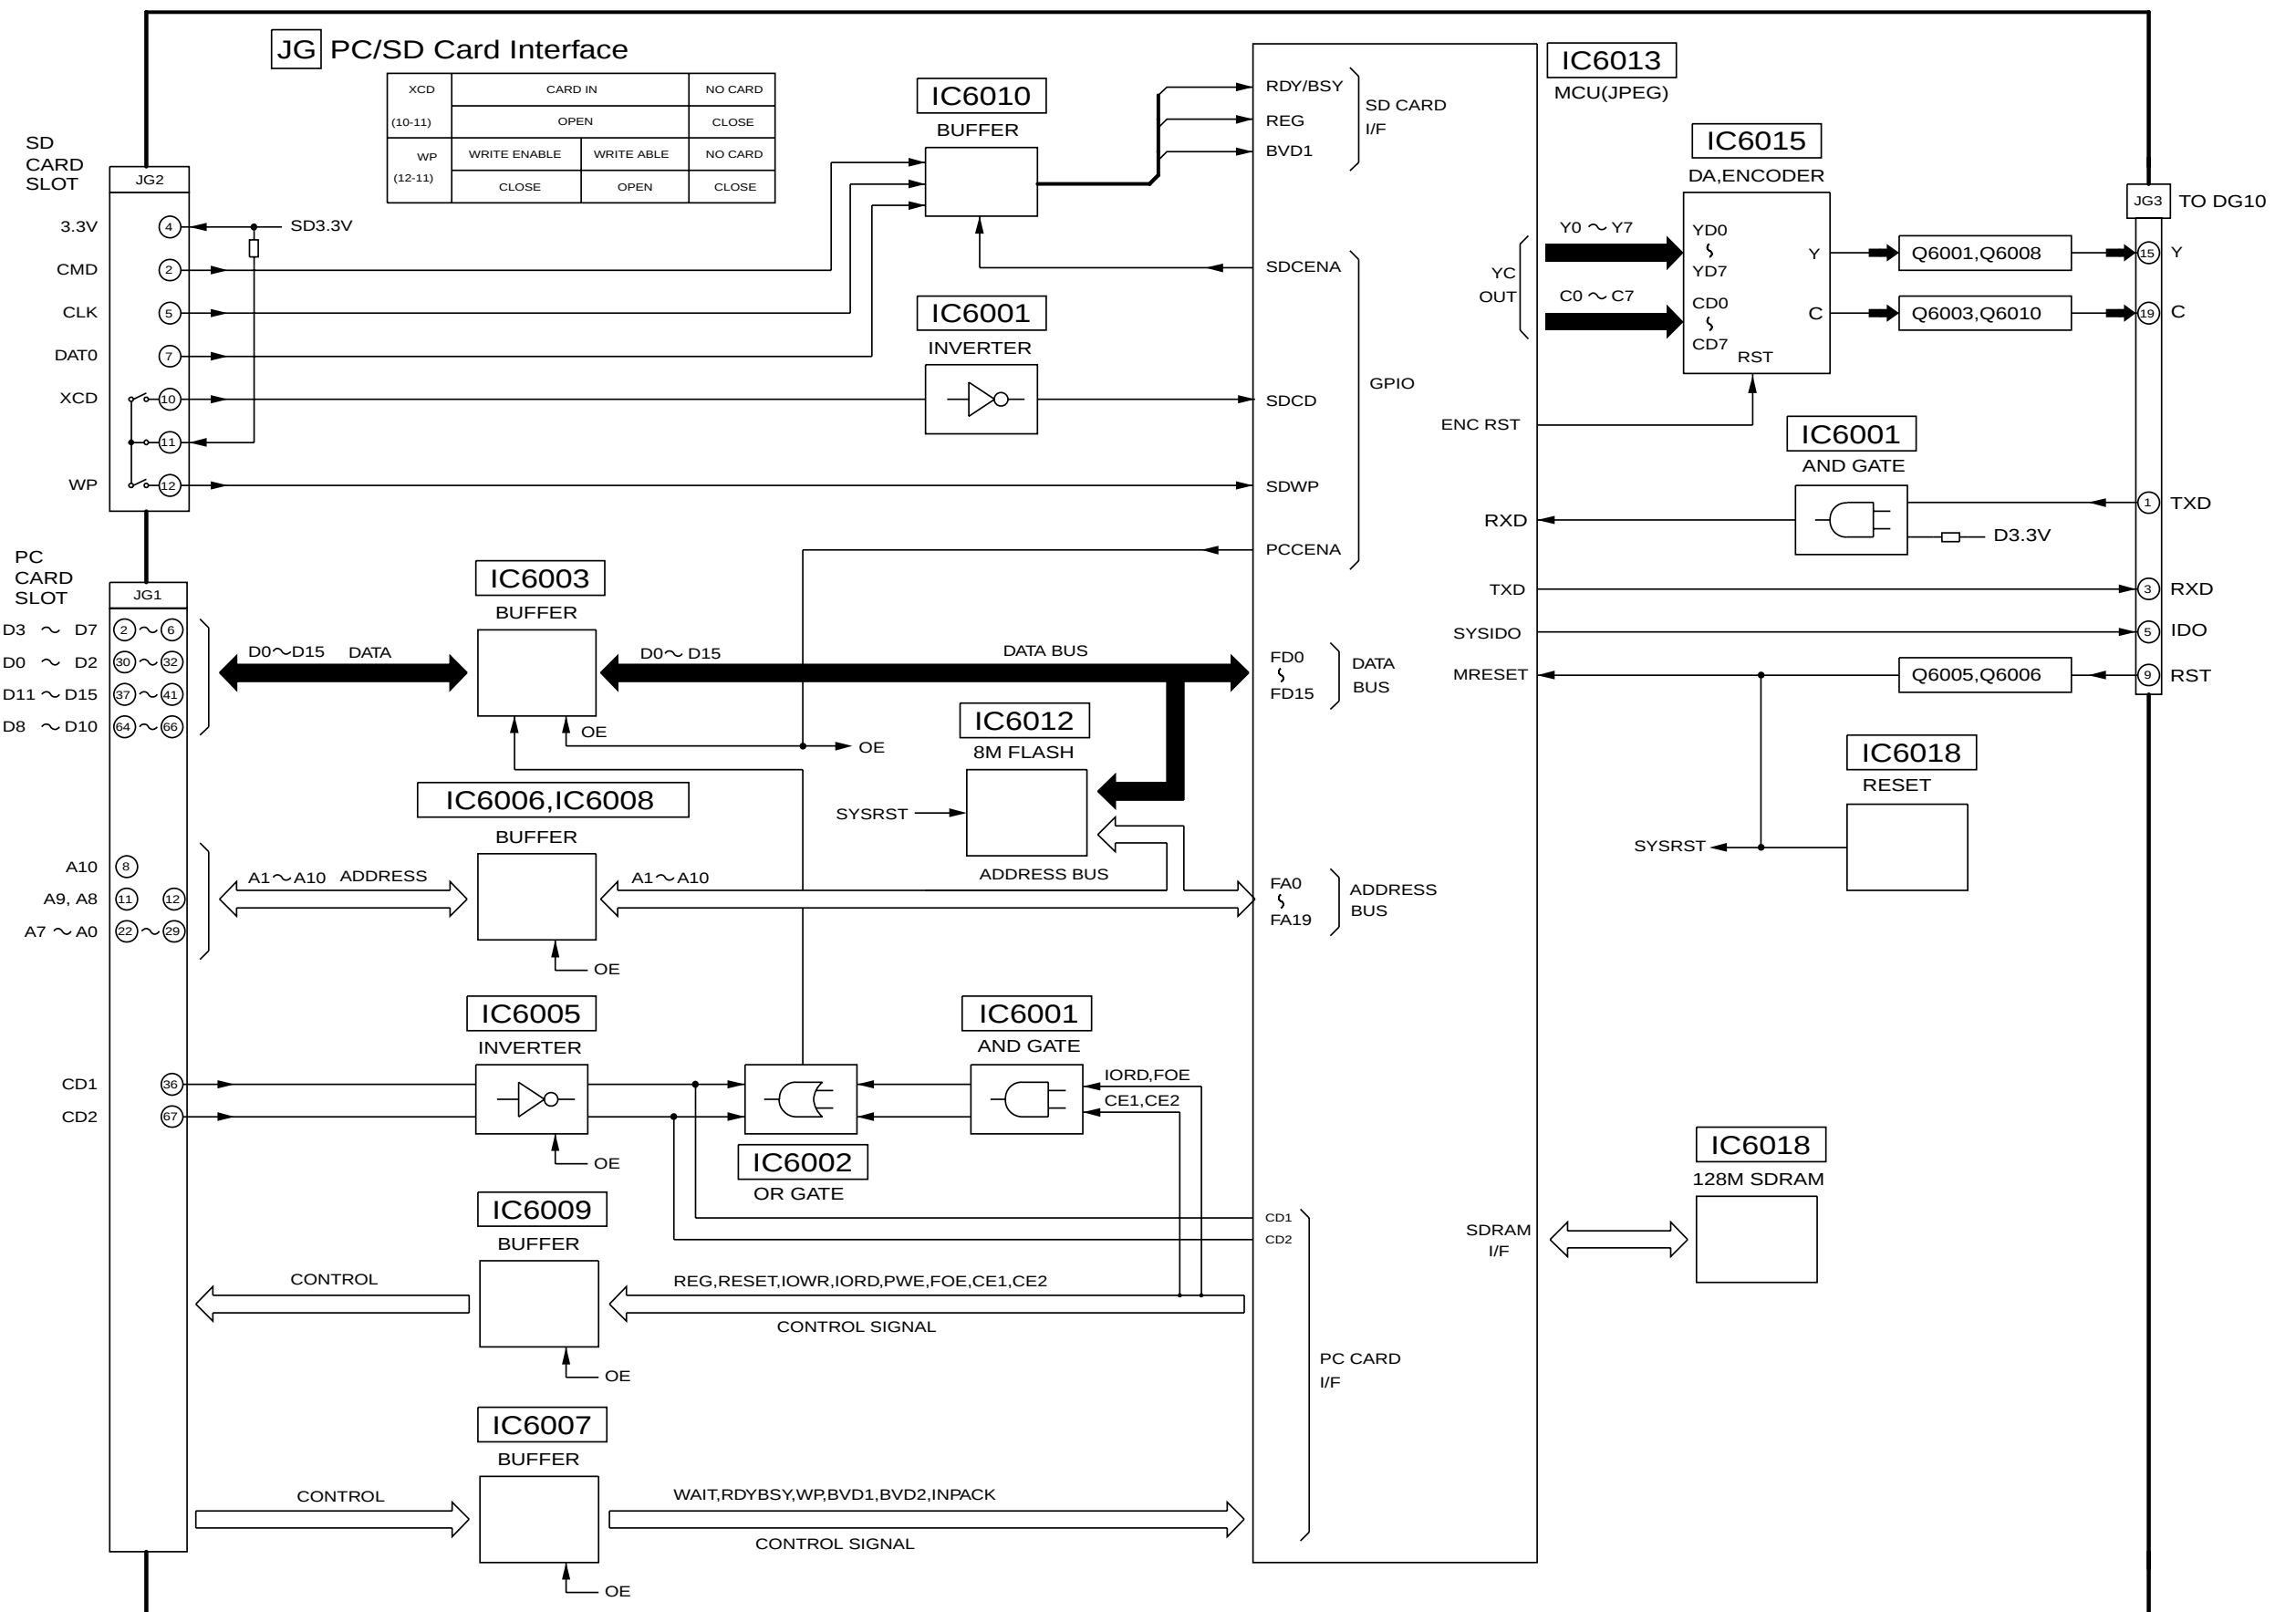

6.50. JG-Board (1 of 2) Schematic Diagram

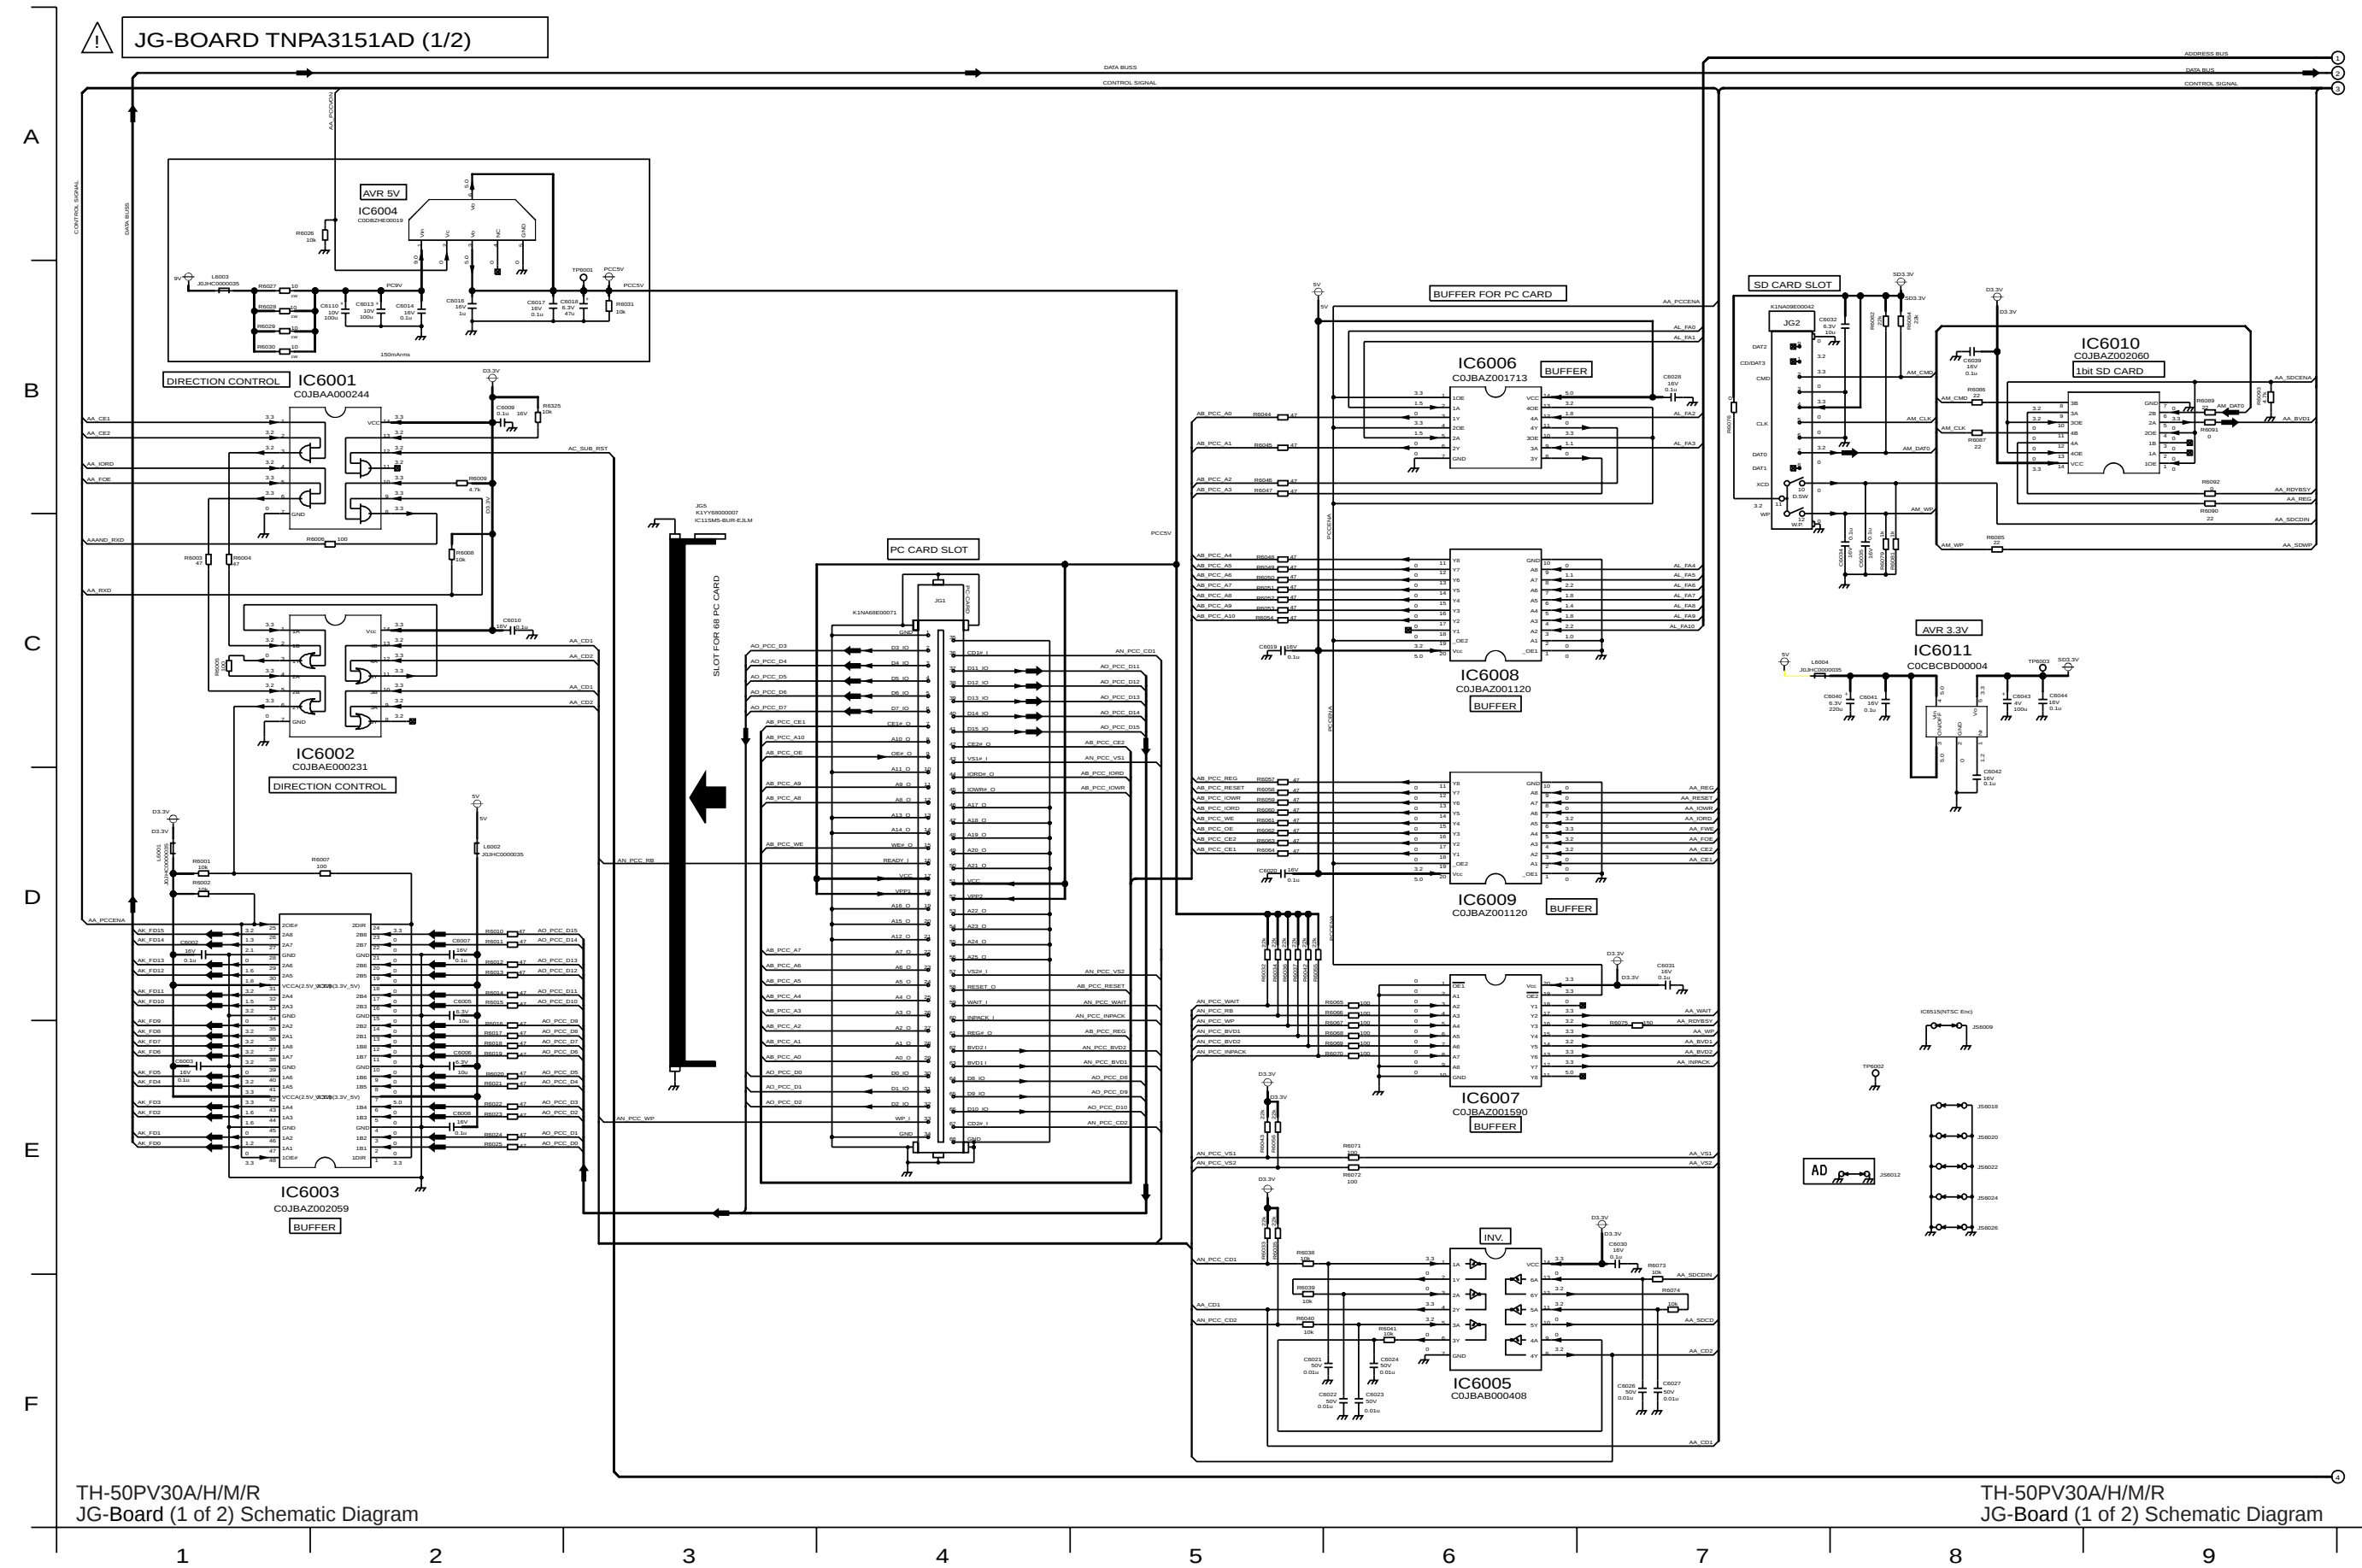


6.51. JG-Board (2 of 2) Schematic Diagram

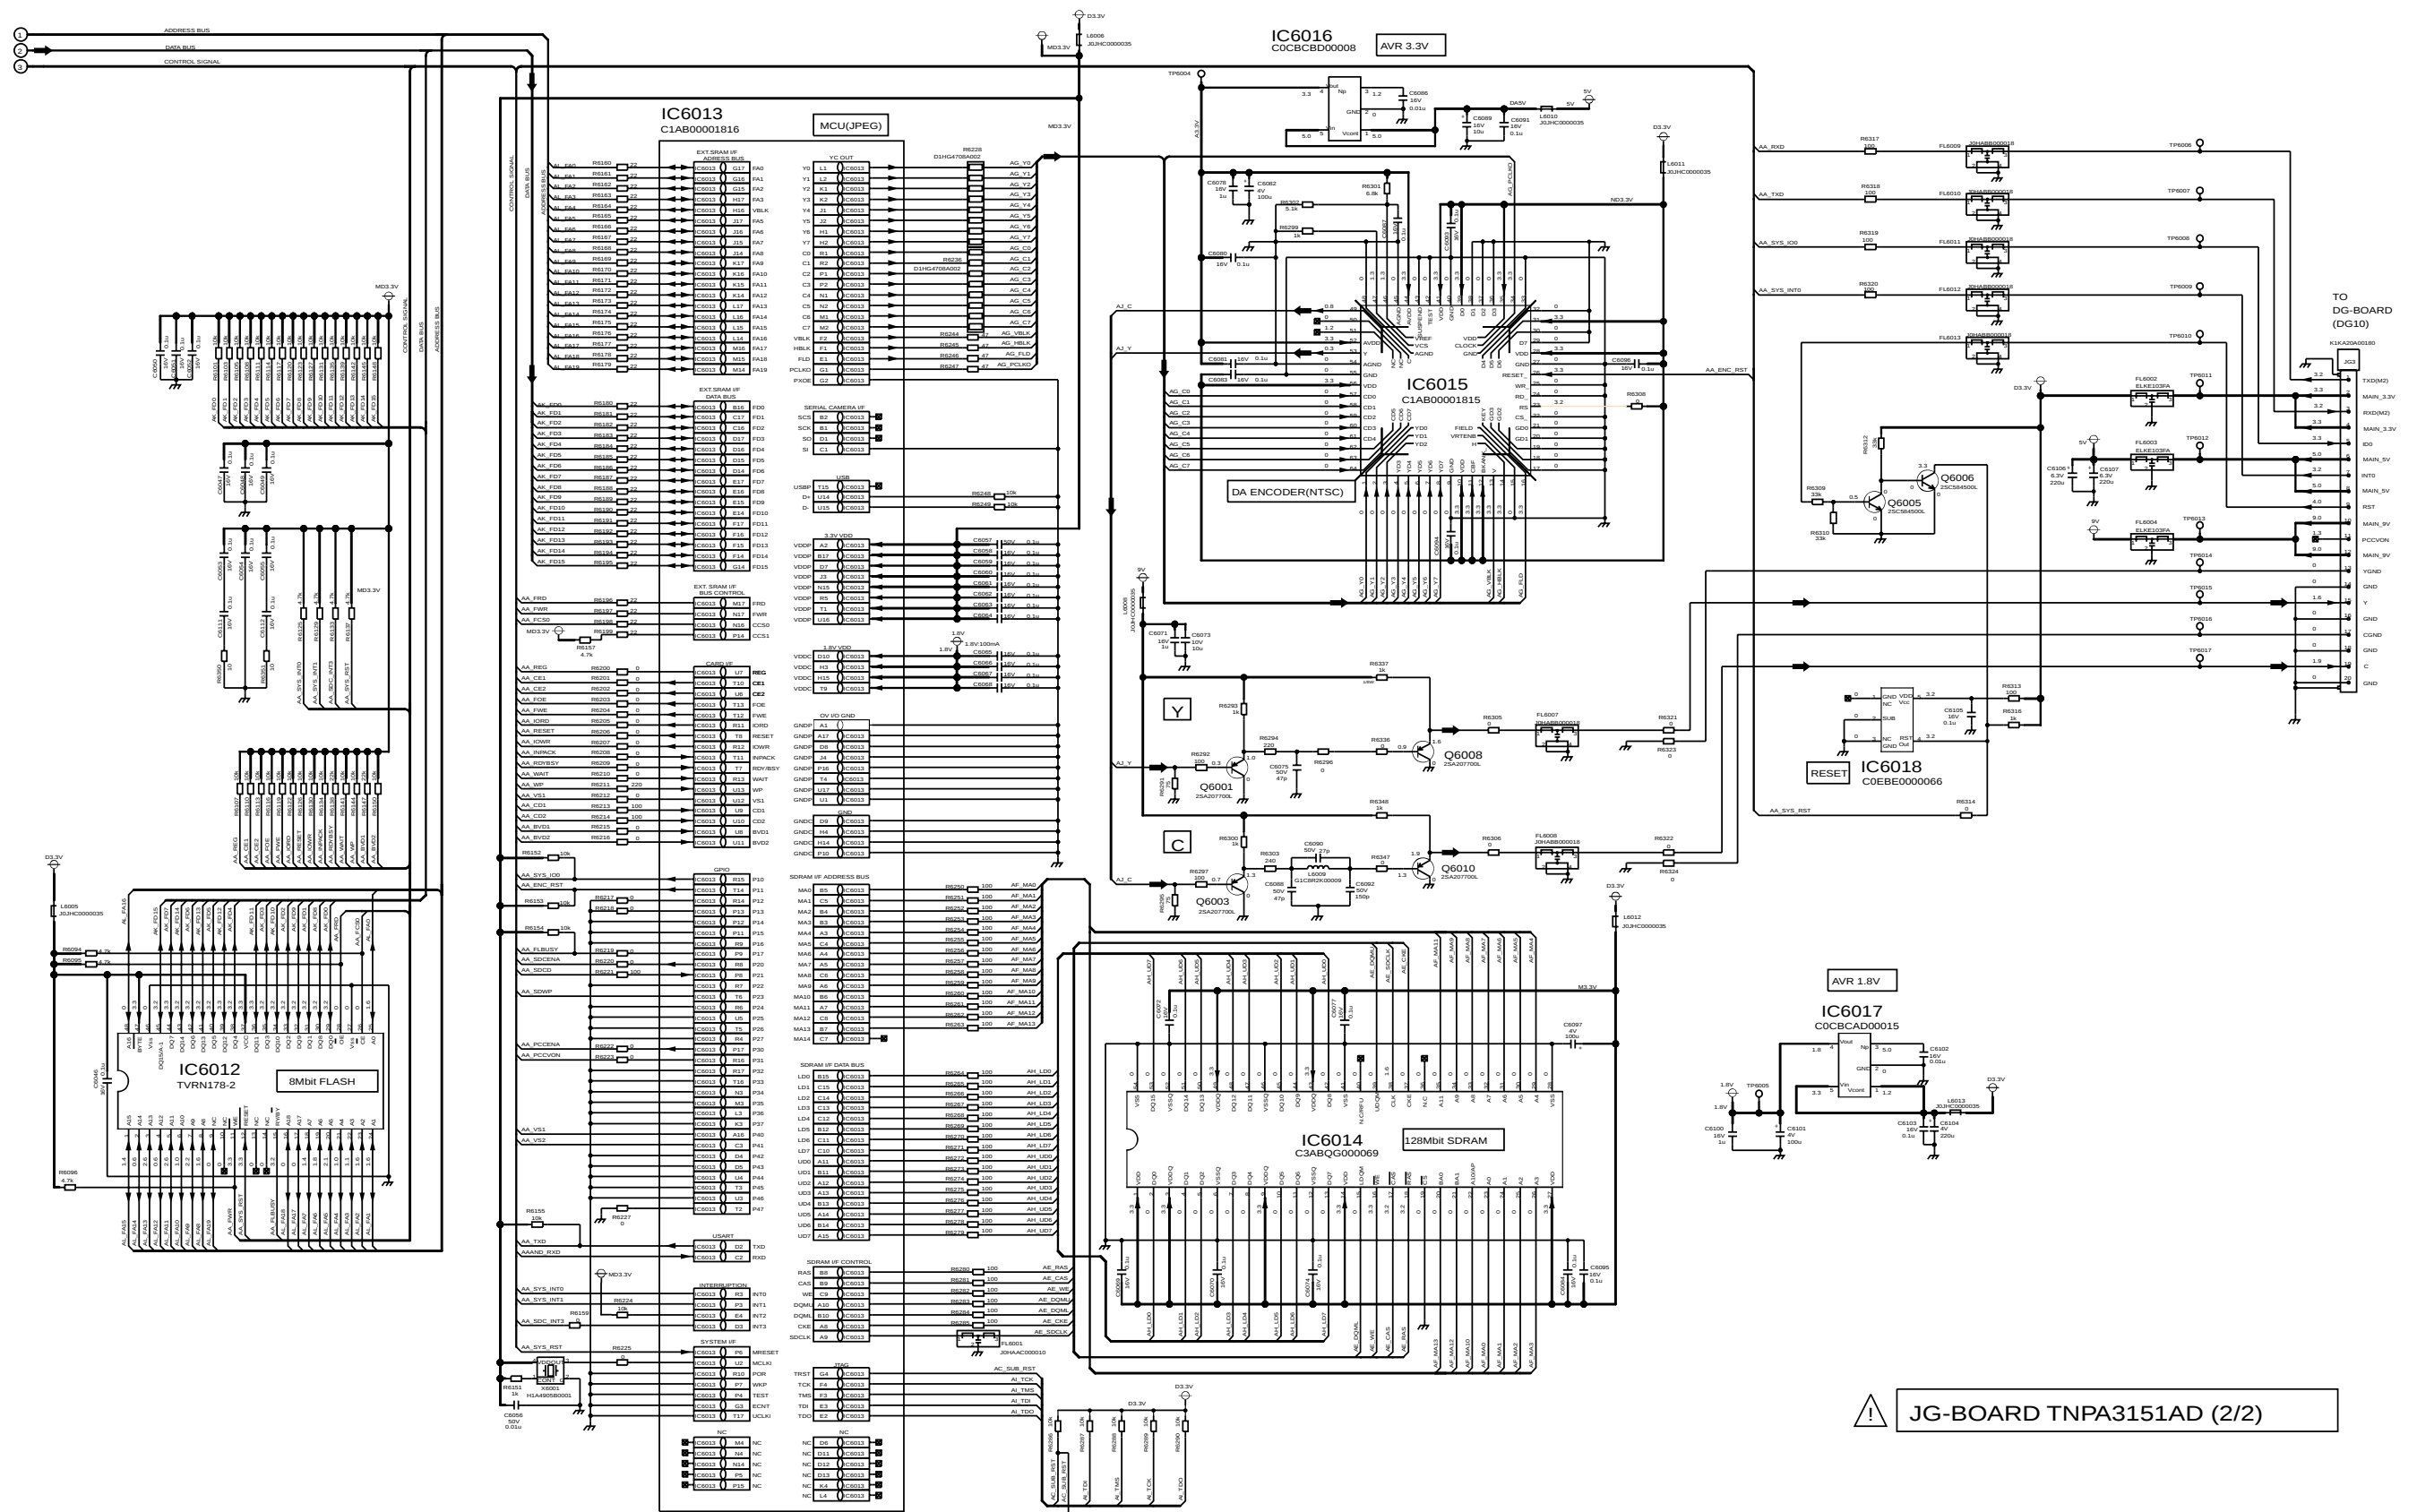
TH-50PV30A/H/M/R
JG-Board (2 of 2) Schematic DiagramTH-50PV30A/H/M/R
JG-Board (2 of 2) Schematic Diagram





7 Parts Location

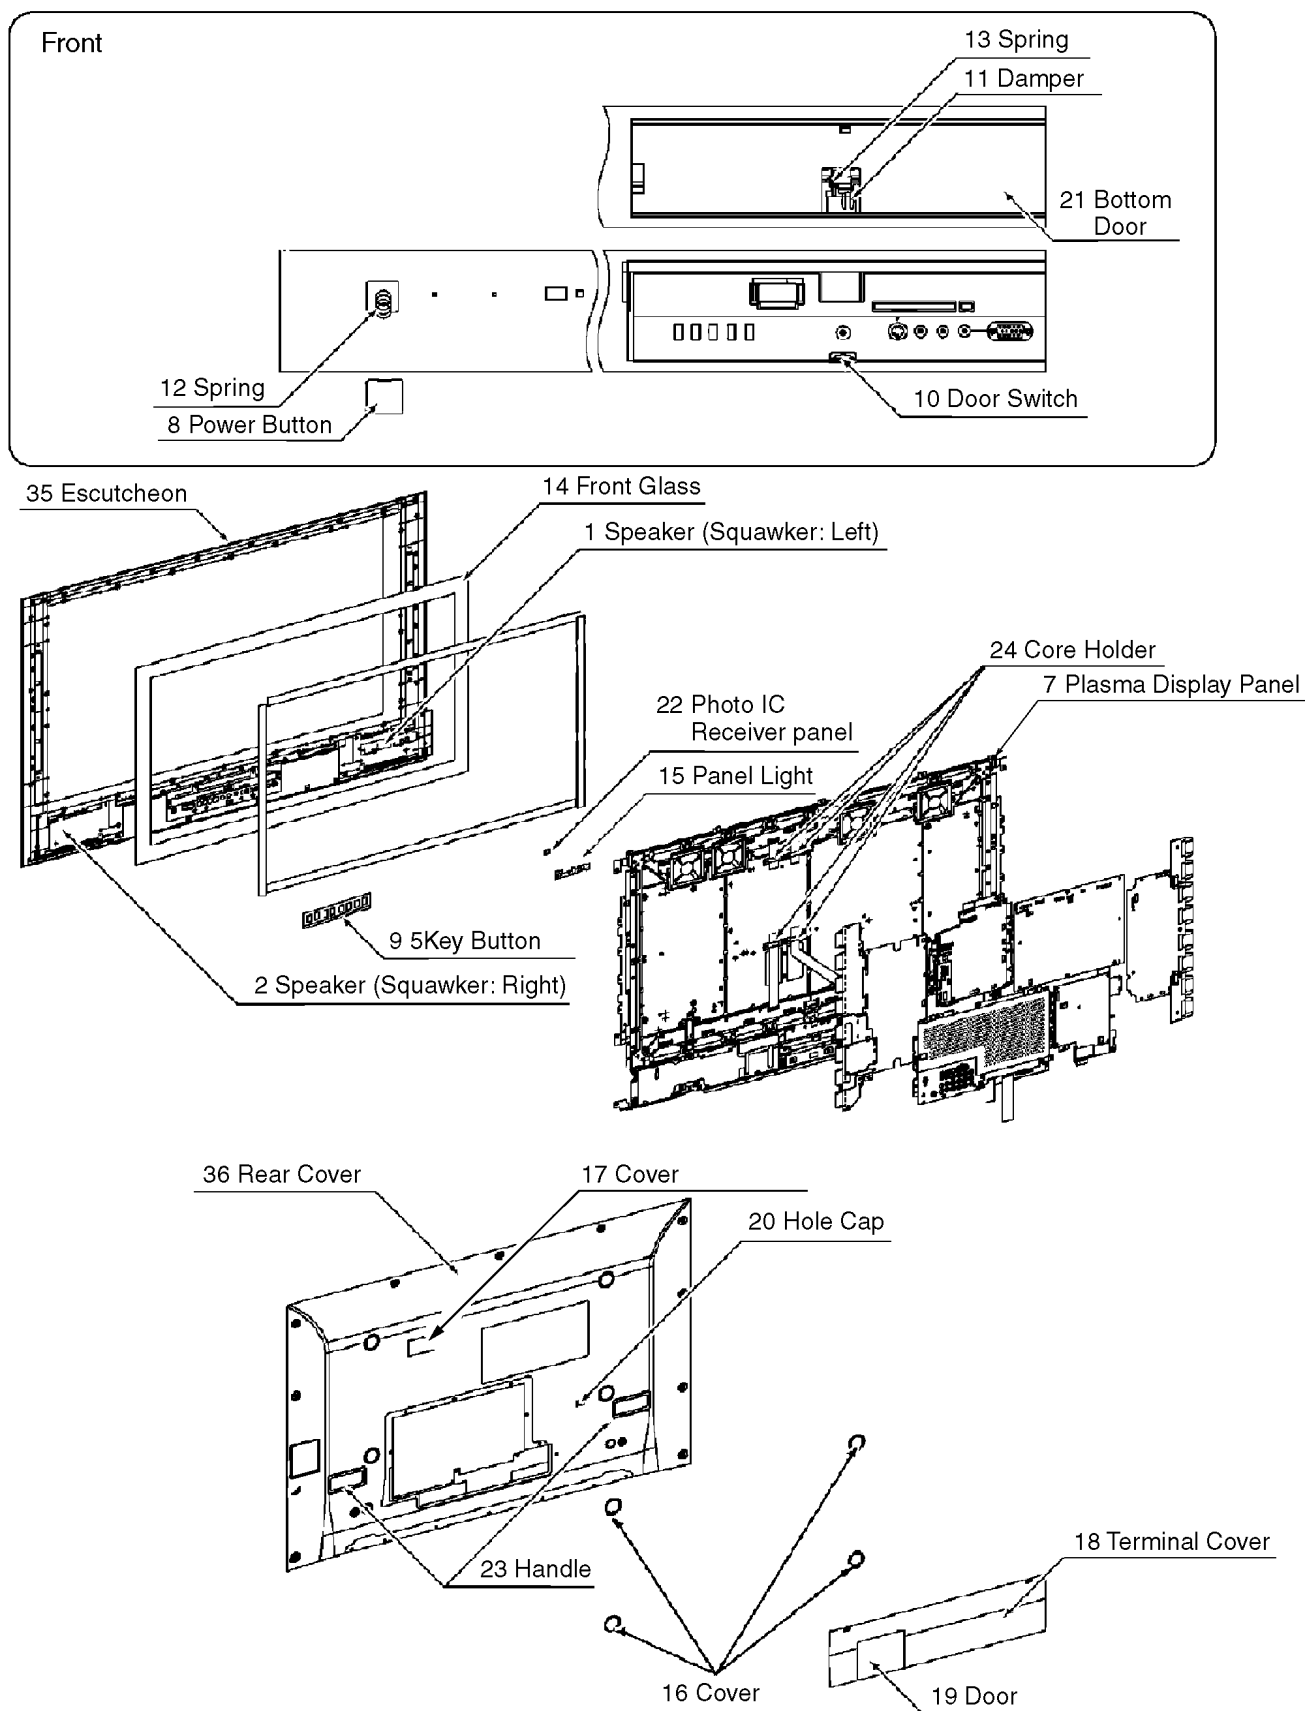

8 Packing Exploded Views

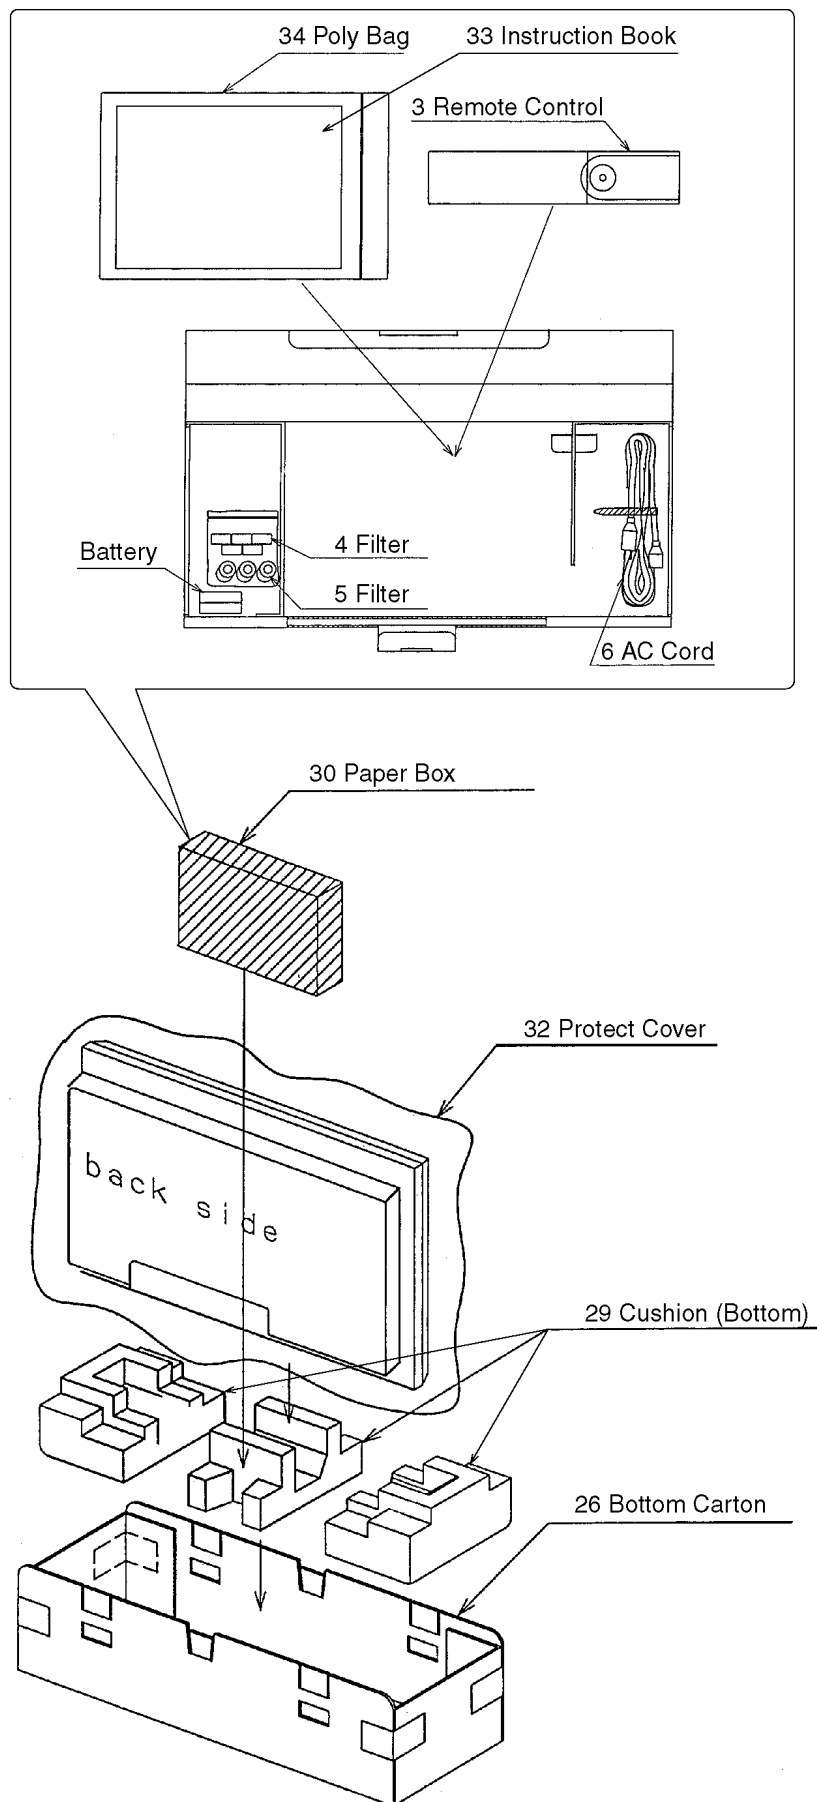

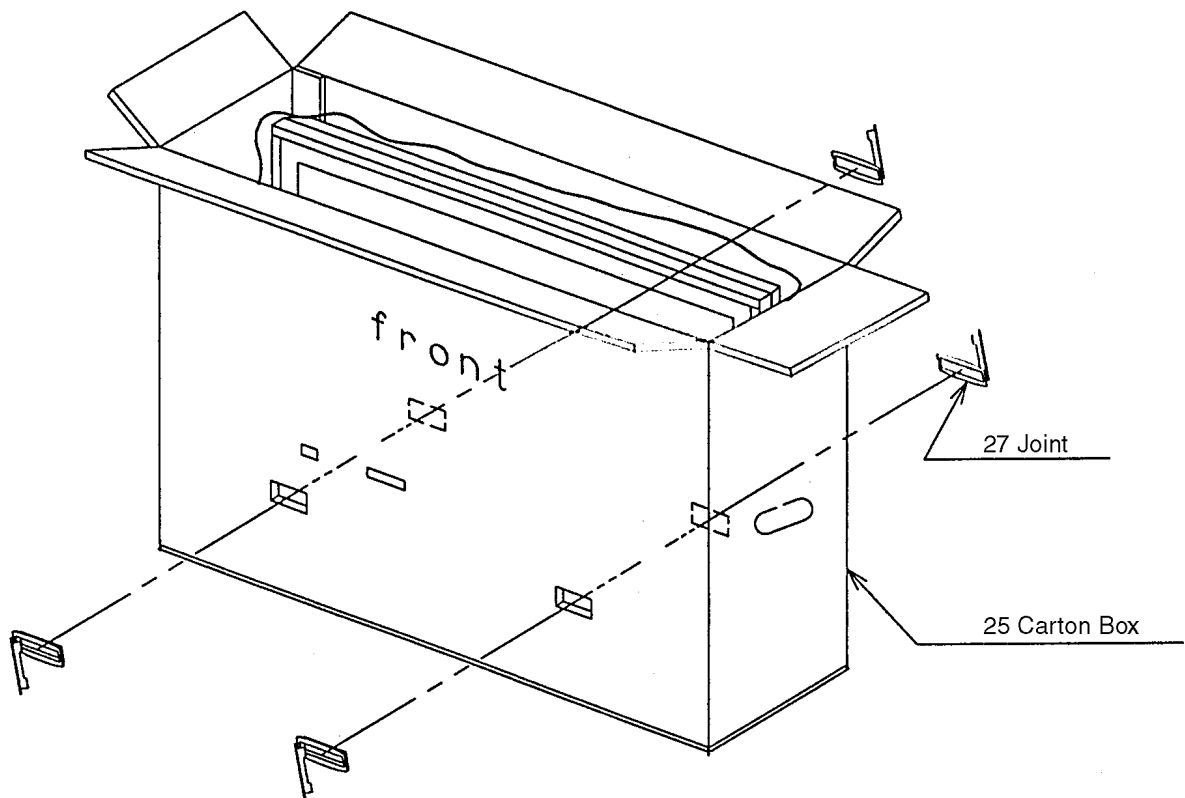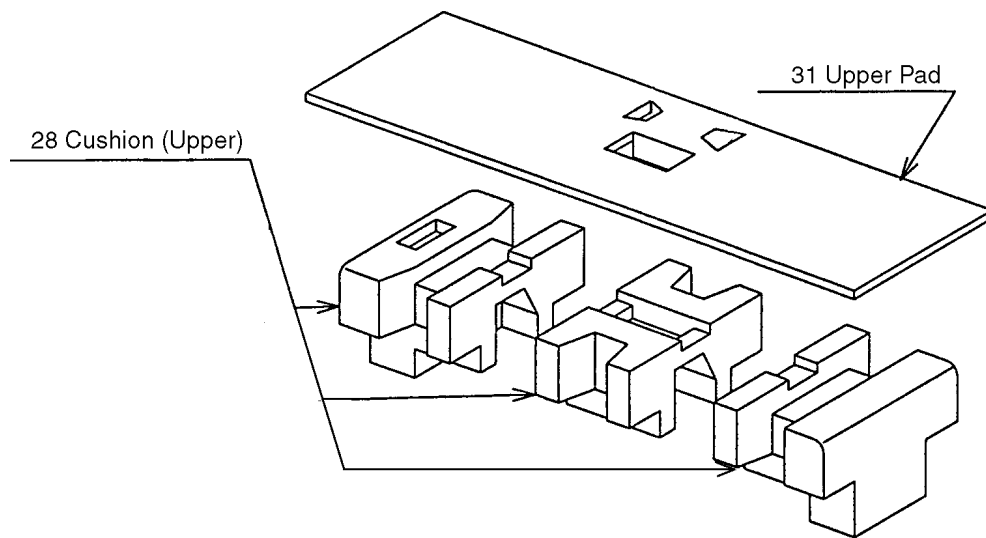

9 Mechanical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	EAB827AL2	SPEAKER(LEFT)	1	
	EAB827AR2	SPEAKER(RIGHT)	1	
1	EAK7H12BL2	SPEAKER(SCOKER:LEFT)	1	
2	EAK7H12BR2	SPEAKER(SCOKER:RIGHT)	1	
3	EUR7635040	REMOTE CONTROL	1	
	FBL08A12LS	FAN	2	
	J0KD00000041	FLAT CORE	2	
	J0KD00000071	FLAT CORE	4	
4	J0KF00000018	FILTER	5	
5	J0KG00000014	FILTER	3	
	J0KG00000042	NOISE FILTER	2	
	J0KG00000052	FILTER	1	
	K1LA06A00009	RELAY	1	
	K1SZBDBA0002	IEC JACK	1	
	K1TZA9D00093	IF CABLE	1	
	K2AH3H000028	AC INLET	1	△
6	K2CN3DH00007	AC CORD	1	TH-50PV30M/R △
6	K2CT3DH00020	AC CORD	1	TH-50PV30M/H △
6	K2CK3DH00017	AC CORD	1	TH-50PV30A △
7	MD50H06A1J	PLASMA DISPLAY PANEL	1	△
8	TBXA39901	POWER BUTTON	1	
9	TBXA40003	5KEYS BUTTON	1	
10	TEK6935	DOOR SWITCH	1	
11	TEKC011	DAMPER	1	
12	TES4G204	SPRING	1	
13	TESD060	SPRING	1	
	THEL023Z	SCREW	28	
	THEL027N	SCREW	3	
	THEL035N	SCREW	163	
	THNA004N	SCREW	1	
	THTD010N	SCREW	6	
	THTD011	SCREW	3	
	THTF003Y	SCREW	41	
	THW40973N	WASHER	1	
	THW70035Y	WASHER	1	
14	TKGA5126-1	FRONT GLASS	1	
15	TKKC5175-1	PANEL LIGHT	1	
16	TKKL5231-1	COVER	4	
17	TKKL5269-1	COVER	1	
18	TKKL5275	TERMINAL COVER	1	
19	TKKL5276	DOOR	1	
20	TKKL5277-2	HOLE CAP	2	
	TKKX5056	POWER BUTTON COVER	4	
21	TKPA80002	BOTTOM DOOR	1	
22	TKPA80701	PHOTO IC RECEIVER PANEL	1	
23	TKRA19904A	HANDLE	2	
	TMKG252	CUSHION	2	
	TMKG253	CUSHION	2	
	TMKG335	CUSHION (FAN CENTER)	2	
	TMKG358	CUSHION	2	
	TMKG359	CUSHION	2	
	TMM15414-2	CLAMPER	3	
	TMM17499	CLAMPER	2	
	TMM23416	SPACER	12	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TMM25401	CLAMPER	8	
	TMM6463-1	CLAMPER	3	
	TMM7464-2	CLAMPER	1	
	TMM7468-1	CLAMPER	2	
	TMM81488	CLAMPER	1	
	TMME047	CLAMPER	4	
	TMME061	CLAMPER	2	
	TMME061	CLAMPER	3	
	TMME075	EADG SADOLE	9	
	TMME077	CLAMPER	1	
	TMME108	CABLE STRAP	1	
	TMME152	CLAMPER	1	
	TMME190	CLAMPER	3	
	TMME199	CLAMPER	6	
	TMME206	CLAMPER	2	
	TMMJ044	RUBBER BUSH	7	
	TMMJ082	CUSHION (RUBBER)	8	
	TMMX067	CAP	4	
24	TMXX021-1	CORE HOLDER	4	
25	TPCB48905	CARTON BOX	1	TH-50PV30M △
25	TPCB48906	CARTON BOX	1	TH-50PV30A △
25	TPCB48904	CARTON BOX	1	TH-50PV30H △
25	TPCB48907	CARTON BOX	1	TH-50PV30R △
26	TPCB49001	BOTTOM CARTON	1	
27	TPD169487	JOINT	4	
28	TPDA0820	CUSHION (UPPER)	1	
29	TPDA0821	CUSHION (BOTTOM)	1	
	TPDA0862-1	CORNER PAD (RIGHT)	1	
	TPDA0863-1	CORNER PAD (LEFT)	1	
30	TPDF0737	PAPER BOX	1	
31	TPDF1120	UPPER PAD	1	
32	TPEH170	PROTECT COVER	1	
33	TQBC0867	INSTRUCTION BOOK (ENGLISH)	1	TH-50PV30A △
33	TQBC0868	INSTRUCTION BOOK (ENGLISH)	1	TH-50PV30H/M △
33	TQBC0869	INSTRUCTION BOOK (ARABIAN)	1	TH-50PV30M △
33	TQBC0957	INSTRUCTION BOOK (PERSIA)	1	TH-50PV30M △
33	TQBC0870	INSTRUCTION BOOK (RUSSIAN)	1	TH-50PV30R △
33	TQBC0871	INSTRUCTION BOOK (UKRAINE)	1	TH-50PV30R △
33	TQBC0873	INSTRUCTION BOOK (CHINA)	1	TH-50PV30H △
34	TQEF035	POLY BAG	1	
	TQZH337	INSTRUCTION SHEET	1	
	TSXL139	CABLE SUS-FPC	8	
	TSXL212	CABLE (D-C2)	2	
	TSXL222	CABLE (C1-C2/C2-C3/C4-)	4	
	TSXL223	CABLE (C1-C2/C2-C3)	4	
	TSXL287	CABLE SCN-FPC	8	
	TSXL290	CABLE (D-C5)	2	
	TSXL323	CABLE	1	
35	TTEA0213	ESCUTCHEON	1	TH-50PV30H/M/R
35	TTEA0239	ESCUTCHEON	1	TH-50PV30A
36	TTUA0999	REAR COVER	1	TH-50PV30A/H/M/R
36	TTUA1000	REAR COVER	1	TH-50PV30R
	TXFMZ010QNS	STAND POLE BRACKET (LEFT)	1	
	TXFMZ020QNS	STAND POLE BRACKET (RIGHT)	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TXJPA3UGSE	SPEAKER LEAD (LEFT/RIGHT)	1	
	TXJTNRQCSC	RF CABLE	1	
	XTB4+10A	SCREW	26	
	XTB4+12AFZ	SCREW	22	
	XTB4+12J	SCREW	29	
	XTB4+15A	SCREW	10	
	XTB4+15AFZ	SCREW	10	
	XTB4+20A	SCREW	17	
	XTV3+10JFZ	SCREW	3	
	XTW3+8T	SCREW	2	
	XTW4+Z15D	SCREW	7	
	XVG3+J10	SCREW	18	
	XVG3+J12	SCREW	1	
	XYN3+F10	SCREW	8	
	XYN3+F10FZ	SCREW	2	
	XYN3+F6	SCREW	2	
	XYN3+F8	SCREW	43	
	XYN3+J8	SCREW	9	
	XYN4+E8	SCREW	1	
	XYN5+C20	SCREW	8	
	XZBT6506	POLY BAG	1	

10 Replacement Parts List

10.1. Replacement Parts List Notes

Important Safety Notice

*Components identified by $\triangle$ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.*

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

2. Capacitor

Example:

Example:

ERD25TJ104 $\underline{C}$ 100KOHM, $\underline{J}$, 1/4W
Type Allowance

ECKF1H103ZF $\underline{C}$ 0.01UF, $\underline{Z}$, 50V
Type Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide	J : $\pm 5\%$
Metal Film	K : $\pm 10\%$
S : Solid	M : $\pm 20\%$
W : Wire Wound	

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polypropylene	G : $\pm 3\text{pF}$
T : Tantalum	J : $\pm 5\text{pF}$
	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : +100%, -0%
	Z : +80%, -20%

10.2. Electrical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F902	K5D312BL0008	FUSE	1	△
F900.901	K5D802BNA003	FUSE	2	△
C001	ECA0JM102	E 1000UF, 6.3V	1	TH-50PV30H/M/R
C002,03	ECA1HM100	E 10UF, 50V	2	TH-50PV30H/M/R
C004	ECA0JM102	E 1000UF, 6.3V	1	TH-50PV30H/M/R
C006	ECJ1XC1H220J	C 22PF, J, 50V	1	TH-50PV30H/M/R
C007	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C009	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	TH-50PV30H/M/R
C10	K1MN80B00002	CONNECTOR	1	
C11	K1MN20B00043	20P CONNECTOR	1	
C12	K1KA06A00183	6P CONNECTOR	1	
C013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C13	K1KA08A00293	8P CONNECTOR	1	
C016	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C017	ECJ3VB1C474K	C 0.47UF, K, 16V	1	TH-50PV30H/M/R
C018,19	ECJ1XC1H330J	C 33PF, J, 50V	2	TH-50PV30H/M/R
C020	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C20	K1MN80B00002	CONNECTOR	1	
C021	ECJ1XC1H101J	C 100PF, J, 50V	1	TH-50PV30H/M/R
C21	K1MN80B00002	CONNECTOR	1	
C022	ECJ3YB0J335K	C 33UF, J, 25V	1	TH-50PV30H/M/R
C22	K1MN20B00043	20P CONNECTOR	1	
C023	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	TH-50PV30H/M/R
C23	K1MN20B00043	20P CONNECTOR	1	
C024	ECJ1XC1H221J	C 220PF, J, 50V	1	
C24,25	K1MN80B00002	CONNECTOR	2	
C31	K1MN80B00002	CONNECTOR	1	
C32	K1KA20A00180	20P CONNECTOR	1	
C33	K1MN20B00043	20P CONNECTOR	1	
C35	K1KA08A00293	8P CONNECTOR	1	
C41	K1MN80B00002	CONNECTOR	1	
C42	K1KA08A00293	8P CONNECTOR	1	
C43	K1MN20B00043	20P CONNECTOR	1	
C44	K1KA08A00232	8P CONNECTOR	1	
C50	K1MN80B00002	CONNECTOR	1	
C051	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C51	K1MN80B00002	CONNECTOR	1	
C052	ECJ1XC1H330J	C 33PF, J, 50V	1	TH-50PV30H/M/R
C52	K1MN20B00043	20P CONNECTOR	1	
C053	ECJ1XC1H330J	C 33PF, J, 50V	1	TH-50PV30H/M/R
C53	K1MN20B00043	20P CONNECTOR	1	
C054	ECJ1XC1H220J	C 22PF, J, 50V	1	TH-50PV30H/M/R
C54	K1MN80B00002	CONNECTOR	1	
C055	ECA0JM102	E 1000UF, 6.3V	1	TH-50PV30H/M/R
C55	K1MN80B00002	CONNECTOR	1	
C056	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C058	ECA1HM100	E 10UF, 50V	1	TH-50PV30H/M/R
C059	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	TH-50PV30H/M/R
C60	K1MN80B00002	CONNECTOR	1	
C61	K1MN20B00043	20P CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C62	K1KA06A00183	6P CONNECTOR	1	
C063	ECA1HM100	E 10UF, 50V	1	TH-50PV30H/M/R
C064	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C067	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C068	ECJ3VB1C474K	C 0.47UF, K, 16V	1	TH-50PV30H/M/R
C069	ECA0JM102	E 1000UF, 6.3V	1	TH-50PV30H/M/R
C070	ECJ1XC1H101J	C 100PF, J, 50V	1	TH-50PV30H/M/R
C071	ECJ3YB0J335K	C 33UF, J, 25V	1	TH-50PV30H/M/R
C080,81	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	TH-50PV30A
C083	ECA1HM100	E 10UF, 50V	1	TH-50PV30A
C084	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	TH-50PV30A
C085,86	ECJ1XC1H330J	C 33PF, J, 50V	2	TH-50PV30A
C087	ECA1HM100	E 10UF, 50V	1	TH-50PV30A
C088,89	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	TH-50PV30A
C090	ECJ3VB1C474K	C 0.47UF, K, 16V	1	TH-50PV30A
C091	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30A
C092	ECA0JM102	E 1000UF, 6.3V	1	TH-50PV30A
C093	ECJ3VB1C474K	C 0.47UF, K, 16V	1	TH-50PV30A
C094	ECA0JM102	E 1000UF, 6.3V	1	TH-50PV30A
C300	EEVHB1C470P	E 47UF, 16V	1	
C301	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C309	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C901	ECQU2A105BN9	P 1UF, 250V	1	△
C902	ECQU2A224BN9	P 0.22UF, 250V	1	△
C903	ECQU2A105BN9	P 1UF, 250V	1	△
C910	ECKCNA221MBB	C 220PF, M	1	△
C911	ECKCNA221KB7	C 220PF, M	1	△
C914	ECKCNA221MBB	C 220PF, M	1	△
C915	ECQU2A224BN9	P 0.22UF, 250V	1	△
C916,17	ECKDNA471KB7	C 470PF, Z	2	△
C920	EEETHC2W151J	C 150PF, 450V	1	
C921	EEUFC1H330	E 33UF, 50V	1	
C922	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C923	ECQF4103JZ	P 0.01UF, J, 400V	1	
C924	ECKD3D471KBN	C 470PF, K, 2KV	1	
C926	ECJ2XC1H471J	C 470PF, J, 50V	1	
C927	ECJ2XC1H221J	C 220PF, J, 50V	1	
C928	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C929	ECA1HHG100	E 10UF, 50V	1	
C930	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C931	ECJ2XC1H151J	C 150PF, J, 50V	1	
C970	ECKD3A331KBP	C 330PF, K, 1KV	1	
C971	EEUFC1V122	E 1200UF, 35V	1	
C972	ECKD3A331KBP	C 330PF, K, 1KV	1	
C973	EEUFC1E102	E 1000UF, 25V	1	
C974	ECJ2XB1H332K	C 3300PF, K, 50V	1	
C990	ECA1HHG100	E 10UF, 50V	1	
C1000	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1001	EEEBB0J470R	C 47PF, J, 6.3V	1	
C1002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1003	EEEBB0G221P	C 220PF, J, 4V	1	
C1004	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1005	EEEBB1C470P	C 47PF, J, 16V	1	
C1006	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1007	EEEBB0G101R	C 100PF, J, 4V	1	
C1008	EEEBB1C470P	C 47PF, J, 16V	1	
C1009	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1014	EEEBB0J101P	C 100PF, J, 6.3V	1	
C1016,17	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C1018	EEEBB0J470R	C 47PF, J, 6.3V	1	
C1019	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1020	EEEBB1H4R7R	C 4.7PF, J, 50V	1	
C1021	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1023	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1024	EEEB0J101P	C 100PF, J, 6.3V	1	
C1025	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C1027	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1028	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1029,30	ECJ2XC1H330J	C 33PF, J, 50V	2	
C1031	ECJ2XB1H563K	C 0.056UF, K, 50V	1	
C1032	EEEB0G101R	C 100PF, J, 4V	1	
C1033	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C1034	EEEB0J101P	C 100PF, J, 6.3V	1	
C1035	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C1036	EEEB0G221P	C 220PF, J, 4V	1	
C1037	EEEB1C100R	C 10PF, J, 16V	1	
C1038-40	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C1041	EEEB1C470P	C 47PF, J, 16V	1	
C1042	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1044	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1045	ECJ1XC1H151J	C 150PF, J, 50V	1	
C1046	EEEB1C100R	C 10PF, J, 16V	1	
C1047	EEEB0G221P	C 220PF, J, 4V	1	
C1048-50	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C1051	EEEB0G101R	C 100PF, J, 4V	1	
C1052	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1053	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1054	EEEB0G221P	C 220PF, J, 4V	1	
C1055	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1057,58	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C1060	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1062	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1063	ECJ1XC1H220J	C 22PF, J, 50V	1	
C1064	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1065	ECJ1XC1H220J	C 22PF, J, 50V	1	
C1066	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1068-73	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C1075	ECJ2XC1H101J	C 100PF, J, 50V	1	
C1076	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1077	EEEB1C100R	C 10PF, J, 16V	1	
C1078	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1081	EEEB0G101R	C 100PF, J, 4V	1	
C1082	ECJ1XC1H221J	C 220PF, J, 50V	1	
C1083,84	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C1086-89	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C1090	ECJ3YB1A335K	C 0.033UF, K, 10V	1	
C1092	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1093	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1152	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1201	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C1202	ECJ1XC1H221J	C 220PF, J, 50V	1	
C1203	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1204	ECJ1XC1H221J	C 220PF, J, 50V	1	
C1205	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1206,07	ECJ1XC1H221J	C 220PF, J, 50V	2	
C1208	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1209	ECJ1XC1H221J	C 220PF, J, 50V	1	
C1210	EEEB0G221P	C 220PF, J, 4V	1	
C1211	EEEB0G101R	C 100PF, J, 4V	1	
C1231	EEEB0J101P	C 100PF, J, 6.3V	1	
C1234	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C1235,36	ECJ1XC1H271J	C 270PF, J, 50V	2	
C1238,39	ECJ1XC1H101J	C 100PF, J, 50V	2	
C1240	EEEB1C101P	C 100PF, J, 16V	1	
C1241	EEEB0J221UP	C 220PF, J, 6.3V	1	
C1242	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1254	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1270	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1271-73	ECJ2XB1H682K	C 6800PF, K, 50V	3	
C1274	EEEB1C470P	C 47PF, J, 16V	1	
C1275-81	ECJ2XB1H682K	C 6800PF, K, 50V	7	
C1301,02	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1306	EEEB1C470P	C 47PF, J, 16V	1	
C1308	EEEB1C470P	C 47PF, J, 16V	1	
C1309-12	EEEB0J470R	C 47PF, J, 6.3V	4	
C1315-17	EEEB0G101R	C 100PF, J, 4V	3	
C1318,19	EEEB1C470P	C 47PF, J, 16V	2	
C1320	EEEB0G101R	C 100PF, J, 4V	1	
C1324	EEEB1E330P	C 33PF, J, 25V	1	
C1325	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C1326,27	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C1329	EEEB1H1R0R	C 1.0PF, J, 50V	1	
C1332,33	EEEB0G101R	C 100PF, J, 4V	2	
C1334	EEEB0G221P	C 220PF, J, 4V	1	
C1338	EEEB0G101R	C 100PF, J, 4V	1	
C1339	EEEB0G221P	C 220PF, J, 4V	1	
C1340	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C1341	EEEB1C100R	C 10PF, J, 16V	1	
C1342-44	EEEB0G101R	C 100PF, J, 4V	3	
C1345	EEEB0G221P	C 220PF, J, 4V	1	
C1348	EEEB0J470R	C 47PF, J, 6.3V	1	
C1350	EEEB0G101R	C 100PF, J, 4V	1	
C1351	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1352,53	EEEB0G221P	C 220PF, J, 4V	2	
C1354	EEEB0J470R	C 47PF, J, 6.3V	1	
C1355	EEEB0G101R	C 100PF, J, 4V	1	
C1356	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1357	EEEB0G101R	C 100PF, J, 4V	1	
C1358,59	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1360	EEEB1C100R	C 10PF, J, 16V	1	
C1361	EEEB0G101R	C 100PF, J, 4V	1	
C1362	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1363	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1365	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C1366,67	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1368	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1369	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1370	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1371	ECJ1XC1H150J	C 15PF, J, 50V	1	
C1375	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1378,79	ECJ1XC1H680J	C 68PF, J, 50V	2	
C1382	EEEB0J470R	C 47PF, J, 6.3V	1	
C1383	ECJ1XC1H150J	C 15PF, J, 50V	1	
C1386	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C1387,88	ECJ1XC1H101J	C 100PF, J, 50V	2	
C1389,90	ECJ1XC1H470J	C 47PF, J, 50V	2	
C1393	ECJ1XC1H220J	C 22PF, J, 50V	1	
C1395	ECJ1XC1H220J	C 22PF, J, 50V	1	
C1398	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1402,03	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1404,05	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1408,09	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1410-13	ECJ1VB0J225K	C 2.2UF, K, 6.3V	4	
C1416	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1417	ECJ3YB0J335K	C 33UF, J, 25V	1	
C1418	ECJ1XC1H680J	C 68PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1419	ECJ1XC1H100D	C 10PF, D, 50V	1	
C1420	ECJ1XC1H050D	C 5PF, D, 50V	1	
C1421, 2	ECJ1XC1H180J	C 18PF, J, 50V	2	
C1424	ECJ1XC1H330J	C 33PF, J, 50V	1	
C1425	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1426	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1427	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1428	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1429, 3	ECJ1XC1H180J	C 18PF, J, 50V	2	
C1431, 3	ECJ1XC1H101J	C 100PF, J, 50V	2	
C1433, 3	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1437	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1438-40	ECJ1VF1A105Z	C 1UF, Z, 10V	3	
C1441	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1442	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1444-49	ECJ1VF1A105Z	C 1UF, Z, 10V	6	
C1452, 5	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1454	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1457	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C1464	EEHBC1470P	C 47PF, J, 16V	1	
C1466	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1467	ECJ1XC1H820J	C 82PF, J, 50V	1	
C1468	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1471	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1476	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1479	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1482, 8	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1489	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1496	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1501	ECJ1XC1H150J	C 15PF, J, 50V	1	
C1502	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1505	ECJ1XC1H180J	C 18PF, J, 50V	1	
C1510	ECJ1XC1H470J	C 47PF, J, 50V	1	
C1512	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1514-23	ECJ1VF1A105Z	C 1UF, Z, 10V	10	
C1525-27	ECJ1VF1A105Z	C 1UF, Z, 10V	3	
C1528, 2	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1530	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1531	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1533, 3	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1535	ECJ1XC1H470J	C 47PF, J, 50V	1	
C1536	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1537, 3	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1539, 4	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1541	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1542	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1543	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1545	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1546, 4	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1549-53	ECJ1VF1A105Z	C 1UF, Z, 10V	5	
C1554	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1555	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1557	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1559	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1561-63	ECJ1VF1A105Z	C 1UF, Z, 10V	3	
C1565-70	ECJ1VF1A105Z	C 1UF, Z, 10V	6	
C1572-74	ECJ1VF1A105Z	C 1UF, Z, 10V	3	
C1581	TCUY0J335MBM	C 3.3UF, 6.3V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1583	ECJ2YB0J106K	C 10UF, Z, 5V	1	
C1584	EEHBC06221P	C 220PF, J, 4V	1	
C1587	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1589	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1590, 9	ECJ1XC1H680J	C 68PF, J, 50V	2	
C1592	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C1593, 9	ECJ1XC1H330J	C 33PF, J, 50V	2	
C1595	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1596	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1597	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C1598-00	ECJ1VB1H103K	C 0.01UF, K, 50V	3	
C1601	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1602	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1603	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1604	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1605	EEHBC1470P	C 47PF, J, 16V	1	
C1609	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1610	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C1611	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1613	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1614	ECJ1XC1H680J	C 68PF, J, 50V	1	
C1615	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1616	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1618-23	ECJ1VF1A105Z	C 1UF, Z, 10V	6	
C1625	ECJ1XC1H330J	C 33PF, J, 50V	1	
C1626	EEHBC1H1R0R	C 1.0PF, J, 50V	1	
C1628-30	ECJ1VF1A105Z	C 1UF, Z, 10V	3	
C1631	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C1632, 3	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C1634, 3	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C1636-40	ECJ1VF1A105Z	C 1UF, Z, 10V	5	
C1641	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C1642-51	ECJ1VF1A105Z	C 1UF, Z, 10V	10	
C1652	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1653	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1654	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1655	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1656	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1657	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1658	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1659	EEHBC1H1R0R	C 1.0PF, J, 50V	1	
C1660-74	ECJ1VF1A105Z	C 1UF, Z, 10V	15	
C1675	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1677-79	ECJ1VF1A105Z	C 1UF, Z, 10V	3	
C1680	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C1681	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1682	EEHBC06101R	C 100PF, J, 4V	1	
C1683-90	ECJ1XC1H101J	C 100PF, J, 50V	8	
C1691-00	ECJ1VF1H103Z	C 0.01UF, Z, 50V	10	
C1705-11	ECJ1VF1H103Z	C 0.01UF, Z, 50V	7	
C1712	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1713	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C1717-19	ECJ1VF1H103Z	C 0.01UF, Z, 50V	3	
C1725	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1727	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1728	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1729	EEHBC1C100R	C 10PF, J, 16V	1	
C1730	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1731, 3	ECJ1XB0J105K	C 1UF, K, 16V	2	
C1733	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1734	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1735	EEEHPC100R	C 10PF, J, 16V	1	
C1736	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1737	EEEHPC100R	C 10PF, J, 16V	1	
C1738	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1739	EEEHPC100R	C 10PF, J, 16V	1	
C1741	TCUY0J685MBM	C 6.8UF, 6.3V	1	
C1742	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C1743	EEEHPC100R	C 10PF, J, 16V	1	
C1744	EEHB1C470P	C 47PF, J, 16V	1	
C1745	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1747	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1750	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1751	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1753	ECJ1XC1H220J	C 22PF, J, 50V	1	
C1755	ECJ1XC1H390J	C 39PF, J, 50V	1	
C1757	ECJ1XC1H150J	C 15PF, J, 50V	1	
C1758	ECJ1VC1H080C	C 8PF, C, 50V	1	
C1760	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1761	ECJ1XC1H470J	C 47PF, J, 50V	1	
C1762, 63	ECJ1XB0J105K	C 1UF, K, 16V	2	
C1765	ECJ1XC1H330J	C 33PF, J, 50V	1	
C1766	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1767	ECJ1XC1H330J	C 33PF, J, 50V	1	
C1771	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1772	ECJ1XC1H390J	C 39PF, J, 50V	1	
C1773	ECJ1XC1H150J	C 15PF, J, 50V	1	
C1774	TCUY0J685MBM	C 6.8UF, 6.3V	1	
C1776, 77	ECJ1XB0J105K	C 1UF, K, 16V	2	
C1780	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1781	EEHB1C470P	C 47PF, J, 16V	1	
C1783-85	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C1786	ECJ1XC1H101J	C 100PF, J, 50V	1	
C1807-14	ECJ1VF1H103Z	C 0.01UF, Z, 50V	8	
C1816	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1817-20	ECJ1VF1H103Z	C 0.01UF, Z, 50V	4	
C1827, 28	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1850	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C1854	EEHB1C470P	C 47PF, J, 16V	1	
C1855	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C1863	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1865, 66	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C1867, 68	EEHB0G101R	C 100PF, J, 4V	2	
C1869	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C1870	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C1872, 73	EEHB0G101R	C 100PF, J, 4V	2	
C1874, 75	EEFCD0G560R	56UF,	2	
C1876	ECJ1XC1H471J	C 470PF, J, 50V	1	
C1877	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1878	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C1881	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1883	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C1884	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C1885	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1886	TCUY1C225KBM	C 2.2UF, 16V	1	
C1887	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C1888	ECJ3YB1A475K	C 0.047UF, K, 10V	1	
C1889	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C1890	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C1891	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1892	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C1893, 94	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C1895-97	ECJ1VF1H104Z	C 0.1UF, Z, 50V	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1898	EEHB1C470P	C 47PF, J, 16V	1	
C1899, 00	ECJ1VF1H104Z	C 0.1UF, Z, 50V	2	
C1927	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C1928	ECJ2XC1H101J	C 100PF, J, 50V	1	
C1929	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C1930, 31	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C1932	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C1933	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1934	EEHB1C470P	C 47PF, J, 16V	1	
C1935	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C1936	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C1937-39	EEHB1A471P	C 470PF, J, 10V	3	
C1951-53	ECJ3XB0J106M	C 10UF, M, 6.3V	3	
C2001	ECJ2XB1H153K	C 0.015UF, K, 50V	1	
C2002	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2003, 04	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C2006	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2007, 08	ECEA1HN100U	E 10UF, 50V	2	
C2009	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2010	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2011	ECA1EM471	E 470UF, 25V	1	
C2012	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2013	ECJ2XF1H102Z	C 1000PF, Z, 50V	1	
C2016	ECA1HHG100	E 10UF, 50V	1	
C2017	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2018	ECA1HHG100	E 10UF, 50V	1	
C2019	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2021	ECA1HHG3R3	E 3.3UF, 50V	1	
C2022, 23	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C2024	ECA1HHG100	E 10UF, 50V	1	
C2026, 27	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C2028	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C2029, 30	ECJ2XC1H030C	C 3PF, C, 50V	2	
C2031	ECA1CHG101	E 100UF, 16V	1	
C2032	ECA1CM101	E 100UF, 16V	1	
C2033	ECJ2XC1H470J	C 47PF, J, 50V	1	
C2034	ECA1CM101	E 100UF, 16V	1	
C2035	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2036	ECJ2XC1H470J	C 47PF, J, 50V	1	
C2037	ECJ2XC1H560J	C 56PF, J, 50V	1	
C2038	ECJ2XC1H100C	C 10PF, C, 50V	1	
C2039	ECJ2XC1H220J	C 22UF, J, 50V	1	
C2043	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	TH-50PV30A
C2044	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30A
C2045	ECJ2VB1C104K	C 0.1UF, K, 16V	1	TH-50PV30A
C2050	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2052	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C2056	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30A
C2058, 59	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2060	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C2063	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C2201, 02	ECA1HM100	E 10UF, 50V	2	
C2203	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C2204	ECA1CEN100	E 10UF, 16V	1	
C2205	ECA1CM101	E 100UF, 16V	1	
C2207	ECJ2YB1E224K	C 0.22UF, K, 25V	1	
C2212, 13	TCUY1C225KBM	C 2.2UF, 16V	2	
C2214, 15	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C2222	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C2225, 26	ECJ2VF1H104Z	C 0.1UF, Z, 50V	2	
C2228	ECJ2XB1A105K	C 1UF, K, 10V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2238,39	ECJ2XB1H682K	C 6800PF, K, 50V	2	
C2262	ECJ2XB1A105K	C 1UF, K, 10V	1	
C2270	ECA1CM101	E 100UF, 16V	1	
C2271	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2272,73	ECJ2XB1A105K	C 1UF, K, 10V	2	
C2274,75	ECJ1XC1H470J	C 47PF, J, 50V	2	
C2276	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C2286	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C2287,88	ECJ1XC1H470J	C 47PF, J, 50V	2	
C2289	ECA1CM101	E 100UF, 16V	1	
C2290	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2305,06	ECA1VHG470	E 47UF, 35V	2	
C2307,08	ECA1HHG220	E 22UF, 50V	2	
C2309,10	ECA1HEN2R2	E 2.2UF, 50V	2	
C2311,12	ECJ2XB1H682K	C 6800PF, K, 50V	2	
C2313,14	ECA1HHG2R2	E 2.2UF, 50V	2	
C2317,18	ECA1VHG221	E 220UF, 35V	2	
C2321,22	ECQV1H225JM	P 2.2UF, J, 50V	2	
C2323,24	ECJ2XC1H102J	C 1000PF, J, 50V	2	
C2325,26	ECA1EHG471	E 470UF, 25V	2	
C2327-30	ECQV1H104JM	P 0.1UF, J, 50V	4	
C2331,32	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
C2333,34	ECA1EHG471	E 470UF, 25V	2	
C2339	ECA1HHG100	E 10UF, 50V	1	
C2342	ECA1HHG100	E 10UF, 50V	1	
C2345,46	ECA1VHG470	E 47UF, 35V	2	
C2347,48	ECA1HHG220	E 22UF, 50V	2	
C2349	ECA1HEN2R2	E 2.2UF, 50V	1	
C2355	ECA1HEN2R2	E 2.2UF, 50V	1	
C2381	ECA1HHG100	E 10UF, 50V	1	
C2382	ECA1CHG101	E 100UF, 16V	1	
C2383,84	ECJ2XB1H682K	C 6800PF, K, 50V	2	
C2385,86	ECA1HHG2R2	E 2.2UF, 50V	2	
C2387,88	ECA1VHG221	E 220UF, 35V	2	
C2389,90	ECA1EHG471	E 470UF, 25V	2	
C2391,92	ECQV1H225JM	P 2.2UF, J, 50V	2	
C2393,94	ECA1EHG471	E 470UF, 25V	2	
C2395,96	ECJ2XC1H102J	C 1000PF, J, 50V	2	
C2397-00	ECQV1H104JM	P 0.1UF, J, 50V	4	
C2401,02	ECJ1VB1H182K	C 1800PF, K, 50V	2	
C2403,04	ECA1HEN4R7	E 4.7UF, 50V	2	
C2407	ECJ1VB1H562K	C 5600PF, K, 50V	1	
C2408	ECA1HHG4R7	E 4.7UF, 50V	1	
C2412	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C2413	ECA1HHG470	E 47UF, 50V	1	
C2414	EEH1B1C470P	C 47PF, J, 16V	1	
C2415	ECA1HEN4R7	E 4.7UF, 50V	1	
C2416	ECJ1XC1H271J	C 270PF, J, 50V	1	
C2417	ECJ1VB1E333K	C 0.33UF, K, 25V	1	
C2418	ECJ1XC1H271J	C 270PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2419	ECJ1VB1E333K	C 0.33UF, K, 25V	1	
C2420	ECJ1XC1H271J	C 270PF, J, 50V	1	
C2421	ECJ1VB1E333K	C 0.33UF, K, 25V	1	
C2422	ECJ1XC1H271J	C 270PF, J, 50V	1	
C2423	ECJ1VB1E333K	C 0.33UF, K, 25V	1	
C2424-27	ECJ1VB1H562K	C 5600PF, K, 50V	4	
C2428	ECA1CHG101	E 100UF, 16V	1	
C2429	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C2430	ECA1CHG101	E 100UF, 16V	1	
C2431	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C2432	ECJ1VC1H271K	C 270PF, J, 50V	1	
C2436	ECJ1VC1H271K	C 270PF, J, 50V	1	
C2440	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C2441,42	ECJ1VB1H123K	C 0.12UF, K, 50V	2	
C2443	ECA1CHG101	E 100UF, 16V	1	
C2444,45	ECJ1VB1H123K	C 0.12UF, K, 50V	2	
C3108,09	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C3112	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C3113,14	ECJ2XC1H561J	C 560PF, J, 50V	2	
C3115	ECA1VM470	E 47UF, 35V	1	
C3116	ECA1HM100	E 10UF, 50V	1	
C3117-20	ECJ2XC1H561J	C 560PF, J, 50V	4	
C3121	ECA1EM471	E 470UF, 25V	1	
C3122,23	ECJ2XC1H561J	C 560PF, J, 50V	2	
C3126	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3132	ECA1HM100	E 10UF, 50V	1	
C3139	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3140	ECA1EM471	E 470UF, 25V	1	
C3170	ECA1VM470	E 47UF, 35V	1	
C3171,72	ECA1HM100	E 10UF, 50V	2	
C3174-76	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3177	ECA1HM100	E 10UF, 50V	1	
C3181,82	ECJ1XC1H470J	C 47PF, J, 50V	2	
C3194	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3195	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C3196	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3197	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C3198,99	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C3200	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C3201,02	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C3205	TCUY0J335MBM	C 3.3UF, 6.3V	1	TH-50PV30H/M/R
C3206	TCUY0J335MBM	C 3.3UF, 6.3V	1	
C3207	ECA1CM101	E 100UF, 16V	1	
C3209	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C3214	TCUY0J335MBM	C 3.3UF, 6.3V	1	
C3215	ECJ2XB1A105K	C 1UF, K, 10V	1	
C3216	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3217	TCUY0J335MBM	C 3.3UF, 6.3V	1	
C3218	ECA1CM101	E 100UF, 16V	1	
C3219,20	ECJ2XB1A105K	C 1UF, K, 10V	2	
C3221	TCUY0J335MBM	C 3.3UF, 6.3V	1	
C3222	ECJ2XB1A105K	C 1UF, K, 10V	1	
C3223	TCUY0J335MBM	C 3.3UF, 6.3V	1	
C3224,25	ECJ2XB1A105K	C 1UF, K, 10V	2	
C3226	TCUY0J335MBM	C 3.3UF, 6.3V	1	
C3227	ECJ2XB1A105K	C 1UF, K, 10V	1	
C3228,29	TCUY0J335MBM	C 3.3UF, 6.3V	2	
C3230,31	ECJ2XB1H682K	C 6800PF, K, 50V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3232,33	ECJ2XB1A105K	C 1UF, K, 10V	2	
C3234	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C3235	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C3237-40	TCUY0J335MBM	C 3.3UF, 6.3V	4	
C3241	ECJ2XB1A105K	C 1UF, K, 10V	1	
C3279,80	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C3282	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C3285	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30H/M/R
C3287	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	TH-50PV30H/M/R
C3290	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3291	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-50PV30A
C3713,14	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C3718,19	ECJ2XC1H561J	C 560PF, J, 50V	2	
C6002,03	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6005,06	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C6007-10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C6013	EEEB1A101P	C 100PF, J, 10V	1	
C6014	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6016	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C6017	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6018	EEFCD0J470R	47UF	1	
C6019,20	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6021-24	ECJ1VF1H103Z	C 0.01UF, Z, 50V	4	
C6026,27	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C6028	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6030,31	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6032	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C6034,35	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6039	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6040	EEEB0J221UP	C 220PF, J, 6.3V	1	
C6041,42	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C6043	EEEB0G101R	C 100PF, J, 4V	1	
C6044	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C6046-55	ECJ1XF1C104Z	C 0.1UF, Z, 16V	10	
C6056	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C6057	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C6058-70	ECJ1XF1C104Z	C 0.1UF, Z, 16V	13	
C6071	ECJ1VF1C105Z	C 1UF, Z, 16V	1	
C6072	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6073	ECJ3YB1A106M	C 10UF, M, 6.3V	1	
C6074	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6075	ECJ1XC1H470J	C 47PF, J, 50V	1	
C6077	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6078	ECJ1VF1C105Z	C 1UF, Z, 16V	1	
C6080,81	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6082	EEEB0G101R	C 100PF, J, 4V	1	
C6083,84	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6086	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C6087	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6088	ECJ1XC1H470J	C 47PF, J, 50V	1	
C6089	EEEB1C100R	C 10PF, J, 16V	1	
C6090	ECJ1VC1H270J	C 27PF, J, 50V	1	
C6091	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6092	ECJ1XC1H151J	C 150PF, J, 50V	1	
C6093-96	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C6097	EEEB0G101R	C 100PF, J, 4V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6100	ECJ1VF1C105Z	C 1UF, Z, 16V	1	
C6101	EEEB0G101R	C 100PF, J, 4V	1	
C6102	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C6103	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6104	EEEB0G221P	C 220PF, J, 4V	1	
C6105	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6106,07	EEEB0J221UP	C 220PF, J, 6.3V	2	
C6110	EEEB1A101P	C 100PF, J, 10V	1	
C6111,12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6400	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6401-06	TCUY1C105ZFN	C 1UF, 16V	6	
C6408	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6409,10	F1L2E1040002	E 1000UF, 25V	2	
C6417,18	F1L2E1040002	E 1000UF, 25V	2	
C6420	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6421-26	TCUY1C105ZFN	C 1UF, 16V	6	
C6427,28	F1L2E1040002	E 1000UF, 25V	2	
C6430	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6437,38	F1L2E1040002	E 1000UF, 25V	2	
C6452	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6453	TCUY1C105ZFN	C 1UF, 16V	1	
C6454	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6455	EEUFC1E221	E 220UF, 25V	1	
C6456	ECA2CM101	E 100UF, 160V	1	
C6458	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6459	EEUFC1E470	E 47UF, 25V	1	
C6461	ECA1HM101	E 100UF, 50V	1	
C6462,63	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6465	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6466,67	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6472	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6473	TCUY1C105ZFN	C 1UF, 16V	1	
C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6475	EEUFC1E221	E 220UF, 25V	1	
C6476	ECA2CM101	E 100UF, 160V	1	
C6490,91	F1K2J222A014	C 2200UF, K, 6.3V	2	
C6492	EEUED2V100	E 10UF,	1	
C6493	ECJ3XB2J222K	C 2200PF, K, 630V	1	
C6501-08	TCUY1C105ZFN	C 1UF, 16V	8	
C6509	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6510-12	ECJ4XB1E475M	C 4.7UF, M, 25V	3	
C6513	ECA2CM101	E 100UF, 160V	1	
C6514	TCUY1C105ZFN	C 1UF, 16V	1	
C6515,16	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6517	TCUY1C105ZFN	C 1UF, 16V	1	
C6521	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6522	ECA1VM470	E 47UF, 35V	1	
C6524,25	ECJ3FC2D102J	C 1000PF, J, 200V	2	△
C6526	ECA2EHG470	E 47UF, 250V	1	
C6532	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C6533	TCUY1C105ZFN	C 1UF, 16V	1	
C6534	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6535	EEUFC1E221	E 220UF, 25V	1	
C6536	ECA1HM221	E 220UF, 50V	1	
C6537	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6541,42	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6543-45	ECJ3FC2D102J	C 1000PF, J, 200V	3	△
C6546	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6550	ECA2CM101	E 100UF, 160V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6561-68	ECWF2205JS	P 2UF, 250V	8	
C6571	TCUY1C105ZFN	C 1UF, 16V	1	
C6574-78	TCUY1C105ZFN	C 1UF, 16V	5	
C6580,81	TCUY1C105ZFN	C 1UF, 16V	2	
C6584	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6585	TCUY1C105ZFN	C 1UF, 16V	1	
C6598	ECA2CM101	E 100UF, 160V	1	
C6600-06	ECA2DHG221	E 220UF, 200V	7	
C6607,08	ECWF2205JS	P 2UF, 250V	2	
C6609	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6610	ECA1EM471	E 470UF, 25V	1	
C6611-20	F1K2J222A014	C 2200UF, K, 6.3V	10	
C6621,22	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6623,24	TCUY1C105ZFN	C 1UF, 16V	2	
C6625	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6626	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6627,28	EEUFC1E470	E 47UF, 25V	2	
C6629	F2A2D1510004	E 150UF, 200V	1	
C6639	F1L2E1040002	E 1000UF, 25V	1	
C6640	TCUY1C105ZFN	C 1UF, 16V	1	
C6641,42	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6650,51	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6652	TCUY1C105ZFN	C 1UF, 16V	1	
C6680	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6681,82	TCUY1C105ZFN	C 1UF, 16V	2	
C6683,84	EEUFC1E470	E 47UF, 25V	2	
C6701-08	ECWF2205JS	P 2UF, 250V	8	
C6709	F1L2E1040002	E 1000UF, 25V	1	
C6711-14	ECA2DHG221	E 220UF, 200V	4	
C6715,16	ECWF2205JS	P 2UF, 250V	2	
C6717	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6718,19	EEUFC1E221	E 220UF, 25V	2	
C6721	ECA1EM101	E 100UF, 25V	1	
C6722,23	ECA2CM101	E 100UF, 160V	2	
C6724	ECA2DHG221	E 220UF, 200V	1	
C6726	EEUFC1E102	E 1000UF, 25V	1	
C6727	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6729	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6731	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6733	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6735	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6737	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6739	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6741	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6743	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6745	F1K2J222A014	C 2200UF, K, 6.3V	1	
C6747,48	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6749	TCUY1C105ZFN	C 1UF, 16V	1	
C6750,51	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6752	TCUY1C105ZFN	C 1UF, 16V	1	
C6753	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6755	TCUY1C105ZFN	C 1UF, 16V	1	
C6756,57	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6758	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6759,60	ECJ4XB1E475M	C 4.7UF, M, 25V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6761-64	TCUY1C105ZFN	C 1UF, 16V	4	
C6767,68	ECA2DHG221	E 220UF, 200V	2	
C6771	ECA2DHG221	E 220UF, 200V	1	
C6772,73	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6784	ECJ3XB2J222K	C 2200PF, K, 630V	1	
C6801	ECA2AHG101	E 100UF, 100V	1	
C6803	ECA2AHG101	E 100UF, 100V	1	
C6807	TCUY1C105ZFN	C 1UF, 16V	1	
C6808	F1L2E1040002	E 1000UF, 25V	1	
C6809,10	EEUFC1E221	E 220UF, 25V	2	
C6811	TCUY1C105ZFN	C 1UF, 16V	1	
C6812,13	F1L1E4750004	C 4.7UF, 25V	2	
C6815,16	ECWF2205JS	P 2UF, 250V	2	
C6817,18	F1L1E4750004	C 4.7UF, 25V	2	
C6820	TCUY1C105ZFN	C 1UF, 16V	1	
C6821,22	F1L1E4750004	C 4.7UF, 25V	2	
C6827	TCUY1C105ZFN	C 1UF, 16V	1	
C6828-31	ECJ2XB1H103K	C 0.01UF, K, 50V	4	
C6832	EEUFC1E221	E 220UF, 25V	1	
C6833	ECA2AHG101	E 100UF, 100V	1	
C6840	F1L2E1040002	E 1000UF, 25V	1	
C6841	ECA2AHG101	E 100UF, 100V	1	
C6901	EEUFC2A101LE	E 100UF, 100V	1	
C6902	EEUFC1E221	E 220UF, 25V	1	
C6903	EEUFC2A101LE	E 100UF, 100V	1	
C6907	TCUY1C105ZFN	C 1UF, 16V	1	
C6908	F1L2E1040002	E 1000UF, 25V	1	
C6910	EEUFC1E221	E 220UF, 25V	1	
C6911	TCUY1C105ZFN	C 1UF, 16V	1	
C6912,13	F1L1E4750004	C 4.7UF, 25V	2	
C6915,16	ECWF2205JS	P 2UF, 250V	2	
C6917,18	F1L1E4750004	C 4.7UF, 25V	2	
C6920	TCUY1C105ZFN	C 1UF, 16V	1	
C6921,22	F1L1E4750004	C 4.7UF, 25V	2	
C6927	TCUY1C105ZFN	C 1UF, 16V	1	
C6928-31	ECJ2XB1H103K	C 0.01UF, K, 50V	4	
C6932	EEUFC1E221	E 220UF, 25V	1	
C6933	EEUFC2A101LE	E 100UF, 100V	1	
C6940	F1L2E1040002	E 1000UF, 25V	1	
C6941	ECA2AHG101	E 100UF, 100V	1	
C7101,02	TCUY1C105ZFN	C 1UF, 16V	2	
C7107-10	F1K2A1040004	C 0.1UF, 100V	4	
C7111-14	ECJ1XC1H101J	C 100PF, J, 50V	4	
C7115-18	F1K2A1040004	C 0.1UF, 100V	4	
C7125,26	TCUY1C105ZFN	C 1UF, 16V	2	
C7129	TCUY1C105ZFN	C 1UF, 16V	1	
C7130	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7131-34	TCUY1C105ZFN	C 1UF, 16V	4	
C7135-38	ECJ3XB0J106M	C 10UF, M, 6.3V	4	
C7139	TCUY1C105ZFN	C 1UF, 16V	1	
C7140	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7201	TCUY1C105ZFN	C 1UF, 16V	1	
C7202	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7203	TCUY1C105ZFN	C 1UF, 16V	1	
C7206	TCUY1C105ZFN	C 1UF, 16V	1	
C7208	ECJ3XB0J106M	C 10UF, M, 6.3V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7212	TCUY1C105ZFN	C 1UF, 16V	1	
C7213, 14	F1K2A1040004	C 0.1UF, 100V	2	
C7215	TCUY1C105ZFN	C 1UF, 16V	1	
C7216	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7217, 18	F1K2A1040004	C 0.1UF, 100V	2	
C7221	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7222	F1K2A1040004	C 0.1UF, 100V	1	
C7223, 24	TCUY1C105ZFN	C 1UF, 16V	2	
C7225	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7226	F1K2A1040004	C 0.1UF, 100V	1	
C7227	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7230	TCUY1C105ZFN	C 1UF, 16V	1	
C7231	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7301	TCUY1C105ZFN	C 1UF, 16V	1	
C7302	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7303	TCUY1C105ZFN	C 1UF, 16V	1	
C7304	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7305-07	TCUY1C105ZFN	C 1UF, 16V	3	
C7308, 09	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C7310	TCUY1C105ZFN	C 1UF, 16V	1	
C7311, 12	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C7315, 16	TCUY1C105ZFN	C 1UF, 16V	2	
C7323	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7324, 25	F1K2A1040004	C 0.1UF, 100V	2	
C7326	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7327, 28	F1K2A1040004	C 0.1UF, 100V	2	
C7329, 30	ECJ1XC1H101J	C 100PF, J, 50V	2	
C7331-34	F1K2A1040004	C 0.1UF, 100V	4	
C7339, 40	TCUY1C105ZFN	C 1UF, 16V	2	
C7401, 02	TCUY1C105ZFN	C 1UF, 16V	2	
C7403	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7404	TCUY1C105ZFN	C 1UF, 16V	1	
C7406	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7408-11	TCUY1C105ZFN	C 1UF, 16V	4	
C7412-15	ECJ3XB0J106M	C 10UF, M, 6.3V	4	
C7418, 19	TCUY1C105ZFN	C 1UF, 16V	2	
C7424-27	F1K2A1040004	C 0.1UF, 100V	4	
C7428-31	ECJ1XC1H101J	C 100PF, J, 50V	4	
C7432-35	F1K2A1040004	C 0.1UF, 100V	4	
C7440, 41	TCUY1C105ZFN	C 1UF, 16V	2	
C750102	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7501, 02	EEUFC1E471	E 470UF, 25V	2	
C750202	TCUY1C105ZFN	C 1UF, 16V	1	
C7503	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C7505, 06	EEUFC1E471	E 470UF, 25V	2	
C7507	F1K2A1040004	C 0.1UF, 100V	1	
C7509	ECA1HHG100	E 10UF, 50V	1	
C7511	EEUFC1E471	E 470UF, 25V	1	
C751102	TCUY1C105ZFN	C 1UF, 16V	1	
C7512	EEUFC1E471	E 470UF, 25V	1	
C751202	TCUY1C105ZFN	C 1UF, 16V	1	
C7513	ECJ2XB1H103K	C 0.01UF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C751302	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7516	EEUFC1E471	E 470UF, 25V	1	
C751602	F1K2A1040004	C 0.1UF, 100V	1	
C7517	EEUFC1C821	E 820UF, 16V	1	
C751702	F1K2A1040004	C 0.1UF, 100V	1	
C7518	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C751802	TCUY1C105ZFN	C 1UF, 16V	1	
C7519	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7520	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7521	EEUFC1E471	E 470UF, 25V	1	
C752102	TCUY1C105ZFN	C 1UF, 16V	1	
C752202	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7522	EEUFC1C821	E 820UF, 16V	1	
C7523	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C7524	F1K2A1040004	C 0.1UF, 100V	1	
C7525	ECA1HHG100	E 10UF, 50V	1	
C752502	TCUY1C105ZFN	C 1UF, 16V	1	
C7527	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7529	TCUY1C105ZFN	C 1UF, 16V	1	
C753002	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7530-34	EEUFC1C331	E 330UF, 16V	5	
C7535-37	ECJ2VF1C474Z	C 0.47UF, Z, 16V	3	
C7541-44	ECJ2VF1C104Z	C 0.1UF, Z, 16V	4	
C7551, 52	EEUFC1E221	E 220UF, 25V	2	
C7554	ECJ2XB1H682K	C 6800PF, K, 50V	1	
C7561	EEUFC1E471	E 470UF, 25V	1	
C7562, 63	EEUFC1C471	E 470UF, 16V	2	
C7567	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C7568	ECA1HHG220	E 22UF, 50V	1	
C7570, 71	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C7572	ECA1HHG100	E 10UF, 50V	1	
C7574	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C7581	ECA1HHG4R7	E 4.7UF, 50V	1	
C7582	ECJ2VB1C224K	C 0.22UF, K, 16V	1	
C7583	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C7584	ECJ2XC1H271J	C 270PF, J, 50V	1	
C7585	EEUFC1H100L	E 10UF, 50V	1	
C7601, 02	TCUY1C105ZFN	C 1UF, 16V	2	
C7607-10	F1K2A1040004	C 0.1UF, 100V	4	
C7611-14	ECJ1XC1H101J	C 100PF, J, 50V	4	
C7615-18	F1K2A1040004	C 0.1UF, 100V	4	
C7623, 24	TCUY1C105ZFN	C 1UF, 16V	2	
C7629	TCUY1C105ZFN	C 1UF, 16V	1	
C7630	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C7631-34	TCUY1C105ZFN	C 1UF, 16V	4	
C7635-38	ECJ3XB0J106M	C 10UF, M, 6.3V	4	
C7639	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7640	TCUY1C105ZFN	C 1UF, 16V	1	
C9001	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9002	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9003	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9004	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9005, 06	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9007-10	EEVHB0G221	E 220UF, 4V	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9011-14	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9016,17	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9020	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9022	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9023	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9027	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9028	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9029	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9030,31	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C9032,33	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9034,35	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9036,37	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C9038,39	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9040	ECJ2VB1E473K	C 0.047UF, K, 25V	1	
C9041	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9042,43	ECJ2VB1E473K	C 0.047UF, K, 25V	2	
C9044	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9045,46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9048,49	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9050	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9051	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C9052	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9053	ECJ1VB1H392K	C 3900PF, K, 50V	1	
C9054-56	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9077	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9085	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9151	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9152	EEVHB0J330	E 33UF, 6.3V	1	
C9153	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9154	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9155	EEVHB1C470	E 47UF, 16V	1	
C9156	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9157-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9161	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9162	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9163-70	ECJ1XF1C104Z	C 0.1UF, Z, 16V	8	
C9171	EEVHB1C470	E 47UF, 16V	1	
C9172-74	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9175	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9176-82	ECJ1XF1C104Z	C 0.1UF, Z, 16V	7	
C9187	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9191	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9192	TCUY1C105ZFN	C 1UF, 16V	1	
C9195	TCUY1C105ZFN	C 1UF, 16V	1	
C9196	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9197	ECJ2VB1E563K	C 0.056UF, K, 25V	1	
C9198	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C9199,00	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9301	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9302	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9303	EEVHB1C470	E 47UF, 16V	1	
C9304	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9305	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9307	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9308	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9309	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9310	ECJ1XC1H330J	C 33PF, J, 50V	1	
C9311	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9314,15	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9316,17	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9318	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9319	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9321	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9323	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9324	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9325	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9327	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9328-30	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9331	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9332-35	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9338-46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	9	
C9347	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9449	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9450	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9453	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9454,55	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9465	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9466	EEVHB0G221	E 220UF, 4V	1	
C9467	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9469	EEVHB0G221	E 220UF, 4V	1	
C9470	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9471	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9472	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9474	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9475-77	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9478	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9479-82	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9485-93	ECJ1XF1C104Z	C 0.1UF, Z, 16V	9	
C9494,95	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9496,97	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9498	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9499	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9596-99	ECJ1VF1H103Z	C 0.01UF, Z, 50V	4	
C9601-05	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9607	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9611	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9612	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9613	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9616	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9620,21	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9623	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9625	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9629,30	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9632	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9635	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9700,01	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9702	EEVHB1C470	E 47UF, 16V	1	
C9703	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9705	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9706,07	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9708-10	EEVHB1C470	E 47UF, 16V	3	
C9712-17	ECJ1XC1H101J	C 100PF, J, 50V	6	
C9718	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9719	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9720	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9722,23	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9724	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9725	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9726	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9727, 28	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9729	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9730-33	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9737	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9740, 41	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9742	EEVHB1C470	E 47UF, 16V	1	
C9743	TCUY1C105ZFN	C 1UF, 16V	1	
C9748, 49	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9750	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9751, 52	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9753, 54	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9755, 56	ECJ1XF1H102Z	C 1000PF, Z, 50V	2	
C9759	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9760	ECJ1VB1C563K	C 0.056UF, K, 16V	1	
C9761, 62	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9765	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9766	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9767, 68	TCUY1C105ZFN	C 1UF, 16V	2	
C9769	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9800	EEVHB0G221	E 220UF, 4V	1	
C9801	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9802	EEVHB1C470	E 47UF, 16V	1	
C9803	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9804	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C9805	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C9806	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9951-53	EEVHB1C470	E 47UF, 16V	3	
C9954, 55	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9956	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9957	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9958, 59	F2H1E221A007	E 2.2UF, 25V	2	
C9960	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9961	EEFUD0G121ER	120UF	1	
C9964, 65	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9966	EEVHB0G221	E 220UF, 4V	1	
C9967	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C9968	EEVHB1C470	E 47UF, 16V	1	
C9969	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9970	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C9971	ECJ2XC1H222J	C 2200PF, J, 50V	1	
CA1-11	K1MN48A00002	CONNECTOR	11	
CB1-11	K1MN48A00002	CONNECTOR	11	
CF901, 02	ERZV10V621P2	VARISTOR	2	⚠
D3	K1KA40A00140	40P CONNECTOR	1	
D003	MA152K	DIODE	1	TH-50PV30H/M/R
D4	K1KA12A00227	12P CONNECTOR	1	
D6	K1KA21A00007	21P CONNECTOR	1	
D009	MA8056M	ZENER DIODE	1	
D12	K1KA07A00189	7P CONNECTOR	1	
D20	K1KA20A00180	20P CONNECTOR	1	
D25	K1KA08A00293	8P CONNECTOR	1	
D27	K1KA09A00077	9P CONNECTOR	1	
D31-34	K1MN80B00002	CONNECTOR	4	
D053	MA152K	DIODE	1	TH-50PV30H/M/R

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D080, 81	MA3020	ZENER DIODE	2	TH-50PV30A
D084	MA152K	DIODE	1	TH-50PV30A
D300, 01	MA152K	DIODE	2	
D302	LNJ107W5PRW	LED	1	
D303	MA152K	DIODE	1	
D308	MA8056M	ZENER DIODE	1	
D309, 10	MA152K	DIODE	2	
D311	MA8056M	ZENER DIODE	1	
D317	MA3062M	ZENER DIODE	1	
D920	D4SB80Z	DIODE	1	⚠
D921	B0EAKT000017	DIODE	1	
D922	B0HCMM000001	DIODE	1	
D925, 26	B0HCMM000001	DIODE	2	
D929	TMPG10G3	DIODE	1	
D970	FML-G12S	DIODE	1	
D971	RL3Z	DIODE	1	
D990	MA152K	DIODE	1	
D1000	MA152K	DIODE	1	
D1002	MA152K	DIODE	1	
D1003	MA3033L	ZENER DIODE	1	
D1004	MA111	DIODE	1	
D1006	MA152K	DIODE	1	
D1007	MA3047M	ZENER DIODE	1	
D1011	MA3062M	ZENER DIODE	1	
D1015	MA152K	DIODE	1	
D1227, 28	MA111	DIODE	2	
D1231, 32	MA111	DIODE	2	
D1234	MA111	DIODE	1	
D1300, 01	MA152K	DIODE	2	
D1302	MA3033L	ZENER DIODE	1	
D1310-12	MA3140M	ZENER DIODE	3	
D1488	MA152K	DIODE	1	
D1490	MA111	DIODE	1	
D1850-52	MA3140M	ZENER DIODE	3	
D1853-56	MA3150M	ZENER DIODE	4	
D1857, 58	MA111	DIODE	2	
D2001	MA152K	DIODE	1	
D2003	MA152K	DIODE	1	
D2210	MA3036H	ZENER DIODE	1	
D2301-04	M1FS4	DIODE	4	
D2305	S3L20U	DIODE	1	
D2311, 12	MA152K	DIODE	2	
D2314, 15	MA111	DIODE	2	
D3105	MA3091L	ZENER DIODE	1	
D3124	MA152	DIODE	1	
D3125	B0BC3R400001	DIODE	1	
D3126, 27	MA111	DIODE	2	
D3200	MA3120M	ZENER DIODE	1	
D3215	MA8140M	ZENER DIODE	1	
D3219	MA8140M	ZENER DIODE	1	
D3222	MA8140M	ZENER DIODE	1	
D3225	MA8140M	ZENER DIODE	1	
D3232-35	MA8140M	ZENER DIODE	4	
D3715	MA3140M	ZENER DIODE	1	
D3764	MA3140M	ZENER DIODE	1	
D3766	MA3140M	ZENER DIODE	1	
D3767, 68	MA165	DIODE	2	
D3769, 70	MA4027L	ZENER DIODE	2	
D3771, 72	MA165	DIODE	2	
D3773, 74	MA4068M	ZENER DIODE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6401,02	MA8056H	ZENER DIODE	2	
D6408,09	D1FL40F4063	DIODE	2	
D6411,12	MA8056H	ZENER DIODE	2	
D6418,19	D1FL40F4063	DIODE	2	
D6433	MA111	DIODE	1	
D6435	MA111	DIODE	1	
D6436	B0JCKG000001	DIODE	1	
D6451	M1FS4	DIODE	1	
D6453	MA111	DIODE	1	
D6455	MA111	DIODE	1	
D6456	D1FL40F4063	DIODE	1	
D6459	MA111	DIODE	1	
D6460,61	B0HCKS000001	DIODE	2	
D6463	MA8056H	ZENER DIODE	1	
D6465,66	MA8330M	ZENER DIODE	2	
D6468	MA111	DIODE	1	
D6470	MA111	DIODE	1	
D6473	MA111	DIODE	1	
D6475	MA111	DIODE	1	
D6476	D1FL40F4063	DIODE	1	
D6477	MA111	DIODE	1	
D6478	B0HCKS000001	DIODE	1	
D6479	MA111	DIODE	1	
D6481,82	MA8330M	ZENER DIODE	2	
D6483-90	MA8056H	ZENER DIODE	8	
D6491,92	D1FL40F4063	DIODE	2	
D6493	MA111	DIODE	1	
D6495	B0HCKS000001	DIODE	1	
D6497-99	M1FS4	DIODE	3	
D6509	MA111	DIODE	1	
D6510	M1FS4	DIODE	1	
D6511	M1FL20UF4063	DIODE	1	
D6512-14	MA111	DIODE	3	
D6515,16	MA8240M	ZENER DIODE	2	
D6520	MA111	DIODE	1	
D6521	D1FL40F4063	DIODE	1	
D6522	MA111	DIODE	1	
D6523	D1FL40F4063	DIODE	1	
D6524	MA8051L	ZENER DIODE	1	
D6525	MA111	DIODE	1	
D6526	M1FL20UF4063	DIODE	1	
D6541	B0HCKS000001	DIODE	1	
D6542	MA111	DIODE	1	
D6543	MA8051L	ZENER DIODE	1	
D6544	MA111	DIODE	1	
D6545	MA8051L	ZENER DIODE	1	
D6546-48	MA8330M	ZENER DIODE	3	
D6549,50	MA111	DIODE	2	
D6552	M1FS4	DIODE	1	
D6553	MA111	DIODE	1	
D6570	M1FL20UF4063	DIODE	1	
D6572	D1FL40F4063	DIODE	1	
D6582	MA8051L	ZENER DIODE	1	
D6583	LNJ201LPQJA	LED	1	
D6584	MA111	DIODE	1	
D6585,86	MA8330M	ZENER DIODE	2	
D6600	D1FL40F4063	DIODE	1	
D6605-10	M1FS4	DIODE	6	
D6611-14	D1FL40F4063	DIODE	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6615-18	B0HBSN000007	DIODE	4	
D6623	B0HBSN000007	DIODE	1	
D6627	B0HBSN000007	DIODE	1	
D6631,32	D1FL40F4063	DIODE	2	
D6633,34	M1FS4	DIODE	2	
D6649	D1FL40F4063	DIODE	1	
D6650	B0HBSN000007	DIODE	1	
D6651	D1FL40F4063	DIODE	1	
D6701	B0HBSN000007	DIODE	1	
D6710	D1FL40F4063	DIODE	1	
D6711,12	B0HBSN000007	DIODE	2	
D6713	D1FL40F4063	DIODE	1	
D6715,16	B0HBSN000007	DIODE	2	
D6728,29	B0HBSN000007	DIODE	2	
D6734-39	M1FS4	DIODE	6	
D6740	D1FL40F4063	DIODE	1	
D6749,50	M1FS4	DIODE	2	
D6751-53	D1FL40F4063	DIODE	3	
D6754	MA8240M	ZENER DIODE	1	
D6756	M1FS4	DIODE	1	
D6758,59	MA8330M	ZENER DIODE	2	
D6760	LNJ201LPQJA	LED	1	
D6761	MA8051L	ZENER DIODE	1	
D6762,63	MA111	DIODE	2	
D6764	LNJ201LPQJA	LED	1	
D6766	MA111	DIODE	1	
D6769	D1FL40F4063	DIODE	1	
D6771,72	MA111	DIODE	2	
D6773	D1FL40F4063	DIODE	1	
D6795	D1FL40F4063	DIODE	1	
D6802	D1FL40F4063	DIODE	1	
D6805,06	D1FL40F4063	DIODE	2	
D6807	B0HDSM000004	DIODE	1	
D6811-13	D1FL40F4063	DIODE	3	
D6814-17	B0HDSM000004	DIODE	4	
D6818	D1FL40F4063	DIODE	1	
D6820,21	B0HDSM000004	DIODE	2	
D6822,23	MA152	DIODE	2	
D6824	M1FS4	DIODE	1	
D6826-29	M1FS4	DIODE	4	
D6902	D1FL40F4063	DIODE	1	
D6905,06	D1FL40F4063	DIODE	2	
D6907	B0HDSM000004	DIODE	1	
D6911-13	D1FL40F4063	DIODE	3	
D6914-17	B0HDSM000004	DIODE	4	
D6918	D1FL40F4063	DIODE	1	
D6920,21	B0HDSM000004	DIODE	2	
D6922,23	MA152	DIODE	2	
D6924	M1FS4	DIODE	1	
D6926,27	M1FS4	DIODE	2	
D7101-08	M1FL20UF4063	DIODE	8	
D7201-06	M1FL20UF4063	DIODE	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D7301-08	M1FL20UF4063	DIODE	8	
D7401-04	MA152K	DIODE	4	
D7405-12	M1FL20UF4063	DIODE	8	
D750102	M1FL20UF4063	DIODE	1	
D7501	MA737	DIODE	1	
D750202	M1FL20UF4063	DIODE	1	
D7502	MA2120A	ZENER DIODE	1	
D7503,02	M1FL20UF4063	DIODE	2	
D7504	MA737	DIODE	1	
D750502	M1FL20UF4063	DIODE	1	
D7505	MA2120A	ZENER DIODE	1	
D7506	M1FL20UF4063	DIODE	1	
D7507	MA737	DIODE	1	
D7508	MA2068A	ZENER DIODE	1	
D7511	MA2068A	ZENER DIODE	1	
D7512	MA737	DIODE	1	
D7513	MA2051A	ZENER DIODE	1	
D7515	MA737	DIODE	1	
D7537,38	MA111	DIODE	2	
D7539	MA3047H	ZENER DIODE	1	
D7540	MA3039H	ZENER DIODE	1	
D7541,42	MA111	DIODE	2	
D7543	MA728	DIODE	1	
D7544,45	MA111	DIODE	2	
D7546	MA152	DIODE	1	
D7547-49	MA111	DIODE	3	
D7551	MA737	DIODE	1	
D7552	MA152K	DIODE	1	
D7561-64	MA111	DIODE	4	
D7565	MA737	DIODE	1	
D7568	MA3039H	ZENER DIODE	1	
D7581	MA111	DIODE	1	
D7582	MA3X78900L	ZENER DIODE	1	
D7601-08	M1FL20UF4063	DIODE	8	
D9001	MA3036H	ZENER DIODE	1	
D9705-13	MA3062M	ZENER DIODE	9	
D9714	MA152K	DIODE	1	
D9715	MA3062M	ZENER DIODE	1	
D9716	MA111	DIODE	1	
D9719,20	MA3062M	ZENER DIODE	2	
D9723	MA3062M	ZENER DIODE	1	
D9724	MA111	DIODE	1	
D9727	MA152K	DIODE	1	
D9730	MA152K	DIODE	1	
D9769	MA152K	DIODE	1	
D9771	MA152K	DIODE	1	
D9800	B0JCPD000010	DIODE	1	
D9801	M1FS4	DIODE	1	
D9952	M1FS4	DIODE	1	
D9953	MA152K	DIODE	1	
D9954	M1FS4	DIODE	1	
D9955	B0JCPD000010	DIODE	1	
DG1	K1KB50A00127	50P CONNECTOR	1	
DG2	K1KA40B00062	40P CONNECTOR	1	
DG3	K1KA30B00054	30P CONNECTOR	1	
DG4	K1KB50A00127	50P CONNECTOR	1	
DG6	K1KA20B00103	20P CONNECTOR	1	
DG7	TJSF18228	28P CONNECTOR	1	
DG8	K1KA20B00125	20P CONNECTOR	1	
DG10	K1KA20A00180	20P CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
DG12	K1KA09A00077	9P CONNECTOR	1	
DG18	K1KA06A00183	6P CONNECTOR	1	
DG30	K1KA10A00317	10P CONNECTOR	1	
DG31	TJS3A9880	8P CONNECTOR	1	
DG32	K1KA07A00096	7P CONNECTOR	1	
DL7201,02	ELKE103FA	NOISE FILTER	2	
DL7501-03	ELKE103FA	NOISE FILTER	3	
F900-1,-2	EYF-52BC	FUSE HOLDER	2	
F901-1,-2	EYF-52BC	FUSE HOLDER	2	
F902-1,-2	EYF-52BC	FUSE HOLDER	2	
FL1000,01	ELKE103FA	NOISE FILTER	2	
FL1003	ELKE103FA	NOISE FILTER	1	
FL1015	ELKE103FA	NOISE FILTER	1	
FL1031,32	ELKE103FA	NOISE FILTER	2	
FL1046	ELKE103FA	NOISE FILTER	1	
FL1048	ELKE103FA	NOISE FILTER	1	
FL1051	ELKE103FA	NOISE FILTER	1	
FL1064	ELKE103FA	NOISE FILTER	1	
FL1072-74	ELKE103FA	NOISE FILTER	3	
FL1090,91	ELKE103FA	NOISE FILTER	2	
FL1092-94	TSK1025	FERRITE CORE	3	
FL3101,02	TLPD021	LINE FILTER	2	
FL3772,73	J0HABB000003	LC FILTER	2	
FL3775-77	J0HABB000004	LC FILTER	3	
FL6001	TAX10088	EMI FILTER	1	
FL6002-04	ELKE103FA	NOISE FILTER	3	
FL6007-13	TLK20LFA473M	EMI FILTER	7	
G5	K1KA06B00117	6P CONNECTOR	1	
G7	K1MN28B00056	28P CONNECTOR	1	
G18	K1KA06B00049	6P CONNECTOR	1	
H1	K1KB50A00127	50P CONNECTOR	1	
H4	K1KB50A00127	50P CONNECTOR	1	
H9	K1KA06A00220	6P CONNECTOR	1	
H10	TJS6A9390	24P CONNECTOR	1	
H11	TJS6A9390	24P CONNECTOR	1	TH-50PV30H/M/R
IC300	B3L000000020	IC	1	
IC920	C5HABZ00121	IC	1	
IC921	B3PAA0000261	IC	1	△
IC970	AN1431M	LINEAR IC	1	
IC1001	MC14052BF	MOS IC (CMOS GATE ARRLY)	1	
IC1002	C2BBFE000138	IC	1	
IC1003	PQ07VZ012ZP	IC	1	
IC1004	M51957BFP	LINEAR IC	1	
IC1005	C0CBCBF00001	IC	1	
IC1007	C2CBBYF000029	IC	1	
IC1008	TVRN287	IC	1	
IC1009	C0JBAZ001839	IC	1	
IC1010	PST9128NR	IC (LOGIC)	1	
IC1012	C3ABPG000133	IC	1	
IC1013	TVRN291	IC	1	
IC1106	CXA1875AM	LINEAR IC	1	
IC1235	C0ZBZ0000800	IC	1	
IC1270	AN15858A-VF	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC1301	C1AB00001826	IC	1	
IC1302	C1AB00001703	IC	1	
IC1303	C0JBAS000061	IC	1	
IC1304	C1AB00001707	IC	1	
IC1305	M52055FP	LINEAR IC	1	
IC1306	PQ07VZ012ZP	IC	1	
IC1308	C3ABPJ000065	IC	1	
IC1309	AN15935A-VF	IC	1	
IC1311	C0CBCAD00012	IC	1	
IC1313	TC7WU04FU	IC	1	
IC1315	C0CBCAD00012	IC	1	
IC1319	C0CBCAD00012	IC	1	
IC1321	C3ABPJ000063	IC	1	
IC1322	C0CBCAD00012	IC	1	
IC1323	AN78L09M	LINEAR IC	1	
IC1324	C0CBCAD00012	IC	1	
IC1325	C0CBCBD00008	IC	1	
IC1329	C0JBAZ001488	IC	1	
IC1331	C3ABPJ000063	IC	1	
IC1332, 33	C0CBCBD00006	IC	2	
IC1350	C1AB00001827	IC	1	
IC1750	C0JBAS000061	IC	1	
IC1800	C0JBAZ001488	IC	1	
IC2001	AN77L08M	IC	1	
IC2002	C1AB00002026	IC	1	
IC2003	C0DBEZE00002	IC	1	
IC2004	M51957BFP	LINEAR IC	1	
IC2200	AN17880A	IC	1	
IC2206, 07	NJM2115M	IC	2	
IC2301, 02	LA4901	IC	2	
IC2304	AN7709SP	IC	1	
IC2305, 06	LA4901	IC	2	
IC2401	C1BB00000800	IC	1	
IC2402, 03	NJM2904M	LINEAR IC	2	
IC3003	CXA1315M	LINEAR IC	1	
IC3004	CXA1875AM	LINEAR IC	1	
IC3200	CXA2069Q	LINEAR IC	1	
IC3251	C1AB00001720	IC	1	
IC3290	CXA1315M	LINEAR IC	1	
IC3517	AHC2G66HDCTR	INTEGRATED CIRCUIT	1	
IC3699	TVRJ969	IC	1	
IC6001	C0JBAA000244	IC	1	
IC6002	C0JBAE000231	IC	1	
IC6003	C0JBAZ002059	IC	1	
IC6004	C0DBZHE00019	IC	1	
IC6005	C0JBAB000408	IC	1	
IC6006	C0JBAZ001713	IC	1	
IC6007	C0JBAZ001590	IC	1	
IC6008, 09	C0JBAZ001120	IC	2	
IC6010	C0JBAZ002060	IC	1	
IC6011	C0CBCBD00004	IC	1	
IC6012	TVRN178-2	IC	1	
IC6013	C1AB00001816	IC	1	
IC6014	C3ABQG000069	IC	1	
IC6015	C1AB00001815	IC	1	
IC6016	C0CBCBD00008	IC	1	
IC6017	C0CBCAD00015	IC	1	
IC6018	PST9128NR	IC (LOGIC)	1	
IC6401-06	C0HBC0000007	IC	6	
IC6411-16	C0HBC0000007	IC	6	
IC6431	AN1431M	LINEAR IC	1	
IC6434	TLP181	PHOTO COUPLER	1	
IC6451	AN1431M	LINEAR IC	1	
IC6452, 53	AN78L15M	LINEAR IC	2	
IC6454, 55	AN78L05M	LINEAR IC	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC6456-59	TLP181	PHOTO COUPLER	4	
IC6467	TLP181	PHOTO COUPLER	1	
IC6471, 72	AN1431M	LINEAR IC	2	
IC6480	TLP181	PHOTO COUPLER	1	
IC6491	AN1431M	LINEAR IC	1	
IC6501, 02	TC74HC14AF	IC	2	
IC6503-10	B3PBA0000191	IC	8	
IC6511	C0ZBZ0000735	IC	1	
IC6512	AN78L05M	LINEAR IC	1	
IC6521	C0ZBZ0000735	IC	1	
IC6541, 42	C0ZBZ0000735	IC	2	
IC6543	AN78L05M	LINEAR IC	1	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	
IC6601-03	C0ZBZ0000138	IC	3	
IC6604	M63991FP	LINEAR IC	1	
IC6605, 06	C0JBAZ000005	IC	2	
IC6607	TC74HC08AF	IC	1	
IC6671	AN1431M	LINEAR IC	1	
IC6701-04	C0ZBZ0000138	IC	4	
IC6705	C0ZBZ0000735	IC	1	
IC6706	C0JBAZ000005	IC	1	
IC6707	NJM2903M	INTEGRATED CIRCUIT	1	
IC6709	AN1431M	LINEAR IC	1	
IC6801	C0JBAZ000005	IC	1	
IC6802, 03	C0ZBZ0000138	IC	2	
IC6804	NJM2903M	INTEGRATED CIRCUIT	1	
IC6805	C0ZBZ0000138	IC	1	
IC6901	C0JBAZ000005	IC	1	
IC6902, 03	C0ZBZ0000138	IC	2	
IC6904	NJM2903M	INTEGRATED CIRCUIT	1	
IC6905	C0ZBZ0000138	IC	1	
IC7102-06	C0JBAZ001604	IC	5	
IC7201	C0JBAZ001604	IC	1	
IC7203-05	C0JBAZ001604	IC	3	
IC7301-05	C0JBAZ001604	IC	5	
IC7401-05	C0JBAZ001604	IC	5	
IC7501, 02	C0DAAZG00006	IC	2	
IC7502	C0JBAZ001604	IC	1	
IC7503	C0DAAZG00006	IC	1	
IC7503	C0JBAZ001604	IC	1	
IC7504	C0DAAZG00006	IC	1	
IC7504	C0JBAZ001604	IC	1	
IC7505	C0DAAZG00006	IC	1	
IC7505	C0JBAZ001604	IC	1	
IC7551	PQ1CZ21H2ZP	IC	1	
IC7561	PQ1CZ21H2ZP	IC	1	
IC7581	C0DBAMA00015	IC	1	
IC7602-06	C0JBAZ001604	IC	5	
IC8002	MC14052BF	MOS IC (CMOS GATE ARRLY)	1	
IC8004	M52346SP	LINEAR IC	1	
IC8006	TC74HC14AF	IC	1	
IC8008	TC4W53FEL	IC	1	
IC8009	AHC2G66HDCTR	INTEGRATED CIRCUIT	1	
IC9001	C0CBCBD00008	IC	1	
IC9002	C0ZBZ0000551	IC	1	
IC9003	C0JBAB000550	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC9004	AHC2G66HDCTR	INTEGRATED CIRCUIT	1	
IC9005	C0JBAZ001992	IC	1	
IC9006, 07	C0CBCBD00008	IC	2	
IC9008	C0JBAZ001992	IC	1	
IC9009	C0FBAD000069	IC	1	
IC9014	C0JBAZ000855	IC	1	
IC9023	C0JBAZ000855	IC	1	
IC9151	MN845041-A	IC	1	
IC9152	C0CBCBD00008	IC	1	
IC9153	C0DBZHE00019	IC	1	
IC9154	C0JBAZ001604	IC	1	
IC9155	C3ABPJ000017	IC	1	
IC9157	TLC2933IPWL	INTEGRATED CIRCUIT	1	
IC9301	C1ZBZ0002358	IC	1	
IC9302	C0CBCBD00008	IC	1	
IC9303	C1ZBZ0002357	IC	1	
IC9304	C3ABPJ000043	IC	1	
IC9305	MN84510-A	IC	1	
IC9453	PQ07VZ0122P	IC	1	
IC9454	C3ABPJ000043	IC	1	
IC9455	MN84510-A	IC	1	
IC9456	TVRJ957-2	OR C3FBMD000156, C3FBM D00	1	
IC9457	C0JBAZ001604	IC	1	
IC9459	C0JBAZ001992	IC	1	
IC9601	C0JBAZ001604	IC	1	
IC9602	C0JBAZ000855	IC	1	
IC9603, 04	C0JBAZ001604	IC	2	
IC9605	C1ZBZ0002402	IC	1	
IC9606	PST9128NR	IC (LOGIC)	1	
IC9701	MN102L230	IC	1	
IC9702	TVRN229	IC	1	
IC9703	C0JBAZ001604	IC	1	
IC9704	HM538123BJ8Z	IC	1	
IC9705	TVRN255	OR C3FBLD000026	1	
IC9706	C0JBAZ000855	IC	1	
IC9707	C0JBAE000283	IC	1	
IC9708	C3EBGC000018	IC	1	
IC9709	C2BBGF000491	IC	1	
IC9710	M51957BFP	LINEAR IC	1	
IC9711	AHC2G66HDCTR	INTEGRATED CIRCUIT	1	
IC9800	C0DBAFH00021	IC	1	
IC9951	C0DBAMH00006	IC	1	
IC9952	C0DBAFH00021	IC	1	
JG1	K1NA68E00071	68P CONNECTOR	1	
JG2	K1NA09E00042	9P CONNECTOR	1	
JG3	K1KA20A00180	20P CONNECTOR	1	
JG5	K1YY68000007	PC CARD CONNECTOR	1	
JK3100A	TJB0A639	TERMINAL	1	
JK3709	K1FB315A0001	CONNECTOR	1	
JK3714	K4BK29A00006	AV TERMENAL	1	
JK7002-07	K4ZZ01000121	EARTH LUG	6	
JS001	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
JS005	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
JS007-09	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS010, 11	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-50PV30H/M/R
JS019	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS021-23	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS025-32	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS035, 36	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS038	ERJ6GEY0R00	M 0 OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
JS040-44	ERJ6GEY0R00	M 0 OHM, 1/10W	5	
JS046-48	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS051	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS052	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
JS054	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS056-59	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS060	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
JS060-02	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS061	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
JS066	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS070-74	ERJ6GEY0R00	M 0 OHM, 1/10W	5	
JS081	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS083, 84	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS089-91	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS100	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS102-05	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS108	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS109	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS110-13	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
JS116-32	ERJ3GEY0R00	M 0 OHM, 1/16W	17	
JS135-43	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
JS144-46	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS150-52	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS154	J0JCC0000364	CHIP INDUCTOR	1	
JS164	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS166	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS168-70	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS171	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS172-75	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
JS177-79	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS182	J0JCC0000364	CHIP INDUCTOR	1	
JS186	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
JS192, 93	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
JS194	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS207, 08	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS215, 16	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS218, 19	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS221	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS223	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS225-30	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
JS232	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS300, 01	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
JS304, 05	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS1850	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2002	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
JS2022	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS2026	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2102	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2106, 07	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS2227	ERJ6GEY0R00	M 0 OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
JS2303, 04	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3100-05	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
JS3107	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3108	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3110, 11	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3112	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3113-15	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS3118	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3120, 21	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3132-34	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS3137	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3200-02	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS3220	J0JGC0000021	CHIP INDUCTOR COIL	1	TH-50PV30H/M/R
JS3234	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3280	J0JGC0000021	CHIP INDUCTOR COIL	1	
JS3282	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30A
JS3284	J0JGC0000021	CHIP INDUCTOR COIL	1	TH-50PV30A
JS3705, 06	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
JS6009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS6012	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS6018	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS6020	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS6022	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS6024	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS6026	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
K12	TJSF43709	9P CONNECTOR	1	
K13	TJS6A8780	3P CONNECTOR	1	
K24	K1KA08B00005	8P CONNECTOR	1	
L003-05	J0JCC0000364	CHIP INDUCTOR	3	TH-50PV30H/M/R
L006, 07	J0JCC0000241	CHIP INDUCTOR	2	TH-50PV30H/M/R
L008	EXC3BB221H	BEAD CHOKE	1	TH-50PV30H/M/R
L010-12	J0JCC0000241	CHIP INDUCTOR	3	TH-50PV30H/M/R
L013	TSK1040	FERRITE CORE	1	TH-50PV30H/M/R
L017, 18	J0JGC0000021	CHIP INDUCTOR COIL	2	TH-50PV30H/M/R
L019, 20	EXCELDR35C	BEAD CHOKE	2	TH-50PV30H/M/R
L051	ELJNC15NJF	CHIP COIL	1	TH-50PV30H/M/R
L052	J0JCC0000364	CHIP INDUCTOR	1	TH-50PV30H/M/R
L054, 55	J0JCC0000364	CHIP INDUCTOR	2	TH-50PV30H/M/R
L056-58	J0JCC0000241	CHIP INDUCTOR	3	TH-50PV30H/M/R
L059	EXC3BB221H	BEAD CHOKE	1	TH-50PV30H/M/R
L061, 62	J0JCC0000241	CHIP INDUCTOR	2	TH-50PV30H/M/R
L063	TSK1040	FERRITE CORE	1	TH-50PV30H/M/R
L066	J0JGC0000021	CHIP INDUCTOR COIL	1	TH-50PV30H/M/R
L067	J0JCC0000364	CHIP INDUCTOR	1	TH-50PV30H/M/R
L080, 81	ELJNC15NJF	CHIP COIL	2	TH-50PV30A
L083, 84	J0JCC0000364	CHIP INDUCTOR	2	TH-50PV30A
L086, 87	J0JCC0000364	CHIP INDUCTOR	2	TH-50PV30A
L088, 89	J0JCC0000241	CHIP INDUCTOR	2	TH-50PV30A
L090	EXC3BB221H	BEAD CHOKE	1	TH-50PV30A
L091	TSK1040	FERRITE CORE	1	TH-50PV30A
L920	EXCELDR25C	BEAD CHOKE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L921	EXCELSA24	BEAD CHOKE	1	
L922	EXCELDR35C	BEAD CHOKE	1	
L970	EXCELSA24	BEAD CHOKE	1	
L971	G0A100GA0013	CHOKE COIL	1	
L973	G0A100GA0013	CHOKE COIL	1	
L1000	ELJPA100KB	CHIP INDUCTOR	1	
L1003	TALC325T3R3M	CHIP INDUCTOR COIL	1	
L1004-06	TALC325T4R7M	CHIP INDUCTOR COIL	3	
L1008, 09	TALC325T4R7M	CHIP INDUCTOR COIL	2	
L1270	J0JCC0000241	CHIP INDUCTOR	1	
L1301	G1C2R2K00006	INDUCTION COIL	1	
L1302, 03	TALC168T100K	CHIP INDUCTOR COIL	2	
L1307	TALC168T5R6K	CHIP INDUCTOR COIL	1	
L1309-16	TALC325T4R7M	CHIP INDUCTOR COIL	8	
L1317, 18	TALC168T3R3K	CHIP INDUCTOR COIL	2	
L1319, 20	TALC168T6R8K	CHIP INDUCTOR COIL	2	
L1328	G1C100KA0008	INDUCTOR COIL	1	
L1331	TALC325T4R7M	CHIP INDUCTOR COIL	1	
L1333-42	TALC325T4R7M	CHIP INDUCTOR COIL	10	
L1343, 44	ELJPA100KB	CHIP INDUCTOR	2	
L1350	J0JCC0000241	CHIP INDUCTOR	1	
L1352	G1C100KA0008	INDUCTOR COIL	1	
L1353, 54	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
L1360-62	J0JGC0000021	CHIP INDUCTOR COIL	3	
L1366-68	J0JGC0000021	CHIP INDUCTOR COIL	3	
L1369, 70	J0JCC0000241	CHIP INDUCTOR	2	
L1600	ELJPA100KB	CHIP INDUCTOR	1	
L1650-52	J0JGC0000021	CHIP INDUCTOR COIL	3	
L1750	TALC168T5R6K	CHIP INDUCTOR COIL	1	
L1751-53	TALC168T1R0K	CHIP INDUCTOR COIL	3	
L1754	TALC168T5R6K	CHIP INDUCTOR COIL	1	
L1755	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L1801	G1C100KA0008	INDUCTOR COIL	1	
L1805, 06	G1C100KA0008	INDUCTOR COIL	2	
L1852-56	ELJPA100KB	CHIP INDUCTOR	5	
L2001, 02	TSK1032	BEAD CHOKE	2	
L2004	J0JCC0000241	CHIP INDUCTOR	1	
L2006	ELESE6R8KA	PEAKING COIL	1	
L2009, 10	J0JCC0000241	CHIP INDUCTOR	2	
L2012	J0JCC0000241	CHIP INDUCTOR	1	
L2014-17	J0JCC0000241	CHIP INDUCTOR	4	
L2023	TSK1032	BEAD CHOKE	1	
L2027-30	EXCELDR35C	BEAD CHOKE	4	
L2031	J0JCC0000241	CHIP INDUCTOR	1	
L2032	TSK1032	BEAD CHOKE	1	
L2033	J0JCC0000241	CHIP INDUCTOR	1	
L2035	J0JCC0000241	CHIP INDUCTOR	1	
L2038	TSK1032	BEAD CHOKE	1	
L2200	ELJPA470KB	CHIP INDUCTOR	1	
L2207	EXCELDR35C	BEAD CHOKE	1	
L2215	EXCELDR35C	BEAD CHOKE	1	
L2220-22	EXC3BB221H	BEAD CHOKE	3	
L2301, 02	TAL10RP221LB	INDUCTION COIL	2	
L2303, 04	EXCELDR35C	BEAD CHOKE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L2306	ELJPA100KB	CHIP INDUCTOR	1	
L2307, 08	TAL10RP221LB	INDUCTION COIL	2	
L2309, 10	ERD25V0T	M 0HM, 1/10W	2	
L2430	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
L3100-07	EXC3BB221H	BEAD CHOKE	8	
L3108	ELESE4R7JA	PEAKING COIL	1	
L3109-11	EXC3BB221H	BEAD CHOKE	3	
L3119	ELESE6R8KA	PEAKING COIL	1	
L3120	TSKX027	CHOKE COIL	1	
L3200	J0JCC0000241	CHIP INDUCTOR	1	
L3210	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L3767-70	J0JCC0000364	CHIP INDUCTOR	4	
L3778-80	TSK1040	FERRITE CORE	3	
L6001-06	J0JHC0000035	CHIP INDUCTOR	6	
L6008	J0JHC0000035	CHIP INDUCTOR	1	
L6009	G1C8R2K00009	INDUCTOR COIL	1	
L6010-13	J0JHC0000035	CHIP INDUCTOR	4	
L6431	J0JJC0000021	CHIP INDUCTOR	1	
L6451	J0JJC0000021	CHIP INDUCTOR	1	
L6453	G0ZZ00002183	PEAKING COIL	1	
L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472	G0ZZ00002183	PEAKING COIL	1	
L6518	G0ZZ00002183	PEAKING COIL	1	
L6602, 03	G0ZZ00002183	PEAKING COIL	2	
L6607, 08	J0JJC0000021	CHIP INDUCTOR	2	
L6611-15	G0A1R0L00001	CHOKE COIL	5	
L6618-21	G0ZZ00002183	PEAKING COIL	4	
L6623-29	G0ZZ00002183	PEAKING COIL	7	
L6636-51	G0ZZ00002183	PEAKING COIL	16	
L6661, 62	J0JJC0000021	CHIP INDUCTOR	2	
L6701-04	G0A1R0L00001	CHOKE COIL	4	
L6705-08	G0ZZ00002183	PEAKING COIL	4	
L6713	G0ZZ00002183	PEAKING COIL	1	
L6714	G0C101K00023	PEAKING COIL	1	
L6715-37	G0ZZ00002183	PEAKING COIL	23	
L6752-55	G0ZZ00002183	PEAKING COIL	4	
L6758, 59	J0JJC0000021	CHIP INDUCTOR	2	
L6761, 62	J0JJC0000021	CHIP INDUCTOR	2	
L6767	G0A1R0L00001	CHOKE COIL	1	
L6802	G0ZZ00002183	PEAKING COIL	1	
L6803	J0JJC0000011	CHIP INDUCTOR	1	
L6804-06	J0JJC0000021	CHIP INDUCTOR	3	
L6807, 08	G0ZZ00002183	PEAKING COIL	2	
L6816-23	J0JJC0000011	CHIP INDUCTOR	8	
L6825-28	TLPF097	CHOKE COIL	4	
L6832	G0ZZ00002183	PEAKING COIL	1	
L6900, 01	J0JJC0000021	CHIP INDUCTOR	2	
L6902	G0ZZ00002183	PEAKING COIL	1	
L6903	J0JJC0000011	CHIP INDUCTOR	1	
L6904, 05	G0ZZ00002183	PEAKING COIL	2	
L6906	J0JJC0000021	CHIP INDUCTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6916-23	J0JJC0000011	CHIP INDUCTOR	8	
L6925	TLPF097	CHOKE COIL	1	
L6930-33	TLPF097	CHOKE COIL	4	
L6947	G0ZZ00002183	PEAKING COIL	1	
L7101-08	J0JJC0000011	CHIP INDUCTOR	8	
L7201-06	J0JJC0000011	CHIP INDUCTOR	6	
L7301-08	J0JJC0000011	CHIP INDUCTOR	8	
L7401-08	J0JJC0000011	CHIP INDUCTOR	8	
L7501	G0C101K00023	PEAKING COIL	1	
L750102	J0JJC0000011	CHIP INDUCTOR	1	
L7502	G0A101ZA0038	CHOKE COIL	1	
L7503	J0JJC0000011	CHIP INDUCTOR	1	
L7503	TALL08N330KA	INDUCTION COIL	1	
L7504	G0C101K00023	PEAKING COIL	1	
L750402	J0JJC0000011	CHIP INDUCTOR	1	
L7505	G0A101ZA0038	CHOKE COIL	1	
L750602	J0JJC0000011	CHIP INDUCTOR	1	
L7506	TALL08N330KA	INDUCTION COIL	1	
L7507	G0C101K00023	PEAKING COIL	1	
L7508	G0A101ZA0038	CHOKE COIL	1	
L7509	G0A220GA0002	CHOKE COIL	1	
L7510	G0C101K00023	PEAKING COIL	1	
L7511	G0A101ZA0038	CHOKE COIL	1	
L7512	G0A220GA0002	CHOKE COIL	1	
L7513	G0C101K00023	PEAKING COIL	1	
L7514	G0A101ZA0038	CHOKE COIL	1	
L7515	G0A220GA0002	CHOKE COIL	1	
L7551	G0C101K00023	PEAKING COIL	1	
L7552	G0A101ZA0038	CHOKE COIL	1	
L7561	TALL08N221KA	INDUCTION COIL	1	
L7562	G0ZZ00001913	COIL	1	
L7563	TALL08N221KA	INDUCTION COIL	1	
L7581	TALL08N330KA	INDUCTION COIL	1	
L7582	G1C101M00018	INDUCTION COIL	1	
L7601-08	J0JJC0000011	CHIP INDUCTOR	8	
L9001-03	ELKE103FA	NOISE FILTER	3	
L9309	ELJFA1R0KF	CHIP COIL	1	
L9452	ELJFA1R0KF	CHIP COIL	1	
L9459	ELKE103FA	NOISE FILTER	1	
L9701	ELKE103FA	NOISE FILTER	1	
L9800	G1C1R5Z00002	INDUCTION COIL	1	
L9951-54	ELKE103FA	NOISE FILTER	4	
L9955	G1C470M00012	INDUCTOR COIL	1	
L9956	G1C1R5Z00002	INDUCTION COIL	1	
LF904	G0B123K00001	CHOKE COIL	1	△
LF909	G0B123K00001	CHOKE COIL	1	△
LF911	G0B353G00001	CHOKE COIL	1	△
LF915	G0B123K00001	CHOKE COIL	1	△
PA1	K1KA05A00139	5P CONNECTOR	1	
PA2	K1KA04A00140	40P CONNECTOR	1	
PA3	K1KA04A00195	4P CONNECTOR	1	
PA4	K1KA12A00176	12P CONNECTOR	1	
PA5	K1KA11A00073	11P CONNECTOR	1	
PA6	K1KA20A00180	20P CONNECTOR	1	
PA7	K1KA04A00242	4P CONNECTOR	1	
PA8	K1KA20A00180	20P CONNECTOR	1	
PA10A	TJS3A9890	9P CONNECTOR	1	
PA11	K1KA03A00172	3P CONNECTOR	1	
PA12	K1KA07A00056	7P CONNECTOR	1	
PA13-15	K1KA03A00172	3P CONNECTOR	3	
PA17	K1KA04A00242	4P CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
PA21	K1KA07A00056	7P CONNECTOR	1	
PA22	K1KA12A00176	12P CONNECTOR	1	
PA23	TJS3A9880	8P CONNECTOR	1	
PA24	K1KA07A00096	7P CONNECTOR	1	
PA25	K1KA04A00242	4P CONNECTOR	1	
PF1, F2	K1KA03A00181	3P CONNECTOR	2	
PF10	TJS118660	9P CONNECTOR	1	
Q002, 03	2SB709A	TRANSISTOR	2	TH-50PV30H/M/R
Q052, 53	2SB709A	TRANSISTOR	2	TH-50PV30H/M/R
Q080	2SB709A	TRANSISTOR	1	TH-50PV30A
Q082	2SB709A	TRANSISTOR	1	TH-50PV30A
Q300, 01	2SC2412K	TRANSISTOR	2	
Q305	2SD601A	TRANSISTOR	1	
Q990	2SD13280TL	TRANSISTOR	1	
Q1004	2SD601A	TRANSISTOR	1	
Q1007	2SD601A	TRANSISTOR	1	
Q1010	2SD601A	TRANSISTOR	1	
Q1013	2SD601A	TRANSISTOR	1	
Q1015	2SD601A	TRANSISTOR	1	
Q1019	2SD601A	TRANSISTOR	1	
Q1024-26	2SD601A	TRANSISTOR	3	
Q1225	2SB709A	TRANSISTOR	1	
Q1230	2SB709A	TRANSISTOR	1	
Q1233	2SD601A	TRANSISTOR	1	
Q1254, 55	2SD601A	TRANSISTOR	2	
Q1302-04	2SD601A	TRANSISTOR	3	
Q1310-12	2SD601A	TRANSISTOR	3	
Q1315-17	2SD601A	TRANSISTOR	3	
Q1320, 21	2SD601A	TRANSISTOR	2	
Q1325, 26	2SD601A	TRANSISTOR	2	
Q1327	2SD1030	TRANSISTOR	1	
Q1330	XN6501	TRANSISTOR	1	
Q1334, 35	2SD601A	TRANSISTOR	2	
Q1336, 37	2SB709A	TRANSISTOR	2	
Q1340	2SB709A	TRANSISTOR	1	
Q1342, 43	2SB709A	TRANSISTOR	2	
Q1351	2SK198R	FET	1	
Q1355	2SB709A	TRANSISTOR	1	
Q1359-61	2SB709A	TRANSISTOR	3	
Q1363	2SB709A	TRANSISTOR	1	
Q1600-02	2SD601A	TRANSISTOR	3	
Q1750-53	2SD601A	TRANSISTOR	4	
Q1754	UN2215	TRANSISTOR	1	
Q1755	2SB709A	TRANSISTOR	1	
Q1756	2SD601A	TRANSISTOR	1	
Q1757	XN6501	TRANSISTOR	1	
Q1758	2SD601A	TRANSISTOR	1	
Q1759	2SB709A	TRANSISTOR	1	
Q1760	2SD601A	TRANSISTOR	1	
Q1761, 62	2SB709A	TRANSISTOR	2	
Q1763	2SD601A	TRANSISTOR	1	
Q1764, 65	2SD1030	TRANSISTOR	2	
Q1800	UN2215	TRANSISTOR	1	
Q1850, 51	2SD601A	TRANSISTOR	2	
Q2003, 04	2SB709A	TRANSISTOR	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q2006-08	2SD601A	TRANSISTOR	3	TH-50PV30A
Q2012	2SD601A	TRANSISTOR	1	TH-50PV30A
Q2202	2SD601A	TRANSISTOR	1	
Q2203, 04	2SB709A	TRANSISTOR	2	
Q2301, 02	2SD1266A	TRANSISTOR	2	
Q2303-06	2SD601A	TRANSISTOR	4	
Q2308, 09	2SD601A	TRANSISTOR	2	
Q2311	2SD601A	TRANSISTOR	1	
Q2313, 14	2SD1802ST	TRANSISTOR	2	
Q3100	2SB709A	TRANSISTOR	1	
Q3101, 02	2SD601A	TRANSISTOR	2	
Q3170-75	2SD601A	TRANSISTOR	6	
Q3202	2SB709A	TRANSISTOR	1	TH-50PV30H/M/R
Q3203	2SB709A	TRANSISTOR	1	
Q3208-11	2SB709A	TRANSISTOR	4	
Q3214	2SB709A	TRANSISTOR	1	
Q3220-23	UN5211	TRANSISTOR	4	TH-50PV30H/M/R
Q6001	2SA207700L	TRANSISTOR	1	
Q6003	2SA207700L	TRANSISTOR	1	
Q6005, 06	2SC584500L	TRANSISTOR	2	
Q6008	2SA207700L	TRANSISTOR	1	
Q6010	2SA207700L	TRANSISTOR	1	
Q6431	B1BBCJ000003	TRANSISTOR	1	
Q6432	2SB0709A	TRANSISTOR	1	
Q6435	2SD601A	TRANSISTOR	1	
Q6451	B1BBCJ000003	TRANSISTOR	1	
Q6452	2SB0709A	TRANSISTOR	1	
Q6454	2SD814A	TRANSISTOR	1	
Q6455	2SD601A	TRANSISTOR	1	
Q6471	B1BBCJ000003	TRANSISTOR	1	
Q6472	2SB0709A	TRANSISTOR	1	
Q6474	2SD814A	TRANSISTOR	1	
Q6475-77	2SD601A	TRANSISTOR	3	
Q6491	2SD1263A	TRANSISTOR	1	
Q6492	2SC1473A	TRANSISTOR	1	
Q6511, 12	B1DFGL000005	TRANSISTOR	2	
Q6513	2SK620	FET	1	
Q6520	2SD601A	TRANSISTOR	1	
Q6521	B1DEDS000001	TRANSISTOR	1	
Q6522	2SK620	FET	1	
Q6523	2SB1073001TV	TRANSISTOR	1	
Q6524, 25	2SD2185	TRANSISTOR	2	
Q6526	2SB1073001TV	TRANSISTOR	1	
Q6530-39	2SK349400L	FET	10	
Q6540-49	2SK373100L	TRANSISTOR	10	
Q6550	2SC1473A	TRANSISTOR	1	
Q6551	2SD601A	TRANSISTOR	1	
Q6552	B1DADU000001	TRANSISTOR	1	
Q6553, 54	2SK349400L	FET	2	
Q6555, 56	2SK373100L	TRANSISTOR	2	
Q6557, 58	2SK620	FET	2	
Q6561	2SB1073001TV	TRANSISTOR	1	
Q6562-64	B1DEDS000001	TRANSISTOR	3	
Q6581	2SD601A	TRANSISTOR	1	
Q6601-10	B1DEJM000005	TRANSISTOR	10	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6611	2SD2185	TRANSISTOR	1	
Q6612	2SB1073001TV	TRANSISTOR	1	
Q6613	2SD2185	TRANSISTOR	1	
Q6614	2SB1073001TV	TRANSISTOR	1	
Q6616, 17	2SK620	FET	2	
Q6621, 22	B1DEJM000003	TRANSISTOR	2	
Q6624, 25	B1DEJM000003	TRANSISTOR	2	
Q6627	2SD2185	TRANSISTOR	1	
Q6628	2SB1073001TV	TRANSISTOR	1	
Q6629	2SD2185	TRANSISTOR	1	
Q6630	2SB1073001TV	TRANSISTOR	1	
Q6641, 42	2SK3192000LB	FET	2	
Q6645	2SD2185	TRANSISTOR	1	
Q6646	2SB1073001TV	TRANSISTOR	1	
Q6671	2SB940A	TRANSISTOR	1	
Q6672	2SD1263A	TRANSISTOR	1	
Q6673	2SC1473A	TRANSISTOR	1	
Q6701	2SD2185	TRANSISTOR	1	
Q6702	2SB1073001TV	TRANSISTOR	1	
Q6711-20	B1DEJM000005	TRANSISTOR	10	
Q6721-24	B1DEJM000003	TRANSISTOR	4	
Q6725	2SK620	FET	1	
Q6727, 28	B1DFHM000002	TRANSISTOR	2	
Q6729, 30	2SK326800L	FET	2	
Q6731	2SD1263A	TRANSISTOR	1	
Q6732	2SD2185	TRANSISTOR	1	
Q6733	2SB1073001TV	TRANSISTOR	1	
Q6734	2SD2185	TRANSISTOR	1	
Q6735	2SB1073001TV	TRANSISTOR	1	
Q6736	2SD2185	TRANSISTOR	1	
Q6737	2SB1073001TV	TRANSISTOR	1	
Q6738, 39	2SC1473A	TRANSISTOR	2	
Q6741	2SD601A	TRANSISTOR	1	
Q6744	2SD2185	TRANSISTOR	1	
Q6745	2SB1073001TV	TRANSISTOR	1	
Q6811-16	2SK326900L	FET	6	
Q6817	2SD2185	TRANSISTOR	1	
Q6818	2SB1073001TV	TRANSISTOR	1	
Q6819	2SD2185	TRANSISTOR	1	
Q6820	2SB1073001TV	TRANSISTOR	1	
Q6821	2SB1193000LB	TRANSISTOR	1	
Q6822	2SD2185	TRANSISTOR	1	
Q6823	2SB1073001TV	TRANSISTOR	1	
Q6824	2SK326900L	FET	1	
Q6911-16	2SK326900L	FET	6	
Q6917	2SD2185	TRANSISTOR	1	
Q6918	2SB1073001TV	TRANSISTOR	1	
Q6919	2SD2185	TRANSISTOR	1	
Q6920	2SB1073001TV	TRANSISTOR	1	
Q6921	2SB1193000LB	TRANSISTOR	1	
Q6922	2SD2185	TRANSISTOR	1	
Q6923	2SB1073001TV	TRANSISTOR	1	
Q6924	2SK326900L	FET	1	
Q7401, 02	2SB709A	TRANSISTOR	2	
Q7501	B1DHDD000012	TRANSISTOR	1	
Q7502	UN2214	TRANSISTOR	1	
Q7503	B1DHDD000012	TRANSISTOR	1	
Q7504, 05	UN2214	TRANSISTOR	2	
Q7506	B1DHDD000012	TRANSISTOR	1	
Q7507	UN5211	TRANSISTOR	1	
Q7509	2SD601A	TRANSISTOR	1	
Q7510	UN2214	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q7541-43	2SB709A	TRANSISTOR	3	
Q7544	2SD601A	TRANSISTOR	1	
Q7552, 53	UN221N	TRANSISTOR	2	
Q7561	UN2214	TRANSISTOR	1	
Q7562, 63	2SD601A	TRANSISTOR	2	
Q7581	UN5211	TRANSISTOR	1	
Q7582	B1ABPF000005	TRANSISTOR	1	
Q9001	2SD601A	TRANSISTOR	1	
Q9301	2SD601A	TRANSISTOR	1	
Q9400	2SD601A	TRANSISTOR	1	
Q9591-94	2SD601A	TRANSISTOR	4	
Q9596-99	2SD601A	TRANSISTOR	4	
Q9601, 02	2SD601A	TRANSISTOR	2	
Q9701	2SD601A	TRANSISTOR	1	
Q9702	2SB1440	TRANSISTOR	1	
Q9703, 04	2SK2731T146	TRANSISTOR	2	
Q9706	2SK2731T146	TRANSISTOR	1	
Q9707	2SB709A	TRANSISTOR	1	
Q9708, 09	2SD601A	TRANSISTOR	2	
Q9710	2SB709A	TRANSISTOR	1	
Q9714-17	2SD601A	TRANSISTOR	4	
Q9719	2SK2731T146	TRANSISTOR	1	
R002	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	TH-50PV30H/M/R
R003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
R005	ERJ6GEYJ561	M 560 OHM, J, 1/10W	1	TH-50PV30H/M/R
R006	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	TH-50PV30H/M/R
R007	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-50PV30H/M/R
R008, 09	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	TH-50PV30H/M/R
R052	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	TH-50PV30H/M/R
R053	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
R055	ERJ6GEYJ561	M 560 OHM, J, 1/10W	1	TH-50PV30H/M/R
R056	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	TH-50PV30H/M/R
R057	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-50PV30H/M/R
R058, 59	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	TH-50PV30H/M/R
R080	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	TH-50PV30A
R081	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	TH-50PV30A
R083	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	TH-50PV30A
R084	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	TH-50PV30A
R085	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-50PV30A
R087	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30A
R089	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	TH-50PV30A
R300	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R301	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R302	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R304	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R306	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R307	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R310	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R311	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R312	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R313	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R314	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R317	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R901, 02	ERC122GK105	S 1MOHM, K, 1/2W	2	△
R904	ERF7ZK3R3	W 3.3 OHM, K, 7W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R920, 21	ERG1FJS104D	M 100KOHM, J, 1W	2	
R922	ERDS2TJ224	C 220KOHM, J, 1/4W	1	
R923	ERG2FJS100D	M 10 OHM, J, 2W	1	
R924	ERDS1FJ3R3	C 3.3 OHM, J, 1/2W	1	
R927	ERJ6GEYJ561	M 560 OHM, J, 1/10W	1	
R928	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R931	ERX12SJR68	M0.68 OHM, J, 1/2W	1	
R932	ERX12SJR82	M0.82 OHM, J, 1/2W	1	
R933	ERDS1FJ181	C 180 OHM, J, 1/2W	1	
R934	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R935	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R936	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R938	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R939	ERX12SJR82	M0.82 OHM, J, 1/2W	1	
R940	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R970	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1	
R971	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R972	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R973	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R974	ERJ6ENF1692	M16.9KOHM, 1/10W	1	
R975	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
R990	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R992	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R993, 94	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R1000	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1005	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1016, 17	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1023	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1025	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1027	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1028	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1030	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1031	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1033, 34	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1037	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1038, 39	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R1040	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1043-48	ERJ3GEYJ103	M 10KOHM, J, 1/16W	6	
R1049	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R1051	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R1052, 53	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1054	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1055-57	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R1058, 59	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1063	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1065, 66	ERJ3EKF3901	M 3.9KOHM, 1/16W	2	
R1067	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1068	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1069	ERJ3GEYJ105	M 1MOHM, J, 1/16W	1	
R1070	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1071, 72	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1073	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1075	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1079	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1081	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1082	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1083	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1090	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1091	ERJ3GEYJ391	M 390 OHM, J, 1/16W	1	
R1092	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1093	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R1095	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1099, 00	EXB38V680J	RESISTOR ARRAY	2	
R1102	EXB38V680J	RESISTOR ARRAY	1	
R1107	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1108	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1109	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1110	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1111	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R1112, 13	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R1114	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1119, 20	ERJ3GEYJ563	M 56KOHM, J, 1/16W	2	
R1124	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1125	EXB38V680J	RESISTOR ARRAY	1	
R1126	ERJ3GEYJ273	M 27KOHM, J, 1/16W	1	
R1129	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1130	EXB38V680J	RESISTOR ARRAY	1	
R1132	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R1134	EXB38V680J	RESISTOR ARRAY	1	
R1137	EXB38V680J	RESISTOR ARRAY	1	
R1138	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1140	EXB38V680J	RESISTOR ARRAY	1	
R1141	ERJ3GEYJ820	M 82 OHM, J, 1/16W	1	
R1142	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1143	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1145, 46	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1147	EXB38V680J	RESISTOR ARRAY	1	
R1148-51	TAJAAH0101JV	M 100 OHM, J, 1/16W	4	
R1152	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1153-55	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R1156	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1157	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1158, 59	EXB38V680J	RESISTOR ARRAY	2	
R1160	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1161	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R1162-64	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R1167	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1169	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1170, 71	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1172	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R1174-76	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	3	
R1177	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1178	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1179	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1180	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1181	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1182, 83	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1184	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1185	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R1186	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1187	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1188-90	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R1192, 93	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1195-97	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R1202, 03	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R1205	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R1207	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1208-10	ERJ3GEYJ820	M 82 OHM, J, 1/16W	3	
R1212	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R1213	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1214	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R1215	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1222	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1224	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1225, 26	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1227	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1228	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1229	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1230	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1231	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R1232	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1233	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1234	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1235, 3 6	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	2	
R1237	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1242, 4 3	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R1245, 4 6	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R1249	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	
R1254	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R1255	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1256	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R1257	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1258	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1259, 6 0	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1263, 6 4	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1266, 6 7	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R1268	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1270- 79	TAJAAH0101JV	M 100 OHM, J, 1/16W	10	
R1280, 8 1	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R1282- 84	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R1285	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1286, 8 7	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1290	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1292	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1301	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1303	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1304	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R1305	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1306	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R1307	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1308	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R1310	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R1311, 1 2	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R1313	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1317	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1318	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1319	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1320	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1321	ERJ3GEYJ681	M 680 OHM, J, 1/16W	1	
R1322	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1323	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1324	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1325	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1326	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R1328	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1330	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1332	ERJ3EKF4700	M 470 OHM, 1/16W	1	
R1333, 3 4	ERJ3EKF2700	M 270 OHM, 1/16W	2	
R1338, 3 9	ERJ3EKF1200	M 120 OHM, 1/16W	2	
R1344, 4 5	ERJ3EKF6801	M 6.8KOHM, 1/16W	2	
R1348, 4 9	ERJ3GEYJ821	M 820 OHM, J, 1/16W	2	
R1353	ERJ3EKF2100	M 210 OHM, 1/16W	1	
R1357	ERJ3EKF1331	M 13.3KOHM, 1/16W	1	
R1360	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1366- 69	ERJ3GEYJ223	M 22KOHM, J, 1/16W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1370, 7 1	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R1372- 75	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R1380, 8 1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1382	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R1383, 8 4	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1385	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R1386	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R1387	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1388	ERJ3GEYJ681	M 680 OHM, J, 1/16W	1	
R1389	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1390	ERJ3GEYJ681	M 680 OHM, J, 1/16W	1	
R1391	ERJ3EKF2400	M 240 OHM, 1/16W	1	
R1392	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R1393	ERJ3EKF2400	M 240 OHM, 1/16W	1	
R1394	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R1395	ERJ3GEYJ121	M 120 OHM, J, 1/16W	1	
R1396	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1397	ERJ3GEYJ152	M 1.5KOHM, J, 1/16W	1	
R1398	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1399, 0 0	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1401	ERJ3EKF2200	M 220 OHM, 1/16W	1	
R1402	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R1403	ERJ3EKF2200	M 220 OHM, 1/16W	1	
R1406	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R1407	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1408	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R1409	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1410	ERJ3EKF1101	M 1.1KOHM, 1/16W	1	
R1411	ERJ3EKF1401	M 1.4KOHM, 1/16W	1	
R1412	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1413	ERJ3EKF2550	M 255 OHM, 1/16W	1	
R1414	ERJ3EKF1101	M 1.1KOHM, 1/16W	1	
R1415	ERJ3EKF1401	M 1.4KOHM, 1/16W	1	
R1416	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R1417	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R1418	ERJ3EKF43R0	M 43 OHM, 1/16W	1	
R1419	ERJ3EKF1020	M 102 OHM, 1/16W	1	
R1420, 2 1	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R1422	ERJ3EKF47R0	M 47 OHM, 1/16W	1	
R1423, 2 4	ERJ3EKF3901	M 3.9KOHM, 1/16W	2	
R1435	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1439	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1443	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1446	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1447	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1459	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R1461	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R1464	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1467	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1468, 6 9	ERJ3GEYJ333	M 33KOHM, J, 1/16W	2	
R1470	ERJ3GEYJ823	M 82KOHM, J, 1/16W	1	
R1472	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R1474	ERJ3GEYJ105	M 1MOHM, J, 1/16W	1	
R1476	ERJ3GEYJ182	M 1.8KOHM, J, 1/16W	1	
R1477, 7 8	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1479	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R1481	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R1484	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R1485	ERJ3GEYJ822	M 8.2KOHM, J, 1/16W	1	
R1486	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R1487	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1488, 8 9	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R1490	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R1491	ERJ3EKF1401	M 1.4KOHM, 1/16W	1	
R1492	ERJ3EKF1101	M 1.1KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1493	ERJ3EKF33R0	M 33 OHM, 1/16W	1	
R1494	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R1495	ERJ3EKF75R0	M 0.75HM, 1/16W	1	
R1496	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R1497	ERJ3EKF1401	M 1.4KOHM, 1/16W	1	
R1498	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R1499	ERJ3EKF1101	M 1.1KOHM, 1/16W	1	
R1500	ERJ3EKF33R0	M 33 OHM, 1/16W	1	
R1501	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R1502, 03	ERJ3EKF1401	M 1.4KOHM, 1/16W	2	
R1504	ERJ3EKF75R0	M 0.75HM, 1/16W	1	
R1505	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R1507	ERJ3EKF33R0	M 33 OHM, 1/16W	1	
R1509	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R1510	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R1511	ERJ3EKF75R0	M 0.75HM, 1/16W	1	
R1512, 13	ERJ3EKF1101	M 1.1KOHM, 1/16W	2	
R1514	ERJ3GEYJ271	M 270 OHM, J, 1/16W	1	
R1515	ERJ3EKF33R0	M 33 OHM, 1/16W	1	
R1516	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1517	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R1518	ERJ3EKF33R0	M 33 OHM, 1/16W	1	
R1519	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R1520	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R1521	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R1522	ERJ3EKF33R0	M 33 OHM, 1/16W	1	
R1526	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1528	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1529	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1531	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1532, 33	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1534	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R1535	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1536	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R1537	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1539	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R1540, 41	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R1542	ERJ3GEYJ162	M 1.6KOHM, J, 1/16W	1	
R1545	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R1546, 47	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1548	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R1549, 50	ERJ3GEYJ121	M 120 OHM, J, 1/16W	2	
R1551	ERJ3GEYJ162	M 1.6KOHM, J, 1/16W	1	
R1552	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1553	ERJ3GEYJ242	M 2.4KOHM, J, 1/16W	1	
R1554, 55	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	2	
R1557-59	ERJ3GEYJ121	M 120 OHM, J, 1/16W	3	
R1562, 63	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1570	ERJ3GEYJ152	M 1.5KOHM, J, 1/16W	1	
R1573-76	ERJ3GEYJ471	M 470 OHM, J, 1/16W	4	
R1578, 79	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1604, 05	ERJ3GEYJ471	M 470 OHM, J, 1/16W	2	
R1606-08	ERJ3EKF33R0	M 33 OHM, 1/16W	3	
R1609-11	ERJ3EKF1500	M 150 OHM, 1/16W	3	
R1612-14	ERJ3EKF33R0	M 33 OHM, 1/16W	3	
R1615	ERJ3EKF2200	M 220 OHM, 1/16W	1	
R1623, 24	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R1626	ERJ3EKF1401	M 1.4KOHM, 1/16W	1	
R1627	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R1628	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1629	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R1630	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R1634	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1635	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1639	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1647	ERJ6GEYJ271	M 270 OHM, J, 1/10W	1	
R1649, 50	ERJ6GEYJ271	M 270 OHM, J, 1/10W	2	
R1652, 53	EXB38VR000	RESISTOR ARRAY	2	
R1654-61	EXB38V820J	RESISTOR ARRAY	8	
R1662, 63	EXB38VR000	RESISTOR ARRAY	2	
R1664	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1665-68	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
R1669, 70	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1672-79	EXB38V820J	RESISTOR ARRAY	8	
R1680	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1681	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1682	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1683-85	ERJ6GEYJ391	M 390 OHM, J, 1/10W	3	
R1686	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1687-89	ERJ6GEYJ121	M 120 OHM, J, 1/10W	3	
R1694	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1700, 01	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R1702	ERJ3GEYJ821	M 820 OHM, J, 1/16W	1	
R1703	ERJ3GEYJ681	M 680 OHM, J, 1/16W	1	
R1704	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1705	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1706	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1707	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1708, 09	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1710-13	EXB38V221J	RESISTOR ARRAY	4	
R1714-17	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R1719	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1721	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1722	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R1723	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1724	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1728, 29	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1731, 32	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R1734-36	ERJ3GEYJ331	M 330 OHM, J, 1/16W	3	
R1737	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1739	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1741-44	ERJ3GEYJ220	M 22 OHM, J, 1/16W	4	
R1745	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1746-48	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R1750	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1751	ERJ3EKF5110	M 511 OHM, 1/16W	1	
R1752	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1753	ERJ3EKF1101	M 1.1KOHM, 1/16W	1	
R1755	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1756	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R1757	ERJ3EKF1200	M 120 OHM, 1/16W	1	
R1758	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1759	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1760	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R1761	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R1762	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R1765	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1766	ERJ3EKF1500	M 150 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1767	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1768	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R1769	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	
R1770	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1771	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R1772	ERJ3GEYJ821	M 820 OHM, J, 1/16W	1	
R1773	ERJ3EKF39R0	M 39 OHM, 1/16W	1	
R1774	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1775	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R1776	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1777	ERJ3EKF1200	M 120 OHM, 1/16W	1	
R1778	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1779	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1780	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R1781	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R1782	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R1783	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1784	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R1785	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1787	ERJ3EKF20R0	M 20 OHM, 1/16W	1	
R1790	ERJ3EKF2611	M2.61KOHM, 1/16W	1	
R1791	ERJ3GEYJ681	M 680 OHM, J, 1/16W	1	
R1792	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R1793	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R1794	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	
R1795	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1796	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R1797	ERJ3GEYJ821	M 820 OHM, J, 1/16W	1	
R1798	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R1799	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1807	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R1817	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R1827	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R1850, 5 1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1852	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1853	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1854	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1855	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1856, 5 7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1858- 60	ERJ3GEYJ331	M 330 OHM, J, 1/16W	3	
R1861- 63	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R1866- 69	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R1870, 7 1	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R1872	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1875	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1877	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1878, 7 9	ERJ3GEYJ331	M 330 OHM, J, 1/16W	2	
R1882	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R1883	ERJ3GEYJ271	M 270 OHM, J, 1/16W	1	
R1884	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1885	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R1886, 8 7	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	2	
R1888	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1889	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R1890	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R1892	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R1893	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	
R1896	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1899	ERJ3EKF3301	M 3.3KOHM, 1/16W	1	
R1901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1902	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R1903	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R1904	ERJ3EKF8200	M 820 OHM, 1/16W	1	
R1905- 08	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R1909	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1910- 33	ERJ3GEYJ820	M 82 OHM, J, 1/16W	24	
R1934	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1935	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1936	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1937	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	
R1938	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R1939	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R1940	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1941	EXB38V820J	RESISTOR ARRAY	1	
R1942	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1943	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1944	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R1945	EXB38V820J	RESISTOR ARRAY	1	
R1946- 48	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	3	
R1949	EXB38V820J	RESISTOR ARRAY	1	
R1952	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R1953	EXB38V820J	RESISTOR ARRAY	1	
R1954	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R1955, 5 6	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1957	EXB38V820J	RESISTOR ARRAY	1	
R1958, 5 9	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1960	ERJ3GEYJ820	M 82 OHM, J, 1/16W	1	
R1961	EXB38V820J	RESISTOR ARRAY	1	
R1963, 6 4	ERJ3GEYJ330	M 33 OHM, J, 1/16W	2	
R1965	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1966, 6 7	ERJ3GEYJ152	M 1.5KOHM, J, 1/16W	2	
R1968- 70	ERJ3EKF75R0	M 0.75HM, 1/16W	3	
R1971	ERJ3GEYJ152	M 1.5KOHM, J, 1/16W	1	
R1972- 74	ERJ3GEYJ102	M 1KOHM, J, 1/16W	3	
R1975, 7 6	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R1989, 9 0	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R1991- 94	ERJ3GEYJ102	M 1KOHM, J, 1/16W	4	
R2001, 0 2	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R2003	ERJ3GEYJ183	M 18KOHM, J, 1/16W	1	
R2004	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2006, 0 7	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	2	
R2009, 1 0	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R2014- 17	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
R2021	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	TH-50PV30A
R2022	ERJ6GEYJ561	M 560 OHM, J, 1/10W	1	TH-50PV30A
R2023	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2025	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	TH-50PV30A
R2026	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1	TH-50PV30A
R2027	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2029	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	TH-50PV30A
R2030	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	TH-50PV30A
R2031	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	TH-50PV30A
R2032	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	TH-50PV30A
R2033	ERJ6ENF1781	M1.78KOHM, 1/10W	1	
R2034	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R2046	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	TH-50PV30A
R2047, 4 8	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2049, 5 0	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2052	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	TH-50PV30A
R2054	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	TH-50PV30A
R2055	ERJ3GEYJ561	M 560 OHM, J, 1/16W	1	TH-50PV30A
R2058, 5 9	J0JCC0000241	CHIP INDUCTOR	2	
R2200, 0 1	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2203	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2204, 05	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2206, 07	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2208, 09	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2210, 11	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R2220, 21	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R2222	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R2225, 26	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	2	
R2245	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2250, 51	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2253	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2254	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2256	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2257	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2258	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2259	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2260	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2261	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2279	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2282	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2283	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2284	ERJ3GEYJ273	M 27KOHM, J, 1/16W	1	
R2286	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2295	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2296	ERJ3GEYJ273	M 27KOHM, J, 1/16W	1	
R2305, 06	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	2	
R2307, 08	ERJ6GEYJ202	M 2KOHM, J, 1/10W	2	
R2311-16	ERDS1FJ2R2	C 2.2 OHM, J, 1/2W	6	
R2317, 18	ERJ6GEYJ271	M 270 OHM, J, 1/10W	2	
R2319, 20	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	2	
R2321, 22	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R2323-28	ERDS1FJ2R2	C 2.2 OHM, J, 1/2W	6	
R2329, 30	ERJ6GEYJ203	M 20KOHM, J, 1/10W	2	
R2331, 32	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2333, 34	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2335, 36	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2337, 38	ERJ6GEYJ270	M 27 OHM, J, 1/10W	2	
R2339, 40	ERJ8GEYJ392	M 3.9KOHM, J, 1/8W	2	
R2346, 47	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R2348	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R2371	ERJ6GEYJ184	M 180KOHM, J, 1/10W	1	
R2372	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2373	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R2374	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R2375	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R2376	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2377	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R2378	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R2382, 83	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2385	ERJ6GEYJ821	M 820 OHM, J, 1/10W	1	
R2390	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2391	ERJ6GEYJ682	M 6.8KOHM, J, 1/10W	1	
R2392	ERJ6GEYJ273	M 27KOHM, J, 1/10W	1	
R2393	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2395	ERJ6GEYJ273	M 27KOHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2396	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2398	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2401, 02	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R2403, 04	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2405, 06	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R2408	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2409	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2412	ERJ3GEYJ184	M 180KOHM, J, 1/16W	1	
R2413	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2414	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2415	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2416	ERJ3GEYJ184	M 180KOHM, J, 1/16W	1	
R2417	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2418	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2419	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2420	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2421, 22	ERJ3GEYJ363	M 36KOHM, J, 1/16W	2	
R2423	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2427, 28	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R2430, 31	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2434, 35	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2439	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2440	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2442	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2443	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2444, 45	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R2494	ERJ12YJ821	M 820 OHM, J, 1/2W	1	
R3104, 05	ERJ8ENF75R0	M 75 OHM, 1/8W	2	
R3106	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R3107	ERJ8ENF75R0	M 75 OHM, 1/8W	1	
R3109	ERJ8ENF75R0	M 75 OHM, 1/8W	1	
R3112	ERJ8ENF75R0	M 75 OHM, 1/8W	1	
R3116	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R3117-20	ERJ3GEYJ223	M 22KOHM, J, 1/16W	4	
R3121	ERJ8ENF75R0	M 75 OHM, 1/8W	1	
R3122, 23	ERJ3GEYJ104	M 100KOHM, J, 1/16W	2	
R3124, 25	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R3126	ERJ8GEYJ331	M 330 OHM, J, 1/8W	1	
R3127	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R3130	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R3132-34	ERJ3GEYJ333	M 33KOHM, J, 1/16W	3	
R3137	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3143	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R3145, 46	ERJ3GEYJ333	M 33KOHM, J, 1/16W	2	
R3147	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R3148, 49	ERJ3GEYJ821	M 820 OHM, J, 1/16W	2	
R3150, 51	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R3156, 57	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3158-63	ERJ8ENF75R0	M 75 OHM, 1/8W	6	
R3174-79	ERJ3GEYJ333	M 33KOHM, J, 1/16W	6	
R3184-86	ERJ3GEYJ820	M 82 OHM, J, 1/16W	3	
R3187-89	ERJ3GEYJ471	M 470 OHM, J, 1/16W	3	
R3204	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	TH-50PV30H/M/R
R3205	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3207	ERJ3EKF5600	M 560 OHM, 1/16W	1	TH-50PV30H/M/R
R3208	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PV30H/M/R
R3209	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3210	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R3214	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3215	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	TH-50PV30H/M/R
R3216	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R3220-22	ERJ3GEYJ820	M 82 OHM, J, 1/16W	3	
R3223-25	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R3227-36	ERJ3GEYJ221	M 220 OHM, J, 1/16W	10	
R3237	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R3238-41	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
R3242	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R3243-46	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
R3247-50	TAJAAH0101JV	M 100 OHM, J, 1/16W	4	
R3251-53	ERJ3GEYJ221	M 220 OHM, J, 1/16W	3	
R3255	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R3259	ERJ3EKF7500	M 750 OHM, 1/16W	1	
R3260, 61	ERJ3GEYJ104	M 100KOHM, J, 1/16W	2	
R3262-64	ERJ3EKF7500	M 750 OHM, 1/16W	3	
R3265, 66	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R3267, 68	ERJ3EKF6980	M 698 OHM, 1/16W	2	
R3269	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R3270, 71	ERJ3EKF6980	M 698 OHM, 1/16W	2	
R3275-77	ERJ3GEYJ471	M 470 OHM, J, 1/16W	3	
R3280	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R3281, 82	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3288, 89	ERJ3GEYJ123	M 12KOHM, J, 1/16W	2	
R3290	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R3291, 92	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R3293	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R3296, 97	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	TH-50PV30H/M/R
R3298	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R3299, 00	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	TH-50PV30H/M/R
R3301	ERJ3GEYJ152	M 1.5KOHM, J, 1/16W	1	
R3302-04	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R3701	ERJ6GEYJ683	M 68KOHM, J, 1/10W	1	
R3702	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R3703	ERJ6GEYJ682	M 6.8KOHM, J, 1/10W	1	
R3704, 05	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3706	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R3711	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R3714	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3715, 16	ERJ6GEYJ184	M 180KOHM, J, 1/10W	2	
R3720, 21	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R3723, 24	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R3725, 26	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3751	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6001, 02	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6003, 04	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6005-07	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R6008	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6009	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R6010-25	TAJAAH0470JV	M 47 OHM, J, 1/16W	16	
R6026	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6027-30	ERJ1TYJ100	M 100OHM, J, 1W	4	
R6031	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6032-37	ERJ3GEYJ223	M 22KOHM, J, 1/16W	6	
R6038-41	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R6042, 43	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R6044-54	TAJAAH0470JV	M 47 OHM, J, 1/16W	11	
R6055, 56	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R6057-64	TAJAAH0470JV	M 47 OHM, J, 1/16W	8	
R6065-72	TAJAAH0101JV	M 100 OHM, J, 1/16W	8	
R6073, 74	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6075	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R6076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6079	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R6081	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R6082	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R6084	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R6085-87	ERJ3GEYJ220	M 22 OHM, J, 1/16W	3	
R6089, 90	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R6091, 92	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R6093-96	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	4	
R6101	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6103	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6105	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6107, 08	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6110, 11	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6113, 14	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6116, 17	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6119, 20	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6122, 23	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6125	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R6126, 27	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6129	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R6130, 31	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6133	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R6134, 35	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6137	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R6138	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R6139	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6141, 42	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6144, 45	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6147	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R6148	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6150	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6151	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R6152-55	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R6157	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6159	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6160-99	ERJ3GEYJ220	M 22 OHM, J, 1/16W	40	
R6200-10	ERJ3GEY0R00	M 0 OHM, 1/16W	11	
R6211	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R6212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6213, 14	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R6215-20	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R6221	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R6222, 23	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R6224	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6225	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6227	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6228	D1HG4708A002	NETWORK RESISTER	1	
R6236	D1HG4708A002	NETWORK RESISTER	1	
R6244-47	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R6248, 49	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R6250-85	TAJAAH0101JV	M 100 OHM, J, 1/16W	36	
R6286-90	ERJ3GEYJ103	M 10KOHM, J, 1/16W	5	
R6291	ERJ3GEYJ750	M 75 OHM, J, 1/16W	1	
R6292	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R6293	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R6294	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R6295	ERJ3GEYJ750	M 75 OHM, J, 1/16W	1	
R6296	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6297	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R6299	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R6300	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R6301	ERJ3EKF6801	M 6.8KOHM, 1/16W	1	
R6302	ERJ3EKF5101	M 5.1KOHM, 1/16W	1	
R6303	ERJ3GEYJ241	M 240 OHM, J, 1/16W	1	
R6305, 06	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6308	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6309, 10	ERJ3GEYJ333	M 33KOHM, J, 1/16W	2	
R6312	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R6313	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R6314	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6316	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R6317-20	TAJAAH0101JV	M 100 OHM, J, 1/16W	4	
R6321-24	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R6325	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R6336	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6337	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6347	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6348	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6350, 51	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R6401-06	ERJ6GEYJ221	M 220 OHM, J, 1/10W	6	
R6407, 08	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6409	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6410	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6411	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6412	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6421-26	ERJ6GEYJ221	M 220 OHM, J, 1/10W	6	
R6427-30	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R6431, 32	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R6433	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6434	ERDS1FJ221	C 220 OHM, J, 1/2W	1	
R6435	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6436	ERJ6ENF1543	M 154KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6437	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6438	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6439, 40	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	2	
R6441, 42	ERJ12YJ1R0	M 1 OHM, J, 1/2W	2	
R6443	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6444	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6445, 46	ERJ6GEYJ151	M 150 OHM, J, 1/10W	2	
R6448	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6449	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R6451, 52	ERJ12Y0R00	M 0 OHM, J, 1/2W	2	
R6453	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6454	ERDS1FJ221	C 220 OHM, J, 1/2W	1	
R6455	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6456	ERJ6ENF4533	M 453KOHM, 1/10W	1	
R6457, 58	ERJ6ENF1002	M 10KOHM, 1/10W	2	
R6459	ERJ14YJ104	M 100KOHM, J, 1/4W	1	
R6460	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6463	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6464	ERG2FJS273D	M 27KOHM, J, 2W	1	
R6465	ERX2FJS8R2D	M 8.2 OHM, J, 2W	1	
R6466	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6467	ERJ6GEYJ182	M 1.8KOHM, J, 1/10W	1	
R6468	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6469	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R6470	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R6471	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R6473	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6474	ERDS1FJ221	C 220 OHM, J, 1/2W	1	
R6475	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6476	ERJ6ENF3243	M 324KOHM, 1/10W	1	
R6478	ERJ6ENF6981	M 6.98KOHM, 1/10W	1	
R6479	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6480	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6482	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6483	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6484	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6485, 86	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6487	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6488	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6489	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6490	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6491	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6492, 93	ERJ6ENF2203	M 220KOHM, 1/10W	2	
R6494	ERJ6ENF1432	M 14.3KOHM, 1/10W	1	
R6495	ERJ6ENF5231	M 5.23KOHM, 1/10W	1	
R6496	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6497	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6498, 99	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
R6500	ERJ6GEYJ182	M 1.8KOHM, J, 1/10W	1	
R6501-09	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	9	
R6510	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6511, 12	ERX3FJS2R2D	M 2.2 OHM, J, 3W	2	
R6513	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6514	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6515	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6516	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6517	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6518	ERJ6GEYF103	M 10KOHM, F, 1/10W	1	
R6519	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6520	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6521	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6522	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6524	ERJ6ENF1801	M 1.8KOHM, 1/10W	1	
R6525	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6526	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6527	ERJ14YJ102	M 1KOHM, J, 1/4W	1	
R6528	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6529	ERJ6GEYJ680	M 68 OHM, J, 1/10W	1	
R6530-39	ERJ6GEYJ470	M 47 OHM, J, 1/10W	10	
R6540-49	ERJ6GEYJ100	M 10 OHM, J, 1/10W	10	
R6550	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6551	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6552	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6553	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6554, 55	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R6556	ERJ6GEYJ392	M 3.9KOHM, J, 1/10W	1	
R6557	ERG1FJS471D	M 470 OHM, J, 1W	1	
R6558	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6559	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6560, 61	ERJ6GEYJ470	M 47 OHM, J, 1/10W	2	
R6562-64	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	3	
R6565	ERG1FJS332D	M 3.3KOHM, J, 1W	1	
R6566	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6567, 68	ERJ6ENF1003	M 100KOHM, 1/10W	2	
R6569	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6571-78	ERJ6GEYJ471	M 470 OHM, J, 1/10W	8	
R6579	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6580	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6581	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6582, 83	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R6584	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6585, 86	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	2	
R6587	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6588	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6589	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6590, 91	ERJ6GEYJ182	M 1.8KOHM, J, 1/10W	2	
R6592, 93	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R6594	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6595, 96	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R6600	ERD25V0T	M OHM, 1/10W	1	
R6601, 02	ERJ6GEYJ470	M 47 OHM, J, 1/10W	2	
R6603	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6604	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6605-07	ERJ6GEYJ224	M 220KOHM, J, 1/10W	3	
R6608	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6609	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6611-18	ERJ6GEYJ100	M 10 OHM, J, 1/10W	8	
R6619-24	ERJ6GEYJ470	M 47 OHM, J, 1/10W	6	
R6625	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6626	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6627	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6628	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6629, 30	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6631-38	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	8	
R6639	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6641, 42	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6643, 44	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R6645, 46	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6651-56	ERJ12Y0R00	M 0 OHM, J, 1/2W	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6657-59	ERJ6GEYJ102	M 1KOHM, J, 1/10W	3	
R6660-63	ERJ12Y0R00	M 0 OHM, J, 1/2W	4	
R6664-70	ERJ6GEYJ680	M 68 OHM, J, 1/10W	7	
R6671	ERG2FJS820D	M 82 OHM, J, 2W	1	
R6672	ERX1FJS8R2D	M 8.2 OHM, J, 1W	1	
R6673	ERG1FJS103D	M 10KOHM, J, 1W	1	
R6674	ERJ12YJ101	M 100 OHM, J, 1/2W	1	
R6675	ERG2FJS223D	M 22KOHM, J, 2W	1	
R6676	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R6677	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6678	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6679	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6681	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6682, 83	ERJ6GEYJ470	M 47 OHM, J, 1/10W	2	
R6684	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6685, 86	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6687, 88	ERX2FJSR22D	M 0.22 OHM, J, 2W	2	
R6689, 90	ERJ12YJ220	M 22 OHM, J, 1/2W	2	
R6691	EXB38V471J	RESISTOR ARRAY	1	
R6692	EXB38V473J	RESISTOR ARRAY	1	
R6693	EXB38V471J	RESISTOR ARRAY	1	
R6694	EXB38V473J	RESISTOR ARRAY	1	
R6695	EXB38V471J	RESISTOR ARRAY	1	
R6696	EXB38V473J	RESISTOR ARRAY	1	
R6697	EXB38V471J	RESISTOR ARRAY	1	
R6698	EXB38V473J	RESISTOR ARRAY	1	
R6700	ERD25V0T	M OHM, 1/10W	1	
R6701-03	ERX3FJSR22D	M 2.2 OHM, J, 3W	3	
R6704	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6705, 06	ERJ6GEYJ100	M 10 OHM, J, 1/10W	2	
R6707	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6708	ERJ6GEYJ680	M 68 OHM, J, 1/10W	1	
R6710	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6711-18	ERJ6GEYJ100	M 10 OHM, J, 1/10W	8	
R6719-24	ERJ6GEYJ470	M 47 OHM, J, 1/10W	6	
R6725	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6726	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6727	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6728	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6729, 30	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6731-38	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	8	
R6741, 42	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6747	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6749	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6750	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6751, 52	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6753	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6754, 55	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6756	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6757	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6758	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6759	ERG2FJS101D	M 100 OHM, J, 2W	1	
R6760	ERG1FJS472D	M 4.7KOHM, J, 1W	1	
R6761	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6762	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6763	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6764	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6765, 66	ERJ6GEYJ333	M 33KOHM, J, 1/10W	2	
R6767	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6769	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6772	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6775	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6776	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6777, 78	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R6779	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6780, 81	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	2	
R6782	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6783	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6784	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6785	EXB38V471J	RESISTOR ARRAY	1	
R6786	EXB38V473J	RESISTOR ARRAY	1	
R6787	EXB38V471J	RESISTOR ARRAY	1	
R6788	EXB38V473J	RESISTOR ARRAY	1	
R6789, 90	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R6791-96	ERJ12Y0R00	M 0 OHM, J, 1/2W	6	
R6801-03	ERJ6GEYJ101	M 100 OHM, J, 1/10W	3	
R6805	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6809	EXB38V471J	RESISTOR ARRAY	1	
R6810	EXB38V473J	RESISTOR ARRAY	1	
R6811, 12	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6813	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6814	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6816	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R6817	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6818	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6820, 21	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6822-25	ERJ6GEYJ220	M 22 OHM, J, 1/10W	4	
R6827	ERJ6ENF6982	M69.8KOHM, 1/10W	1	
R6828	ERJ6ENF1182	M11.8KOHM, 1/10W	1	
R6829	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R6830	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6831	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R6832, 33	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	2	
R6835	ERJ6ENF3832	M38.3KOHM, 1/10W	1	
R6836	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6837	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6838	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6839	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6840	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6841	ERJ6ENF1302	M 13KOHM, 1/10W	1	
R6842, 43	ERJ6ENF2202	M 2.2KOHM, 1/10W	2	
R6844	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R6845, 46	ERF15ZXJ330	W 33 OHM, J, 15W	2	
R6847	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6849	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R6850	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6851-54	ERJ12Y0R00	M 0 OHM, J, 1/2W	4	
R6857	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6873, 74	ERJ12YJ220	M 22 OHM, J, 1/2W	2	
R6902	EXB38V471J	RESISTOR ARRAY	1	
R6903	EXB38V473J	RESISTOR ARRAY	1	
R6905	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6911, 12	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6913	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6914	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6916	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R6917	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6920, 21	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6922, 23	ERJ6GEYJ220	M 22 OHM, J, 1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6924, 25	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	2	
R6927	ERJ6ENF6982	M69.8KOHM, 1/10W	1	
R6928	ERJ6ENF1182	M11.8KOHM, 1/10W	1	
R6929	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R6930	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6931	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R6932, 33	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	2	
R6935	ERJ6ENF3832	M38.3KOHM, 1/10W	1	
R6936	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6937	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6938	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6939	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6940	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6941	ERJ6ENF1302	M 13KOHM, 1/10W	1	
R6942, 43	ERJ6ENF2202	M 2.2KOHM, 1/10W	2	
R6944	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R6945, 46	ERF15ZXJ330	W 33 OHM, J, 15W	2	
R6947	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6949	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R7101	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7104	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7107	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7109	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7111	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7113	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7115	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7116, 17	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7123, 24	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7127, 28	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7131, 32	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7133, 34	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7138-41	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7146-61	TAJAAH0470JV	M 47 OHM, J, 1/16W	16	
R7163	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7167-70	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7171	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7172-75	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7176-79	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7184, 85	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7186	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7187	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7206	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7207, 08	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7211	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7215	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7216, 17	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R7218, 19	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7225	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7227	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7230	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7231-34	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7235	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7238	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7239, 40	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R7241	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7244	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7245-48	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7250	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7251	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7252, 53	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R7256	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7257-60	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7262	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7263, 64	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R7266	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7267	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7269	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R7302	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7303-06	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7311-26	TAJAAH0470JV	M 47 OHM, J, 1/16W	16	
R7329	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7330-37	TAJAAH0470JV	M 47 OHM, J, 1/16W	8	
R7338-41	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7346, 47	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7354, 55	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7360, 61	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7364, 65	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7366, 67	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7373, 74	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7377, 78	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7381, 82	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7383, 84	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7385	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7386	ERJ6GEYJ104	M 10KOHM, J, 1/10W	1	
R7387	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7401	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7402	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R7404	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7409	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R7410-13	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7414, 15	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R7416-39	TAJAAH0470JV	M 47 OHM, J, 1/16W	24	
R7440-43	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7444	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7454	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7460, 61	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7464, 65	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7468, 69	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7470, 71	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7472	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7477, 78	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7481, 82	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7485, 86	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7487, 88	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7490	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7491	ERJ6GEYJ104	M 10KOHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7501	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R7502	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R7503	ERJ6ENF8060	M 806 OHM, 1/10W	1	
R7503	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7504	ERJ6ENF3921	M3.92KOHM, 1/10W	1	
R7504	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7505	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7506	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7506	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R7507	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R7508	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R7509	ERJ6ENF8060	M 806 OHM, 1/10W	1	
R7510	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R7511	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R7512	ERJ6ENF6040	M 604 OHM, 1/10W	1	
R7514	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7514	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R7515, 16	ERJ6GEYJ223	M 22KOHM, J, 1/10W	2	
R7517	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7517	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R7518	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7519	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R7519	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7520	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7520	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7521	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7522	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7522	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7523	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7525	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R7525	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7526	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7526	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R7527	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7527	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R7528	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7529	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7529	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7530, 31	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7532	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R7533	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7534	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R7535	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7535	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R7536	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R7536	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7537	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R7537	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7538	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R7538	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7539	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R7539	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7540	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R7541	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7541	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R7542	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R7543	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7543 02	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7544 02	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7544	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R7545	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
R7545 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7546	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
R7546 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7547	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1	
R7548	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R7549	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7549 02	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7550	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R7550 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7551	ERJ6ENF7151	M 7.15KOHM, 1/10W	1	
R7551 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7552	ERJ6ENF8060	M 806 OHM, 1/10W	1	
R7555	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7557 02	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7557	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7558	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7559 02	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7559	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R7560	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R7560 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7561 02	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R7561	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7562	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R7562 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7563	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R7563 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7564	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R7564 02	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7565	ERJ6ENF3921	M 3.92KOHM, 1/10W	1	
R7565 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7566	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R7566 02	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7568	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R7569 02	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R7569	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7570	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R7571	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R7574	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R7579	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7580	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7583	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7584	ERJ6GEYJ512	M 5.1KOHM, J, 1/10W	1	
R7585	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R7586	ERJ6ENF1371	M 1.37KOHM, 1/10W	1	
R7587	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R7588	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7590	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7591	ERJ6GEYJ563	M 56KOHM, J, 1/10W	1	
R7595	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7596	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7604	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7607	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7609	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7611	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7613	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7615	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7616, 1 7	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7618	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7623, 2 4	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7627, 2 8	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7631, 3 2	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7633, 3 4	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7635- 38	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7643	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7646- 61	TAJAAH0470JV	M 47 OHM, J, 1/16W	16	
R7664- 71	TAJAAH0470JV	M 47 OHM, J, 1/16W	8	
R7672- 75	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7677	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7685	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7686	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7687	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R9001	EXB38V470J	RESISTOR ARRAY	1	
R9002, 0 3	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9004	EXB38V470J	RESISTOR ARRAY	1	
R9005	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9006	EXB38V470J	RESISTOR ARRAY	1	
R9007- 09	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9010	EXB38V470J	RESISTOR ARRAY	1	
R9011	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9012	EXB38V470J	RESISTOR ARRAY	1	
R9014	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9015	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R9016	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9017	EXB38V470J	RESISTOR ARRAY	1	
R9018- 20	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9022- 24	ERJ3GEYJ750	M 75 OHM, J, 1/16W	3	
R9025	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9026	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R9027	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9028	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9029	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R9030	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9063	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9065- 67	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9104, 0 5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9109, 1 0	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9111, 1 2	ERJ3GEYJ330	M 33 OHM, J, 1/16W	2	
R9113	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9114, 1 5	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9118	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9122, 2 3	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9130- 32	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9136	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9153, 5 4	EXB2HVR000	RESISTOR ARRAY	2	
R9157	EXB2HVR000	RESISTOR ARRAY	1	
R9167, 6 8	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9171, 7 2	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9176	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9177	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R9178, 79	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9180	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9182	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9183	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R9184	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9187	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9190	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9191	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9199	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9202	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9203	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R9204, 05	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9211-15	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9216	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9218	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9219	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9220, 21	ERJ3GEYJ151	M 150 OHM, J, 1/16W	2	
R9224	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R9226	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9228	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R9229, 30	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9231	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R9232	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9234	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9236	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9240, 41	ERJ3GEYJ330	M 33 OHM, J, 1/16W	2	
R9244, 45	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9247	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9302	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9304	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9309	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9310	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9311	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9312-14	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R9315	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9317	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9318-21	EXB38V470J	RESISTOR ARRAY	4	
R9322	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9323, 24	EXB38V680J	RESISTOR ARRAY	2	
R9325	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9327	EXB38V680J	RESISTOR ARRAY	1	
R9328	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9329, 30	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9331	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9332	EXB38V680J	RESISTOR ARRAY	1	
R9335	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9336	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9337	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9338	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9339	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9341, 42	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R9346	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9347, 48	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9349	EXB38V680J	RESISTOR ARRAY	1	
R9350	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9351	EXB38V680J	RESISTOR ARRAY	1	
R9352	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9354	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9355	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9357-59	EXB38V680J	RESISTOR ARRAY	3	
R9362	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9363	EXB38V680J	RESISTOR ARRAY	1	
R9365	EXB38V680J	RESISTOR ARRAY	1	
R9367	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9368, 69	EXB38V680J	RESISTOR ARRAY	2	
R9371	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9373-75	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9376	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9377-79	EXB2HVR000	RESISTOR ARRAY	3	
R9380	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9382	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9385	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9386	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R9388	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9389, 90	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9391, 92	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R9393-96	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R9397, 98	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9399, 00	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9401, 02	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9403	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9405	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9408	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9411	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9413	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9415	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9417	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9420	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R9421	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9422	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9425	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9431	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9435	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9437	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9439-41	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9443-45	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9447	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9449	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9455	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9459	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9460-62	ERJ3GEYJ100	M 10 OHM, J, 1/16W	3	
R9465, 66	EXB2HVR000	RESISTOR ARRAY	2	
R9468	EXB2HVR000	RESISTOR ARRAY	1	
R9469, 70	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9475	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9476	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R9477, 78	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9479	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9480, 81	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9483	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9484, 85	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R9486, 87	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9488, 89	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9490, 91	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9492-95	EXB38VR000	RESISTOR ARRAY	4	
R9496	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9498	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9501	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9503	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9504	EXB38V103J	RESISTOR ARRAY	1	
R9506	EXB38V103J	RESISTOR ARRAY	1	
R9509-13	ERJ3GEYJ103	M 10KOHM, J, 1/16W	5	
R9514	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9515	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9516, 17	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9518-27	EXB38V680J	RESISTOR ARRAY	10	
R9529, 30	EXB38V680J	RESISTOR ARRAY	2	
R9532-37	TAJAAH0470JV	M 47 OHM, J, 1/16W	6	
R9538, 39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9540	EXB38V470J	RESISTOR ARRAY	1	
R9541, 42	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9543	EXB38V470J	RESISTOR ARRAY	1	
R9544, 45	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R9547	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9548	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9549	EXB38V680J	RESISTOR ARRAY	1	
R9550, 51	EXB38V470J	RESISTOR ARRAY	2	
R9552	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R9553	EXB38V680J	RESISTOR ARRAY	1	
R9554	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R9556-58	ERJ3GEYJ151	M 150 OHM, J, 1/16W	3	
R9559	EXB38V470J	RESISTOR ARRAY	1	
R9560	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R9561	EXB38V470J	RESISTOR ARRAY	1	
R9562	ERJ3GEYJ151	M 150 OHM, J, 1/16W	1	
R9563	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9564	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9565	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9568	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9569	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9577	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9579	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9585	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9586	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9592	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9593	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9594	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9595	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9596	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9597	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9598, 99	EXB38V103J	RESISTOR ARRAY	2	
R9600-05	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R9607-09	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9611-15	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9618	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9620, 21	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9624	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9625	ERJ3GEYJ561	M 560 OHM, J, 1/16W	1	
R9627, 28	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9631-35	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9637	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9640, 41	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9642	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9643	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9648	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9650-53	EXB38V103J	RESISTOR ARRAY	4	
R9654, 55	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9670-72	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9674-79	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R9683	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9685-88	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9701	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9702	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R9703-08	TAJAAH0101JV	M 100 OHM, J, 1/16W	6	
R9709	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R9710-16	ERJ3GEYJ151	M 150 OHM, J, 1/16W	7	
R9717, 18	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9719-24	ERJ3GEYJ151	M 150 OHM, J, 1/16W	6	
R9725	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9726	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9727	EXB38VR000	RESISTOR ARRAY	1	
R9728	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9730-32	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9733	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R9734	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9735	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9736	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R9737	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9738, 39	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	2	
R9741	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9743	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9744	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9745	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9747	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9748	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9749	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9750	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9751	EXB38V103J	RESISTOR ARRAY	1	
R9753	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9754	EXB38V272J	RESISTOR ARRAY	1	
R9755, 56	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	2	
R9757	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9758	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9759	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1	
R9760	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9761	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9762	EXB38V103J	RESISTOR ARRAY	1	
R9763	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9765	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9766	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9767	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9768	EXB38V470J	RESISTOR ARRAY	1	
R9769	EXB38VR000	RESISTOR ARRAY	1	
R9770	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9771	EXB38VR000	RESISTOR ARRAY	1	
R9773	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9774-76	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9777	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R9779	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9781	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9782	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R9783, 84	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R9785, 86	EXB38VR000	RESISTOR ARRAY	2	
R9787	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9788	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9789	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R9790	ERJ3GEYJ152	M 1.5KOHM, J, 1/16W	1	
R9791	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9794	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R9795	ERJ3GEYJ105	M 1MOHM, J, 1/16W	1	
R9798, 9	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R9800	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9803, 0	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9805	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9806	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9809	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9810, 1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9814	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9816	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9817	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9818, 1	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9820	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9823, 2	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R9825	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9826	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9827	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R9829	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R9832	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9833	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R9834, 3	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R9836	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9837	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9838	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9839, 4	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9843, 4	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9846, 4	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9848	EXB38V103J	RESISTOR ARRAY	1	
R9849, 5	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9851	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9852, 5	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9854	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9855	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R9856	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9857	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9858	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9859	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9860	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9861	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9864	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9867	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R9868	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9869	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9871	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9872	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9873	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9874, 7	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9876	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9878-80	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9882, 8	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9885	EXB38V103J	RESISTOR ARRAY	1	
R9886	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9887, 8	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9889	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9890	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9892	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9893-96	TAJAAH0101JV	M 100 OHM, J, 1/16W	4	
R9897	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9898	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9900	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9902	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9903-05	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9906	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9907	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9908	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9909	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9910	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9912	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9913	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R9914	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9916	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9917	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9918	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9919	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R9920	ERJ3GEYJ105	M 1MOHM, J, 1/16W	1	
R9921-23	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9924	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9925	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9929, 3	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9931	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9932	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9933	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9934	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9935, 3	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R9937	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9939	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9940	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9941	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9942	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9943	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9944	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9945, 4	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9947	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9949	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9951, 5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9954-57	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9959, 6	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	2	
R9961	ERJ6ENF1621	M 1.62KOHM, 1/10W	1	
R9962	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9963	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9964	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9965	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9966	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9969	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9971	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9972	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9976	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9979	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9984-88	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9990	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9991	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9992	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R9993	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9996	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9998	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
RL901	K6B1ADA00023	RELAY	1	△
RM300	PNA4601M05TV	REMOCO RECEIVER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
RTL	TNPA3432	CIRCUIT BOARD H	1	TH-50PV30H/M/R
RTL	TNPA3432AB	CIRCUIT BOARD H	1	TH-50PV30A
RTL	TNPA3433	CIRCUIT BOARD TA	1	TH-50PV30H/M/R
RTL	TNPA3434	CIRCUIT BOARD TB	1	TH-50PV30H/M/R
RTL	TXN/T1UFSA	CIRCUIT BOARD T	1	TH-50PV30A
RTL	TXNDG1UHSR	CIRCUIT BOARD DG	1	TH-50PV30H/M/R
RTL	TXNDG1UGSA	CIRCUIT BOARD DG	1	TH-50PV30A
RTL	TNPA2989AC	CIRCUIT BOARD PA	1	
RTL	TXNPF1UGSH	CIRCUIT BOARD PF	1	
RTL	TNPA3461	CIRCUIT BOARD P	1	
RTL	TNPA2903	CIRCUIT BOARD C1	1	
RTL	TNPA2904	CIRCUIT BOARD C2	1	
RTL	TNPA2905	CIRCUIT BOARD C3	1	
RTL	TNPA2906	CIRCUIT BOARD C4	1	
RTL	TNPA2907	CIRCUIT BOARD C5	1	
RTL	TNPA2908	CIRCUIT BOARD C6	1	
RTL	TZTNP01UGSE	CIRCUIT BOARD D	1	
RTL	TXNSC20QNS	CIRCUIT BOARD SC	1	
RTL	TNPA3129	CIRCUIT BOARD SD	1	
RTL	TXNSS20RTS	CIRCUIT BOARD SS	1	
RTL	TNPA2919	CIRCUIT BOARD SS2	1	
RTL	TNPA2920	CIRCUIT BOARD SS3	1	
RTL	TNPA3128	CIRCUIT BOARD SU	1	
RTL	TNPA2990AC	CIRCUIT BOARD S	1	
RTL	TNPA3151AD	CIRCUIT BOARD JG	1	
RTL	TXN/G1UFSA	CIRCUIT BOARD G	1	
RTL	TNPA2988AE	CIRCUIT BOARD K	1	
S4	K1KA07B00006	7P CONNECTOR	1	
S34	K1KA03A00213	3P CONNECTOR	1	
S300	K0F162B00002	SWITCH	1	
S901	J0LT00000009	SWITCH	1	⚠
S915	J0LT00000009	SWITCH	1	⚠
SC2	K1KA06A00180	6P CONNECTOR	1	
SC12	K1KA06A00220	6P CONNECTOR	1	
SC13	TJS1A8840	8P CONNECTOR	1	
SC20	K1KA20A00180	20P CONNECTOR	1	
SC23	K1KA03A00213	3P CONNECTOR	1	
SC41-44	K1KB40B00015	40P CONNECTOR	4	
SC45,46	K1KA10A00194	10P CONNECTOR	2	
SC62	K1KA06A00220	6P CONNECTOR	1	
SD1-D4	K1MN96B00001	CONNECTOR	4	
SD46	K1KA10B00209	10P CONNECTOR	1	
SS11	K1KA07A00096	7P CONNECTOR	1	
SS12	K1KA10A00259	10P CONNECTOR	1	
SS21	K1KB07A00037	7P CONNECTOR	1	
SS31	K1KB07A00037	7P CONNECTOR	1	
SS32	K1KA20A00180	20P CONNECTOR	1	
SS34	K1KA03A00213	3P CONNECTOR	1	
SS35	TJS1A8840	8P CONNECTOR	1	
SS41	K1MN13B00020	13P CONNECTOR	1	
SS42	TJS1A8840	8P CONNECTOR	1	
SS48	K1MN13B00020	13P CONNECTOR	1	
SS51-56	K1MN13B00020	13P CONNECTOR	6	
SS57,58	K1KA07A00170	7P CONNECTOR	2	
SU1-U4	K1MN96B00001	CONNECTOR	4	
SU45	K1KA10B00209	10P CONNECTOR	1	
SW3701-05	EVQ23405R	SWITCH	5	
T10	TJS6A9390	24P CONNECTOR	1	
T11	TJS6A9390	24P CONNECTOR	1	TH-50PV30H/M/R
T920	ETS29AK7E6AD	SWITCHING TRANS	1	⚠
T6431	ETS13TB139AP	SWITCHING TRANS	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
T6451	G4D1A0000072	SWITCHING TRANS	1	
T6471	G4D1A0000072	SWITCHING TRANS	1	
TU001	ENG9301GF	TUNER	1	TH-50PV30H/M/R ⚠
TU002	ENG39A01GF	TUNER	1	TH-50PV30H/M/R ⚠
TU003	ENG29526G	TUNER	1	TH-50PV30A ⚠
VR6477	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
VR6557	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6670	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6770	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
X1000	H0J921400003	CRYSTAL	1	
X1001	H0J600400006	CRYSTAL	1	
X1301	H0J202500002	CRYSTAL	1	
X2001	TSSA128	CRYSTAL	1	
X6001	H1A4905B0001	CRYSTAL	1	
X9302	H0J200500016	CRYSTAL	1	
X9701	H0J245500013	CRYSTAL	1	
X9702	H0J921400003	CRYSTAL	1	
X9703	H0J200500016	CRYSTAL	1	
ZA001	K4ZZ01000121	EARTH LUG	1	TH-50PV30H/M/R
ZA1,02	K4ZZ01000121	EARTH LUG	2	
ZA051,52	K4ZZ01000121	EARTH LUG	2	TH-50PV30H/M/R
ZA080,81	K4ZZ01000121	EARTH LUG	2	TH-50PV30A
ZA901	K4ZZ01000121	EARTH LUG	1	
ZA3101-04	K4ZZ01000121	EARTH LUG	4	
ZA3106,07	K4ZZ01000121	EARTH LUG	2	
C401	F0CAF105A021	C 1UF, 250V	1	
C402	ECJ2XC1H391J	C 390PF, J, 50V	1	
C403	ECKCNA222MEB	C 2200PF, M	1	
C404	F0CAF105A021	C 1UF, 250V	1	
C407	EEUEB2W220B	E 22UF, 450V	1	
C408	F2A1H470A123	E 47UF, 50V	1	
C409	F0CAF105A021	C 1UF, 250V	1	
C410	F2A1H470A123	E 47UF, 50V	1	
C411	F2A1H100A123	E 10UF, 50V	1	
C412	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C413	F1J1C1050011	C 1UF, Z, 50V	1	
C416	F1J1V474A001	C 0.47UF, 35V	1	
C417	F2A1H100A123	E 10UF, 50V	1	
C419	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C421,22	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C423	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C424,25	ECJ3YB1E105K	C 1UF, K, 25V	2	
C426	ECJ2XC1H471J	C 470PF, J, 50V	1	
C427	F1J1A1050002	C 1UF, Z, 50V	1	
C428	ECJ2XC1H221J	C 220PF, J, 50V	1	
C429,30	F1K2J1530002	C 0.15PF, J, 630V	2	
C431	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C432	F1J1C1050011	C 1UF, Z, 50V	1	
C436	F1J1C1050011	C 1UF, Z, 50V	1	
C440	F2A1H100A123	E 10UF, 50V	1	
C443,44	F1A3A102A040	C 1000PF, J, 1KV	2	
C445	F1J1C1050011	C 1UF, Z, 50V	1	
C446	F2B2W4710005	C 470UF, 450V	1	
C448	F2B2W4710005	C 470UF, 450V	1	
C449,50	F1A3A102A040	C 1000PF, J, 1KV	2	
C451	F1A3A101A040	C 100PF, J, 1KV	1	
C455	F1A3A221A040	E 220UF, 1KV	1	
C457	ECWH8203RHV	P 0.020PF, J, 8KV	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C458	ECWH8683RHV	P 0.068PF, J, 8KV	1	
C459	F1K2J1530002	C 0.15PF, J, 630V	1	
C460, 61	F1A3A331A039	E 330UF, 1KV	2	
C462	ECJ3YB1E105K	C 1UF, K, 25V	1	
C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C464	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C465	ECKCNA221KB7	C 220PF, M,	1	
C501, 02	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C503, 04	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C506-08	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C509	F2A1E101A097	E 100UF 25V	1	
C511	F1J1C1050011	C 1UF, Z, 50V	1	
C513, 14	ECJ2XC1H471J	C 470PF, J, 50V	2	
C515	EEUFC1A102	E 1000UF, 10V	1	
C516	F1J1A1050002	C 1UF, Z, 50V	1	
C517	ECA1EM221	E 220UF, 25V	1	
C518	F2A1E470A097	E 47UF, 25V	1	
C521	F2A1H100A123	E 10UF, 50V	1	
C522	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C523	F2A1E101A097	E 100UF 25V	1	
C524	EEUEB1H220SB	E 22UF, 50V	1	
C525	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C526	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C527	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C528	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C529	F2A1E101A097	E 100UF 25V	1	
C530	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C531, 32	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C534	ECJ2XC1H681J	C 680PF, J, 50V	1	
C535	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C536	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C537	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C538	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C539	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C540	ECJ2XC1H152J	C 1500PF, J, 50V	1	
C541	F1J1C1050011	C 1UF, Z, 50V	1	
C544	F1J1C1050011	C 1UF, Z, 50V	1	
C546	F2A1E101A097	E 100UF 25V	1	
C547	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C549	F1J2E1030004	C 0.1PF, J, 250V	1	
C550	F2A1E681A099	E 680UF, 25V	1	
C552	F1J1C1050011	C 1UF, Z, 50V	1	
C553, 54	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C556	F2A1C152A126	E 1500UF, 16V	1	
C557	F2A2A101A023	100YXF101MK	1	
C558	F2B2D2220003	E 2200UF, @ 200V	1	
C559	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C560	ECA2AHG102	E 1000UF, 100V	1	
C561	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C562	F2B2D2220003	E 2200UF, @ 200V	1	
C565	F2A1E4710065	E 470UF, 25V	1	
C573	F1J1C1050011	C 1UF, Z, 50V	1	
C574	EEUFC0J122	E 1200UF, 6.3V	1	
C576	F2A1E470A097	E 47UF, 25V	1	
C577	F2A2A330A022	E 33UF, 100V	1	
C578	F2A1E470A097	E 47UF, 25V	1	
C579	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C580	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C581	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C583	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C585, 86	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C587	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C598	F2A1E470A097	E 47UF, 25V	1	
C599	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C600, 01	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C602	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C603, 04	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C605	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C606	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C607	F1J1C1050011	C 1UF, Z, 50V	1	
C608, 09	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C614	F2A1H100A123	E 10UF, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D401	B0FBBR000020	DIODE	1	
D402	MA4082M	ZENER DIODE	1	
D404	S1WBA80Z	DIODE	1	
D408	MA4180M	ZENER DIODE	1	
D409	B0HAMM000072	DIODE	1	
D410	MA188	DIODE	1	
D411	B0BB17000006	DIODE	1	
D412	MA165	DIODE	1	
D414	MA165	DIODE	1	
D415	B0JAME000081	DIODE	1	
D416	B0HAMP000067	DIODE	1	
D417	ERA15-10	DIODE	1	
D418	MA4082M	ZENER DIODE	1	
D419, 20	B0HBSR000005	DIODE	2	
D421	MA4150M	ZENER DIODE	1	
D423-26	B0JAME000081	DIODE	4	
D431	B0JCDD000002	DIODE	1	
D433, 34	MA4051NM	ZENER DIODE	2	
D503, 04	MA165	DIODE	2	
D505, 06	B0JAME000081	DIODE	2	
D507	MA165	DIODE	1	
D510	B0HAMM000072	DIODE	1	
D511	AK06	DIODE	1	
D513	MA4100M	ZENER DIODE	1	
D515	MA4056M	ZENER DIODE	1	
D517-20	MA165	DIODE	4	
D521	MA188	DIODE	1	
D528, 29	MA153	DIODE	2	
D530	MA4100M	ZENER DIODE	1	
D531	B0HDM0000001	DIODE	1	
D532	MA3J142D0L	DIODE	1	
D533, 34	B0JBSE000039	DIODE	2	
D535	MA188	DIODE	1	
D536	B0JBSE000039	DIODE	1	
D537	B0HBRP000006	DIODE	1	
D538	MA4051NM	ZENER DIODE	1	
D539	B0HBRP000006	DIODE	1	
D540, 41	MA188	DIODE	2	
D543-45	MA3200	ZENER DIODE	3	
D546	B0JCND000005	DIODE	1	
D547	MA3150M	ZENER DIODE	1	
D548	MA4075M	ZENER DIODE	1	
D549	MA188	DIODE	1	
D550	MA4068M	ZENER DIODE	1	
D551	MA4075M	ZENER DIODE	1	
D552	MA4051NM	ZENER DIODE	1	
D553	MA165	DIODE	1	
D554	ERA15-01V5	DIODE	1	
D555	MA4075M	ZENER DIODE	1	
D557	MA1110	ZENER DIODE	1	
D561	MA3075MTX	ZENER DIODE	1	
D563, 64	MA1110	ZENER DIODE	2	
D565	B0JAME000081	DIODE	1	
F405	P130A	FUSE	1	
IC401	CNC1S171R	IC	1	
IC402	NJM2903V	IC	1	
IC403, 04	CNC1S171R	IC	2	
IC406	C0DAZZ000019	IC	1	
IC408	CNC1S171R	IC	1	
IC409	MIP2E2DMPSCF	IC	1	
IC501	C2ABDA000040	IC	1	
IC502	C0EBH0000190	IC	1	
IC503	C0ZBZ0000383	IC	1	
IC504	TA76431ASTP6	IC	1	
IC511	C0DAAZG00010	IC	1	
IC512	TA76431ASTP6	IC	1	
IC520	C0JBAZ002056	IC	1	
IC521	C0JBAF000367	IC	1	
IC522	C0JBAZ002056	IC	1	
IC523	C0JBAF000367	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L401	EXCELD25C	BEAD CHOKE	1	
L402	EXCELSA24	BEAD CHOKE	1	
L403	EXCELSA35	BEAD CHOKE	1	
L404	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L502	EXCELD25C	BEAD CHOKE	1	
L503	ELELN100KA	CHIP INDUCTOR	1	
L504	G0A151ZA0038	CHOKE COIL	1	
L505-07	EXCELD25C	BEAD CHOKE	3	
L510	EXCELD25C	BEAD CHOKE	1	
L601	EXCELD35C	BEAD CHOKE	1	
P2	K1KA06A00180	6P CONNECTOR	1	
P5	K1KA11A00073	11P CONNECTOR	1	
P7	K1KA04A00242	4P CONNECTOR	1	
P9	K1KA02A00104	2P CONNECTOR	1	
P11	K1KA07A00096	7P CONNECTOR	1	
P12	K1KA10A00259	10P CONNECTOR	1	
P23	K1KA03A00213	3P CONNECTOR	1	
P25	TJS1A8840	8P CONNECTOR	1	
P27	K1KA09A00099	9P CONNECTOR	1	
P30-33	K1KA03A00172	3P CONNECTOR	4	
PR401	K5Y502B00007	FUSE	1	
PR502	ICP-N50T104	PROTECTOR	1	
PR509, 10	K5H501Z00005	FUSE	2	
Q401	B1DHBD000002	TRANSISTOR	1	
Q403	2SD1819A	TRANSISTOR	1	
Q404	2SB1386RT100	TRANSISTOR	1	
Q406	B1DELQ000002	TRANSISTOR	1	
Q407	XP4601	XP0460100L	1	
Q410	B1CEJQ000001	TRANSISTOR	1	
Q411	UN5213	TRANSISTOR	1	
Q412, 13	B1DEER000003	TRANSISTOR	2	
Q414, 15	B1DEGQ000030	TRANSISTOR	2	
Q416	XP4601	XP0460100L	1	
Q420, 21	2SD1819A	TRANSISTOR	2	
Q501, 02	2SD1820A	TRANSISTOR	2	
Q503	UN5111	TRANSISTOR	1	
Q504	2SK3065T100	FET	1	
Q506	XP4401	TRANSISTOR	1	
Q508	B1GBCFNA0010	TRANSISTOR	1	
Q509	XP4401	TRANSISTOR	1	
Q510	2SB1218ARL	TRANSISTOR	1	
Q511	B1CBGD000001	TRANSISTOR	1	
Q512	B1DHBD000002	TRANSISTOR	1	
Q513	B1CBGD000001	TRANSISTOR	1	
Q514	B1MBACA00005	TRANSISTOR	1	
Q515	2SK3065T100	FET	1	
Q516	B1DHBD000002	TRANSISTOR	1	
Q517	XP4401	TRANSISTOR	1	
Q518	B1MBACA00005	TRANSISTOR	1	
Q519	2SK3065T100	FET	1	
Q520	B1HFCFA00015	TRANSISTOR	1	
Q521	2SD1819A	TRANSISTOR	1	
Q522	UN5111	TRANSISTOR	1	
Q524	2SD1819A	TRANSISTOR	1	
Q525	XP4601	XP0460100L	1	
Q527	B1DAFM000003	TRANSISTOR	1	
Q528	2SD1819A	TRANSISTOR	1	
Q530	XP4501TX	TRANSISTOR	1	
Q531	2SD23750P	TRANSISTOR	1	
Q532	2SD1819A	TRANSISTOR	1	
Q535	2SD1819A	TRANSISTOR	1	
Q537	B1CHND000003	TRANSISTOR	1	
Q540	B1DHBD000002	TRANSISTOR	1	
Q541	B1CBGD000001	TRANSISTOR	1	
Q542	XP4601	XP0460100L	1	
Q543	XP4401	TRANSISTOR	1	
Q544	UN5111	TRANSISTOR	1	
Q545	2SK3065T100	FET	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q546	2SD1819A	TRANSISTOR	1	
Q547	2SD1119	2SD11190RL	1	
Q550-52	UN5213	TRANSISTOR	3	
R401-03	ERJ6ENF2003	M 200KOHM, 1/10W	3	
R405-07	ERJ6ENF2003	M 200KOHM, 1/10W	3	
R409	ERJ6ENF3602	M 36KOHM, 1/10W	1	
R410	ERF10TJ200	W 20 OHM, 10W	1	
R411	D1FZ100E0002	F 10 OHM	1	
R412	ERF10TJ200	W 20 OHM, 10W	1	
R413	D1FZ100E0002	F 10 OHM	1	
R414	ERJ8GEYJ153	M 15KOHM, J, 1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R423	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R424	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R425	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R426	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R428	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R429	ERJ6GEYJ153	M 15KOHM, J, 1/10W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R432	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R433	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R434	ERJ8GEYJ2R2	M 2.2 OHM, J, 1/8W	1	
R435	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R436	ERJ8GEYJ153	M 15KOHM, J, 1/8W	1	
R437	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R438	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R439	ERJ14YJ120	M 12 OHM, J, 1/4W	1	
R440	ERJ8GEYJ474	M 470KOHM, J, 1/8W	1	
R441, 42	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R443	EVMAASA00B23	CONTROL 2KOHMB	1	
R444	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R445	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R448-50	D0XGR10JA007	RESISTOR ARRAY	3	
R451	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R452	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R456	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R458	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R463	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R465	ERJ6ENF5603	M 560KOHM, 1/10W	1	
R466	D0C3104JA014	M 100KOHM, J, 1/3W	1	
R467	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R468-70	ERJ6GEYJ474	M 470KOHM, J, 1/10W	3	
R471	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R472, 73	ERJ6ENF5603	M 560KOHM, 1/10W	2	
R474	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R475	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R476, 77	ERJ8GEYJ300	M 30 OHM, J, 1/8W	2	
R478	ERJ8GEYJ681	M 680 OHM, J, 1/8W	1	
R481	ERJ14YJ621	M 620 OHM, J, 1/4W	1	
R482	ERJ8GEYJ681	M 680 OHM, J, 1/8W	1	
R483	ERJ14YJ621	M 620 OHM, J, 1/4W	1	
R484, 85	ERJ8GEYJ300	M 30 OHM, J, 1/8W	2	
R486	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R489	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R493	ERJ14YJ120	M 12 OHM, J, 1/4W	1	
R494-96	ERJ6ENF5603	M 560KOHM, 1/10W	3	
R497	ERJ6ENF2402	M 24KOHM, 1/10W	1	
R498	ERJ6GEYJ392	M 3.9KOHM, J, 1/10W	1	
R499	ERJ8GEYJ4R7	M 4.7 OHM, J, 1/8W	1	
R500	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R501	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R502, 03	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R504	ERDS2TJ102	C 1KOHM, J, 1/4W	1	
R505	ERDS2TJ220	C 22 OHM, J, 1/4W	1	
R506	ERDS2TJ102	C 1KOHM, J, 1/4W	1	
R507	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R508	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R509	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R510	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R512	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R513, 14	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R515	ERDS2TJ102	C 1KOHM, J, 1/4W	1	
R516	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R517	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R518	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R519, 20	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R521, 22	ERJ8GEYJ100	M 10 OHM, J, 1/8W	2	
R524	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R527	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R528	ERDS2TJ102	C 1KOHM, J, 1/4W	1	
R529	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R530	ERJ6ENF9531	M9.53KOHM, 1/10W	1	
R532	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R534-36	ERJ6GEYJ104	M 100KOHM, J, 1/10W	3	
R537	ERJ6ENF5602	M 56KOHM, 1/10W	1	
R538-40	ERJ6GEYJ104	M 100KOHM, J, 1/10W	3	
R541-44	ERJ1TRQJR47	M 0.47KHM, J, 1W	4	
R545	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R546	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R547-50	ERJ6GEYJ223	M 22KOHM, J, 1/10W	4	
R551	ERJ8GEYJ471	M 470 OHM, J, 1/8W	1	
R553	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R554	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R555, 56	ERJ8GEYJ332	M 3.3KOHM, J, 1/8W	2	
R557	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R558	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R559	ERJ8GEYJ471	M 470 OHM, J, 1/8W	1	
R563	ERJ6GEYJ4R7	M 4.7 OHM, J, 1/10W	1	
R564	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R565	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
R566	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R567	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R568	ERJ1TRQJR47	M 0.47KHM, J, 1W	1	
R569	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R570	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R571	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R572	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R573	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R574	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R575	ERJ6GEYJ4R7	M 4.7 OHM, J, 1/10W	1	
R576	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R577	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R578	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
R579	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R580	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R581	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R582	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R583	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R584	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R585	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R586	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R587	ERJ8GEYJ471	M 470 OHM, J, 1/8W	1	
R588	ERJ6ENF4420	M 442 OHM, 1/10W	1	
R589	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R590	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R592	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R594	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R595	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R596	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R597	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R598	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R599	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R600	ERJ8ENF3900	M 390 OHM, 1/8W	1	
R601	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R602, 03	ERJ6ENF1002	M 10KOHM, 1/10W	2	
R604	ERJ6GEYJ391	M 390 OHM, J, 1/10W	1	
R605, 06	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	2	
R608	D3CA61020010	M1.0 KOHM, J, 0.5W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R609	ERJ6GEYJ822	M 8.2KOHM, J, 1/10W	1	
R610	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R611	ERJ8GEYJ471	M 470 OHM, J, 1/8W	1	
R612	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R613	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R614	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R615	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R624	ERX1SJR47P	M0.47 OHM, J, 1W	1	
R631	ERJ8GEYJ243	M 24KOHM, J, 1/8W	1	
R632	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R634	ERJ6ENF4700	M 470 OHM, 1/10W	1	
R635	ERJ6ENF1071	M1.07KOHM, 1/10W	1	
R636-39	ERJ8ENF3902	M 39K OHM, 1/8W	4	
R640	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R641	EVMAASA00B33	CONTROL 3KOHMB	1	
R642-45	ERJ8ENF3902	M 39K OHM, 1/8W	4	
R646	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R649	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R650	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R651	ERG1SJ221	M 220 OHM, J, 1W	1	
R652	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R653, 54	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	2	
R656, 57	ERJ8GEYJ332	M 3.3KOHM, J, 1/8W	2	
R658	ERJ6ENF6201	M 6.2KOHM, 1/10W	1	
R659	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R660	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R661	EVMAASA00B53	CONTROL 5KOHMB	1	
R662	ERJ6ENF1503	M 150KOHM, 1/10W	1	
R663	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R664	ERJ6ENF9531	M9.53KOHM, 1/10W	1	
R665	EVMAASA00B23	CONTROL 2KOHMB	1	
R666	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R667	ERJ6ENF5101	M 5.1KOHM, 1/10W	1	
R668	ERJ6ENF2401	M 2.4KOHM, 1/10W	1	
R669	ERJ6ENF1503	M 150KOHM, 1/10W	1	
R670, 71	ERJ6ENF2202	M 2.2KOHM, 1/10W	2	
R672	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R673	ERJ6ENF5101	M 5.1KOHM, 1/10W	1	
R674, 75	ERJ8GEYJ124	M 120KOHM, J, 1/8W	2	
R676	ERJ8GEYJ243	M 24KOHM, J, 1/8W	1	
R677	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R678	ERDS2TJ223	C 22KOHM, J, 1/4W	1	
R679, 80	ERJ6ENF2202	M 2.2KOHM, 1/10W	2	
R681	ERJ6GEYJ154	M 150KOHM, J, 1/10W	1	
R682, 83	ERJ3GEYJ2R2	M 2.2 OHM, J, 1/16W	2	
R685	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R686	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R687	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R688	ERJ6GEYJ154	M 150KOHM, J, 1/10W	1	
R689	ERG3SJ101	M 100 OHM, J, 3W	1	
R690	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R691-93	ERJ8GEYJ124	M 120KOHM, J, 1/8W	3	
R694	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R695-97	ERJ8GEYJ124	M 120KOHM, J, 1/8W	3	
R698	ERJ6GEYJ4R7	M 4.7 OHM, J, 1/10W	1	
R699	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
RL401	K6B1AGA00086	RELAY	1	
RL402	K6B1AGA00177	REALY	1	
T401	G4D4A0000072	SWITCHING TRANSFORMER	1	
T402, 03	ETS19AB1T6AG	SWITCHING TRANS	2	
T404	ETS28LZ126AD	SWITCHING TRANS	1	
T405	ETS49LM126AD	SWITCHING TRANS	1	
T406	G4D4A0000072	SWITCHING TRANSFORMER	1	
T407	ETQ11K5AZ	CHOKE TRANS	1	
T410	ETS25AD1J6AH	SWITCHING TRANS	1	
X501	H2B400400021	CRYSTAL	1	
Z415	TMM23417	CLAMPER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
ZN401,0 2	D4EAD6210001	VARISTOR	2	