


Service Manual

Plasma Television

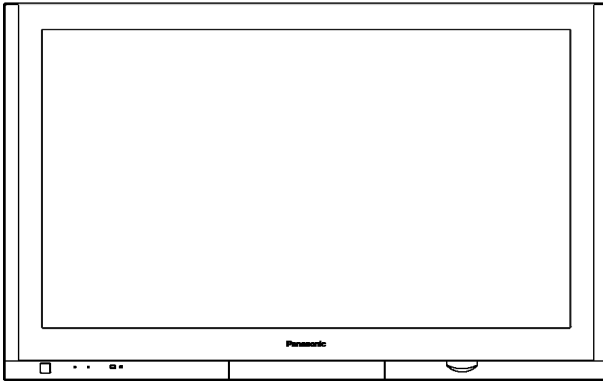

TH-50PV700AZ
TH-50PV700H
TH-50PV700M
TH-50PV700MR
 GPH10DA Chassis

Specifications

| | |
|----------------------------|--|
| Power Source | AC 220-240 V, 50 / 60 Hz |
| Power Consumption | |
| Average use | 519 W |
| Standby condition | 0.5 W |
| Display panel | |
| Aspect Ratio | 16 : 9 |
| Visible screen size | 127 cm (diagonal) 1,106 mm (W) × 622 mm (H) |
| Number of pixels | 1,049,088 (1,366 (W) × 768 (H)) [4,098 × 768 dots] |
| Sound | |
| Speaker | Woofer (φ80 mm) × 2 pcs, Tweeter (23 mm × 100 mm) × 2 pcs |
| Audio Output | 31 W [15.5 W + 15.5 W], 10 % THD |
| Headphones | M3 (3.5 mm) stereo mini Jack × 1 |
| PC signals | VGA, SVGA, XGA SXGA (compressed) Horizontal scanning frequency 31 - 69 kHz Vertical scanning frequency 59 - 86 Hz |

Receiving Systems/Band name

| 17 Systems | Function |
|------------------------------|--|
| 1 PAL B, G, H | Reception of broadcast transmissions and Playback from Video Cassette Tape Recorders |
| 2 PAL I | |
| 3 PAL D, K | |
| 4 SECAM B, G | |
| 5 SECAM D, K | |
| 6 SECAM K1 | |
| 7 NTSC M (NTSC 3.58/4.5 MHz) | |

| 17 Systems | Function |
|----------------------|---|
| 8 NTSC 4.43/5.5 MHz | Playback from Special VCR's or DVD |
| 9 NTSC 4.43/6.0 MHz | |
| 10 NTSC 4.43/6.5 MHz | |
| 11 NTSC 3.58/5.5 MHz | |
| 12 NTSC 3.58/6.0 MHz | |
| 13 NTSC 3.58/6.5 MHz | |
| 14 SECAM I | |
| 15 PAL 60 Hz/5.5 MHz | Playback from Special Disc Players and Special VCR's or DVD |
| 16 PAL 60 Hz/6.0 MHz | |
| 17 PAL 60 Hz/6.5 MHz | |

Receiving Channels

VHF BAND

Panasonic®

© 2007 Matsushita Electric Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

| | | |
|-------------------------------|---|--|
| (Regular TV) | 2-12 (PAL/SECAM B, K1) | 0-12 (PAL B AUST.) |
| | 1-9 (PAL B N.Z.) | 1-12 (PAL/SECAM D) |
| | 1-12 (NTSC M Japan) | 2-13 (NTSC M USA) |
| | UHF BAND | |
| | 21-69 (PAL G, H, I/SECAM G, K, K1) | 28-69 (PAL B AUST.) |
| | 13-57 (PAL D, K) | 13-62 (NTSC M Japan) |
| | 14-69 (NTSC M USA) | |
| | CATV | |
| | S1-S20 (OSCAR) | 1-125 (USA CATV) |
| | C13-C49 (JAPAN) | S21-S41 (HYPER) |
| | Z1-Z37 (CHINA) | 5A, 9A (AUST.) |
| Aerial - Rear | VHF / UHF | |
| Operating Conditions | Temperature: 0 °C - 40 °C | |
| | Humidity: 20 % - 80 % RH (non-condensing) | |
| Connection Terminals | | |
| AV1 Input | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| S-VIDEO | Mini DIN 4-pin | Y: 1.0 V [p-p] (75 ohm) C: 0286V [p-p] (75 ohm) |
| AV2 Input | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| COMPONENT | Y | Y: 1.0 V [p-p] (including synchronization) |
| | P _B /C _B , P _R /C _R | ± 0.35 V [p-p] |
| AV3 Input | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| COMPONENT | Y | Y: 1.0 V [p-p] (including synchronization) |
| | P _B /C _B , P _R /C _R | ± 0.35 V [p-p] |
| AV4 Input | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| S-VIDEO | Mini DIN 4-pin | Y: 1.0 V [p-p] (75 ohm) C: 0286V [p-p] (75 ohm) |
| Monitor Output | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] (high impedance) |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| Others | | |
| HDMI 1/2/3 Input | TYPE A Connectors | ● This TV supports "HDMI Control 2" function |
| PC Input | HIGH-DENSITY D-SUB 15PIN | R,G,B/0.7 V [p-p] (75 ohm) |
| | | HD, VD/TTL Level 2.0 - 5.0 V[p-p] (high impedance) |
| Audio Input | RCA PIN Type × 2 | 0.5 V [rms] |
| DIGITAL AUDIO OUT | PCM, Fiber optic | |
| Card slot | SD CARD slot × 1 | |
| Dimensions (W × H × D) | 1,266 mm × 802 mm × 137 mm | |
| Mass | 41.0 kg Net | |

Note:

- Design and Specifications are subject to change without notice. Weight and Dimensions shown are approximate.


WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

| | Page | | Page |
|--|-----------|---|-----------|
| 1 Applicable signals | 5 | 10 Service Mode | 28 |
| 2 Safety Precautions | 6 | 10.1. How to enter into Service Mode | 28 |
| 2.1. General Guidelines | 6 | 10.2. Service tool mode | 30 |
| 2.2. Touch-Current Check | 6 | 11 Adjustment Procedure | 31 |
| 3 Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices | 7 | 11.1. Driver Set-up | 31 |
| 4 About lead free solder (PbF) | 8 | 11.2. Initialization Pulse Adjust | 32 |
| 5 Service Hint | 9 | 11.3. P.C.B. (Printed Circuit Board) exchange | 32 |
| 6 Plasma panel replacement method | 10 | 11.4. Adjustment Volume Location | 33 |
| 6.1. Remove the rear cover | 10 | 11.5. Test Point Location | 33 |
| 6.2. Remove the rear terminal cover | 10 | 12 Adjustment | 34 |
| 6.3. Remove the Speaker box assy (left) | 10 | 12.1. Sub-Contrast adjustment | 34 |
| 6.4. Remove the Speaker box assy (right) | 10 | 12.2. PAL panel white balance adjustment | 35 |
| 6.5. Remove the P-Board | 10 | 12.3. HD white balance adjustment | 36 |
| 6.6. Remove the PA-Board | 11 | 13 Hotel mode | 37 |
| 6.7. Remove the Tuner unit | 12 | 14 Conductor Views | 39 |
| 6.8. Remove the DG-Board | 12 | 14.1. P-Board | 39 |
| 6.9. Remove the H-Board | 12 | 14.2. PA-Board | 42 |
| 6.10. Remove the D-Board | 12 | 14.3. H-Board | 43 |
| 6.11. Remove the SU-Board | 13 | 14.4. DG-Board | 45 |
| 6.12. Remove the SD-Board | 13 | 14.5. D-Board | 48 |
| 6.13. Remove the SC-Board | 13 | 14.6. C1-Board | 50 |
| 6.14. Remove the SS2-Board | 14 | 14.7. C2-Board | 51 |
| 6.15. Remove the SS3-Board | 14 | 14.8. C3-Board | 52 |
| 6.16. Remove the SS-Board | 14 | 14.9. SC-Board | 53 |
| 6.17. Remove the stand brackets | 14 | 14.10. SU-Board | 56 |
| 6.18. Remove the C1-Board | 15 | 14.11. SD-Board | 57 |
| 6.19. Remove the C2-Board | 15 | 14.12. SS-Board | 58 |
| 6.20. Remove the C3-Board | 15 | 14.13. SS2 and SS3-Board | 60 |
| 6.21. Remove the front bracket and the front shield case cover | 15 | 14.14. K and S-Board | 61 |
| 6.22. Remove the G-Board and GH-Board | 15 | 14.15. G-Board | 62 |
| 6.23. Remove the GS-Board | 16 | 14.16. GH and GS-Board | 63 |
| 6.24. Remove the S-Board | 16 | 15 Schematic and Block Diagram | 65 |
| 6.25. Remove the K-Board | 16 | 15.1. Schematic Diagram Note | 65 |
| 6.26. Remove the Plasma panel section from the Cabinet assy (glass) | 16 | 15.2. Main Block Diagram | 66 |
| 6.27. Remove the squawker speaker | 17 | 15.3. P-Board Block Diagram | 67 |
| 6.28. Replace the plasma panel (finished) | 18 | 15.4. P-Board (1 of 2) Schematic Diagram | 68 |
| 7 Caution statement | 19 | 15.5. P-Board (2 of 2) Schematic Diagram | 69 |
| 7.1. Caution statement. | 19 | 15.6. PA-Board Block Diagram | 70 |
| 8 Location of Lead Wiring | 20 | 15.7. PA-Board Schematic Diagram | 71 |
| 8.1. Lead of Wiring (1) | 20 | 15.8. H-Board (1 of 2) Block Diagram | 72 |
| 8.2. Lead of Wiring (2) | 21 | 15.9. H-Board (2 of 2) Block Diagram | 73 |
| 8.3. Lead of Wiring (3) | 22 | 15.10. H-Board (1 of 5) Schematic Diagram | 74 |
| 9 Self-check Function | 23 | 15.11. H-Board (2 of 5) Schematic Diagram | 75 |
| 9.1. Check of the IIC bus lines | 23 | 15.12. H-Board (3 of 5) Schematic Diagram | 76 |
| 9.2. Power LED Blinking timing chart | 24 | 15.13. H-Board (4 of 5) Schematic Diagram | 77 |
| 9.3. No Power | 25 | 15.14. H-Board (5 of 5) Schematic Diagram | 78 |
| 9.4. No Picture | 26 | 15.15. DG-Board (1 of 3) Block Diagram | 79 |
| 9.5. Local screen failure | 27 | 15.16. DG-Board (2 of 3) Block Diagram | 80 |
| | | 15.17. DG-Board (3 of 3) Block Diagram | 81 |
| | | 15.18. DG-Board (1 of 10) Schematic Diagram | 82 |
| | | 15.19. DG-Board (2 of 10) Schematic Diagram | 83 |

| | | | |
|--|-----|--|------------|
| 15.20. DG-Board (3 of 10) Schematic Diagram | 84 | 15.43. SC, SU and SD-Board Block Diagram | 107 |
| 15.21. DG-Board (4 of 10) Schematic Diagram | 85 | 15.44. SC-Board (1 of 3) Schematic Diagram | 108 |
| 15.22. DG-Board (5 of 10) Schematic Diagram | 86 | 15.45. SC-Board (2 of 3) Schematic Diagram | 109 |
| 15.23. DG-Board (6 of 10) Schematic Diagram | 87 | 15.46. SC-Board (3 of 3) Schematic Diagram | 110 |
| 15.24. DG-Board (7 of 10) Schematic Diagram | 88 | 15.47. SU-Board (1 of 2) Schematic Diagram | 111 |
| 15.25. DG-Board (8 of 10) Schematic Diagram | 89 | 15.48. SU-Board (2 of 2) Schematic Diagram | 112 |
| 15.26. DG-Board (9 of 10) Schematic Diagram | 90 | 15.49. SD-Board (1 of 2) Schematic Diagram | 113 |
| 15.27. DG-Board (10 of 10) Schematic Diagram | 91 | 15.50. SD-Board (2 of 2) Schematic Diagram | 114 |
| 15.28. D-Board Block Diagram | 92 | 15.51. SS, SS2 and SS3-Board Block Diagram | 115 |
| 15.29. D-Board (1 of 6) Schematic Diagram | 93 | 15.52. SS-Board (1 of 2) Schematic Diagram | 116 |
| 15.30. D-Board (2 of 6) Schematic Diagram | 94 | 15.53. SS-Board (2 of 2), SS2 and SS3-Board Schematic Diagram | 117 |
| 15.31. D-Board (3 of 6) Schematic Diagram | 95 | 15.54. G, GS, and S-Board Block and Schematic Diagram | 118 |
| 15.32. D-Board (4 of 6) Schematic Diagram | 96 | 15.55. GH and K-Board Block and Schematic Diagram | 119 |
| 15.33. D-Board (5 of 6) Schematic Diagram | 97 | 16 Exploded Views & Replacement Parts List | 121 |
| 15.34. D-Board (6 of 6) Schematic Diagram | 98 | 16.1. Exploded Views | 121 |
| 15.35. C1, C2 and C3-Board Block Diagram | 99 | 16.2. Packing Exploded Views (1) | 122 |
| 15.36. C1-Board (1 of 3) Schematic Diagram | 100 | 16.3. Packing Exploded Views (2) | 123 |
| 15.37. C1-Board (2 of 3) Schematic Diagram | 101 | 16.4. Packing Exploded Views (3) | 124 |
| 15.38. C1-Board (3 of 3) Schematic Diagram | 102 | 16.5. Replacement Parts List Notes | 125 |
| 15.39. C2-Board (1 of 2) Schematic Diagram | 103 | 16.6. Mechanical Replacement Parts List | 126 |
| 15.40. C2-Board (2 of 2) Schematic Diagram | 104 | 16.7. Electrical Replacement Parts List | 127 |
| 15.41. C3-Board (1 of 2) Schematic Diagram | 105 | | |
| 15.42. C3-Board (2 of 2) Schematic Diagram | 106 | | |

1 Applicable signals

COMPONENT (Y, P_B, P_R), HDMI

* Mark: Applicable input signal

| Signal name | COMPONENT | HDMI |
|---------------------|-----------|------|
| 525 (480) / 60i | * | * |
| 525 (480) / 60p | * | * |
| 625 (576) / 50i | * | * |
| 625 (576) / 50p | * | * |
| 750 (720) / 60p | * | * |
| 750 (720) / 50p | * | * |
| 1,125 (1,080) / 60i | * | * |
| 1,125 (1,080) / 50i | * | * |
| 1,125 (1,080) / 60p | | * |
| 1,125 (1,080) / 50p | | * |

PC (D-sub 15P)

| Signal name | Horizontal frequency (kHz) | Vertical frequency (Hz) |
|----------------------------|----------------------------|-------------------------|
| 640 × 400 @70 Hz | 31.47 | 70.07 |
| 640 × 480 @60 Hz | 31.47 | 59.94 |
| 640 × 480 @75 Hz | 37.50 | 75.00 |
| 800 × 600 @60 Hz | 37.88 | 60.32 |
| 800 × 600 @75 Hz | 46.88 | 75.00 |
| 800 × 600 @85 Hz | 53.67 | 85.06 |
| 852 × 480 @60 Hz | 31.44 | 59.89 |
| 1,024 × 768 @60 Hz | 48.36 | 60.00 |
| 1,024 × 768 @70 Hz | 56.48 | 70.07 |
| 1,024 × 768 @75 Hz | 60.02 | 75.03 |
| 1,024 × 768 @85 Hz | 68.68 | 85.00 |
| 1,280 × 1,024 @60 Hz | 63.98 | 60.02 |
| 1,366 × 768 @60 Hz | 48.39 | 60.04 |
| Macintosh13" (640 × 480) | 35.00 | 66.67 |
| Macintosh16" (832 × 624) | 49.73 | 74.55 |
| Macintosh21" (1,152 × 870) | 68.68 | 75.06 |

Note

- Signals other than above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.
- Applicable input signal for PC is basically compatible to VESA standard timing.
- PC signal is magnified or compressed for display, so that it may not be possible to show fine detail with sufficient clarity.

2 Safety Precautions

2.1. General Guidelines

1. When conducting repairs and servicing, do not attempt to modify the equipment, its parts or its materials.
2. When wiring units (with cables, flexible cables or lead wires) are supplied as repair parts and only one wire or some of the wires have been broken or disconnected, do not attempt to repair or re-wire the units. Replace the entire wiring unit instead.
3. When conducting repairs and servicing, do not twist the Faston connectors but plug them straight in or unplug them straight out.
4. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
5. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
6. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

2.2. Touch-Current Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use Leakage Current Tester (Simpson 228 or equivalent) to measure the potential across the measuring network.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
6. The potential at any point (TOUCH CURRENT) expressed as voltage U_1 and U_2 , does not exceed the following values:
For a. c.: $U_1 = 35$ V (peak) and $U_2 = 0.35$ V (peak);
For d. c.: $U_1 = 1.0$ V,


Note:

The limit value of $U_2 = 0.35$ V (peak) for a. c. and $U_1 = 1.0$ V for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

The limit value $U_1 = 35$ V (peak) for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz.

7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

Measuring network for TOUCH CURRENTS

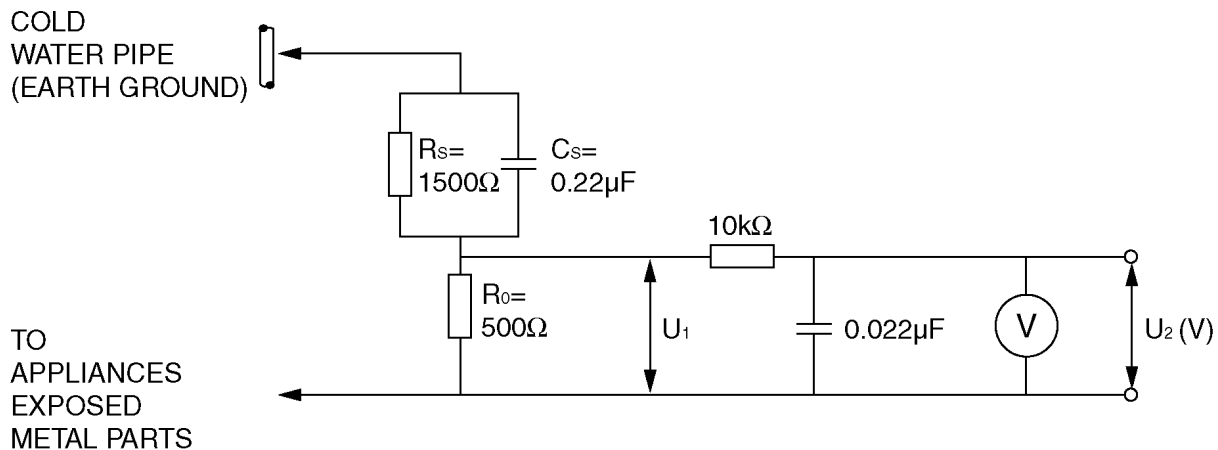

Resistance values in ohms (Ω)

V: Voltmeter or oscilloscope
(r.m.s. or peak reading)

Input resistance: ≥ 1 M Ω

Input capacitance: ≤ 200 pF

Frequency range: 15 Hz to 1 MHz and d.c. respectively

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

Figure 1

3 Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).


1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise ham less motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

4 About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).

That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.


PCBs manufactured using lead free solder will have the PbF within a leaf Symbol **PbF** stamped on the back of PCB.

Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).




If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.

- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

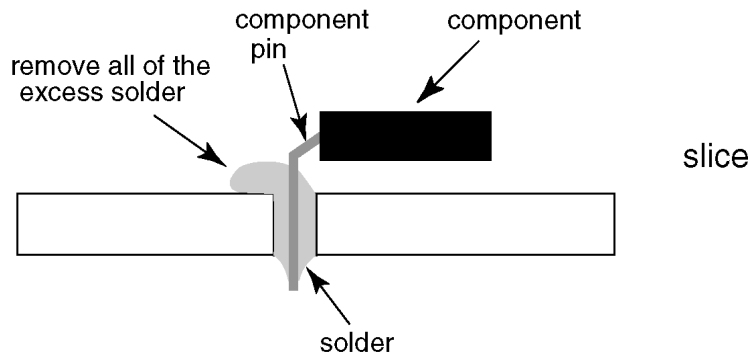


Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.
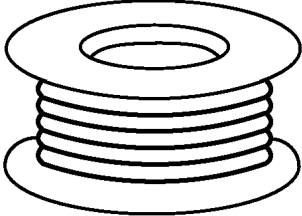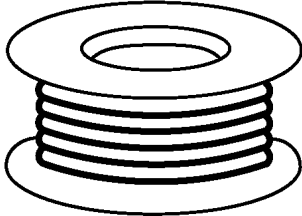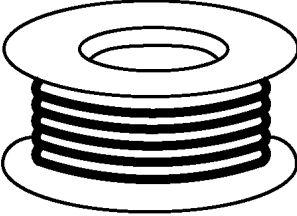
| 0.3mm X 100g | 0.6mm X 100g | 1.0mm X 100g |
|---|---|--|
|  |  |  |


5 Service Hint

Remove the Rear Cover

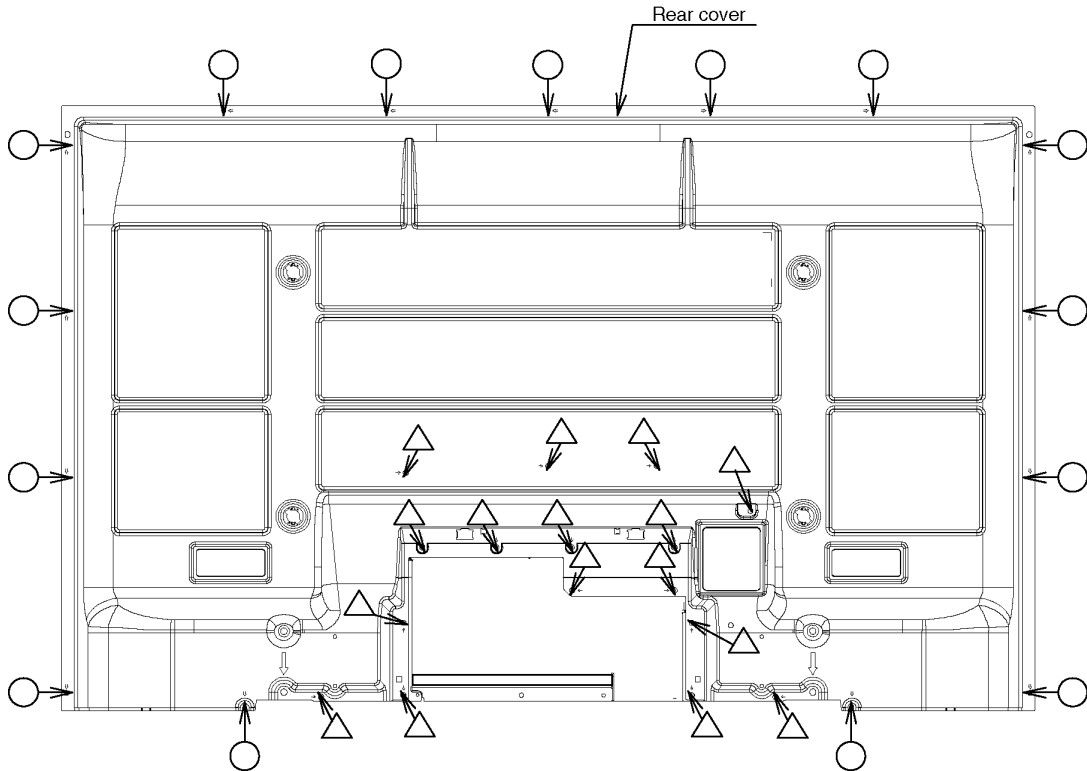

○ : XTB4+12GFJF (15)

△ : THEL0429 (16)

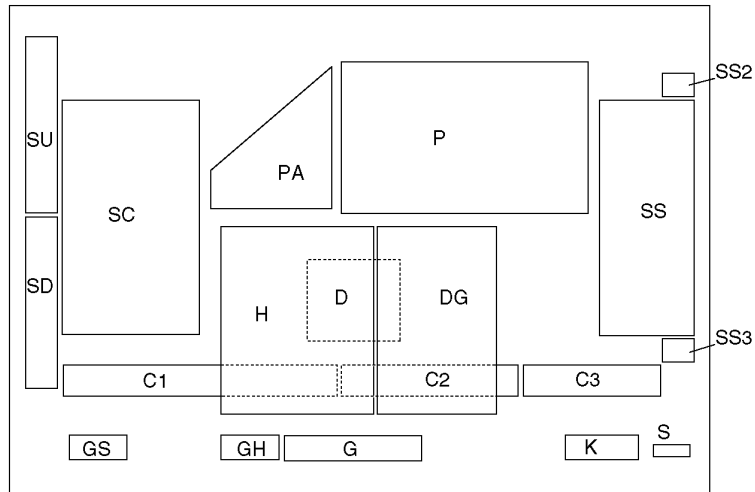

| Board Name | Function | Board Name | Function |
|------------|---|------------|--|
| P | Power Supply | D | Format Converter, Plasma AI, Sub-Field Processor |
| DG | Digital Signal Processor, MCU, HDMI Interface Peaks Lite 2 | C1 | Data Driver (Lower Right) |
| K | Remote receiver, Power LED | C2 | Data Driver (Lower center) |
| S | Power Switch | C3 | Data Driver (Lower Left) |
| H | Speaker out, Sound Processor AV Terminal, AV Switch | SC | Scan Drive |
| PA | DC-DC Converter | SU | Scan out (Upper) |
| G | Key Switch, Front Terminal | SD | Scan out (Lower) |
| GH | HDMI 3 IN | SS | Sustain Drive |
| GS | SD Card slot | SS2 | Sustain out (Upper) |
| | | SS3 | Sustain out (Lower) |


6 Plasma panel replacement method

6.1. Remove the rear cover

1. See Service Hint (Section 5)

6.2. Remove the rear terminal cover


1. Remove the screws (×12 ⇨, ×6 ⇨, ×2 ⇨).
2. Remove the rear terminal cover.

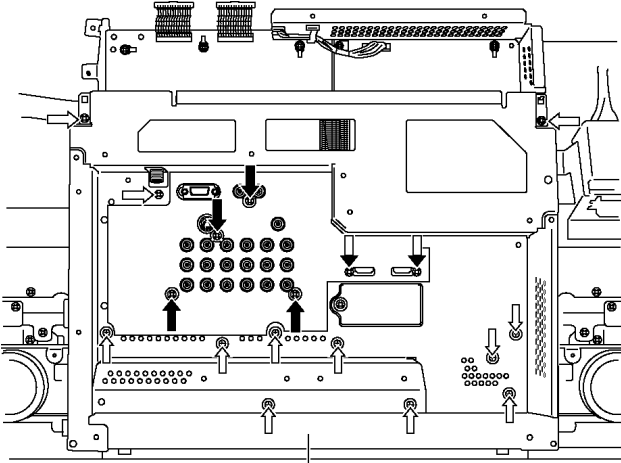

Rear terminal cover


6.3. Remove the Speaker box assy (left)

1. Unlock the cable clampers to free the cable.
2. Disconnect the relay coupler.
3. Remove the screw(⇨) and remove the Speaker box assy (left).

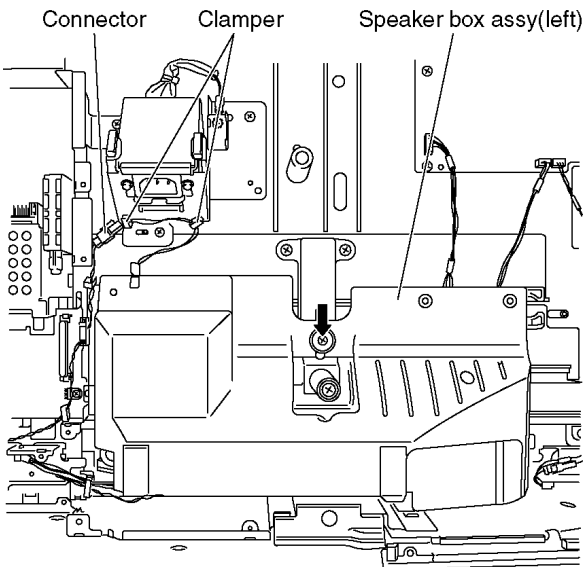

6.4. Remove the Speaker box assy (right)

1. Unlock the cable clampers to free the cable.
2. Disconnect the relay coupler.
3. Remove the screw(⇨) and remove the Speaker box assy (right).

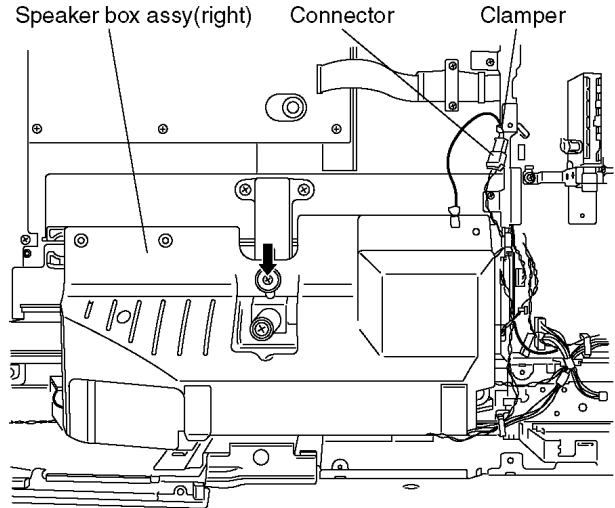


6.5. Remove the P-Board


Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.


1. Disconnect the connectors (P2, P6, P7, P9, P11, P12 and P25).
2. Remove the screws (×6 ⇨) and remove the P-Board unit.

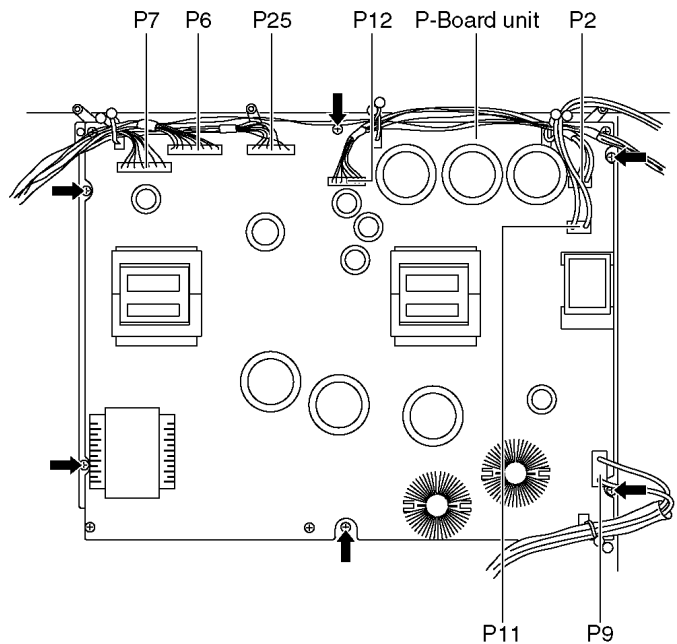

3. Remove the screws (×20 ⇨) on the back side.

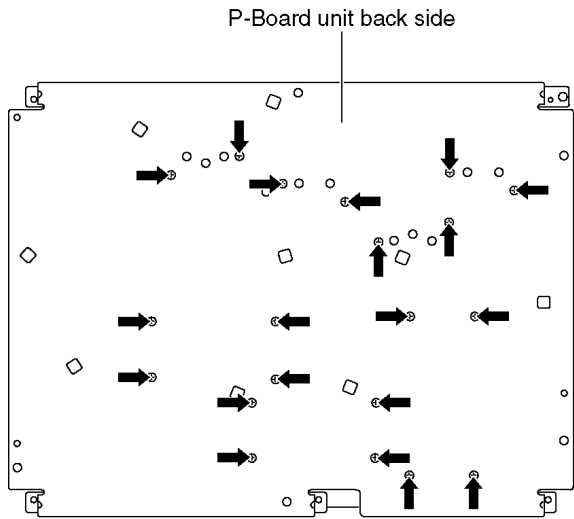


4. Remove the screws (×5 ➡).
5. Remove the molding props (×9 ⇨).
6. Remove the P-Board.

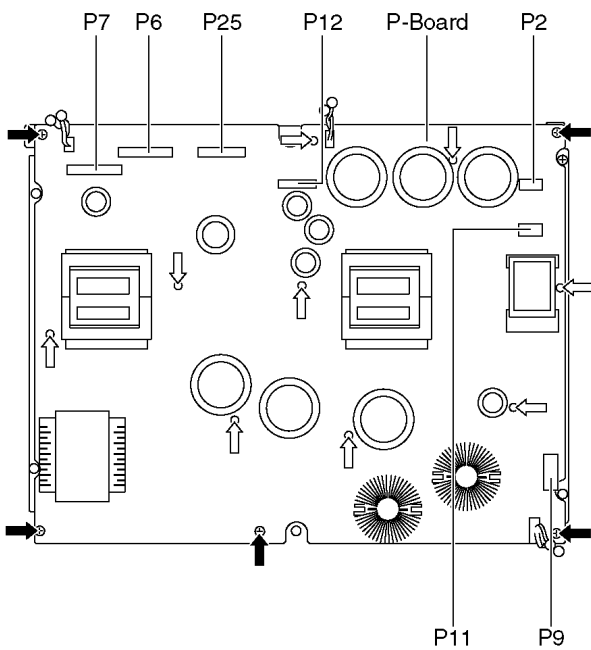


Note:

When assembling the P-Board, the position of each hole of the insulation sheets (A and B) is set to the position of each hole of the P-Board, then assemble them. (➡ marks indicate setting positions.)

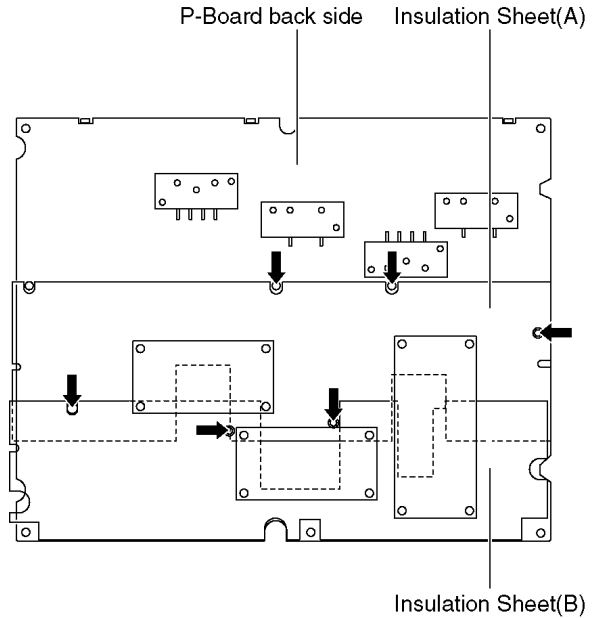


6.6. Remove the PA-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (PA3, PA4, PA6 and PA7).
3. Remove the screws (×3 ➡) and remove the PA-Board.

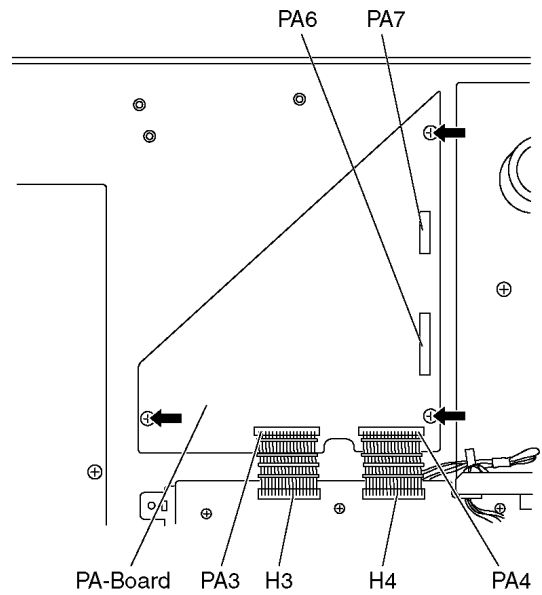


6.7. Remove the Tuner unit

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (H3, H4, H11, H12, H51, DG1, DG5, DG9 and DG52).
3. Remove the screws (×4 ➡) and remove the tuner unit.

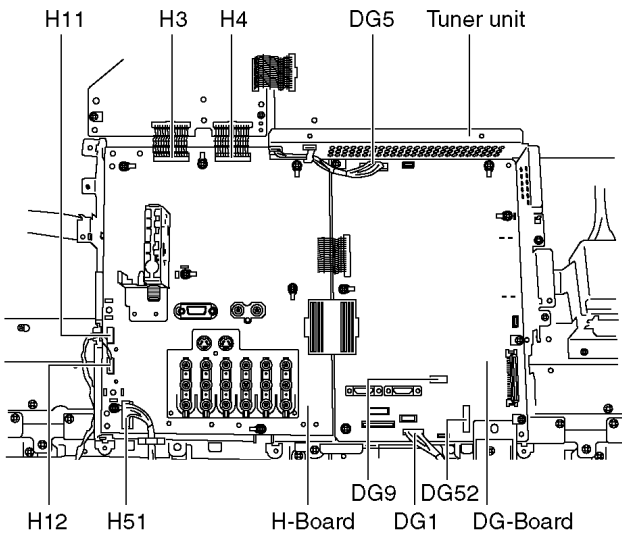


6.9. Remove the H-Board

1. Remove the tuner unit (See section 6.7.)
2. Remove the screw (×1 ➡) and remove the tuner fixing metal with screw cover.
3. Remove the screw (×7 ➡) and remove the H-Board.

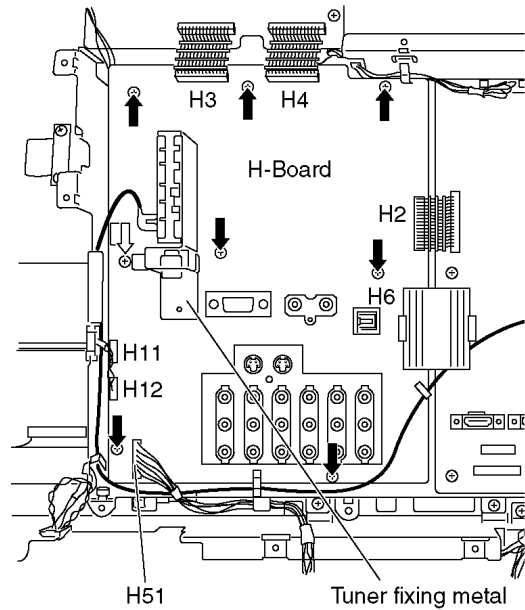


6.8. Remove the DG-Board

1. Remove the tuner unit. (See section 6.7.)
2. Disconnect the connectors (DG2 and DG6)
3. Remove the screws (×6 ➡) and remove the DG-Board.

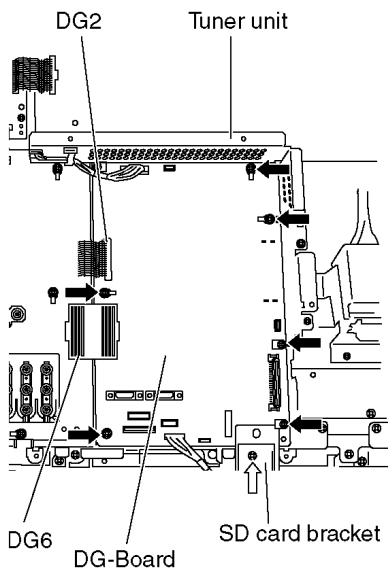


6.10. Remove the D-Board

1. Remove the tuner unit. (See section 6.7.)
2. Disconnect the connectors (D5 and D25).
3. Disconnect the flexible cables (D20, D31 and D32).
4. Remove the screws (×4 ➡) and remove the D-Board.

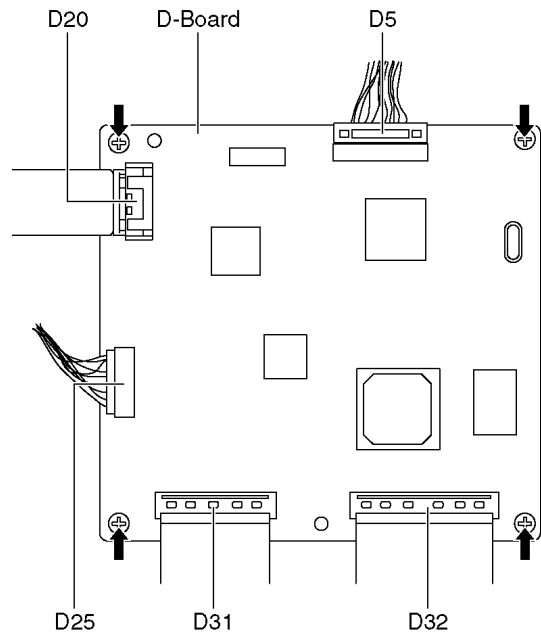


6.11. Remove the SU-Board

1. Remove the screws ($\times 3 \rightarrow$).
2. Remove the flexible cables (SU1, SU2, SU3 and SU4) connected to the SU-Board and remove the connector (SC45-SU45).
3. Slide the SU-Board to the left to disconnect from a connector (SC41-SU41) on the SC-Board and remove the SU-Board.

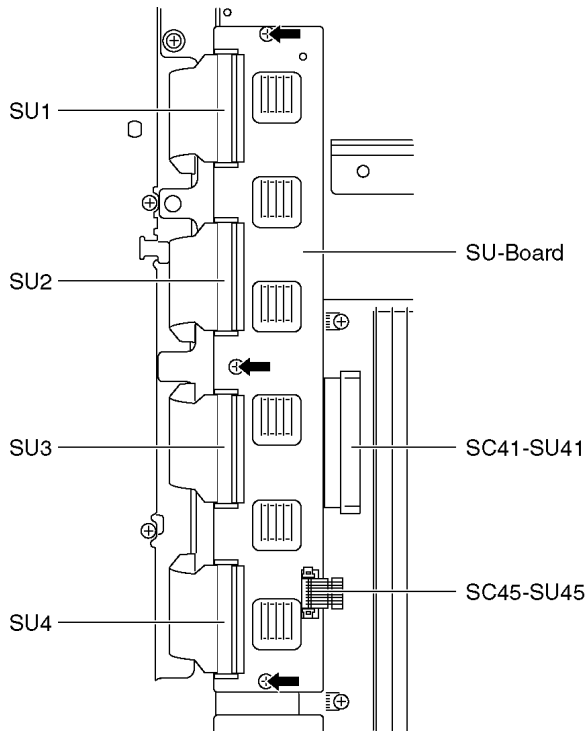


6.12. Remove the SD-Board

1. Remove the screws ($\times 3 \rightarrow$).
2. Remove the flexible cables (SD1, SD2, SD3 and SD4) connected to the SD-Board and remove the connector (SC46-SD46).
3. Slide the SD-Board to the left to disconnect from a connector (SC42-SD42) on the SC-Board and remove the SD-Board.

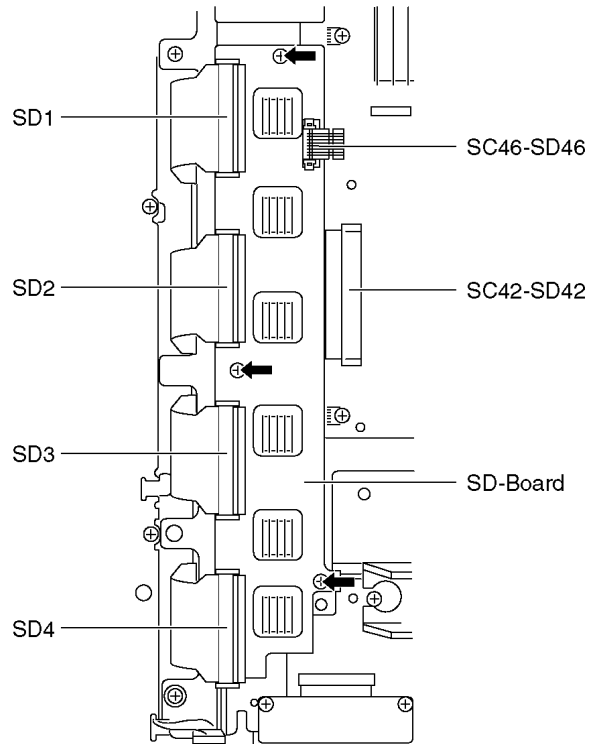


6.13. Remove the SC-Board

1. Remove the SU-Board and SD-Board. (See section 6.11. and 6.12.)
2. Unlock the cable claspers to free the cable.
3. Disconnect the connector (SC2).
4. Disconnect the flexible cable (SC20).
5. Remove the screws ($\times 9 \rightarrow$) and remove the SC-Board.

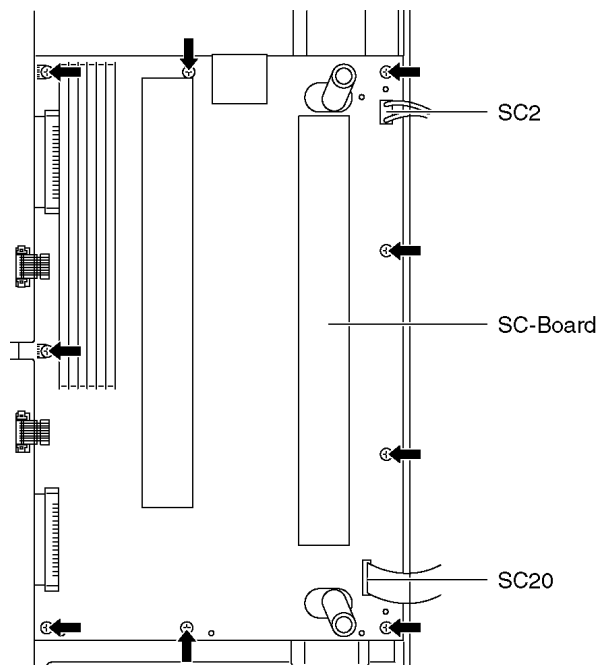


6.14. Remove the SS2-Board

1. Disconnect the connector (SS23) and disconnect the flexible cable (SS52).
2. Remove the screws (×2 ➡) and remove the SS2-Board.

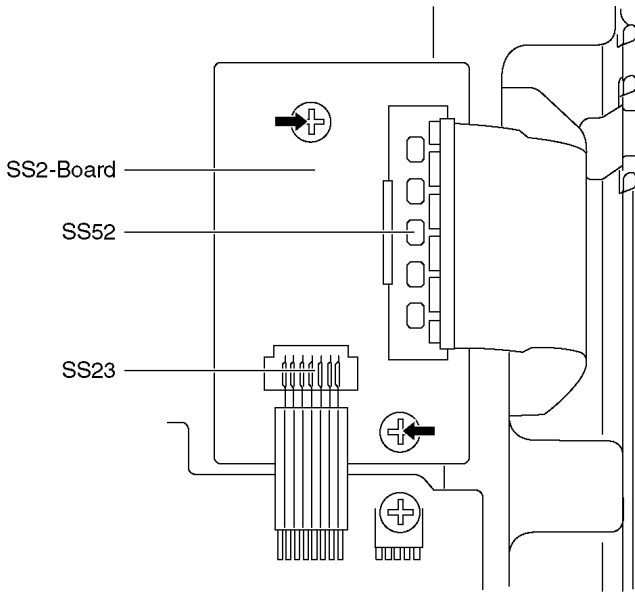


6.15. Remove the SS3-Board

1. Disconnect the connector (SS24) and disconnect the flexible cable (SS57).
2. Remove the screws (×2 ➡) and remove the SS3-Board.

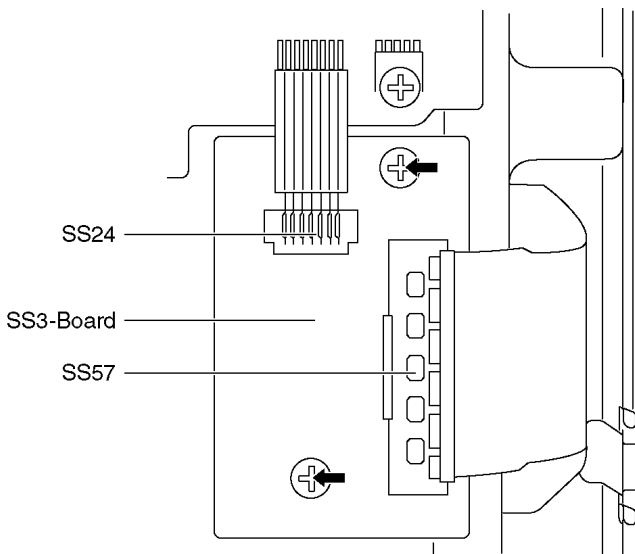


6.16. Remove the SS-Board

1. Disconnect the connectors (SS11, SS12, SS23, SS24, SS33, SS34 and SS35).
2. Disconnect the flexible cables (SS54 and SS55).
3. Remove the screws (×7 ➡) and remove the SS-Board.

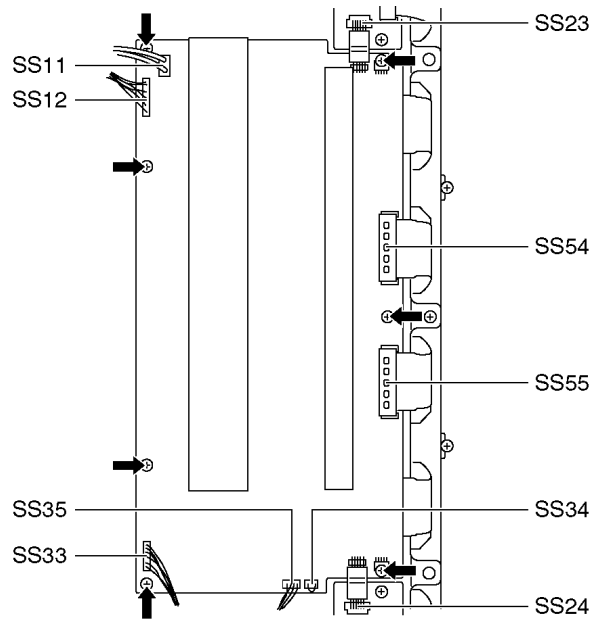


6.17. Remove the stand brackets

1. Remove the plasma panel section from the servicing stand and lay on a flat surface such as a table (covered) with the plasma panel surface facing downward.
2. Remove the stand brackets (left, right) fastening screws (×5 ➡ each) and remove the stand brackets (left, right).

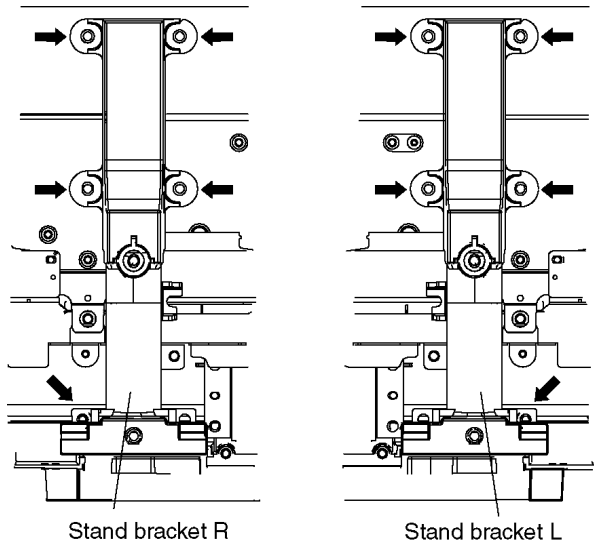


6.18. Remove the C1-Board

1. Remove the tuner unit. (See section 6.7.)
2. Remove the stand bracket (L). (See section 6.17.)
3. Remove the flexible cables holder fastening screws ($\times 10 \Rightarrow$).
4. Disconnect the flexible cables (CB1, CB2, CB3, CB4 and CB5).
5. Disconnect the flexible cables (C10 and C11).
6. Remove the screws ($\times 5 \Rightarrow$) and remove the C1-Board.

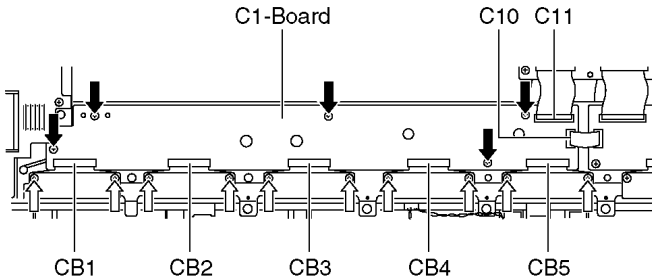


6.19. Remove the C2-Board

1. Remove the tuner unit. (See section 6.7.)
2. Remove the flexible cables holder fastening screws ($\times 6 \Rightarrow$).
3. Disconnect the flexible cables (CB6, CB7 and CB8).
4. Disconnect the flexible cables (C20, C21 and C22).
5. Remove the screws ($\times 4 \Rightarrow$) and remove the C2-Board.

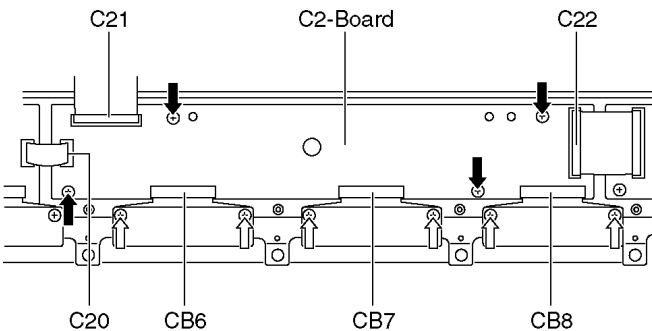


6.20. Remove the C3-Board

1. Remove the tuner unit. (See section 6.7.)
2. Remove the stand bracket (R). (See section 6.17.)
3. Remove the flexible cables holder fastening screws ($\times 6 \Rightarrow$).
4. Disconnect the flexible cables (CB9, CB10 and CB11).
5. Disconnect the flexible cable (C32).
6. Disconnect the connectors (C33 and C35).
7. Remove the screws ($\times 4 \Rightarrow$) and remove the C3-Board.

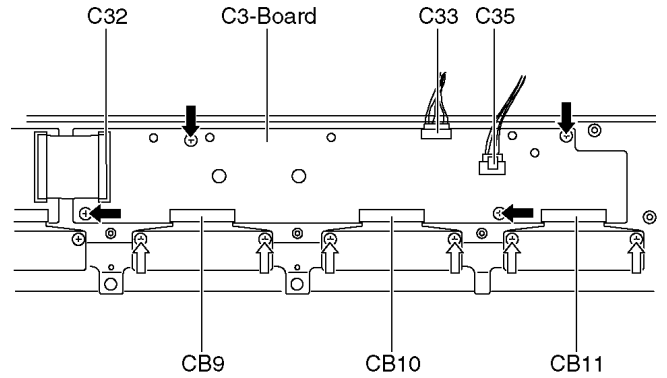


6.21. Remove the front bracket and the front shield case cover

1. Remove the screws ($\times 2 \Rightarrow$, $\times 1 \Rightarrow$) and remove the front shield case.

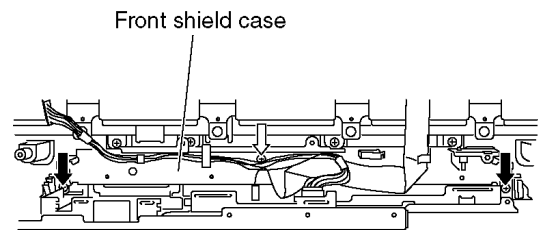


6.22. Remove the G-Board and GH-Board

1. Remove the front bracket and the front shield case cover. (See section 6.21.)
2. Remove the screws ($\times 4 \Rightarrow$) and remove the front shield case (front).

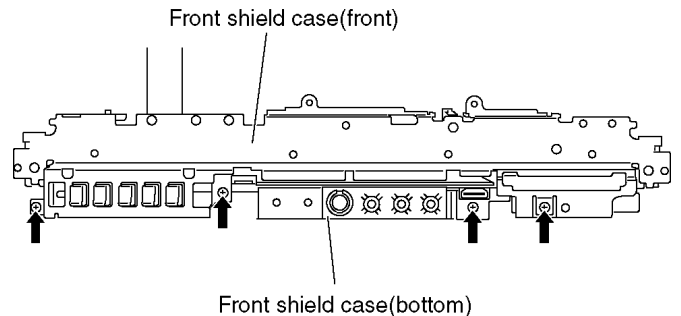


3. Remove the screws ($\times 4 \Rightarrow$) and disconnect the connector (G51 and GH11).
4. Remove the G-Board and GH-Board.

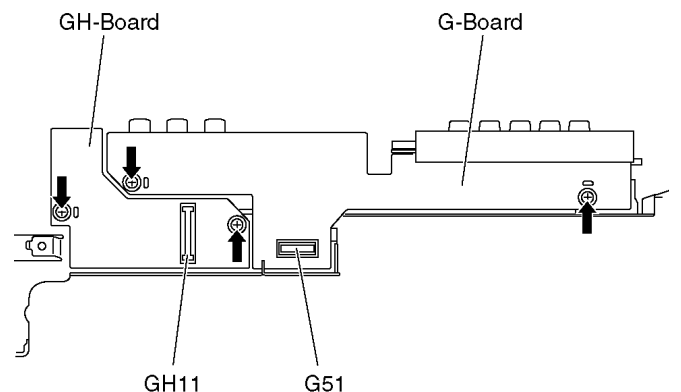


6.23. Remove the GS-Board

1. Remove the screws (×2 ➡) and remove the GS-unit.

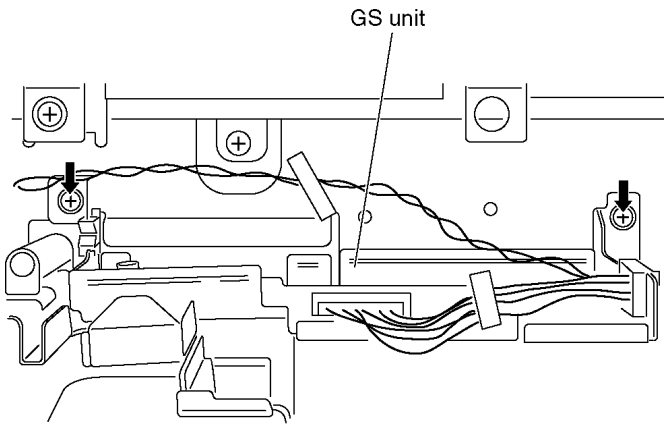


2. Disconnect the connector (GS52).
3. Remove the screw (➡) and remove the GS-Board.

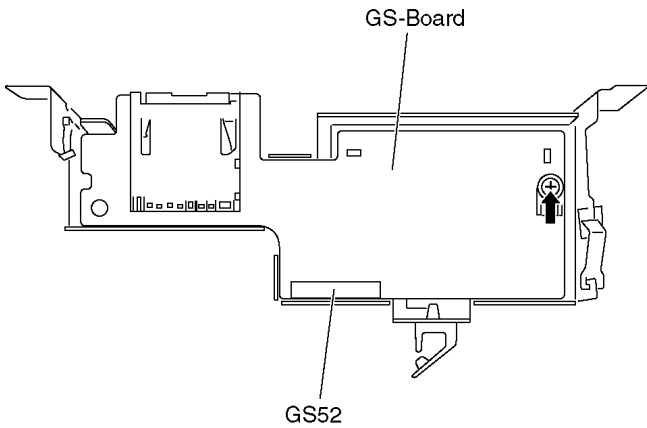


6.24. Remove the S-Board

1. Remove the screws (×2 ➡) and remove the S-Board metal frame.

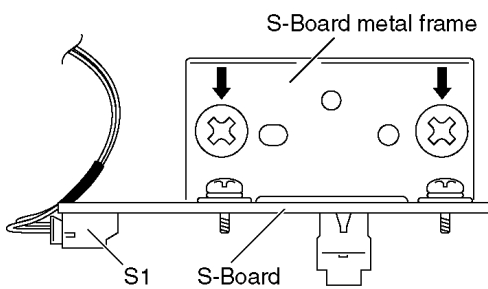


2. Disconnect the connector (S1).
3. Remove the screws (×2 ➡) and remove the S-Board.

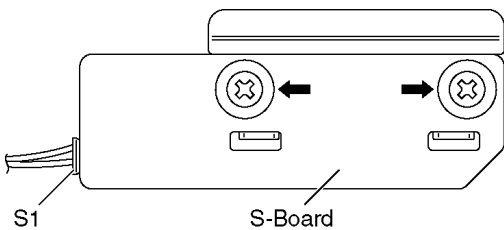


6.25. Remove the K-Board

1. Unlock the cable claspers to free the cable.
2. Disconnect the connector (DG1). (See section 6.8.)
3. Remove the screws (×2 ➡) and remove the K-Board.

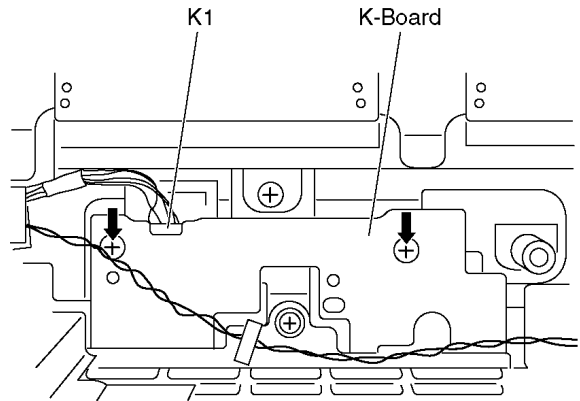


4. Disconnect the connectors (K1) and remove the K-Board.

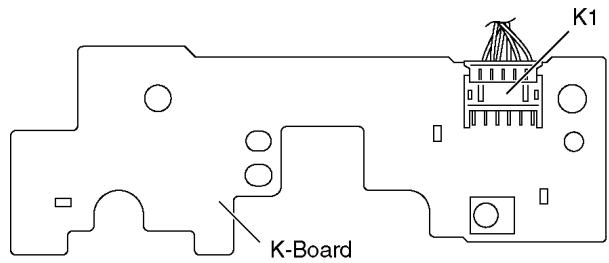


6.26. Remove the Plasma panel section from the Cabinet assy (glass)


1. Remove the stand brackets (left, right) fastening screw (×1 ➡ each).

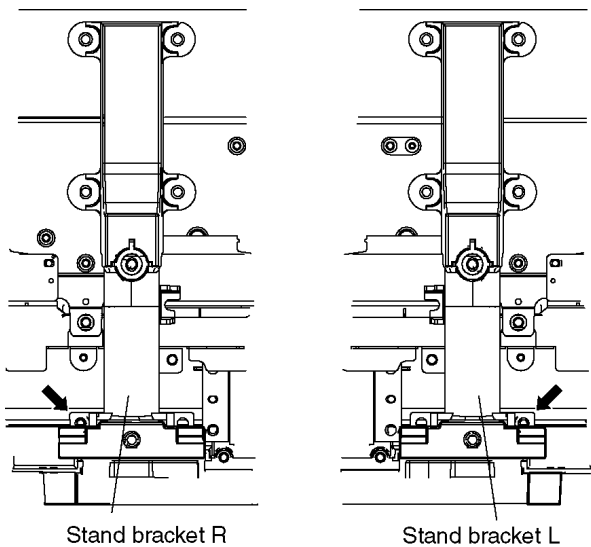



2. Remove the cabinet assy and the plasma panel fastening screws (×6 ➡).

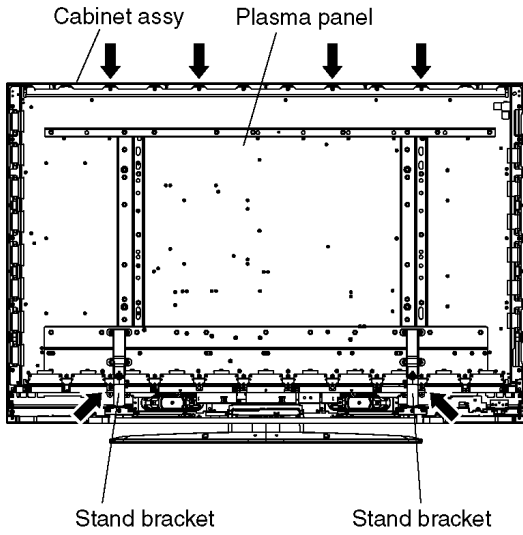

3. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.

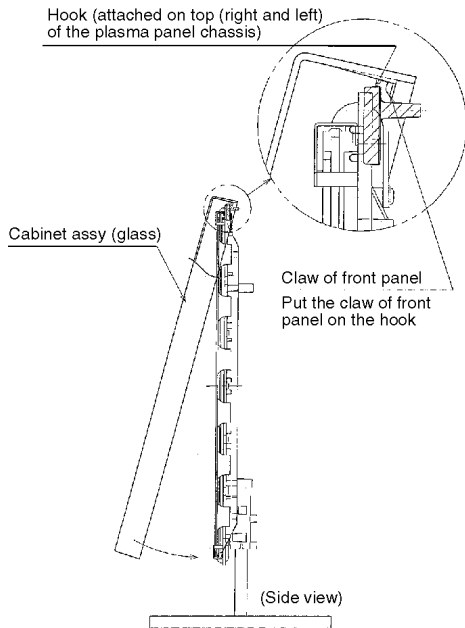


4. Remove the spacers and spacer rings (×6 ➡).

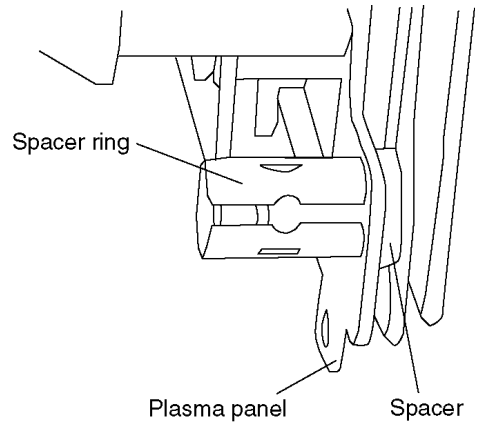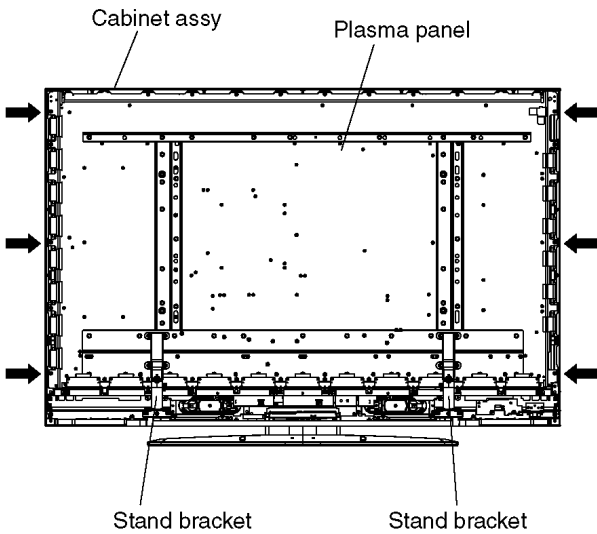


6.27. Remove the squawker speaker

1. Remove the cabinet assy. (See section 6.26.).
2. Remove the screws (×12 ➡).
3. Remove the glass holder R and L.

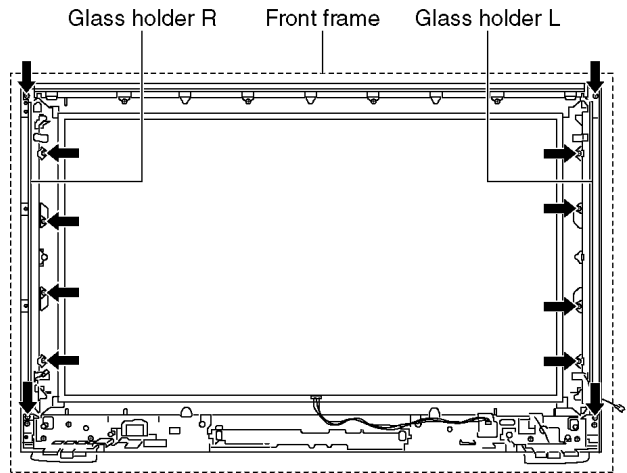

4. Remove the screws (×2 ➡).
5. Remove the squawker speaker.

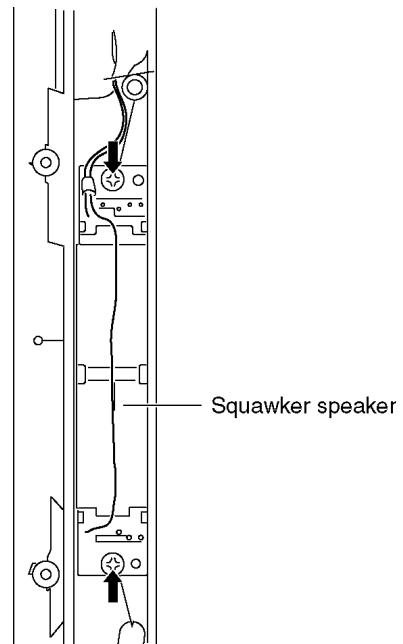

6.28. Replace the plasma panel (finished)

1. Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
2. Attach the C1-Board, C2-Board and the C3-Board, connect the flexible cables (×22) from the plasma panel to the C1-Board, C2-Board and the C3-Board, and fit the flexible cable holders.
3. Attach the Hooks (left, right) and fit the stand brackets (L, R) to the new plasma panel.
4. Place the plasma panel section on the servicing stand.
5. Attach the cabinet assy and each P.C.Board and so on, to the new plasma panel.

***When fitting the cabinet assy, be careful not to allow any debris, dust or handling residue to remain between the front glass and plasma panel.**

7 Caution statement

7.1. Caution statement.

Caution:

Please confirm that all flexible cables are assembled correctly.


Also make sure that they are locked in the connectors.

Verify by giving the flexible cables a very slight pull.


8 Location of Lead Wiring

8.1. Lead of Wiring (1)

The wire is dressed as shown in figure.

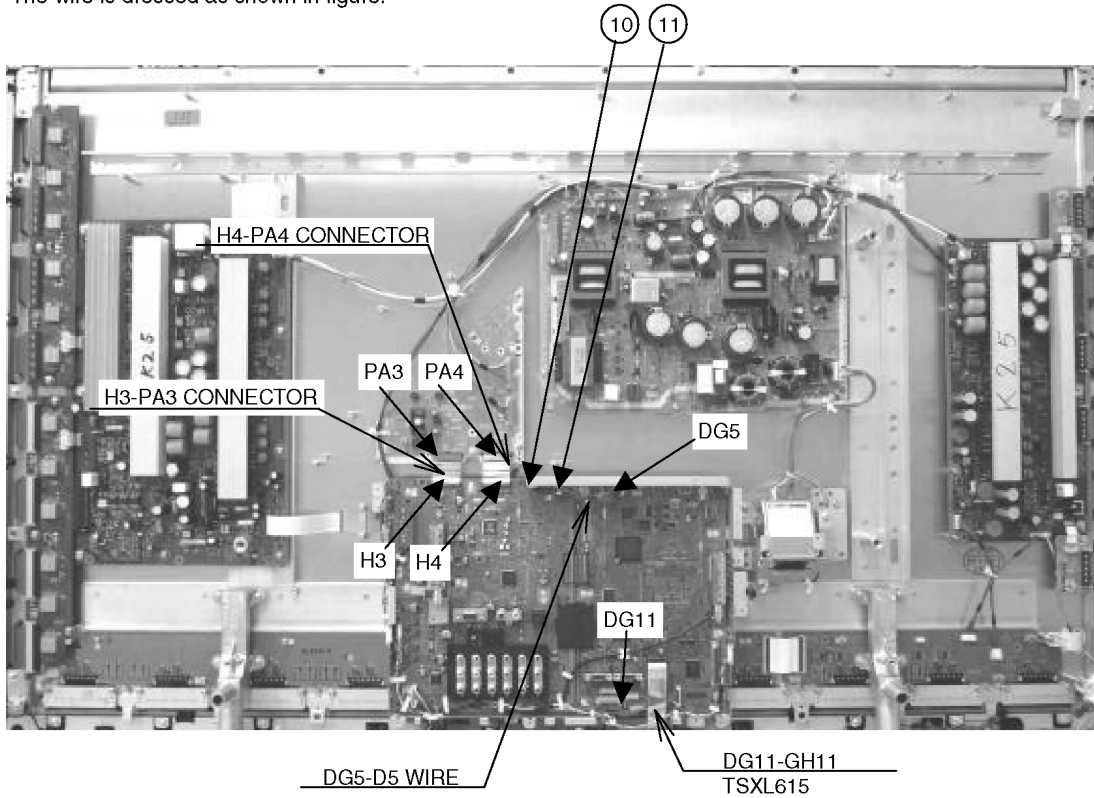


| CONNECTOR | CLAMPER No. | | | |
|-------------|-------------|----|--|--|
| | 10 | 11 | | |
| DG5 - D5 | ○ | ○ | | |
| H3 - PA3 | | | | |
| H4 - PA4 | | | | |
| DG11 - GH11 | | | | |

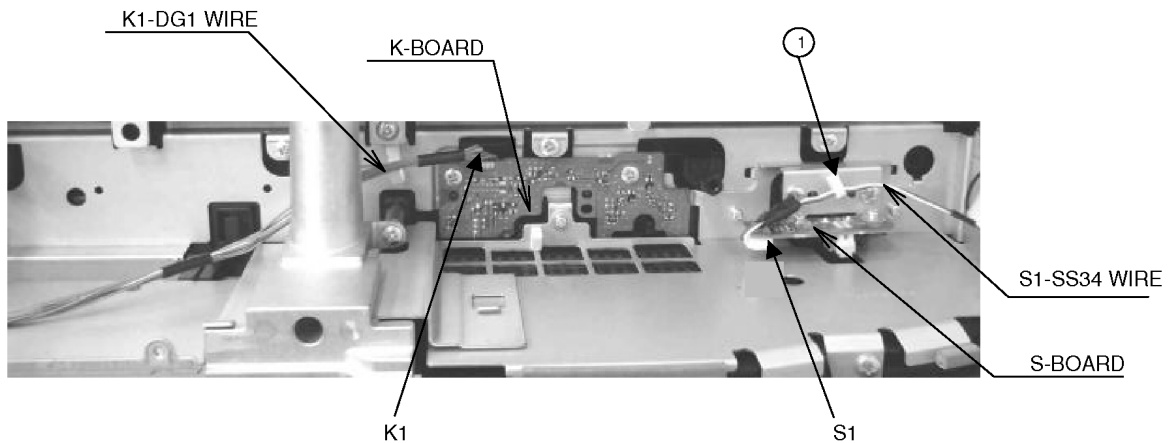


| CONNECTOR | CLAMPER No. | | | |
|-----------|-------------|--|--|--|
| | 1 | | | |
| S1 - SS34 | ○ | | | |
| K1 - DG1 | | | | |

8.2. Lead of Wiring (2)

The wire is dressed as shown in figure.

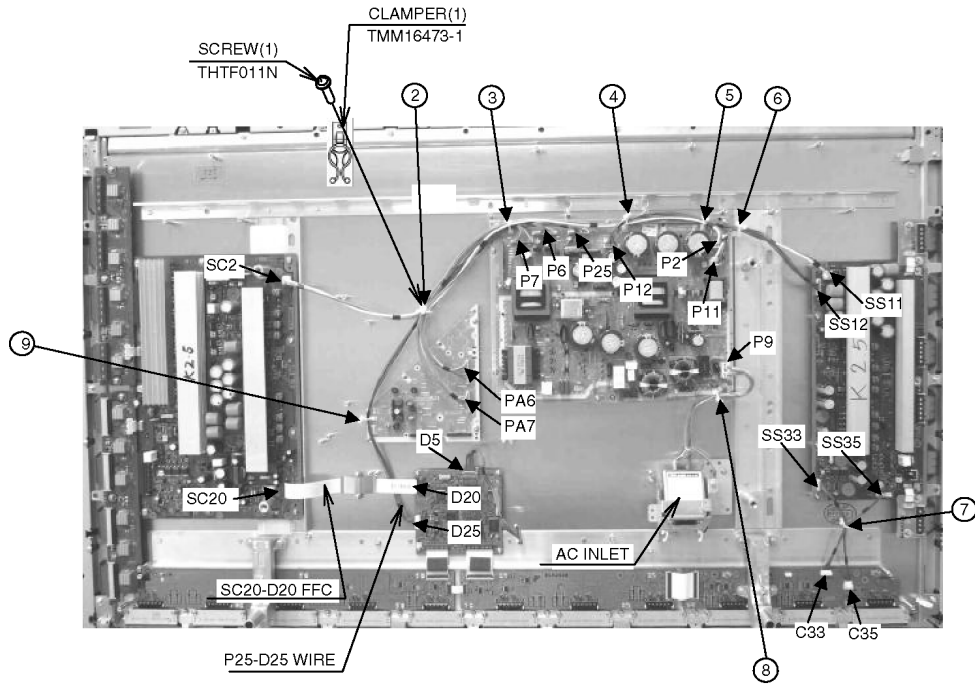





| CONNECTOR | CLAMPER No. | | | | | | | | |
|---------------|-------------|---|---|---|---|---|---|---|--|
| | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| SC2 - P2 | ○ | ○ | ○ | ○ | | | | | |
| SC20 - D20 | | | | | | | | | |
| P11 - SS1 | | | | | | ○ | | | |
| P12 - SS12 | | | ○ | ○ | ○ | | | | |
| SS33 - C33 | | | | | | | ○ | | |
| SS35 - C35 | | | | | | | ○ | | |
| DG5 - D5 | | | | | | | | | |
| D25 - P25 | ○ | ○ | | | | | | ○ | |
| AC INLET - P9 | | | | | | | | ○ | |
| P6 - PA6 | ○ | ○ | | | | | | | |
| P7 - PA7 | ○ | ○ | | | | | | | |

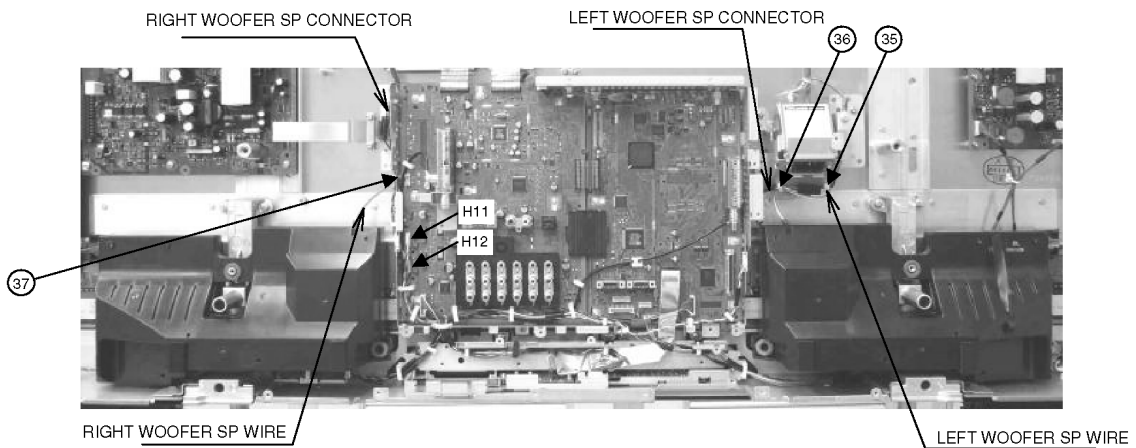

| CONNECTOR | | CLAMPER No. | | |
|---------------------------|----------------------|-------------|----|----|
| | | 35 | 36 | 37 |
| LEFT WOOFER SP CONNECTOR | H11 | | ○ | |
| | LEFT WOOFER SP WIRE | ○ | ○ | |
| RIGHT WOOFER SP CONNECTOR | H12 | | | |
| | RIGHT WOOFER SP WIRE | | | ○ |

8.3. Lead of Wiring (3)

The wire is dressed as shown in figure.

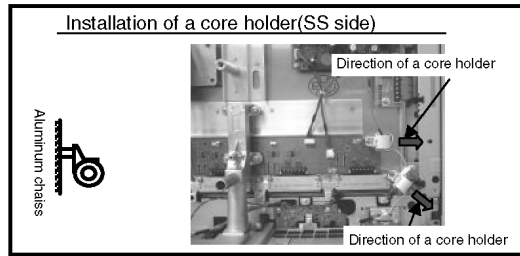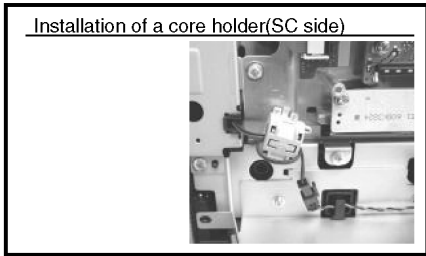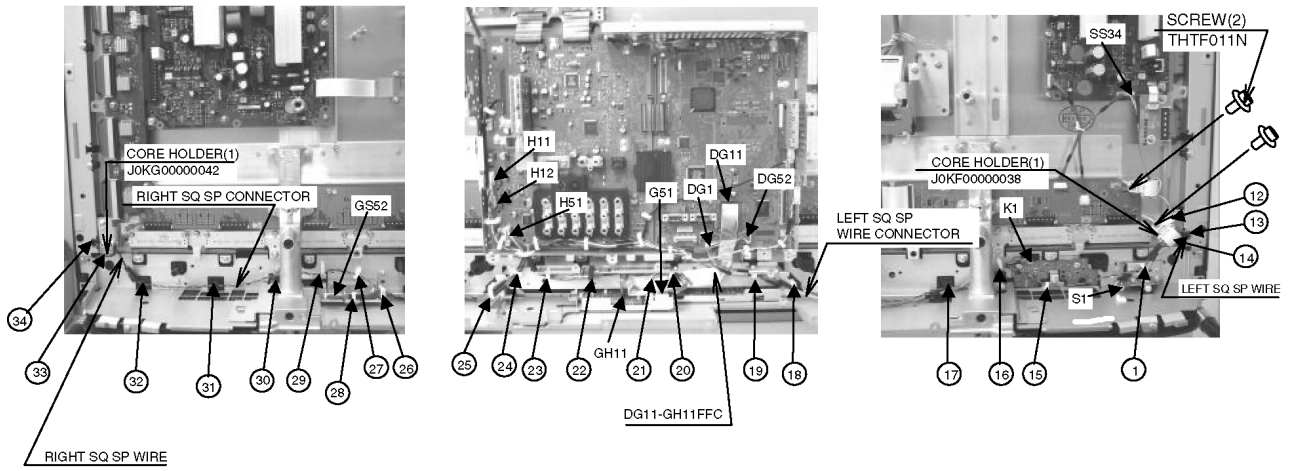

| CONNECTOR | | CLAMPER No. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------|------------------|-------------|----|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | 12 | 13 | 14 | 1 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | | | | | | | | | | | | | |
| LEFT SQ SP CONNECTOR | H11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LEFT SQ SP WIRE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RIGHT SQ SP CONNECTOR | H12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | RIGHT SQ SP WIRE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DG52 - GS52 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| K1 - DG1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DG11 - GH11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H51 - G51 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S1 - SS34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

9 Self-check Function

Use the self-check function to test the unit.

1. Checking the IIC bus lines
2. Power LED Blinking timing

9.1. Check of the IIC bus lines

9.1.1. How to access

Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [OK] button on the remote control for more than 3 seconds.

Self-check indication and forced to factory shipment setting:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [MENU] button on the remote control for more than 3 seconds.

9.1.2. Screen display

| | | |
|---------------------|----------------------|---------------------|
| 50HD SET | Panasonic 2007PDP | 50pv700h.dat:00004a |
| SELF CHECK COMPLETE | | |
| ADV OK | PEAKS SOFT 1.010 | SUM 17f3 |
| VSW OK | PEAKS EEP 00.50.0290 | OPTION 1 38 |
| ADAV OK | GENX SOFT 1.00.00 | OPTION 2 e2 |
| ASW OK | GENX EEP 1.02.00 | OPTION 3 6f |
| GENX OK | GENX ROMCOR 1.01.00 | Check 3c |
| MEN1 OK | PDP MCU 01.07 | Model ID 04 |
| MEN2 OK | PDP EEP 51.01 | 02020000 |
| TUN1 OK | PDP FPGA 41.01 | 00000040 |
| TUN2 OK | PDP PDRAM 51.00 | |
| GC3FS OK | | |
| PDP-PANEL OK | | |
| TEMP OK | | |

9.1.3. Check Point

Confirm the following parts if NG was displayed.

| Display | Ref. No. | Description | P.C.B. |
|-----------|----------|-------------------|----------|
| ADV | IC4510 | AD/HDMI | DG-Board |
| VSW | IC3001 | Video SW | H-Board |
| ADAV | IC2106 | Sound Processor | H-Board |
| ASW | IC3101 | Audio SW | H-Board |
| GEN | IC1100 | GenX (STB MCU) | DG-Board |
| MEM1 | IC1101 | EEPROM (GenX) | DG-Board |
| MEM2 | IC8601 | EEPROM (Peaks) | DG-Board |
| TUN1 | TU3200 | Tuner (Main) | H-Board |
| TUN2 | TU3201 | Tuner (Sub) | H-Board |
| GC3FS | IC4001 | Global core (Sub) | DG-Board |
| PDP-PANEL | IC9003 | MICOM | D-Board |
| TEMP | IC4800 | Temp Sensor | DG-Board |

9.1.4. Exit

Disconnect the AC cord from wall outlet.

9.2. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.


| Blinking Times | Blinking timing | Contents | Check point |
|----------------|-----------------|--|----------------------------------|
| 1 | | No particular check point | - |
| 2 | | 15V SOS | P-Board |
| 3 | | 3.3V SOS | D-Board |
| 4 | | Power SOS | P-Board |
| 5 | | 5V SOS | P-Board D-Board |
| 6 | | Driver SOS1 (SC Energy recovery circuit) | SU-Board SD-Board SC-Board |
| 7 | | Driver SOS2 (SC floating voltage area) | SU-Board SD-Board SC-Board |
| 8 | | Driver SOS3 (SS Energy recovery circuit) | SS-Board |
| 9 | | Config SOS | - |
| 10 | | Sub 5V SOS Main 3.3V SOS DTV 9V SOS Tuner Power SOS | PA-Board H-Board DG-Board |
| 12 | | Sound SOS | P-Board H-Board |
| 13 | | Communication Error with IC8001 (Peaks Lite 2) | DG-Board |

9.3. No Power


First check point

There are following 2 states of No Power indication by power LED.


1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 9.2.)

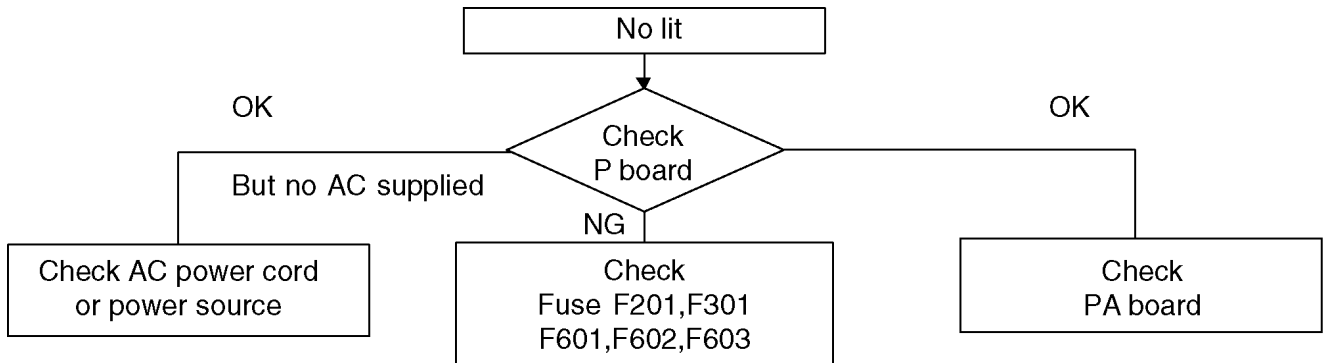

9.4. No Picture

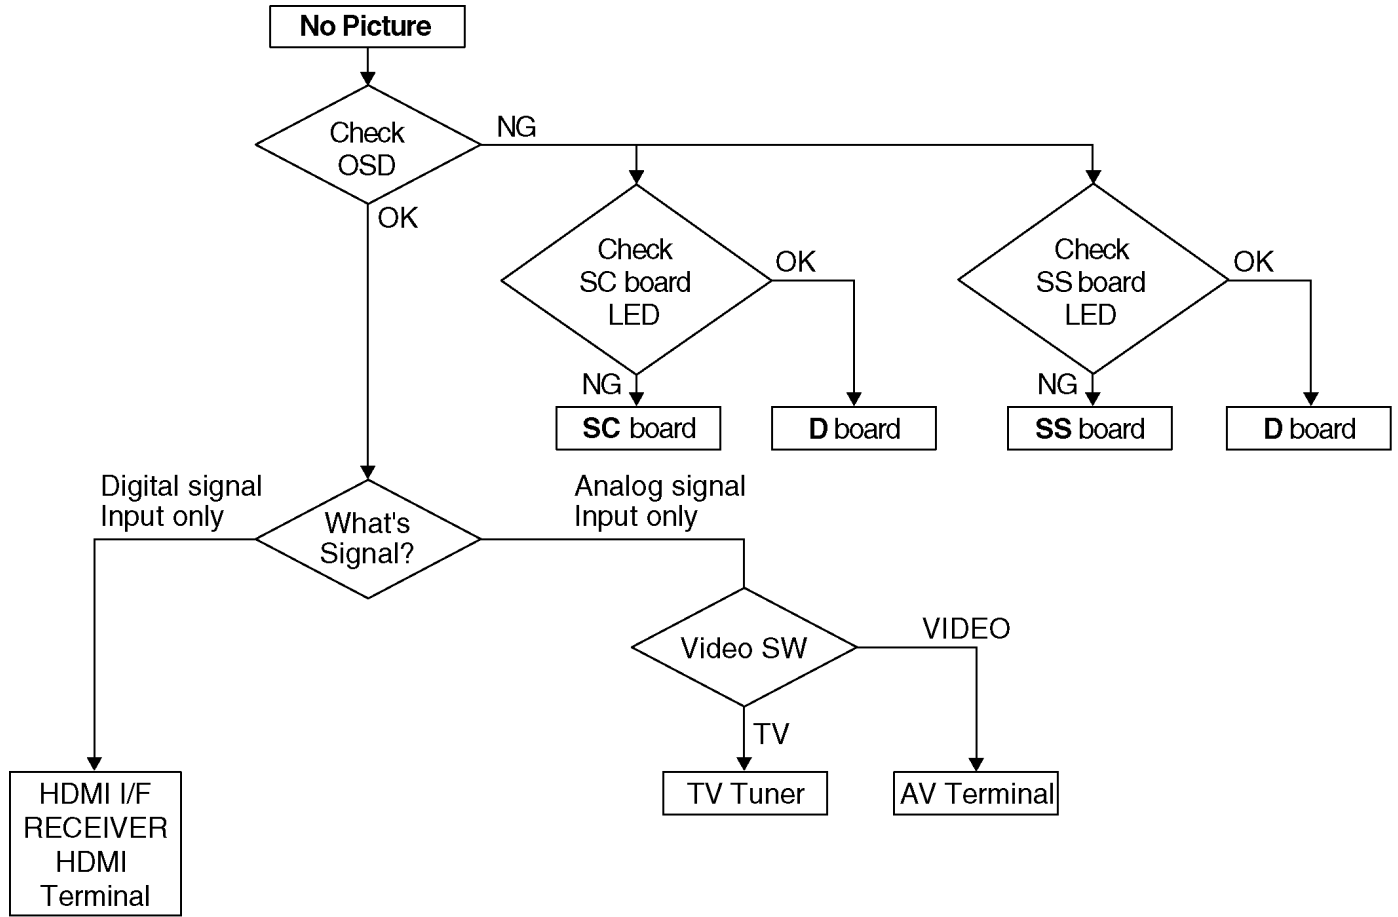


Drive circuits LED indicator

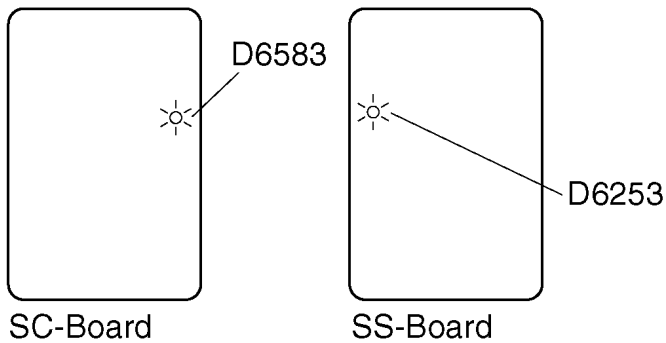

9.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

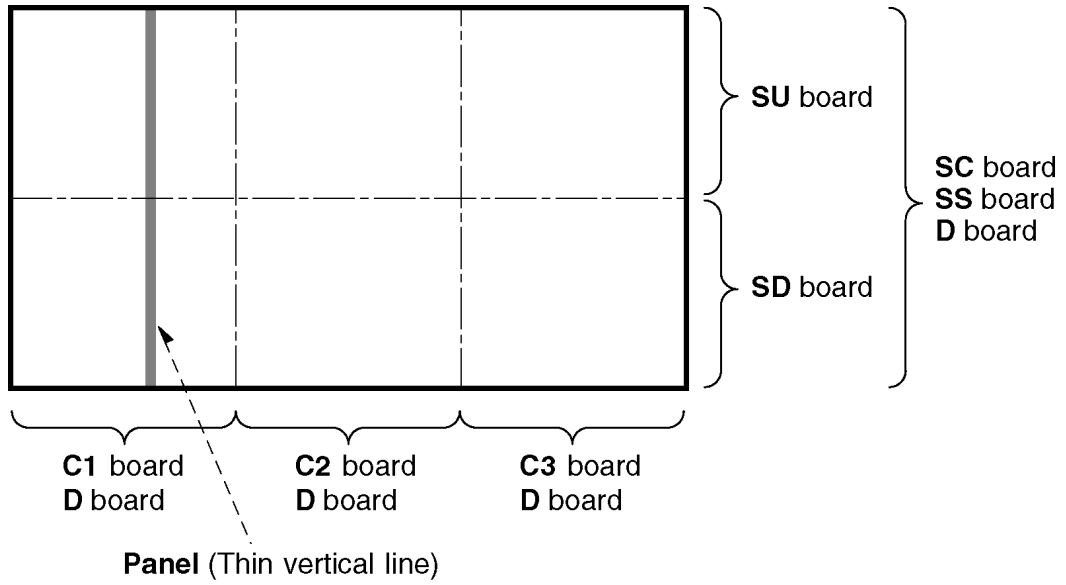


<Local screen failure chart>

Fig-1

10 Service Mode

10.1. How to enter into Service Mode

While pressing [VOLUME (-)] button of the main unit, press [RECALL] button of the remote control three times within 2 seconds.

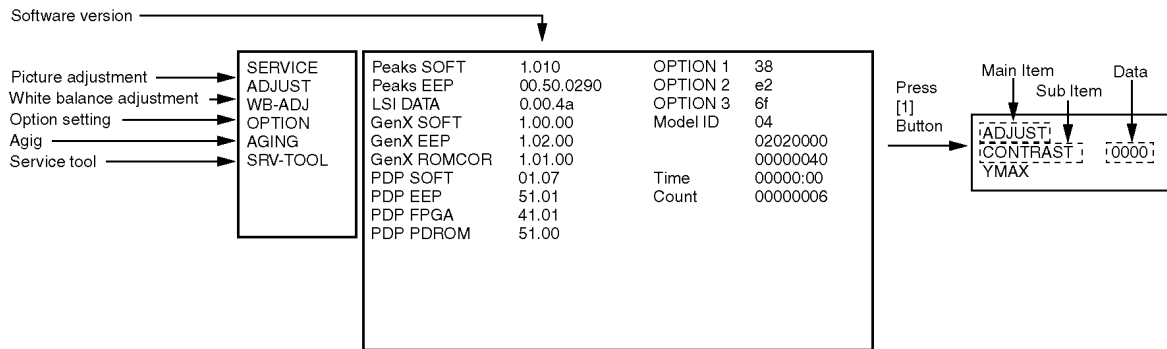

10.1.1. Key command

- “1” button...Main items Selection in forward direction
- “2” button...Main items Selection in reverse direction
- “3” button...Sub items Selection in forward direction
- “4” button...Sub items Selection in reverse direction
- “VOL” button...Value of sub items change in forward direction (+), in reverse direction (-)

10.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

| Main item | Sub item | Sample data | Remark |
|-------------------|--------------------------|-------------|-------------------|
| ADJUST | CONTRAST | 000 | |
| | COLOR | 2B | |
| | TINT | 00 | |
| | Video-Gain2 | 160 | |
| | SUB-BRT | 810 | |
| | H-POS | 0 | |
| | H-AMP | 0 | |
| | V-POS | 0 | |
| | V-AMP | 0 | |
| | WB-ADJ | R-CUT | |
| G-CUT | | 80 | |
| B-CUT | | 80 | |
| R-DRV | | FC | |
| G-DRV | | D0 | |
| B-DRV | | CB | |
| ALL-CUT | | 80 | |
| ALL-DRV | | FC | |
| OPTION | Panel-Type | 50HD | Factory Preset |
| | Boot | ROM | |
| | STBY-SET | 00 | |
| | Emergency | ON | |
| | Y/C Delay | | |
| | OPT 1 | 00111000 | |
| | OPT 2 | 11100010 | |
| | OPT 3 | 01101111 | |
| AGING | RGBW | | |
| | All white (COUNTER) | | |
| | All white | | |
| | All red | | |
| | All green | | |
| | All blue | | |
| | ON/OFF | | |
| | Diagonal lamp W | | |
| | Diagonal lamp R | | |
| | Diagonal lamp G | | |
| | Diagonal lamp B | | |
| | 1% WINDOW | | |
| | COLOR BAR | | |
| | A B zone/checkerd 4 trio | | |
| | SCROLL BAR | | |
| 2dot width border | | | |
| SRV-TOOL | | | see next |

| Destinations | H | M | MR | AZ |
|--------------|----|------|--------|------|
| | | ASIA | M.East | IRAN |
| OPTION1 | 38 | 38 | 38 | 38 |
| OPTION2 | E2 | E2 | E2 | E2 |
| OPTION3 | 6F | 6F | 6F | 6F |

10.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

10.2. Service tool mode

10.2.1. How to access

1. Select "SRV-TOOL" in Service Mode.
2. Press [OK] button on the remote control.

| | | | |
|-----------------------------------|---------------------------|---------------|--|
| | SRV-TOOL | | |
| | | | |
| | | | |
| Display of TD2Microcode version → | TD2Microcode:81c0000e | | |
| Display of Flash ROM maker code → | Flash ROM : 1 - 227E | | |
| Display of SOS History → | PTCT : 00 .00 .00 .00 .00 | Time 00000:40 | Count 0000022 ← POWER ON TIME/COUNT Press [MUTE] buton (3sec) |
| | | | |

10.2.2. Display of SOS History

SOS History (Number of LED blinking) indication.

From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.

This indication will be cleared by "Self-check indication and forced to factory shipment setting".

10.2.3. POWER ON TIME/COUNT

Time : Cumulative power on time, indicated hour : minute by decimal

Count : Number of On times by decimal

Note : This indication will not cleared by self-check or any command.

10.2.4. Exit

1. Disconnect the AC code from wall outlet.

11 Adjustment Procedure

11.1. Driver Set-up

11.1.1. Item / Preparation

1. Input a white signal to plasma video input.

2. Set the picture controls as follows.

Picture menu: Dynamic

PNR: OFF

Aspect: 16:9

Caution

1. First perform Vsus adjustment.

2. Confirmation of Vscn voltage should be performed after confirmation of Vad adjustment.

When Vad=-105V, Voltage of Vscn is 40V ±4V.

11.1.2. Adjustments


Adjust driver section voltages referring the panel data on the panel data label.

Check or adjust the following voltages with the multimeter.

| Name | Test Point | Voltage | Volume | Remarks |
|------|-------------|---------------|-------------|---------|
| Vsus | TPVSUS (SS) | Vsus ± 2V | VR251 (P) | * |
| Ve | TPVE (SS) | Ve ± 1V | VR6000 (SS) | * |
| Vset | TPVSET (SC) | 330V ± 7V | Fixed | |
| Vad | TPVAD (SC) | -105V ± 1V | VR6600 (SC) | |
| Vscn | TPVSCN (SC) | Vad+145V ± 4V | Fixed | |
| Vda | TPVDA (SS) | 75V + 1V, -2V | Fixed | |
| Vbk | TPVBK (SC) | 155V ± 1V | VR6604 (SC) | |

*See the Panel label.

Panel Label information

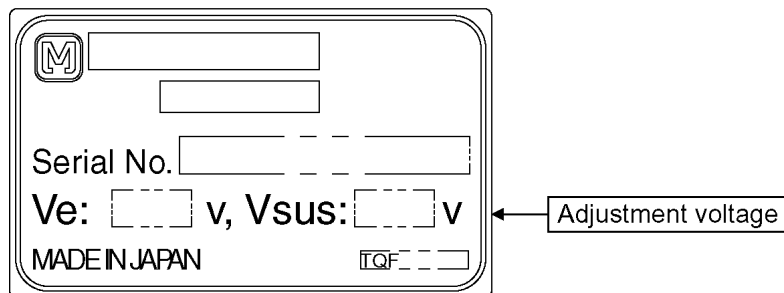

11.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.
2. Set the picture controls as follows.

Picture menu : Dynamic


PNR: OFF

Aspect : 16:9

3. Connect Oscilloscope to TPSC1 (SC).

Check and adjust that the stand down pulse(T2) period are each within specification.

| | Test point | Volume | Level |
|----|------------|-------------|---------------|
| T2 | TPSC1 (SC) | VR6602 (SC) | 185 ± 10µ Sec |

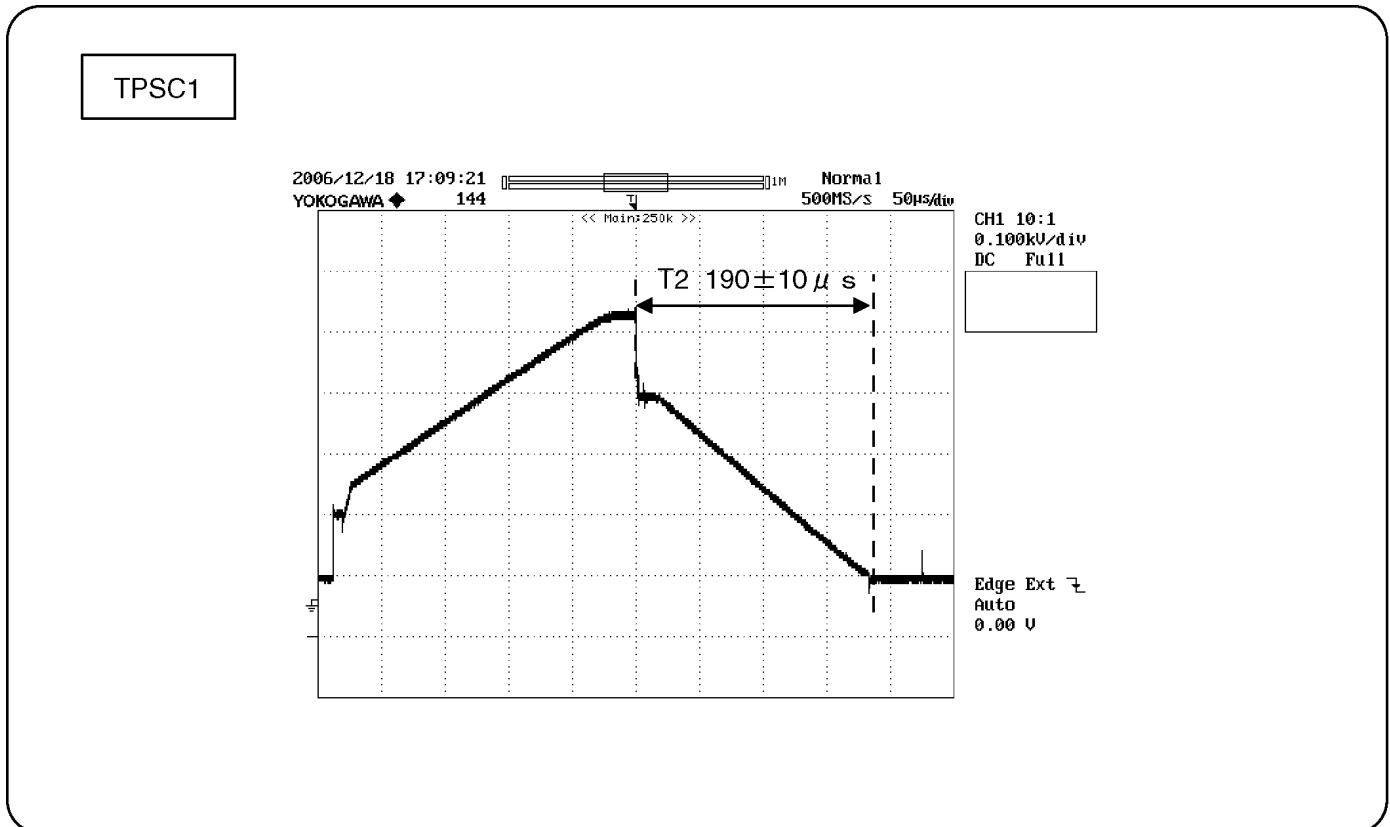

11.3. P.C.B. (Printed Circuit Board) exchange

11.3.1. Caution

1. To remove P.C.B. , wait 1 minute after power was off for discharge from electrolysis capacitors.

11.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.


| P.C.B. | Name | Test Point | Voltage | Volume | Remarks |
|-------------|---|-------------|------------|-------------|---------|
| P Board | Vsus | TPVSUS (SS) | Vsus ± 2V | VR251 (P) | * |
| SC Board | Vad | TPVAD (SC) | -105V ± 1V | VR6600 (SC) | |
| | Vbk | TPVBK (SC) | 155V ± 1V | VR6604 (SC) | |
| SS Board | Ve | TPVE (SS) | Ve ± 1V | VR6000 (SS) | * |
| D, DG Board | White balance and Sub brightness for NTSC, PAL, HD, PC and 625i signals | | | | |

*See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

11.4. Adjustment Volume Location

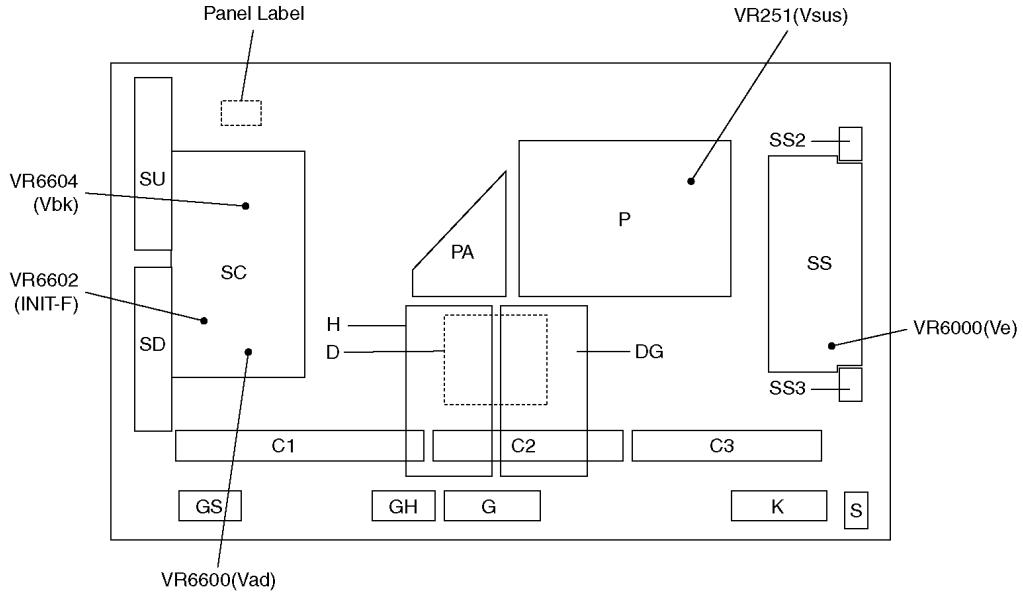

11.5. Test Point Location

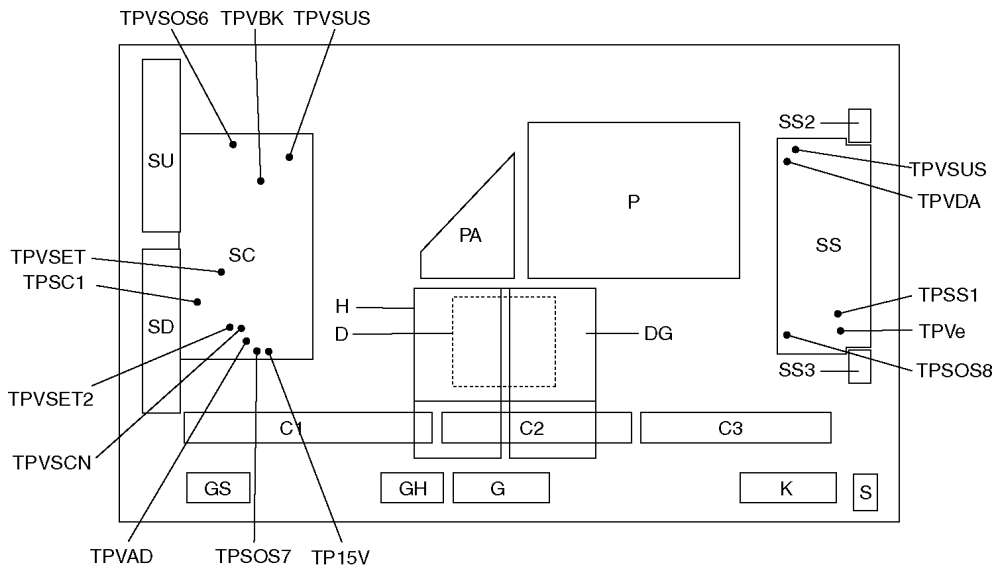


12 Adjustment


12.1. Sub-Contrast adjustment

| Name of measuring instrument | Connection | Remarks | | | | | | | | | | | | | | | | |
|---|------------|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|
| RF generator Base Band generator | | | | | | | | | | | | | | | | | | |
| Preparation (AV) | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. Receive AV1 (PAL 100% Full White or Split Colour bar shown as below) .</p> <div style="text-align: center; border: 1px solid black; width: 200px; margin: 10px auto;"> <table border="1" style="border-collapse: collapse;"> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td colspan="2" style="width: 40px; height: 20px; text-align: center;">100% White</td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> </table> </div> <p>2. Goes into service mode. 3. Push "1" or "2" key, and goes into service mode for "Sub-Contrast".</p> | | | | | | | | | | | | 100% White | | | | | | |
| | | | | | | | | | | | | | | | | | | |
| | | 100% White | | | | | | | | | | | | | | | | |
| Adjustment of AV system | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p> | | | | | | | | | | | | | | | | | | |
| Preparation (RF) | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. Receive RF (PAL 100% Full White or Split Colour bar shown as below.)</p> <div style="text-align: center; border: 1px solid black; width: 200px; margin: 10px auto;"> <table border="1" style="border-collapse: collapse;"> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td colspan="2" style="width: 40px; height: 20px; text-align: center;">100% White</td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> </table> </div> <p>2. Goes into service mode. 3. Push "1" or "2" key, and goes into service mode for "Sub-Contrast".</p> | | | | | | | | | | | | 100% White | | | | | | |
| | | | | | | | | | | | | | | | | | | |
| | | 100% White | | | | | | | | | | | | | | | | |
| Adjustment of RF system | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p> | | | | | | | | | | | | | | | | | | |
| Preparation (HD) | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. Receive Component (1080i/ 60Hz or 1080i/ 50Hz, 100% Full White or Split colour bar as shown below.)</p> <div style="text-align: center; border: 1px solid black; width: 200px; margin: 10px auto;"> <table border="1" style="border-collapse: collapse;"> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td colspan="2" style="width: 40px; height: 20px; text-align: center;">100% White</td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> </table> </div> <p>2. Goes into service mode. 3. Push "1" or "2" key, and goes into service mode for "Sub-Contrast".</p> | | | | | | | | | | | | 100% White | | | | | | |
| | | | | | | | | | | | | | | | | | | |
| | | 100% White | | | | | | | | | | | | | | | | |
| Adjustment of HD system | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p> | | | | | | | | | | | | | | | | | | |

12.2. PAL panel white balance adjustment

| Instrument Name | Connection | Remarks | | | | | | | | | | | | |
|--|---------------------------|---|------------|---|---|------|-------|-------|--------|-------|-------|-----|-------|-------|
| <ul style="list-style-type: none"> W/B pattern Color analyzer (Minolta CA-100 or equivalent) | RF input Panel surface | User setting: Normal | | | | | | | | | | | | |
| Procedure | | Remarks | | | | | | | | | | | | |
| <ul style="list-style-type: none"> Asing time is longer than 15min. Make sure the front panel to be used on the final set is fitted. Make sure a color signal is not being shown before adjustment. Put the color analyzer where there is little colour variation. <p>Complete the adjustment within 10 minutes after the turn on electricity. Turn on the power supply again when it is not possible to complete it by aging etc.</p> <ol style="list-style-type: none"> Display the white balance pattern. Enter the Service mode. A number key "1" and "2" are operated and "WB-ADJ" is displayed. Check that the color balance is "HIGH". Select "G-CUTOFF" item, using the number-key "3" or "4", and set to "80", using the volume-key "+" or "-". Also, "B-CUTOFF" and "R-CUTOFF" set to "80". Set "G-DRIVE" at "D0". Touch the signal receiver of color analyzer to the highlight window's center, and adjust B drive and R drive so x, y become the "COLOR TEMP HIGH" in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) Set color balance to NORMAL using "7" key. Fix G cutoff , B cutoff and R cutoff at "80". Fix G drive at "D0". Adjust B drive and R drive so the highlight window's x, y become the "COLOR TEMP NORMAL" in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) Set color balance to "LOW" using "7" key. Fix G cutoff, B cutoff and R cutoff to "80". Fix G drive to "D0". Adjust B drive and R drive so the highlight window's x, y become the "COLOR TEMP LOW" shown in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) | | <p>Picture menu : Dynamic ASPECT : 16:9</p> <ul style="list-style-type: none"> Highlight section Signal amplitude 75% <p>PAL White Balance Pattern</p>  <p>High light 75% Low light 15%</p> | | | | | | | | | | | | |
| <p>Table 1. Color temp target value</p> <table border="1"> <thead> <tr> <th>COLOR TEMP</th> <th>x</th> <th>y</th> </tr> </thead> <tbody> <tr> <td>HIGH</td> <td>0.276</td> <td>0.276</td> </tr> <tr> <td>NORMAL</td> <td>0.288</td> <td>0.296</td> </tr> <tr> <td>LOW</td> <td>0.313</td> <td>0.329</td> </tr> </tbody> </table> | | | COLOR TEMP | x | y | HIGH | 0.276 | 0.276 | NORMAL | 0.288 | 0.296 | LOW | 0.313 | 0.329 |
| COLOR TEMP | x | y | | | | | | | | | | | | |
| HIGH | 0.276 | 0.276 | | | | | | | | | | | | |
| NORMAL | 0.288 | 0.296 | | | | | | | | | | | | |
| LOW | 0.313 | 0.329 | | | | | | | | | | | | |

12.3. HD white balance adjustment

| Instrument Name | Connection | Remarks | | | | | | | | | | | | |
|---|---|--|------------|---|---|------|-------|-------|--------|-------|-------|-----|-------|-------|
| <ul style="list-style-type: none"> • 1080i W/B Pattern • Color analyzer (Minolta CA-100 or equivalent) | <ul style="list-style-type: none"> • RF input • Panel surface | User setting: Normal | | | | | | | | | | | | |
| Procedure | | Remarks | | | | | | | | | | | | |
| <p>• Asing time is longer than 15min.</p> <p>• Make sure the front panel to be used on the final set is fitted.</p> <p>• Make sure a color signal is not being shown before adjustment.</p> <p>• Put the color analyzer where there is little colour variation.</p> <p>Complete the adjustment within 10 minutes after the turn on electricity.</p> <p>Turn on the power supply again when it is not possible to complete it by aging etc.</p> <ol style="list-style-type: none"> 1. Display the white balance pattern. 2. Enter the service mode. 3. A number key "1" and "2" are operated and "WB-ADJ" is displayed. Check that the color balance is "HIGH". 4. Select "G-CUTOFF" item, using the number-key "3" or "4", and set to "80", using the volume-key "+" or "-". Also, "B-CUTOFF" and "R-CUTOFF" set to "80". 5. Set "G-DRIVE" at "D0". 6. Touch the signal receiver of color analyzer to the highlight window's center, and adjust B drive and R drive so x, y become the "Color balance Cool" in the below table. 7. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) 8. Set color balance to NORMAL using "7" key. 9. Fix G cutoff , B cutoff and R cutoff at "80". 10. Fix G drive at "D0". 11. Adjust B drive and R drive so the highlight window's x, y become the "Color balance Normal" in the below table. 12. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) 13. Set color balance to "LOW". 14. Fix G cutoff, B cutoff and R cutoff to "80". 15. Fix G drive to "D0". 16. Adjust B drive and R drive so the highlight window's x, y become the "Color balance Warm" shown in the below table. 17. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) | | <p>Picture menu: Dynamic ASPECT:16:9</p> <ul style="list-style-type: none"> • Highlight section Signal amplitude 75% <p>PAL White Balance Pattern</p>  <p>* The Color balance COOL differs from Japanese model values.</p> | | | | | | | | | | | | |
| <p>Table 1. Color temp target value</p> <table border="1"> <thead> <tr> <th>COLOR TEMP</th> <th>x</th> <th>y</th> </tr> </thead> <tbody> <tr> <td>HIGH</td> <td>0.276</td> <td>0.276</td> </tr> <tr> <td>NORMAL</td> <td>0.288</td> <td>0.296</td> </tr> <tr> <td>LOW</td> <td>0.313</td> <td>0.329</td> </tr> </tbody> </table> | | | COLOR TEMP | x | y | HIGH | 0.276 | 0.276 | NORMAL | 0.288 | 0.296 | LOW | 0.313 | 0.329 |
| COLOR TEMP | x | y | | | | | | | | | | | | |
| HIGH | 0.276 | 0.276 | | | | | | | | | | | | |
| NORMAL | 0.288 | 0.296 | | | | | | | | | | | | |
| LOW | 0.313 | 0.329 | | | | | | | | | | | | |

13 Hotel mode

1. Purpose

Restrict a function for hotels.

2. Access command to the Hotel mode setup menu


In order to display the Hotel mode setup menu, please enter the following command (**within 2 second**).

[TV] : Vol. "Down" + [REMOTE] : AV (3 times)

Then, the Hotel mode setup menu is displayed.

| Hotel Mode | |
|-------------------|-----|
| Hotel Mode | Off |
| Initial INPUT | Off |
| Initial POS | Off |
| Initial VOL Level | Off |
| Maximum Vol Level | Off |
| Button Lock | Off |
| Remote Lock | Off |

Select



EXIT
Change
RETURN

3. To exit the Hotel mode setup menu


Disconnect AC power cord from wall outlet.


4. Explain the Hotel mode setup menu

| item | Function |
|-------------------|---|
| Hotel Mode | Select hotel mode ON/OFF |
| Initial INPUT | Select input signal modes. Set the input, when each time power is switched on. Selection : Off/TV/AV1/AV2/AV3/AV4/COMPONENT/PC/HD MI1/HDMI2/HDMI3 <ul style="list-style-type: none"> Off: give priority to a last memory. PC: selectable with VGA option |
| Initial POS | Select programme number. Selection : Off/0 to 99 <ul style="list-style-type: none"> Off: give priority to a last memory |
| Initial VOL level | Adjust the volume when each time power is switched on. Selection/Range : Off/0 to 63 <ul style="list-style-type: none"> Off: give priority to a last memory |
| Maximum VOL level | Adjust maximum volume. Range : 0 to 63 |
| Button lock | Select local key conditions. Selection : Off/SETUP/MENU/All <ul style="list-style-type: none"> Off: altogether valid SETUP: only F-key is invalid (Tuning guide(menu) can not be selected.) MENU: only F-key is invalid (only Volume/Mute can be selected.) ALL: altogether invalid. |
| Remote lock | Select remote control key conditions. Selection : Off/SETUP/MENU <ul style="list-style-type: none"> Off: altogether valid SETUP: only Setup menu is invalid MENU: Picture/Sound/Setup menu are invalid |

14 Conductor Views

14.1. P-Board

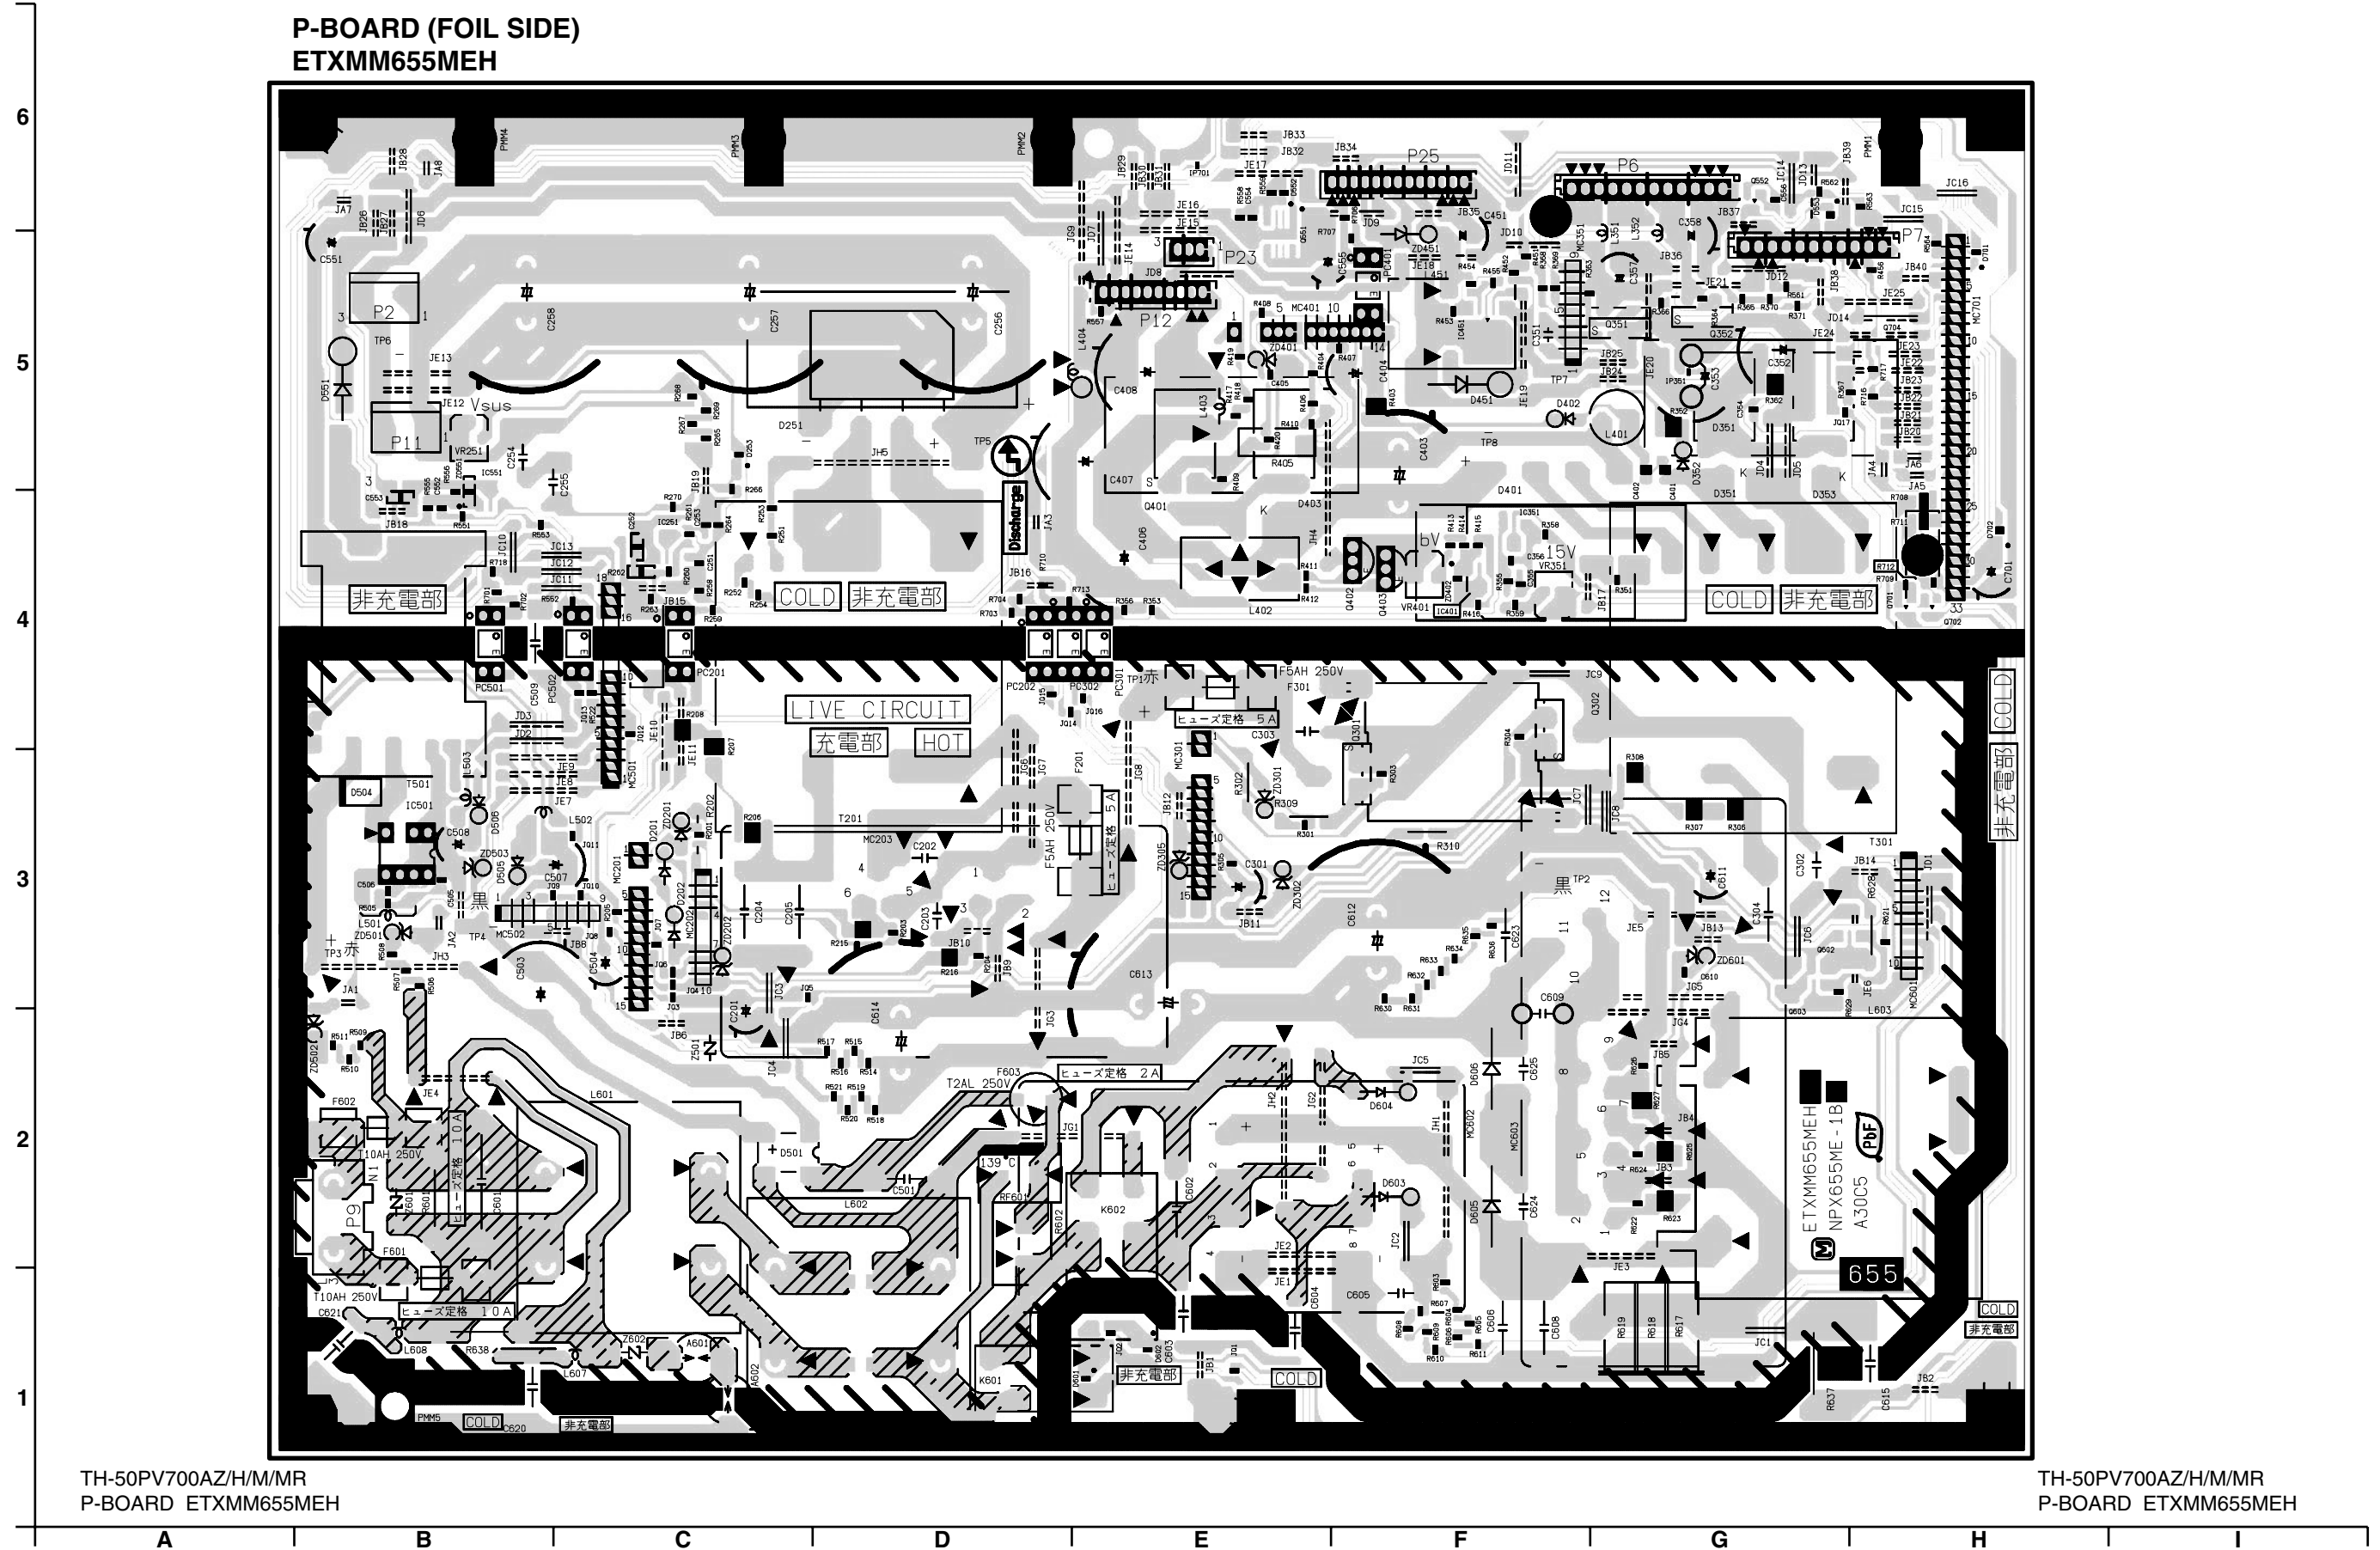

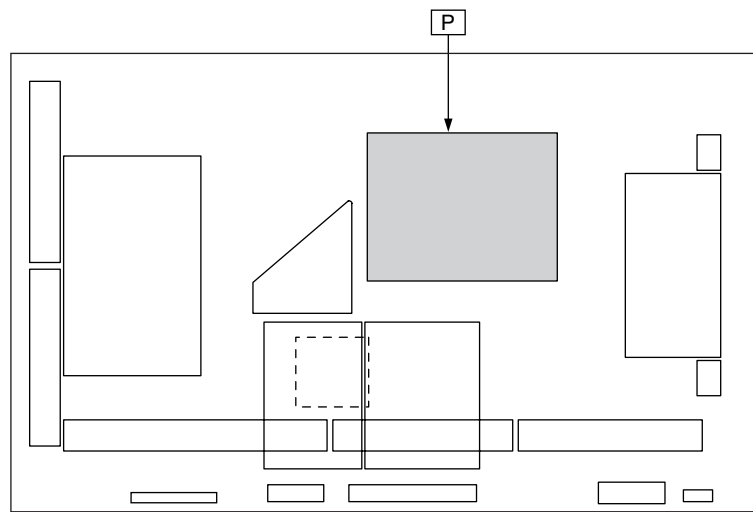

Parts Location


| P-BOARD (FOIL SIDE) | | | | | |
|---------------------|-----|------------|-----|---------------|-----|
| IC | | TRANSISTOR | | PHOTO COUPLER | |
| IC251 | C-4 | Q301 | F-3 | PC201 | C-4 |
| IC351 | F-4 | Q302 | F-4 | PC202 | D-4 |
| IC401 | F-4 | Q351 | G-5 | PC301 | E-4 |
| IC451 | F-5 | Q352 | G-5 | PC302 | E-4 |
| IC501 | B-3 | Q401 | E-4 | PC401 | F-5 |
| IC551 | B-5 | Q402 | F-4 | PC501 | B-4 |
| MODULE | | Q403 | F-4 | PC502 | C-4 |
| | | Q551 | E-5 | VOLUME | |
| MC201 | C-3 | Q552 | G-6 | VR251 | B-5 |
| MC202 | C-3 | Q602 | G-3 | VR351 | F-4 |
| MC203 | D-3 | Q603 | G-2 | VR401 | F-4 |
| MC301 | E-3 | Q701 | H-4 | | |
| MC351 | F-5 | Q702 | H-4 | | |
| MC401 | E-5 | Q704 | H-5 | | |
| MC501 | C-4 | | | | |
| MC502 | B-3 | | | | |
| MC601 | H-3 | | | | |
| MC602 | F-2 | | | | |
| MC603 | F-2 | | | | |
| MC701 | H-5 | | | | |

Parts Location

| P-BOARD (COMPONENT SIDE) | | | | | |
|--------------------------|-----|---------------|-----|---------------|-----|
| IC | | TRANSISTOR | | PHOTO COUPLER | |
| IC501 | H-3 | Q301 | D-4 | PC201 | G-4 |
| MODULE | | Q302 | C-4 | PC202 | E-4 |
| | | Q351 | C-5 | PC301 | E-4 |
| MC201 | G-3 | Q352 | C-5 | PC302 | E-4 |
| MC202 | G-3 | Q401 | E-5 | PC401 | D-5 |
| MC203 | F-3 | Q402 | D-4 | PC501 | H-4 |
| MC301 | E-3 | Q403 | D-4 | PC502 | G-4 |
| MC351 | C-5 | VOLUME | | VR251 | H-5 |
| MC401 | D-5 | | | VR351 | C-4 |
| MC501 | G-4 | VR401 | D-4 | | |
| MC502 | G-3 | | | | |
| MC601 | B-3 | | | | |
| MC602 | E-2 | | | | |
| MC603 | C-2 | | | | |
| MC701 | B-5 | | | | |

**P-BOARD (COMPONENT SIDE)
ETXMM655MEH**

6
5
4
3
2
1

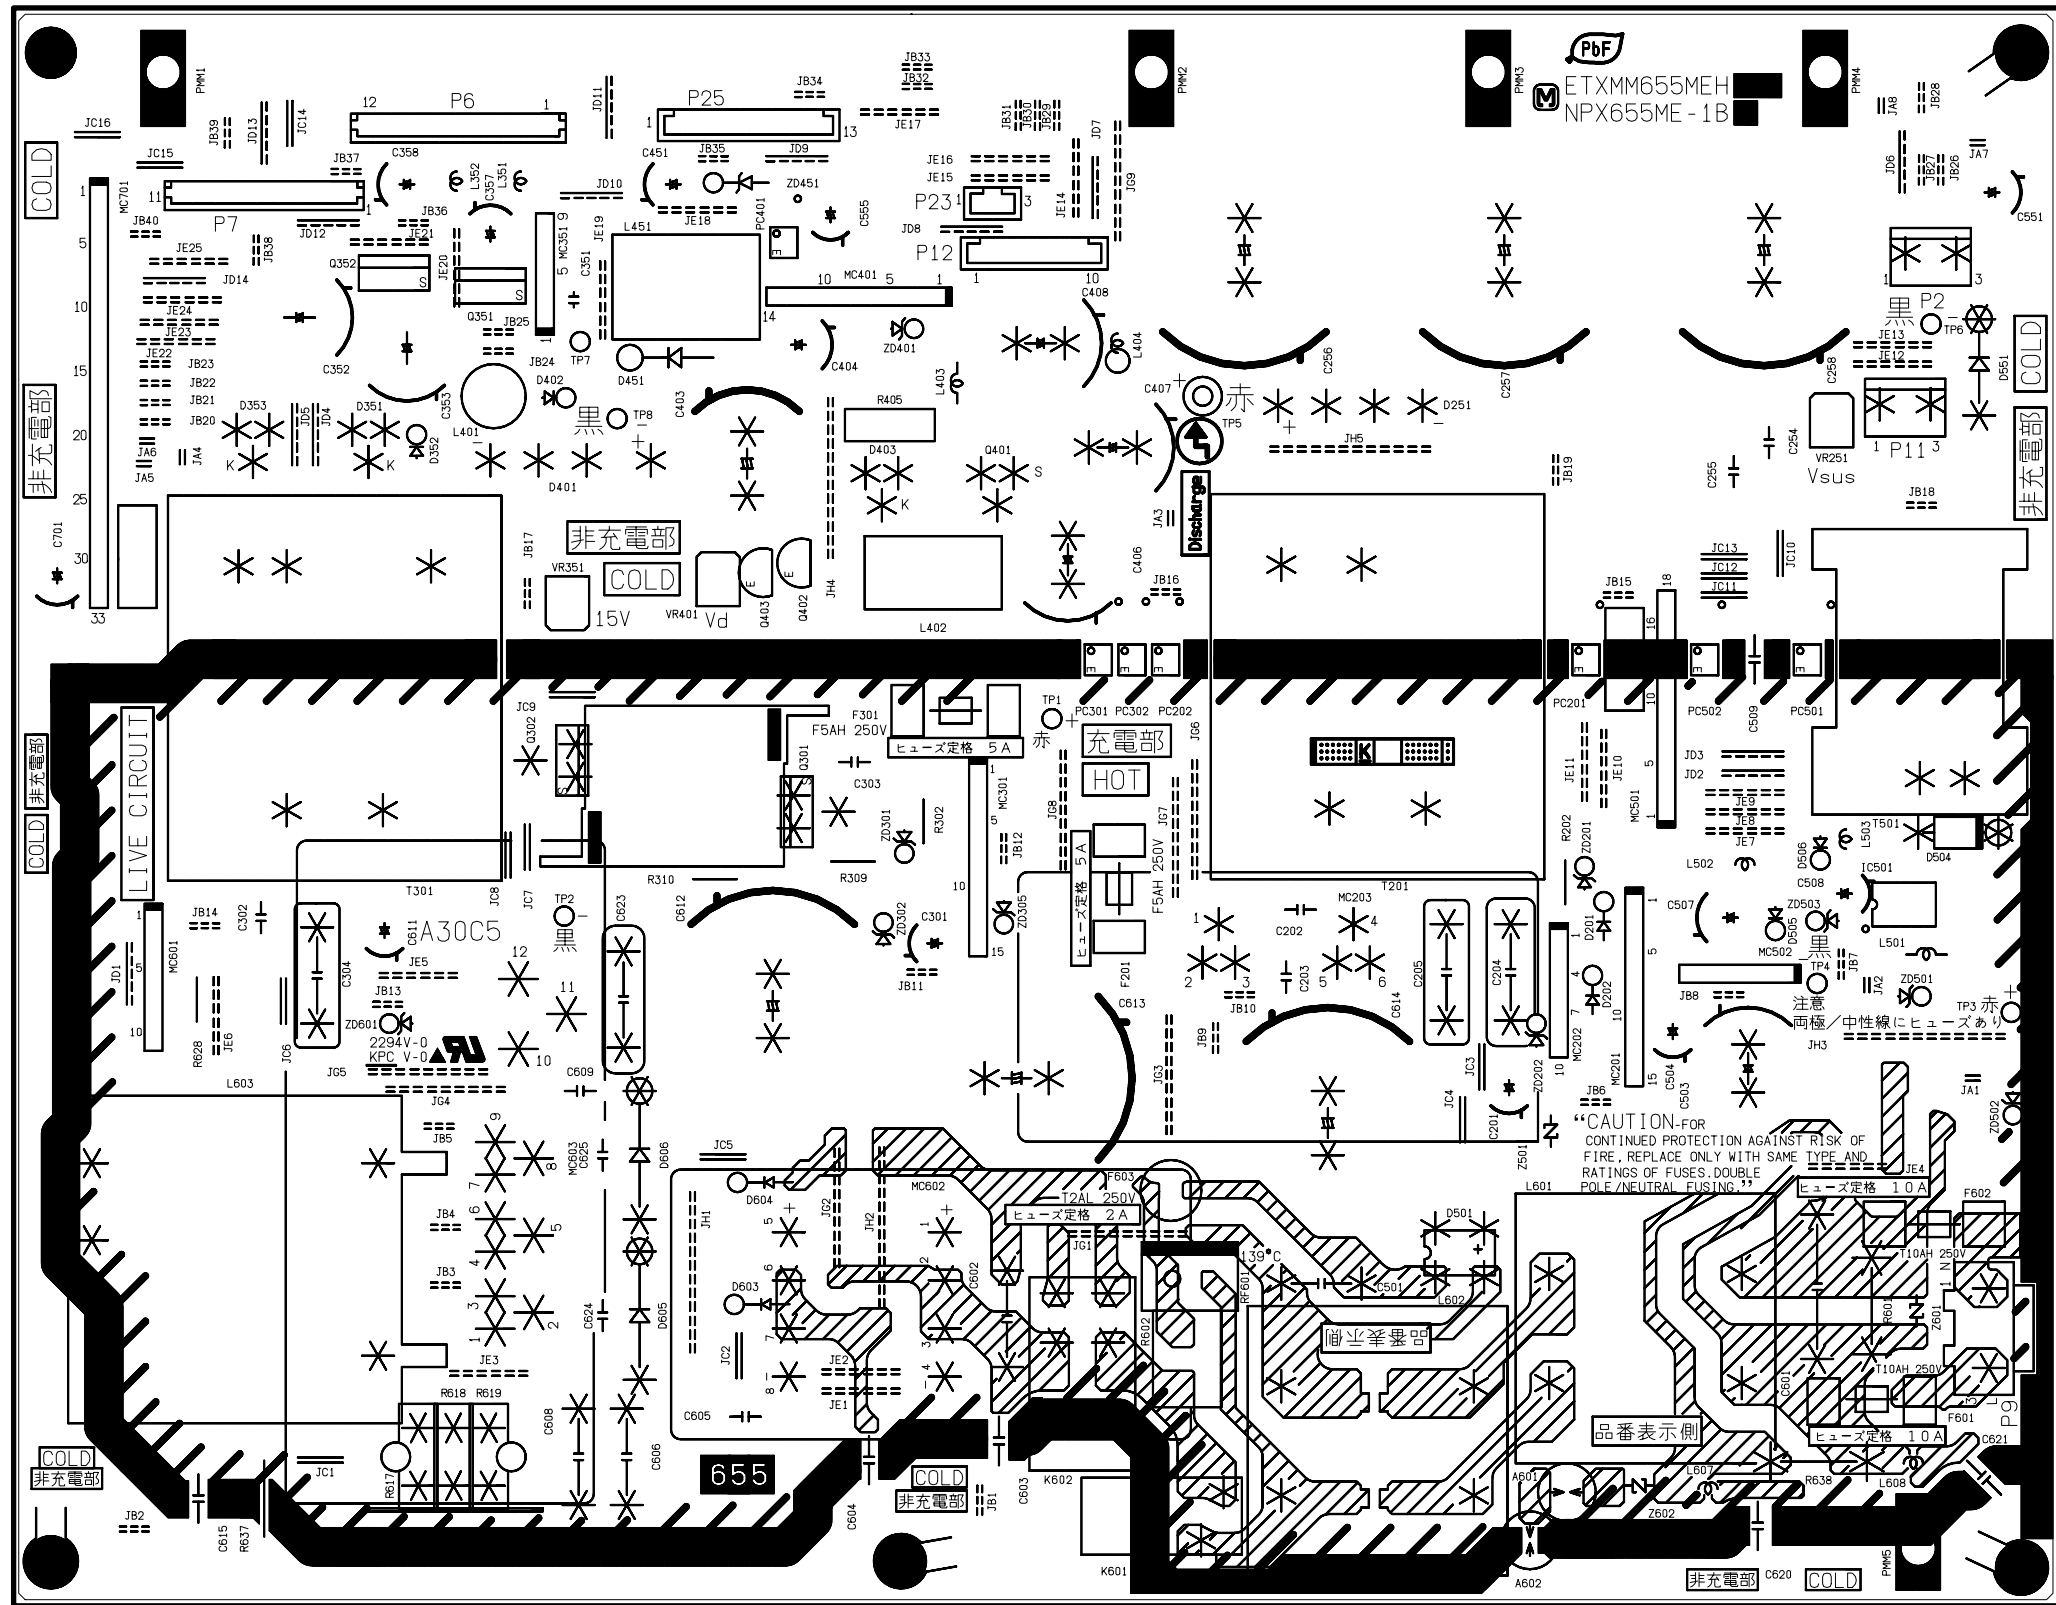


TH-50PV700AZ/H/M/MR
P-BOARD ETXMM655MEH

TH-50PV700AZ/H/M/MR
P-BOARD ETXMM655MEH

A B C D E F G H I

14.2. PA-Board

PA-BOARD (FOIL SIDE)
TNPA4178AG


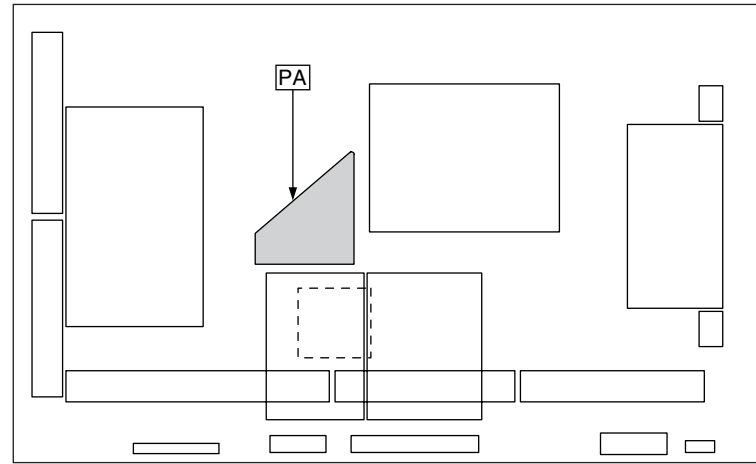


Parts Location

| PA-BOARD | |
|-------------------|-----|
| IC | |
| IC5400 | B-3 |
| IC5550 | D-2 |
| TRANSISTOR | |
| Q5401 | B-4 |
| Q5501 | D-2 |
| Q5521 | B-2 |
| Q5522 | B-2 |
| Q5523 | B-3 |
| Q5524 | C-2 |
| Q5551 | D-2 |
| Q5561 | D-1 |
| Q5562 | D-1 |
| TP | |
| TP5400 | B-3 |
| TPAC1 | B-1 |
| TPCOF | C-3 |
| TPECO | A-2 |
| TPF0S | C-4 |
| TPFA9 | B-4 |
| TPFA15 | B-3 |
| TPM9V | D-1 |
| TPMON | A-1 |
| TPS0F | D-2 |
| TPS15V | C-1 |
| TPS5V | D-1 |
| TPS9V | C-2 |
| TPSON | A-2 |
| TPSOS | A-2 |
| TPST5 | B-1 |

PA-BOARD (COMPONENT SIDE)
TNPA4178AG

6
5
4
3
2
1

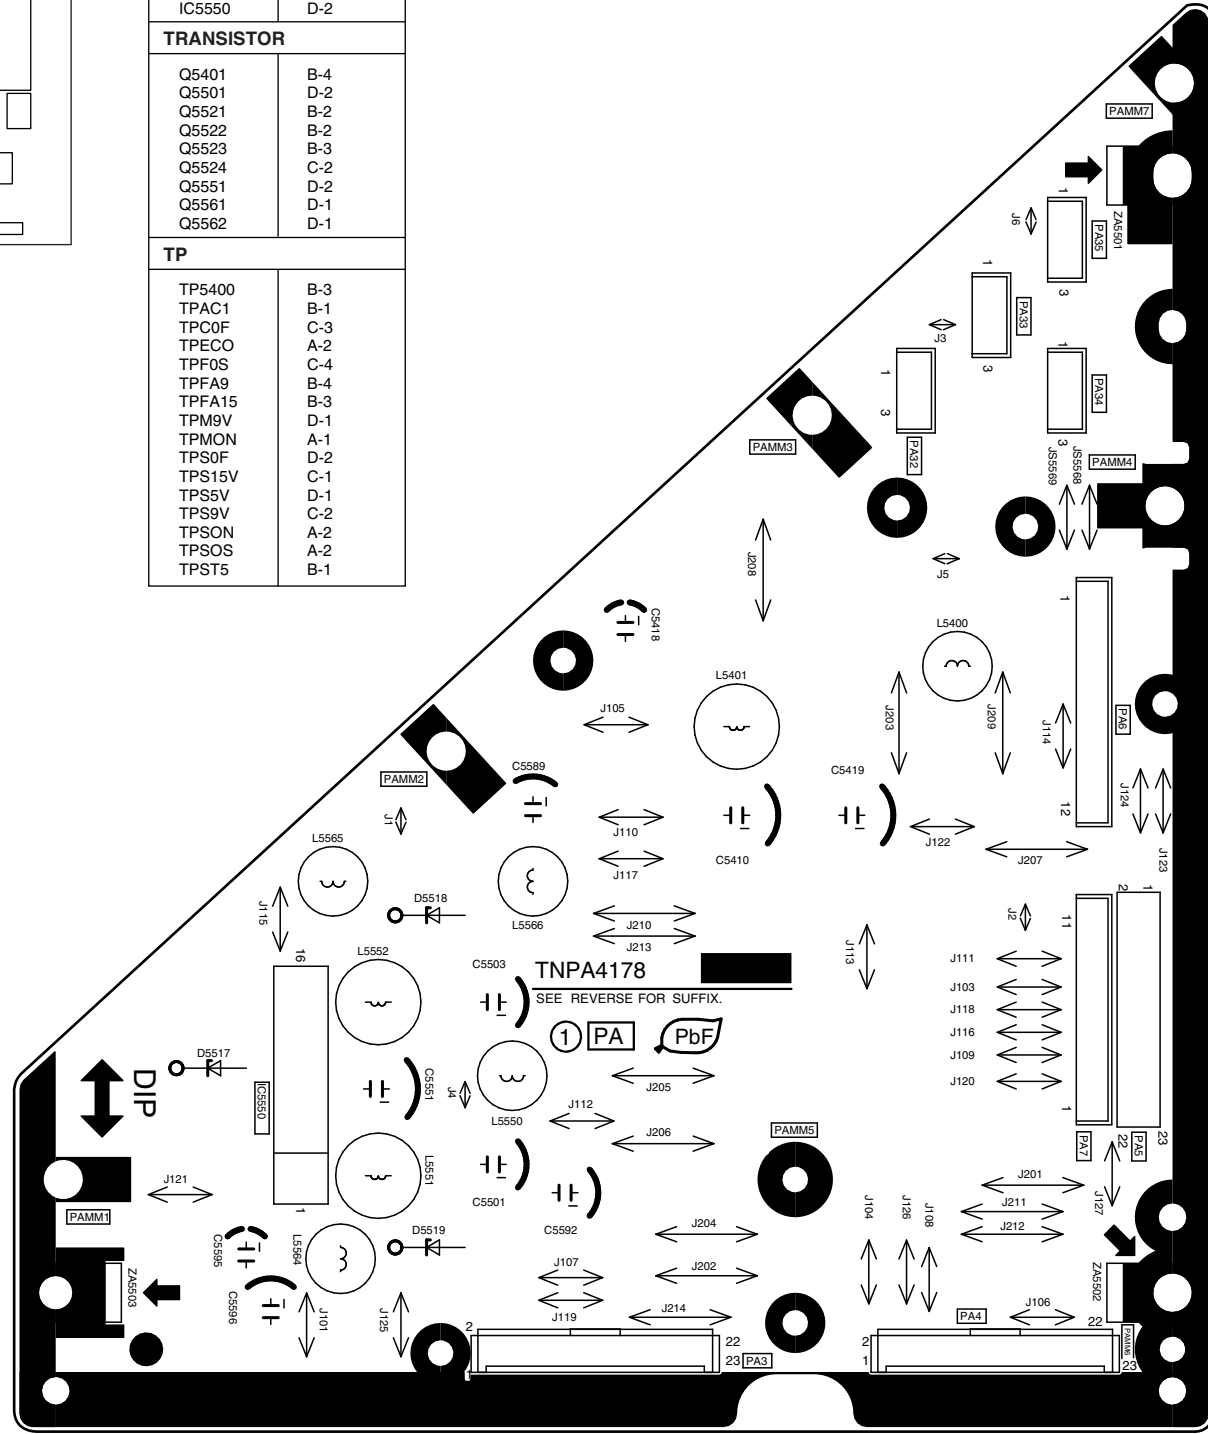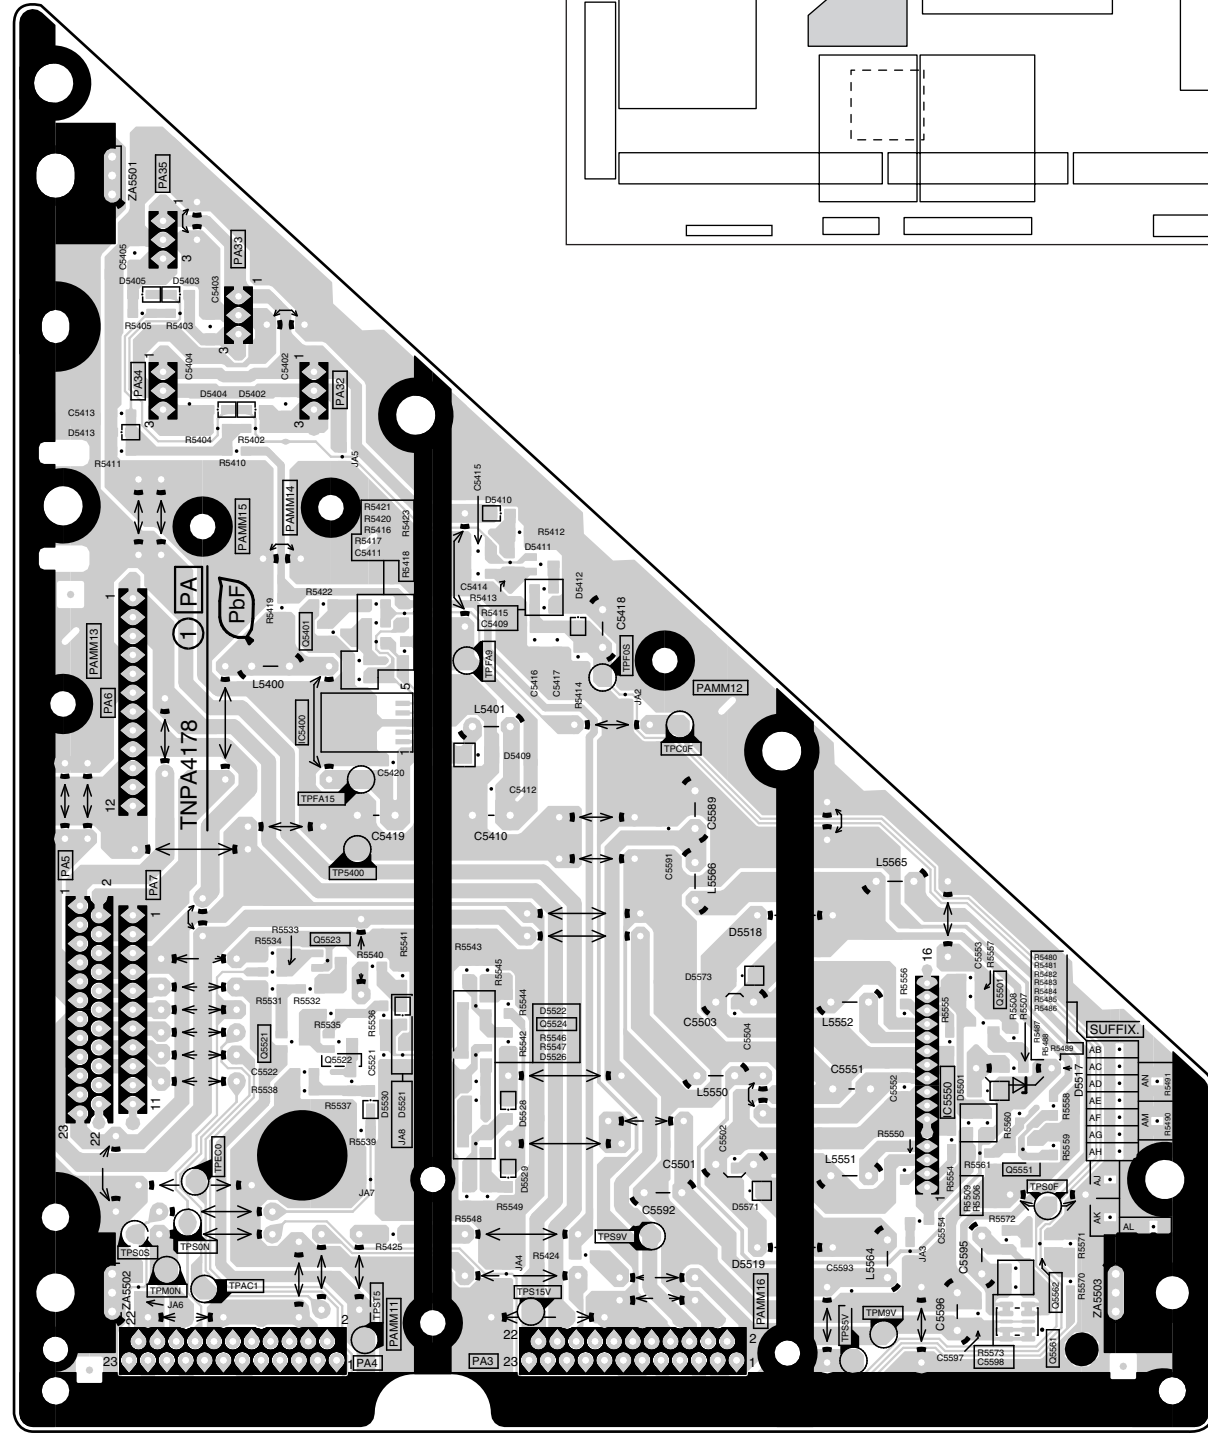



TH-50PV700AZ/H/M/MR
PA-BOARD TNPA4178AG

TH-50PV700AZ/H/M/MR
PA-BOARD TNPA4178AG

A B C D E F G H I

14.3. H-Board

6
5
4
3
2
1
H-BOARD (FOIL SIDE)
TNPA4179AE (TH-50PV700AZ/H/M)
TNPA4179AS (TH-50PV700MR)

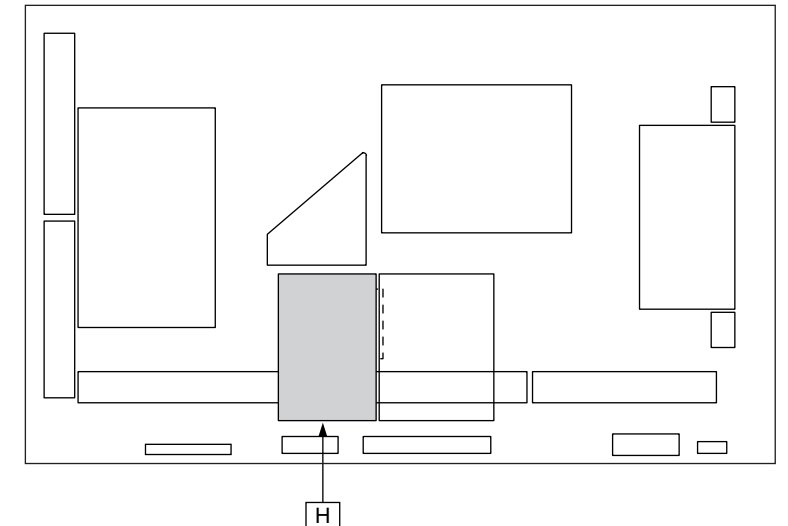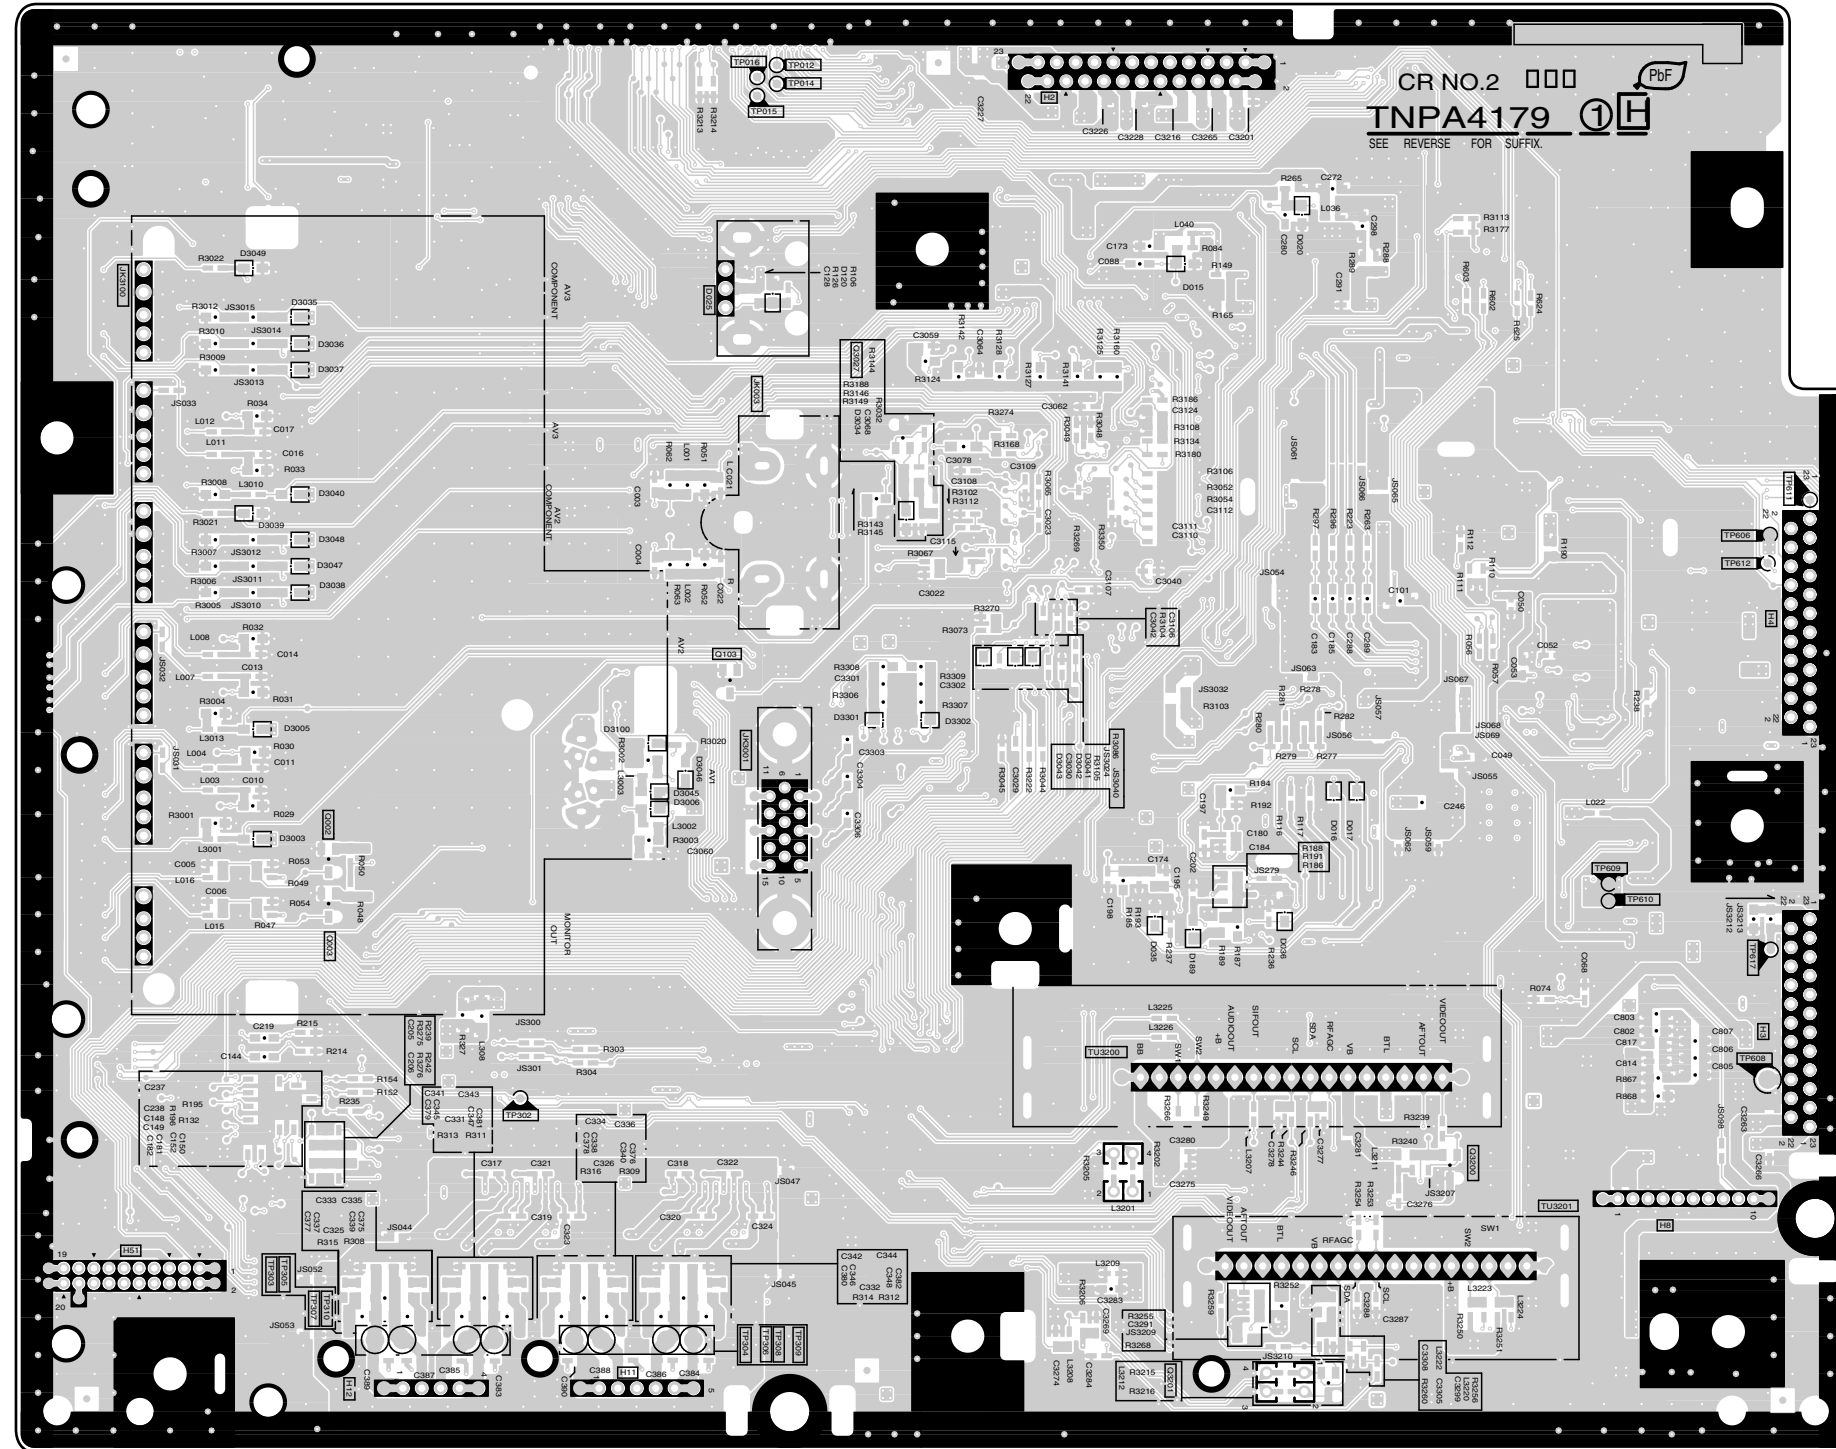

Parts Location

| H-BOARD (FOIL SIDE) | | | |
|---------------------|-----|--------|-----|
| TRANSISTOR | | TP | |
| Q2002 | B-3 | TP2012 | C-5 |
| Q2003 | B-3 | TP2014 | C-5 |
| Q2103 | C-3 | TP2015 | C-5 |
| Q3027 | D-4 | TP2016 | C-5 |
| Q3200 | F-2 | TP2302 | B-2 |
| Q3201 | E-1 | TP2303 | B-1 |
| | | TP2304 | C-1 |
| | | TP2305 | B-1 |
| | | TP2306 | C-1 |
| | | TP2307 | B-1 |
| | | TP2308 | C-1 |
| | | TP2309 | C-1 |
| | | TP2310 | B-1 |
| | | TP2606 | G-4 |
| | | TP2608 | G-2 |
| | | TP2609 | F-3 |
| | | TP2610 | F-3 |
| | | TP2611 | G-4 |
| | | TP2612 | G-4 |
| | | TP2617 | F-3 |

TH-50PV700AZ/H/M
H-BOARD TNPA4179AE



TH-50PV700MR
H-BOARD TNPA4179AS

TH-50PV700AZ/H/M
H-BOARD TNPA4179AE

TH-50PV700MR
H-BOARD TNPA4179AS

A B C D E F G H I

**H-BOARD (COMPONENT SIDE)
TNPA4179AE (TH-50PV700AZ/H/M)
TNPA4179AS (TH-50PV700MR)**

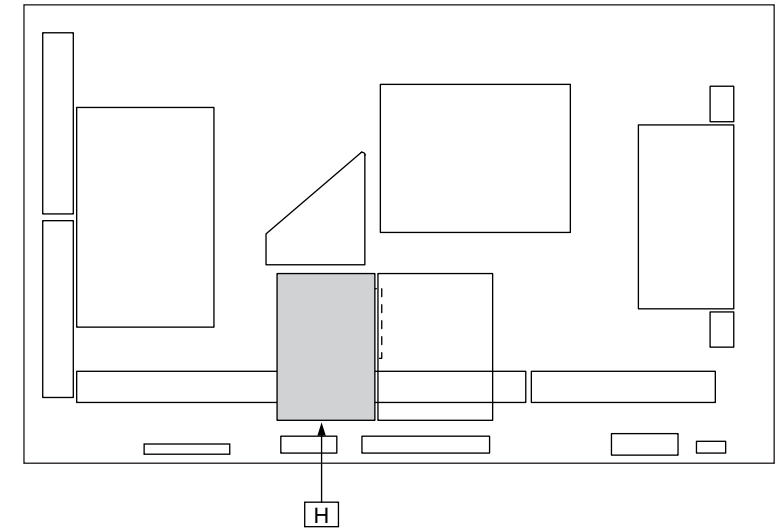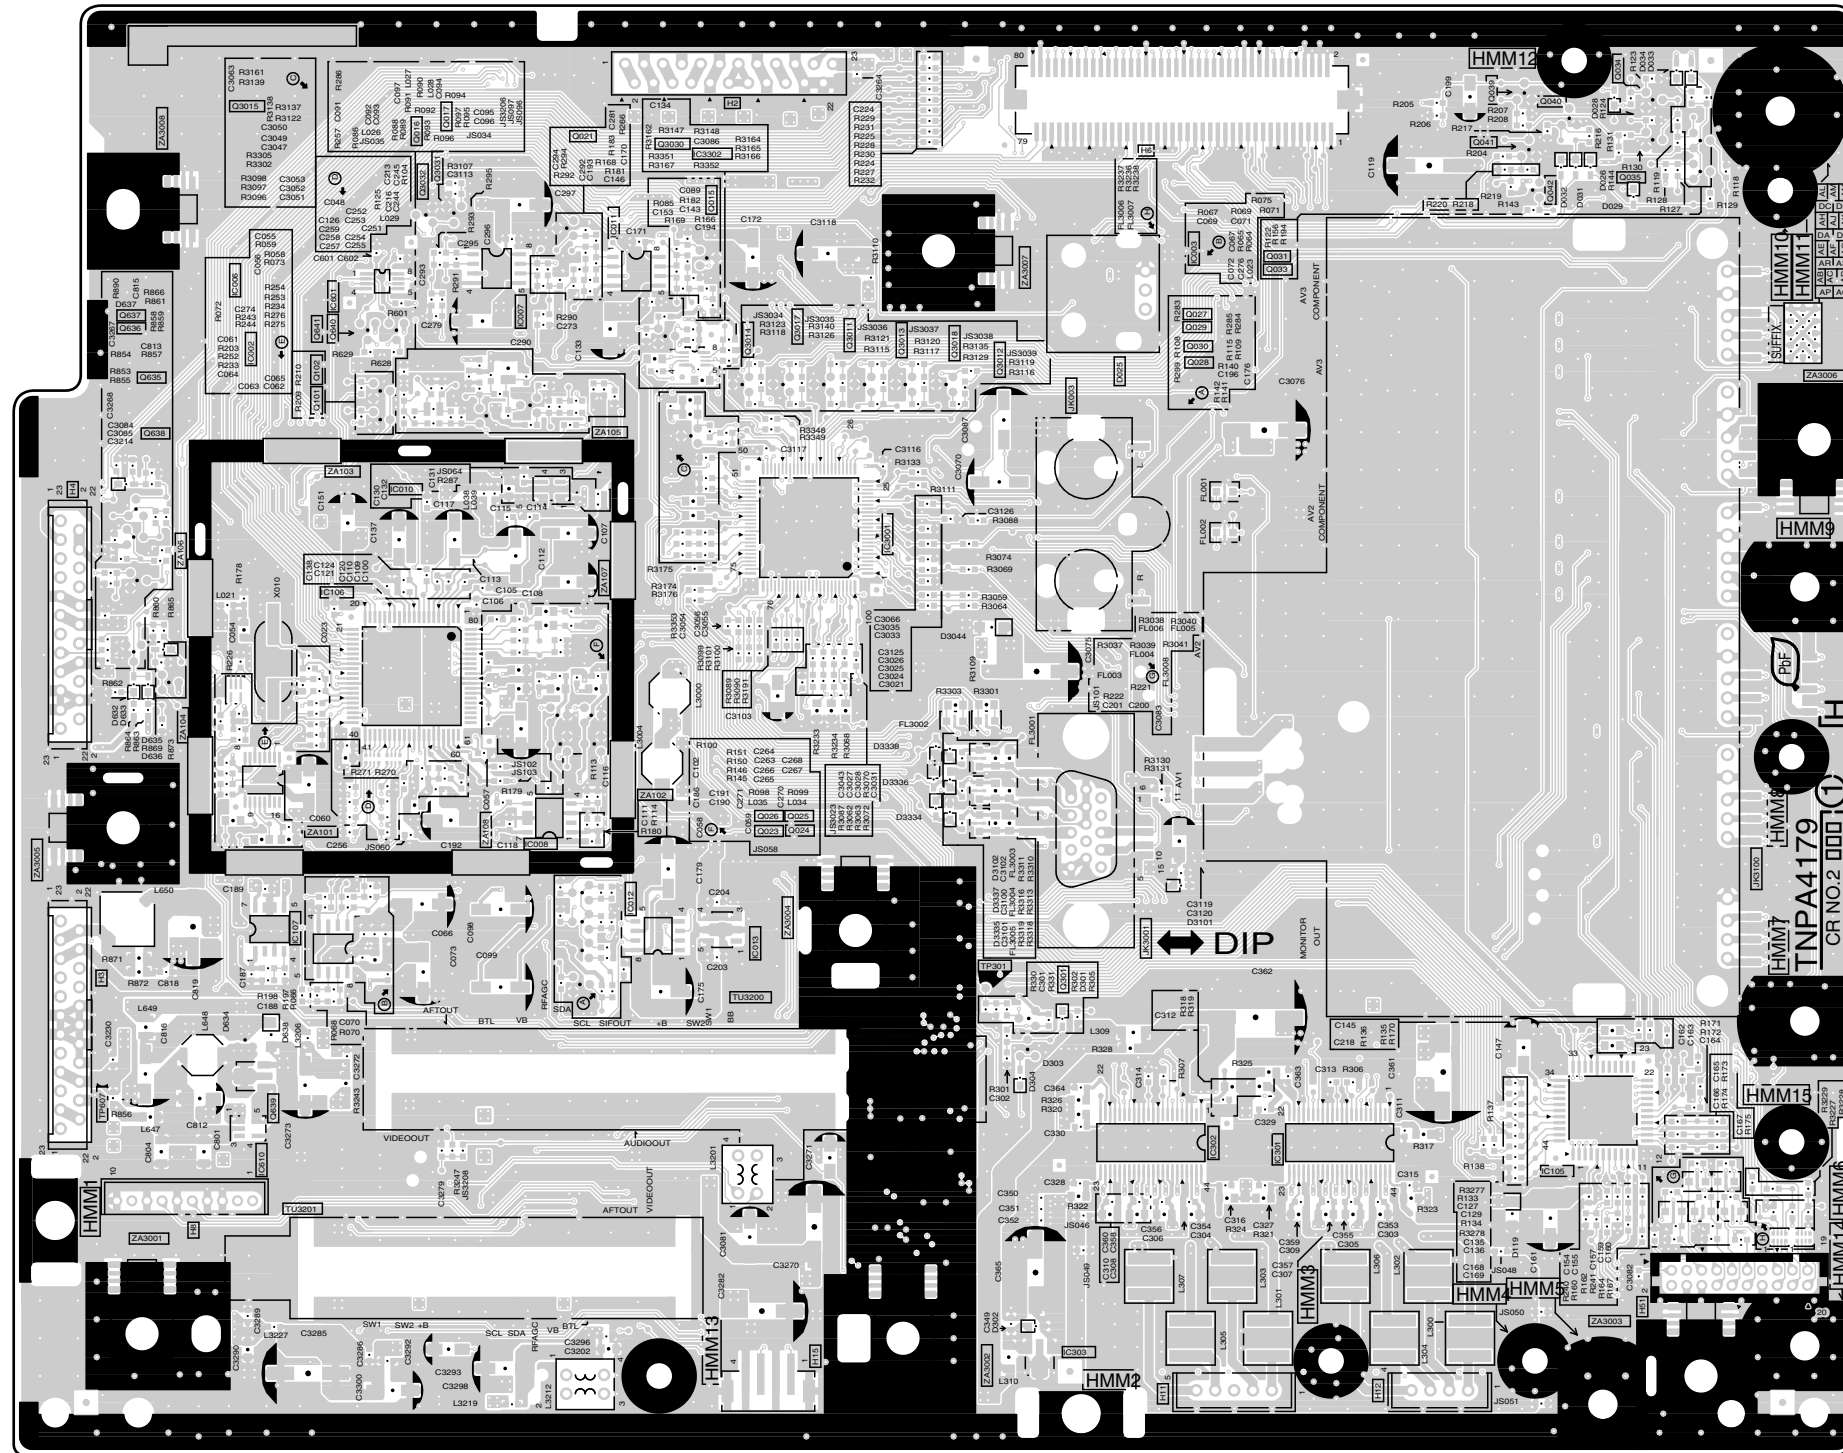

Parts Location

| H-BOARD (COMPONENT SIDE) | | | | | |
|--------------------------|------------|-------|-----|--------|-----|
| IC | TRANSISTOR | TP | | | |
| IC2002 | A-5 | Q2015 | C-5 | TP2301 | D-2 |
| IC2003 | E-4 | Q2016 | B-5 | TP2607 | A-2 |
| IC2006 | A-5 | Q2017 | B-5 | | |
| IC2007 | B-5 | Q2021 | C-5 | | |
| IC2008 | B-3 | Q2023 | C-3 | | |
| IC2010 | B-4 | Q2024 | C-3 | | |
| IC2011 | C-5 | Q2025 | C-3 | | |
| IC2012 | C-3 | Q2026 | C-3 | | |
| IC2013 | C-3 | Q2027 | E-4 | | |
| IC2105 | F-2 | Q2028 | E-4 | | |
| IC2106 | B-4 | Q2029 | E-4 | | |
| IC2107 | B-3 | Q2030 | E-4 | | |
| IC2301 | E-2 | Q2031 | E-4 | | |
| IC2302 | E-2 | Q2033 | E-4 | | |
| IC2303 | D-1 | Q2034 | F-5 | | |
| IC2601 | B-5 | Q2035 | F-5 | | |
| IC2610 | B-2 | Q2039 | F-5 | | |
| IC3001 | D-4 | Q2040 | F-5 | | |
| IC3302 | C-5 | Q2041 | F-5 | | |
| | | Q2042 | F-5 | | |
| | | Q2101 | B-4 | | |
| | | Q2102 | B-4 | | |
| | | Q2301 | D-2 | | |
| | | Q2635 | A-4 | | |
| | | Q2636 | A-5 | | |
| | | Q2637 | A-5 | | |
| | | Q2638 | A-4 | | |
| | | Q2639 | B-2 | | |
| | | Q2640 | B-5 | | |
| | | Q2641 | B-5 | | |
| | | Q3011 | D-5 | | |
| | | Q3012 | D-4 | | |
| | | Q3013 | D-4 | | |
| | | Q3014 | C-5 | | |
| | | Q3015 | A-5 | | |
| | | Q3017 | C-5 | | |
| | | Q3018 | D-4 | | |
| | | Q3030 | C-5 | | |
| | | Q3031 | B-5 | | |
| | | Q3032 | B-5 | | |


TH-50PV700AZ/H/M TH-50PV700MR
H-BOARD TNPA4179AE H-BOARD TNPA4179AS

TH-50PV700AZ/H/M TH-50PV700MR
H-BOARD TNPA4179AE H-BOARD TNPA4179AS


A B C D E F G H I

14.4. DG-Board

DG-BOARD (FOIL SIDE)
 TXNDG1HLTP (PV700AZ)
 TXNDG1HLTH (PV700H)
 TXNDG1HLTM (PV700M)
 TXNDG1HLTX (PV700MR)

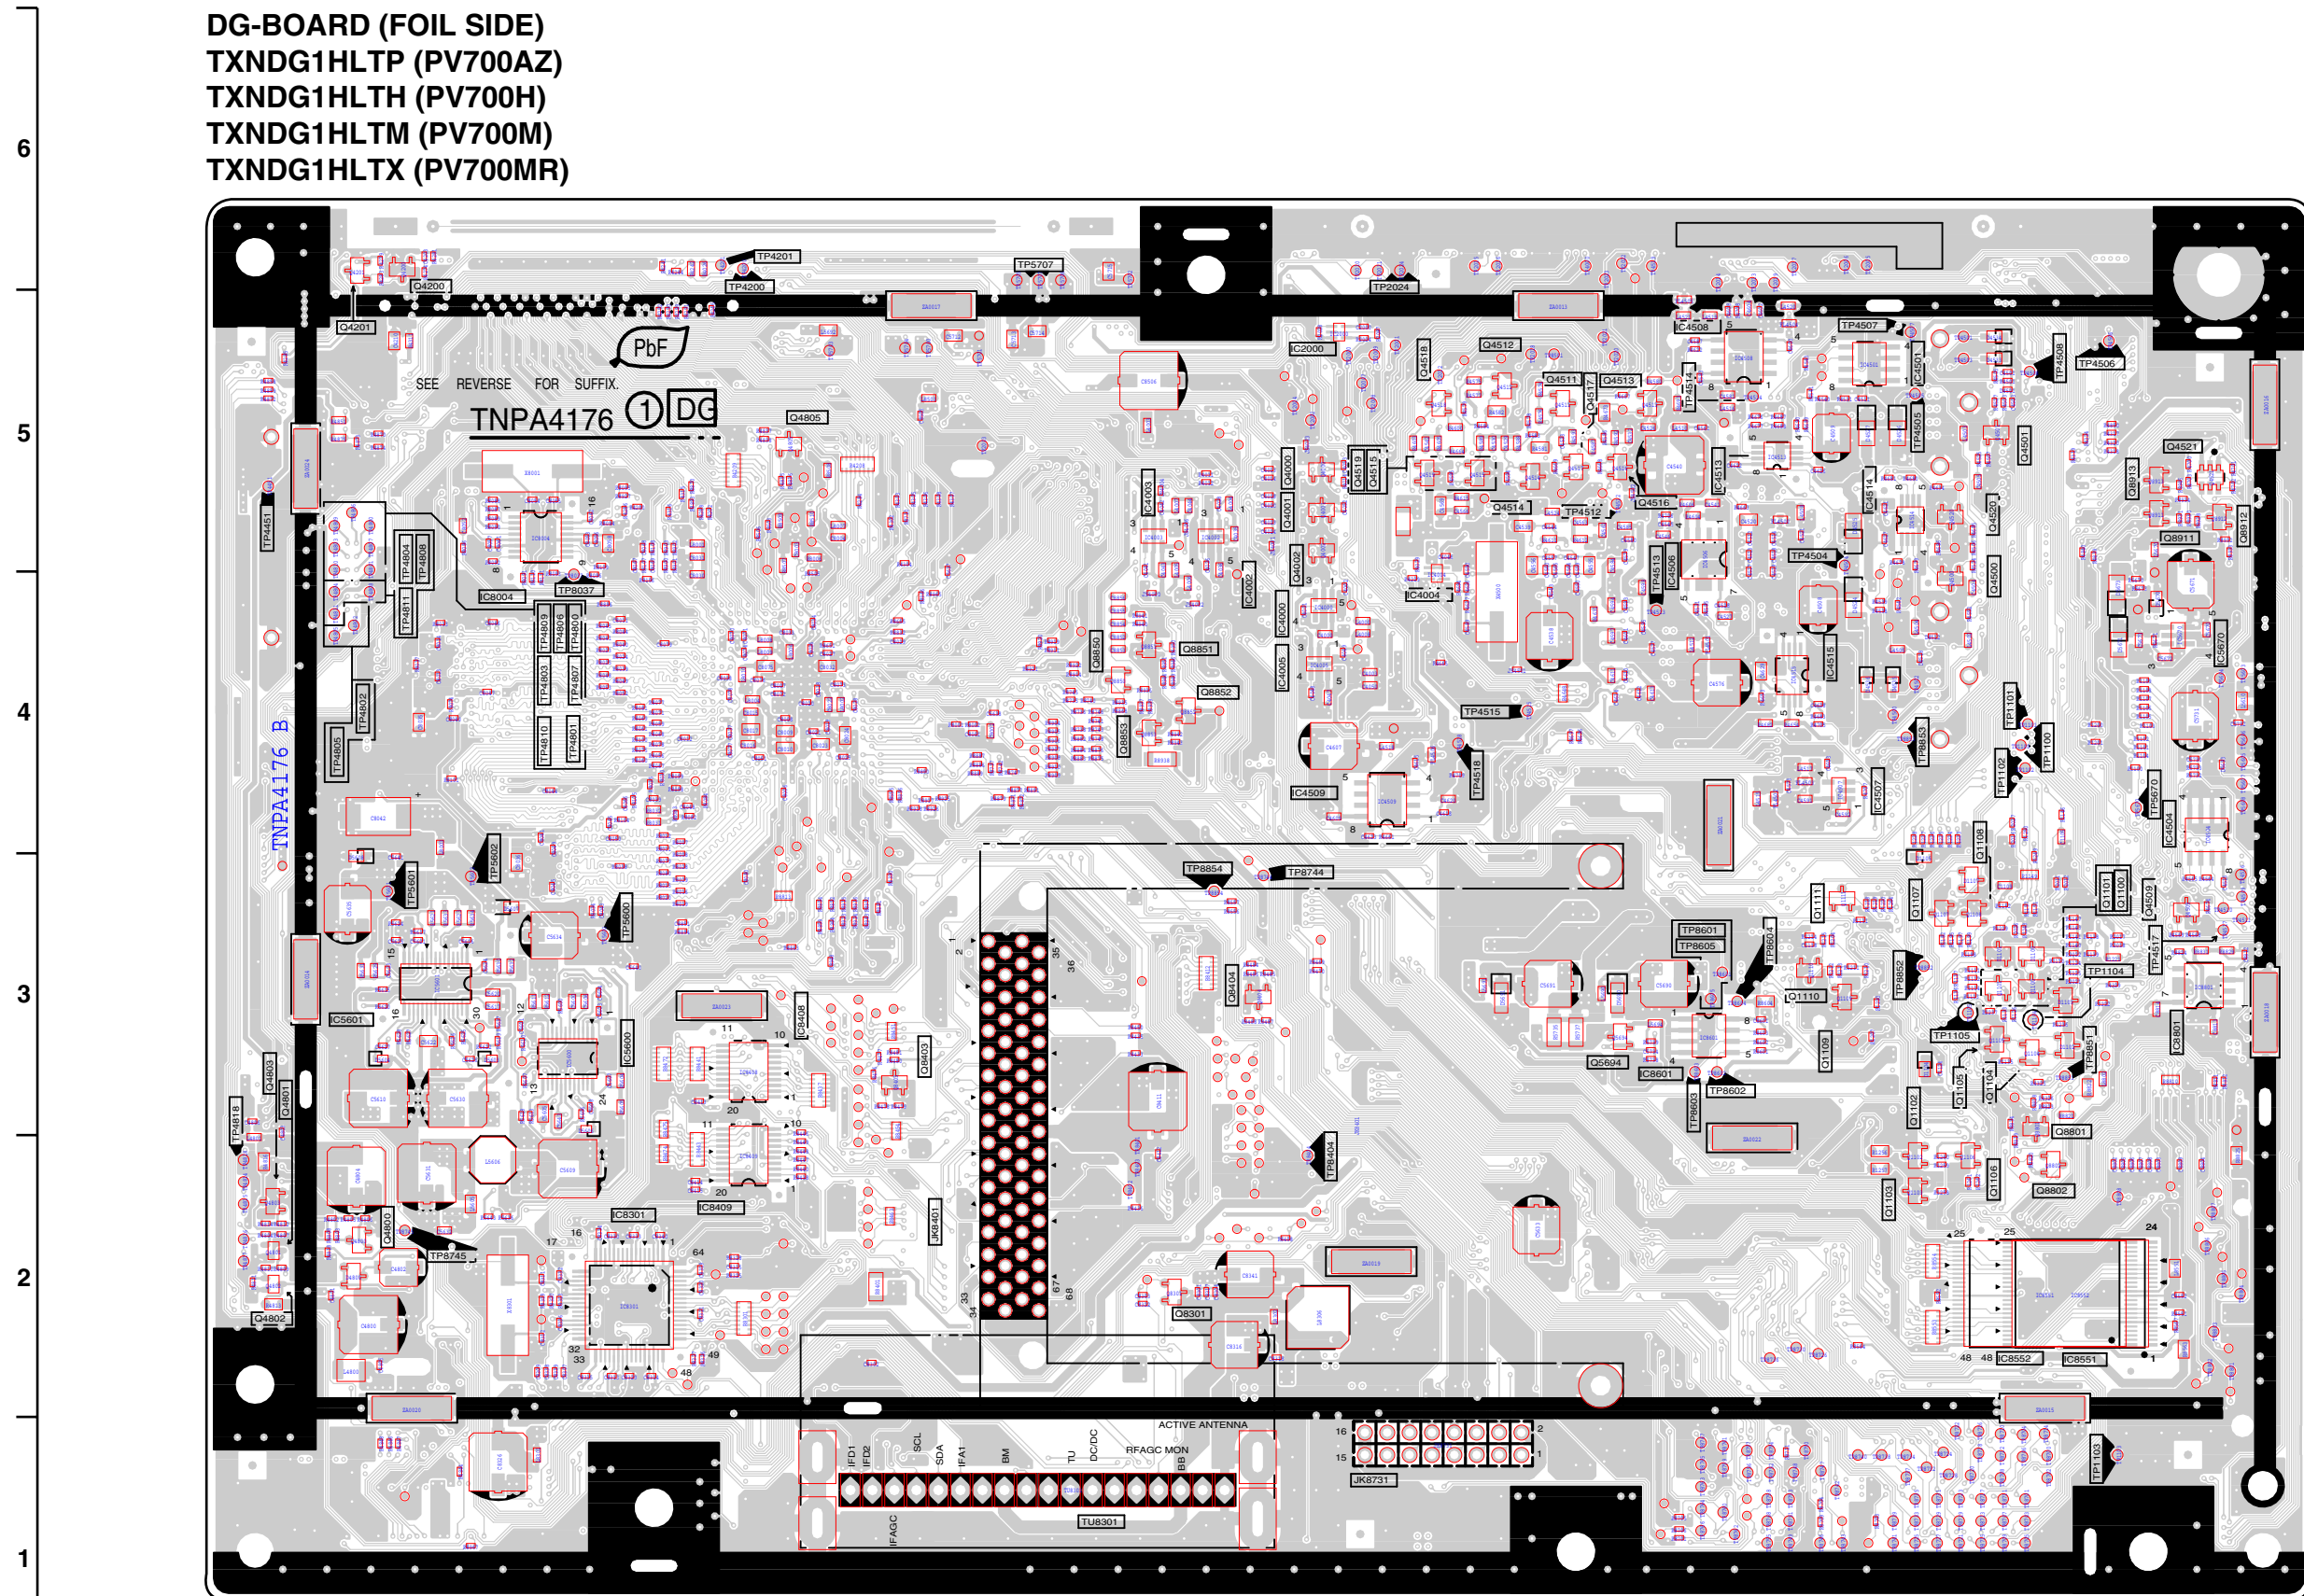

| | | | | | | | |
|-------------------------------------|-----------------------------------|------------------------------------|-------------------------------------|-------------------------------------|-----------------------------------|------------------------------------|-------------------------------------|
| TH-50PV700AZ DG-BOARD TXNDG1HLTP | TH-50PV700H DG-BOARD TXNDGHLTH | TH-50PV700M DG-BOARD TXNDG1HLTM | TH-50PV700MR DG-BOARD TXNDG1HLTX | TH-50PV700AZ DG-BOARD TXNDG1HLTP | TH-50PV700H DG-BOARD TXNDGHLTH | TH-50PV700M DG-BOARD TXNDG1HLTM | TH-50PV700MR DG-BOARD TXNDG1HLTX |
| A | B | C | D | E | F | G | H |

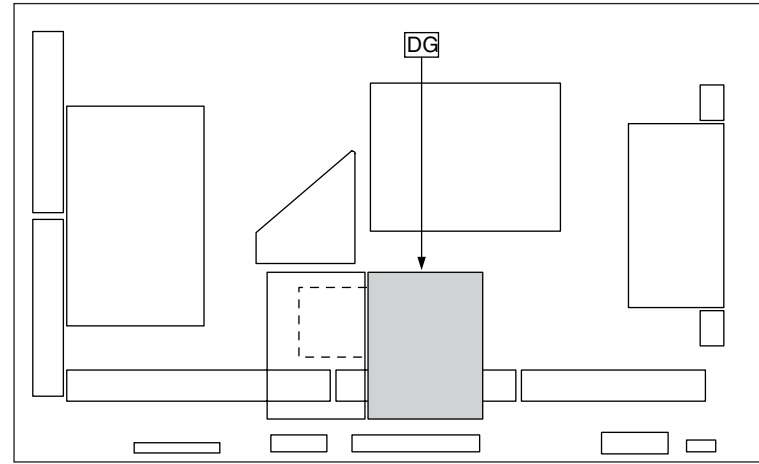

Parts Location


| DG-BOARD (FOIL SIDE) | | | | | |
|----------------------|-----|------------|-----|--------|-----|
| IC | | TRANSISTOR | | TP | |
| IC2000 | E-5 | Q1100 | H-3 | TP1100 | H-4 |
| IC4000 | E-4 | Q1101 | H-3 | TP1101 | H-4 |
| IC4002 | E-4 | Q1102 | G-3 | TP1102 | G-4 |
| IC4003 | D-5 | Q1103 | G-2 | TP1103 | H-1 |
| IC4004 | E-4 | Q1104 | G-3 | TP1104 | H-3 |
| IC4005 | E-4 | Q1105 | G-3 | TP1105 | G-3 |
| IC4501 | G-5 | Q1106 | G-2 | TP2024 | E-6 |
| IC4504 | H-4 | Q1107 | G-3 | TP4200 | C-6 |
| IC4506 | F-4 | Q1108 | G-3 | TP4201 | C-6 |
| IC4507 | G-4 | Q1109 | G-3 | TP4451 | A-5 |
| IC4508 | F-5 | Q1110 | G-3 | TP4504 | G-5 |
| IC4509 | E-4 | Q1111 | G-3 | TP4505 | G-5 |
| IC4513 | F-5 | Q4000 | E-5 | TP4506 | H-5 |
| IC4514 | G-5 | Q4001 | E-5 | TP4507 | G-5 |
| IC4515 | G-4 | Q4002 | E-4 | TP4508 | H-5 |
| IC5600 | C-3 | Q4200 | B-6 | TP4512 | F-5 |
| IC5601 | B-3 | Q4201 | B-5 | TP4513 | F-4 |
| IC5670 | H-4 | Q4500 | G-4 | TP4514 | F-5 |
| IC8004 | B-4 | Q4501 | H-5 | TP4515 | F-4 |
| IC8301 | C-2 | Q4509 | H-3 | TP4517 | H-3 |
| IC8408 | C-3 | Q4511 | F-5 | TP4518 | F-4 |
| IC8409 | C-2 | Q4512 | F-5 | TP4800 | B-4 |
| IC8601 | F-3 | Q4513 | F-5 | TP4801 | B-4 |
| IC8801 | H-3 | Q4514 | F-5 | TP4802 | B-4 |
| IC8851 | H-2 | Q4515 | E-5 | TP4803 | B-4 |
| IC8852 | H-2 | Q4516 | F-5 | TP4804 | B-5 |
| | | Q4517 | F-5 | TP4805 | B-4 |
| | | Q4518 | E-5 | TP4806 | B-4 |
| | | Q4519 | E-5 | TP4807 | B-4 |
| | | Q4520 | G-5 | TP4808 | B-5 |
| | | Q4521 | H-5 | TP4809 | B-4 |
| | | Q4800 | B-2 | TP4810 | B-4 |
| | | Q4801 | A-3 | TP4811 | B-4 |
| | | Q4802 | A-2 | TP4818 | A-2 |
| | | Q4803 | A-3 | TP5600 | C-3 |
| | | Q4805 | C-5 | TP5601 | B-3 |
| | | Q5694 | F-3 | TP5602 | B-3 |
| | | Q8301 | E-2 | TP5670 | H-4 |
| | | Q8403 | D-3 | TP5707 | D-6 |
| | | Q8404 | E-3 | TP8037 | B-4 |
| | | Q8801 | H-3 | TP8404 | E-2 |
| | | Q8802 | H-2 | TP8601 | F-3 |
| | | Q8850 | D-4 | TP8602 | F-3 |
| | | Q8851 | E-4 | TP8603 | F-3 |
| | | Q8852 | E-4 | TP8604 | G-3 |
| | | Q8853 | D-4 | TP8605 | F-3 |
| | | Q8911 | H-5 | TP8744 | E-3 |
| | | Q8912 | H-5 | TP8745 | B-2 |
| | | Q8913 | H-5 | TP8851 | H-3 |
| | | | | TP8852 | G-3 |
| | | | | TP8853 | G-4 |
| | | | | TP8854 | E-3 |

Parts Location

| DG-BOARD (COMPONENT SIDE) | | | |
|---------------------------|-----|------------|-----|
| IC | | TRANSISTOR | |
| IC1100 | B-3 | Q2000 | B-3 |
| IC1101 | B-4 | Q2001 | B-3 |
| IC4001 | E-4 | Q4502 | B-5 |
| IC4500 | C-5 | Q4503 | B-4 |
| IC4503 | C-5 | Q4504 | B-6 |
| IC4510 | C-4 | Q4505 | B-5 |
| IC4800 | A-3 | Q5600 | G-3 |
| IC5660 | H-3 | Q5601 | H-3 |
| IC5671 | B-4 | Q5602 | H-3 |
| IC5672 | D-3 | Q5603 | H-3 |
| IC8001 | F-4 | Q5604 | H-3 |
| IC8002 | G-4 | Q5690 | C-3 |
| IC8003 | G-4 | Q5691 | C-3 |
| IC8302 | H-2 | Q5692 | C-3 |
| IC8401 | E-3 | Q5693 | D-3 |
| IC8402 | F-3 | Q8401 | E-2 |
| IC8403 | E-2 | Q8402 | E-2 |
| IC8404 | F-3 | Q8501 | F-5 |
| IC8405 | F-2 | | |
| IC8406 | E-3 | | |
| IC8407 | E-3 | | |
| IC8553 | B-2 | | |
| IC8621 | C-2 | | |
| IC8622 | C-2 | | |
| IC8654 | C-2 | | |



DG-BOARD (COMPONENT SIDE)
 TXNDG1HLTP (PV700AZ)
 TXNDG1HLTH (PV700H)
 TXNDG1HLTM (PV700M)
 TXNDG1HLTX (PV700MR)

6
5
4
3
2
1

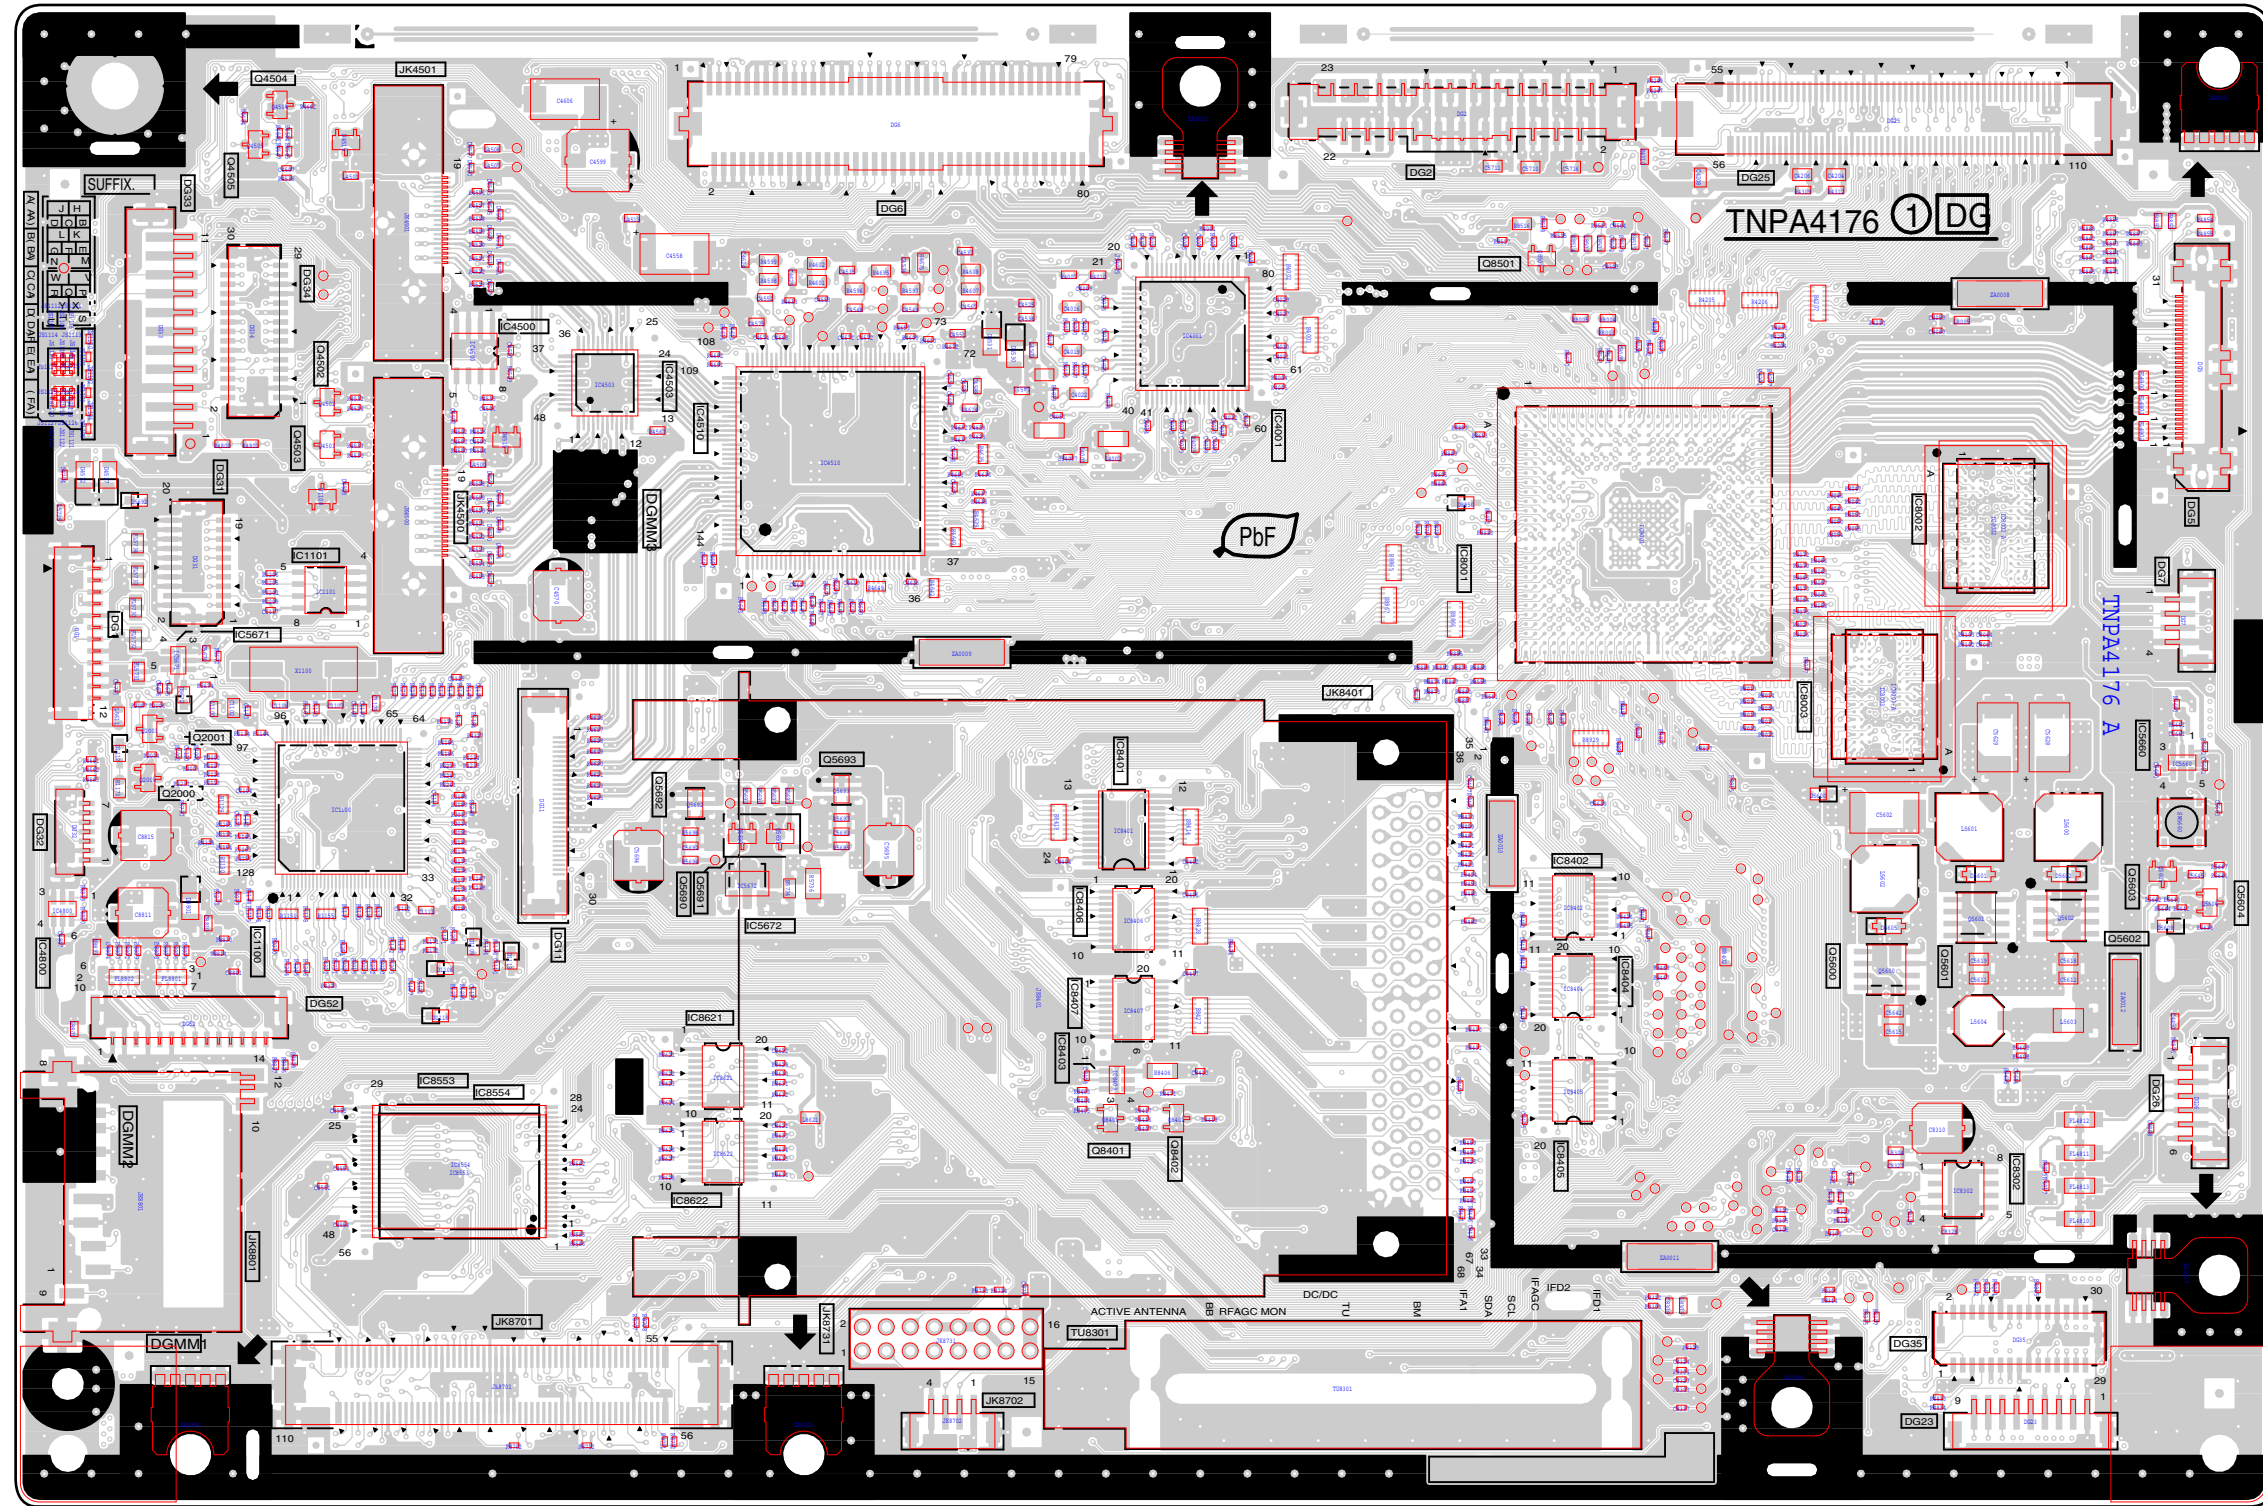

| | | | | | | | |
|---------------------|--------------------|--------------------|--------------------|---------------------|--------------------|--------------------|--------------------|
| TH-50PV700AZ | TH-50PV700H | TH-50PV700M | TH-50PV700MR | TH-50PV700AZ | TH-50PV700H | TH-50PV700M | TH-50PV700MR |
| DG-BOARD TXNDG1HLTP | DG-BOARD TXNDGHLTH | DG-BOARD TXNDGHLTM | DG-BOARD TXNDGHLTX | DG-BOARD TXNDG1HLTP | DG-BOARD TXNDGHLTH | DG-BOARD TXNDGHLTM | DG-BOARD TXNDGHLTX |
| A | B | C | D | E | F | G | H |

14.5. D-Board

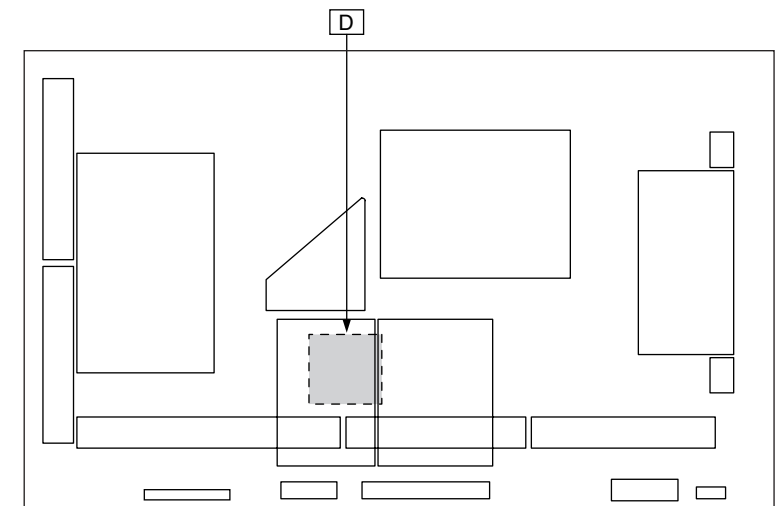
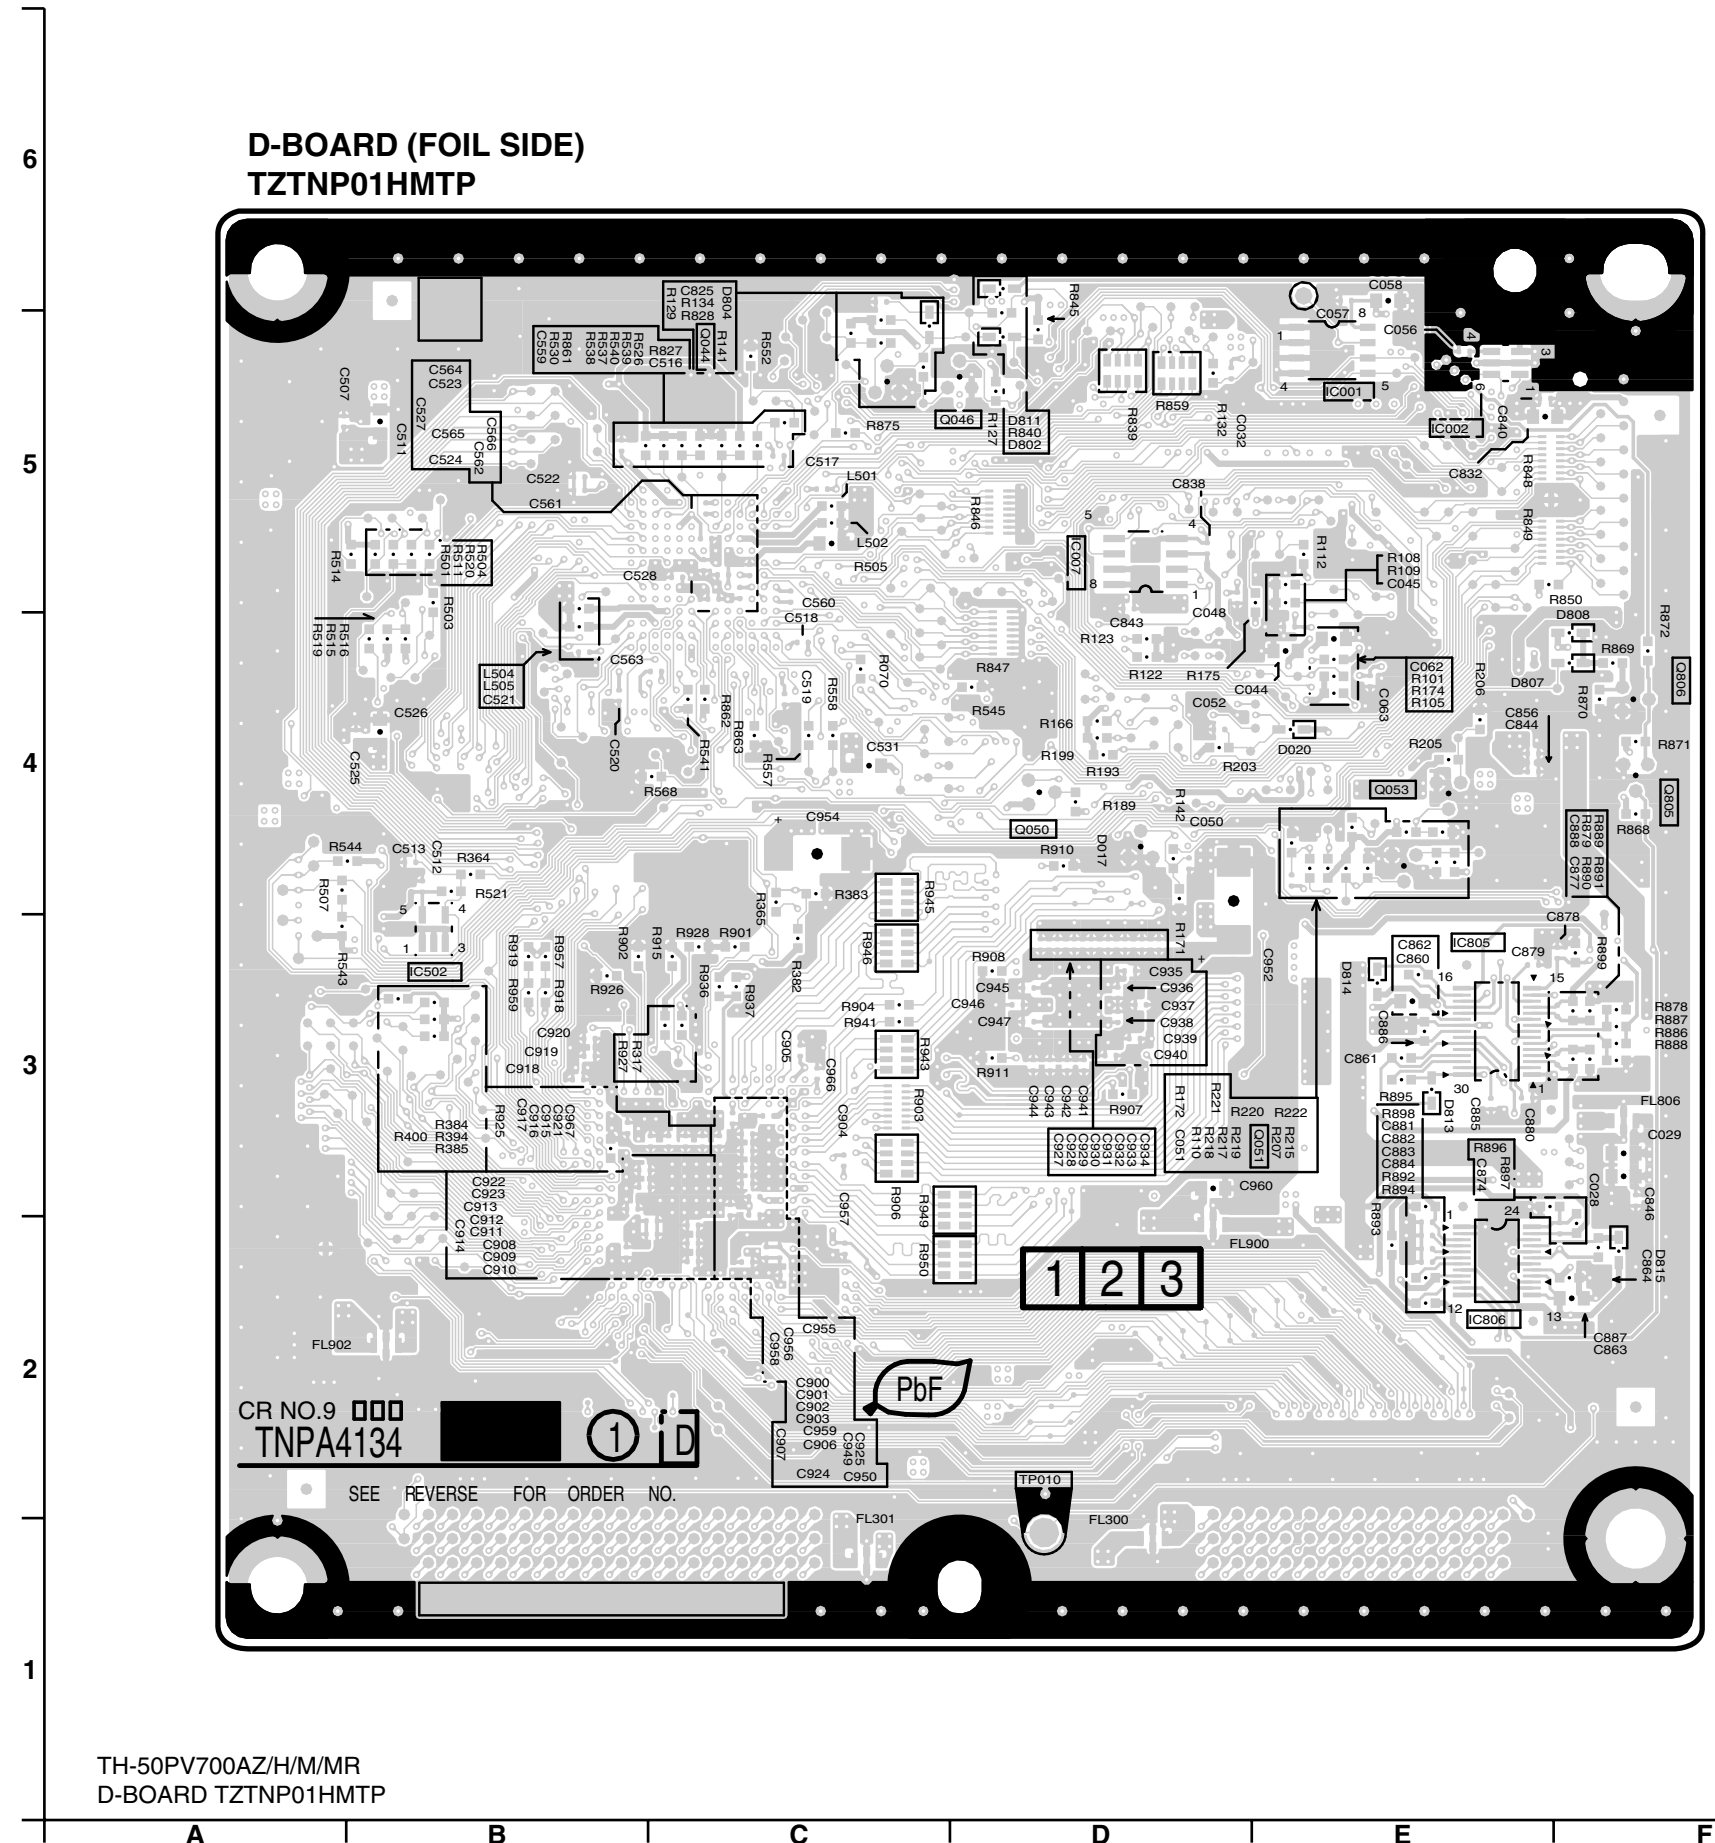


Parts Location

| D-BOARD (FOIL SIDE) | | | |
|---------------------|-----|------------|-----|
| IC | | TRANSISTOR | |
| IC9001 | E-5 | Q9044 | C-5 |
| IC9002 | E-5 | Q9046 | D-5 |
| IC9007 | D-5 | Q9050 | D-4 |
| IC9502 | C-3 | Q9051 | E-3 |
| IC9805 | E-2 | Q9053 | E-4 |
| IC9806 | E-3 | Q9805 | F-4 |
| | | Q9806 | F-4 |
| TEST POINT | | | |
| TP010 | D-2 | | |

**D-BOARD (COMPONENT SIDE)
TZTNP01HMTP**

6
5
4
3
2
1

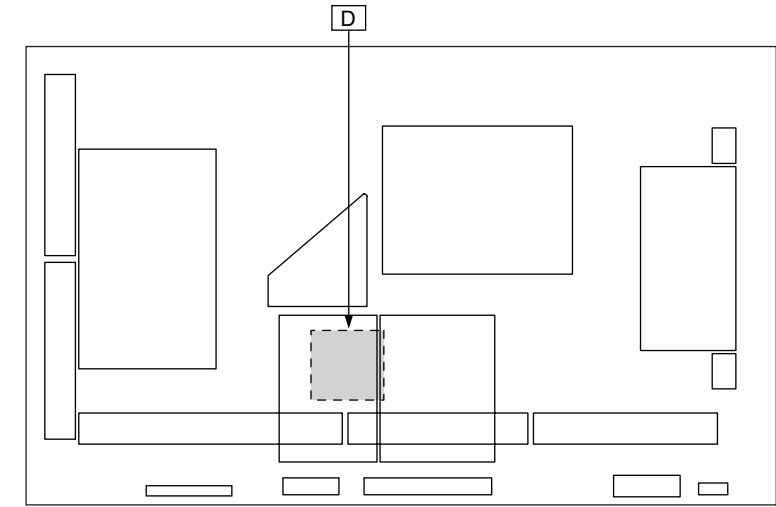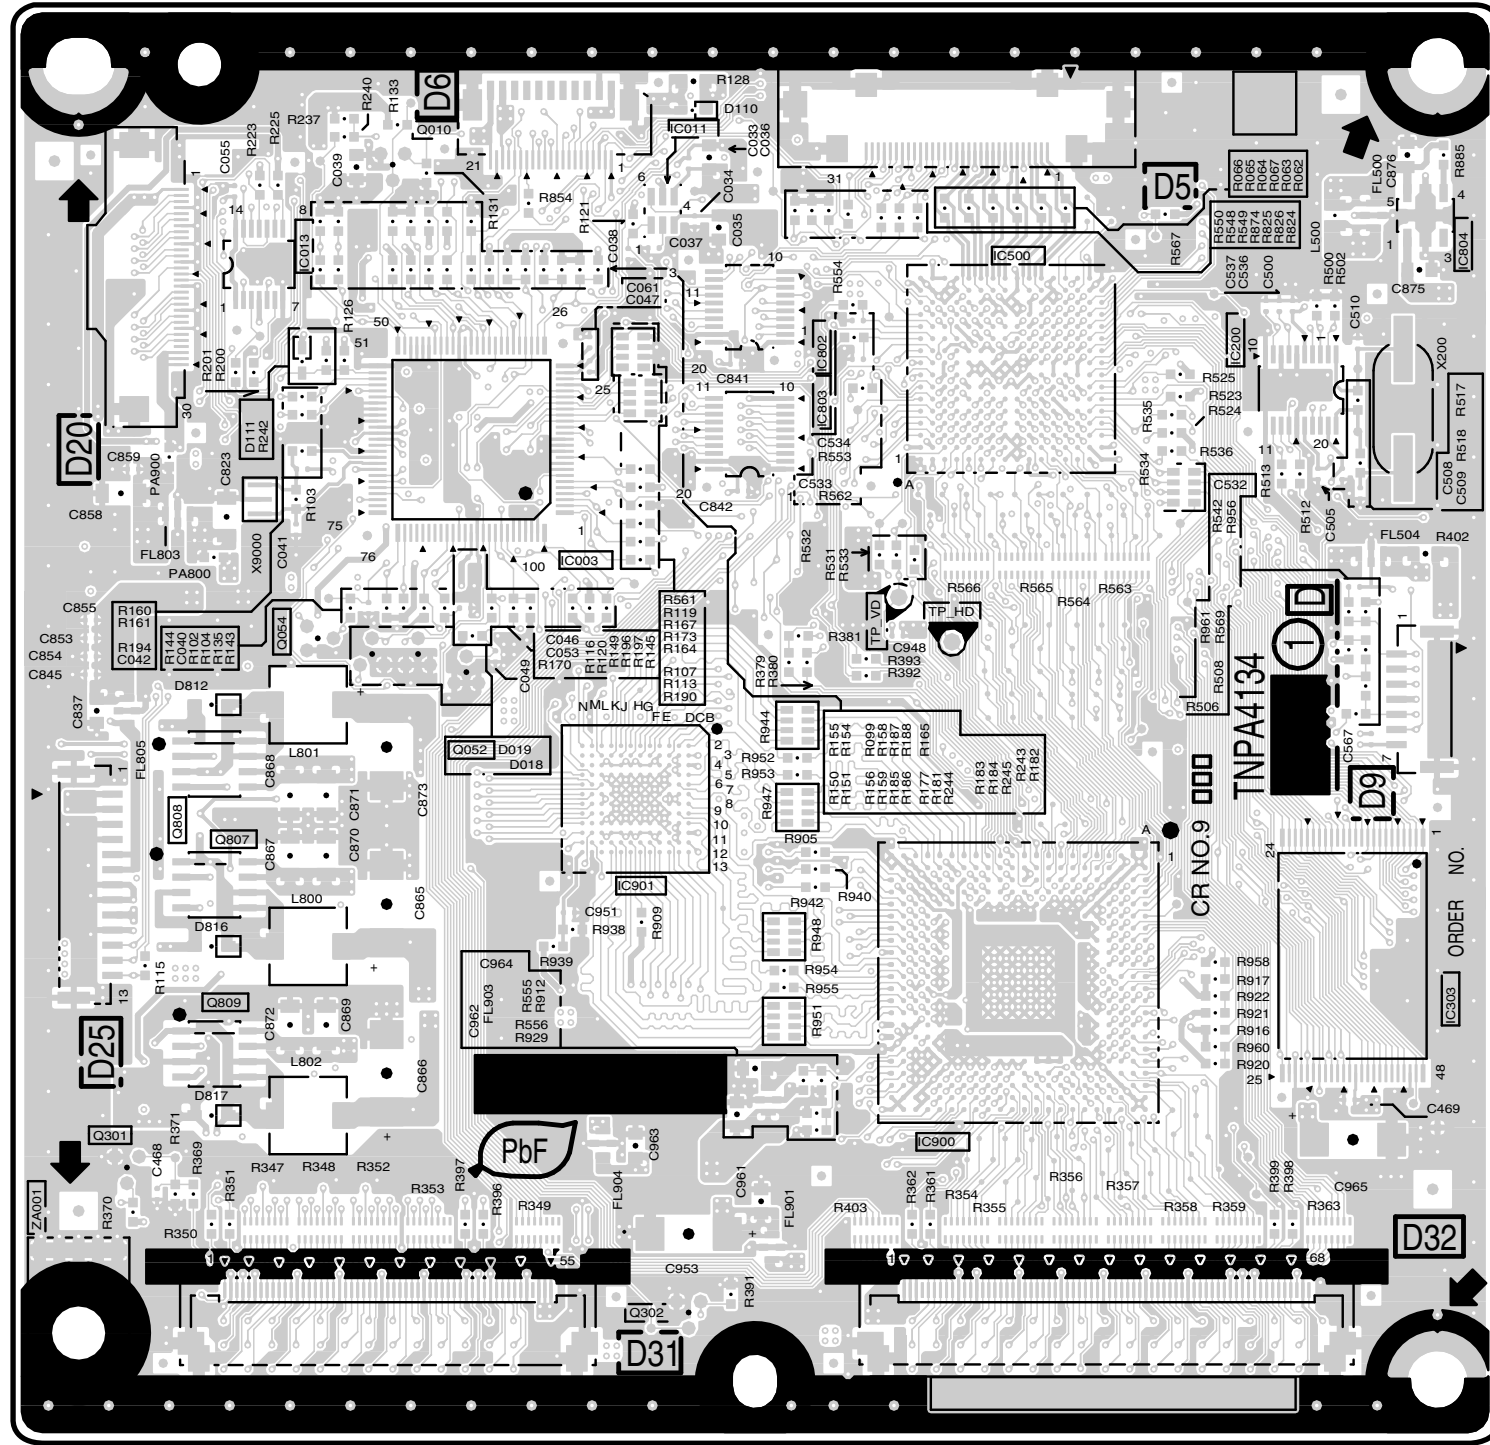

Parts Location

| D-BOARD (COMPONENT SIDE) | | | |
|--------------------------|-----|------------|-----|
| IC | | TRANSISTOR | |
| IC9003 | C-4 | Q9010 | B-5 |
| IC9011 | C-5 | Q9052 | C-3 |
| IC9013 | B-5 | Q9054 | B-4 |
| IC9200 | E-5 | Q9301 | A-2 |
| IC9303 | F-3 | Q9302 | C-1 |
| IC9500 | D-5 | Q9807 | B-3 |
| IC9802 | D-5 | Q9808 | B-3 |
| IC9803 | D-4 | Q9809 | B-3 |
| IC9804 | F-5 | | |
| IC9900 | D-2 | TP | |
| IC9901 | C-3 | TP-HD | D-4 |
| | | TP-VD | D-4 |

TH-50PV700AZ/H/M/MR
D-BOARD TZTNP01HMTP

TH-50PV700AZ/H/M/MR
D-BOARD TZTNP01HMTP


A B C D E F G H I

14.6. C1-Board


6
5
4
3
2
1

Parts Location


| C1-BOARD | |
|----------|-----|
| IC | |
| IC7101 | H-2 |
| IC7102 | I-2 |

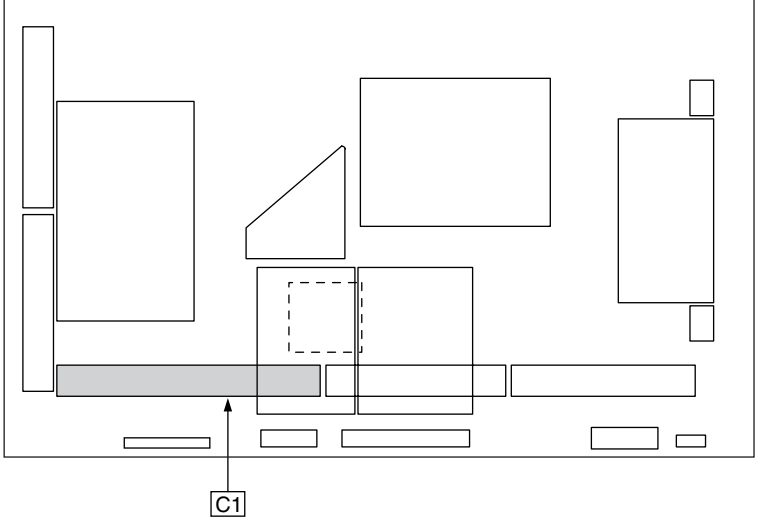

**C1-BOARD (FOIL SIDE)
TNPA4169**

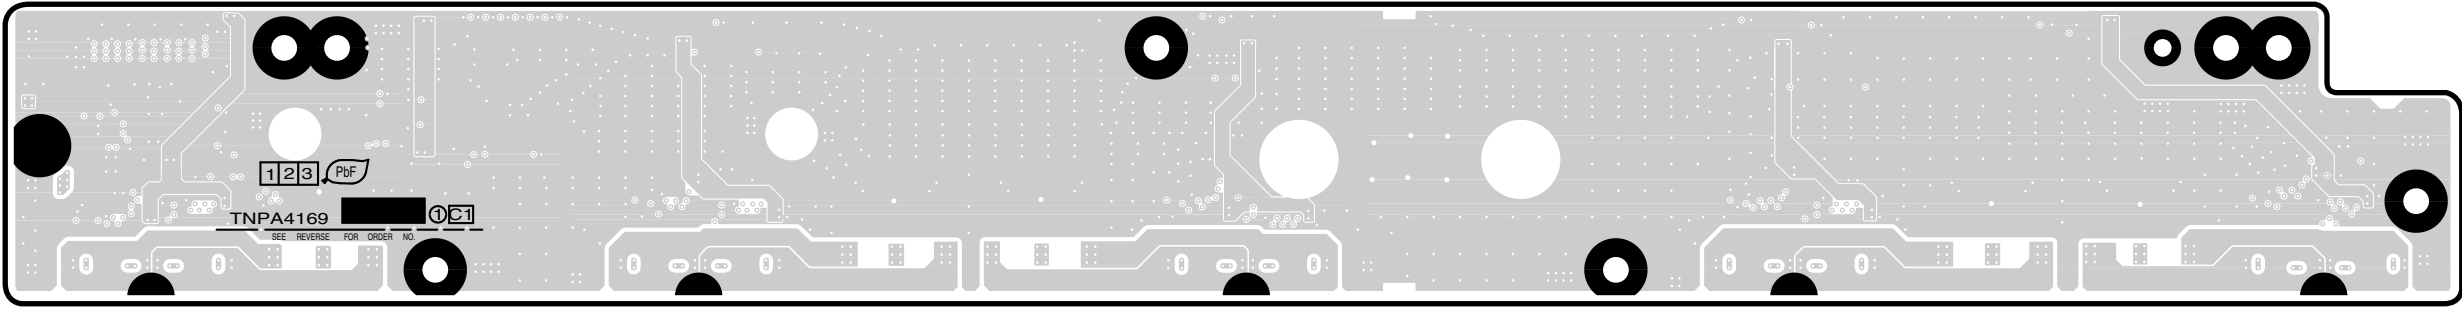

**C1-BOARD (COMPONENT SIDE)
TNPA4169**

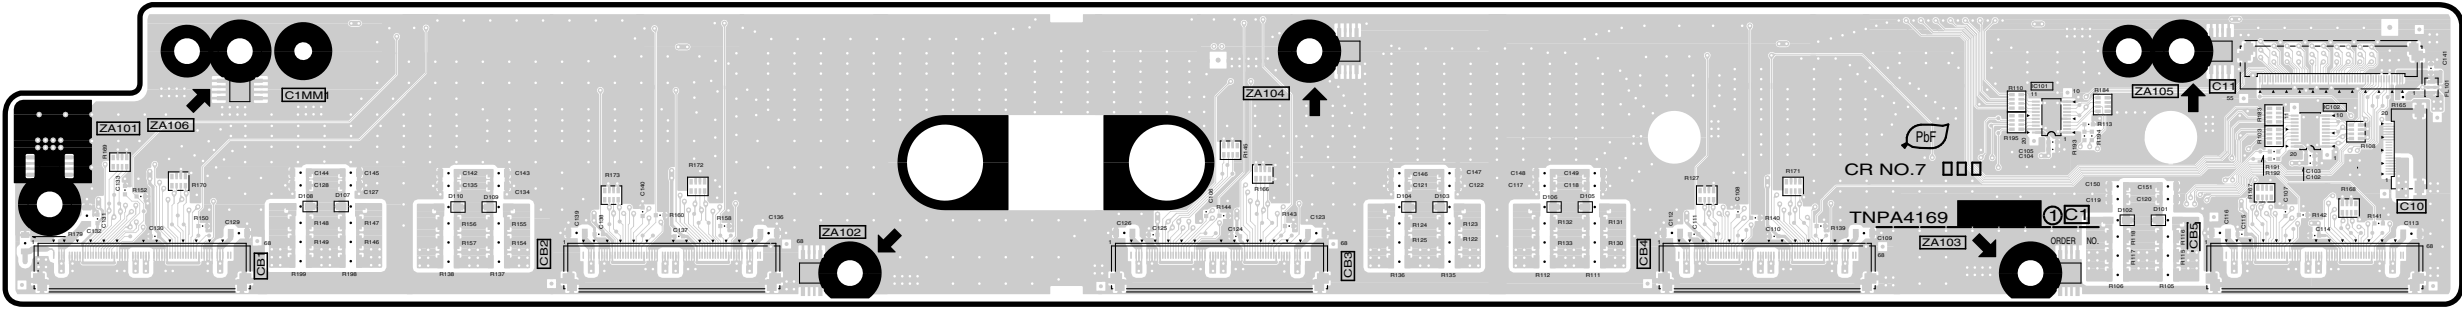


TH-50PV700AZ/H/M/MR
C1-BOARD TNPA4169


TH-50PV700AZ/H/M/MR
C1-BOARD TTNPA4169

A B C D E F G H I

14.7. C2-Board

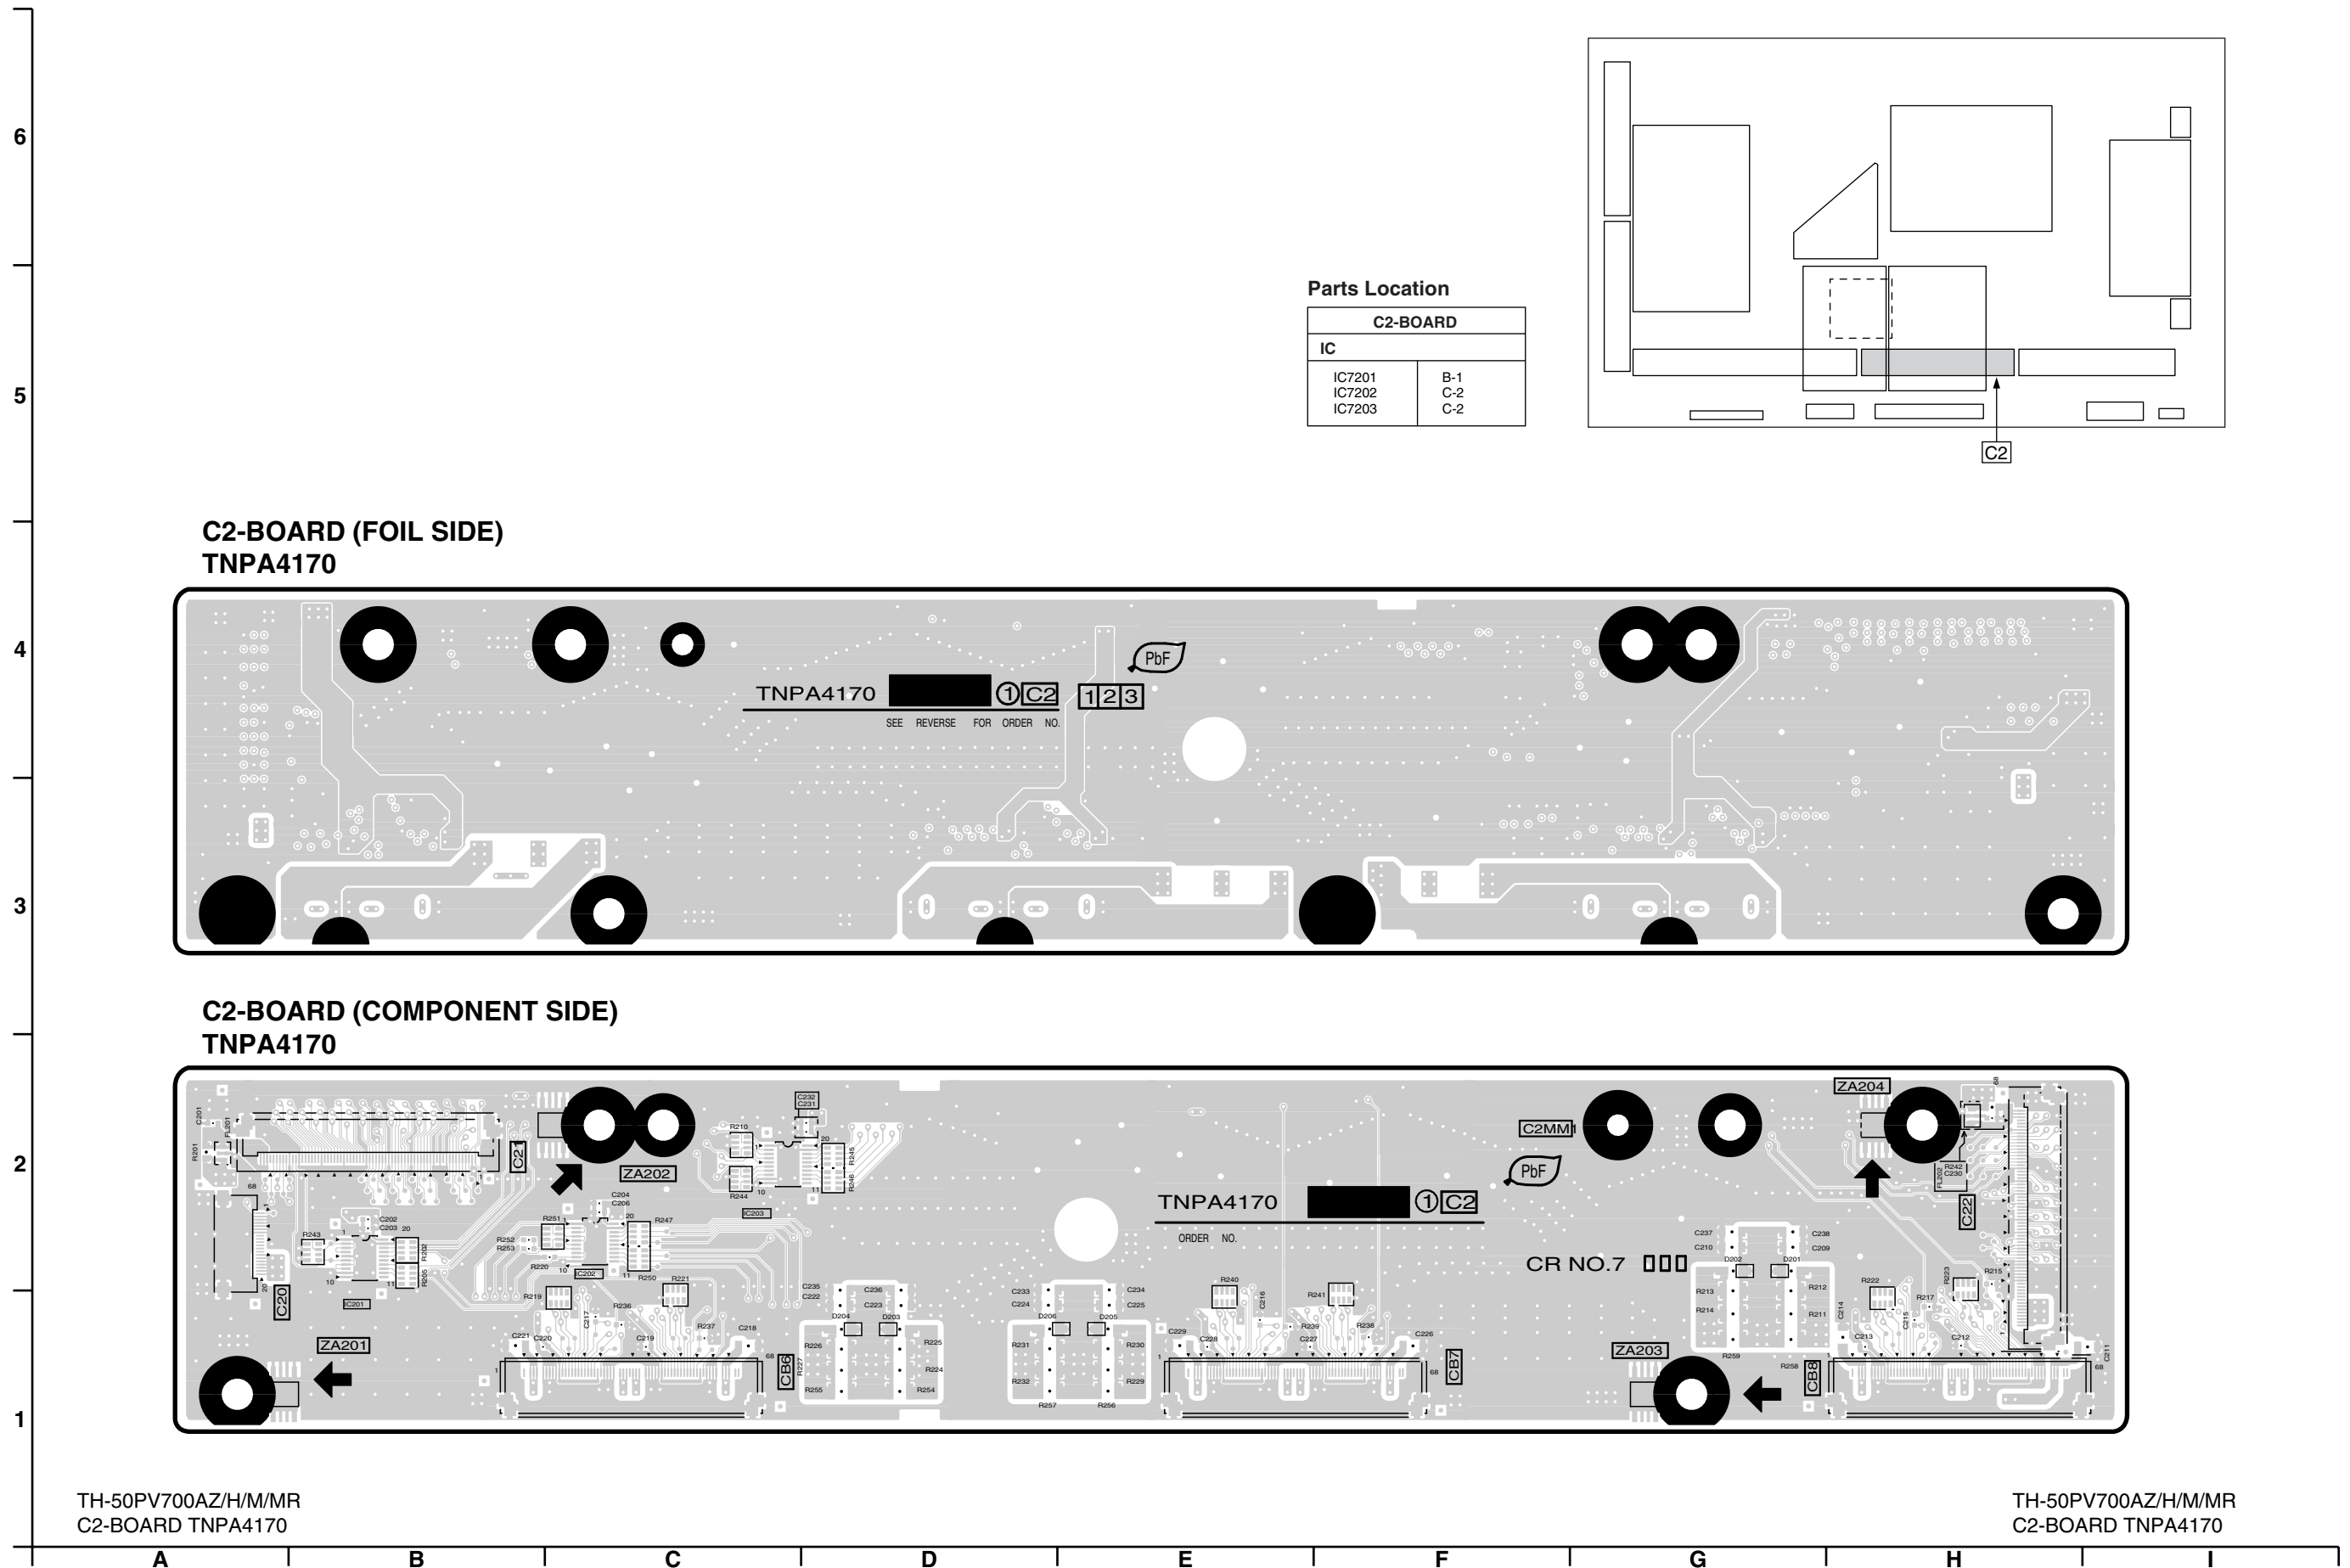


14.8. C3-Board

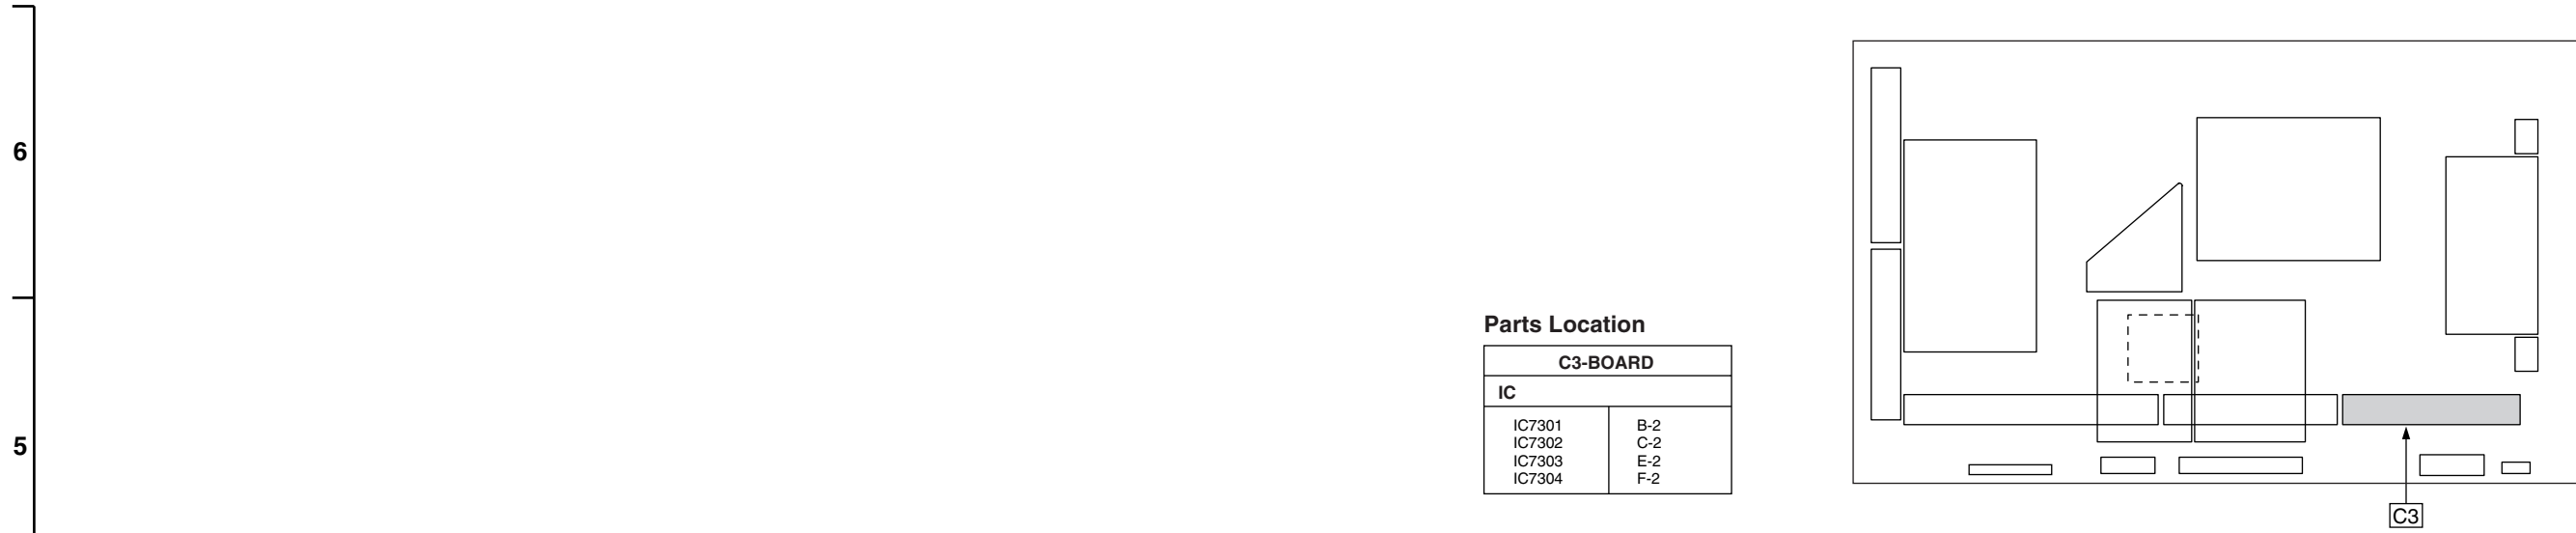


Parts Location

| C3-BOARD | |
|----------|-----|
| IC | |
| IC7301 | B-2 |
| IC7302 | C-2 |
| IC7303 | E-2 |
| IC7304 | F-2 |

**C3-BOARD (FOIL SIDE)
TNPA4171**

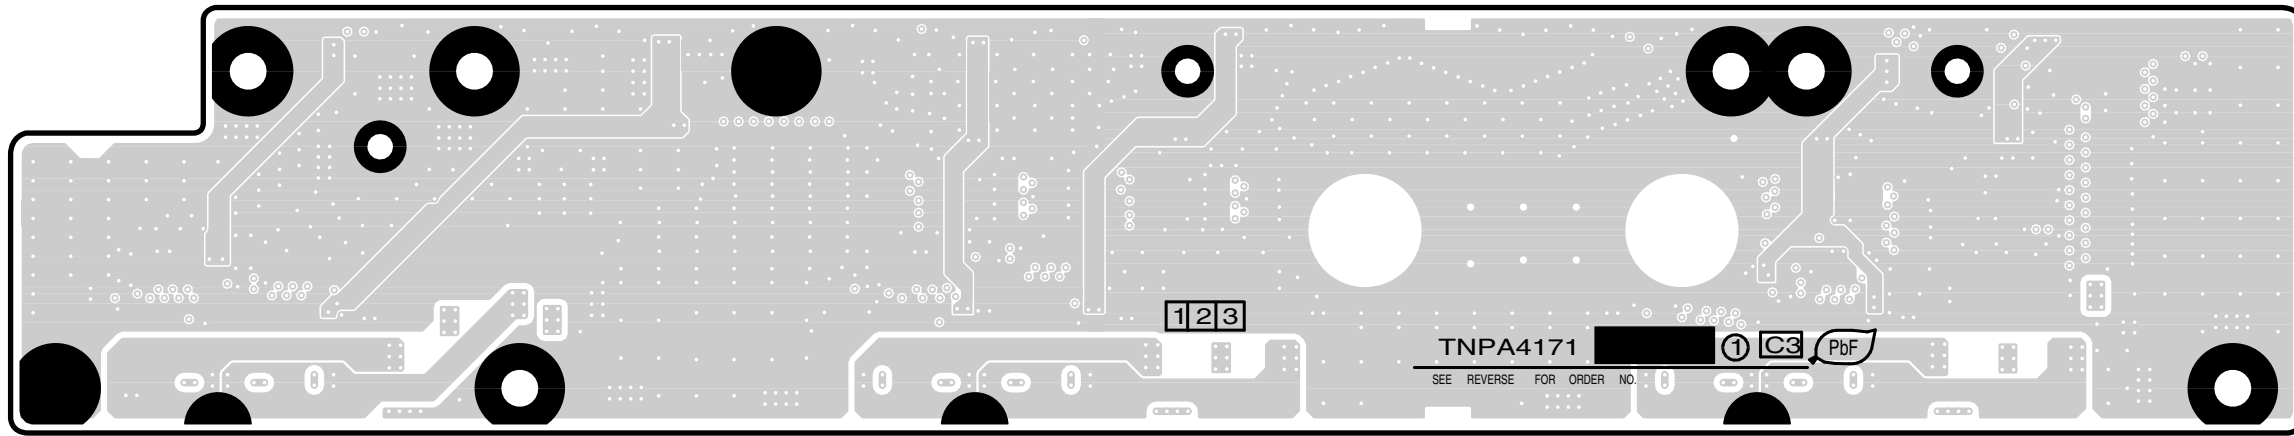

**C3-BOARD (COMPONENT SIDE)
TNPA4171**

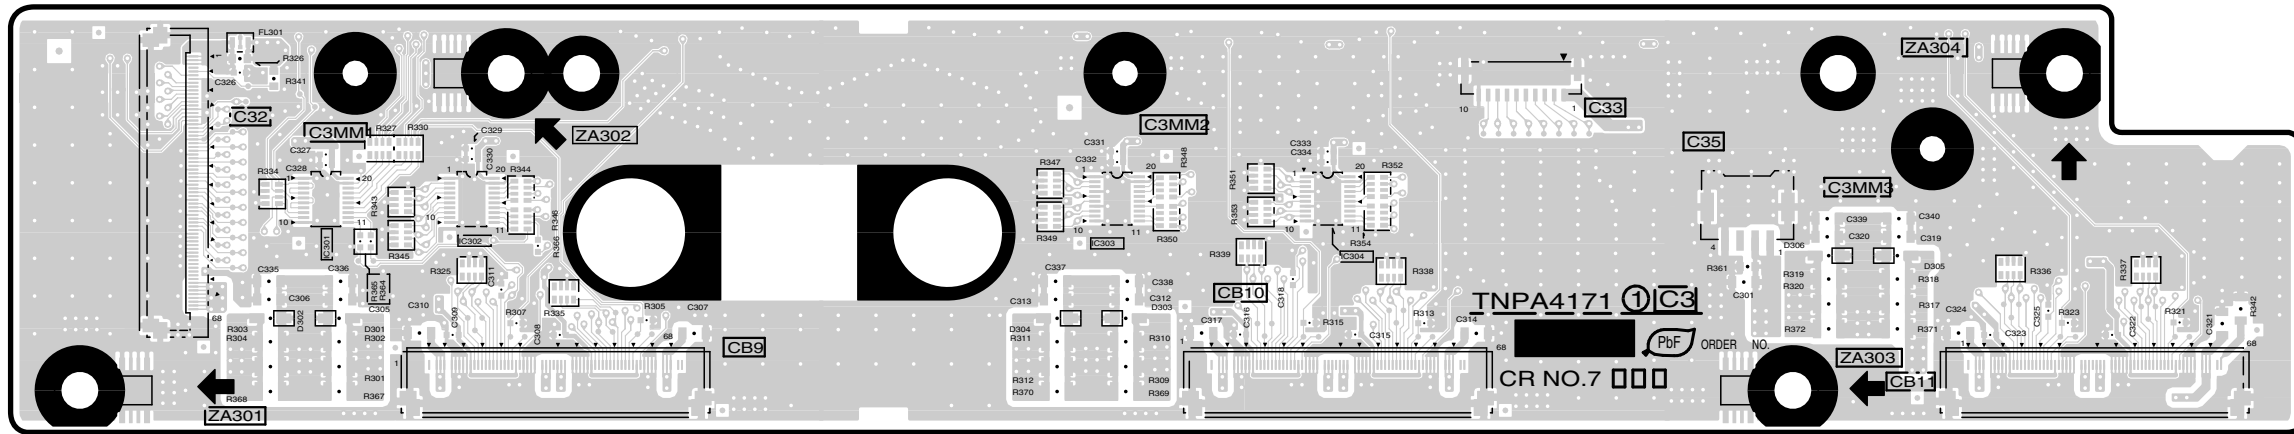



TH-50PV700AZ/H/M/MR
C3-BOARD TNPA4171

TH-50PV700AZ/H/M/MR
C3-BOARD TNPA4171

A B C D E F G H I

14.9. SC-Board

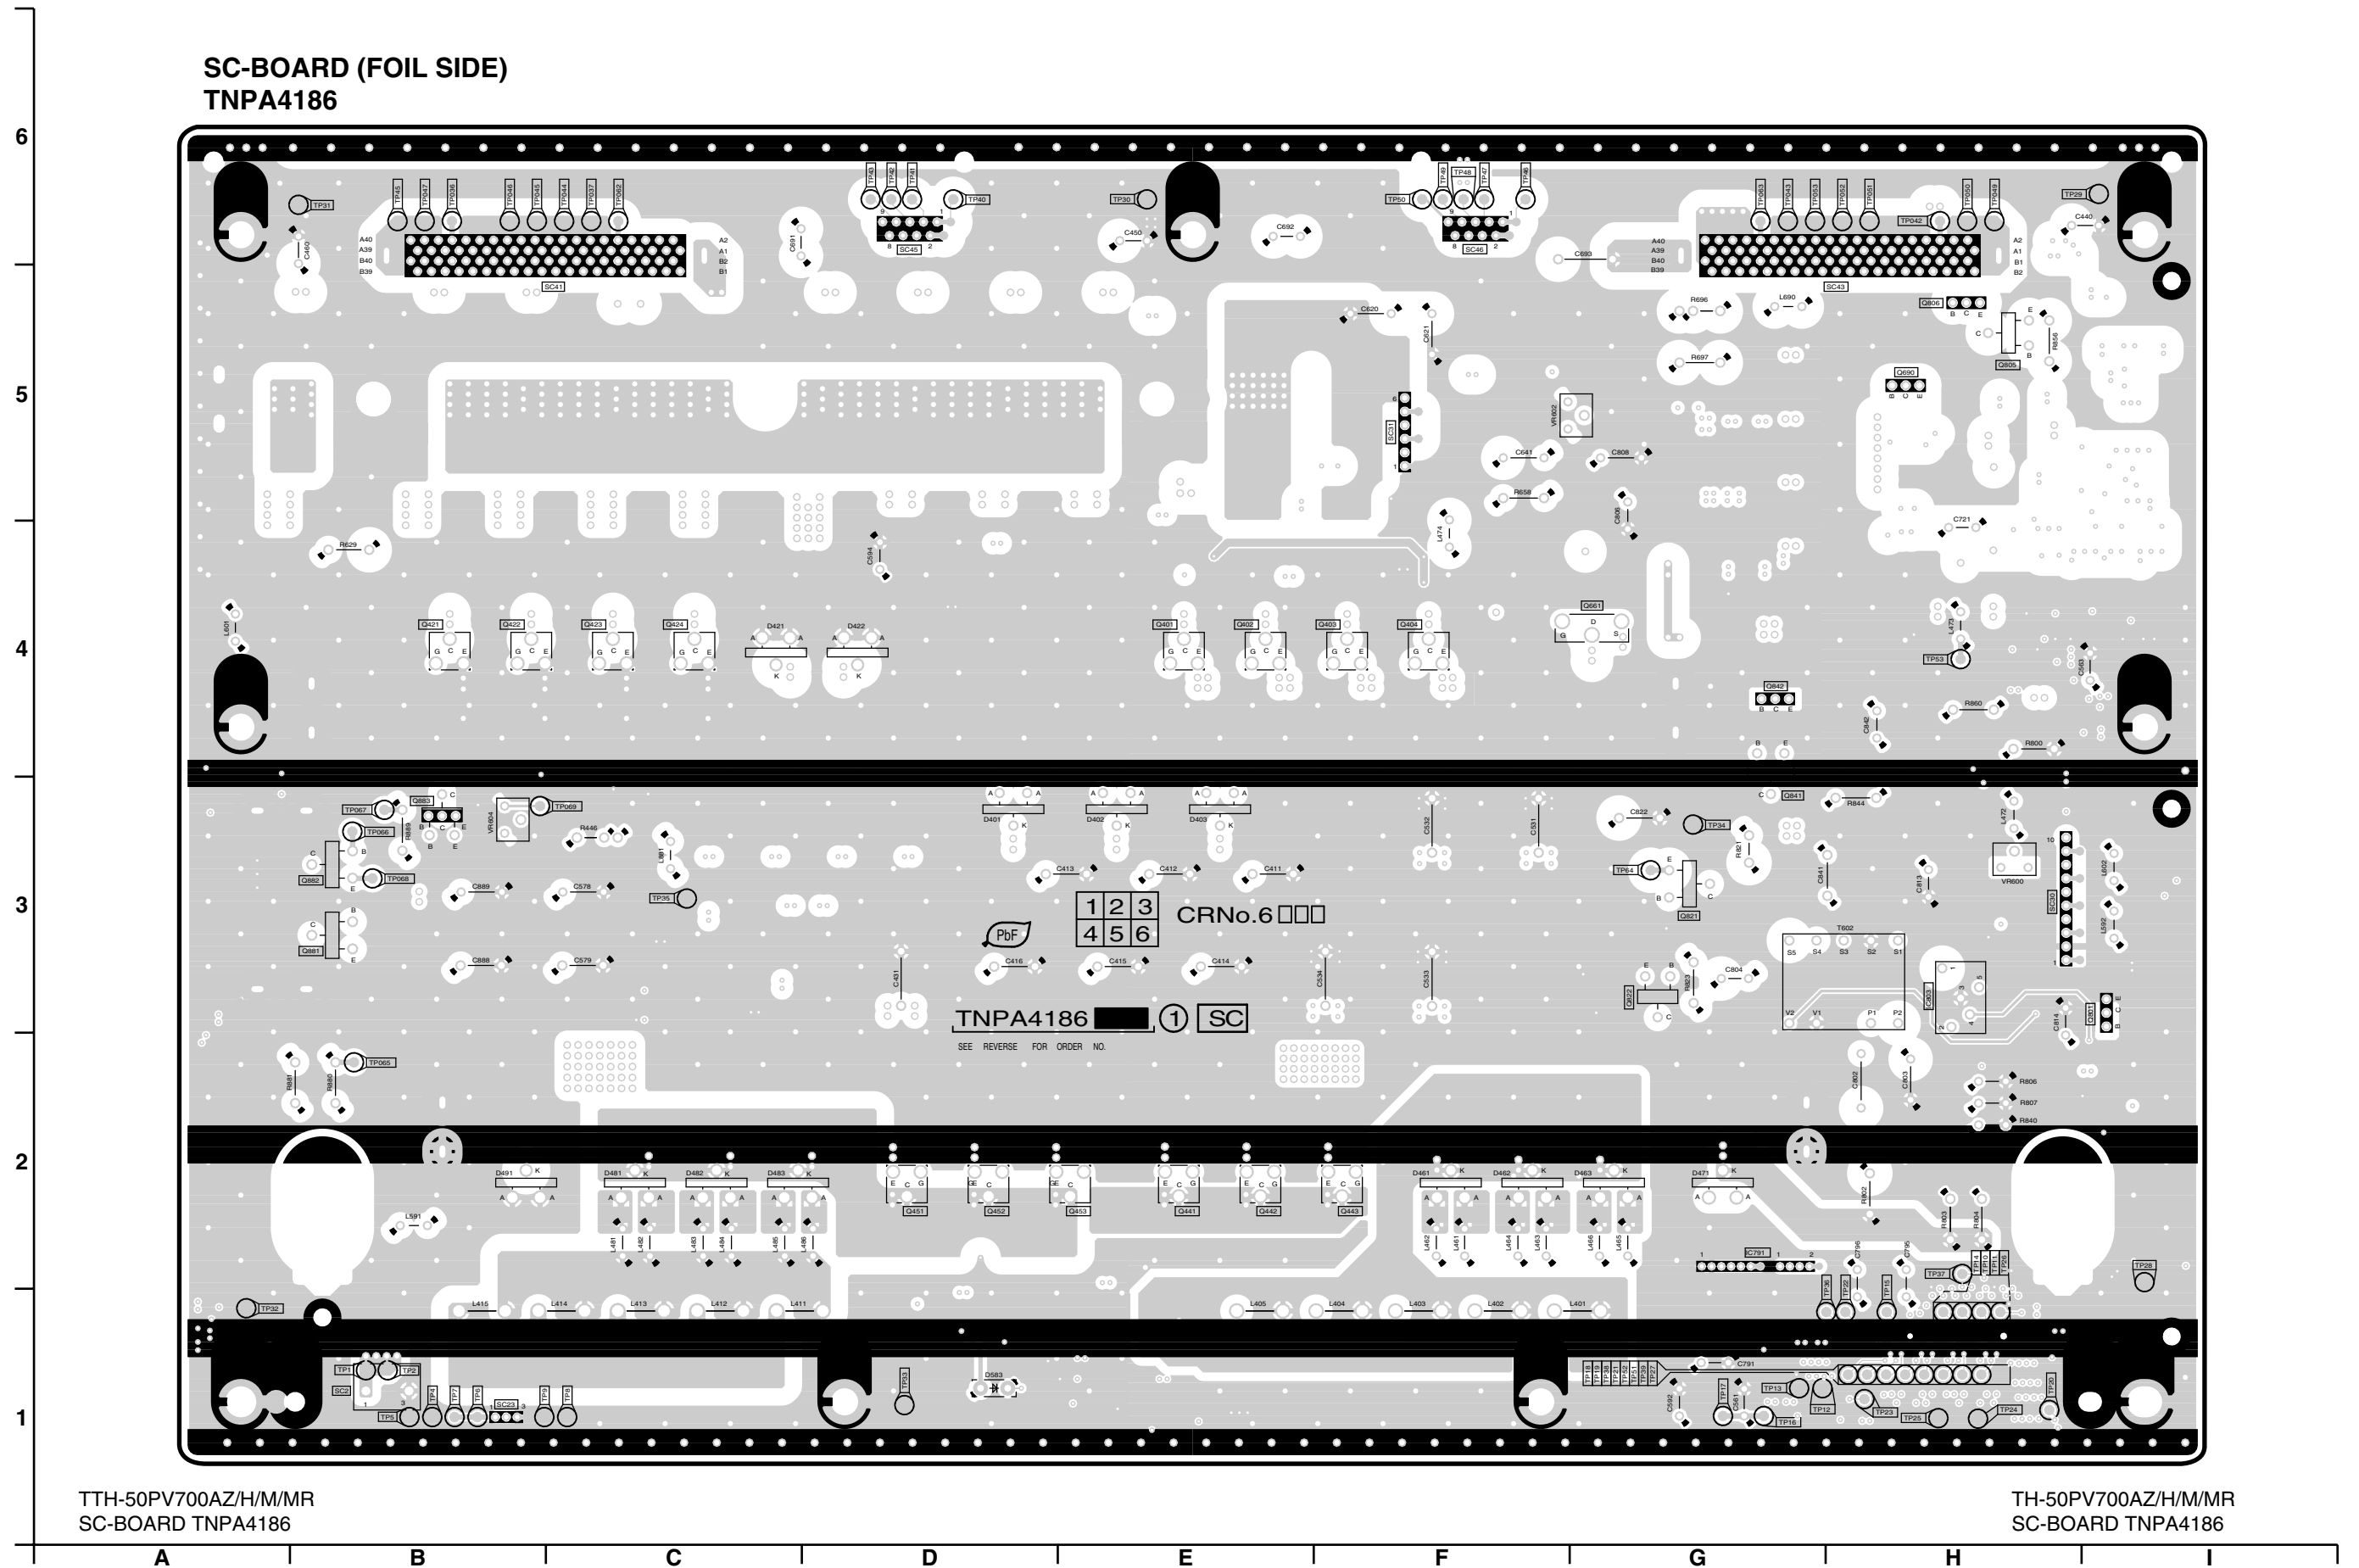

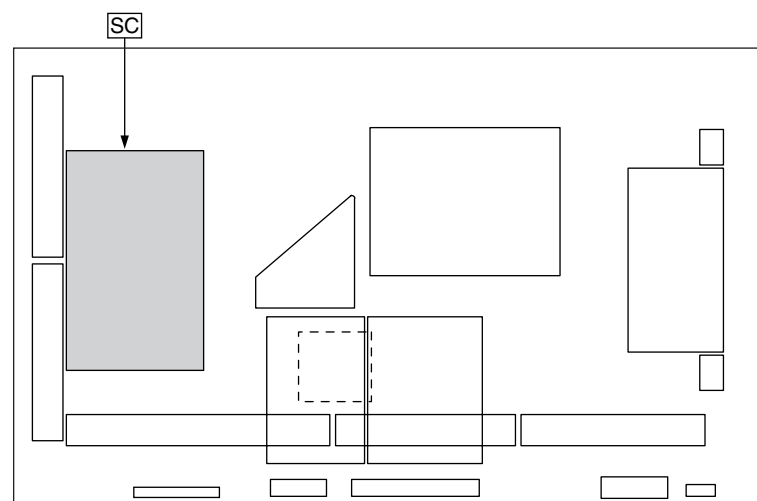


Parts Location

| SC-BOARD (FOIL SIDE) | | | | | | | |
|----------------------|-----|------|-----|--------|-----|--|--|
| TRANSISTOR | | TP | | TP41 | D-6 | | |
| IC6791 | G-2 | TP1 | B-1 | TP42 | D-6 | | |
| IC6803 | H-3 | TP2 | B-1 | TP43 | D-6 | | |
| | | TP4 | B-1 | TP45 | B-6 | | |
| | | TP5 | B-1 | TP46 | F-6 | | |
| | | TP6 | B-1 | TP47 | F-6 | | |
| | | TP7 | B-1 | TP48 | F-6 | | |
| | | TP8 | C-1 | TP49 | F-6 | | |
| | | TP9 | B-1 | TP50 | F-6 | | |
| | | TP10 | H-1 | TP51 | G-1 | | |
| | | TP11 | H-1 | TP52 | G-1 | | |
| | | TP12 | G-1 | TP53 | H-4 | | |
| | | TP13 | G-1 | TP64 | G-3 | | |
| | | TP14 | H-1 | TP036 | B-6 | | |
| | | TP15 | H-1 | TP037 | C-6 | | |
| | | TP16 | G-1 | TP042 | H-6 | | |
| | | TP17 | G-1 | TP043 | G-6 | | |
| | | TP18 | G-1 | TP044 | C-6 | | |
| | | TP19 | G-1 | TP045 | B-6 | | |
| | | TP20 | H-1 | TP046 | B-6 | | |
| | | TP21 | G-1 | TP047 | B-6 | | |
| | | TP22 | H-1 | TP049 | H-6 | | |
| | | TP23 | H-1 | TP050 | H-6 | | |
| | | TP24 | H-1 | TP051 | H-6 | | |
| | | TP25 | H-1 | TP052 | G-6 | | |
| | | TP26 | H-1 | TP053 | G-6 | | |
| | | TP27 | G-1 | TP062 | C-6 | | |
| | | TP28 | I-1 | TP063 | G-6 | | |
| | | TP29 | H-6 | TP065 | B-2 | | |
| | | TP30 | E-6 | TP066 | B-3 | | |
| | | TP31 | B-6 | TP067 | B-3 | | |
| | | TP32 | A-1 | TP068 | B-3 | | |
| | | TP33 | D-1 | TP069 | B-3 | | |
| | | TP34 | G-3 | | | | |
| | | TP35 | C-3 | | | | |
| | | TP36 | G-1 | | | | |
| | | TP37 | H-2 | | | | |
| | | TP38 | G-1 | | | | |
| | | TP39 | G-1 | | | | |
| | | TP40 | D-6 | | | | |
| | | | | VOLUME | | | |
| | | | | VR6600 | H-3 | | |
| | | | | VR6602 | F-5 | | |
| | | | | VR6604 | B-3 | | |

Parts Location

| SC-BOARD (COMPONENT SIDE) | | | | | | | |
|---------------------------|-----|---------------|-----|---------|-----|-------|-----|
| IC | | PHOTO COUPLER | | Q6571 | G-3 | Q6801 | A-3 |
| IC6471 | B-5 | PC6480 | B-4 | Q6572 | G-3 | Q6803 | B-3 |
| IC6472 | B-4 | PC6701 | A-4 | Q6573 | F-3 | Q6805 | B-5 |
| IC6481 | G-3 | PC6702 | B-4 | Q6574 | F-3 | Q6806 | B-5 |
| IC6500 | G-4 | PC6703 | B-4 | Q6581 | E-1 | Q6821 | C-3 |
| IC6501 | F-4 | PC6704 | A-4 | Q6601 | E-5 | Q6822 | C-3 |
| IC6521 | F-1 | PC6705 | C-4 | Q6602 | D-5 | Q6824 | D-3 |
| IC6561 | B-1 | PC6801 | B-3 | Q6603 | D-5 | Q6841 | C-4 |
| IC6562 | C-1 | PC6861 | B-4 | Q6621 | E-5 | Q6842 | C-4 |
| IC6581 | E-1 | PC6871 | A-2 | Q6622 | F-5 | Q6881 | H-3 |
| IC6671 | C-5 | | | Q6623 | G-5 | Q6882 | H-3 |
| IC6721 | A-5 | | | Q6624 | H-5 | Q6883 | H-3 |
| IC6722 | A-5 | TRANSISTOR | | Q6641 | E-5 | | |
| IC6724 | B-5 | Q6401 | E-4 | Q6642 | F-5 | | |
| IC6725 | B-5 | Q6402 | E-4 | Q6643 | F-5 | | |
| IC6752 | D-4 | Q6403 | D-4 | Q6645 | F-5 | | |
| IC6771 | C-4 | Q6404 | D-4 | Q6646 | G-5 | | |
| IC6772 | D-5 | Q6421 | H-4 | Q6647 | G-5 | | |
| IC6773 | C-5 | Q6422 | H-4 | Q6648 | H-5 | | |
| IC6774 | C-5 | Q6423 | G-4 | Q6649 | H-5 | | |
| IC6791 | C-1 | Q6424 | G-4 | Q6651 | I-5 | | |
| IC6801 | B-3 | Q6441 | E-2 | Q6661 | C-4 | | |
| IC6802 | B-3 | Q6442 | E-2 | Q6662 | D-5 | | |
| IC6803 | B-3 | Q6443 | D-2 | Q6665 | C-5 | | |
| IC6821 | C-3 | Q6451 | F-2 | Q6671 | C-4 | | |
| IC6841 | C-4 | Q6452 | F-2 | Q6672 | C-5 | | |
| IC6861 | B-5 | Q6453 | E-2 | Q6673 | C-5 | | |
| IC6871 | A-2 | Q6500 | G-3 | Q6674 | C-5 | | |
| IC6881 | H-4 | Q6501 | E-4 | Q6679 | C-5 | | |
| | | Q6502 | F-4 | Q6680 | C-5 | | |
| | | Q6521 | F-4 | Q6690 | B-5 | | |
| | | Q6522 | G-4 | Q6742 | A-4 | | |
| | | Q6531 | E-2 | Q6743 | B-5 | | |
| | | Q6532 | E-2 | Q6763 | E-4 | | |
| | | Q6551 | F-2 | Q6781 | E-5 | | |
| | | Q6552 | F-2 | Q6782 | E-5 | | |
| | | Q6561 | G-3 | Q6791 | A-2 | | |
| | | Q6562 | G-3 | | | | |
| | | | | TP | | | |
| | | | | TP15V | A-3 | | |
| | | | | TPSC1 | C-5 | | |
| | | | | TPSOS6 | I-4 | | |
| | | | | TPSOS7 | A-3 | | |
| | | | | TPVAD | B-3 | | |
| | | | | TPVBK | G-3 | | |
| | | | | TPVSCN | B-4 | | |
| | | | | TPVSET | D-4 | | |
| | | | | TPVSET2 | B-4 | | |
| | | | | TPVSUS | H-2 | | |
| | | | | VOLUME | | | |
| | | | | VR6600 | B-3 | | |
| | | | | VR6602 | C-5 | | |
| | | | | VR6604 | H-3 | | |

SC-BOARD (COMPONENT SIDE) TNPA4186

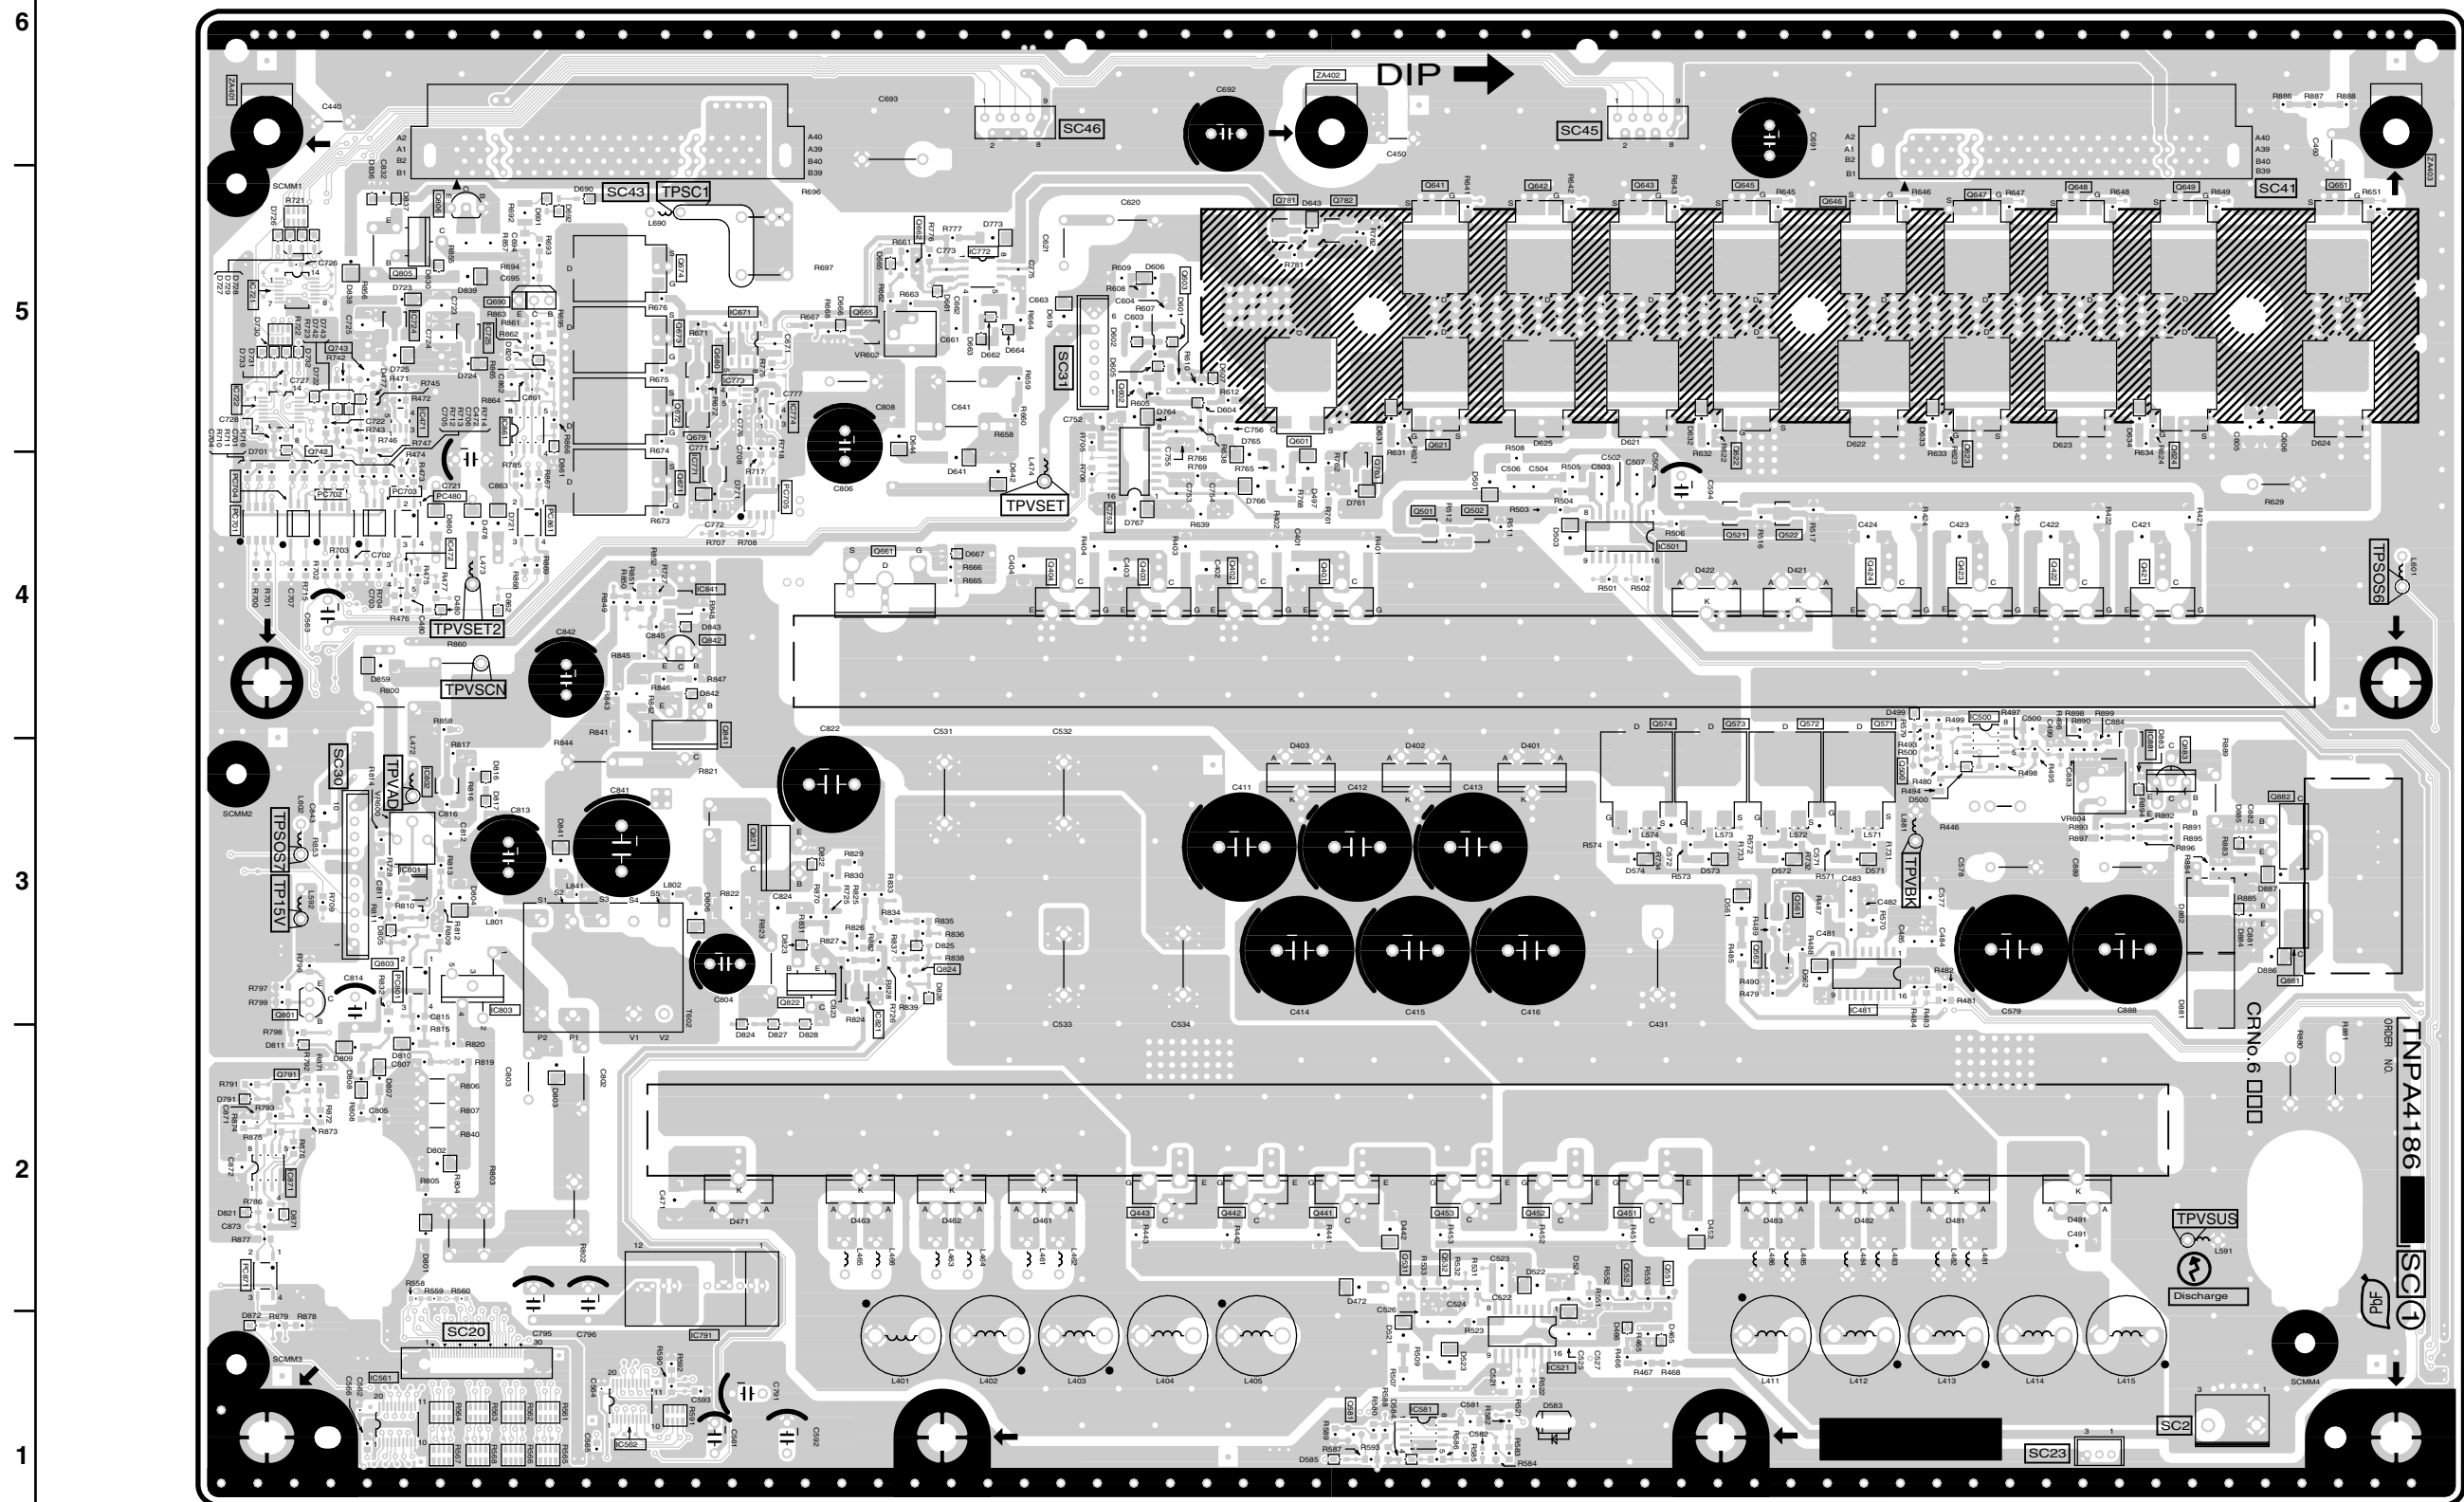

TH-50PV700AZ/H/M/MR
SC-BOARD TNPA4186

TH-50PV700AZ/H/M/MR
SC-BOARD TNPA4186


A B C D E F G H I

14.10. SU-Board


6
5
4
3
2
1

Parts Location


| SU-BOARD | |
|-------------------|-----|
| IC | |
| IC6901 | H-2 |
| IC6902 | G-2 |
| IC6903 | E-2 |
| IC6904 | D-2 |
| IC6905 | C-2 |
| IC6906 | B-2 |
| IC6910 | C-2 |
| IC6911 | B-2 |
| TEST POINT | |
| TPSU1 | D-2 |
| TPSU2 | F-2 |
| TPSU3 | D-1 |
| TPSU4 | F-1 |

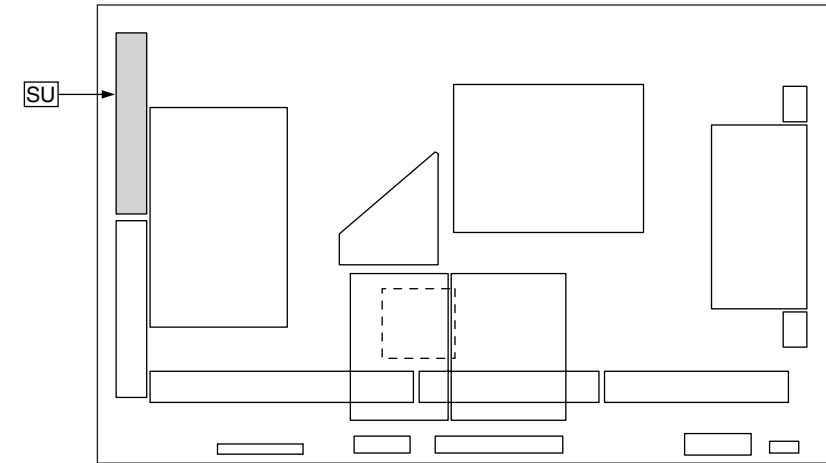

**SU-BOARD (FOIL SIDE)
TNPA4188**

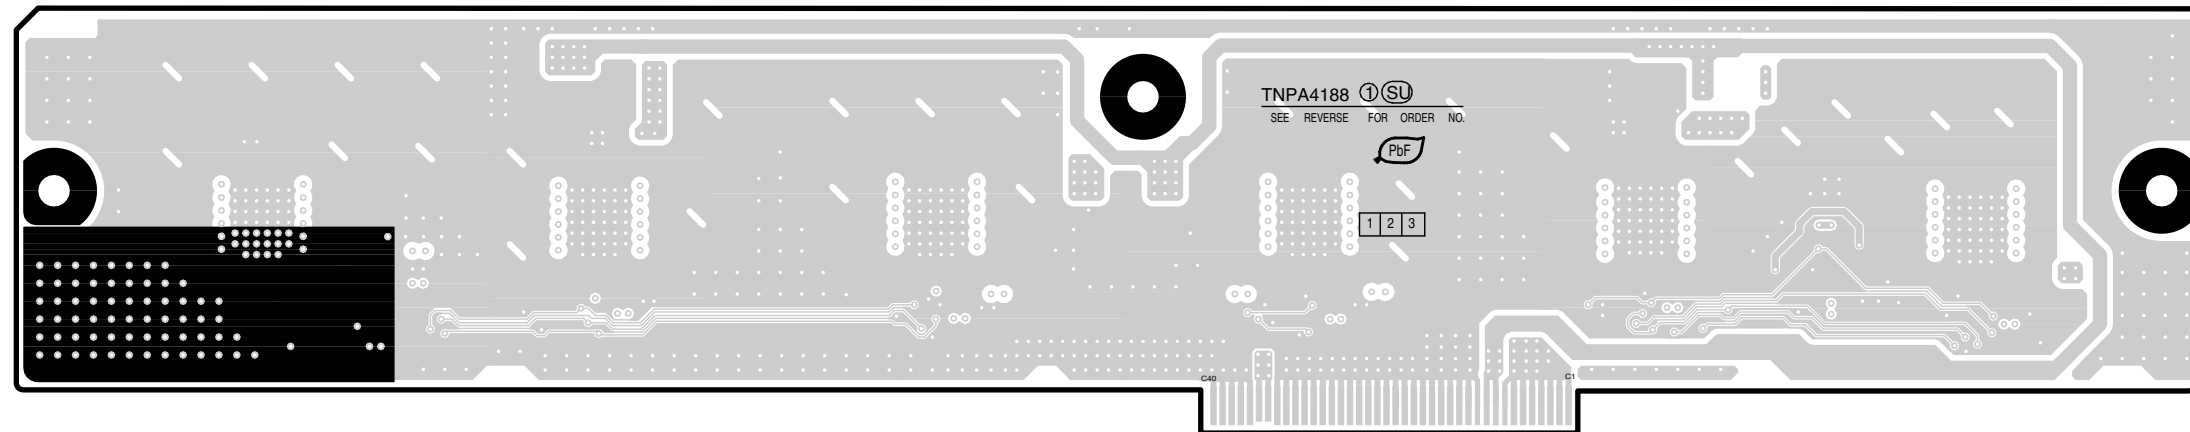

**SU-BOARD (COMPONENT SIDE)
TNPA4188**

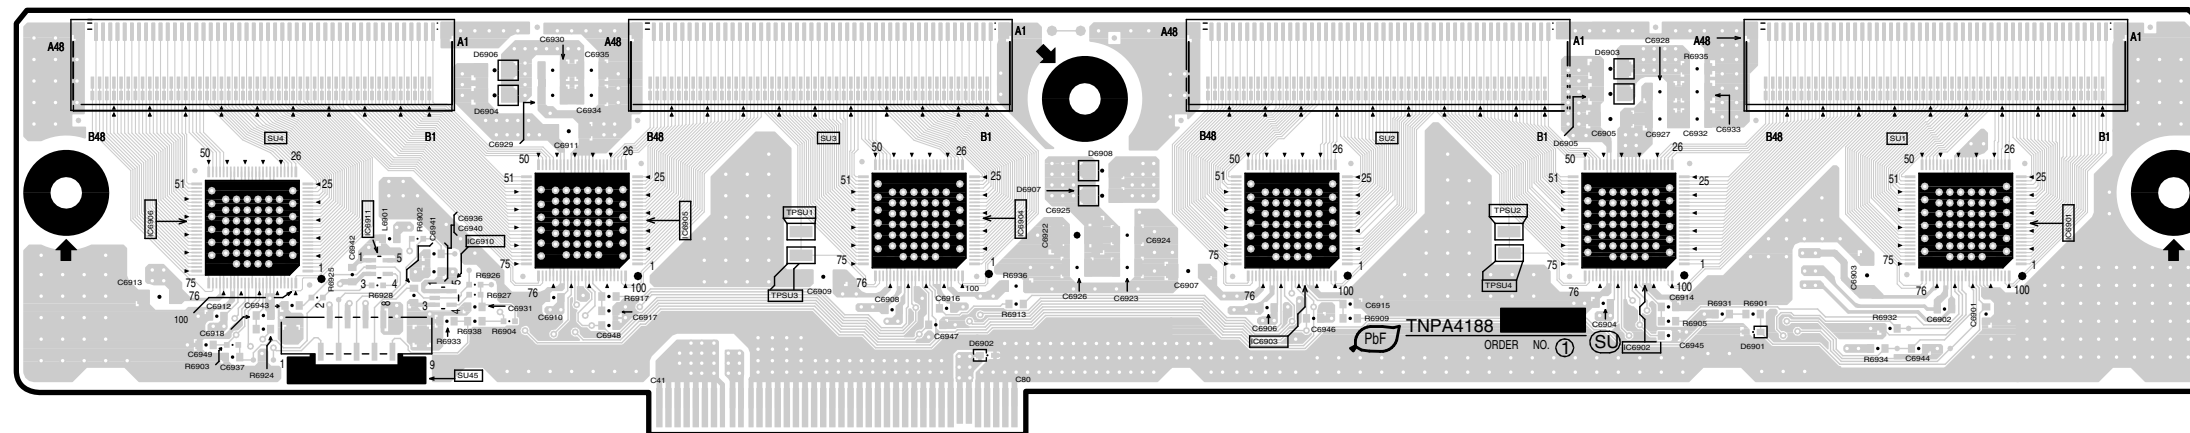

TH-50PV700AZ/H/M/MR
SU-BOARD TNPA4188

TH-50PV700AZ/H/M/MR
SU-BOARD TNPA4188


A B C D E F G H I

14.11. SD-Board


6
5
4
3
2
1
A B C D E F G H I

Parts Location


| SD-BOARD | |
|-------------------|-----|
| IC | |
| IC6951 | H-2 |
| IC6952 | G-2 |
| IC6953 | F-2 |
| IC6954 | D-2 |
| IC6955 | C-2 |
| IC6956 | B-2 |
| IC6960 | G-2 |
| IC6961 | G-1 |
| TEST POINT | |
| TPSD1 | D-2 |
| TPSD2 | F-2 |
| TPSD3 | D-1 |
| TPSD4 | F-1 |

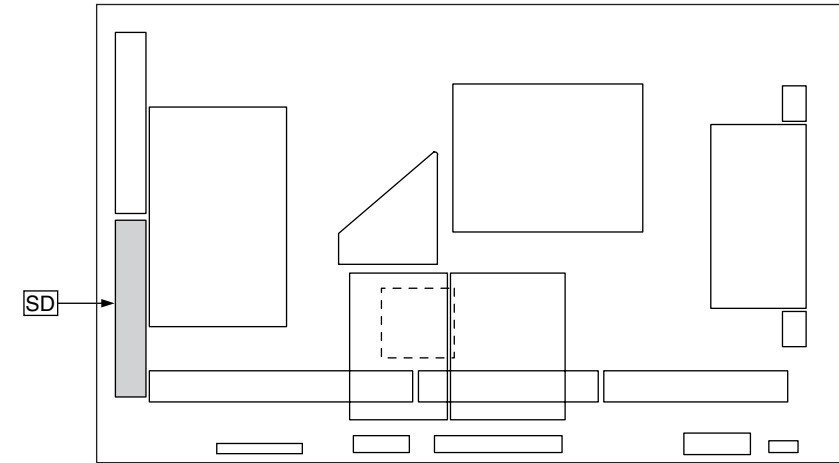

SD-BOARD (FOIL SIDE)
TNPA4189

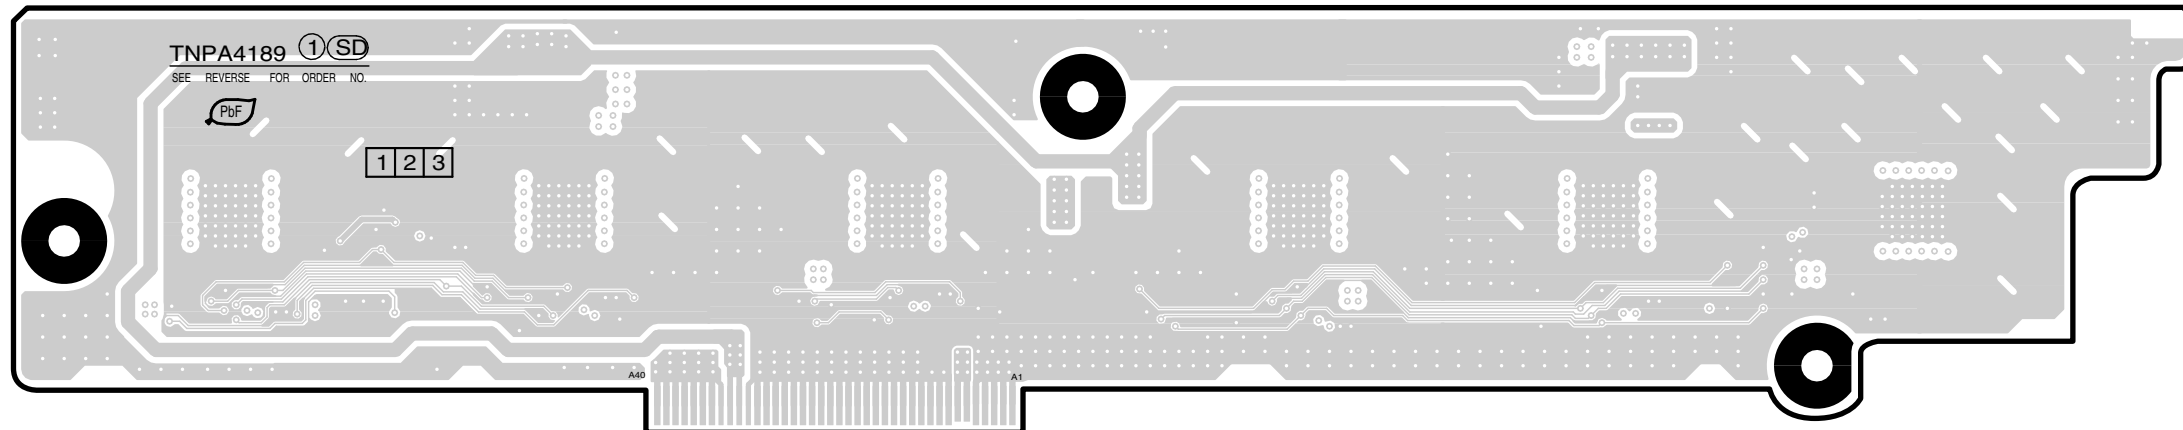

SD-BOARD (COMPONENT SIDE)
TNPA4189

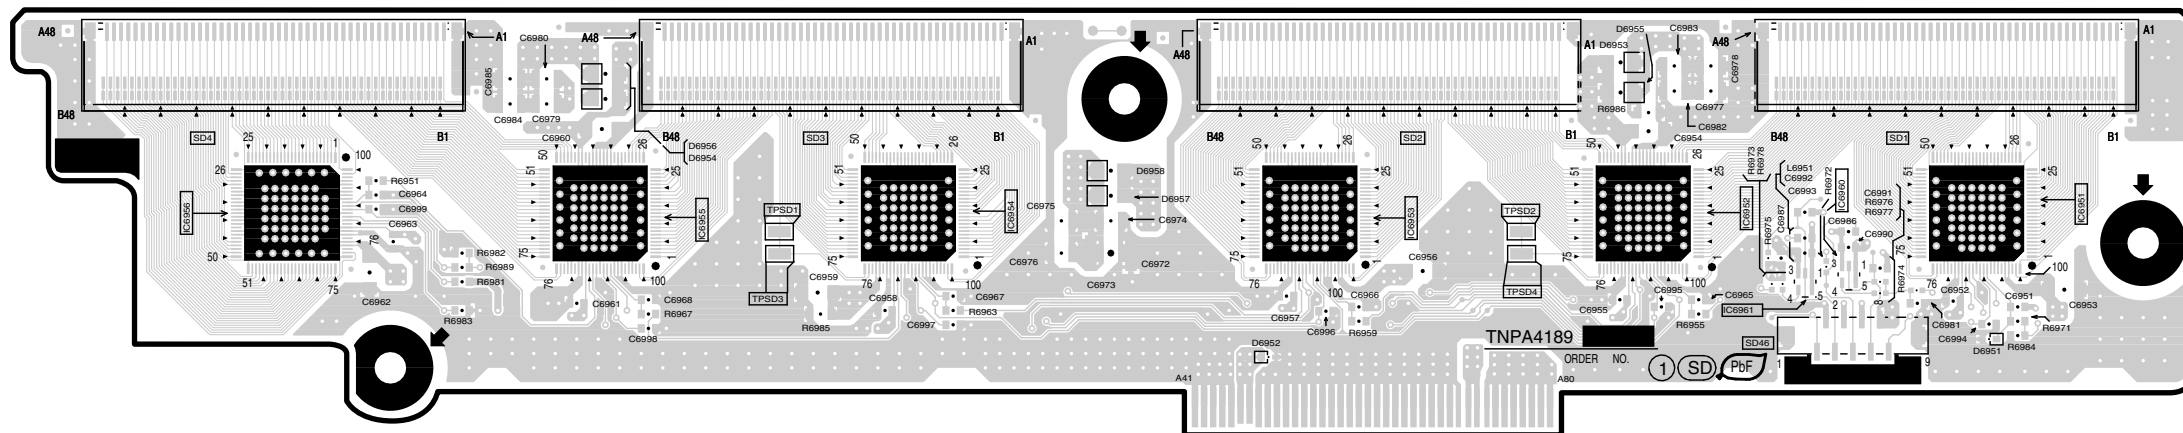


TH-50PV700AZ/H/M/MR
SD-BOARD TNPA4189

TH-50PV700AZ/H/M/MR
SD-BOARD TNPA4189


14.12. SS-Board

Parts Location

| SS-BOARD (FOIL SIDE) | | | | | | | |
|----------------------|-----|------|-----|-------|-----|--------|-----|
| TRANSISTOR | | TP | | TP19 | H-4 | VOLUME | |
| Q6001 | C-2 | TP1 | B-4 | TP20 | H-4 | VR6000 | H-2 |
| Q6002 | C-2 | TP2 | B-4 | TP21 | H-4 | | |
| Q6003 | C-2 | TP3 | B-4 | TP22 | H-4 | | |
| Q6004 | B-2 | TP4 | B-4 | TP24 | H-1 | | |
| Q6021 | G-2 | TP5 | B-4 | TP25 | G-1 | | |
| Q6022 | F-2 | TP6 | B-4 | TP26 | F-1 | | |
| Q6023 | F-2 | TP7 | B-4 | TP27 | E-1 | | |
| Q6024 | E-2 | TP8 | B-4 | TP28 | D-1 | | |
| Q6041 | D-3 | TP9 | A-4 | TP29 | D-1 | | |
| Q6042 | D-3 | TP10 | C-4 | TP30 | C-1 | | |
| Q6043 | C-3 | TP11 | C-4 | TP31 | B-1 | | |
| Q6051 | D-3 | TP12 | H-3 | TP33 | H-4 | | |
| Q6052 | E-3 | TP13 | H-4 | TP34 | H-4 | | |
| Q6053 | E-3 | TP14 | H-4 | TP036 | G-1 | | |
| Q6222 | H-2 | TP15 | H-4 | TPVe2 | F-4 | | |
| Q6256 | H-1 | TP16 | H-4 | | | | |
| | | TP17 | H-4 | | | | |
| | | TP18 | H-4 | | | | |

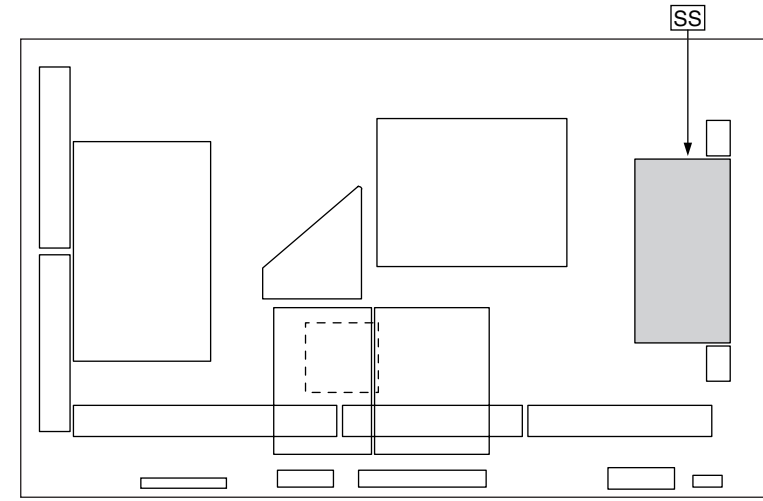

SS-BOARD (FOIL SIDE) TNPA4187

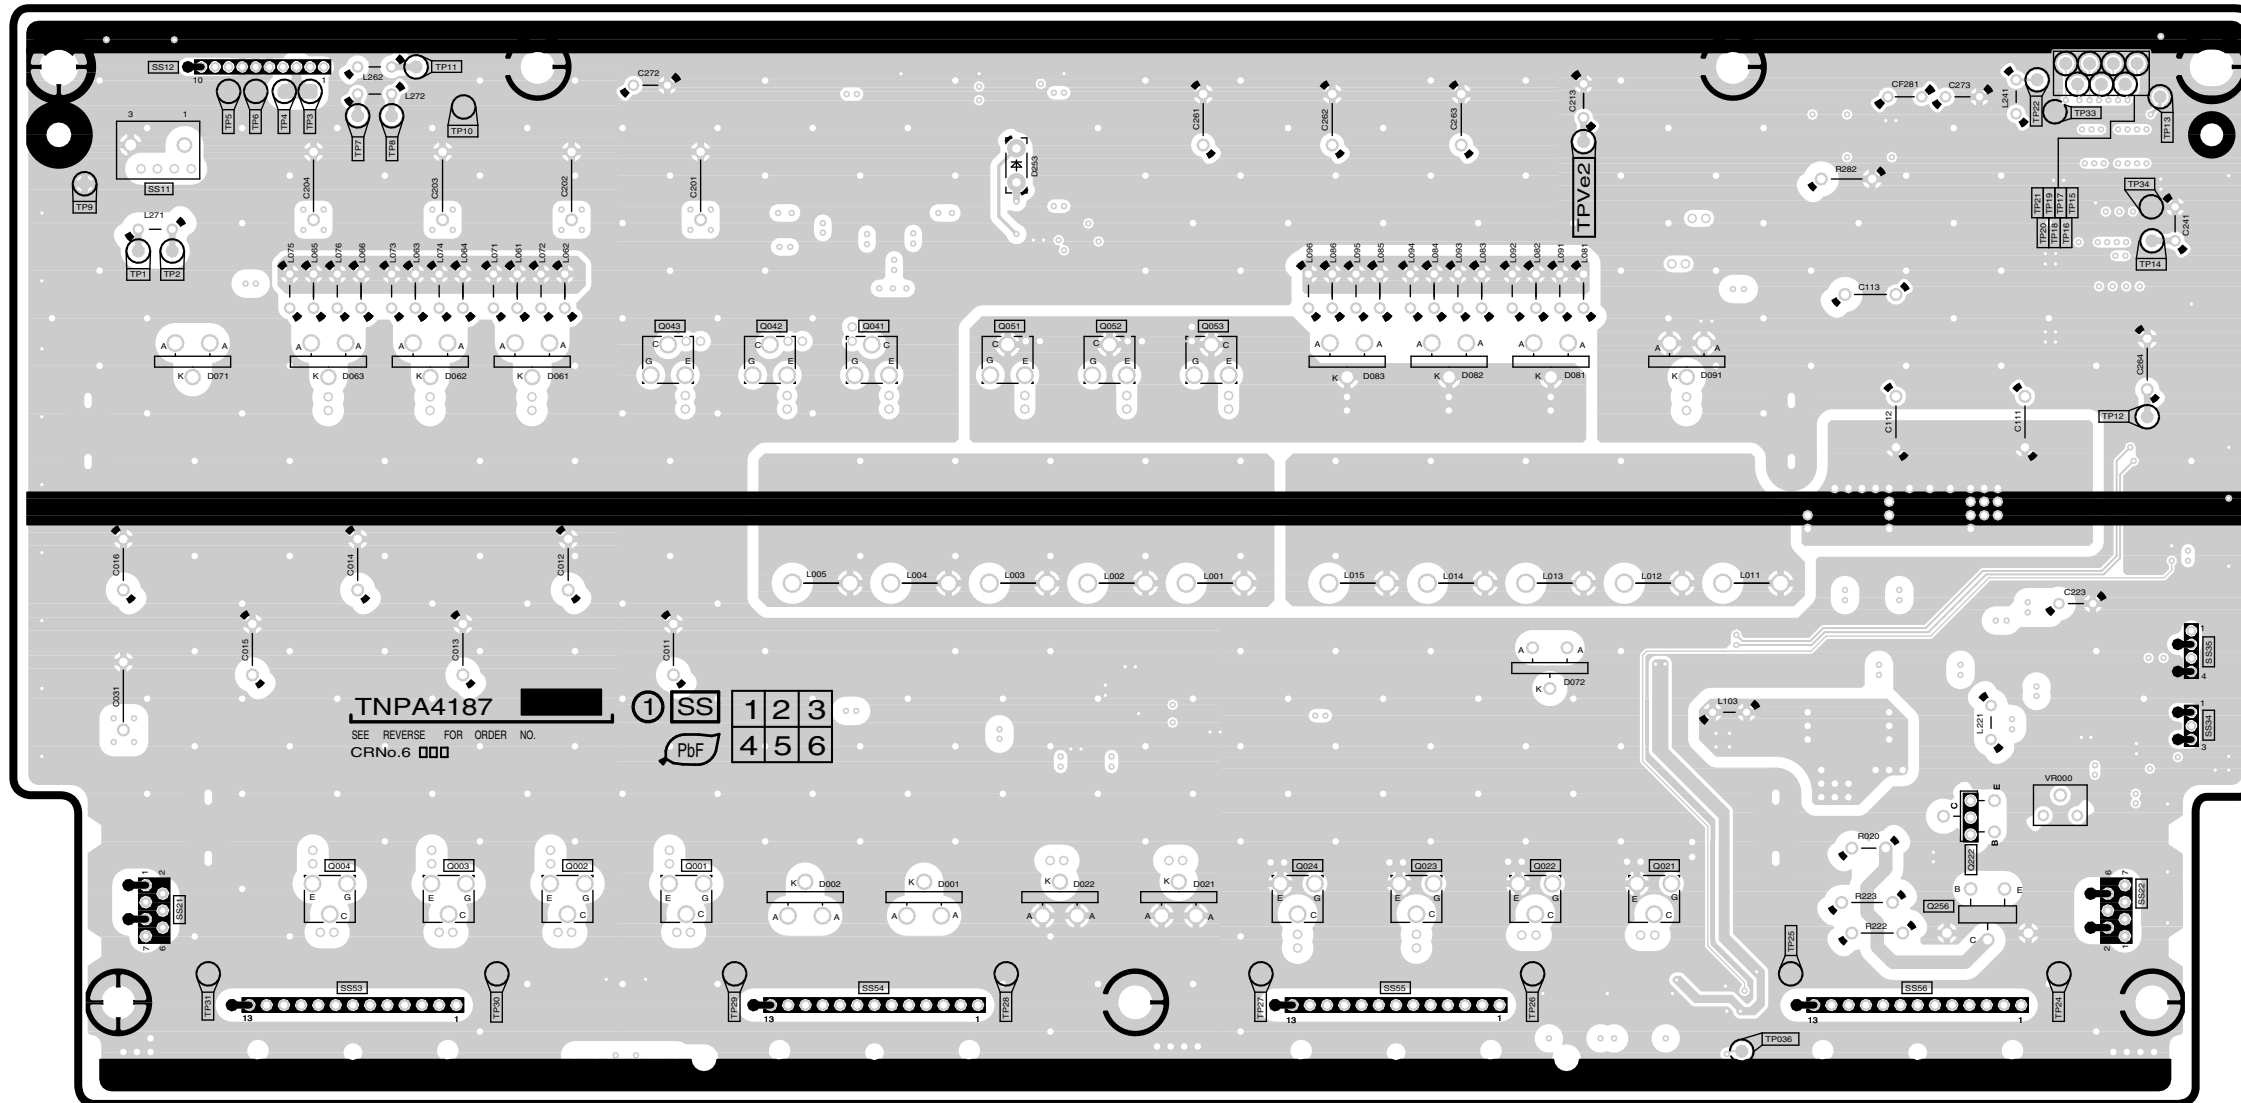


TH-50PV700AZ/H/M/MR
SS-BOARD TNPA4187

TH-50PV700AZ/H/M/MR
SS-BOARD TNPA4187


A B C D E F G H I

Parts Location

| SS-BOARD (COMPONENT SIDE) | | | | | | | | | |
|---------------------------|------------|-------|-----|-------|-----|-------|-----|--------|-----|
| IC | TRANSISTOR | | | | | | TP | | |
| IC6131 | E-2 | Q6001 | F-2 | Q6101 | B-2 | Q6171 | F-4 | TPSOS8 | B-4 |
| IC6151 | F-4 | Q6002 | G-2 | Q6102 | B-3 | Q6172 | F-4 | TPSS1 | C-2 |
| IC6191 | B-2 | Q6003 | G-2 | Q6103 | B-3 | Q6181 | F-4 | TPVDA | G-4 |
| IC6211 | B-4 | Q6004 | G-2 | Q6104 | B-2 | Q6222 | B-2 | TPVe | B-2 |
| IC6221 | B-2 | Q6021 | C-2 | Q6105 | C-2 | Q6251 | E-4 | TPVSUS | H-4 |
| IC6241 | B-4 | Q6022 | C-2 | Q6106 | C-2 | Q6256 | B-1 | | |
| IC6251 | E-4 | Q6023 | D-2 | Q6111 | C-4 | Q6271 | C-1 | | |
| IC6281 | B-4 | Q6024 | D-2 | Q6112 | B-4 | Q6281 | C-4 | | |
| | | Q6031 | F-4 | Q6113 | C-4 | Q6282 | C-4 | | |
| | | Q6041 | F-3 | Q6114 | B-3 | | | VOLUME | |
| | | Q6042 | F-3 | Q6115 | A-2 | | | VR6000 | B-2 |
| | | Q6043 | F-3 | Q6141 | F-2 | | | | |
| | | Q6051 | E-3 | Q6142 | F-2 | | | | |
| | | Q6052 | E-3 | Q6146 | D-2 | | | | |
| | | Q6053 | E-3 | Q6147 | E-2 | | | | |

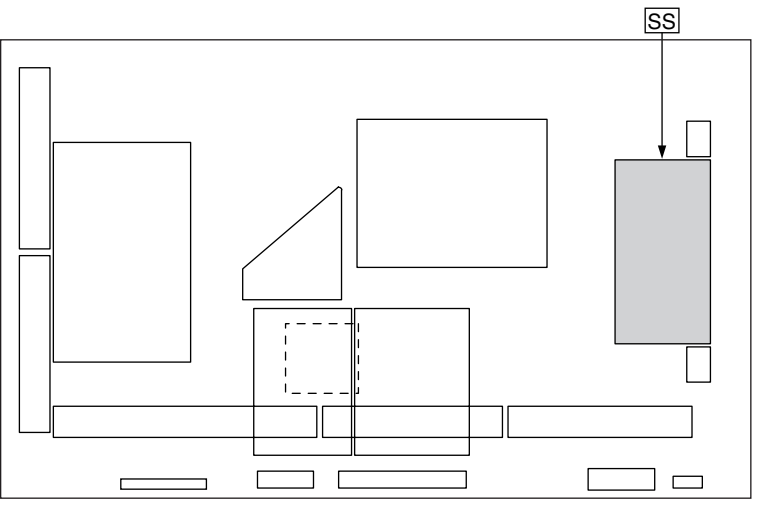

SS-BOARD (COMPONENT SIDE)
TNPA4187

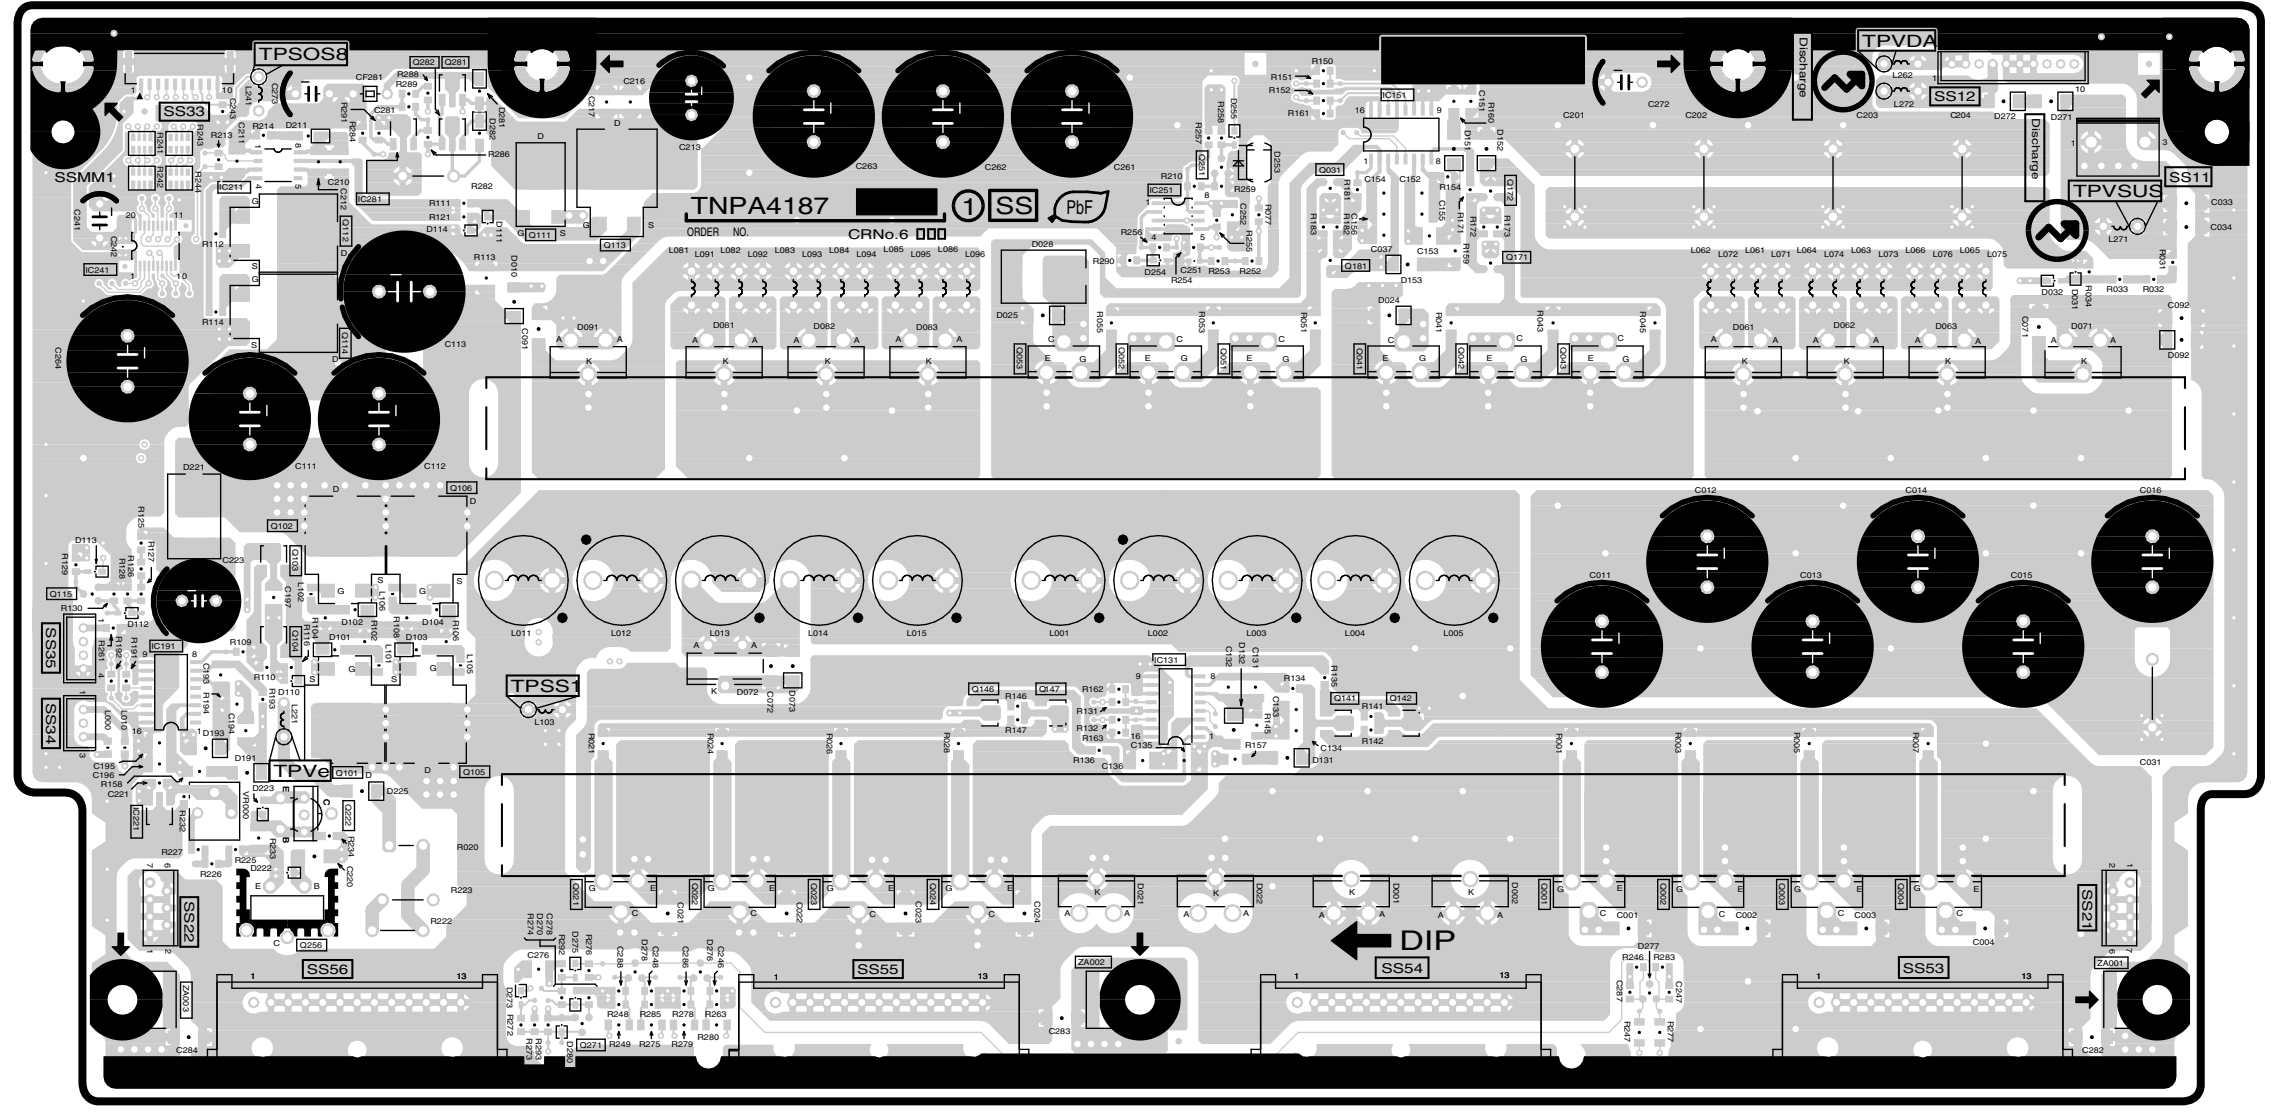

TH-50PV700AZ/H/M/MR
SS-BOARD TNPA4187

TH-50PV700AZ/H/M/MR
SS-BOARD TNPA4187


A B C D E F G H I

6
5
4
3
2
1



14.13. SS2 and SS3-Board

6
5
4
3
2
1


**SS2-BOARD (FOIL SIDE)
TNPA4202**

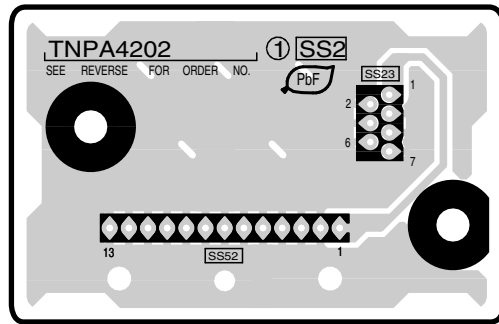


**SS2-BOARD (COMPONENT SIDE)
TNPA4202**

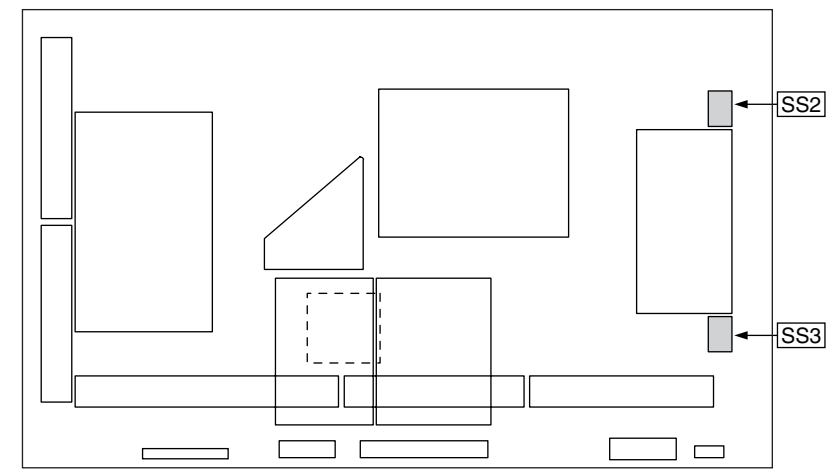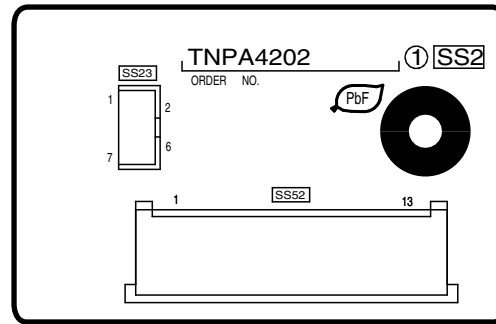

**SS3-BOARD (FOIL SIDE)
TNPA4203**

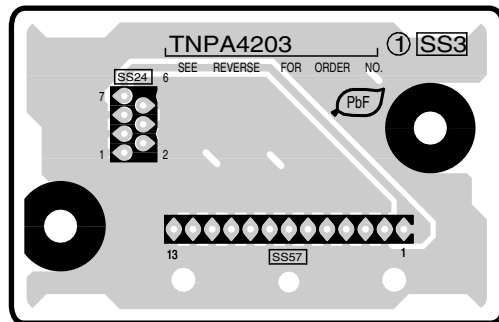

**SS3-BOARD (COMPONENT SIDE)
TNPA4203**

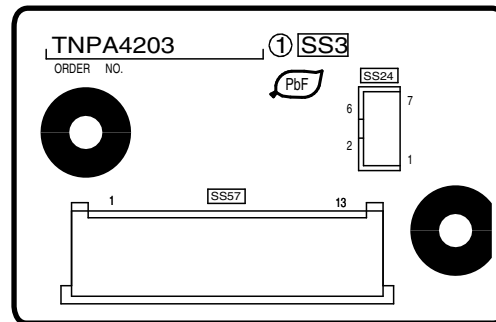


TH-50PV700AZ/H/M/MR
SS2-BOARD TNPA4202
SS3-BOARD TNPA4203


TH-50PV700AZ/H/M/MR
SS2-BOARD TNPA4202
SS3-BOARD TNPA4203

A B C D E F G H I

14.14. K and S-Board

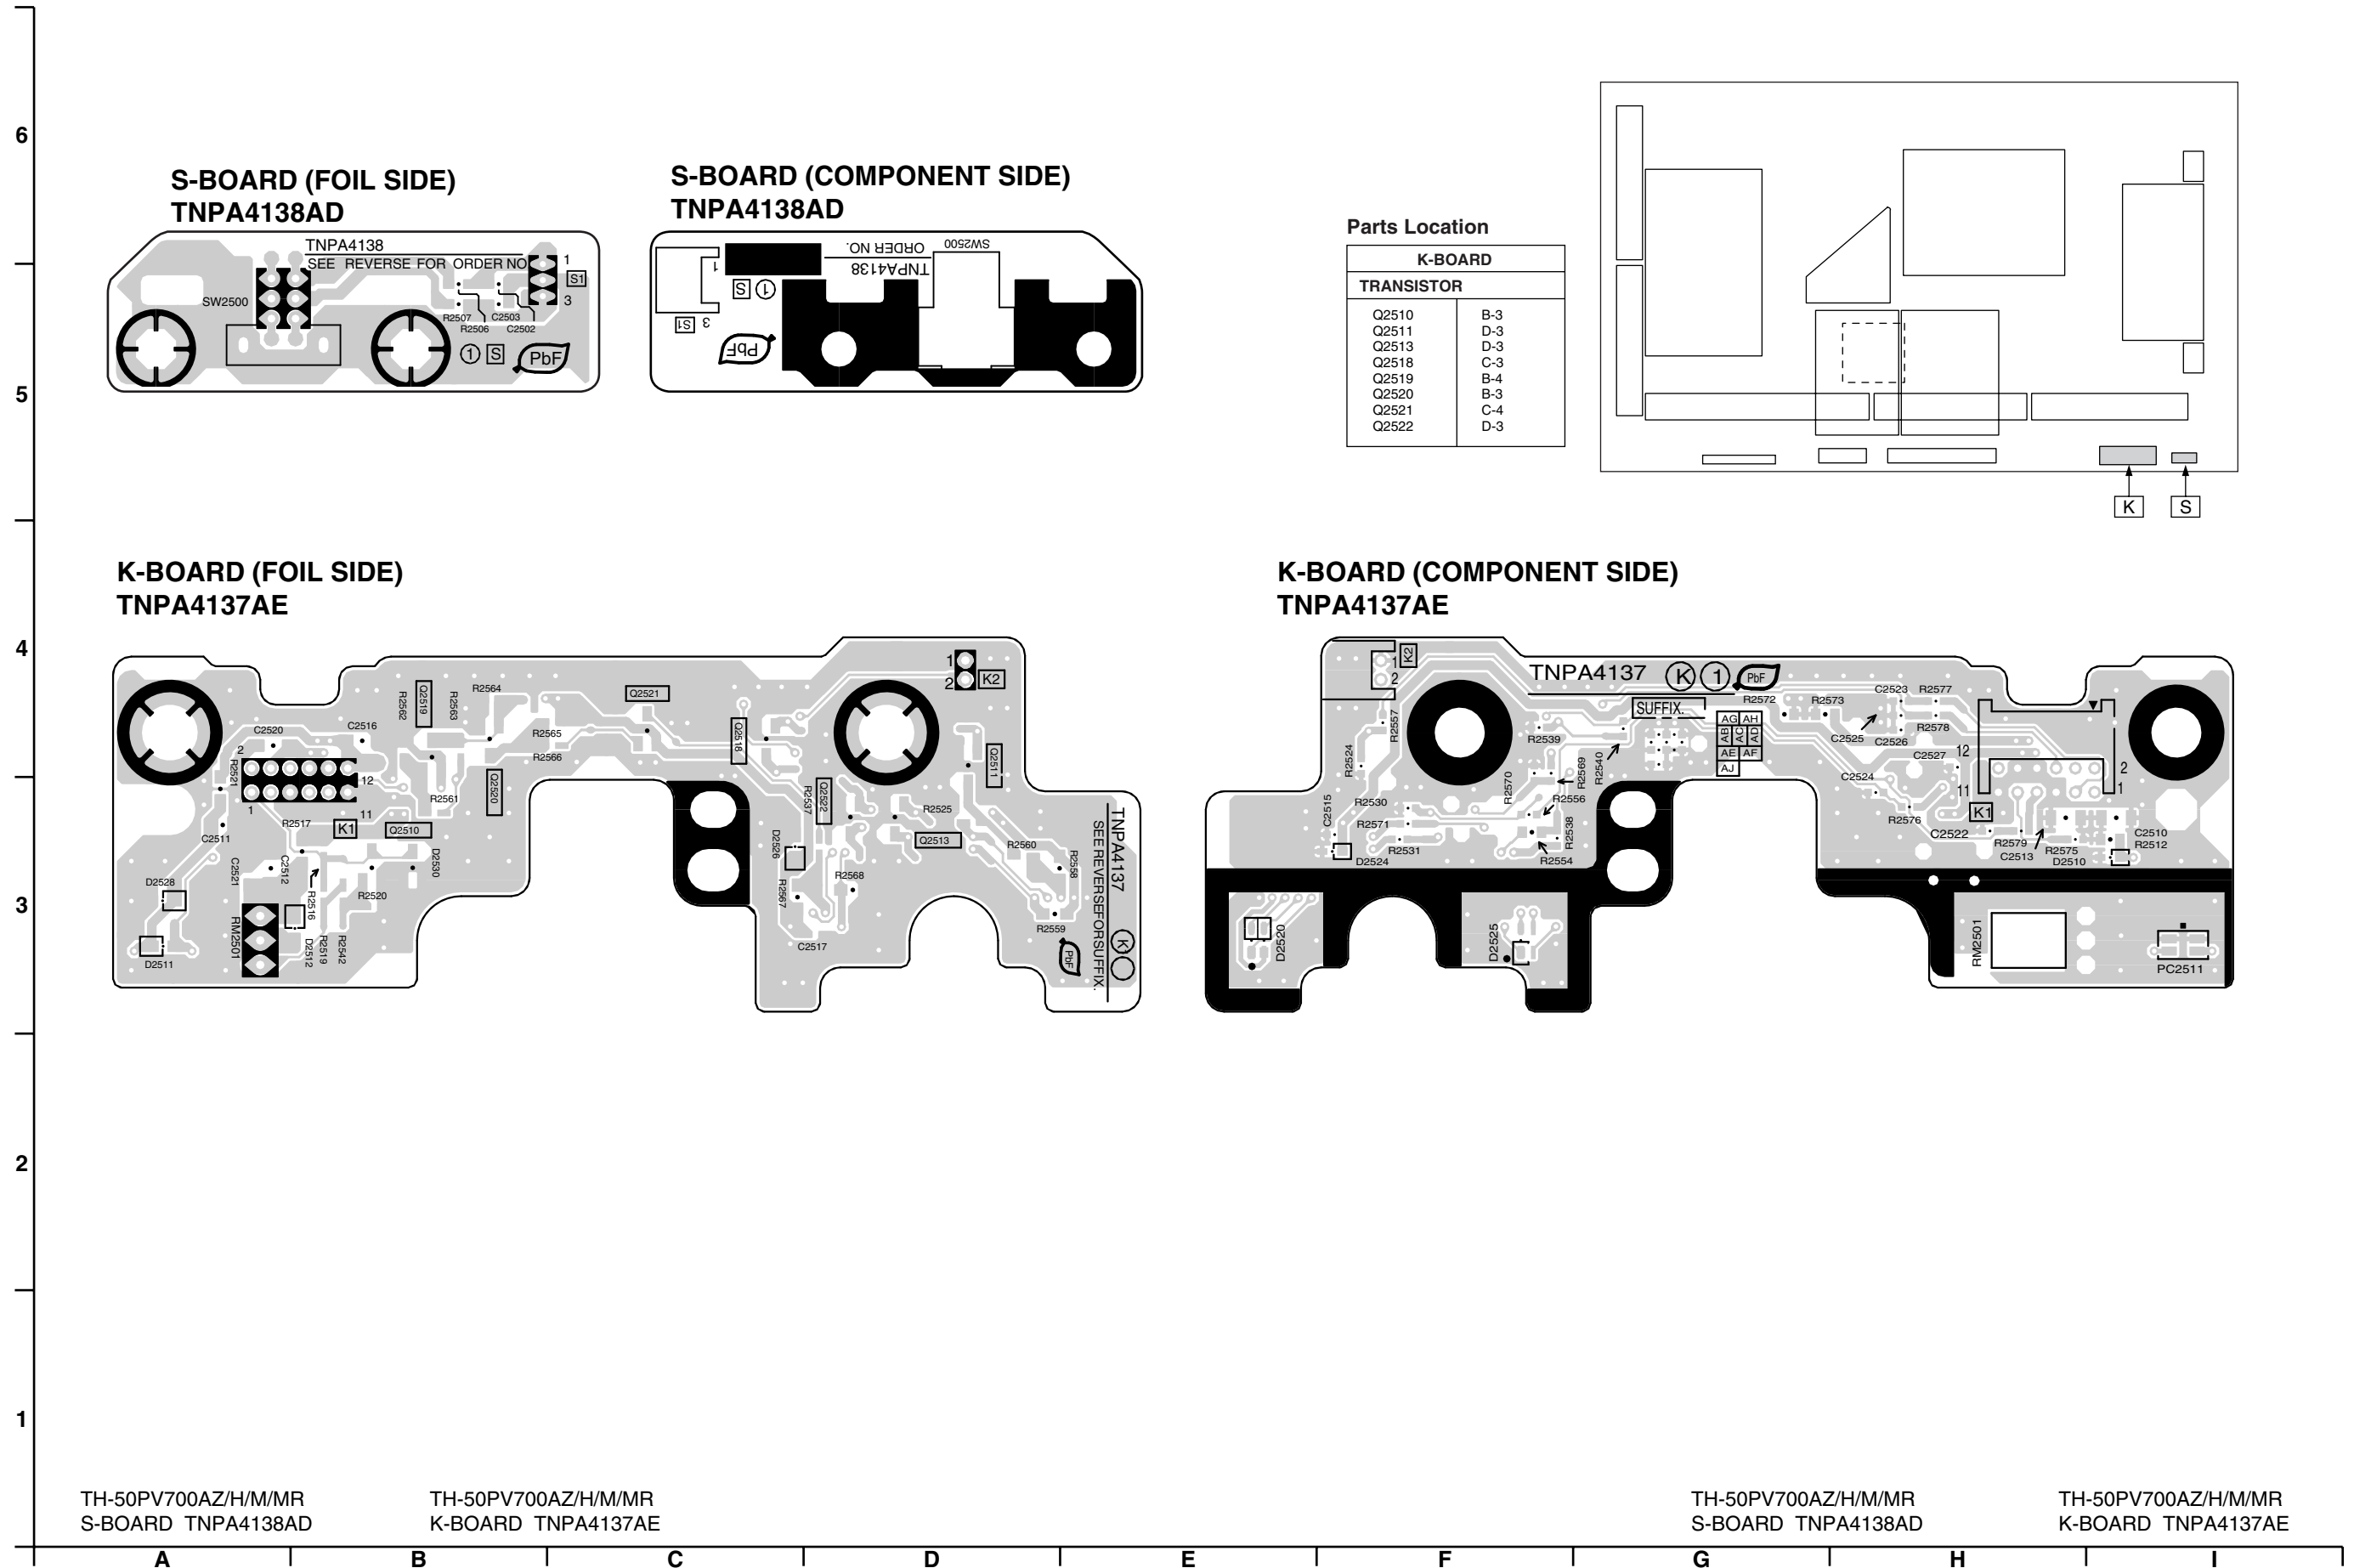


14.15. G-Board

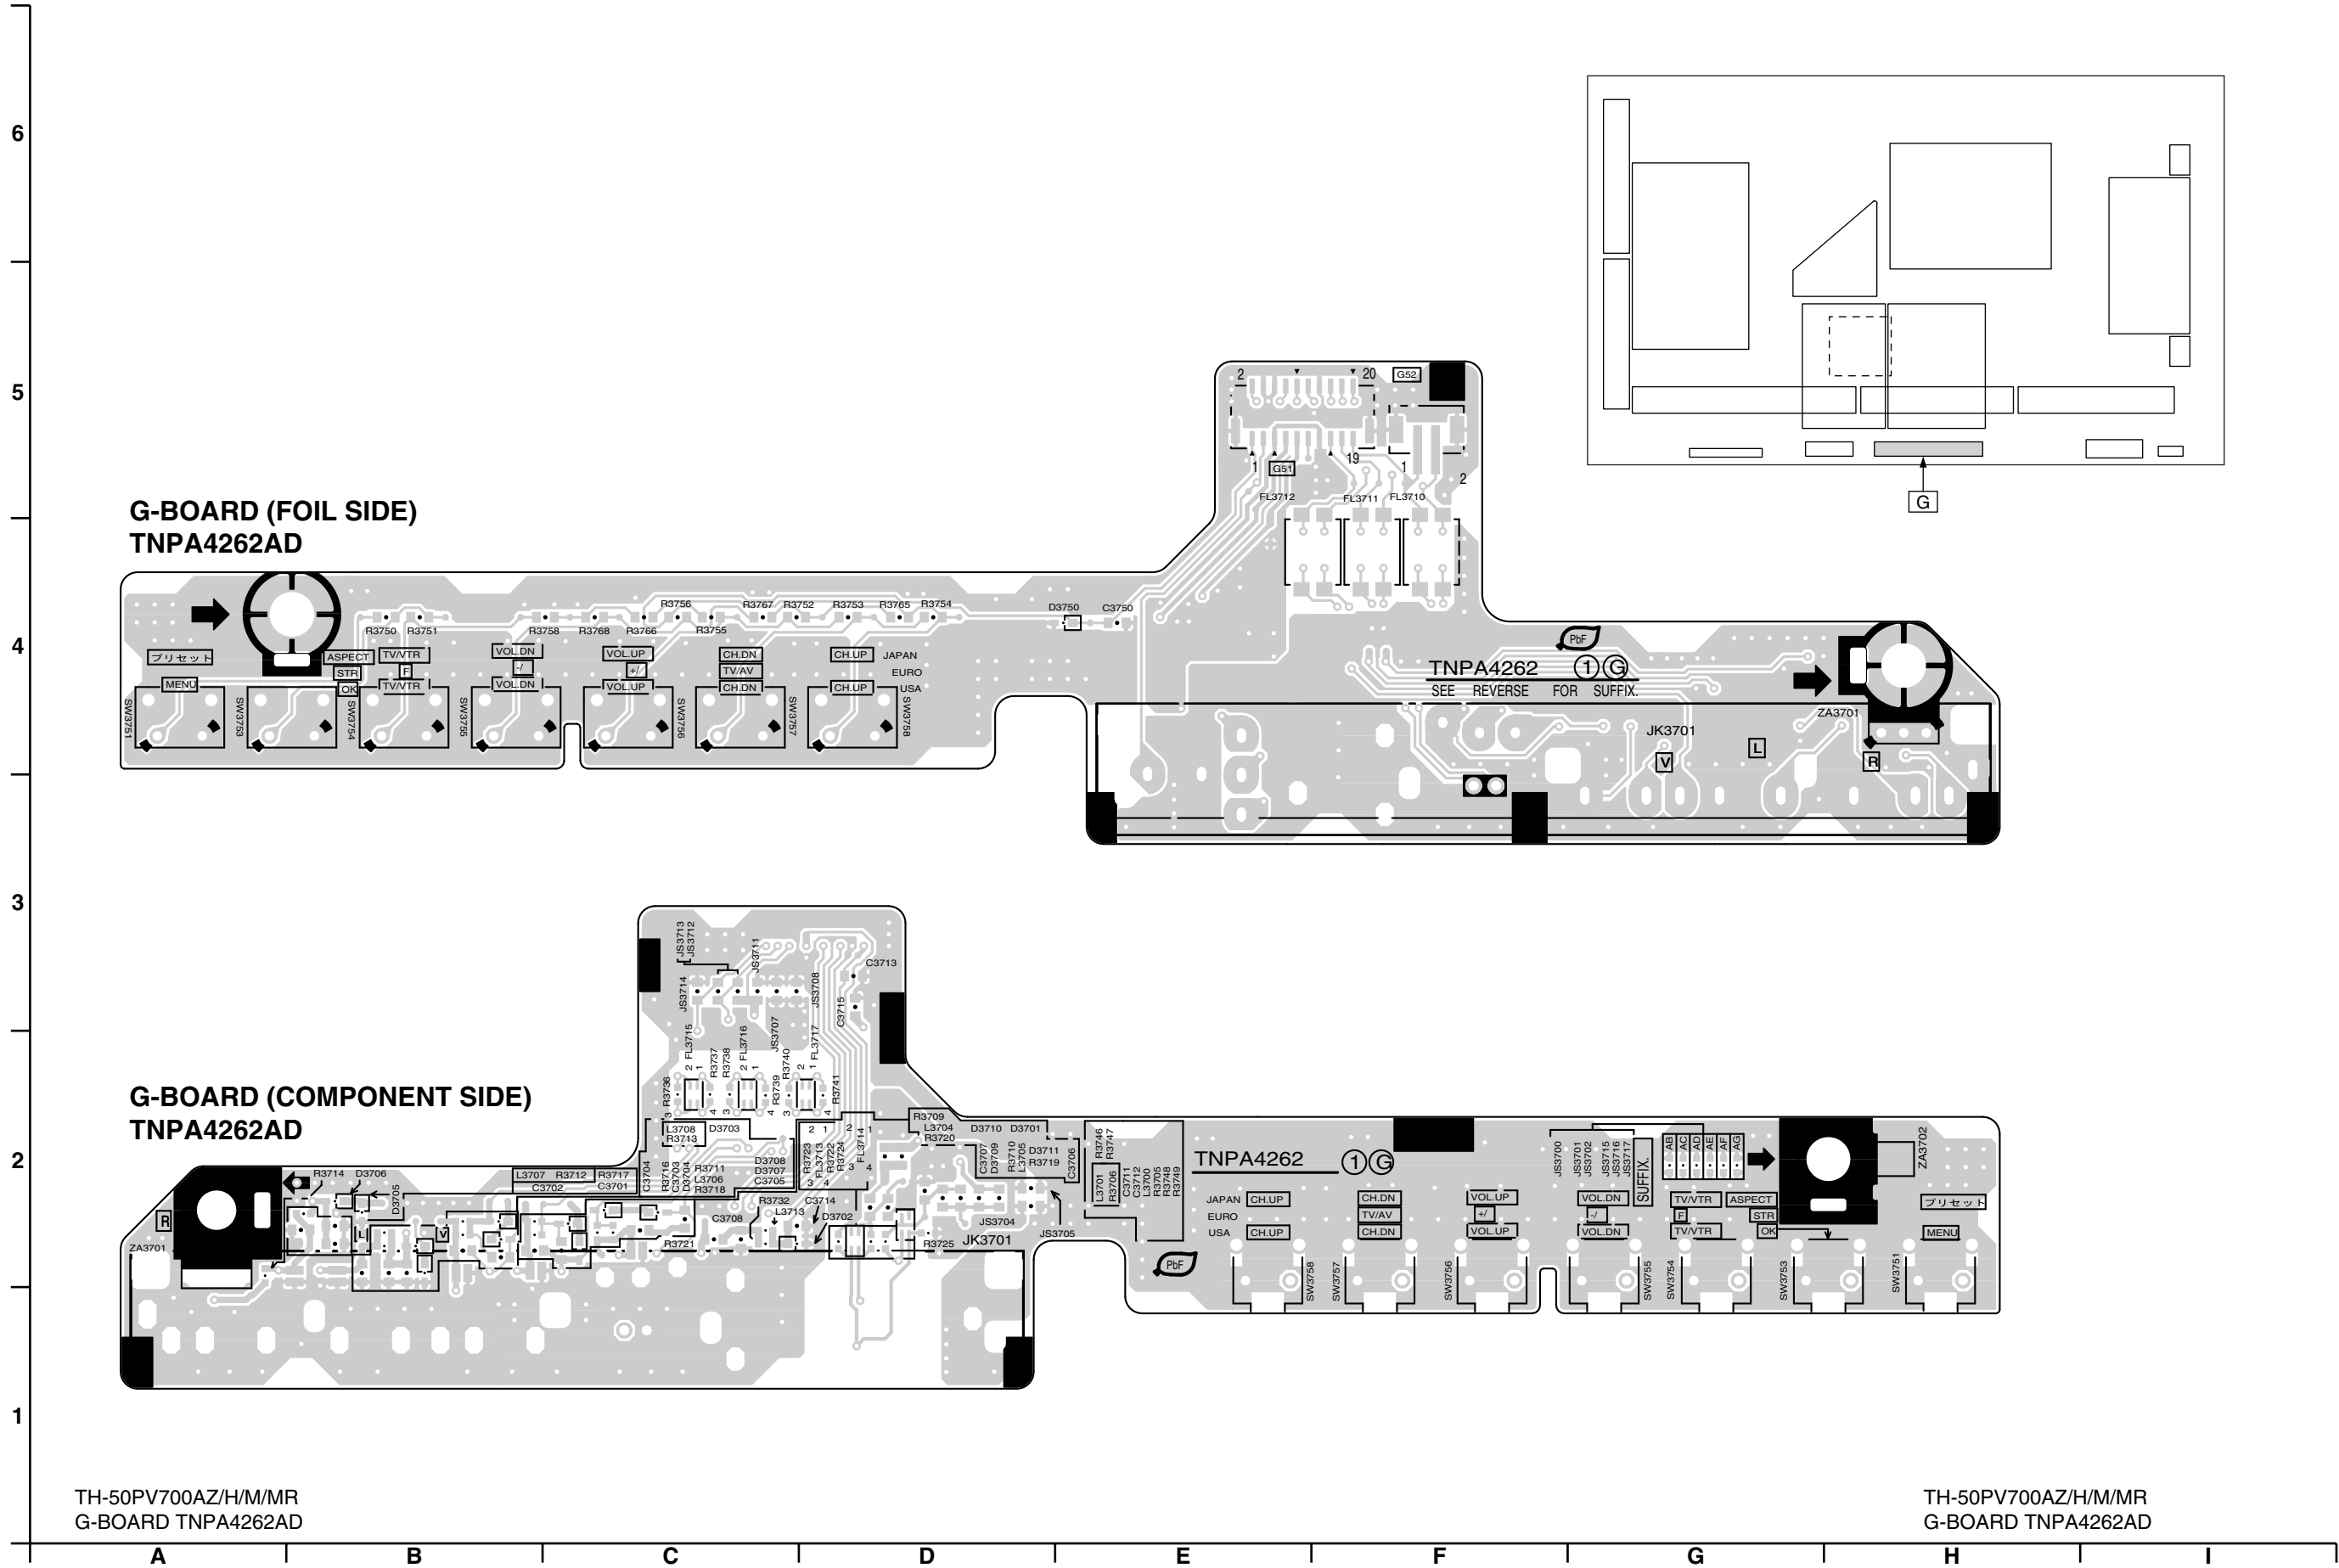

TH-50PV700AZ/H/M/MR
G-BOARD TNPA4262AD

TH-50PV700AZ/H/M/MR
G-BOARD TNPA4262AD

14.16. GH and GS-Board

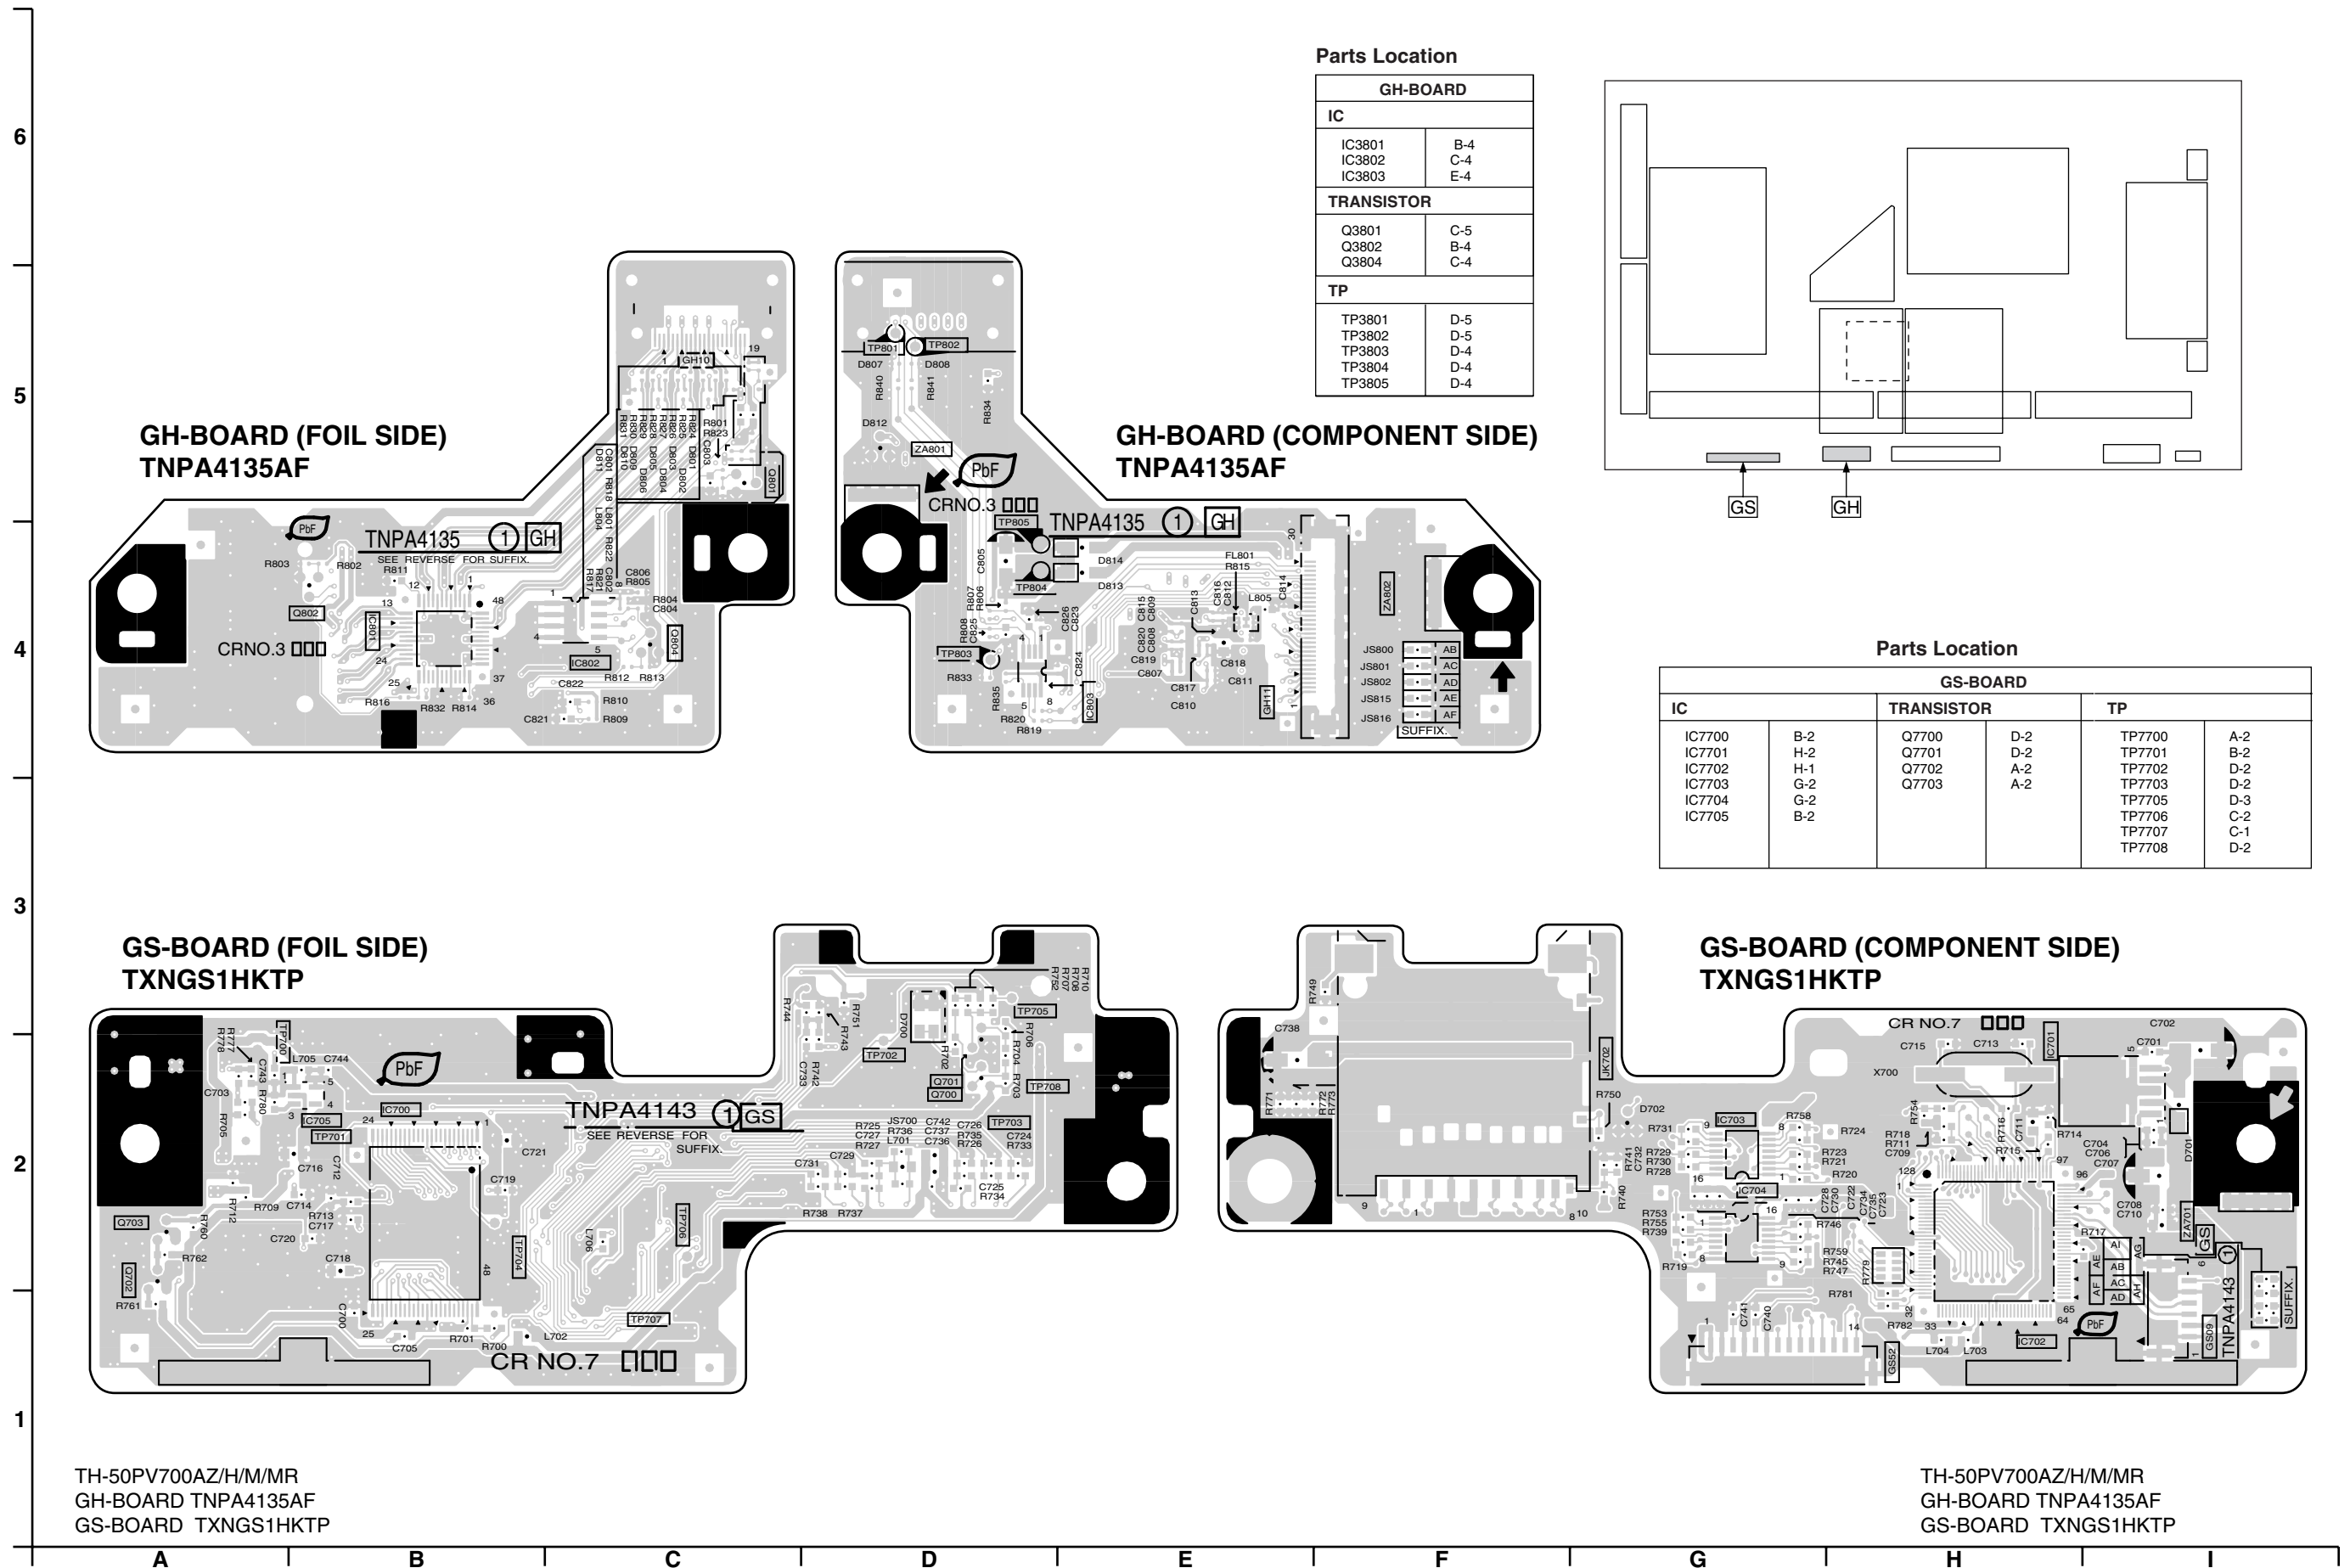

TH-50PV700AZ/H/M/MR
GH-BOARD TNPA4135AF
GS-BOARD TXNGS1HKTP

TH-50PV700AZ/H/M/MR
GH-BOARD TNPA4135AF
GS-BOARD TXNGS1HKTP

15 Schematic and Block Diagram

15.1. Schematic Diagram Note

Important Safety Notice

Components identified by \triangle mark have special characteristics important for safety.
When replacing any of these components, use only manufacture's specified parts.


Notes:

1. **Resistor**
Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
2. **Capacitor**
Unit of capacitance is μ F, unless otherwise noted.
3. Coil
Unit of inductance is H, unless otherwise noted.
4. Test Point
○ : Test Point position
5. Earth Symbol
⏏ : Chassis Earth (Cold) ⚡ : Line Earth (Hot)
6. Voltage Measurement
Voltage is measured by a DC voltmeter.
Conditions of the measurement are the following:
Power Source AC220-240V, 50/60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions
7. When arrow mark (↗) is found, connection is easily found from the direction of arrow.
8. Indicates the major signal flow. : Video ➡ Audio ⇔
9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.
All circuits, except the Power Circuit, are cold.
Precautions
 - a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
 - b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
 - c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
 - d. Make sure to disconnect the power plug before removing the chassis.


15.2. Main Block Diagram

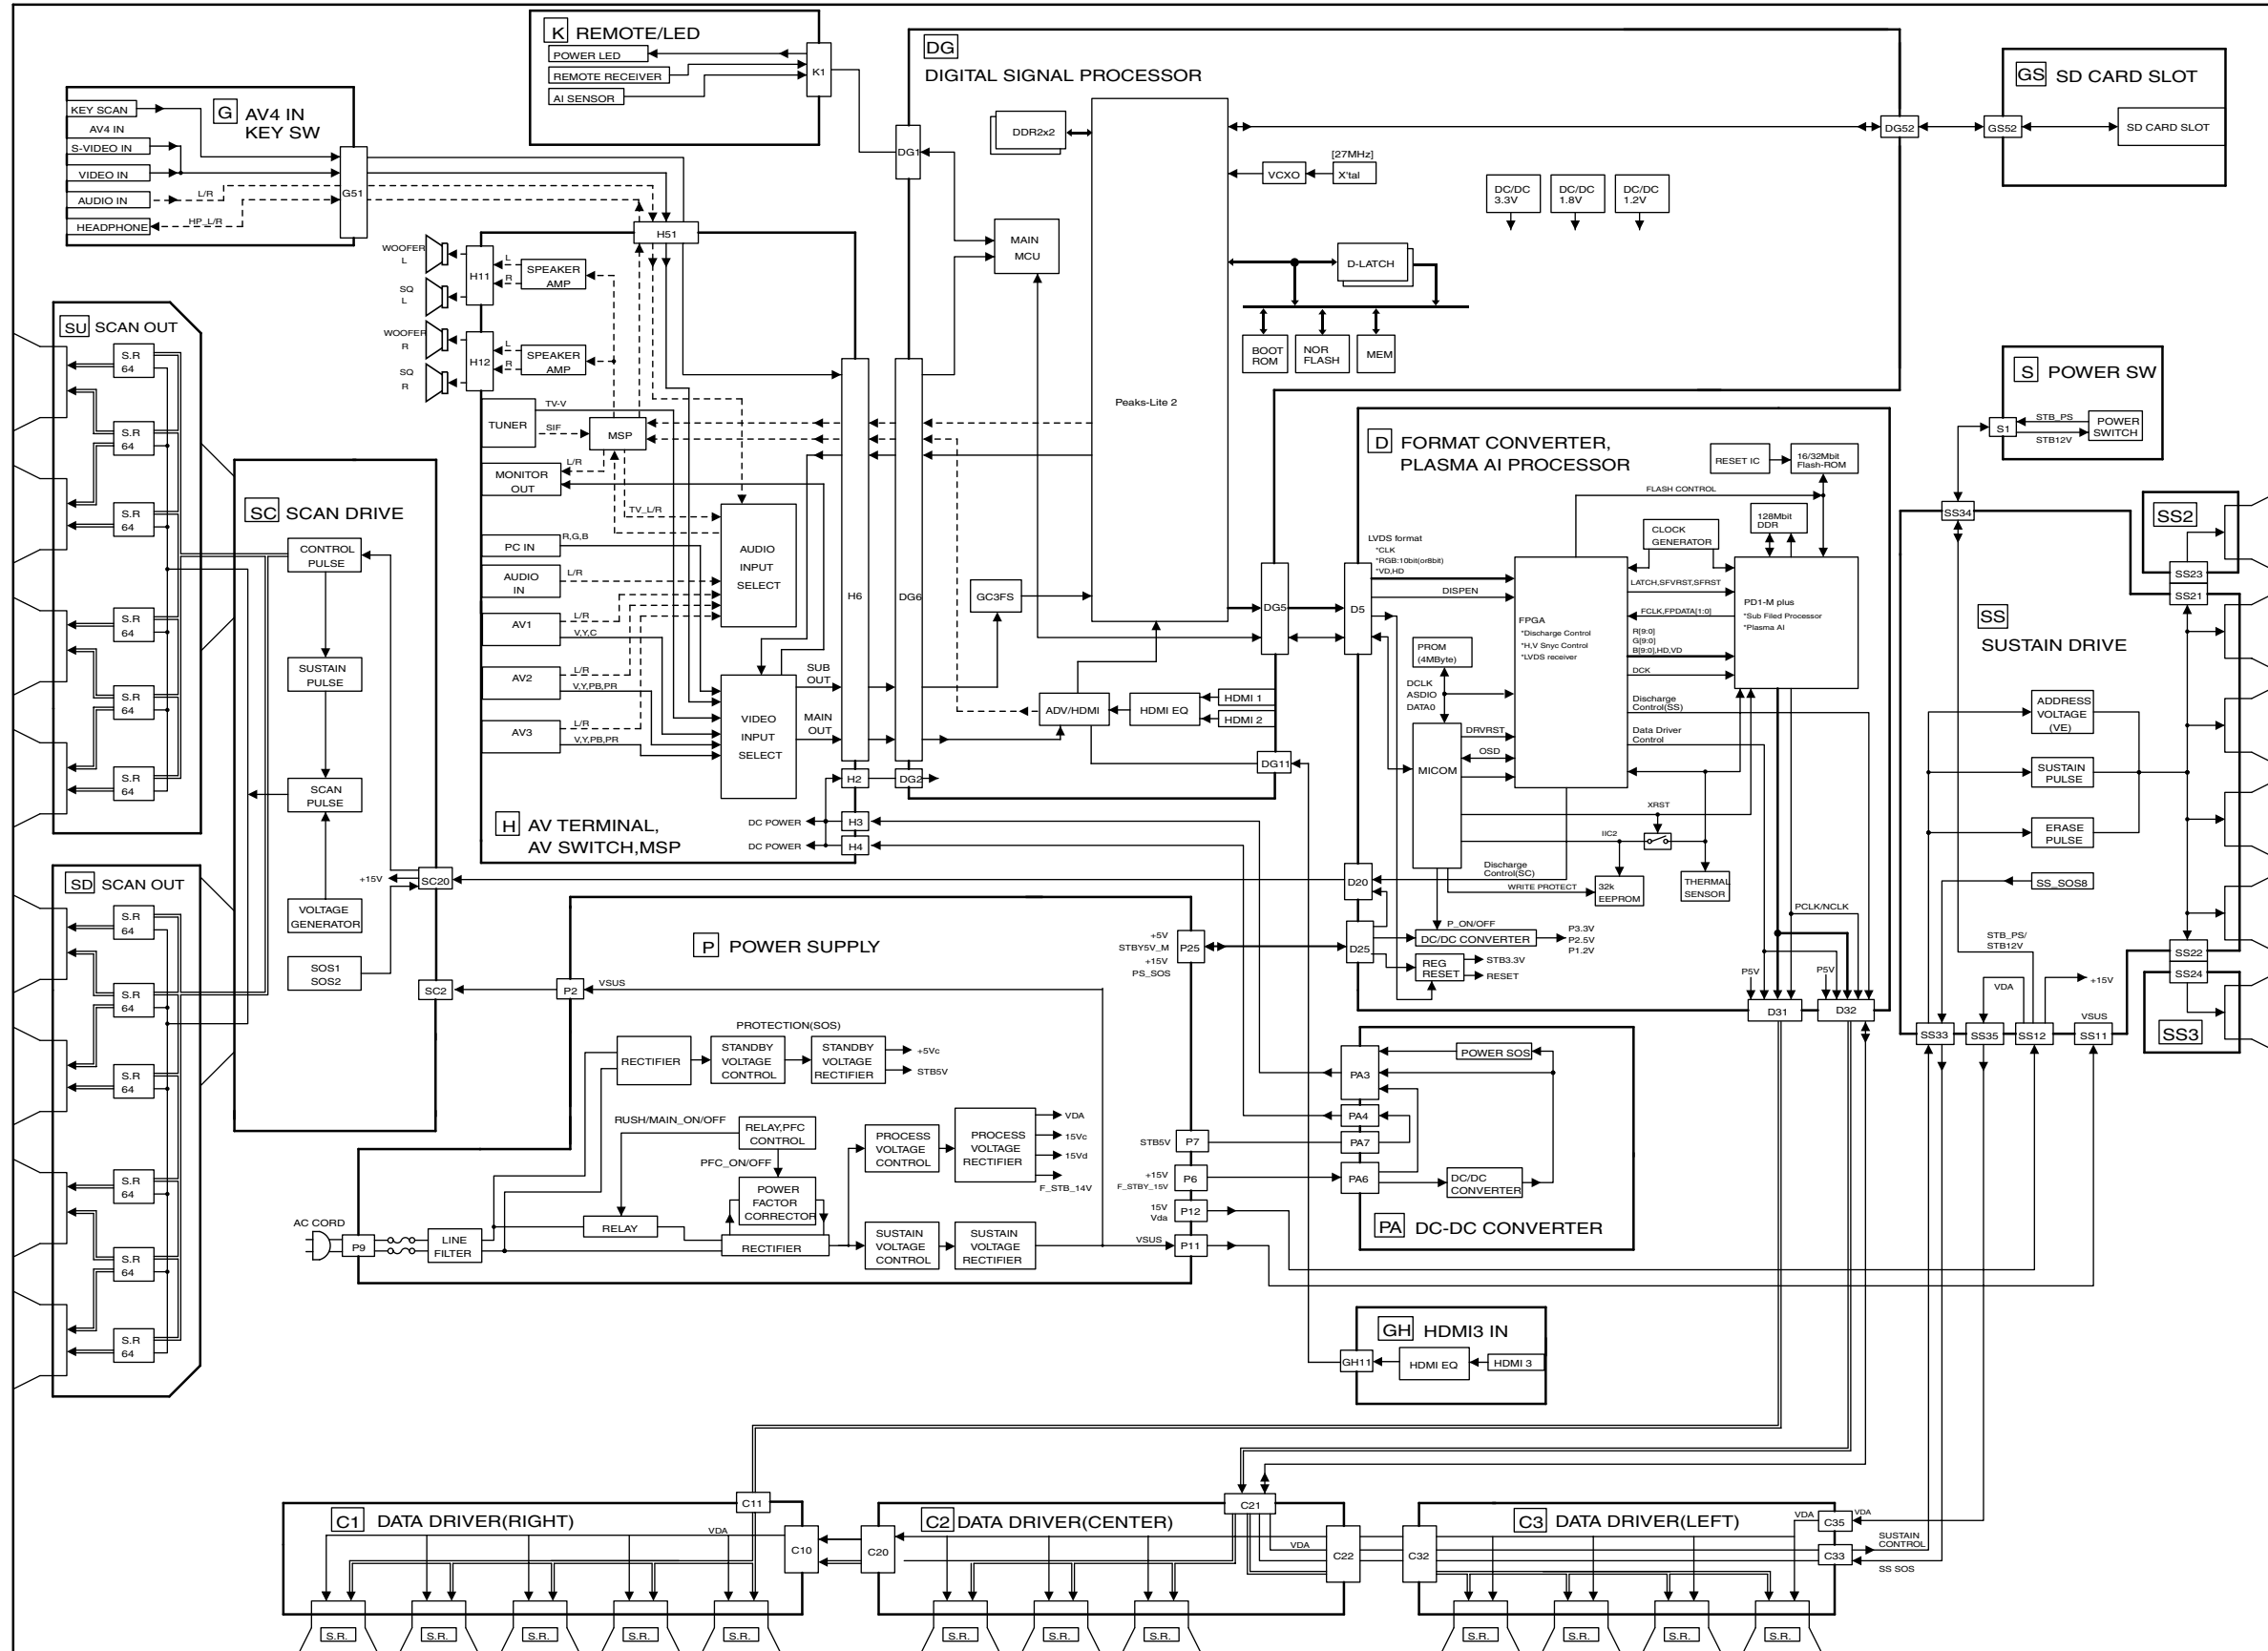

TH-50PV700AZ/H/M/MR
Main Block Diagram

TH-50PV700AZ/H/M/MR
Main Block Diagram


15.3. P-Board Block Diagram

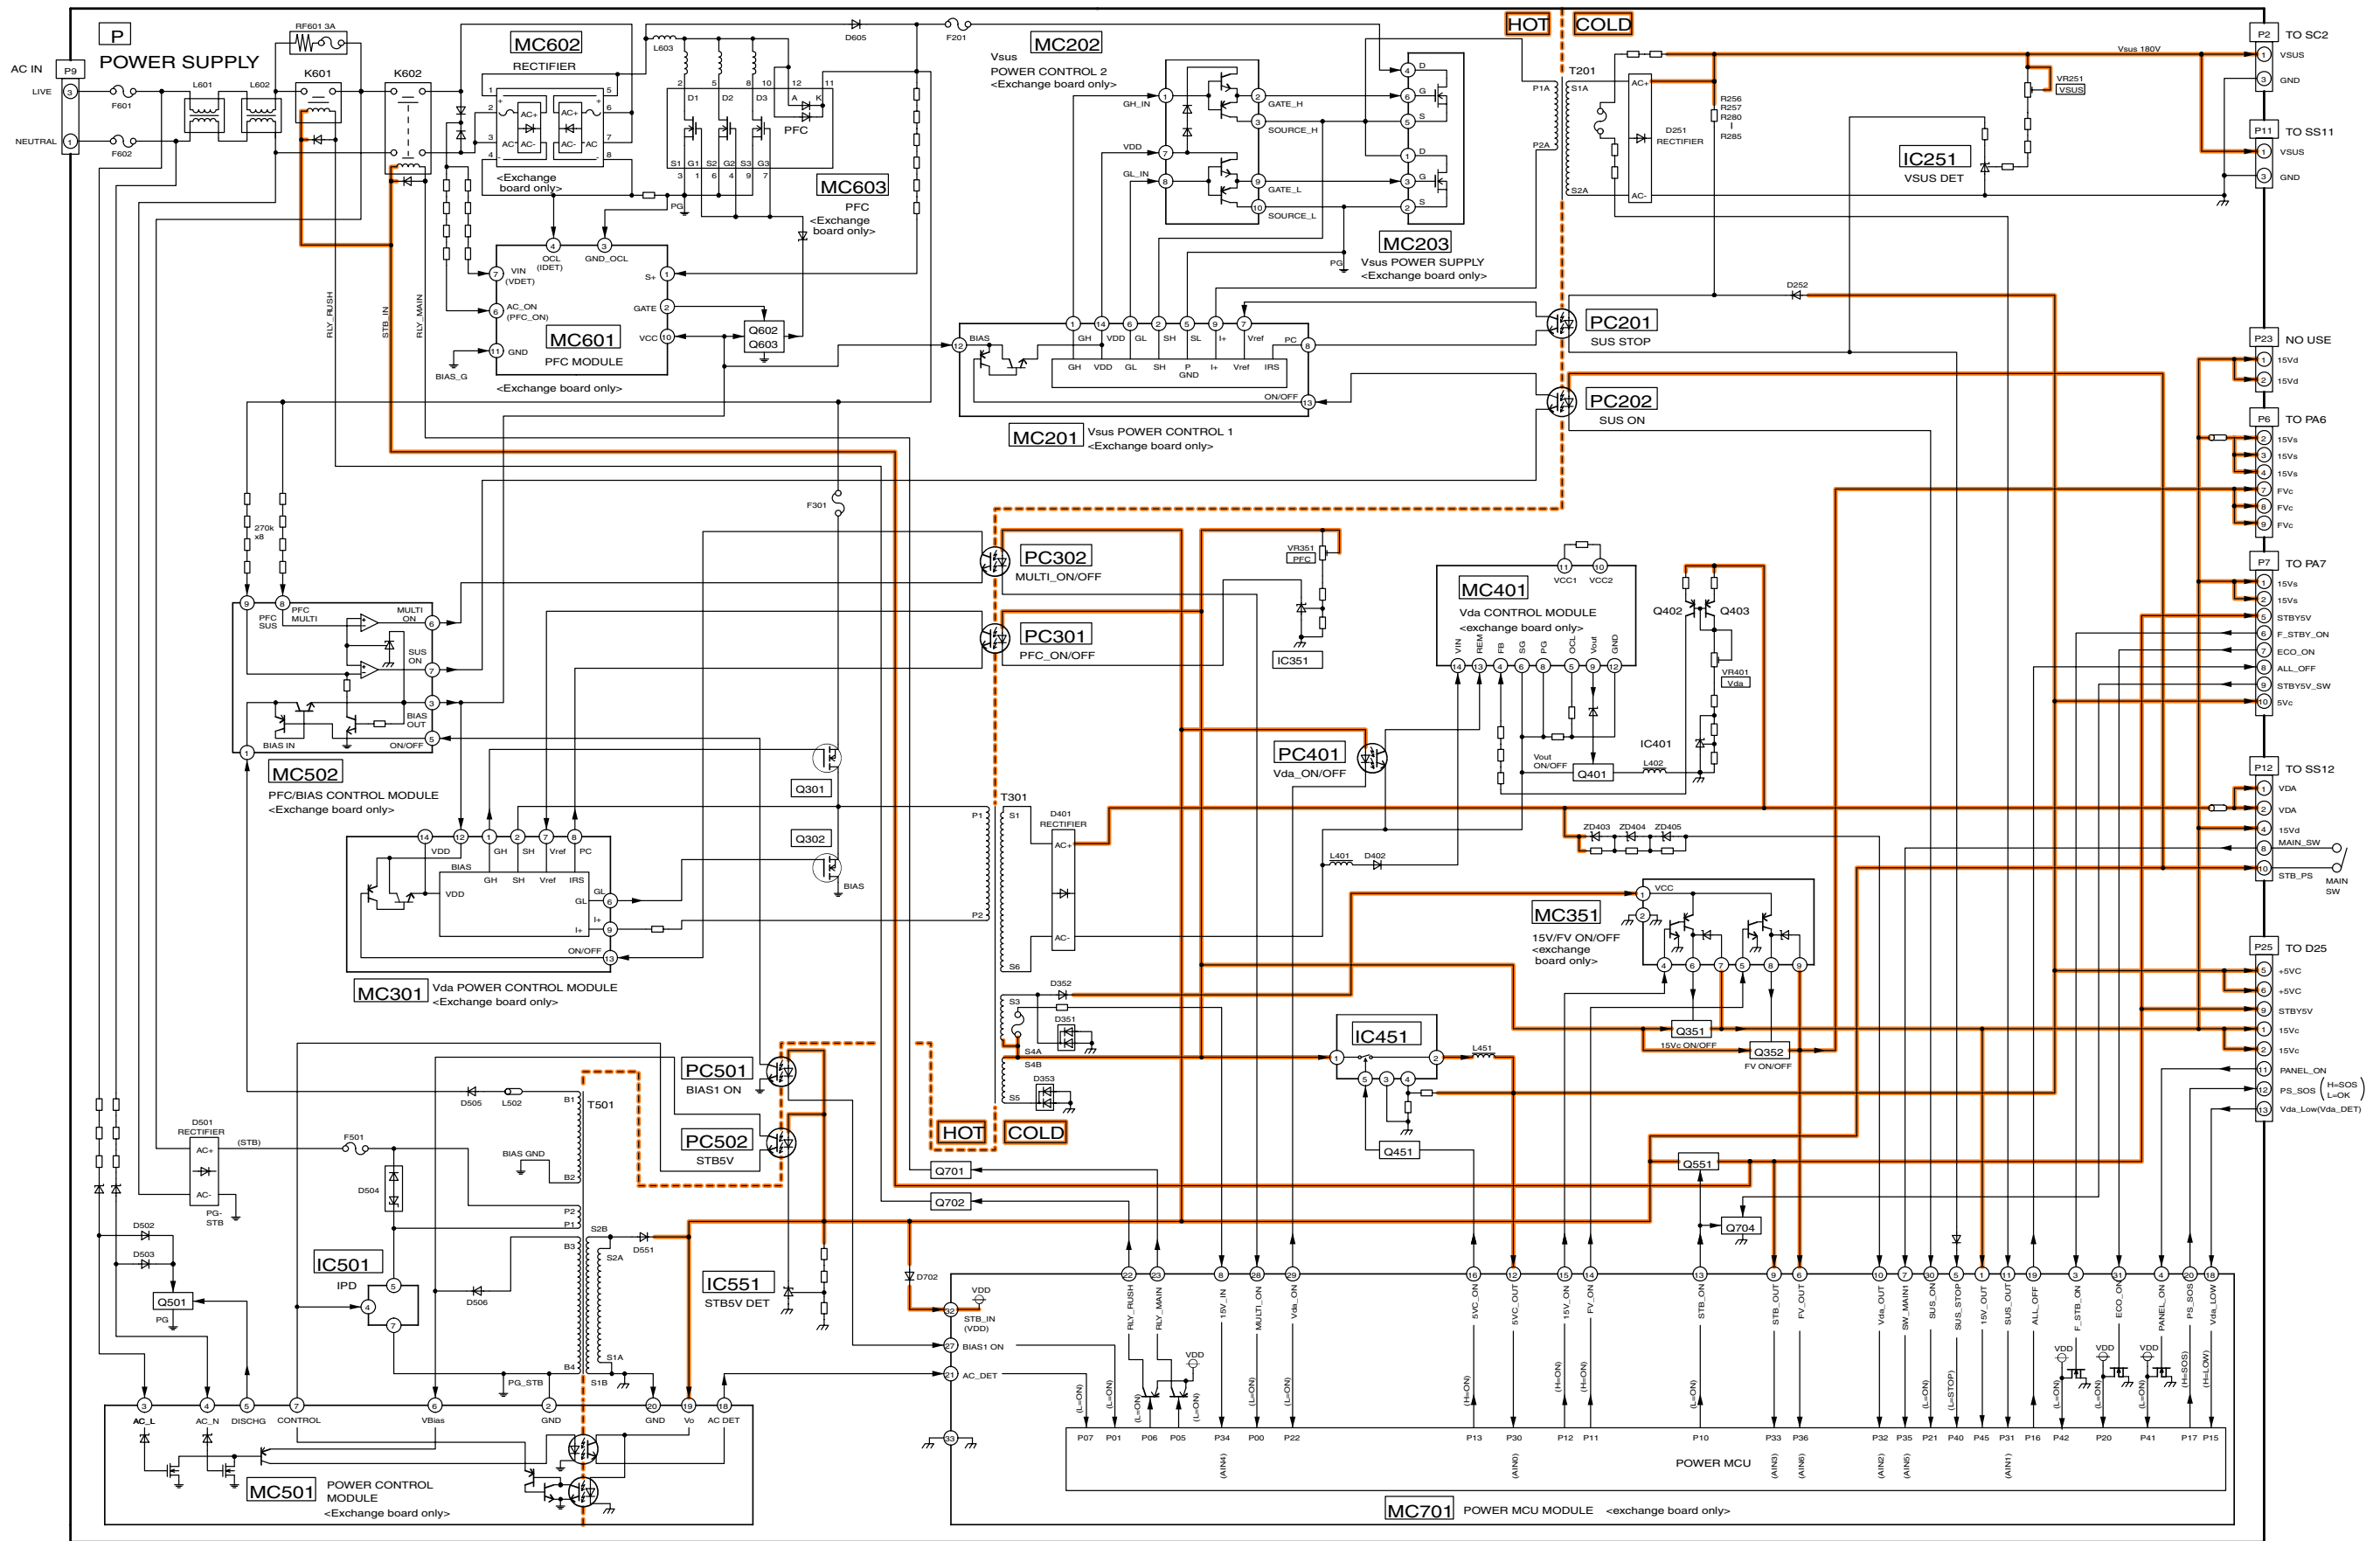

TH-50PV700AZ/H/M/MR
P-Board Block Diagram

TH-50PV700AZ/H/M/MR
P-Board Block Diagram

15.4. P-Board (1 of 2) Schematic Diagram

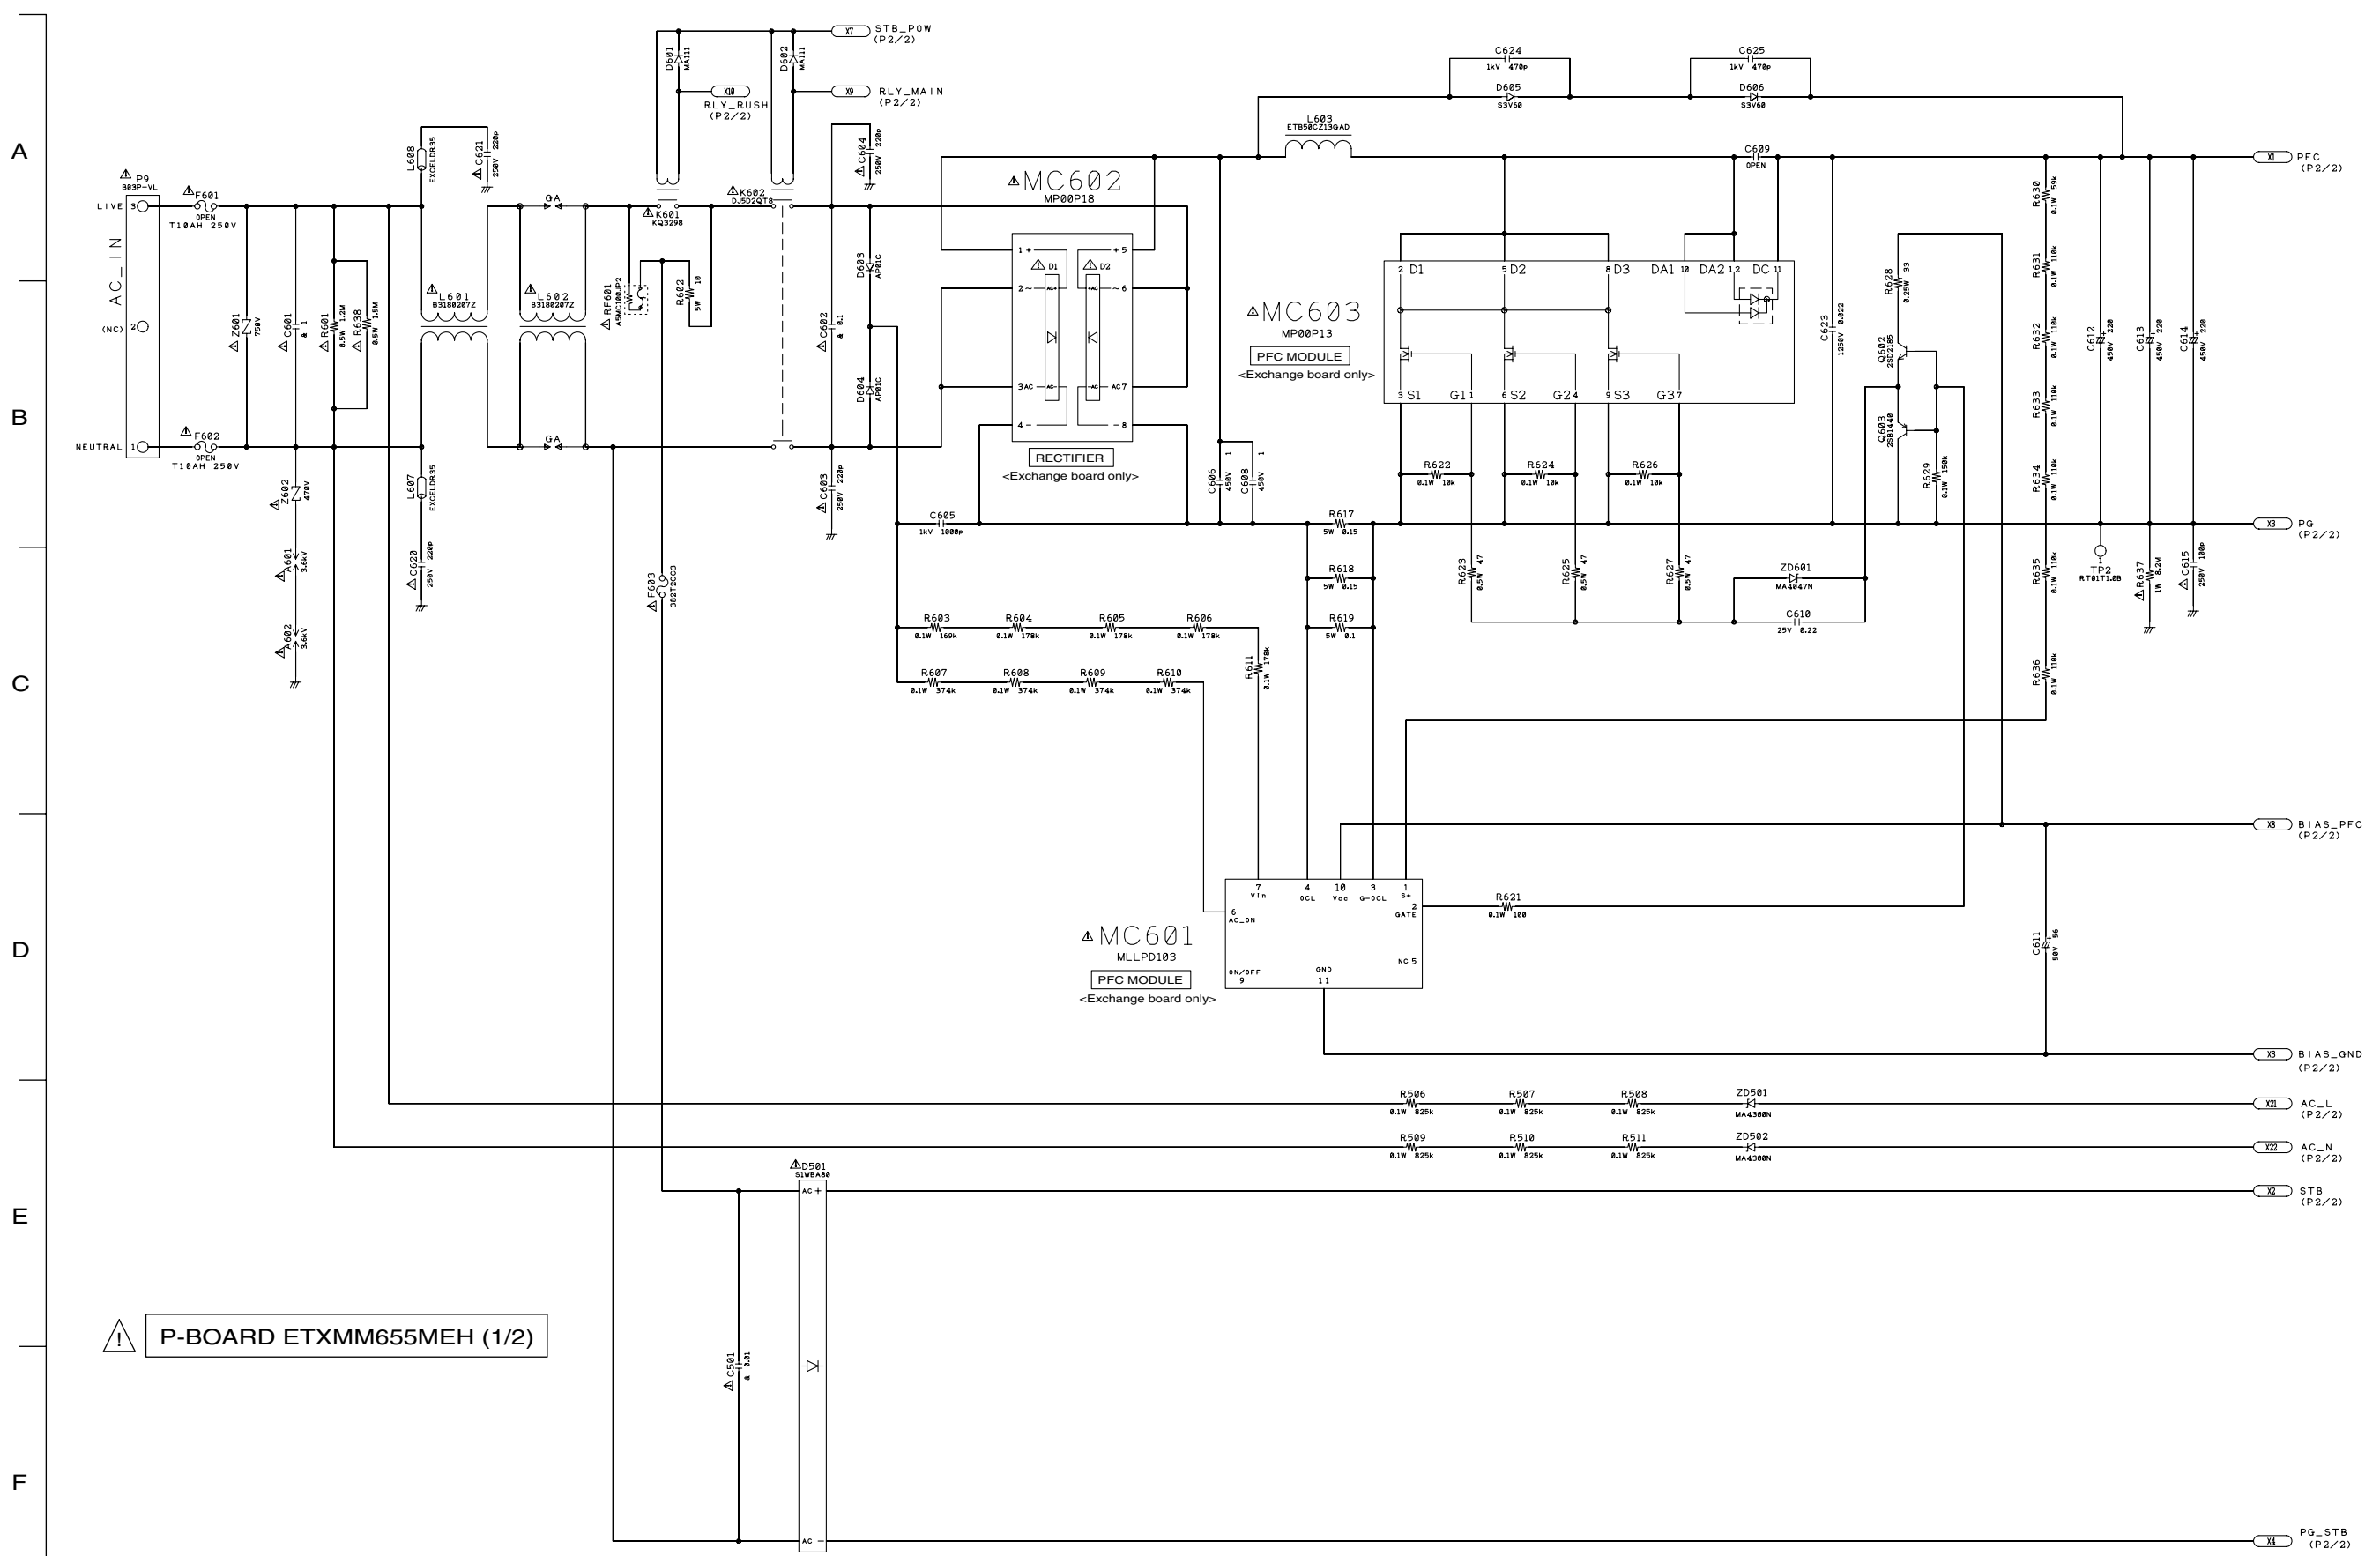


! P-BOARD ETXMM655MEH (1/2)

TH-50PV700AZ/H/M/MR
P-Board (1 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
P-Board (1 of 2) Schematic Diagram

1 2 3 4 5 6 7 8 9


15.5. P-Board (2 of 2) Schematic Diagram

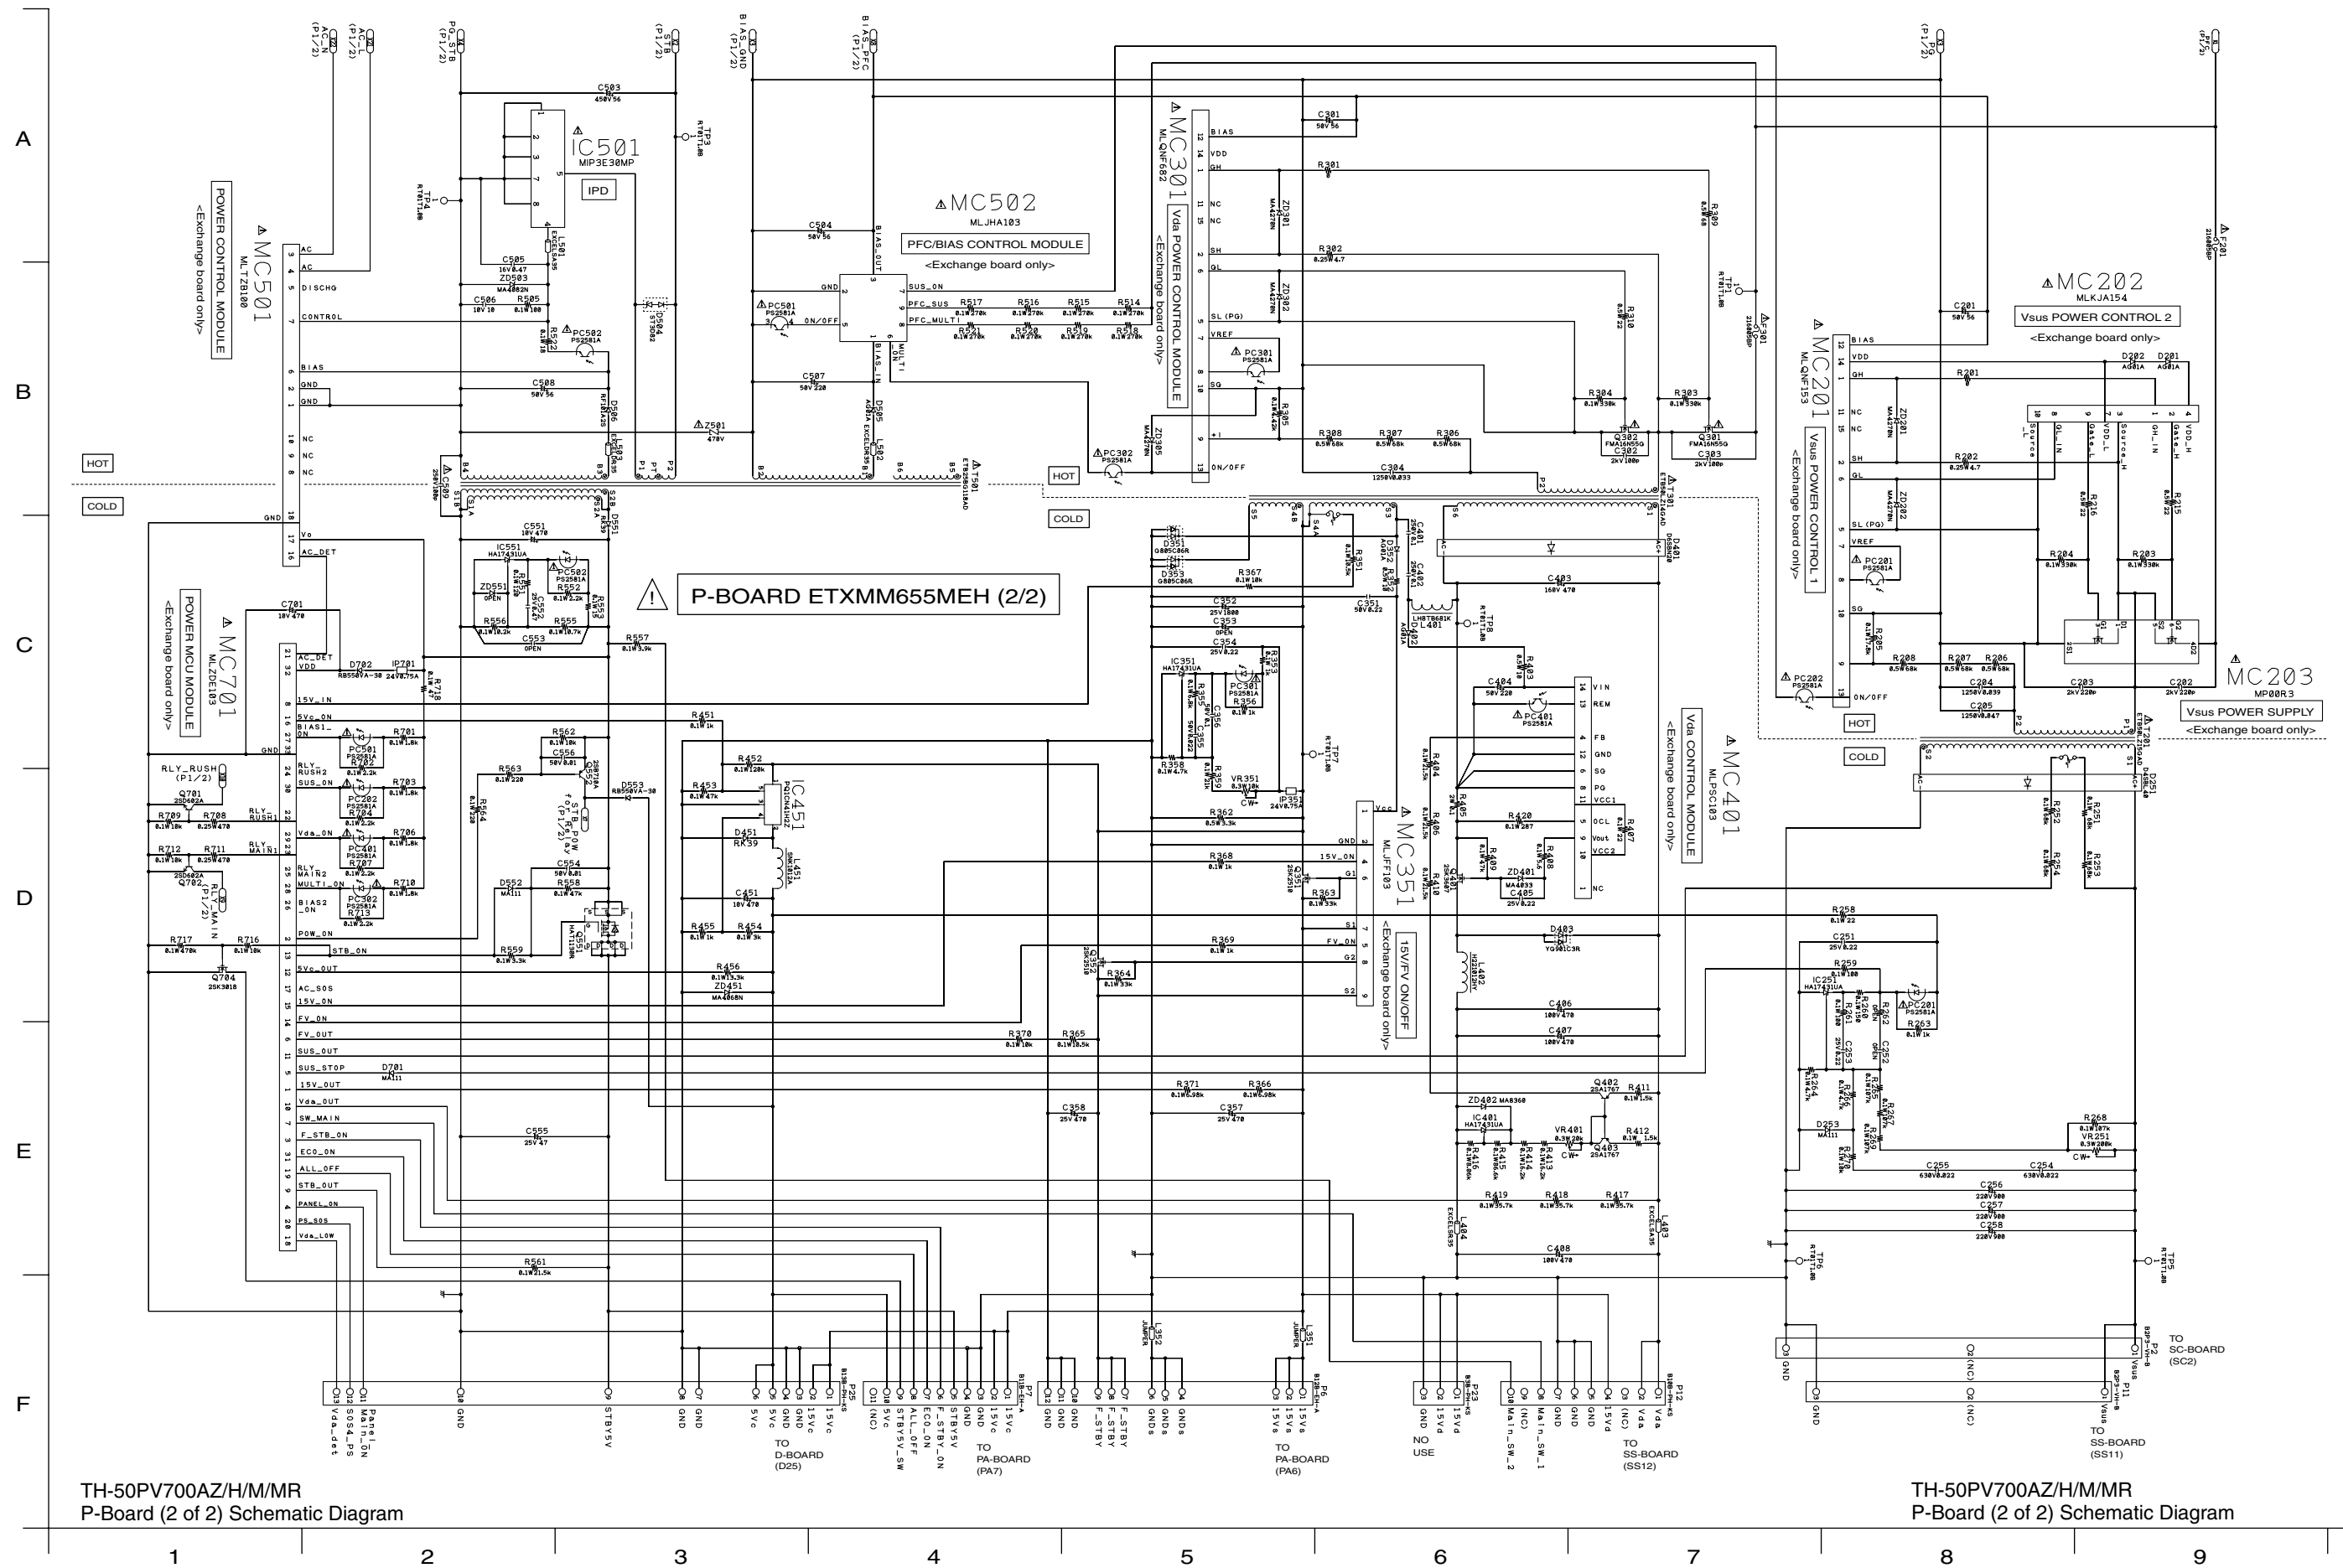


TH-50PV700AZ/H/M/MR
P-Board (2 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
P-Board (2 of 2) Schematic Diagram

15.6. PA-Board Block Diagram

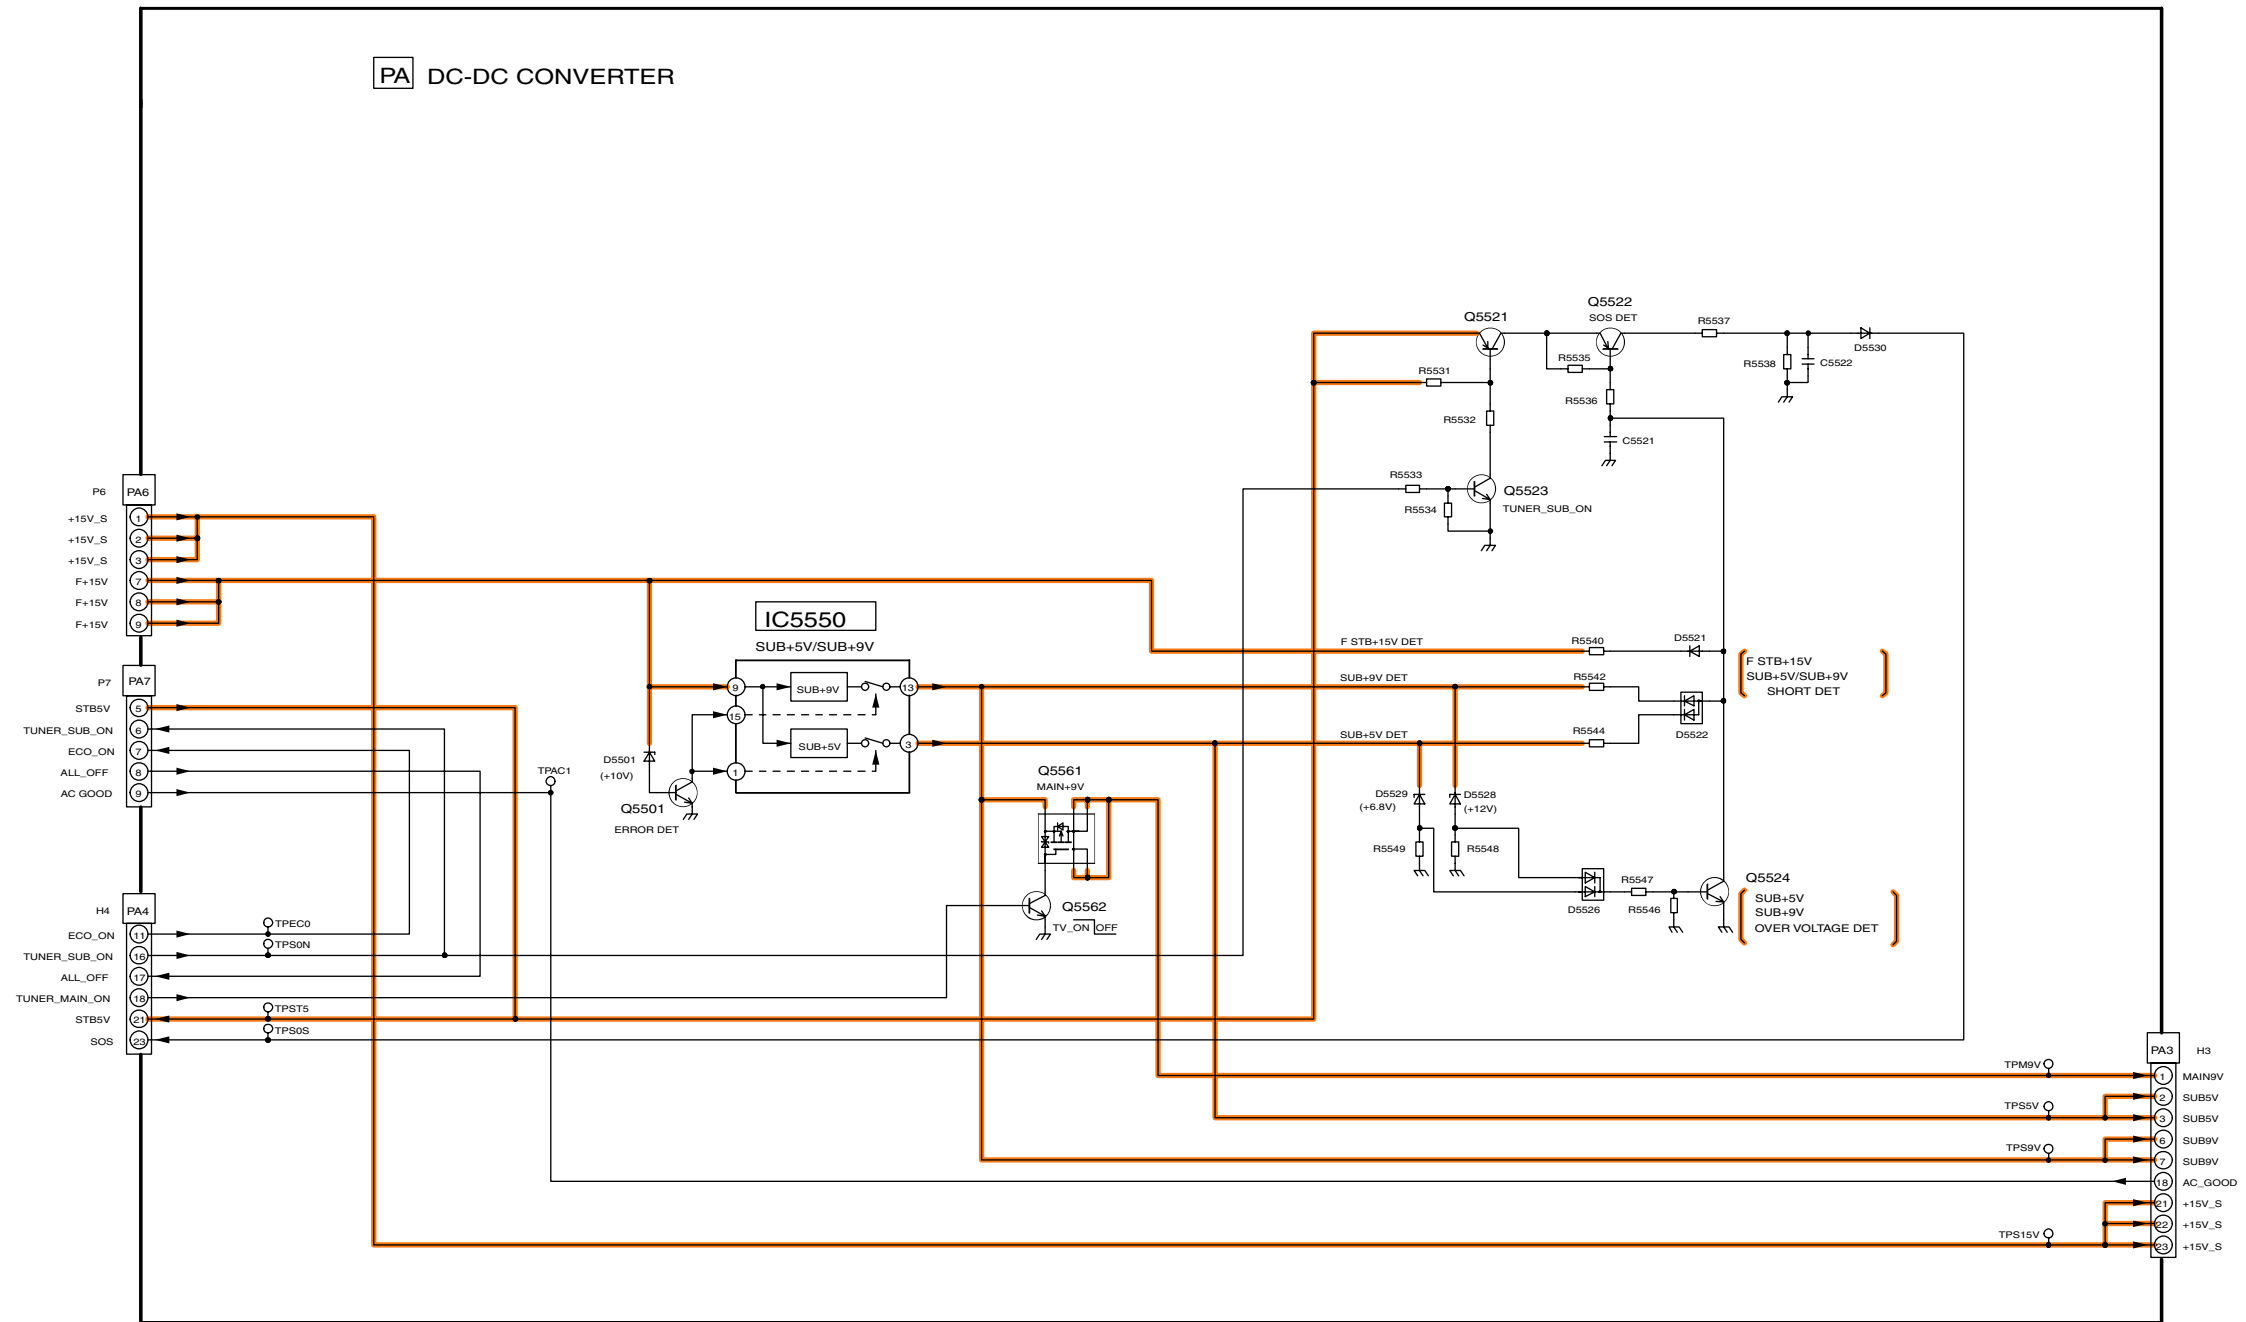

15.7. PA-Board Schematic Diagram

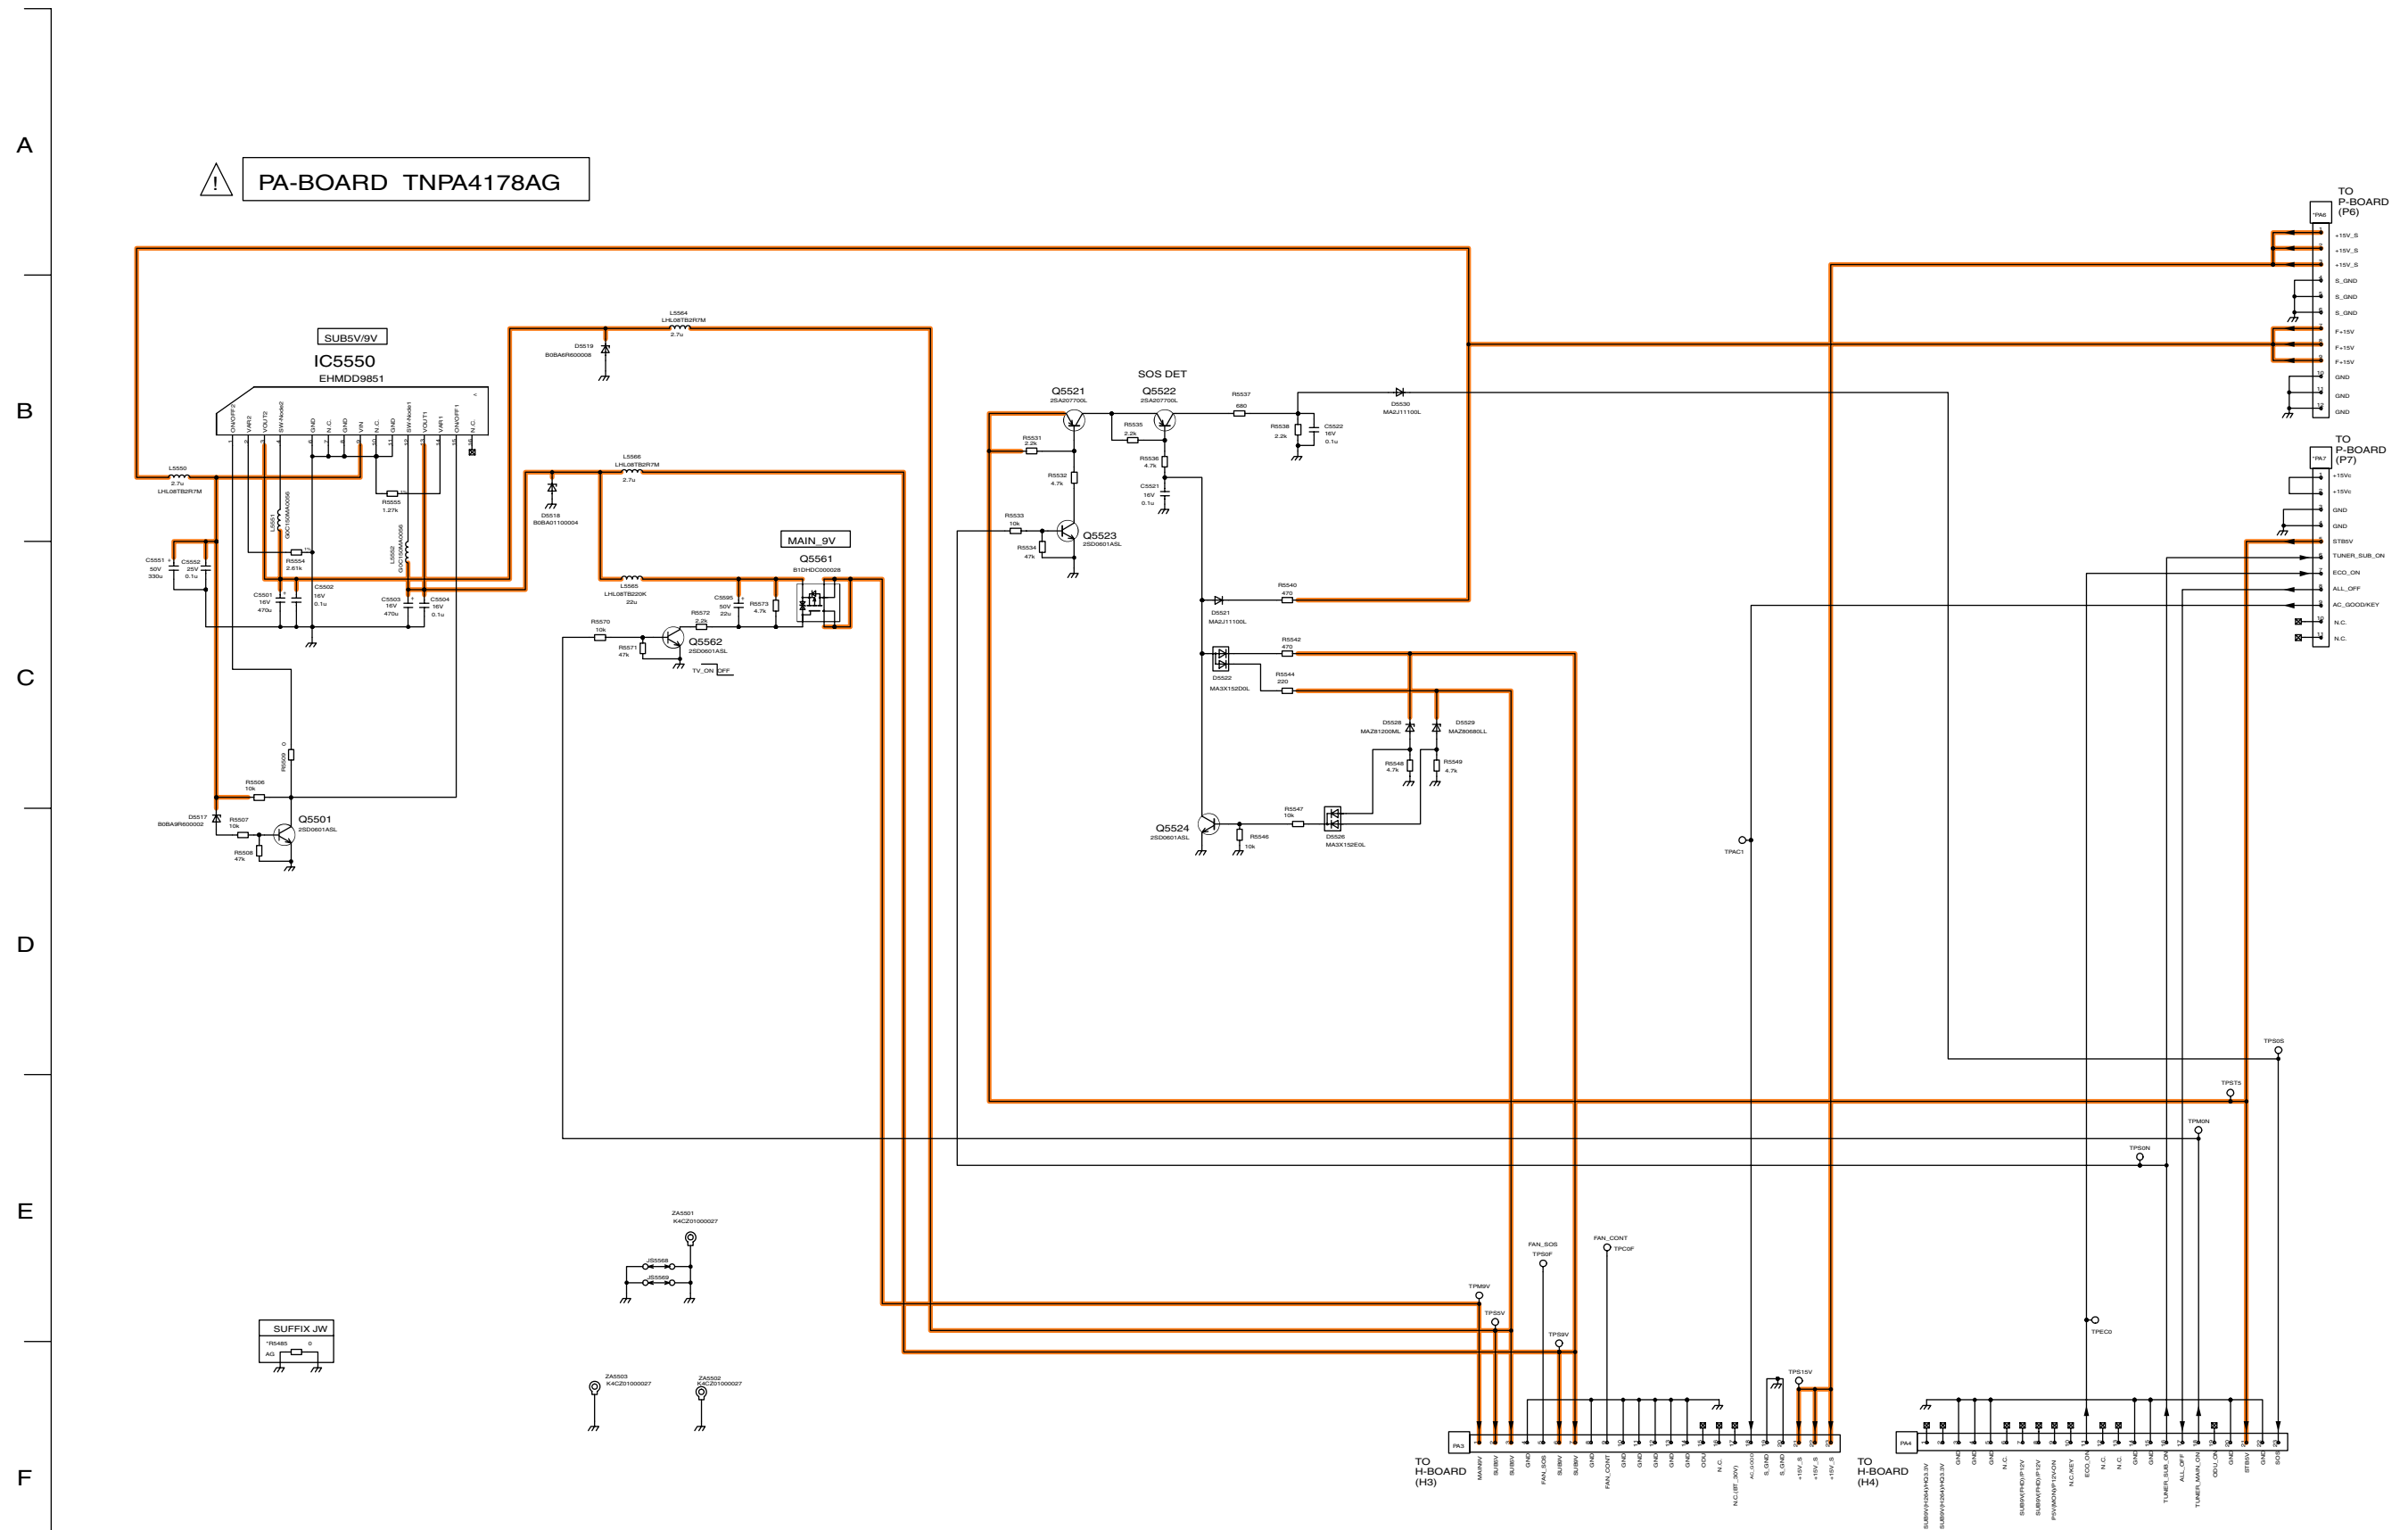


TH-50PV700AZ/H/M/MR
PA-Board Schematic Diagram

TH-50PV700AZ/H/M/MR
PA-Board Schematic Diagram Diagram

1 2 3 4 5 6 7 8 9


15.8. H-Board (1 of 2) Block Diagram

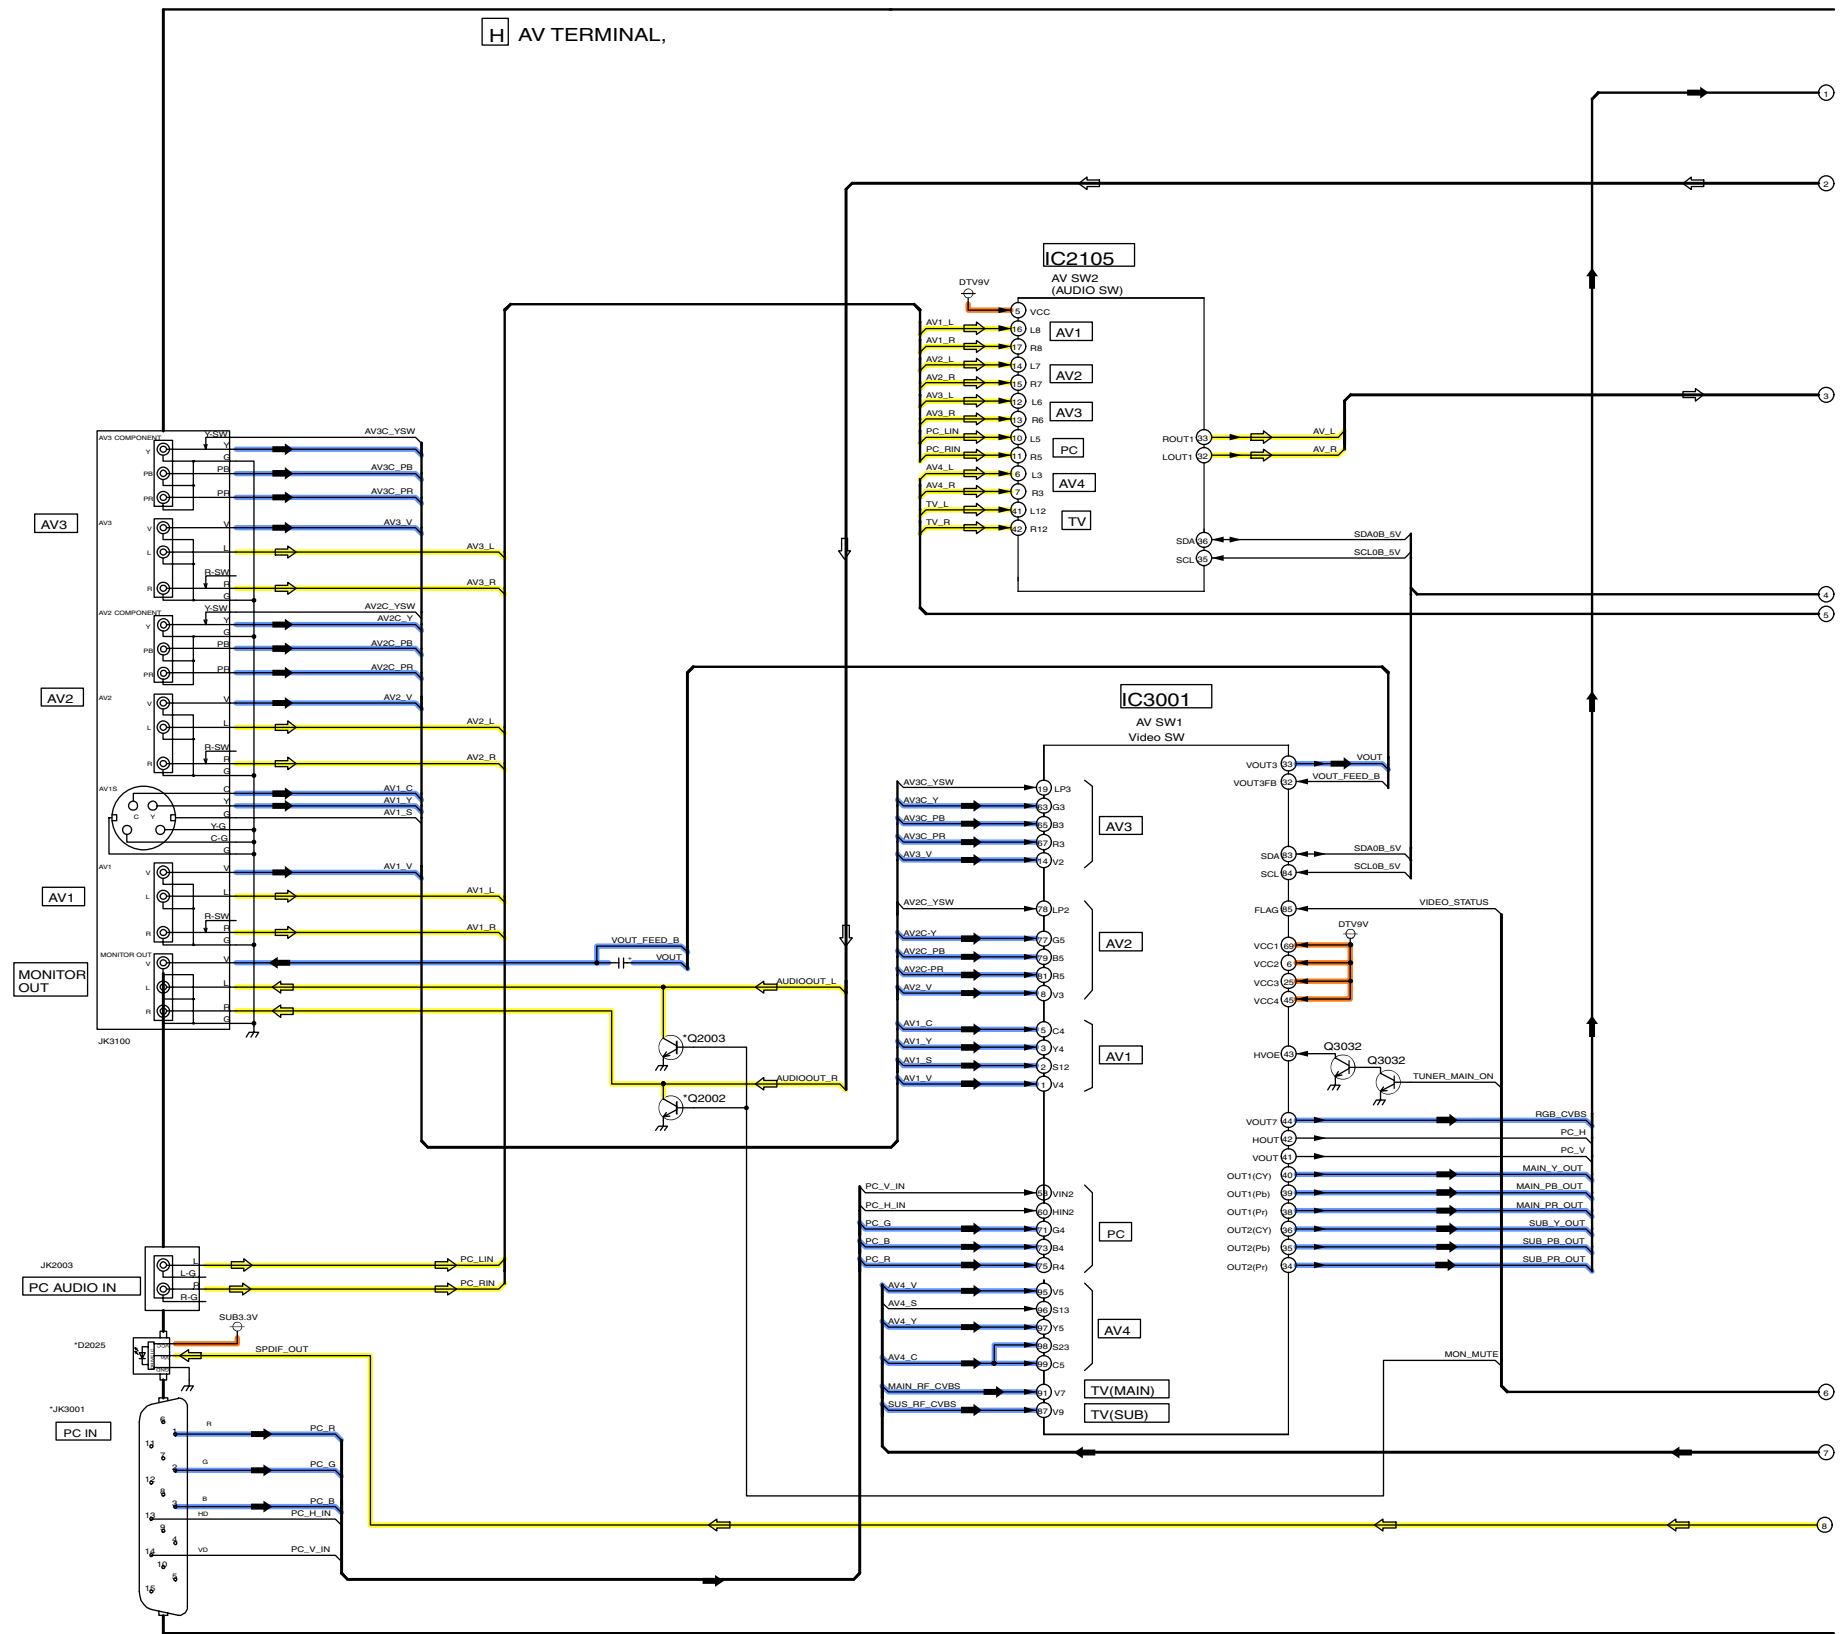

TH-50PV700AZ/H/M/MR
H-Board (1 of 2) Block Diagram


TH-50PV700AZ/H/M/MR
H-Board (1 of 2) Block Diagram

15.9. H-Board (2 of 2) Block Diagram

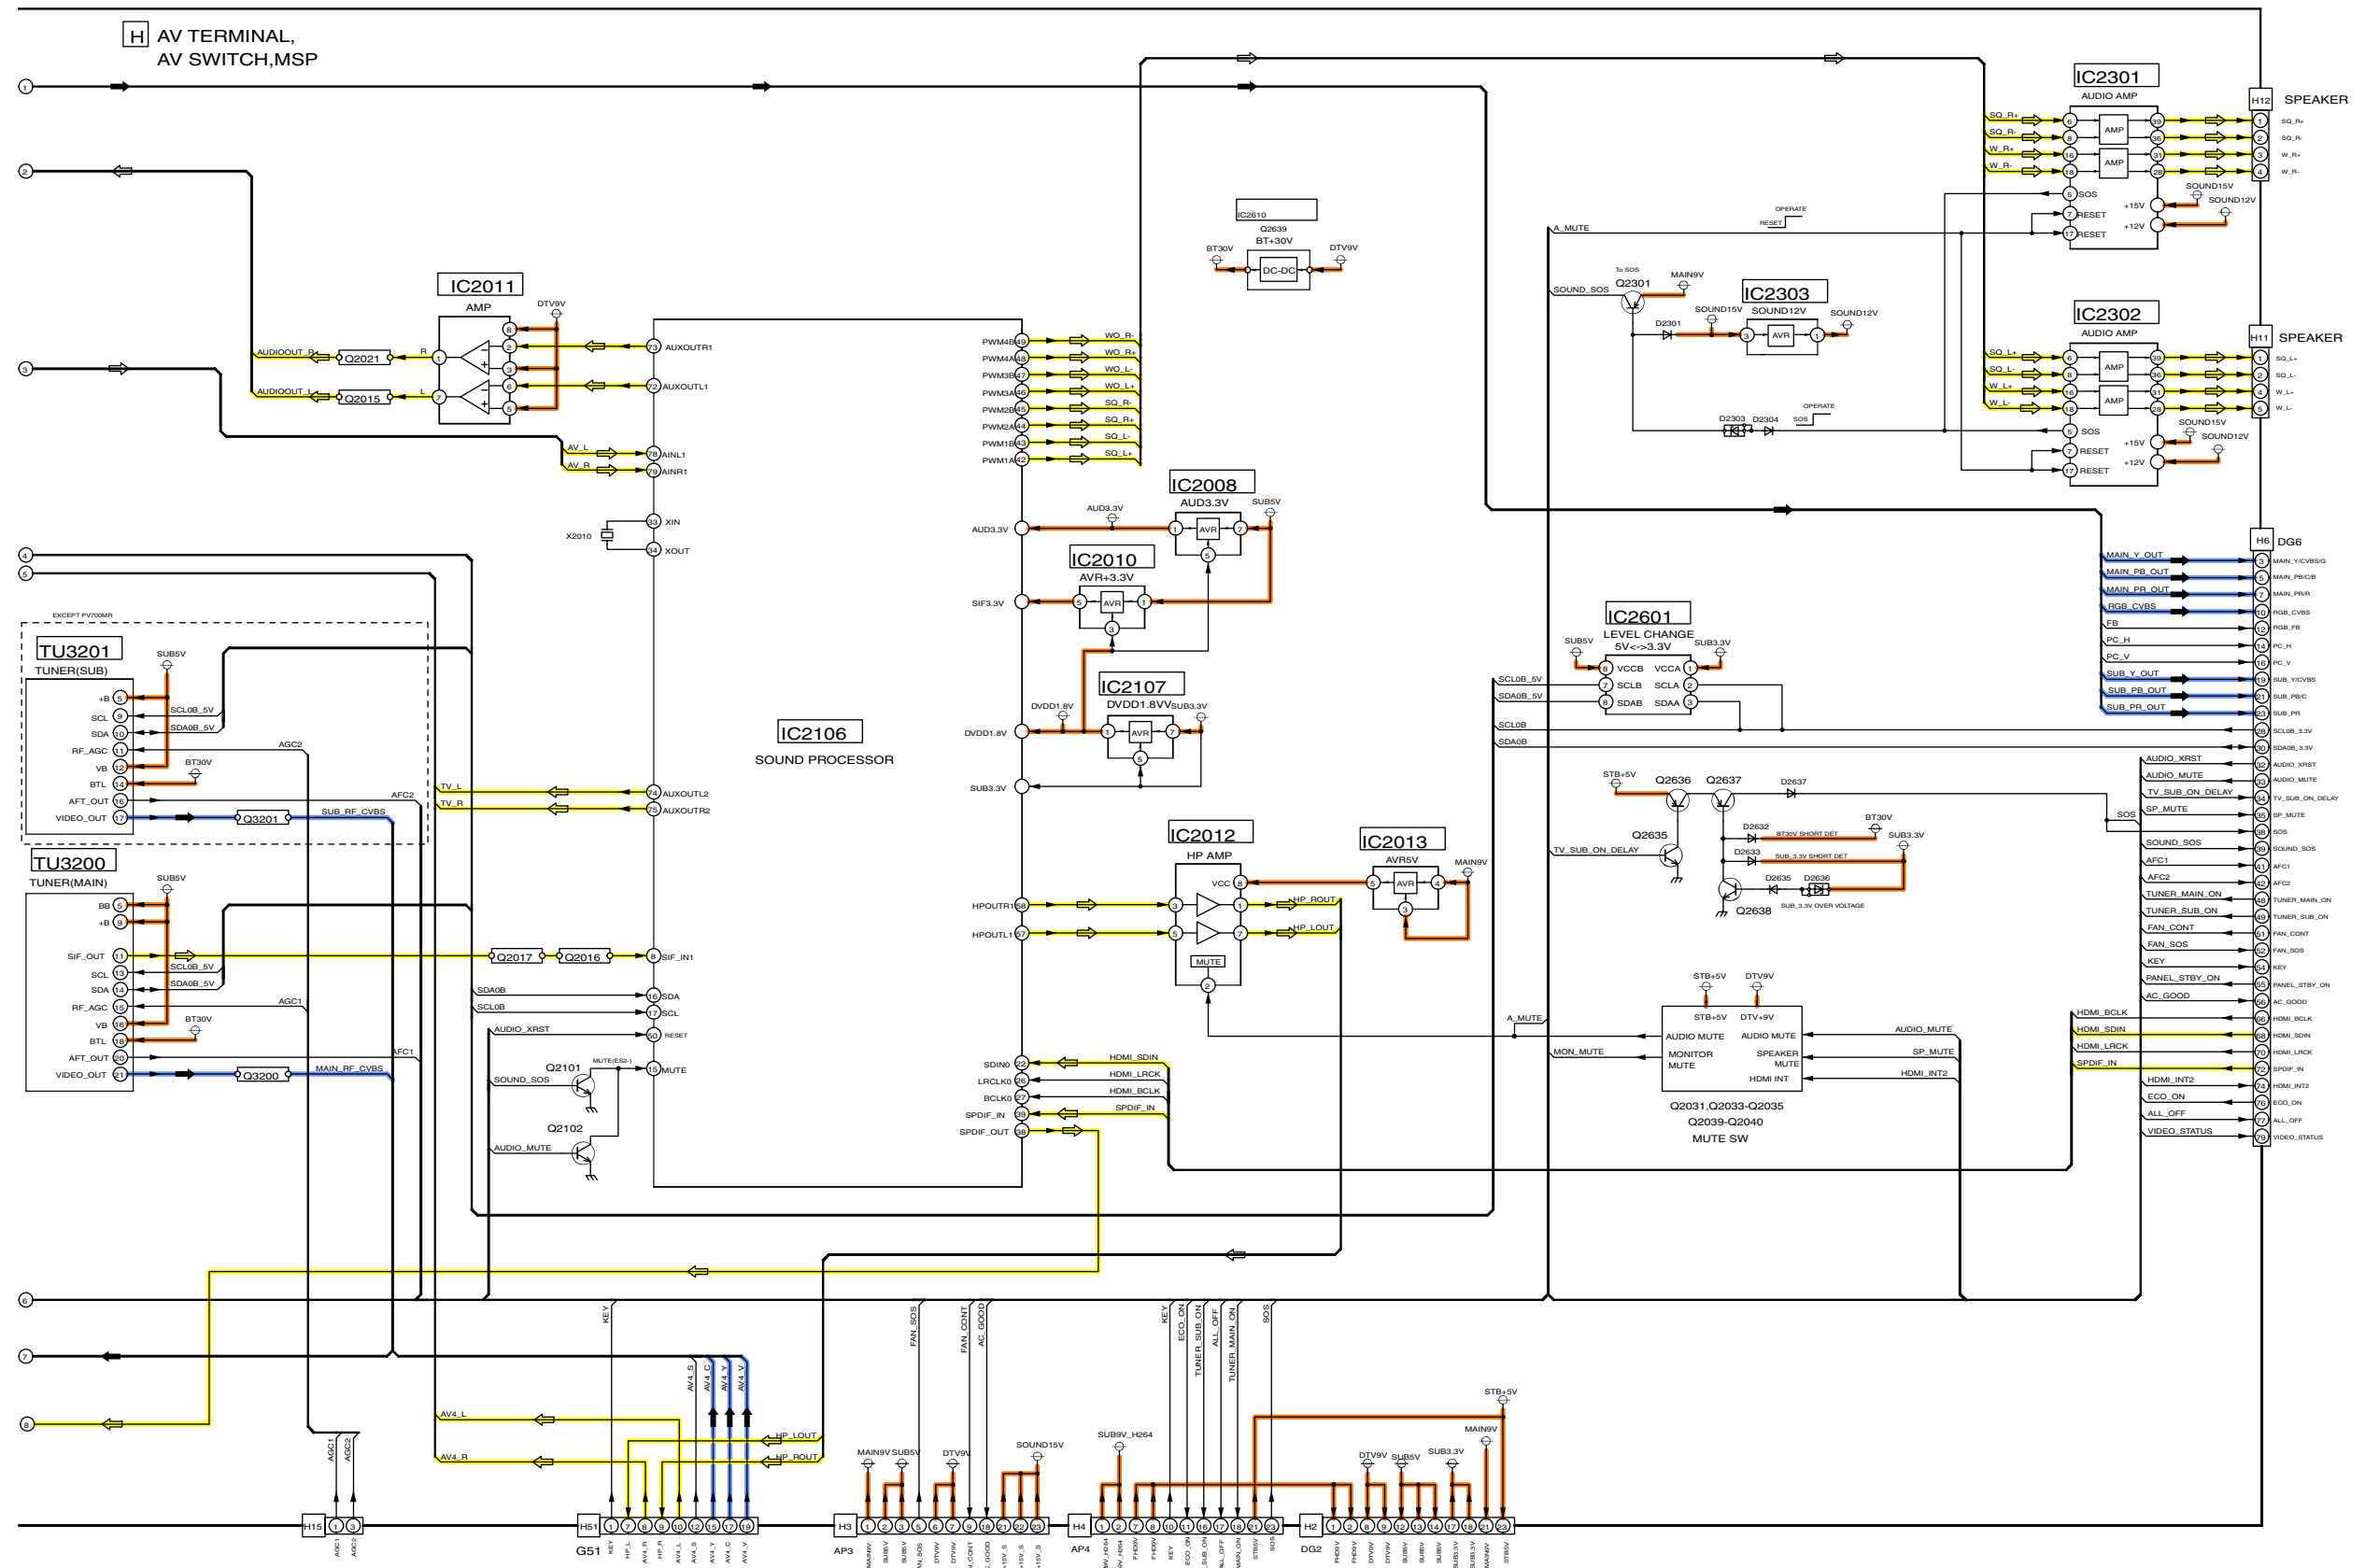


TH-50PV700AZ/H/M/MR
H-Board (2 of 2) Block Diagram

15.10. H-Board (1 of 5) Schematic Diagram

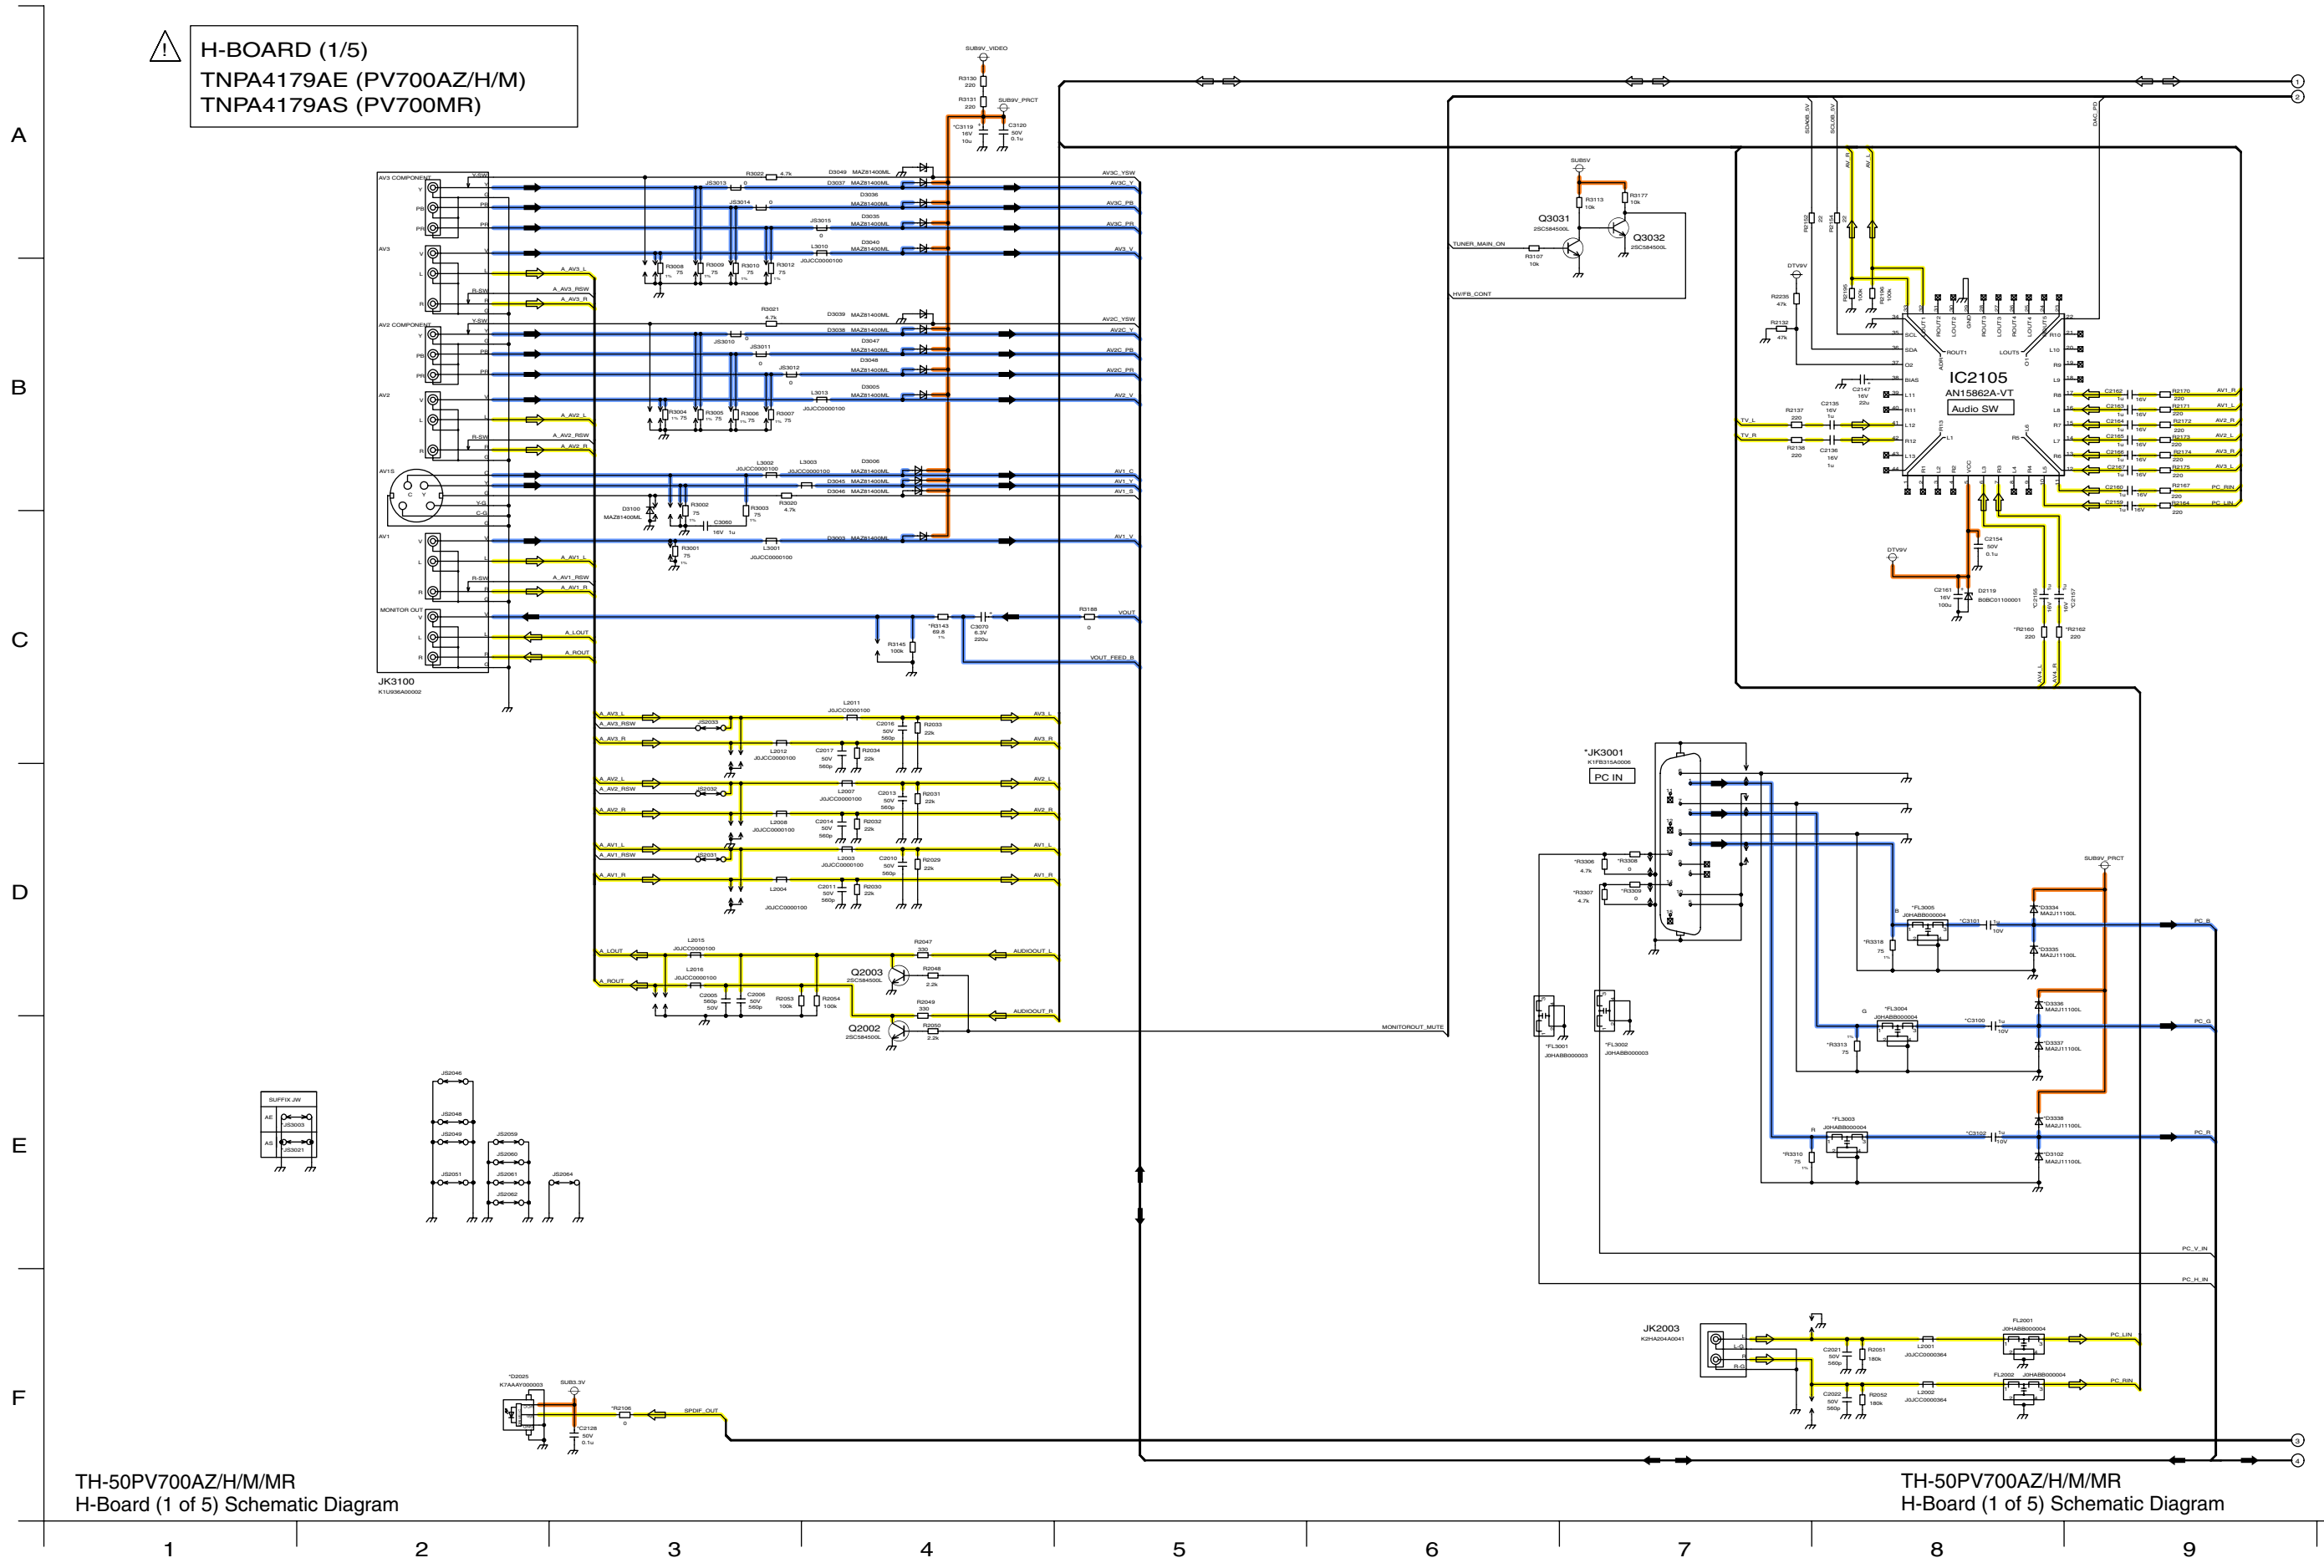

15.11. H-Board (2 of 5) Schematic Diagram

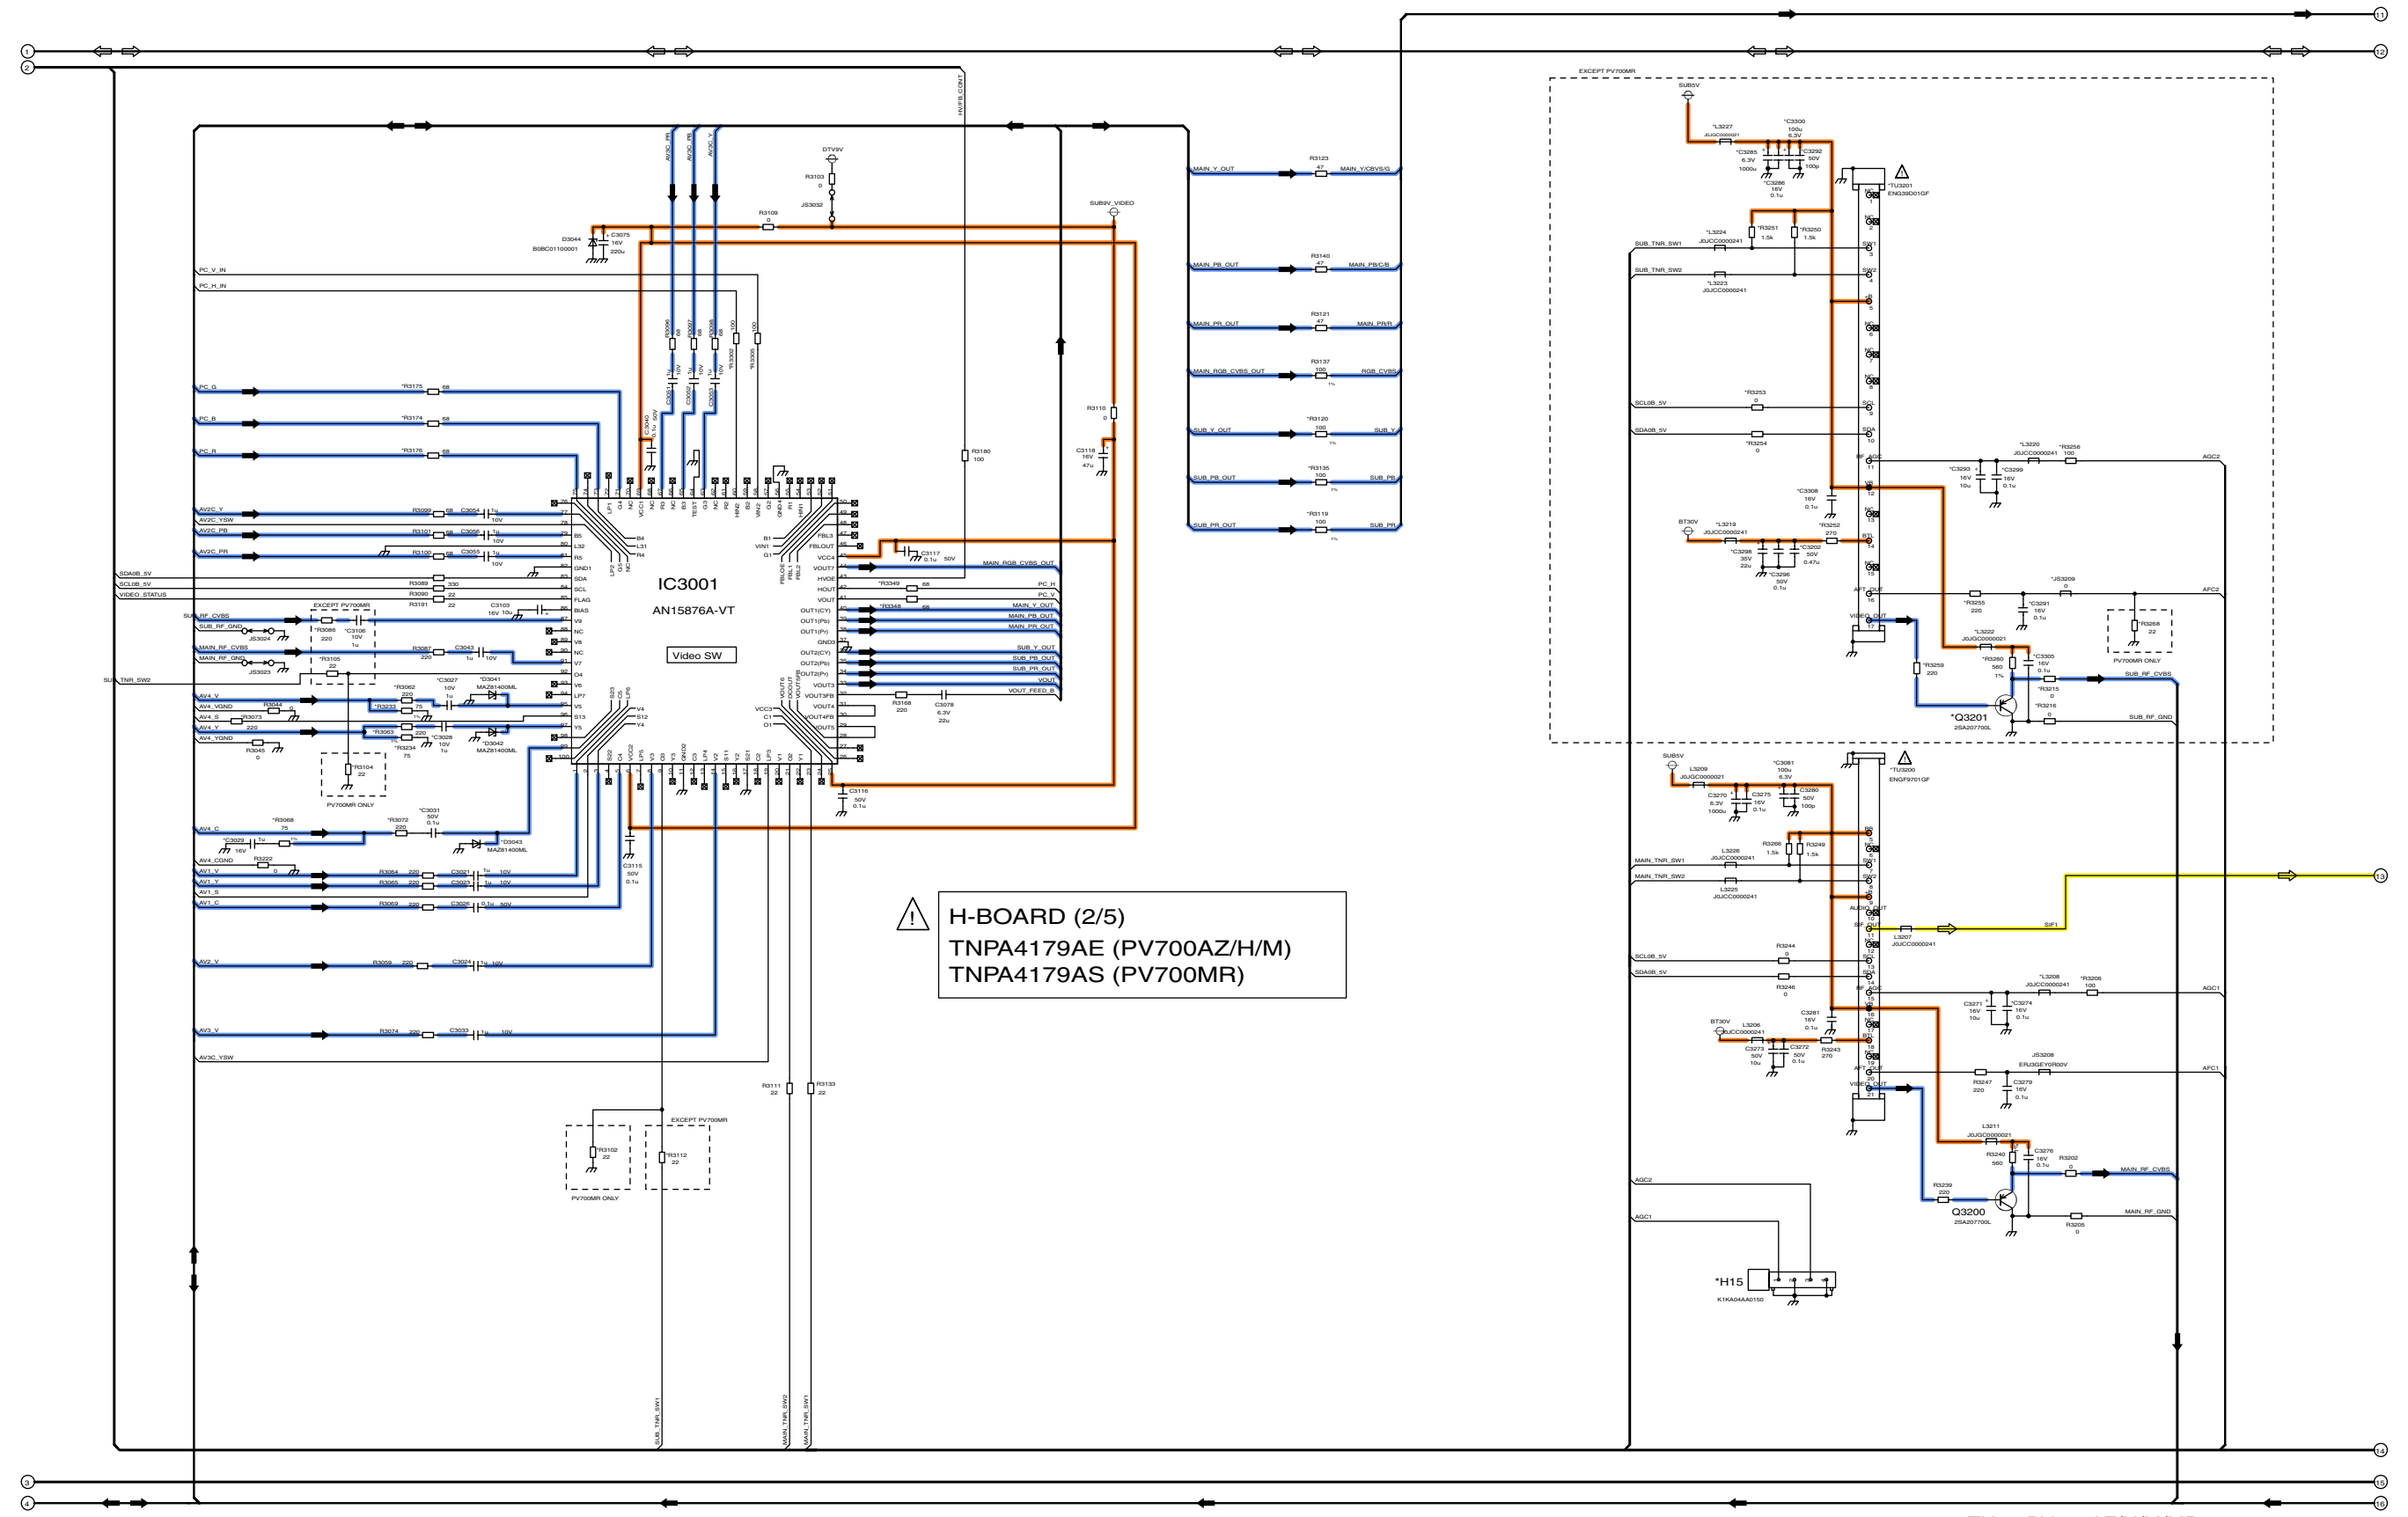

TH-50PV700AZ/H/M/MR
H-Board (2 of 5) Schematic Diagram

TH-50PV700AZ/H/M/MR
H-Board (2 of 5) Schematic Diagram

10

11

12

13

14


15

16

17

18

15.12. H-Board (3 of 5) Schematic Diagram

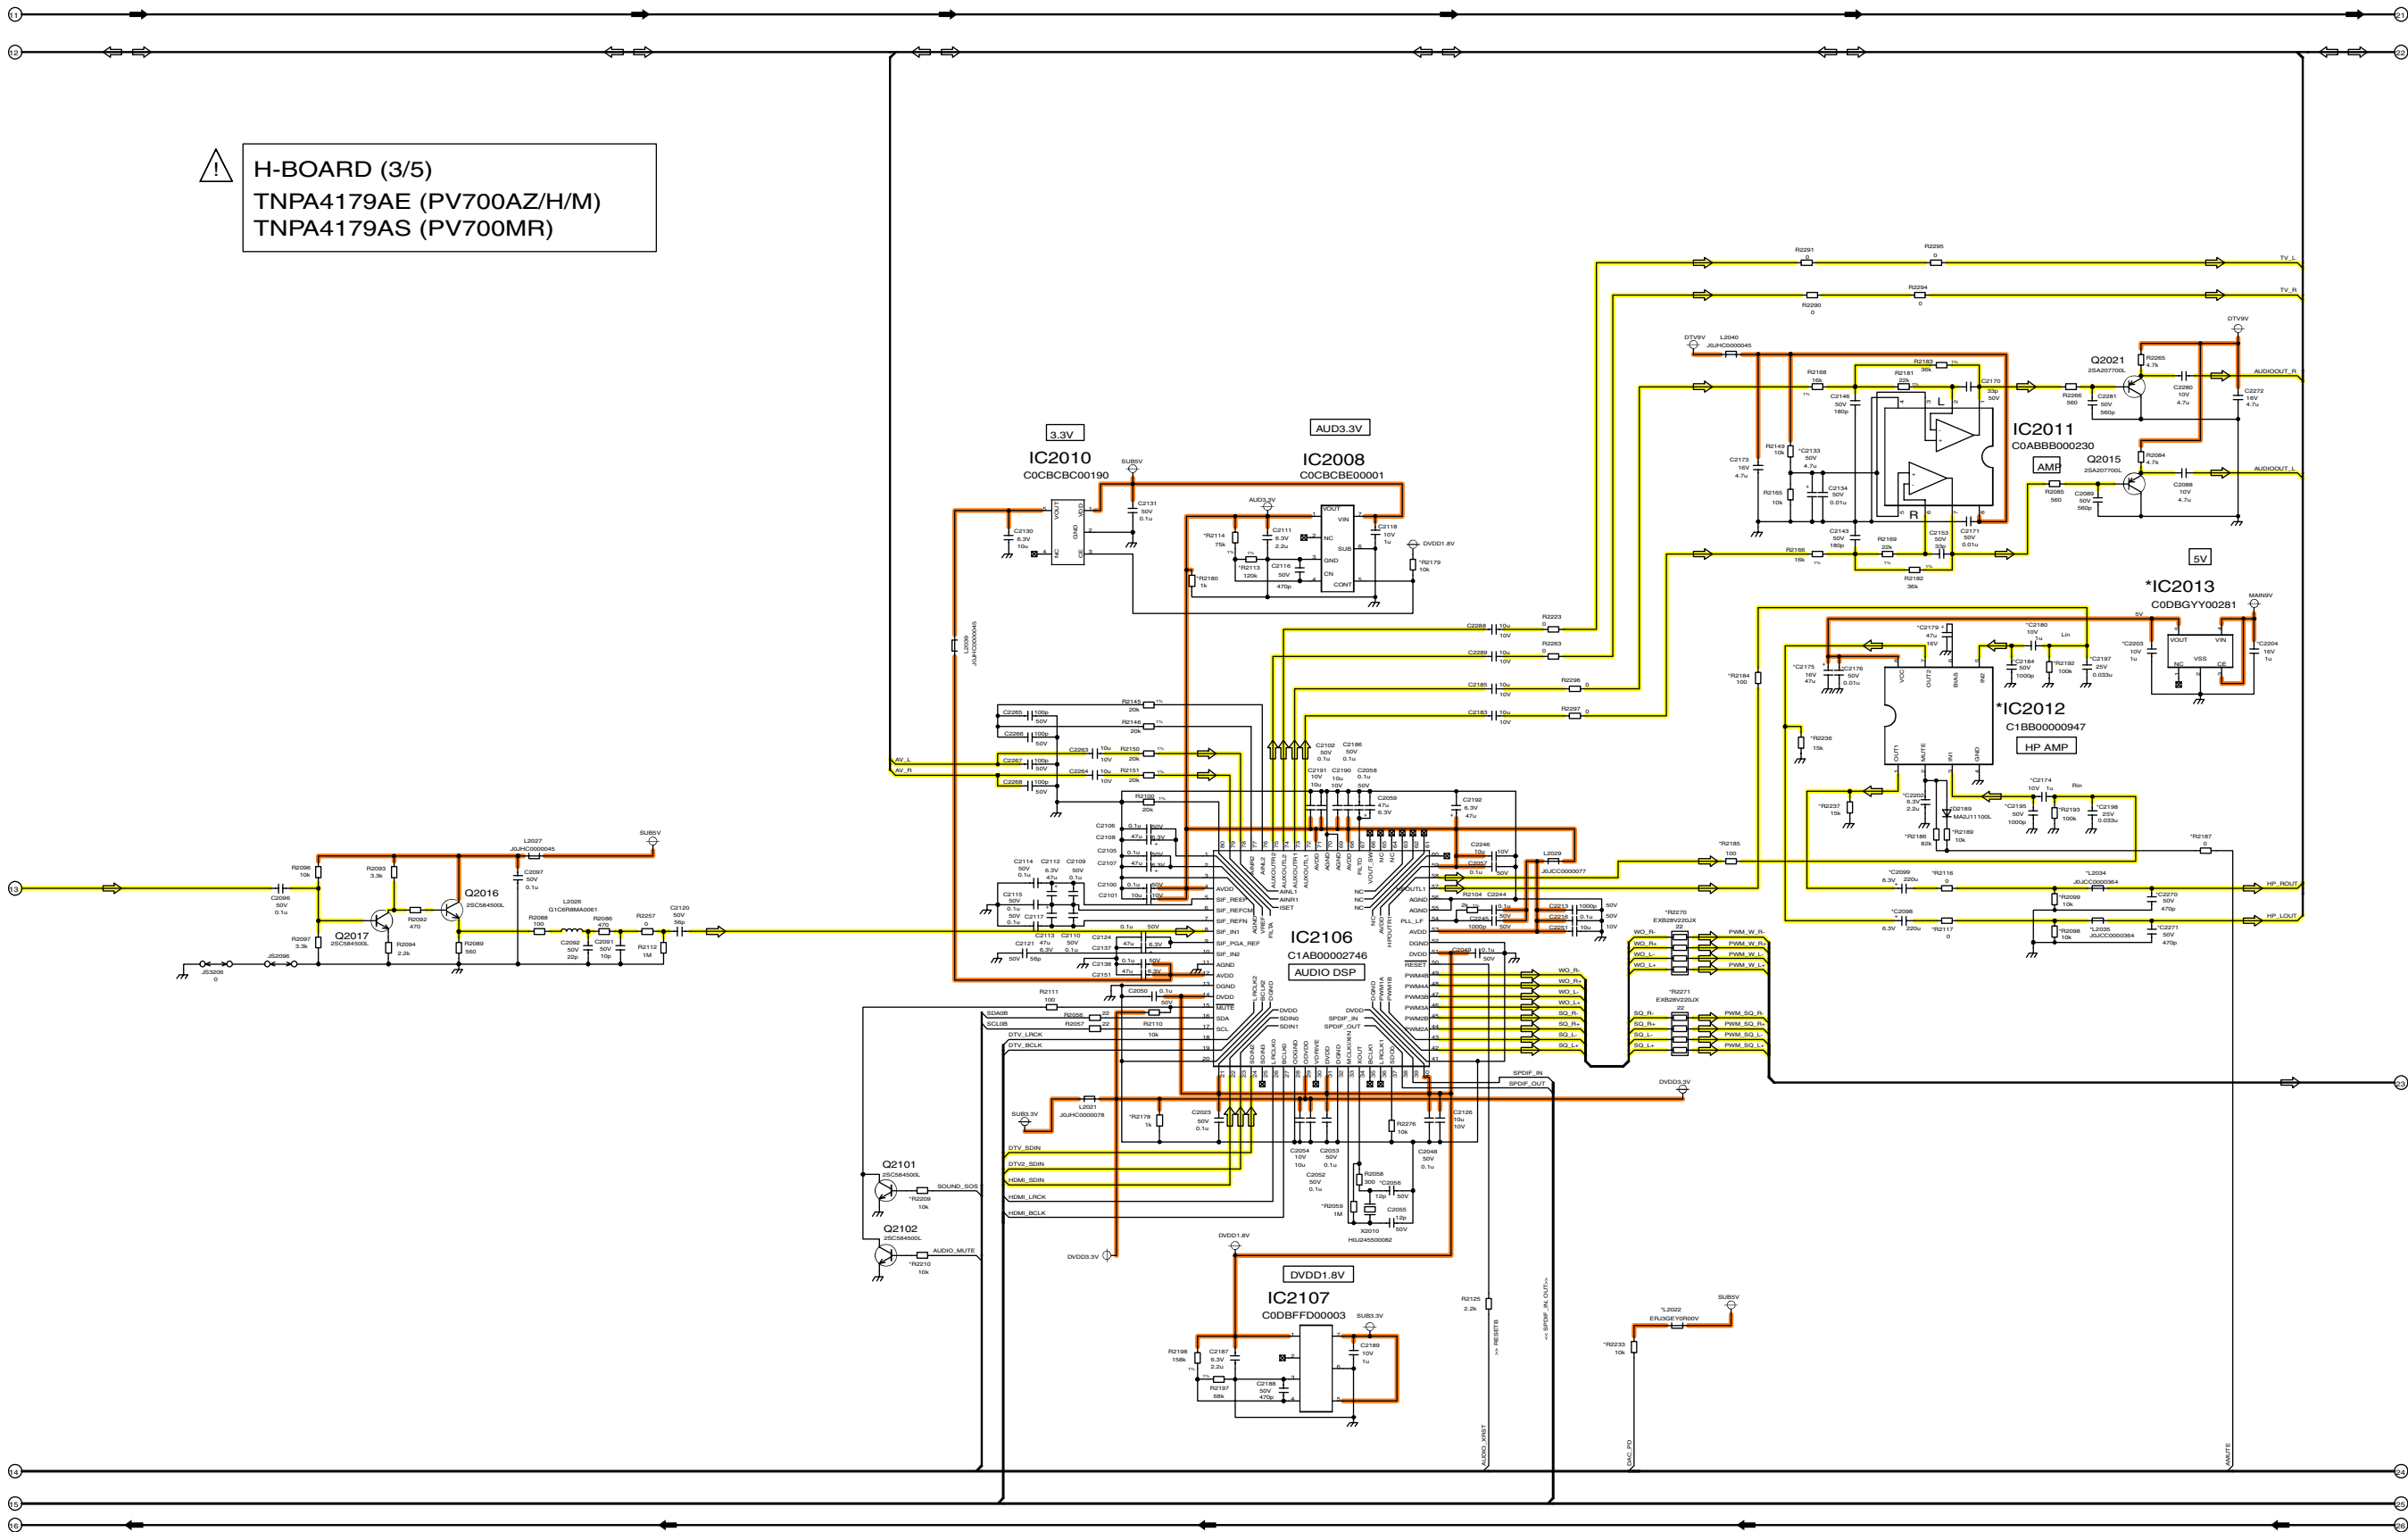


⚠ H-BOARD (3/5)
TNPA4179AE (PV700AZ/H/M)
TNPA4179AS (PV700MR)

TH-50PV700AZ/H/M/MR
H-Board (3 of 5) Schematic Diagram

TH-50PV700AZ/H/M/MR
H-Board (3 of 5) Schematic Diagram

15.13. H-Board (4 of 5) Schematic Diagram

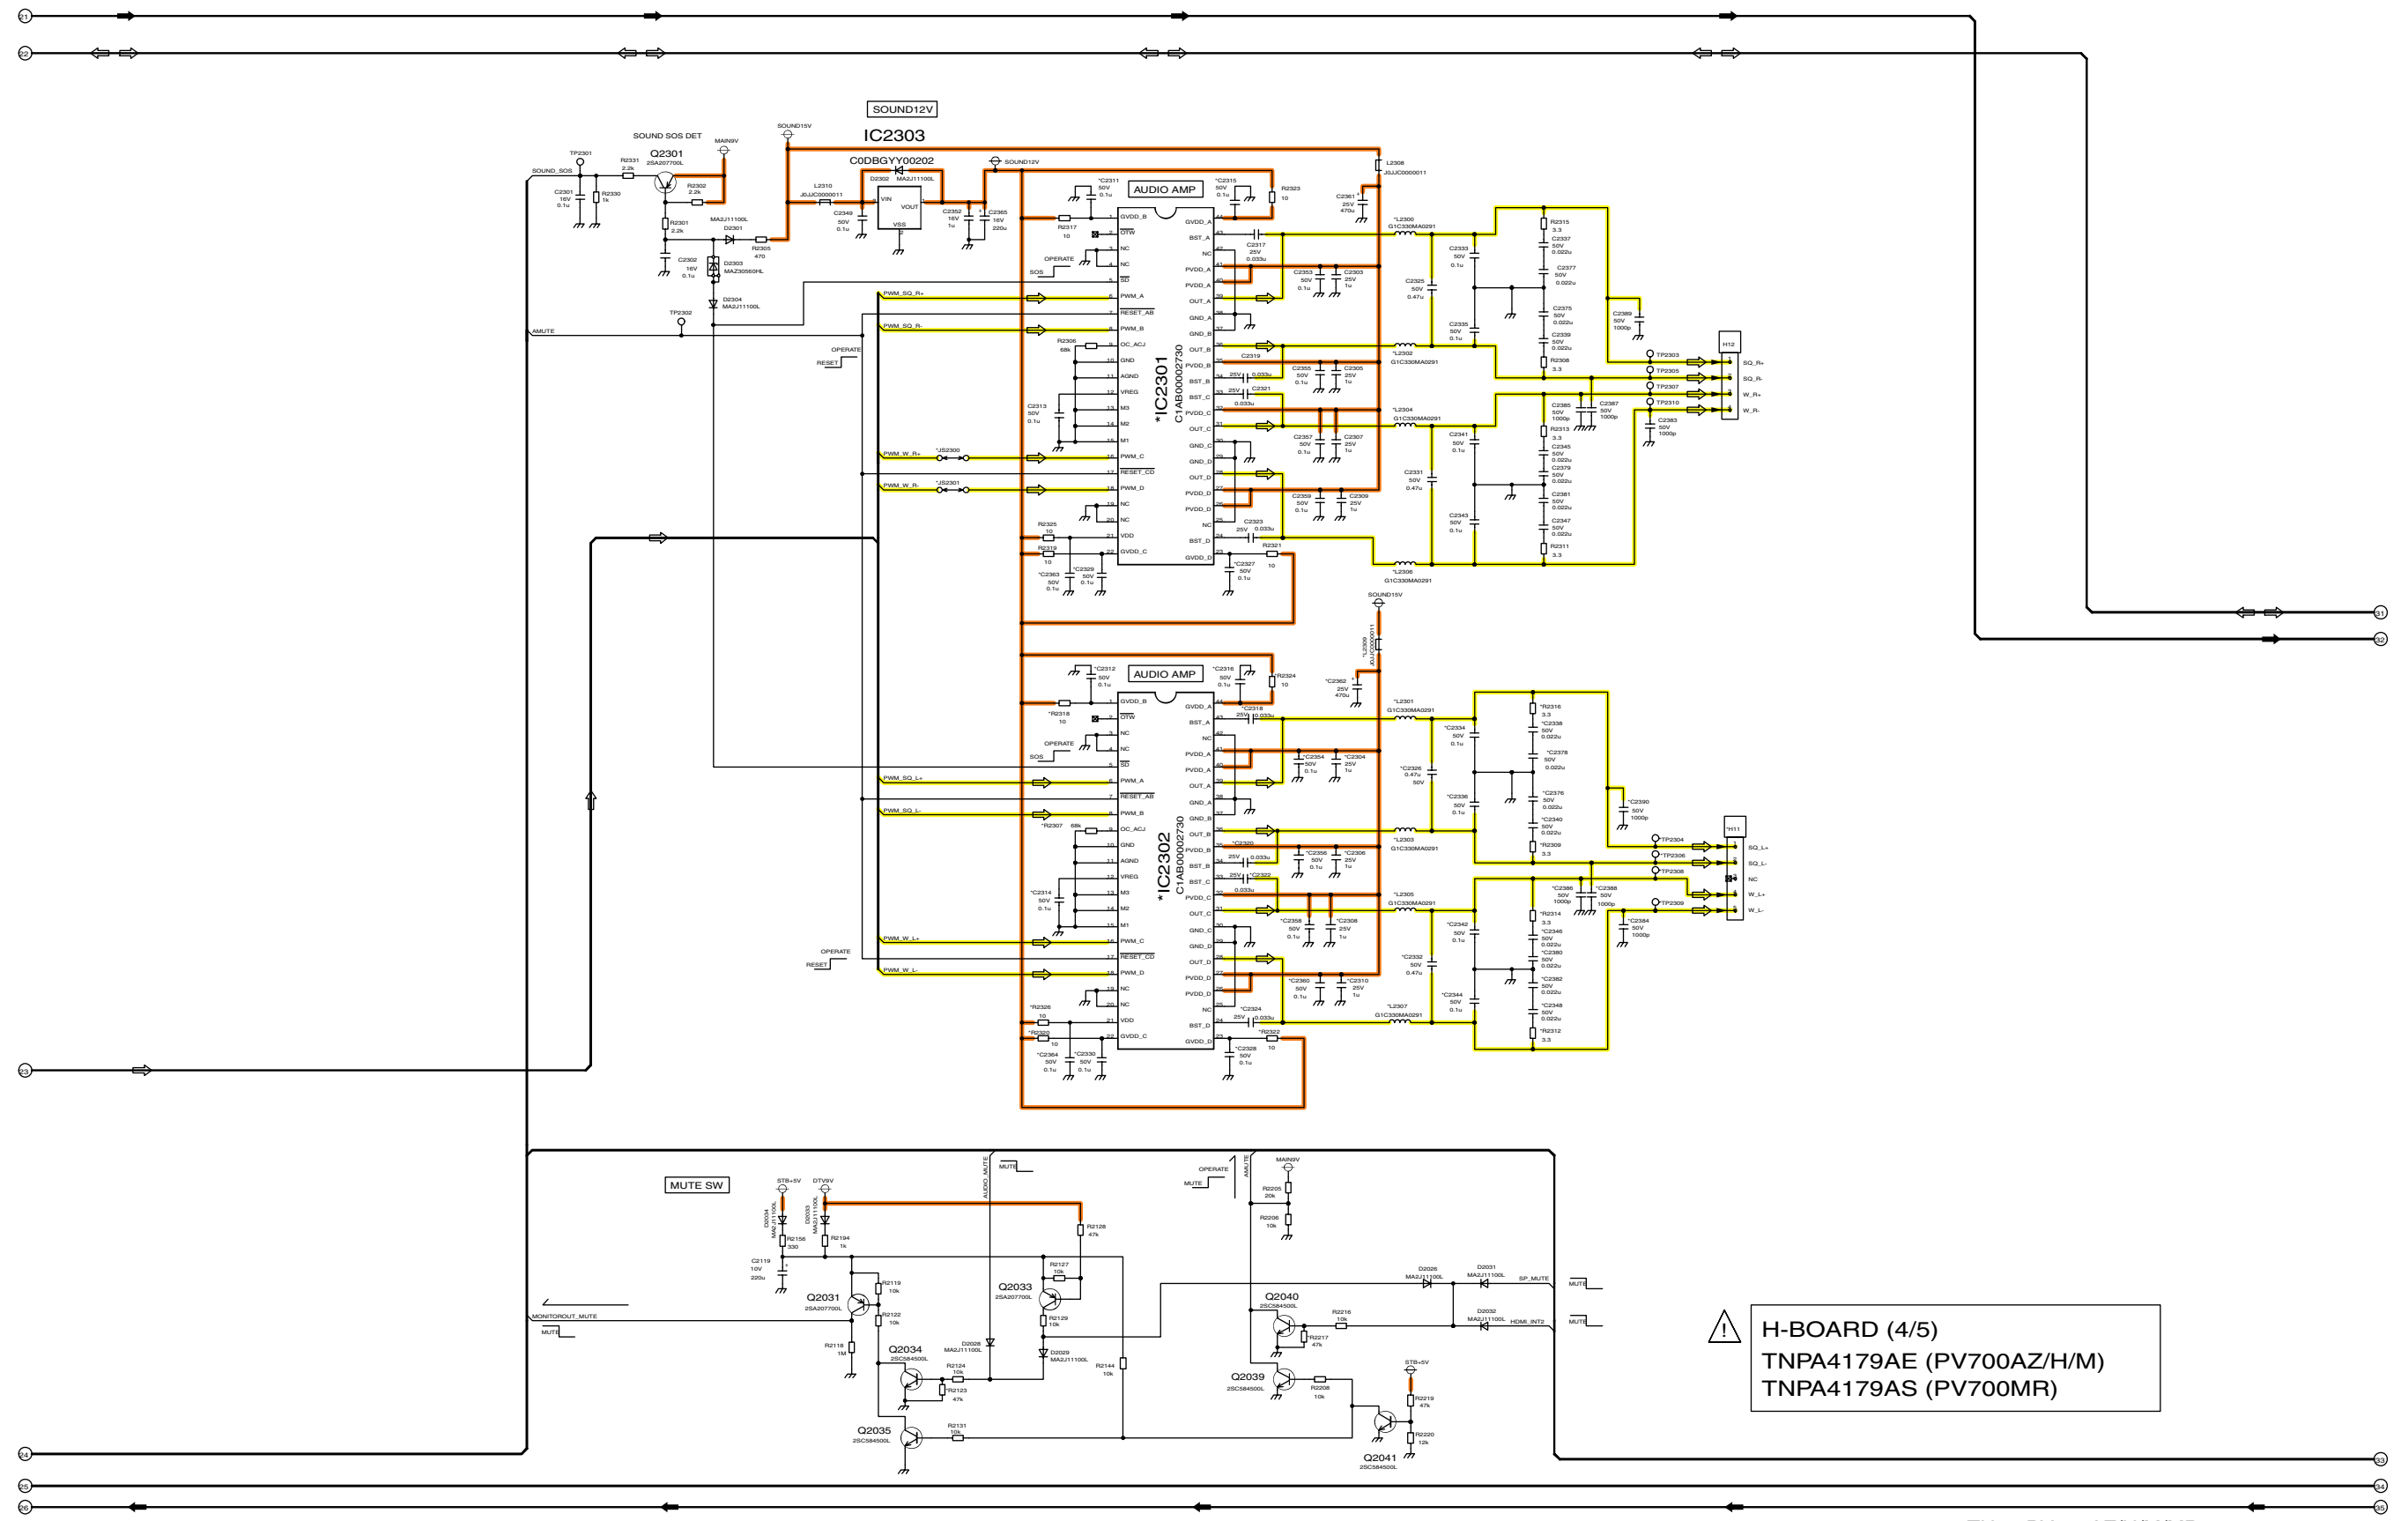

H-BOARD (4/5)
TNPA4179AE (PV700AZ/H/M)
TNPA4179AS (PV700MR)

TH-50PV700AZ/H/M/MR
 H-Board (4 of 5) Schematic Diagram

TH-50PV700AZ/H/M/MR
 H-Board (4 of 5) Schematic Diagram

28

29

30

31

32


33

34

35

36


15.14. H-Board (5 of 5) Schematic Diagram

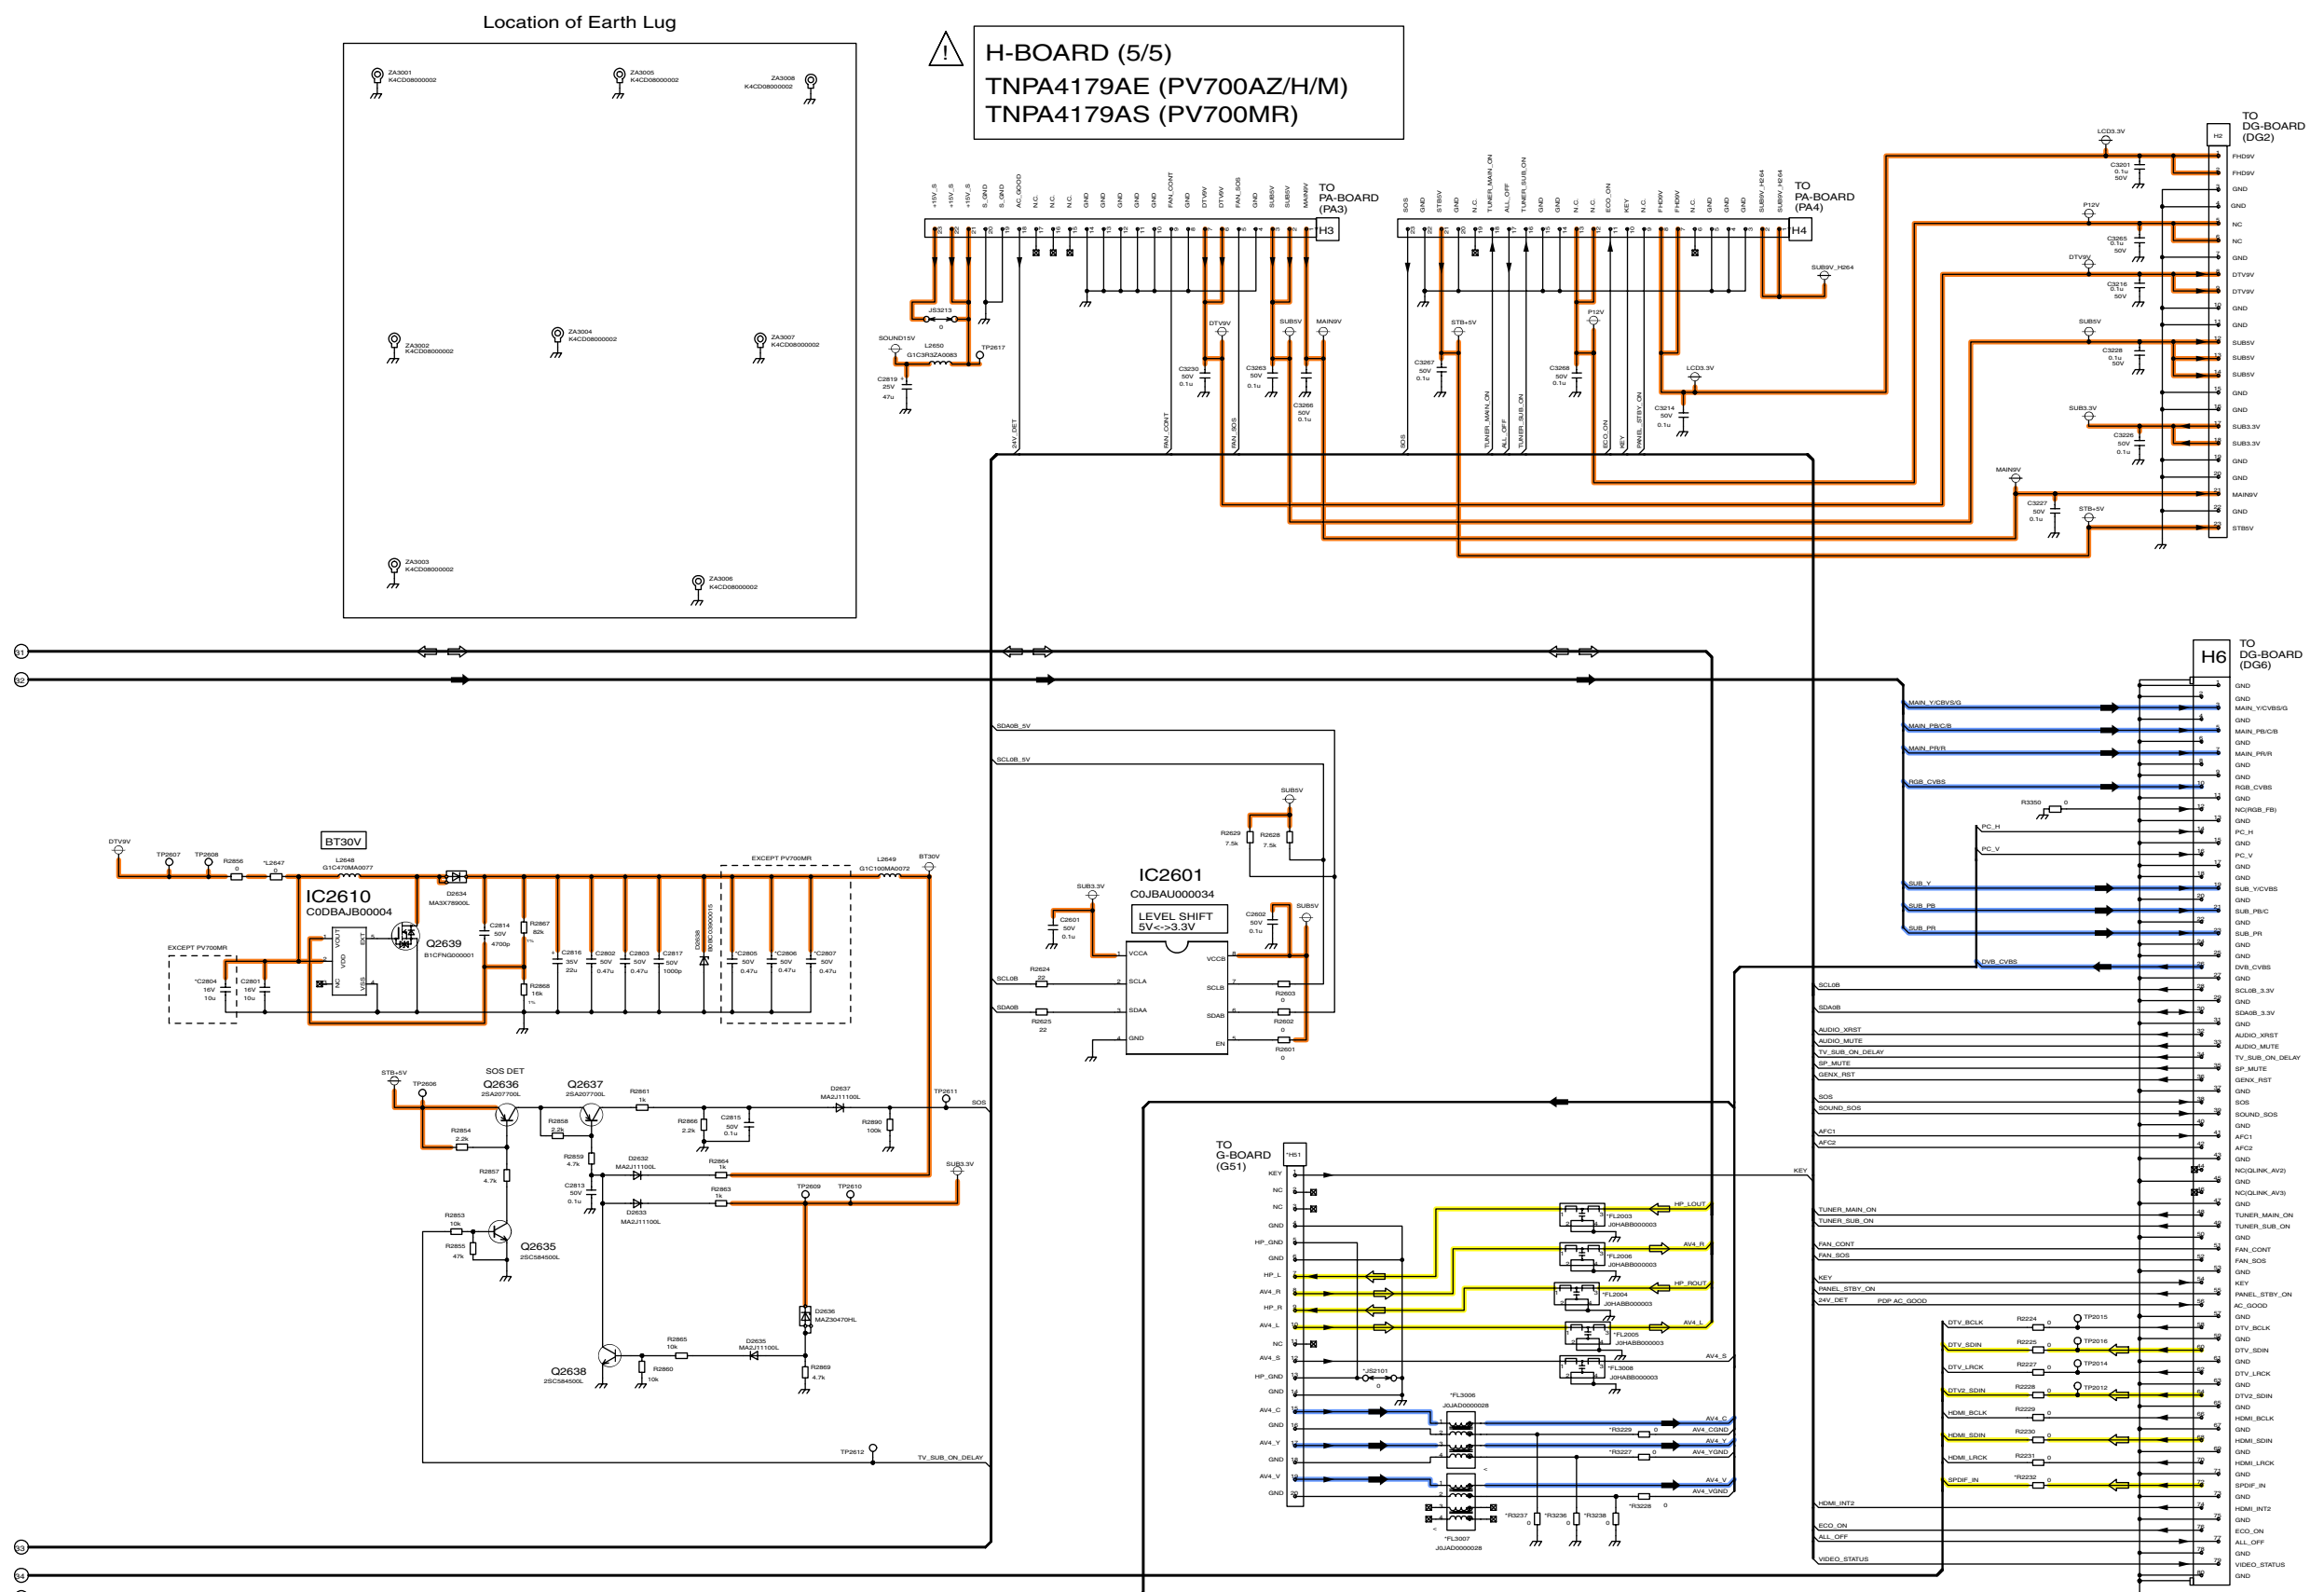

TH-50PV700AZ/H/M/MR
H-Board (5 of 5) Schematic Diagram

TH-50PV700AZ/H/M/MR
H-Board (5 of 5) Schematic Diagram


15.15. DG-Board (1 of 3) Block Diagram

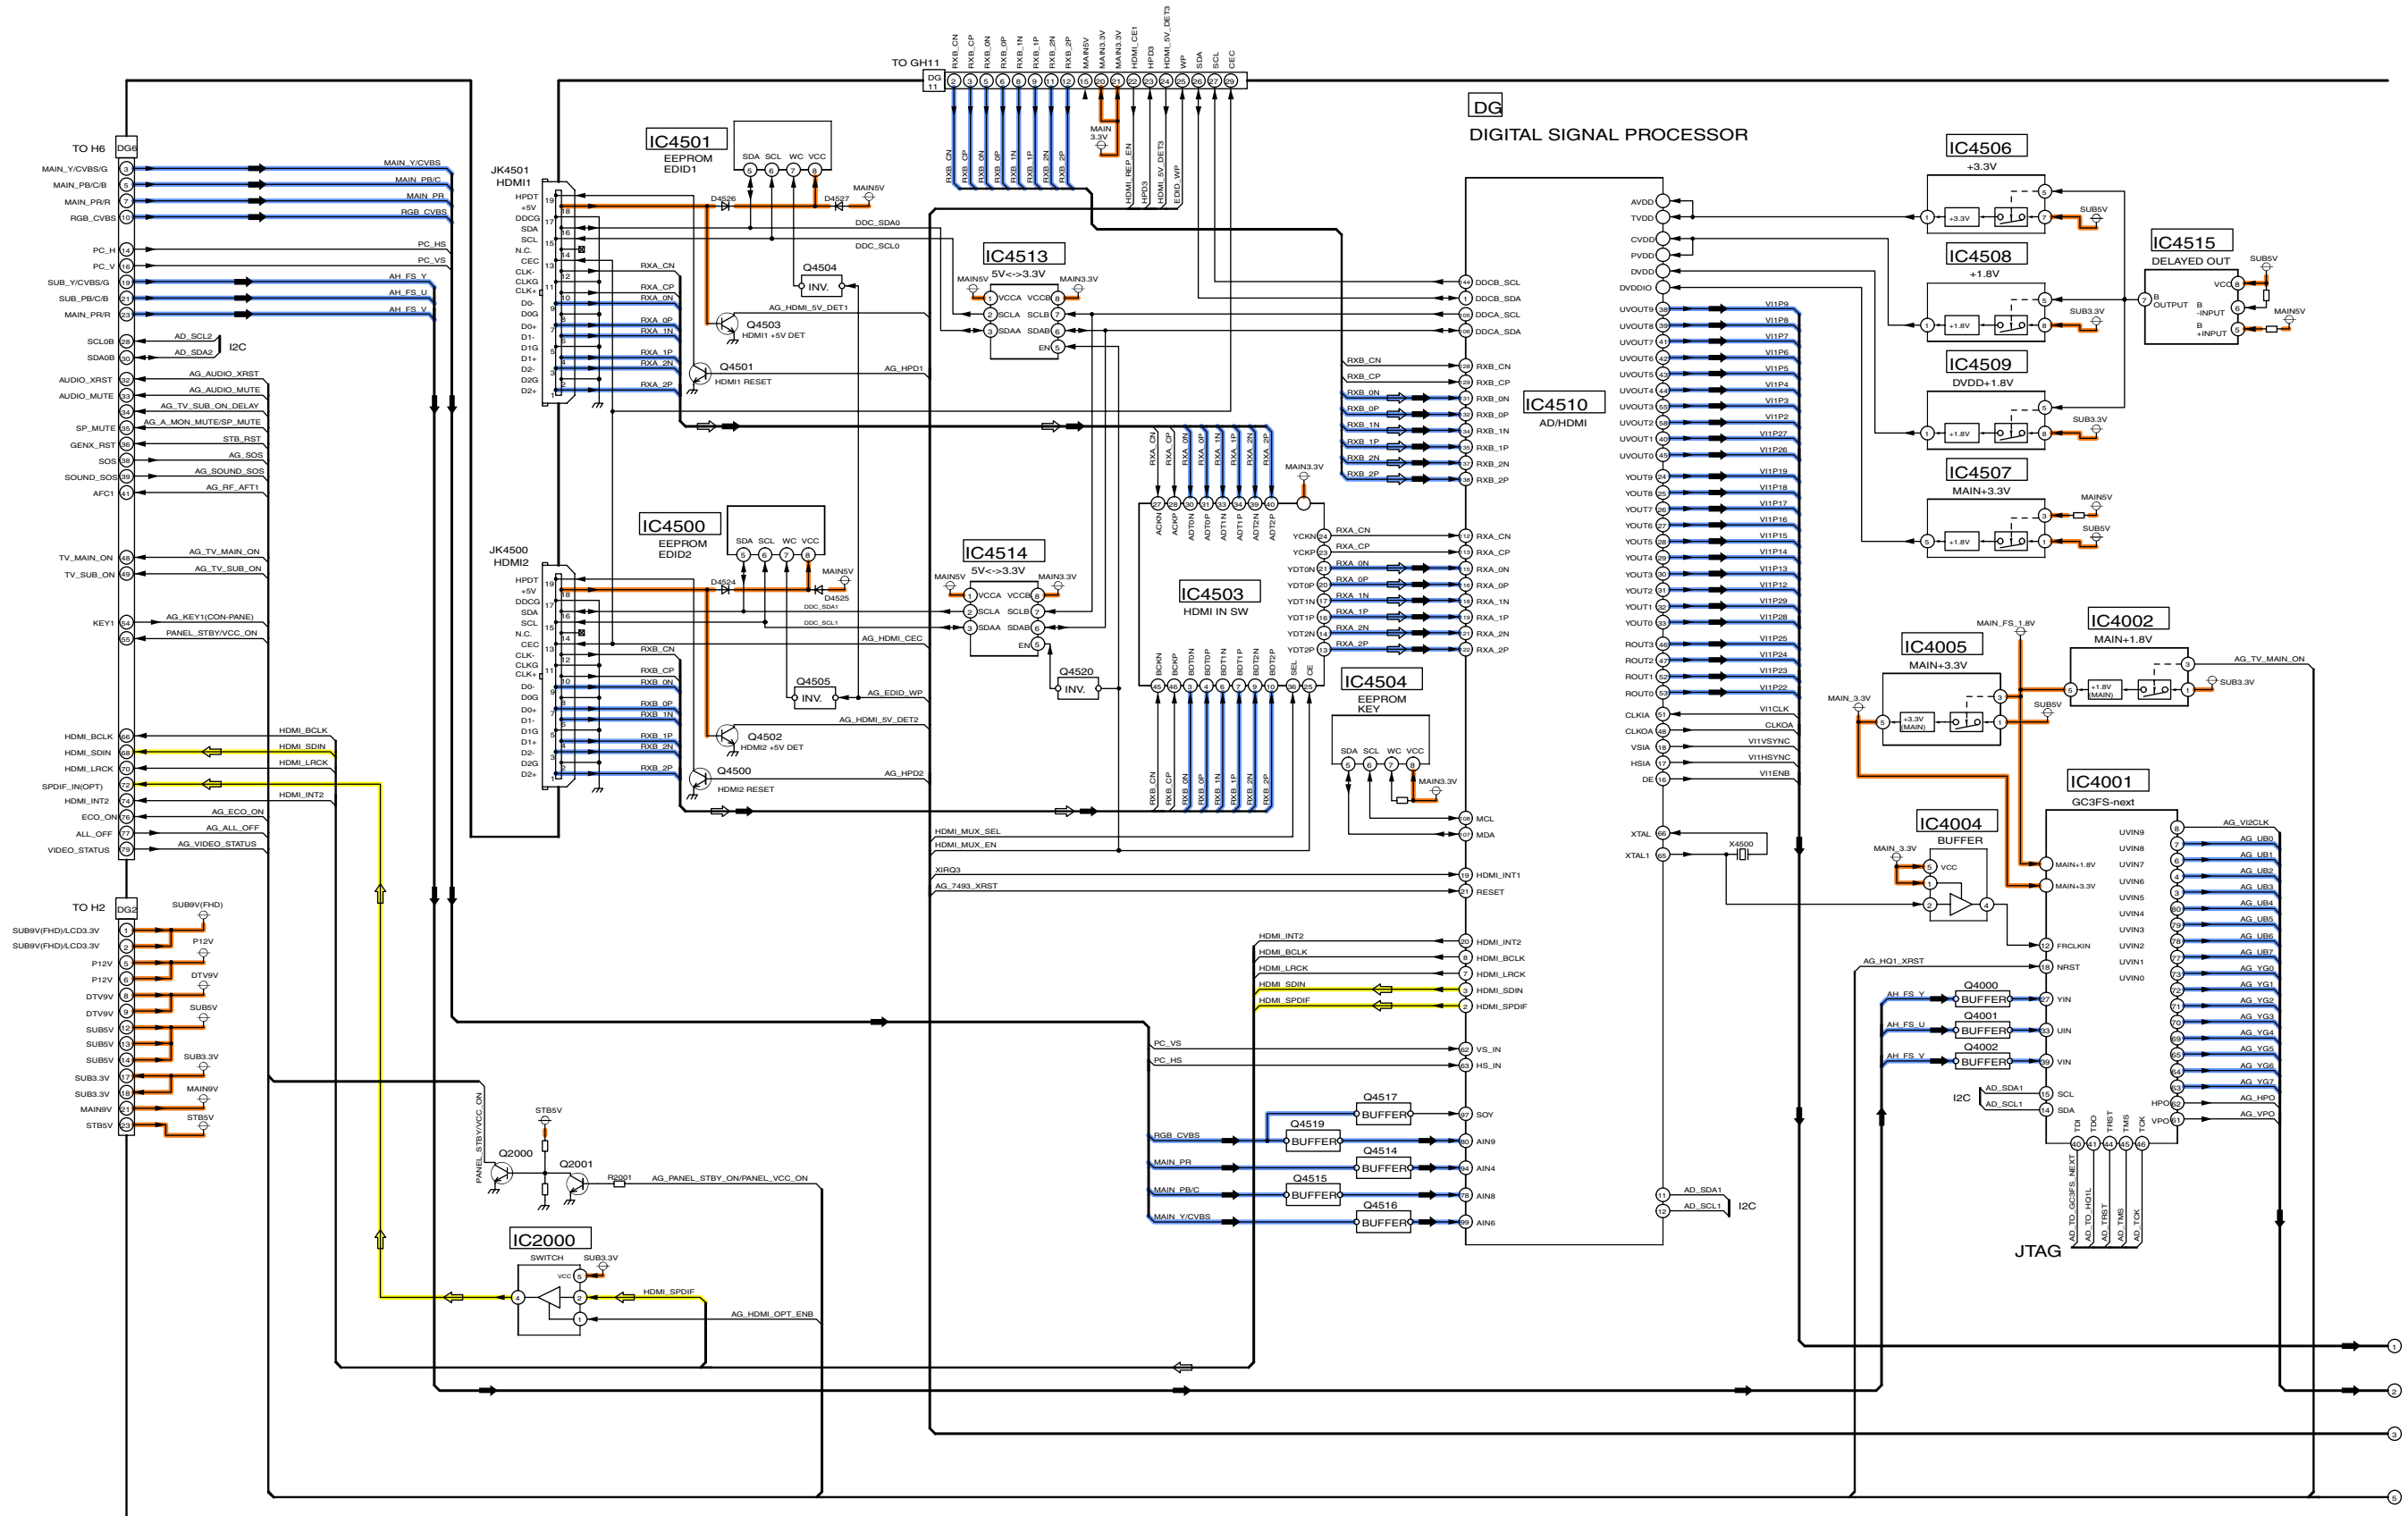

TH-50PV700AZ/H/M/MR
DG-Board (1 of 3) Block Diagram

TH-50PV700AZ/H/M/MR
DG-Board (1 of 3) Block Diagram


15.16. DG-Board (2 of 3) Block Diagram

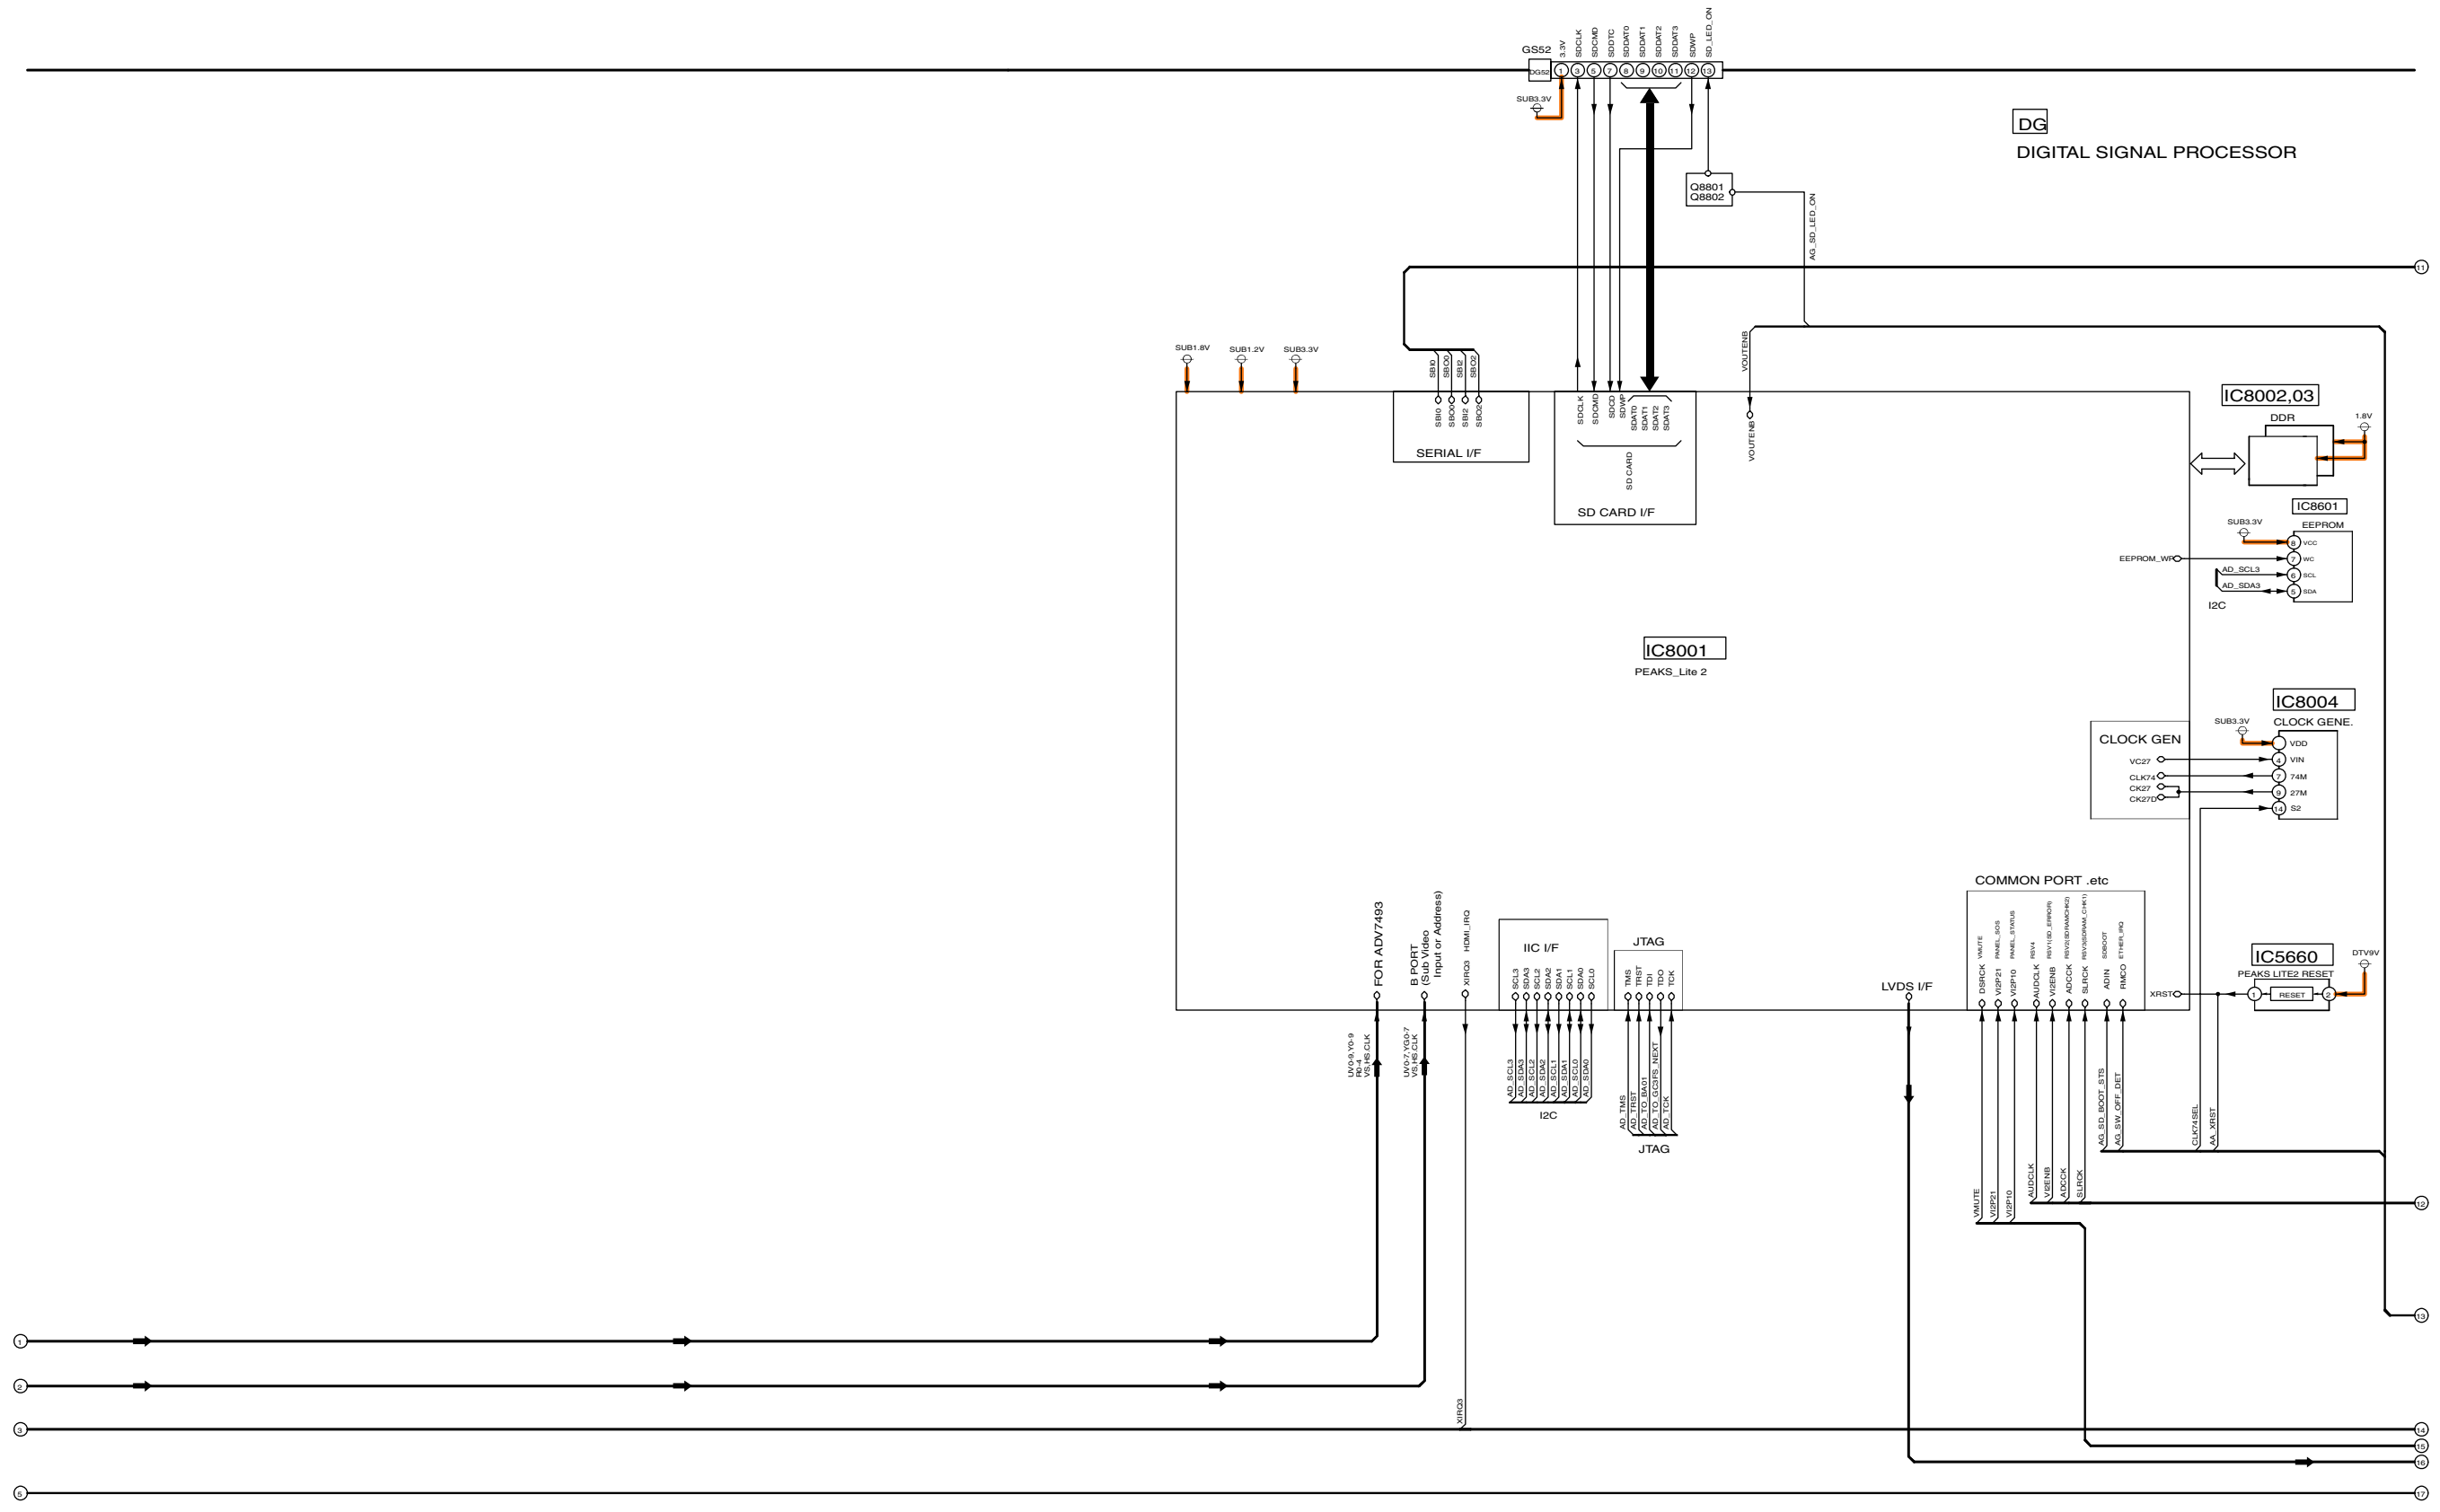

TH-50PV700AZ/H/M/MR
DG-Board (2 of 3) Block Diagram

TH-50PV700AZ/H/M/MR
DG-Board (2 of 3) Block Diagram

15.17. DG-Board (3 of 3) Block Diagram

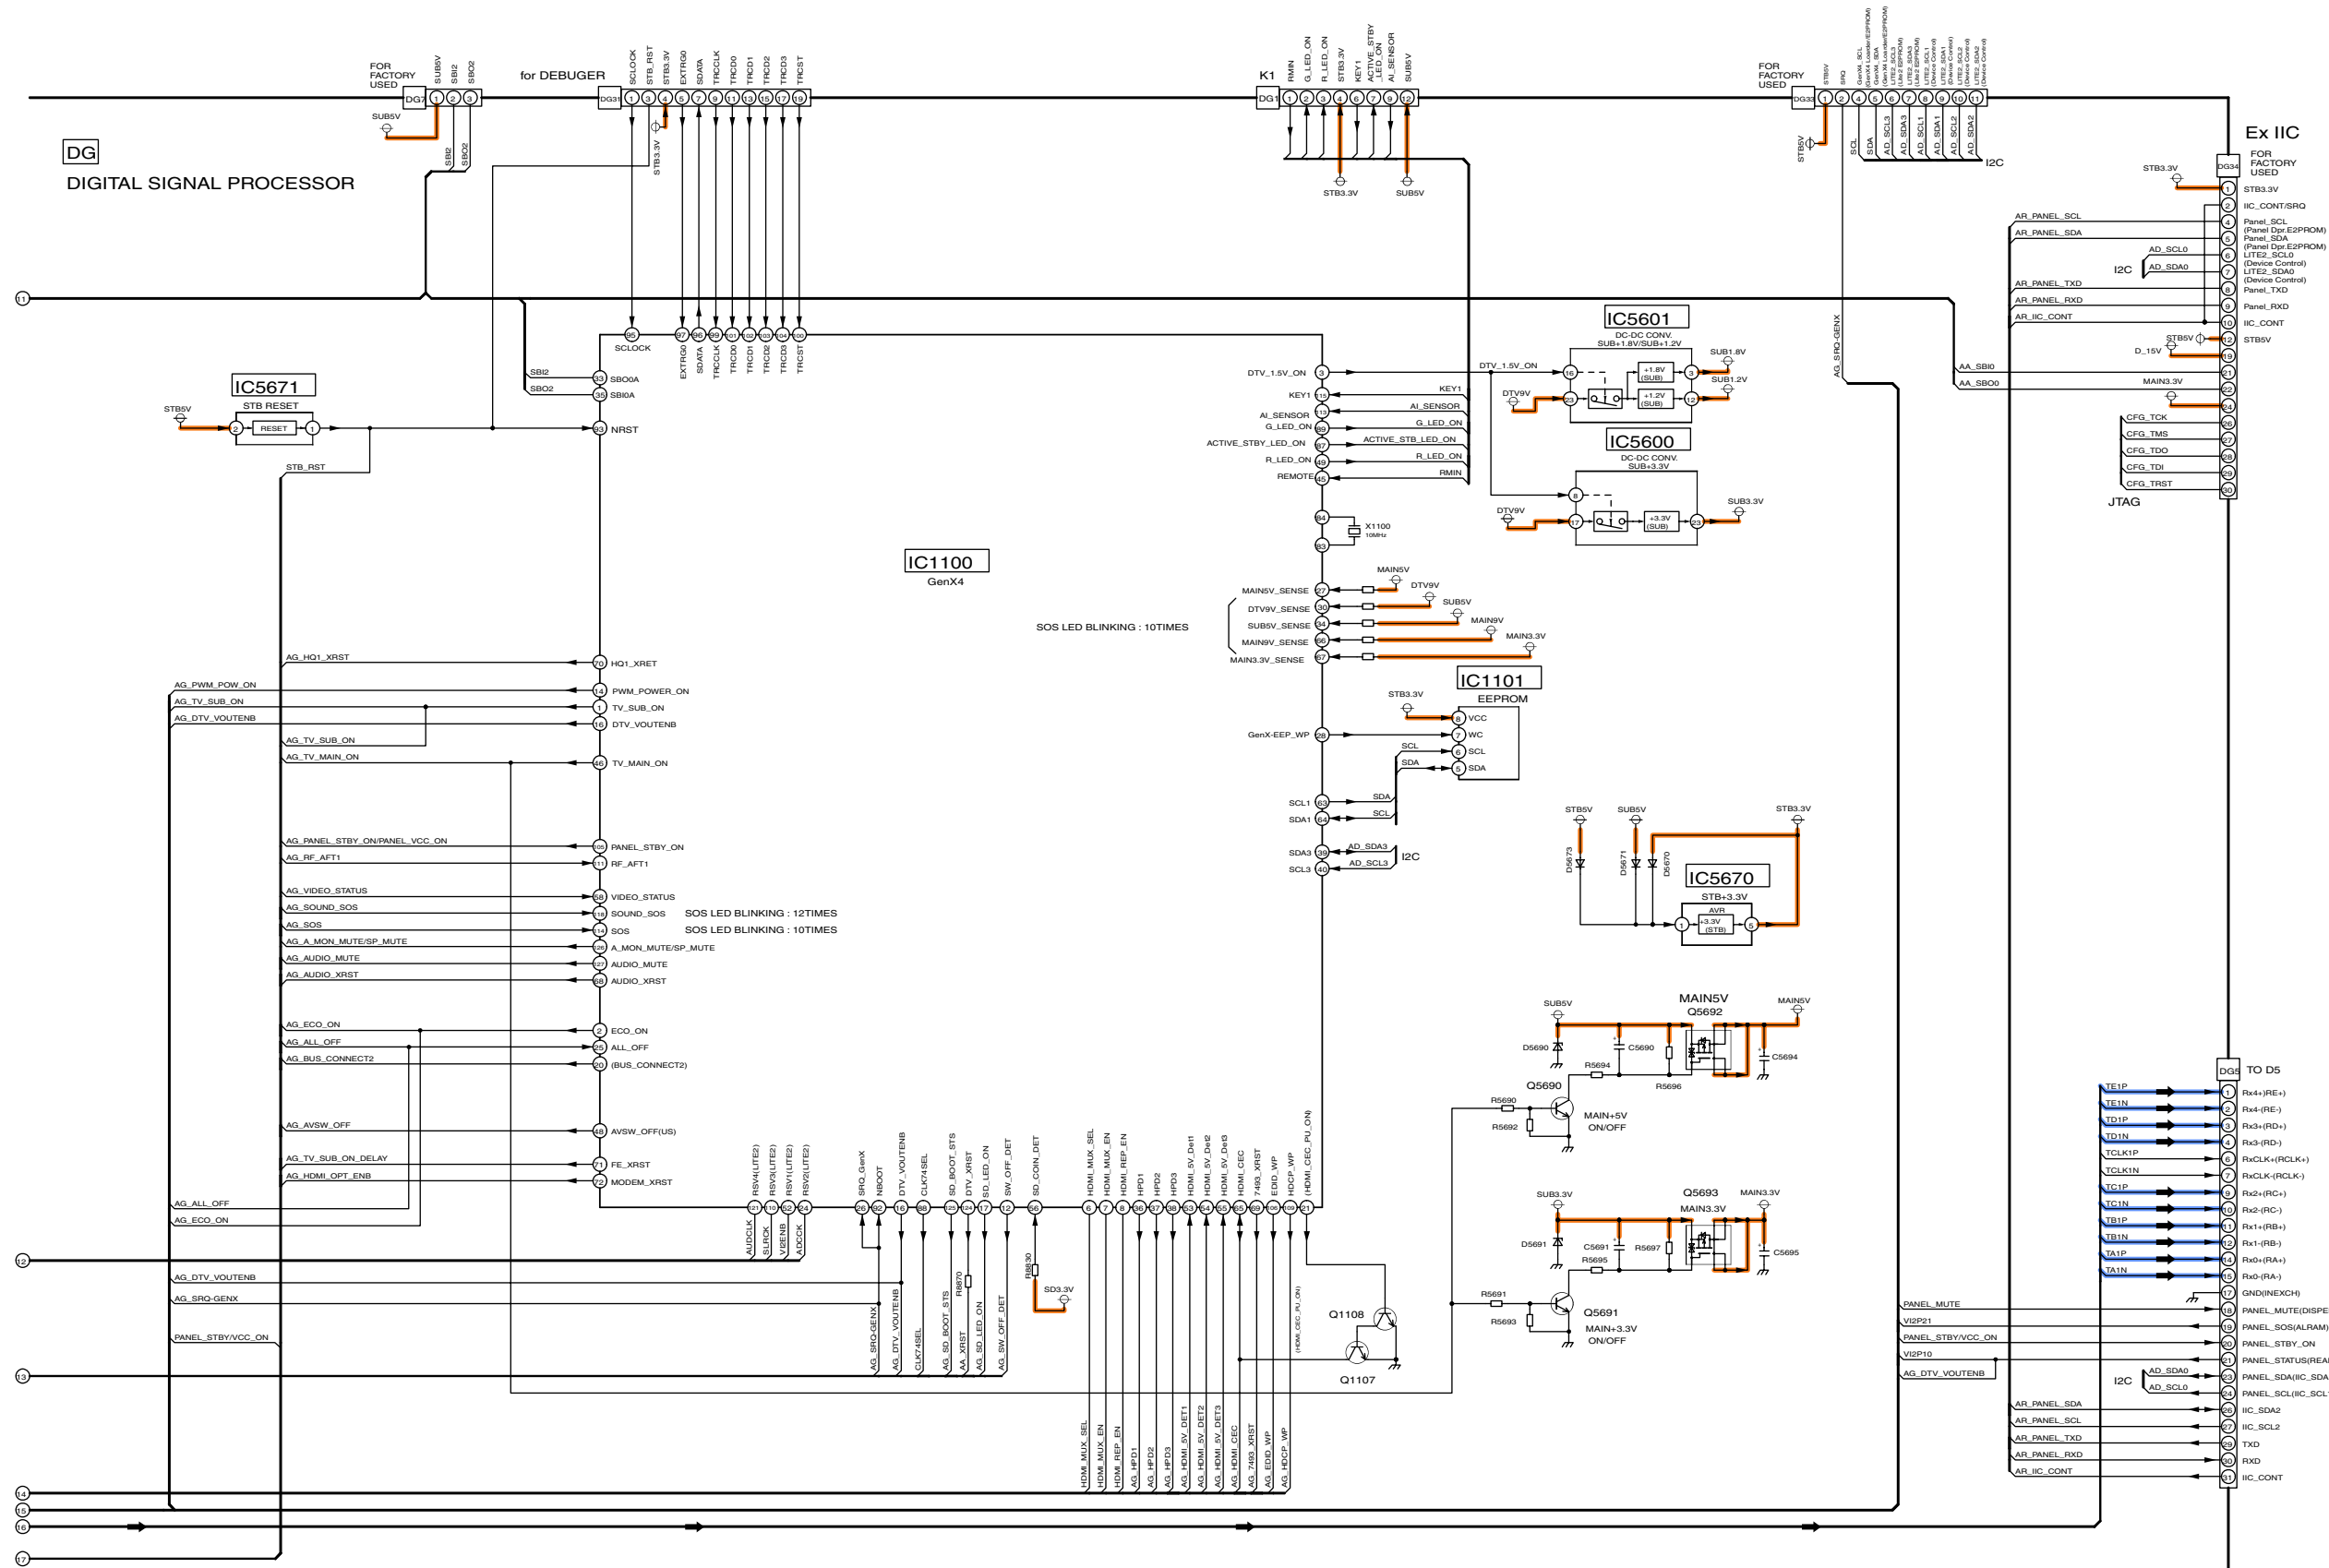


TH-50PV700AZ/H/M/MR
DG-Board (3 of 3) Block Diagram

TH-50PV700AZ/H/M/MR
DG-Board (3 of 3) Block Diagram

15.18. DG-Board (1 of 10) Schematic Diagram

A
B
C
D
E
F

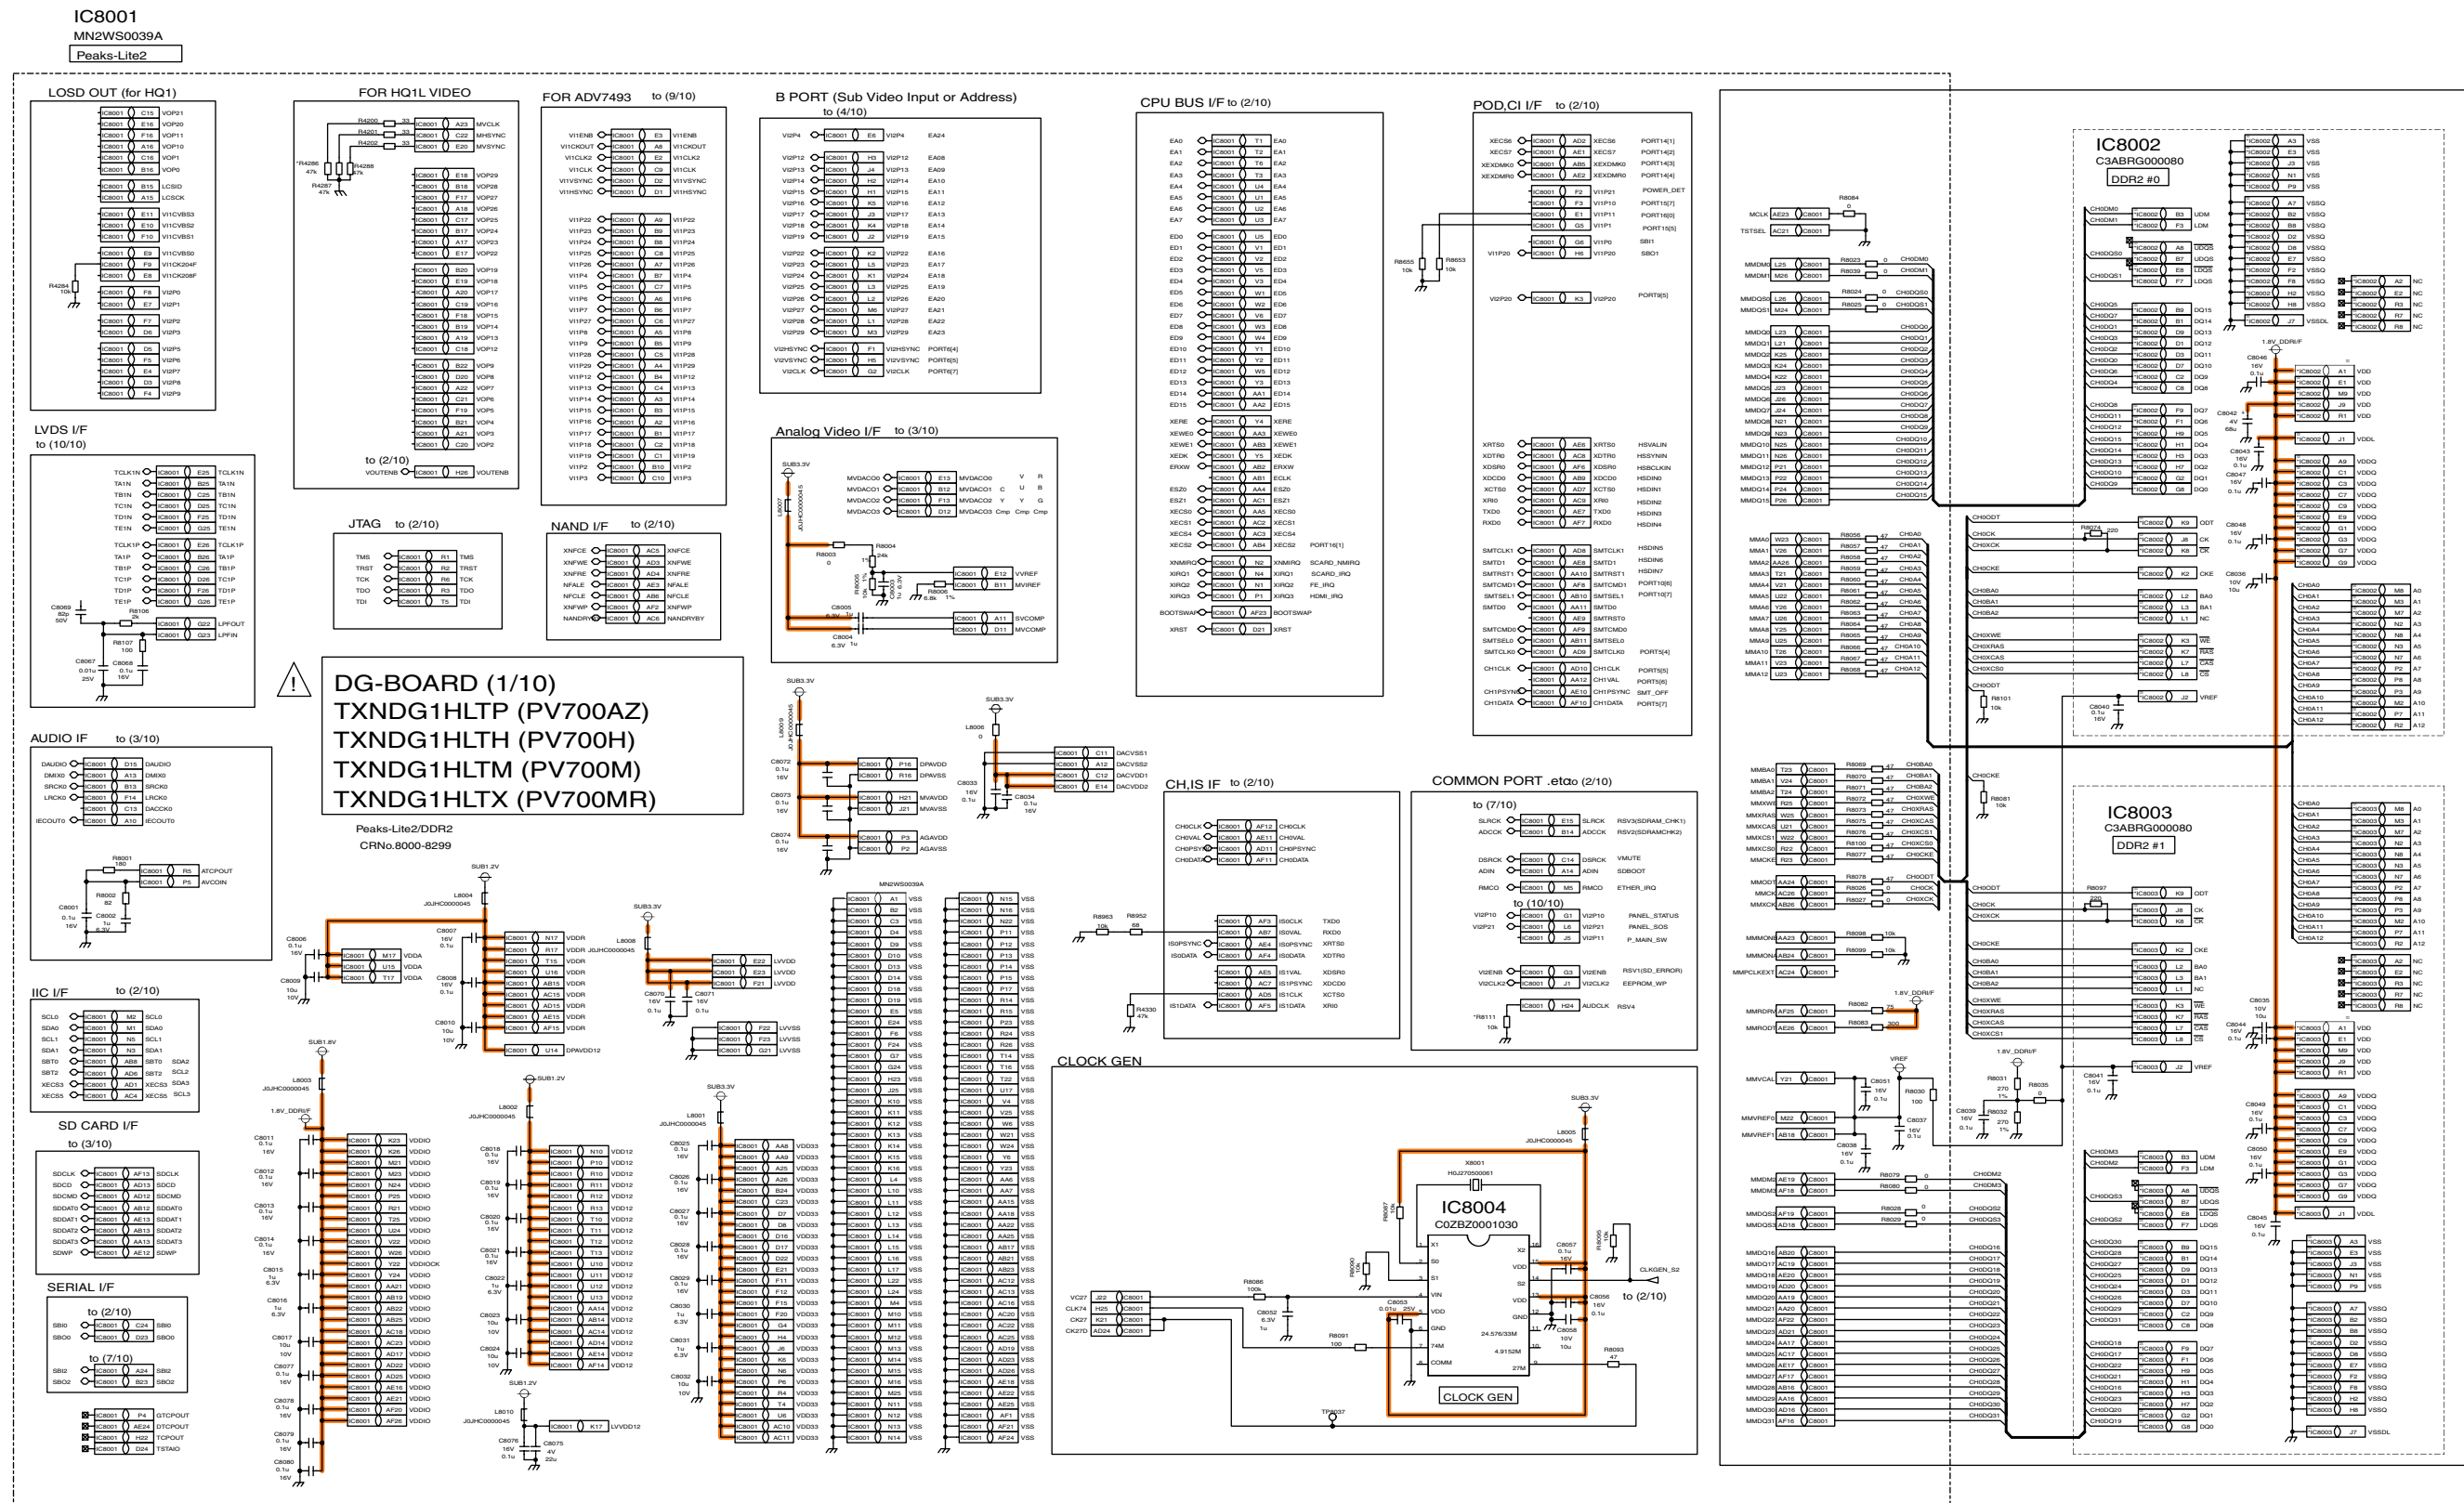


TH-50PV700AZ/H/M/MR
DG-Board (1 of 10) Schematic Diagram

TH-50PV700AZ/H/M/MR
DG-Board (1 of 10) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.19. DG-Board (2 of 10) Schematic Diagram

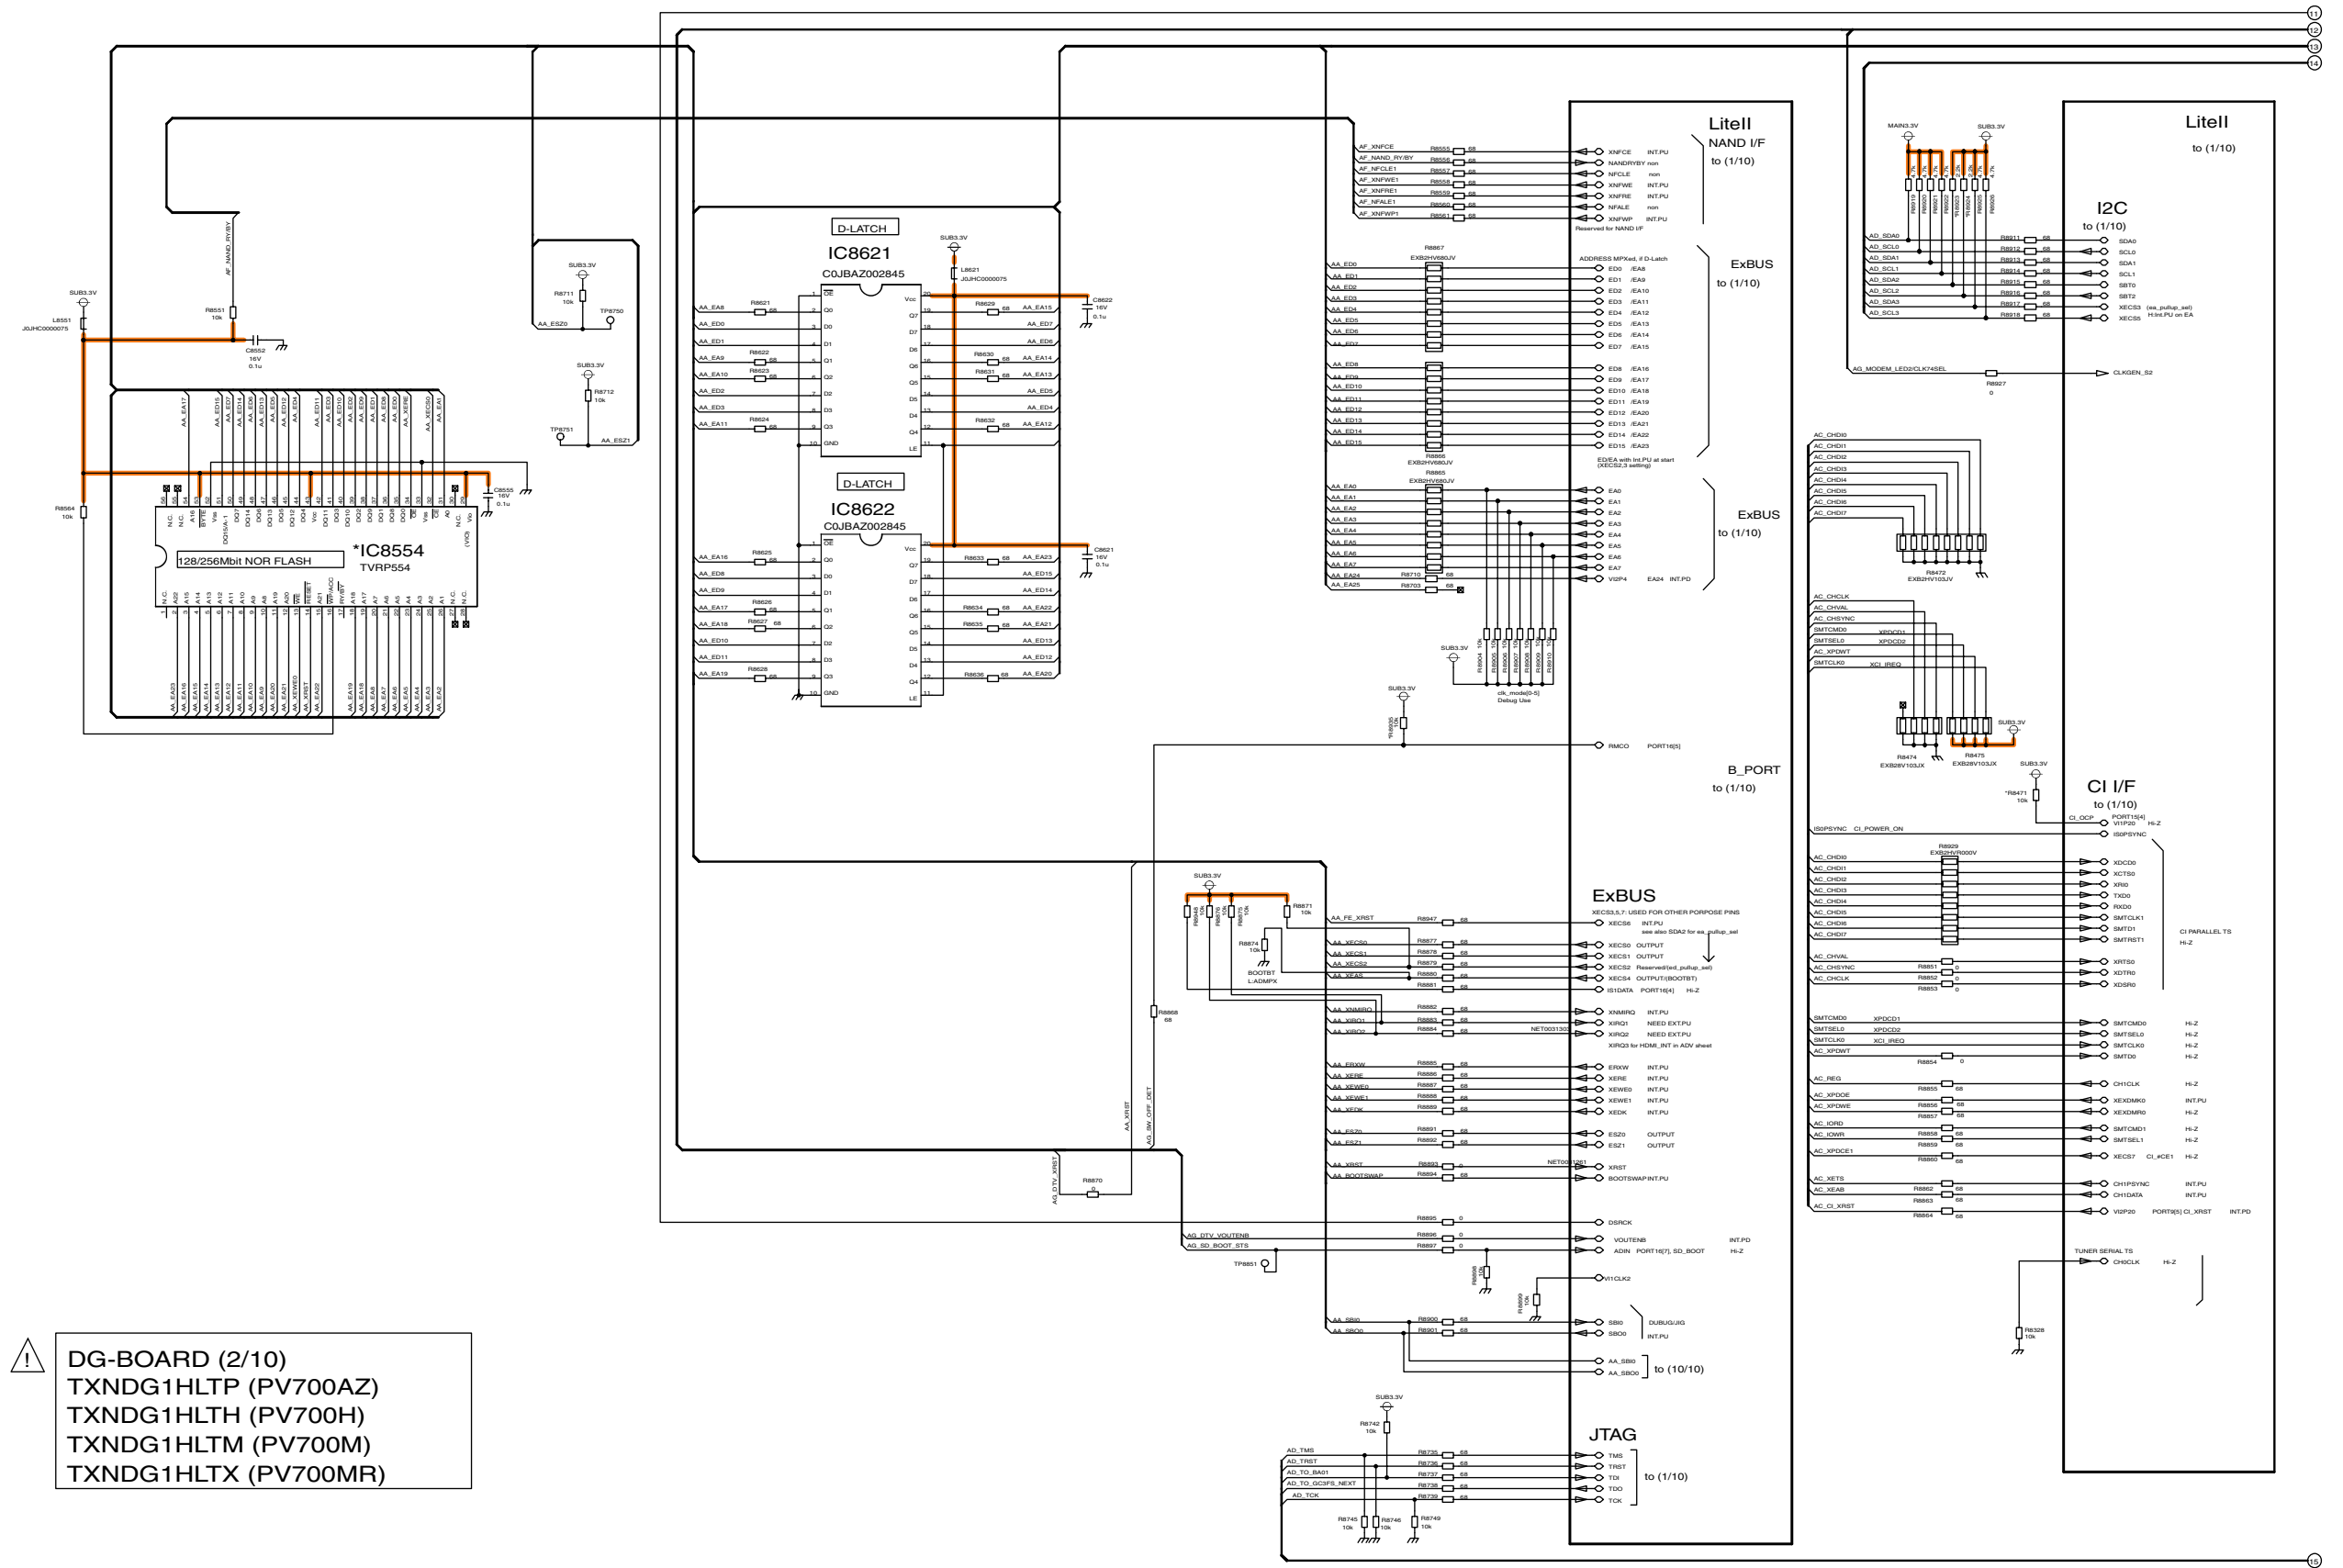

⚠️ **DG-BOARD (2/10)**
 TXNDG1HLTP (PV700AZ)
 TXNDG1HLTH (PV700H)
 TXNDG1HLTM (PV700M)
 TXNDG1HLTX (PV700MR)

TH-50PV700AZ/H/M/MR/MT
 DG-Board (2 of 10) Schematic Diagram

TH-50PV700AZ/H/M/MR
 DG-Board (2 of 10) Schematic Diagram

10

11

12

13

14


15

16

17

18

15.20. DG-Board (3 of 10) Schematic Diagram

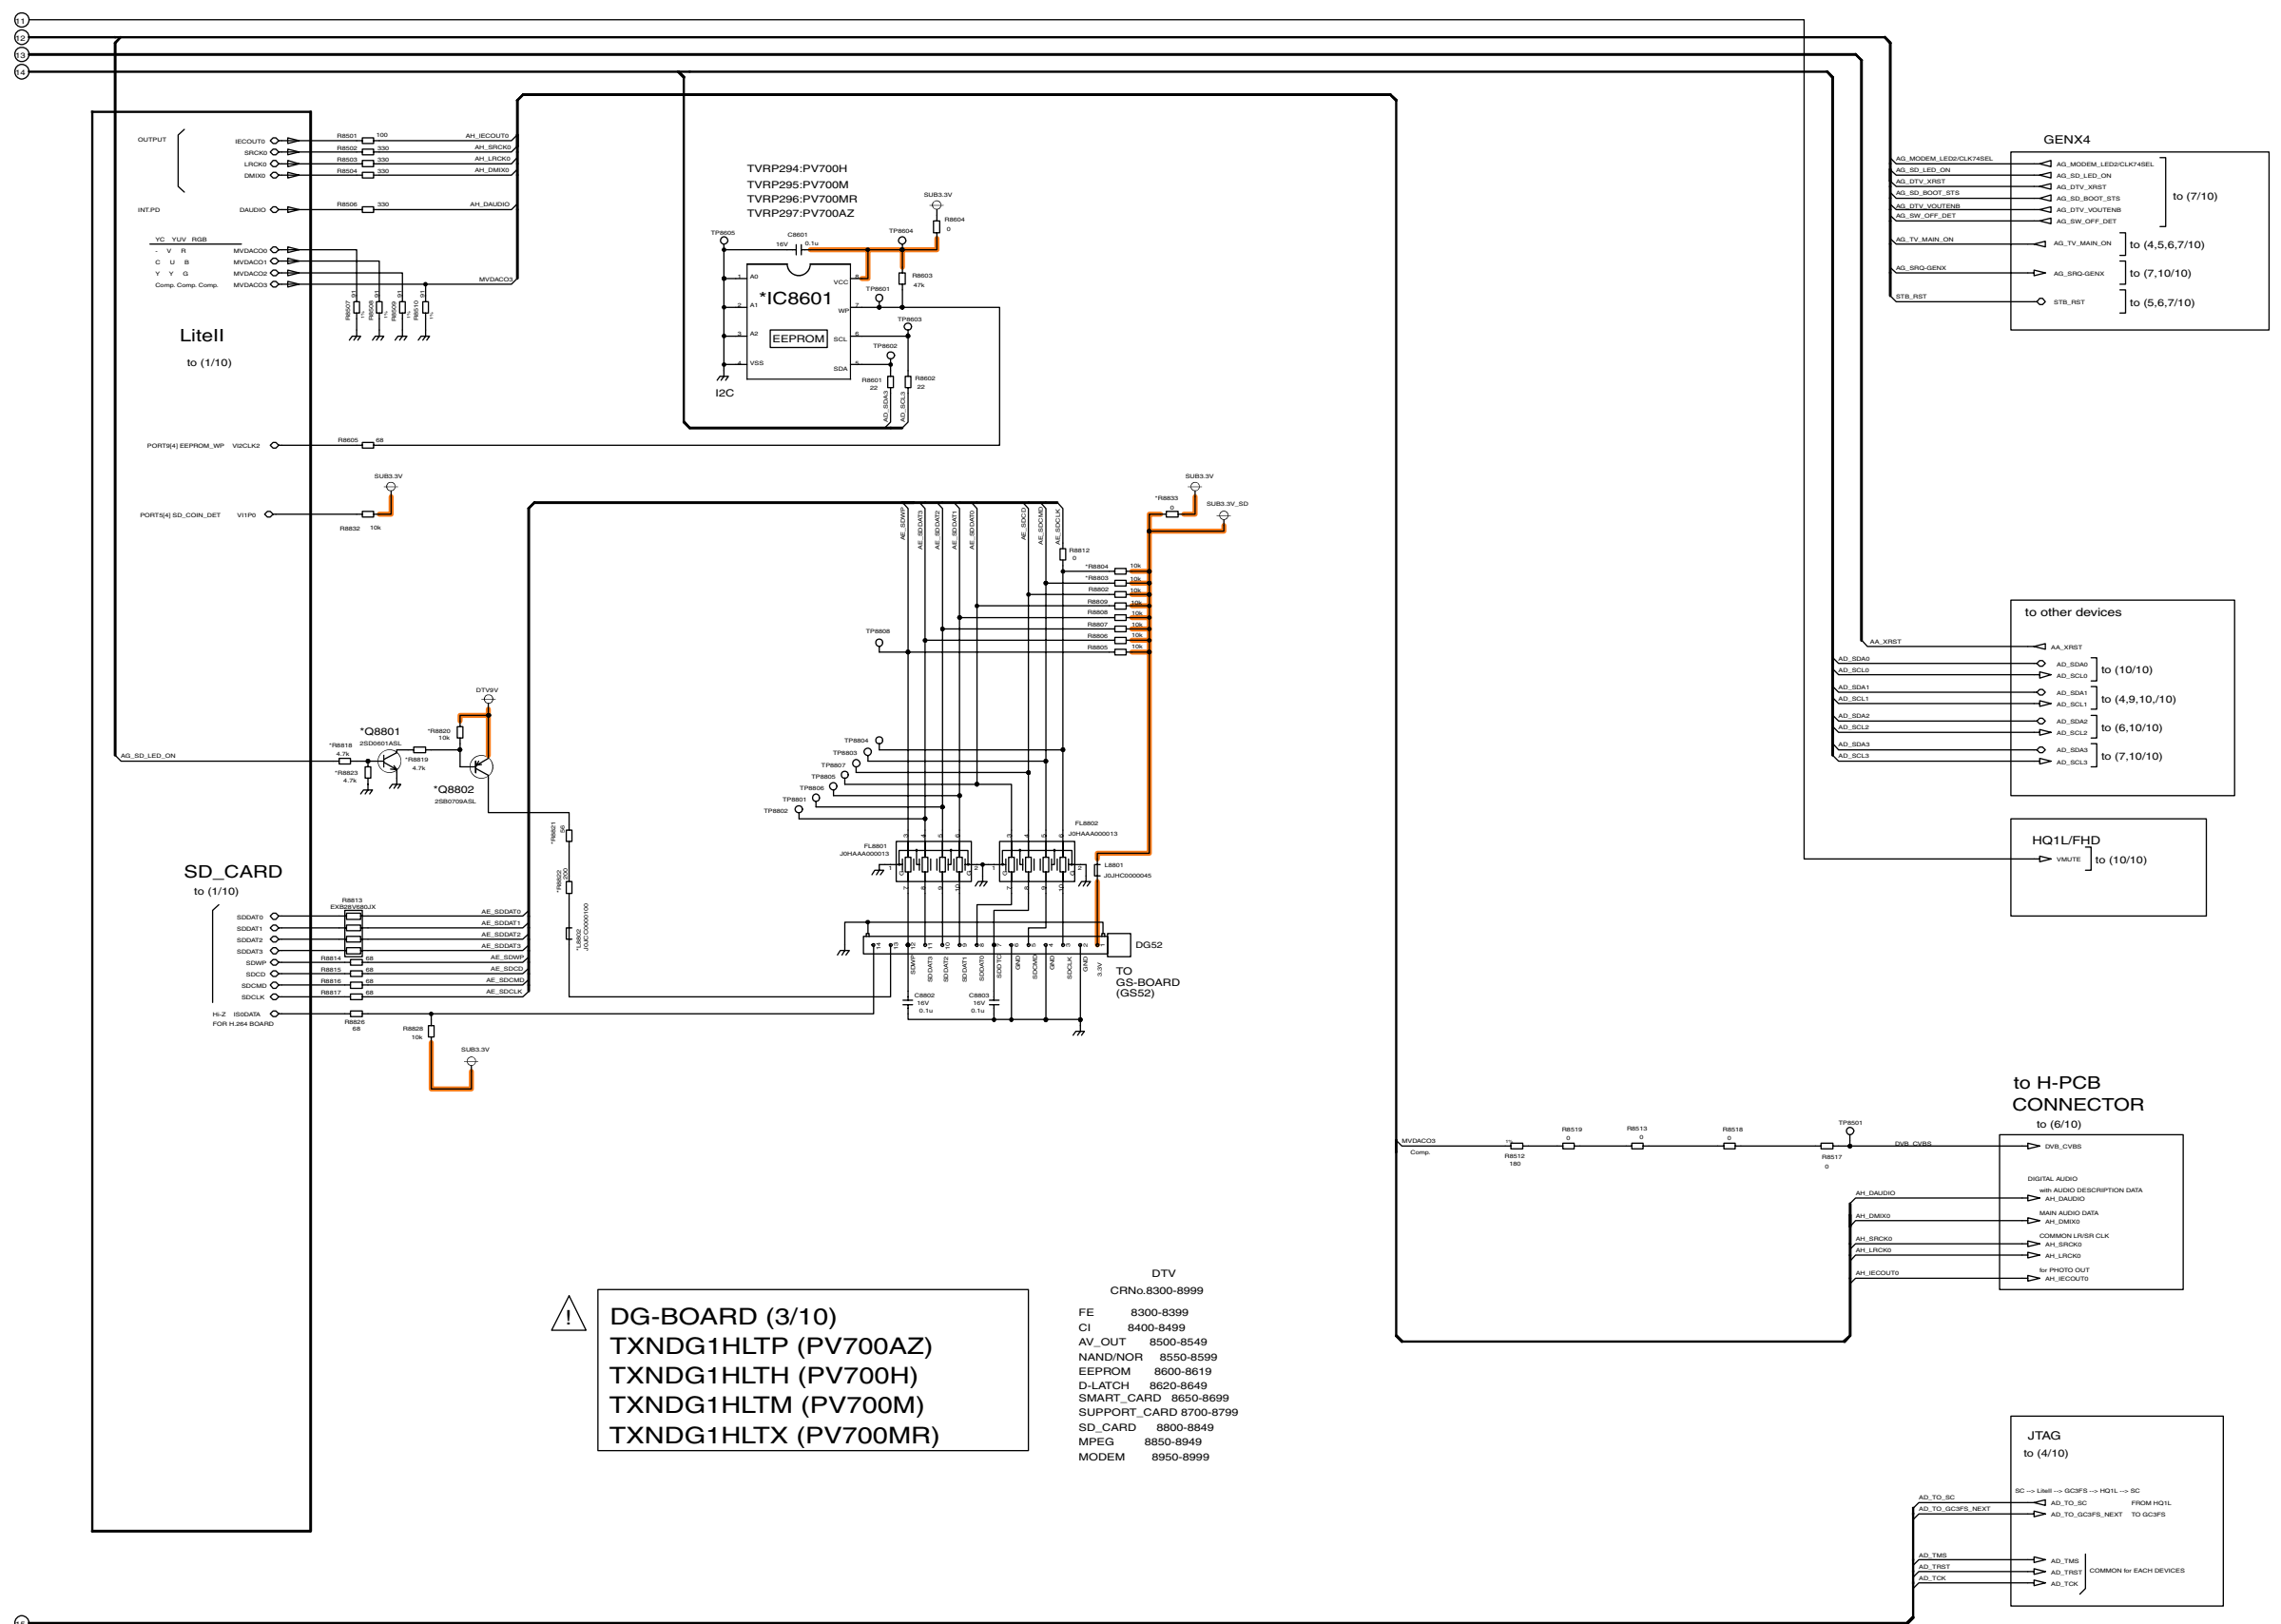

TH-50PV700AZ/H/M/MR
DG-Board (3 of 10) Schematic Diagram

TH-50PV700AZ/H/M/MR
DG-Board (3 of 10) Schematic Diagram

19

20

21

22

23

24

25


26

27

15.21. DG-Board (4 of 10) Schematic Diagram

⚠ DG-BOARD (4/10)
 TXNDG1HLTP (PV700AZ)
 TXNDG1HLTH (PV700H)
 TXNDG1HLTM (PV700M)
 TXNDG1HLTX (PV700MR)






GC3FS-next
 CRNo.4000-4199

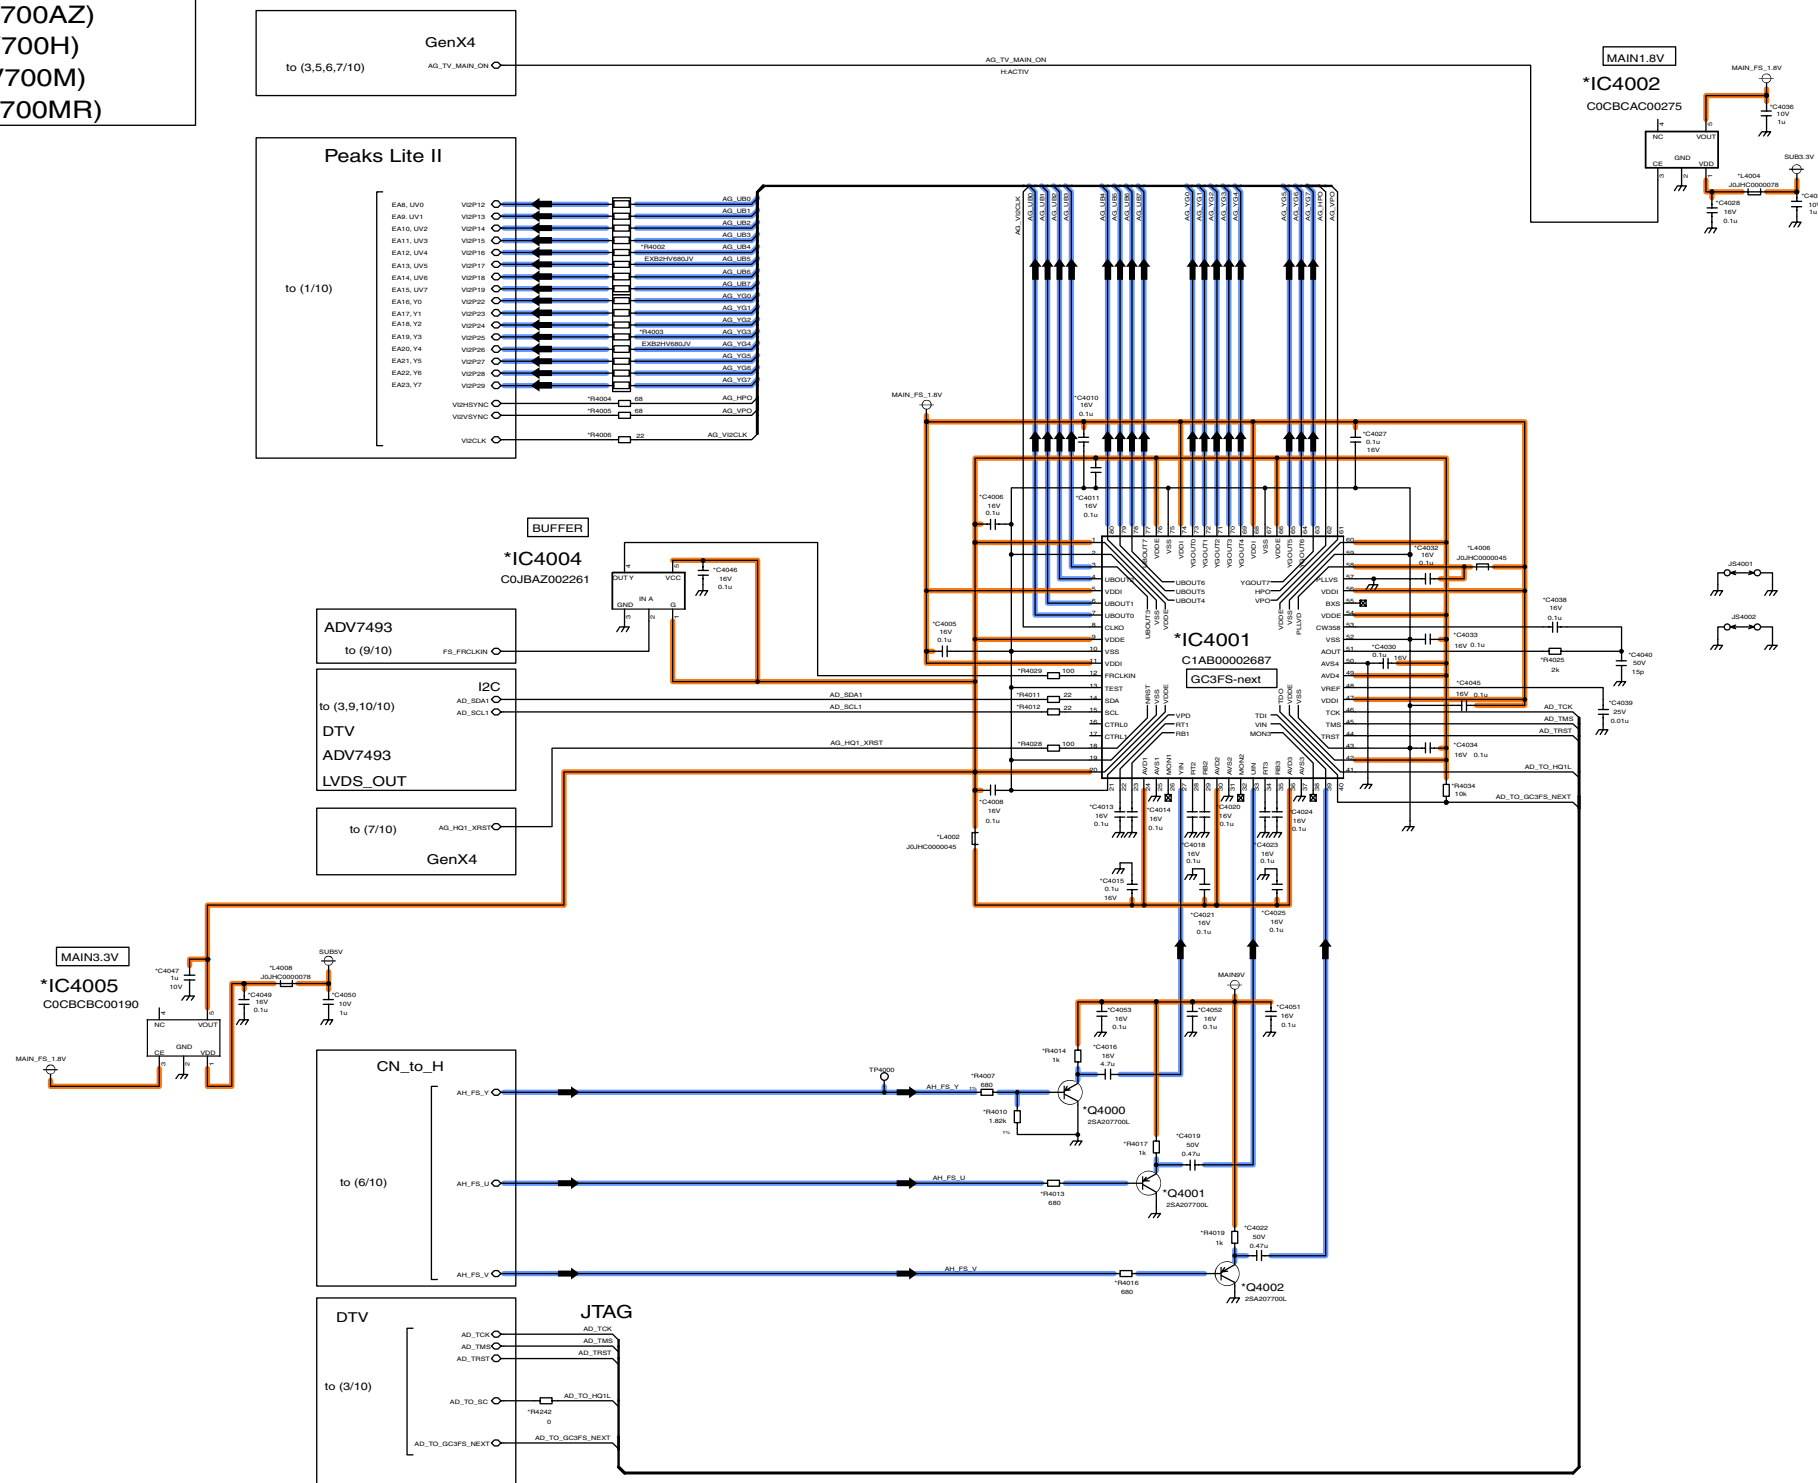

15.22. DG-Board (5 of 10) Schematic Diagram

! DG-BOARD (5/10)
 TXNDG1HLTP (PV700AZ)
 TXNDG1HLTH (PV700H)
 TXNDG1HLM (PV700M)
 TXNDG1HLTX (PV700MR)

CRNo.5600-5749
 Peaks-LITE2 POWER 5600-5659
 Peaks-LITE2 RST 5660-5669
 GenX4 POWER/RST 5670-5689
 MAINSV/MAIN3.3V 5690-5709
 DG-H Connector 5710-5729
 DG-G Connector 5730-5749

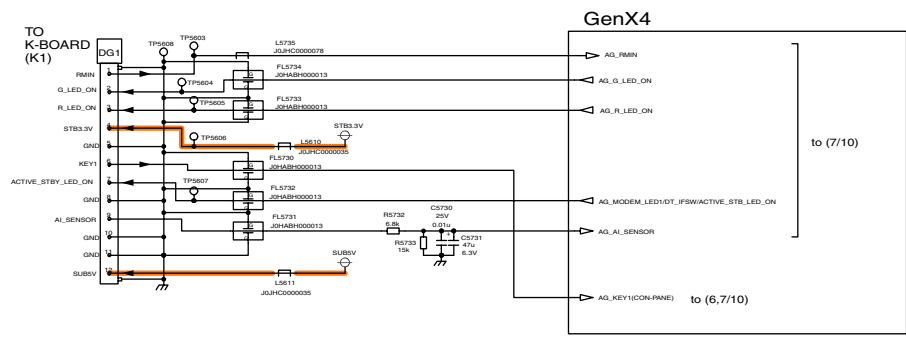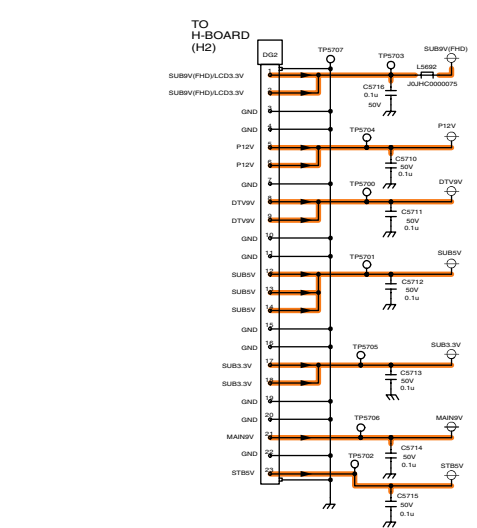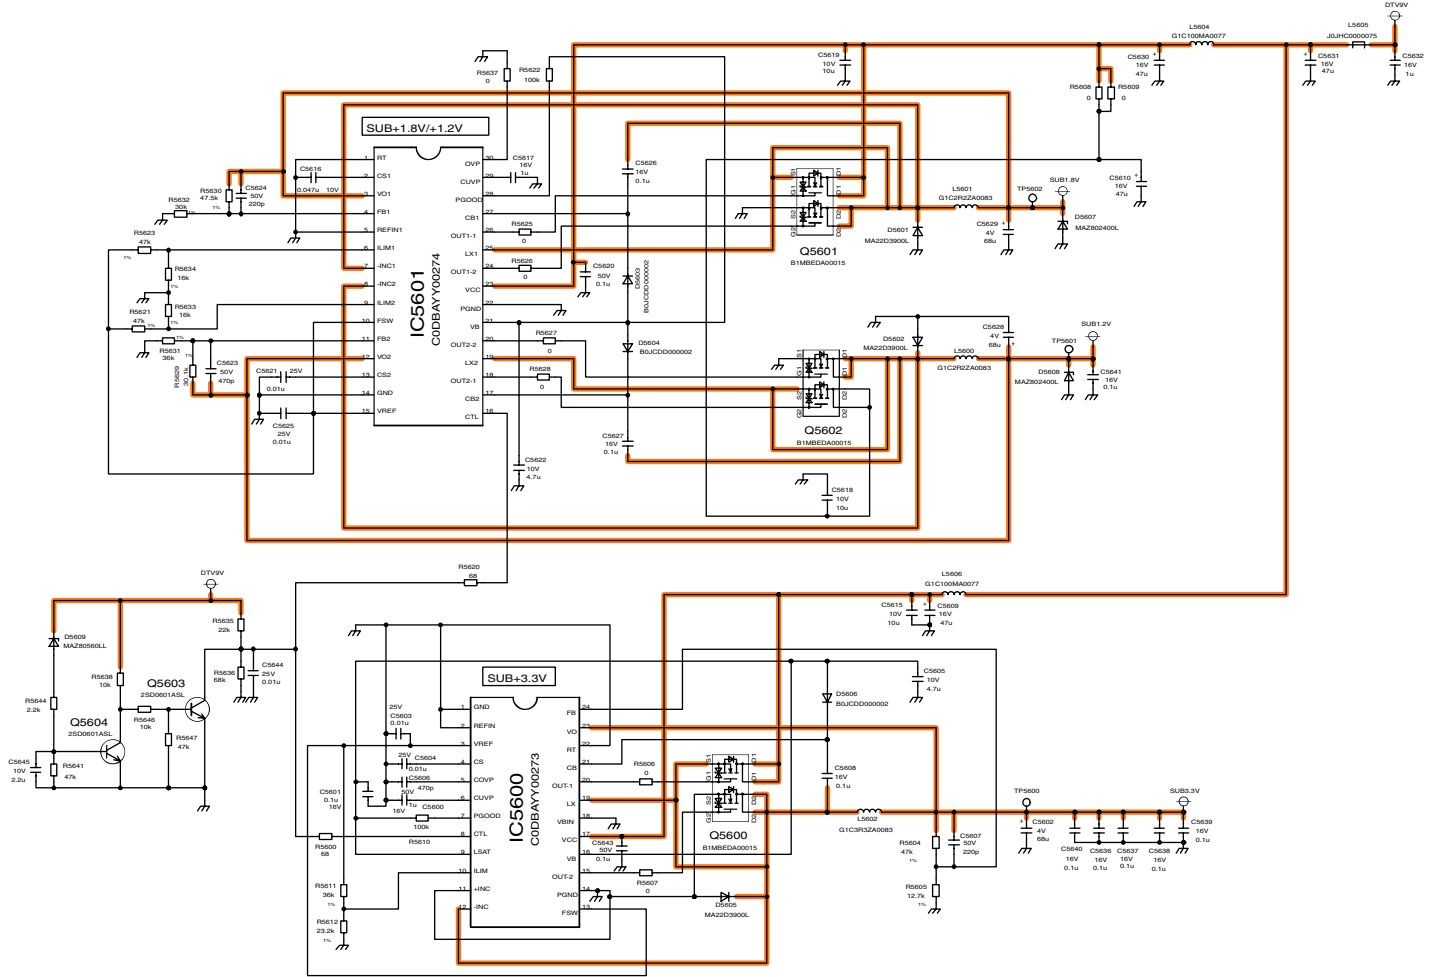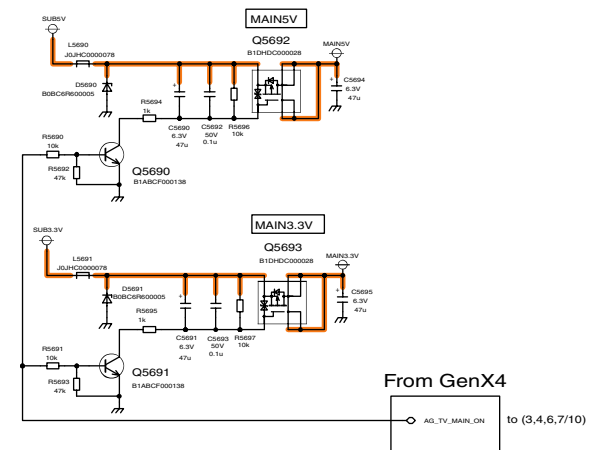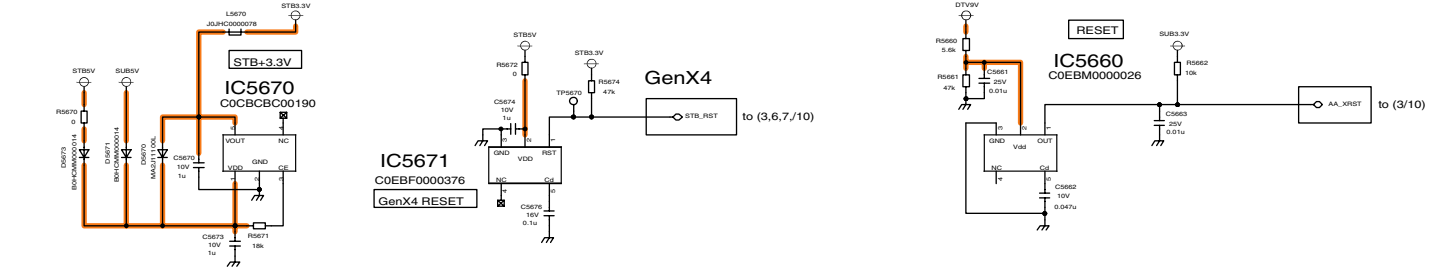


TH-50PV700AZ/H/M/MR
 DG-Board (5 of 10) Schematic Diagram

TH-50PV700AZ/H/M/MR
 DG-Board (5 of 10) Schematic Diagram


15.23. DG-Board (6 of 10) Schematic Diagram

⚠ DG-BOARD (6/10)
 TXNDG1HLTP (PV700AZ)
 TXNDG1HLTH (PV700H)
 TXNDG1HLM (PV700M)
 TXNDG1HLTX (PV700MR)

CN to H
 CRNo.3000-3199:AVSW
 CRNo.2000-2299:Without AVSW
 CRNo.2699-2999:Without AVSW

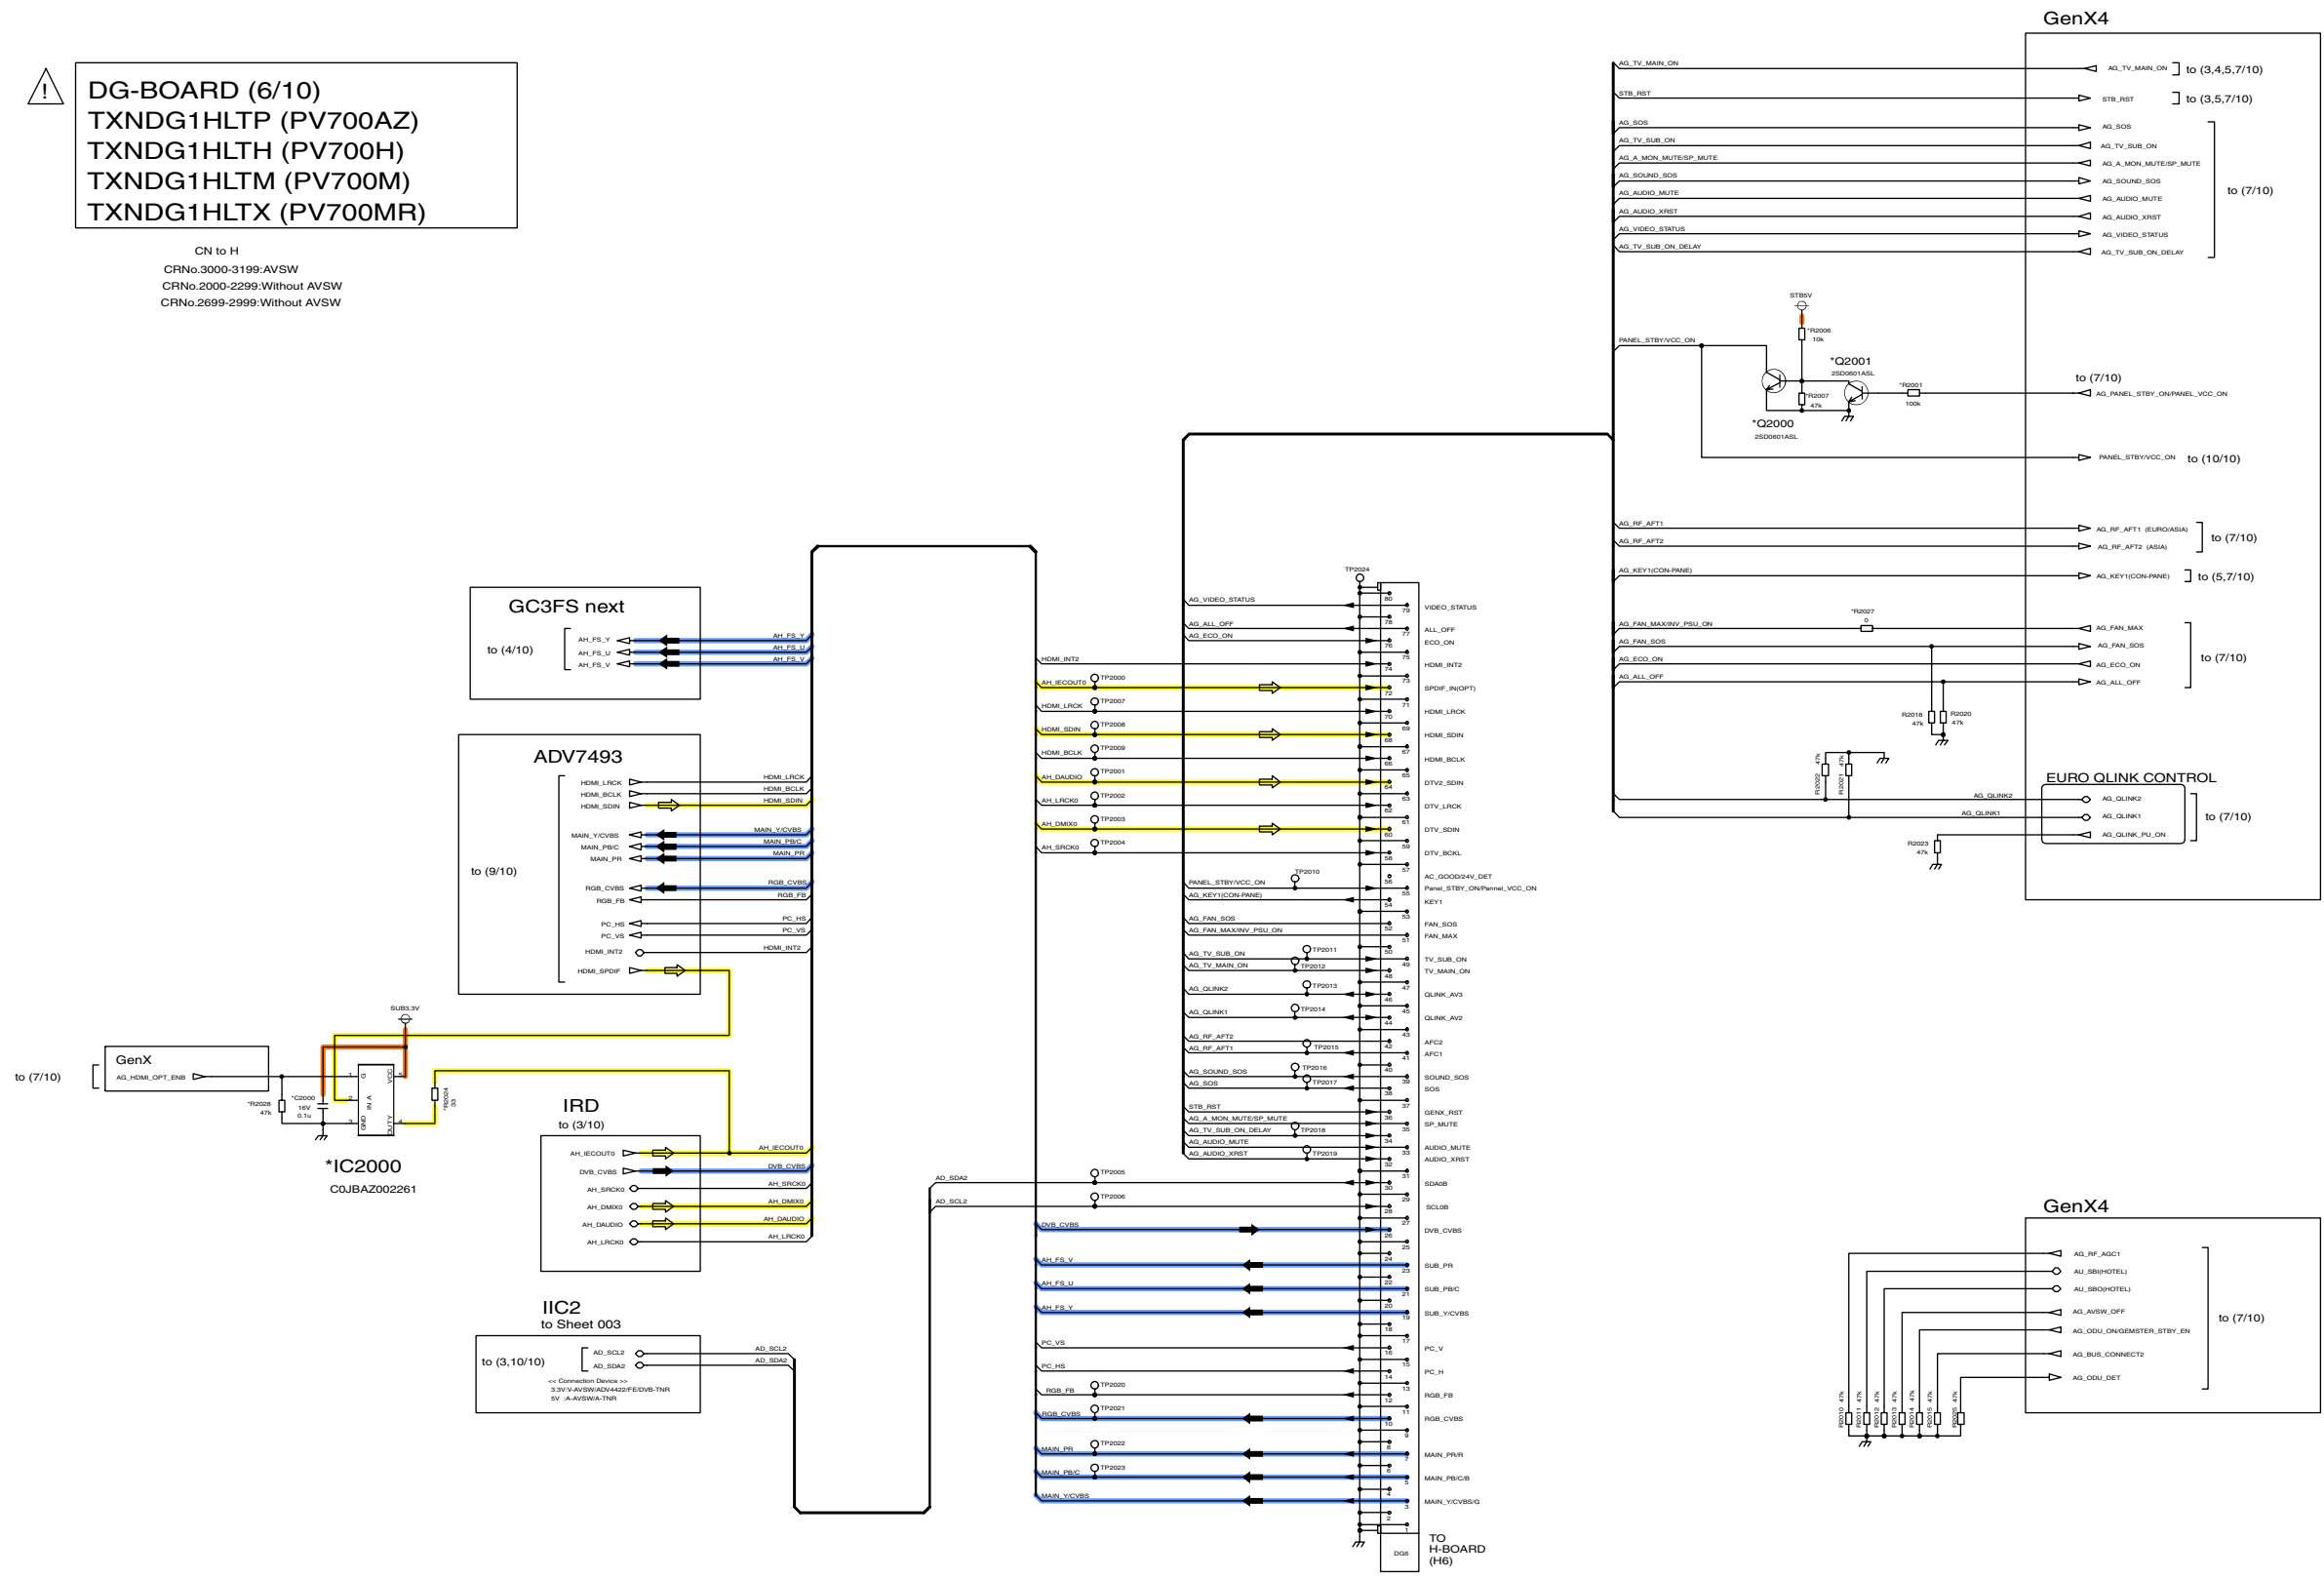

15.24. DG-Board (7 of 10) Schematic Diagram

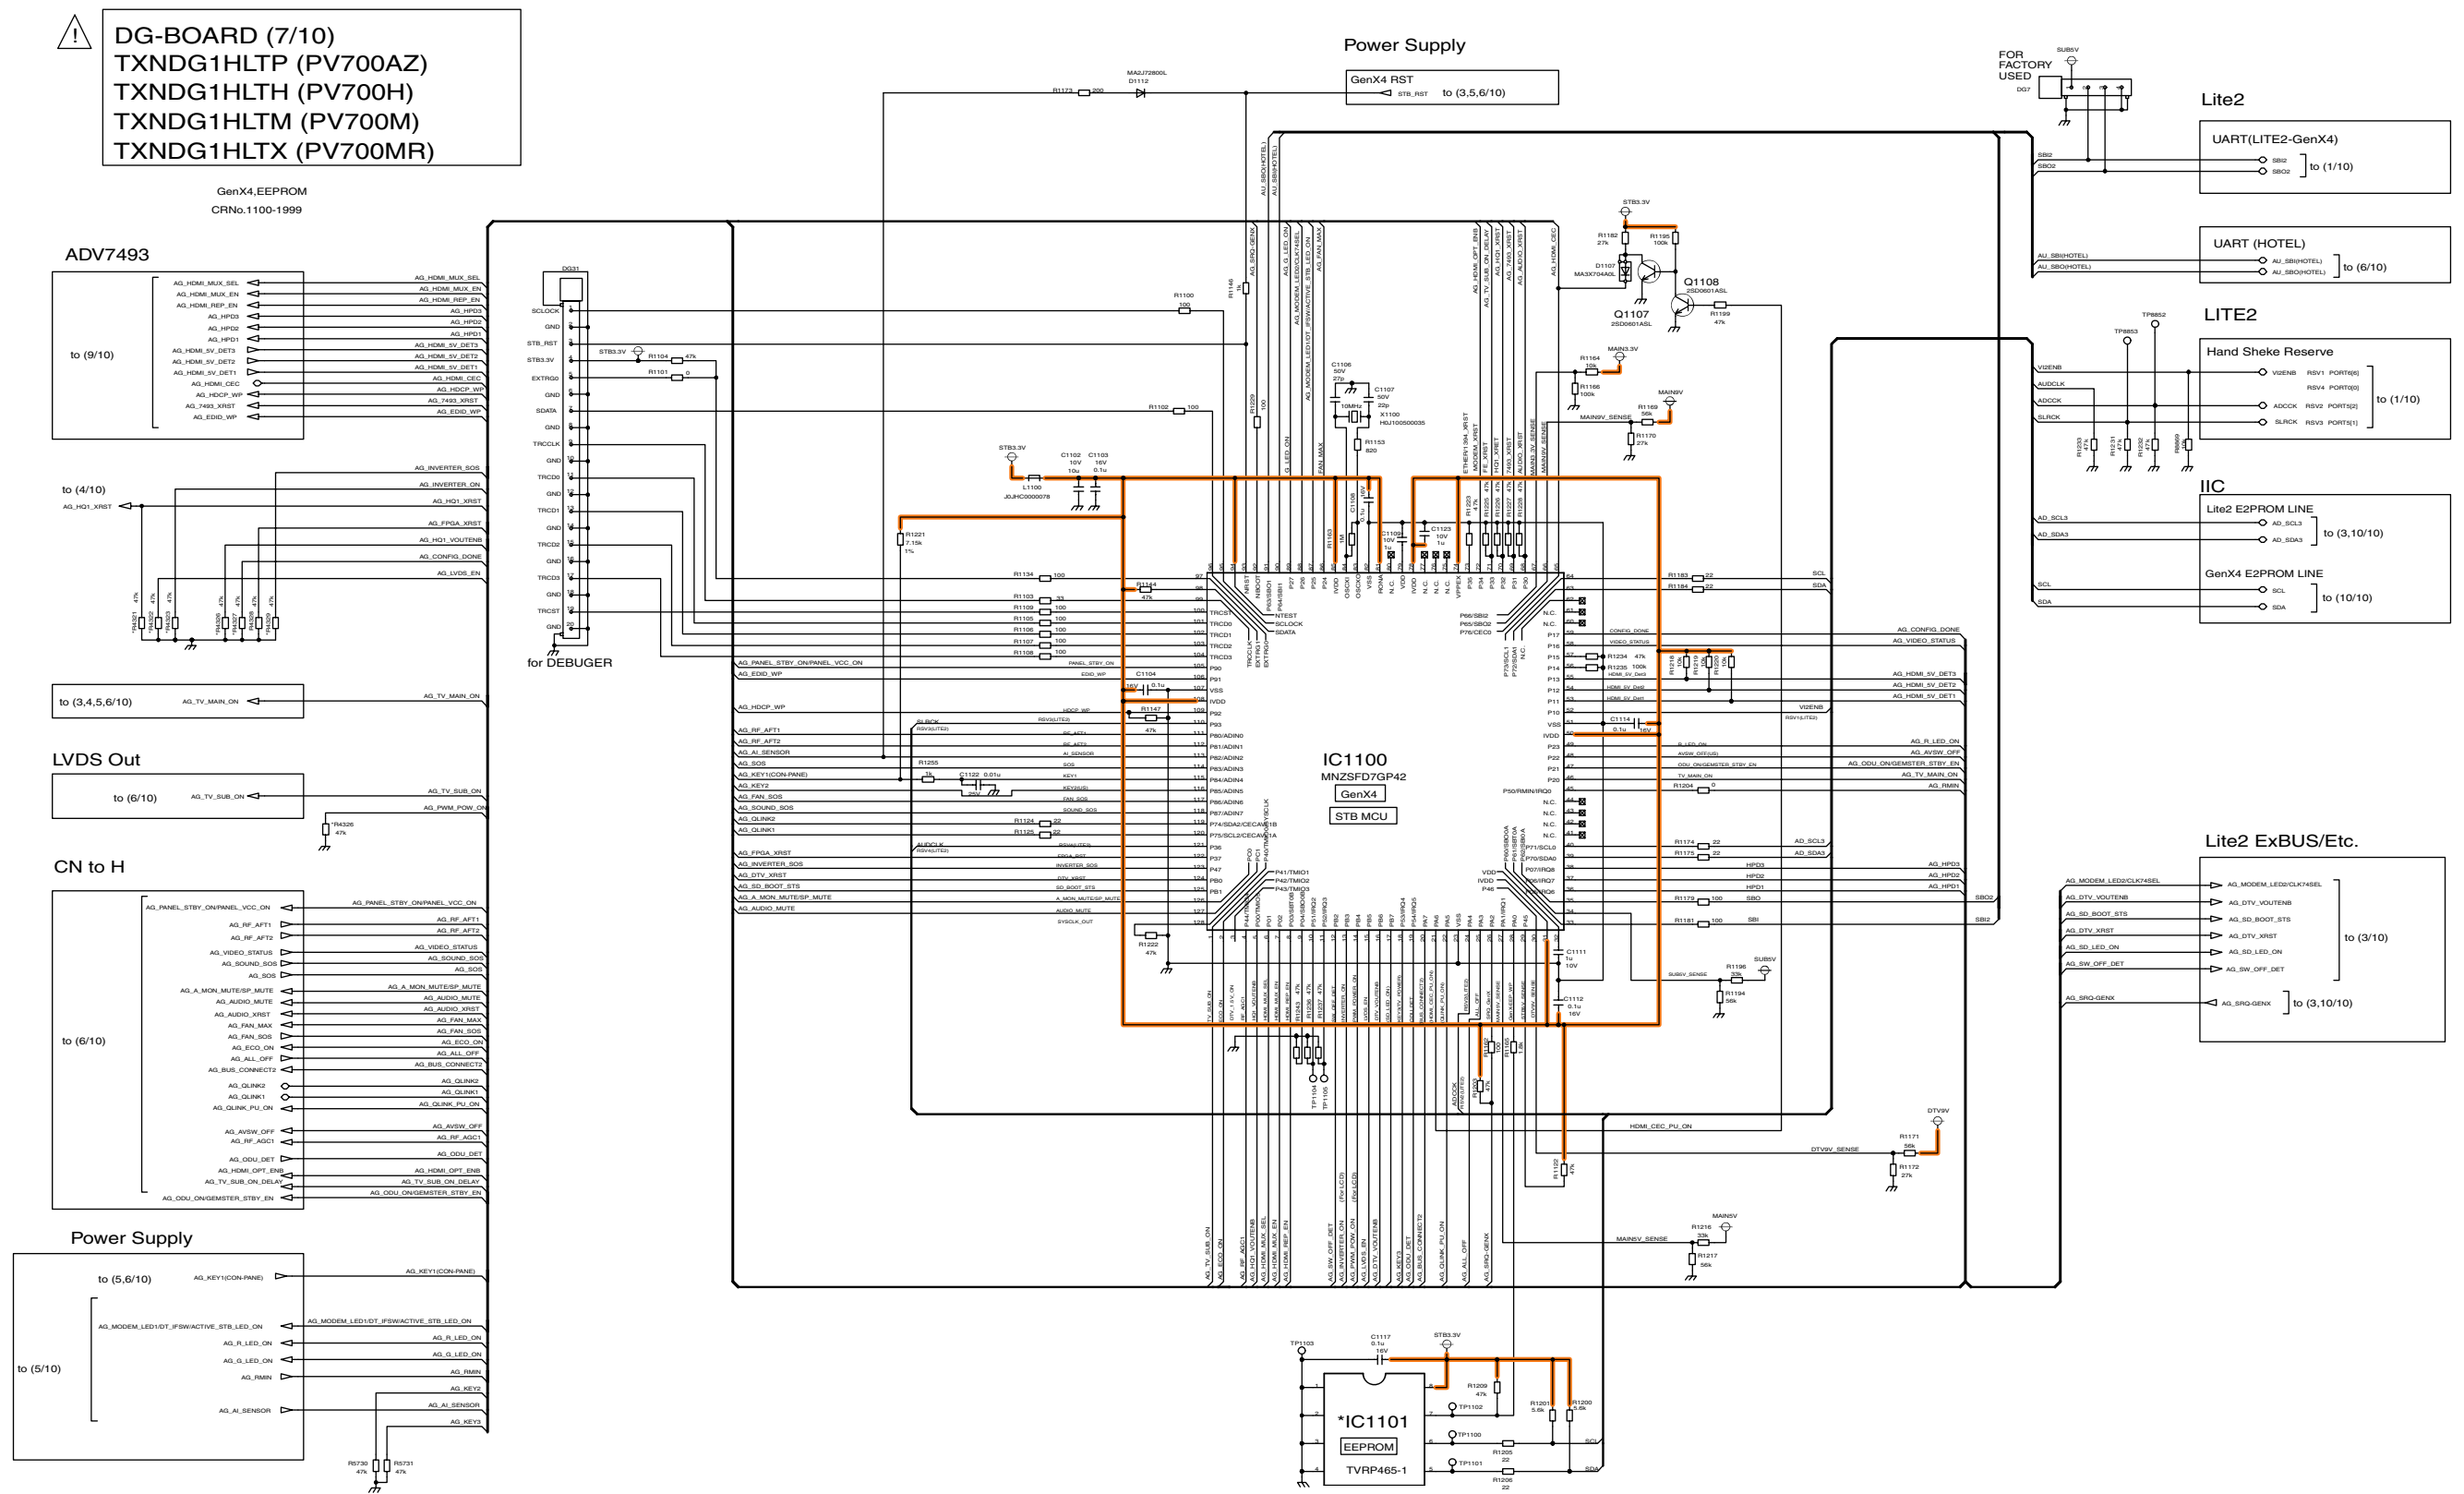


TH-50PV700AZ/H/M/MR
 DG-Board (7 of 10) Schematic Diagram

TH-50PV700AZ/H/M/MR
 DG-Board (7 of 10) Schematic Diagram

15.25. DG-Board (8 of 10) Schematic Diagram


⚠ DG-BOARD (8/10)
 TXNDG1HLTP (PV700AZ)
 TXNDG1HLTH (PV700H)
 TXNDG1HLTM (PV700M)
 TXNDG1HLTX (PV700MR)
 ADV7493,HDMI-Mux
 CRNo.4500-4799

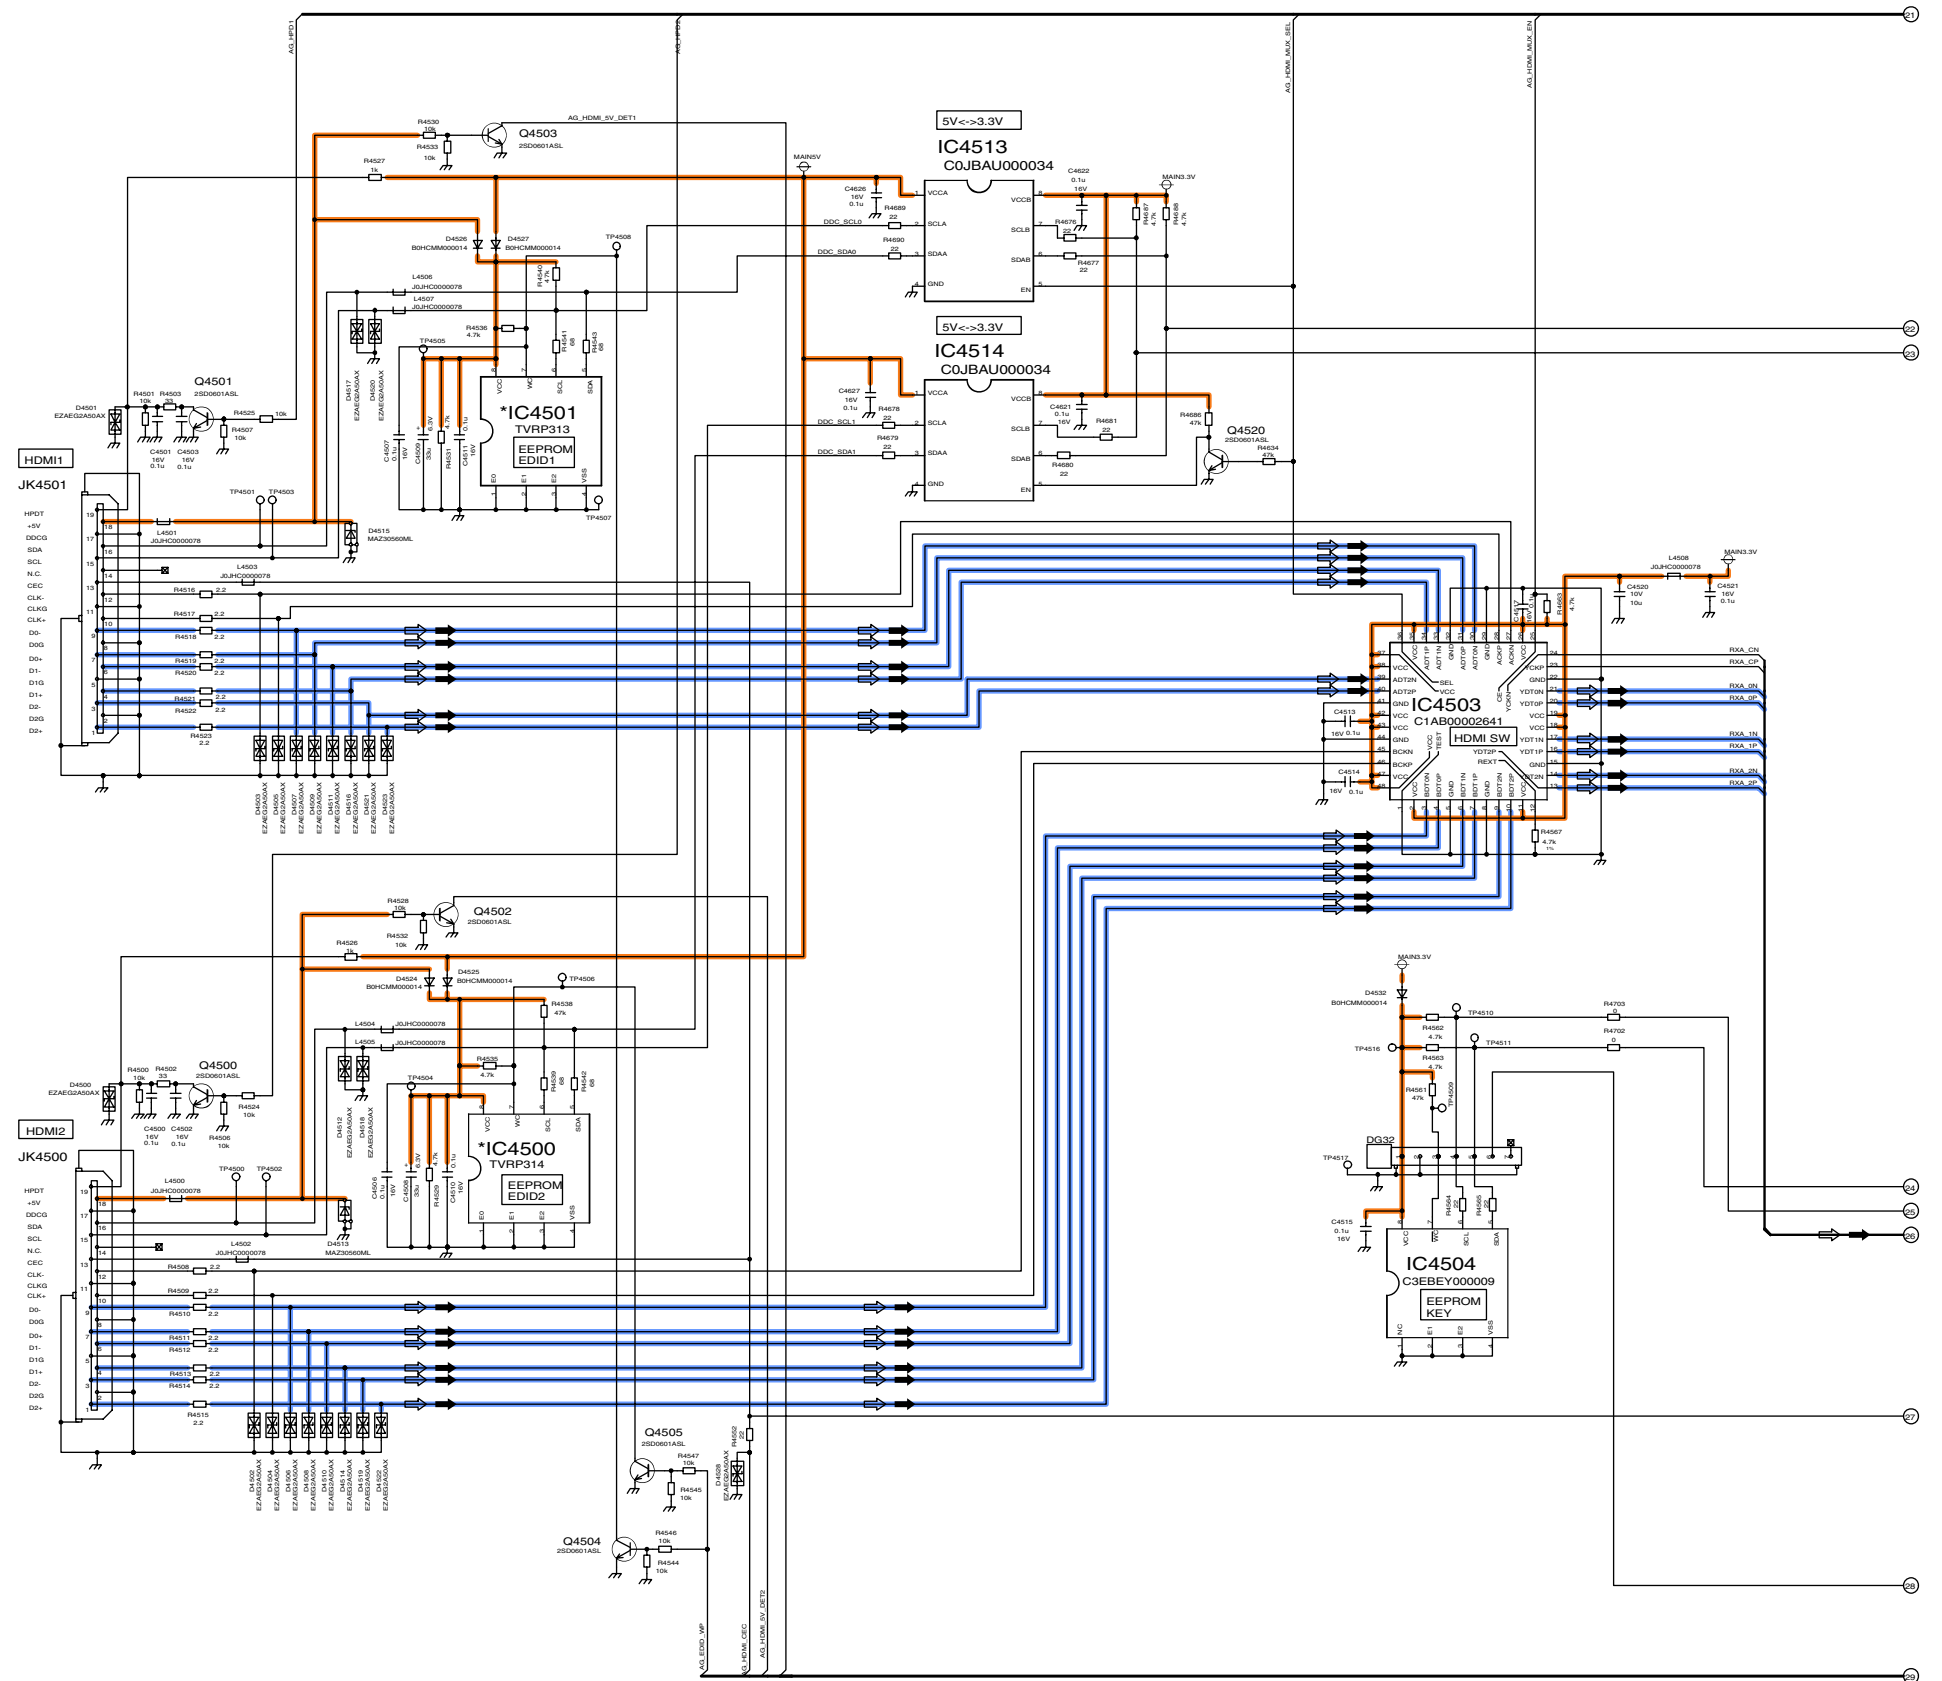

TH-50PV700AZ/H/M/MR
 DG-Board (8 of 10) Schematic Diagram

TH-50PV700AZ/H/M/MR
 DG-Board (8 of 10) Schematic Diagram

15.26. DG-Board (9 of 10) Schematic Diagram

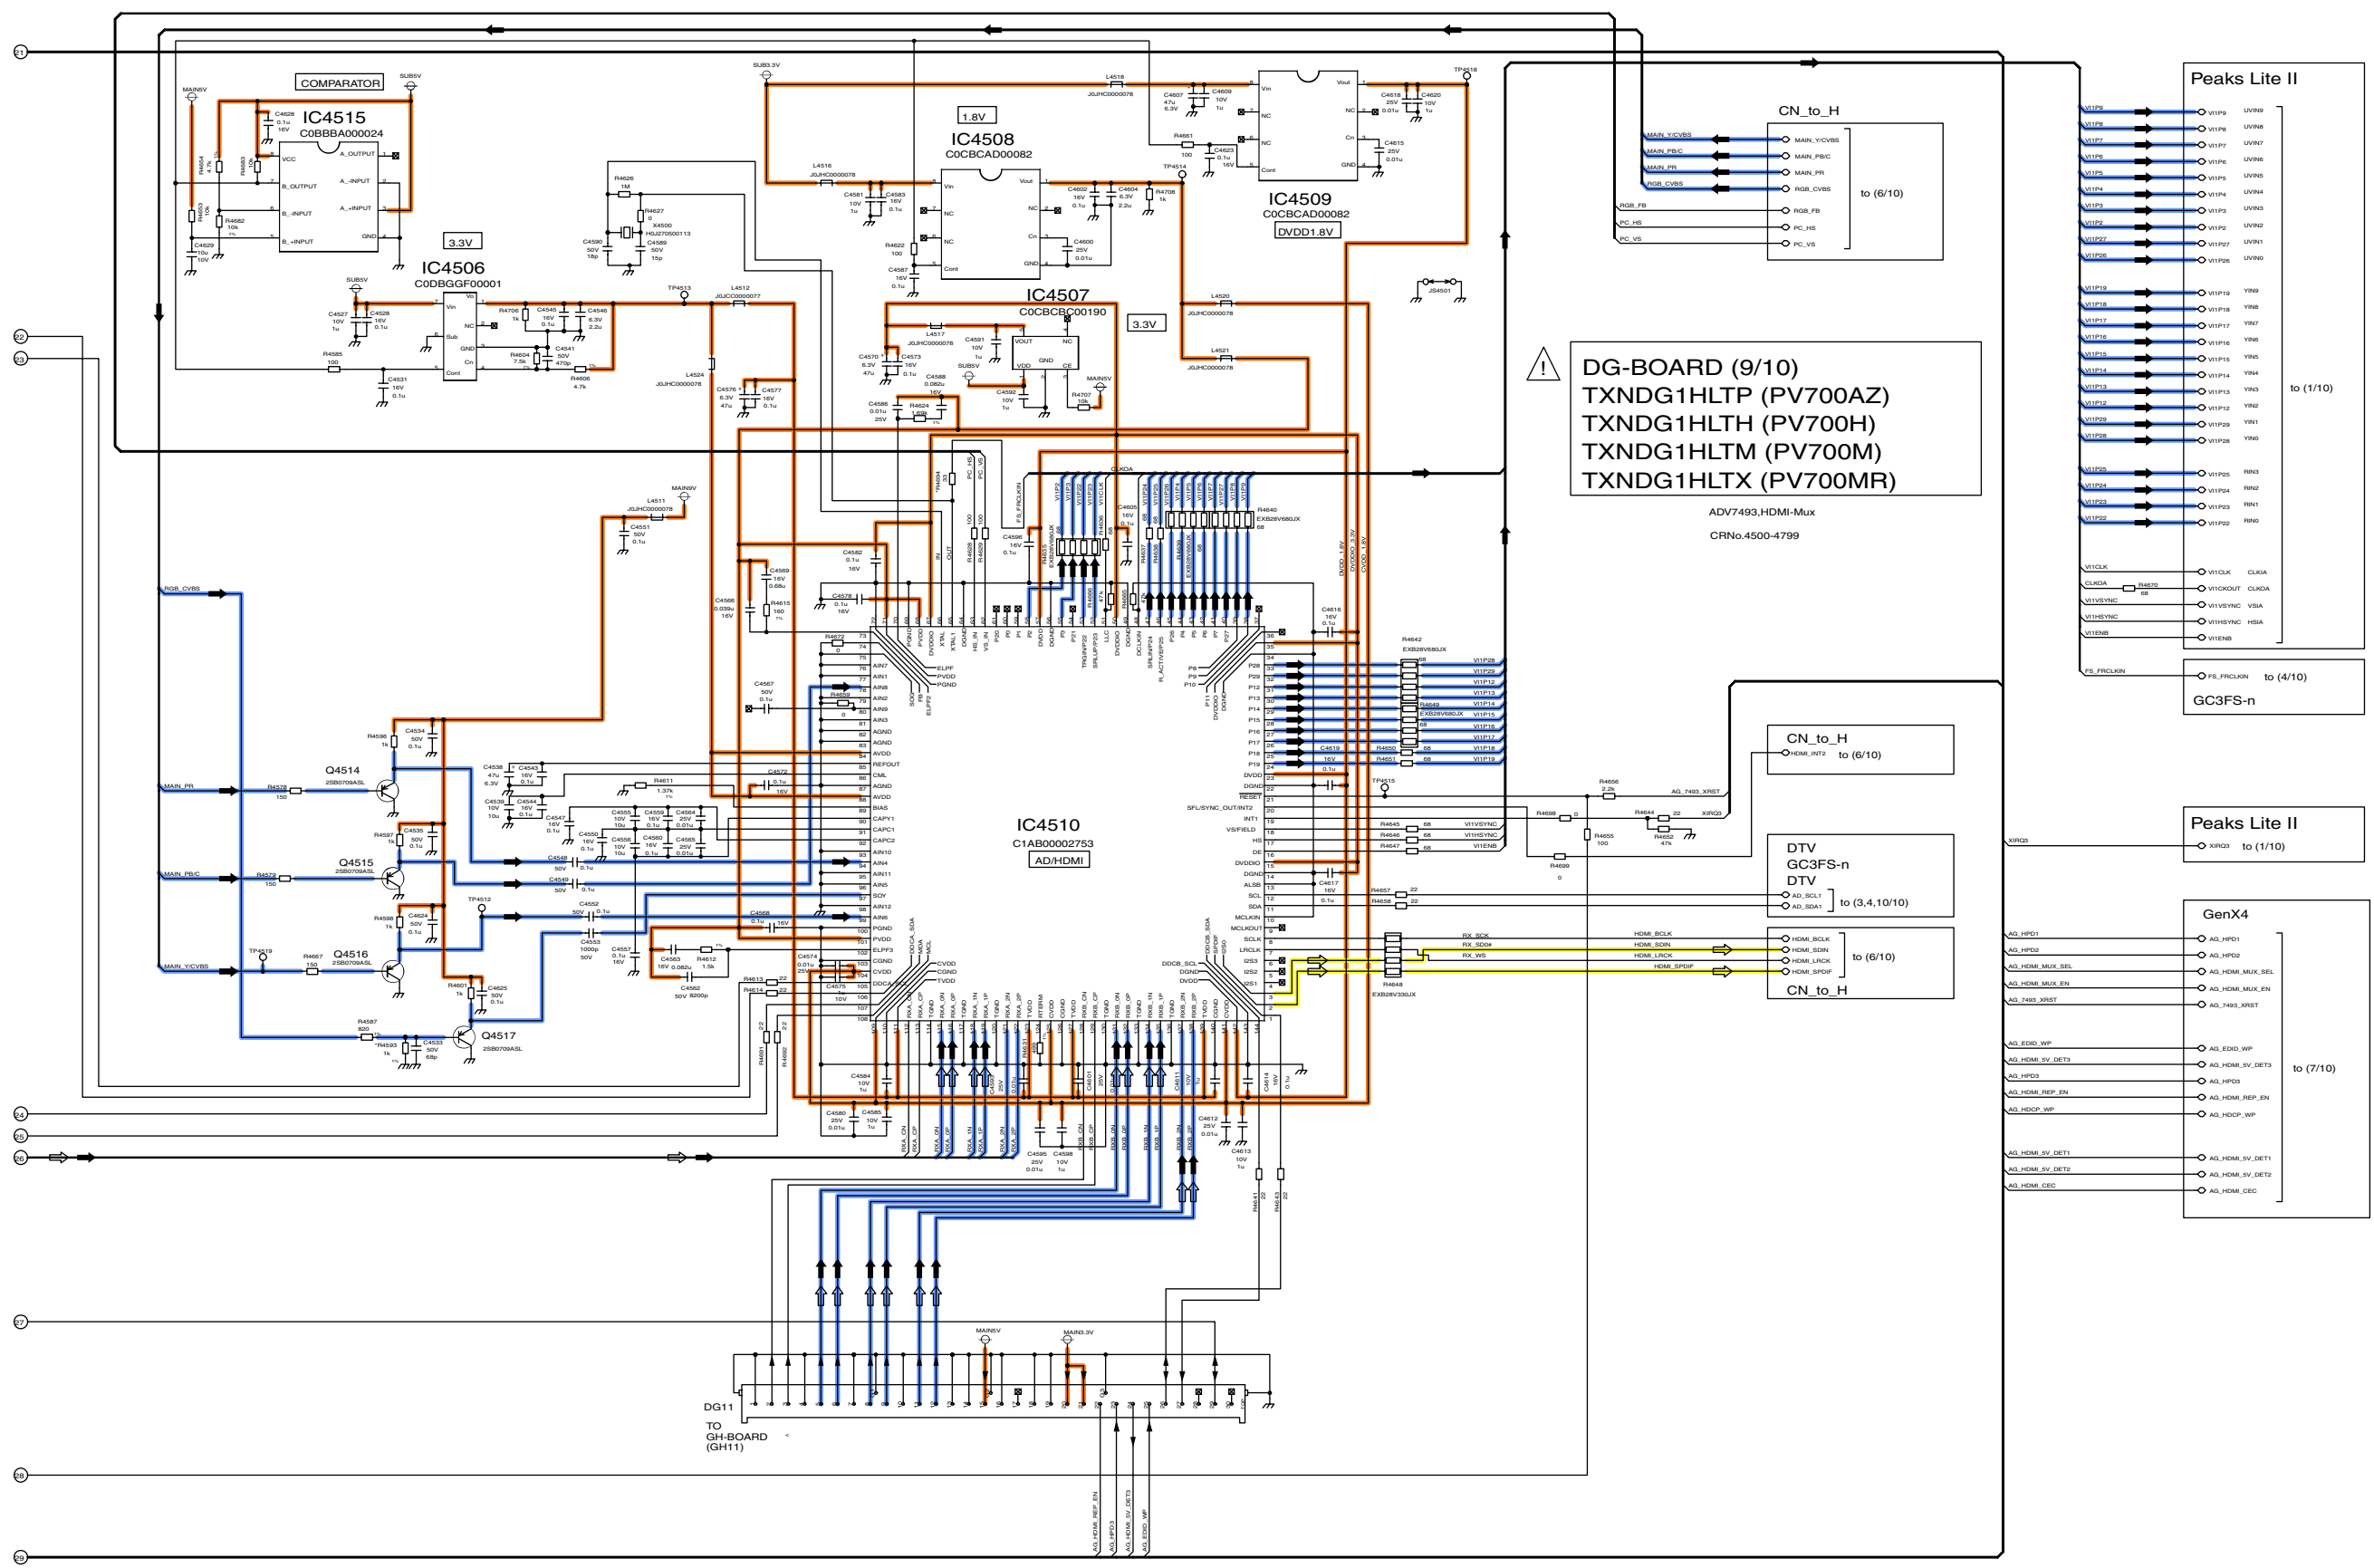


DG-BOARD (9/10)
 TXNDG1HLTP (PV700AZ)
 TXNDG1HLTH (PV700H)
 TXNDG1HLT (PV700M)
 TXNDG1HLTX (PV700MR)

TH-50PV700AZ/H/M/MR
DG-Board (9 of 10) Schematic Diagram

TH-50PV700AZ/H/M/MR
DG-Board (9 of 10) Schematic Diagram


15.27. DG-Board (10 of 10) Schematic Diagram

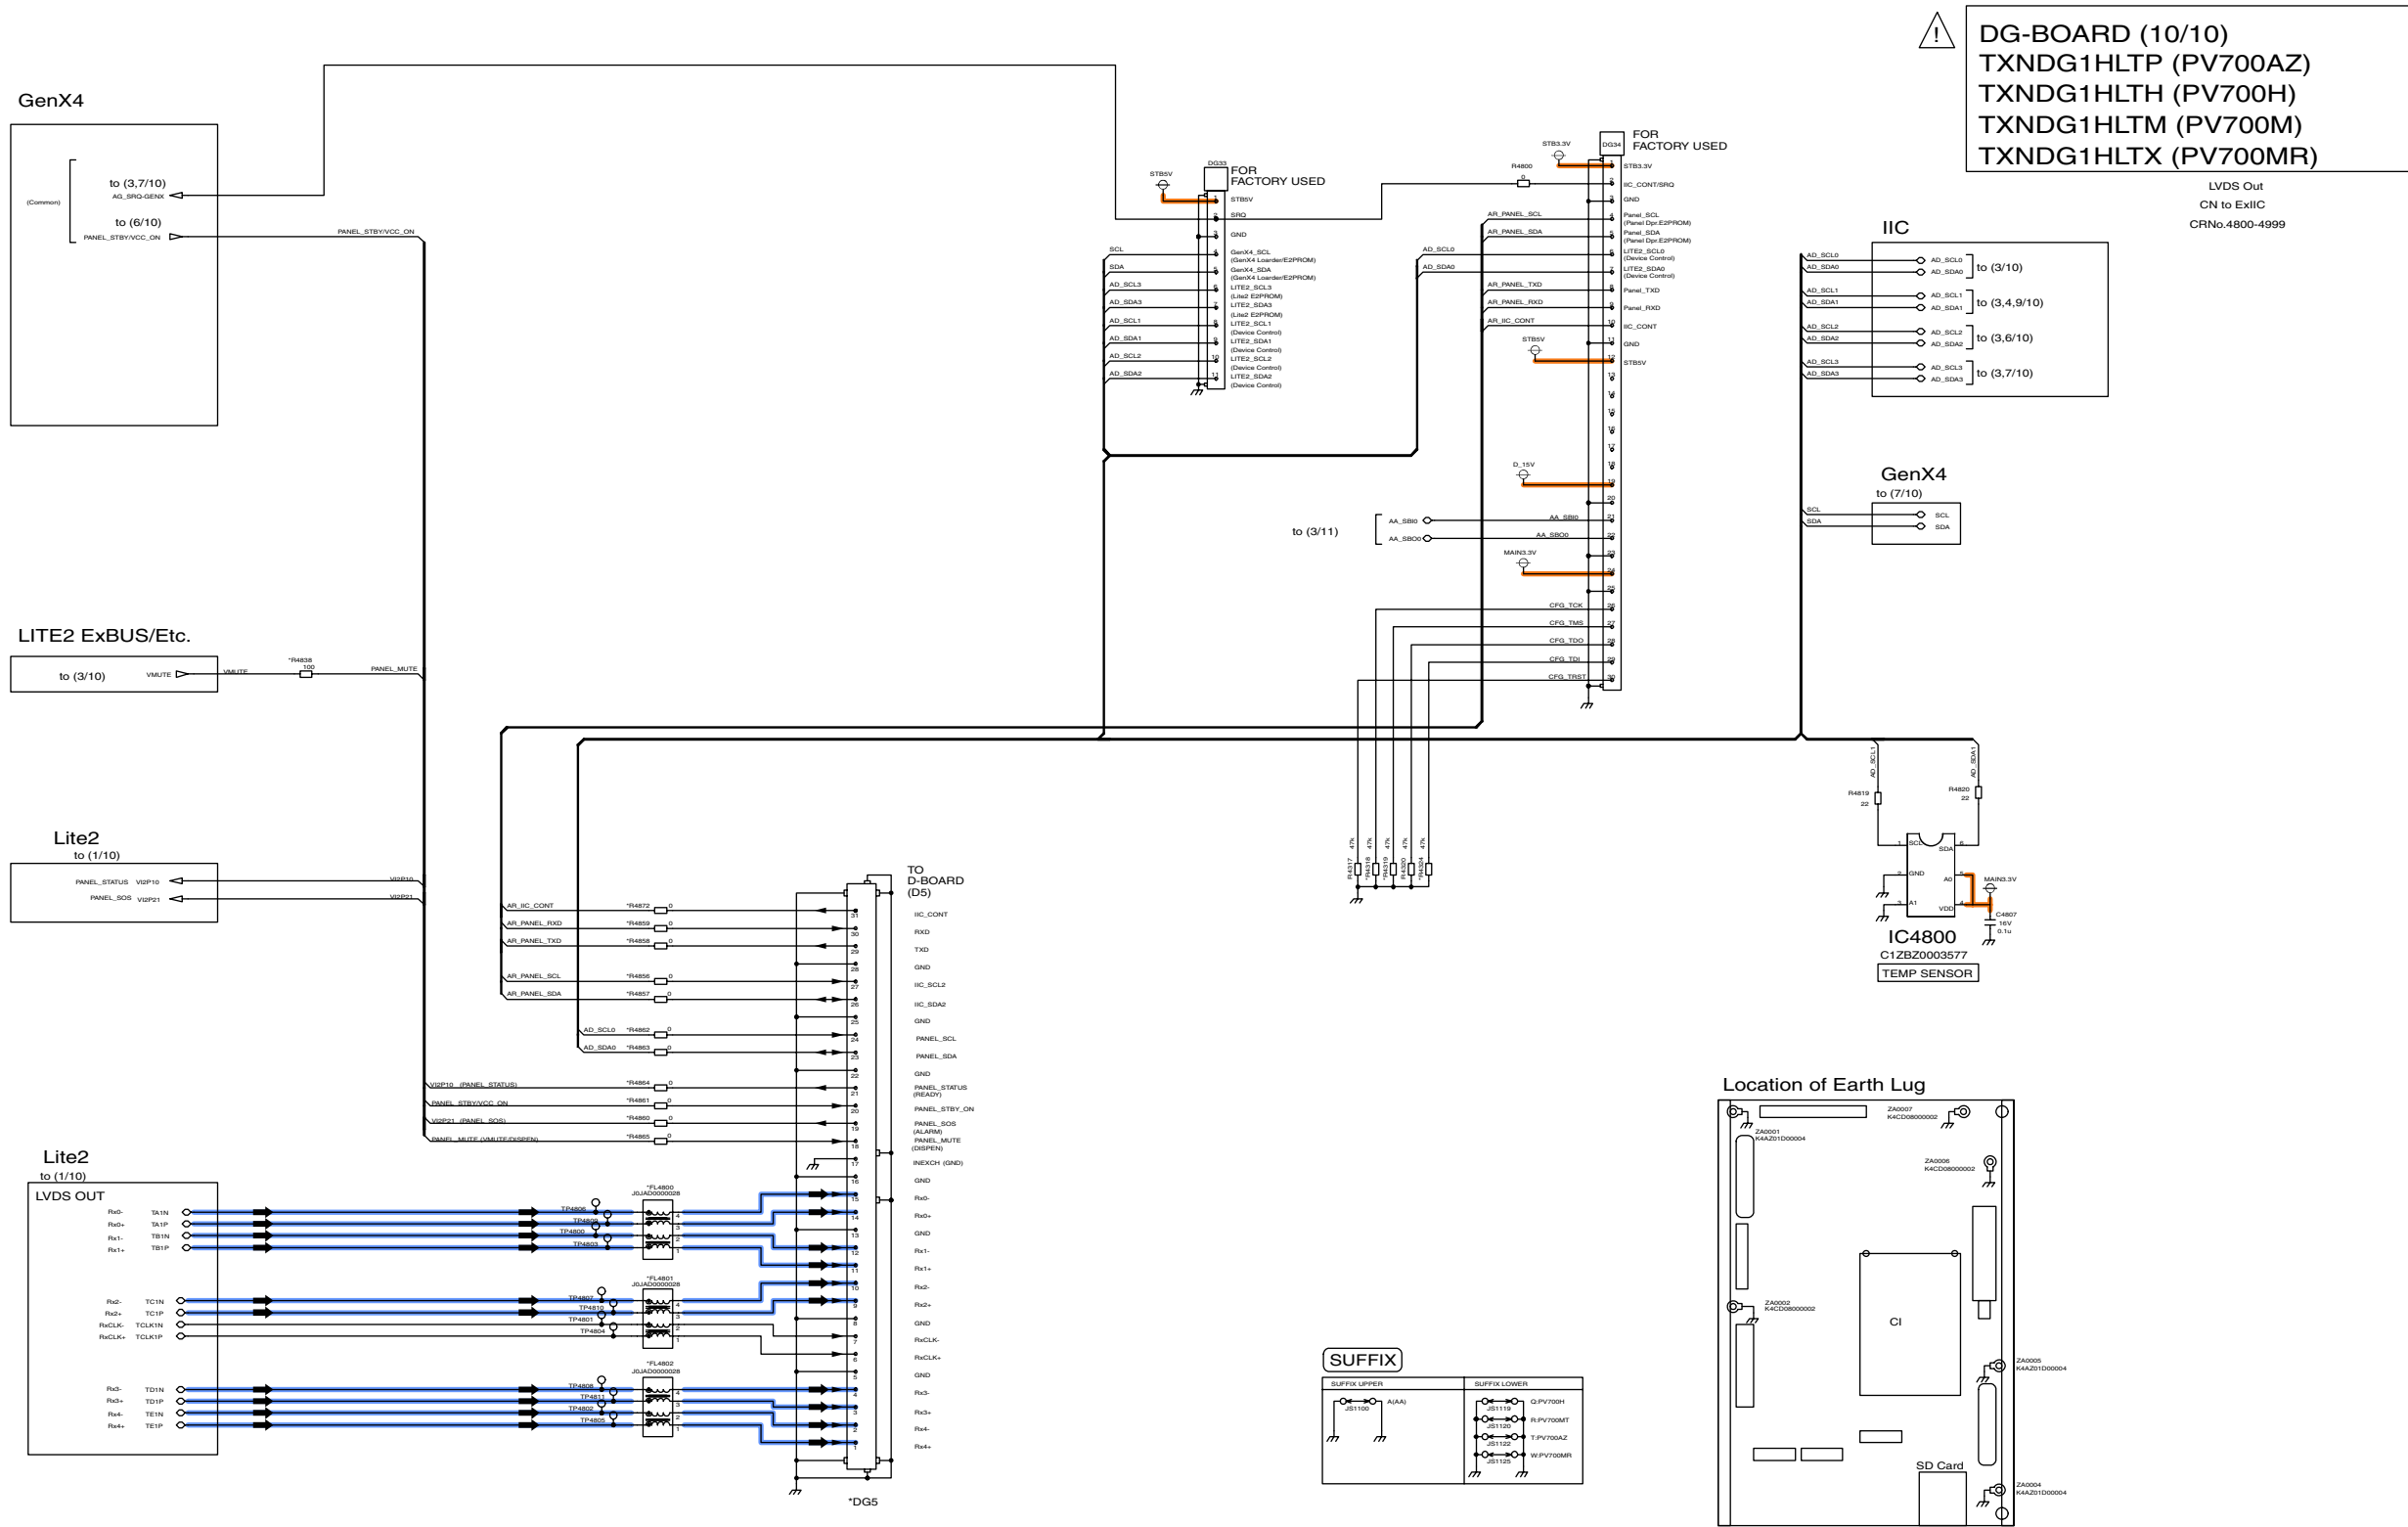

TH-50PV700AZ/H/M/MR
DG-Board (10 of 10) Schematic Diagram

TH-50PV700AZ/H/M/MR
DG-Board (10 of 10) Schematic Diagram

15.28. D-Board Block Diagram

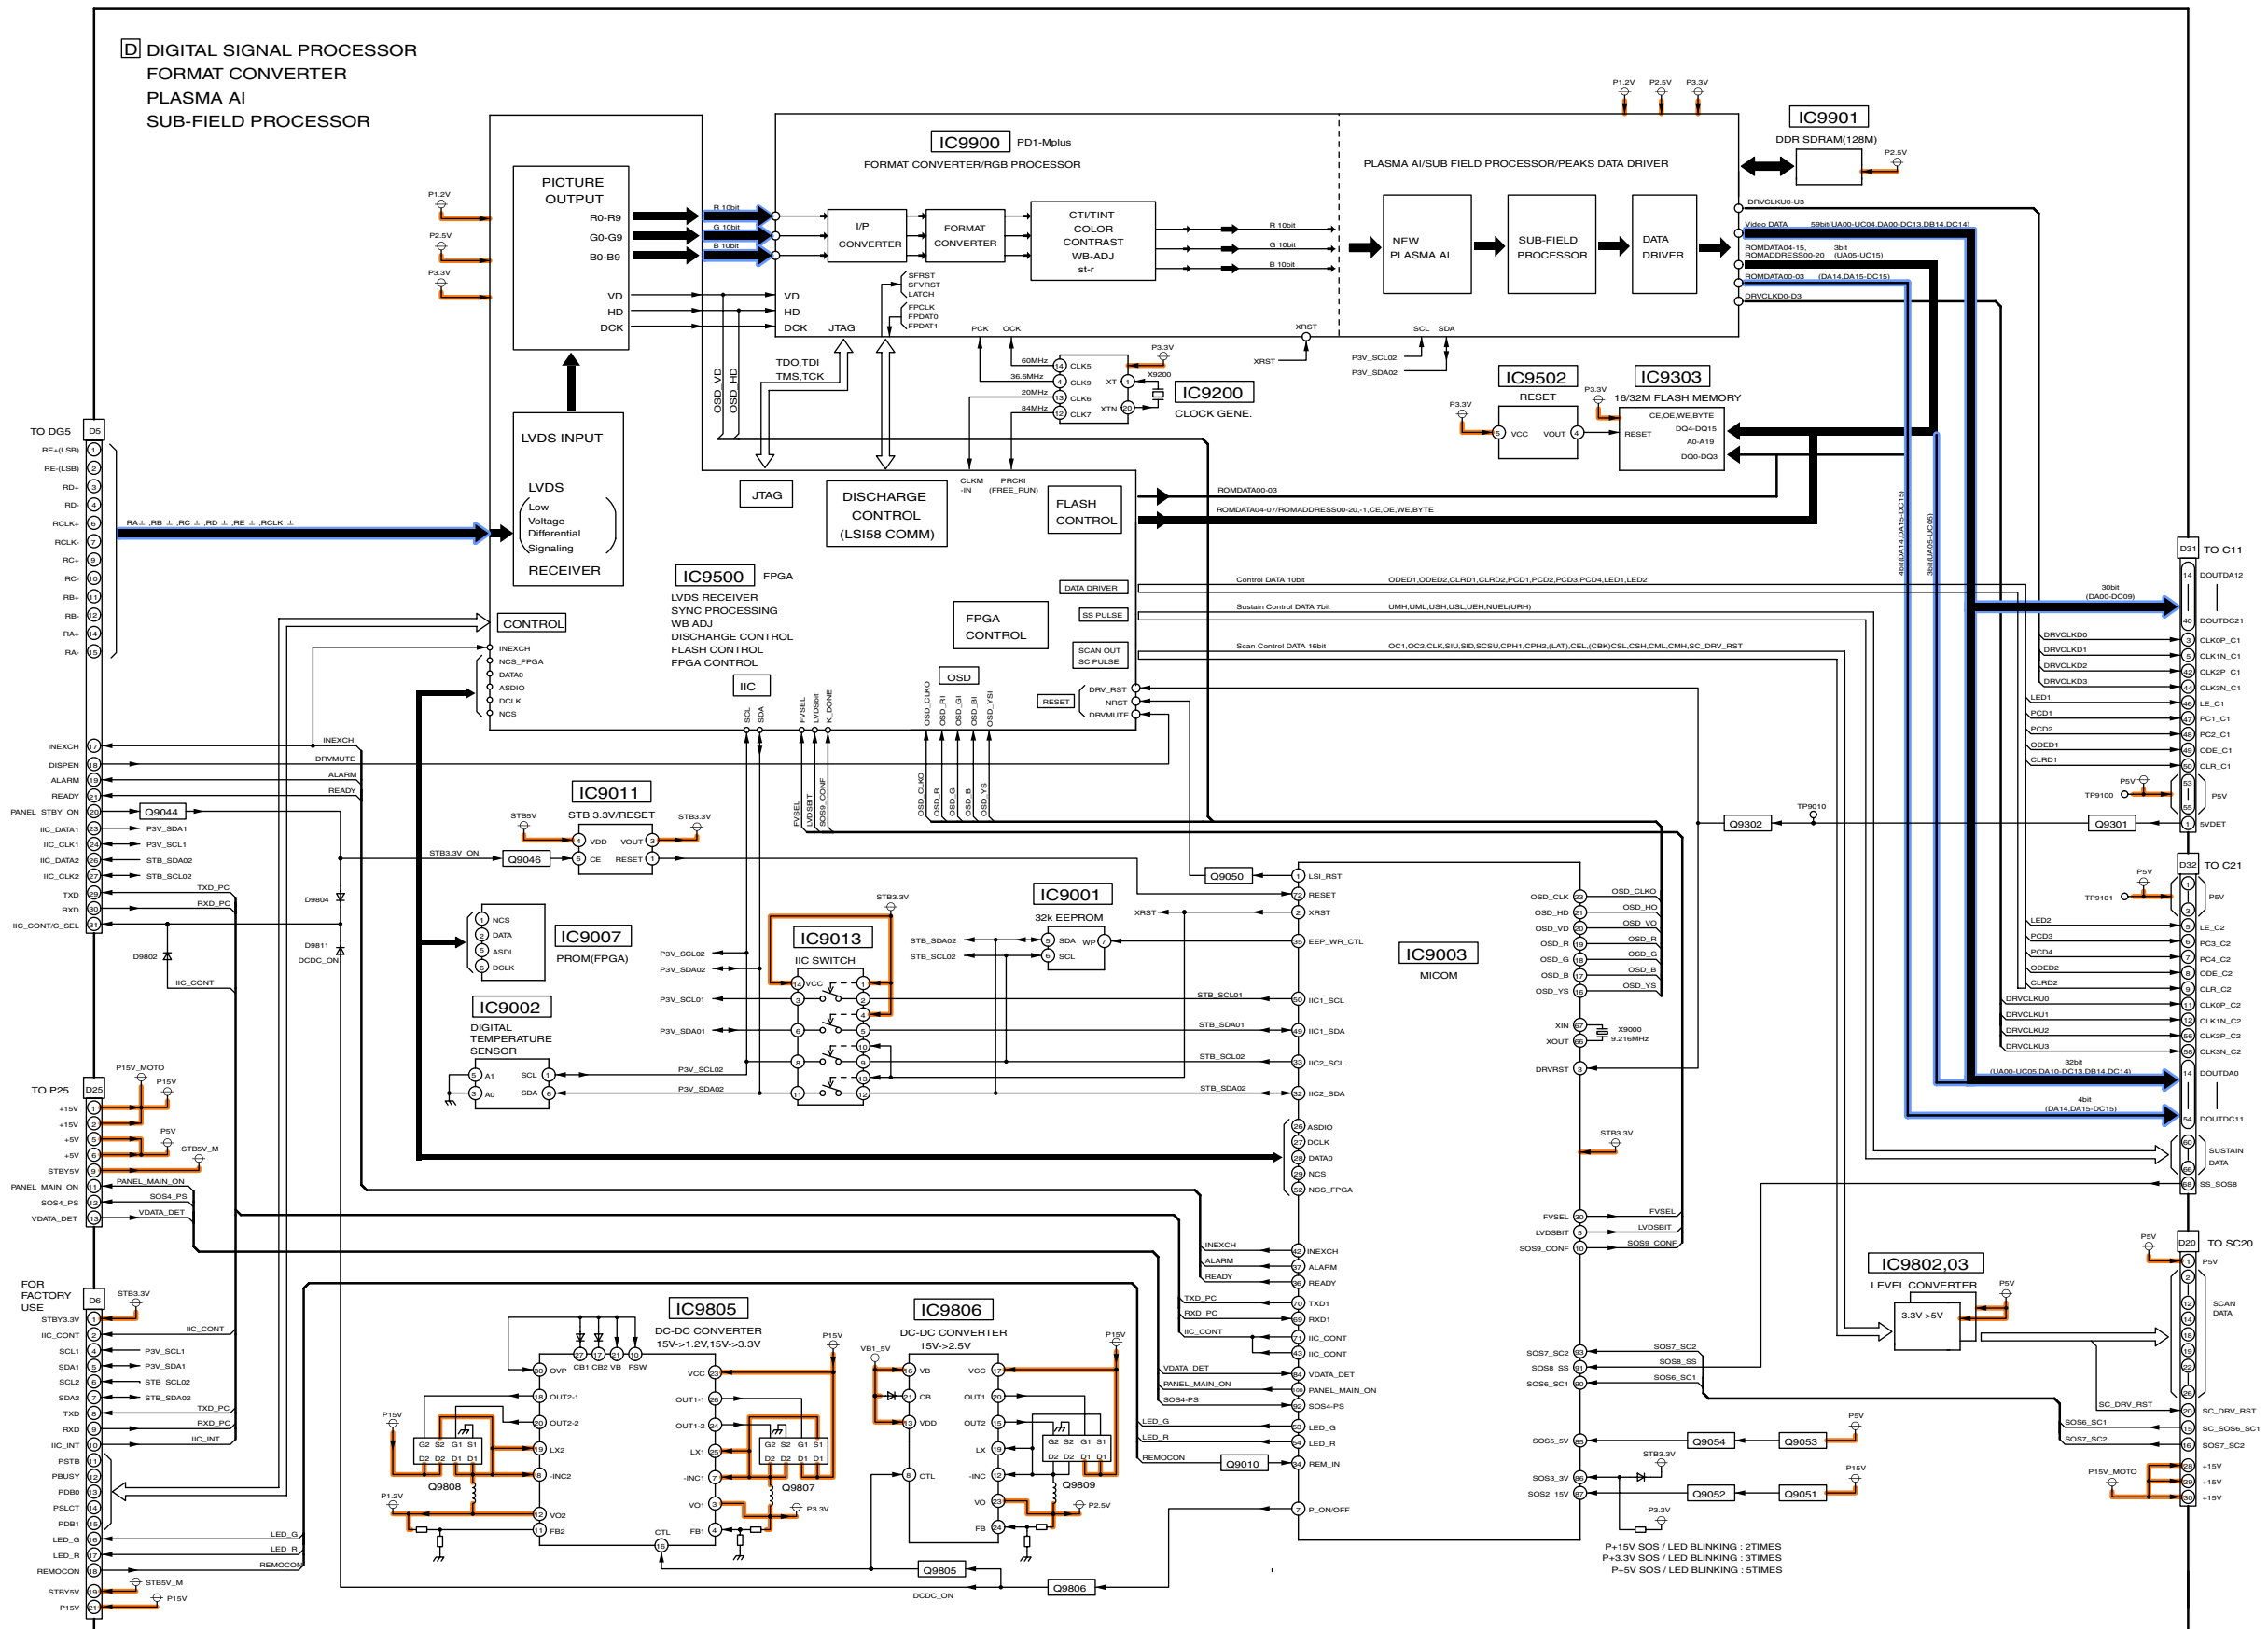


TH-50PV700AZ/H/M/MR
D-Board Block Diagram

TH-50PV700AZ/H/M/MR
D-Board Block Diagram

15.29. D-Board (1 of 6) Schematic Diagram

A
B
C
D
E
F

⚠ D-BOARD TZTNP01HMTP (1/6)

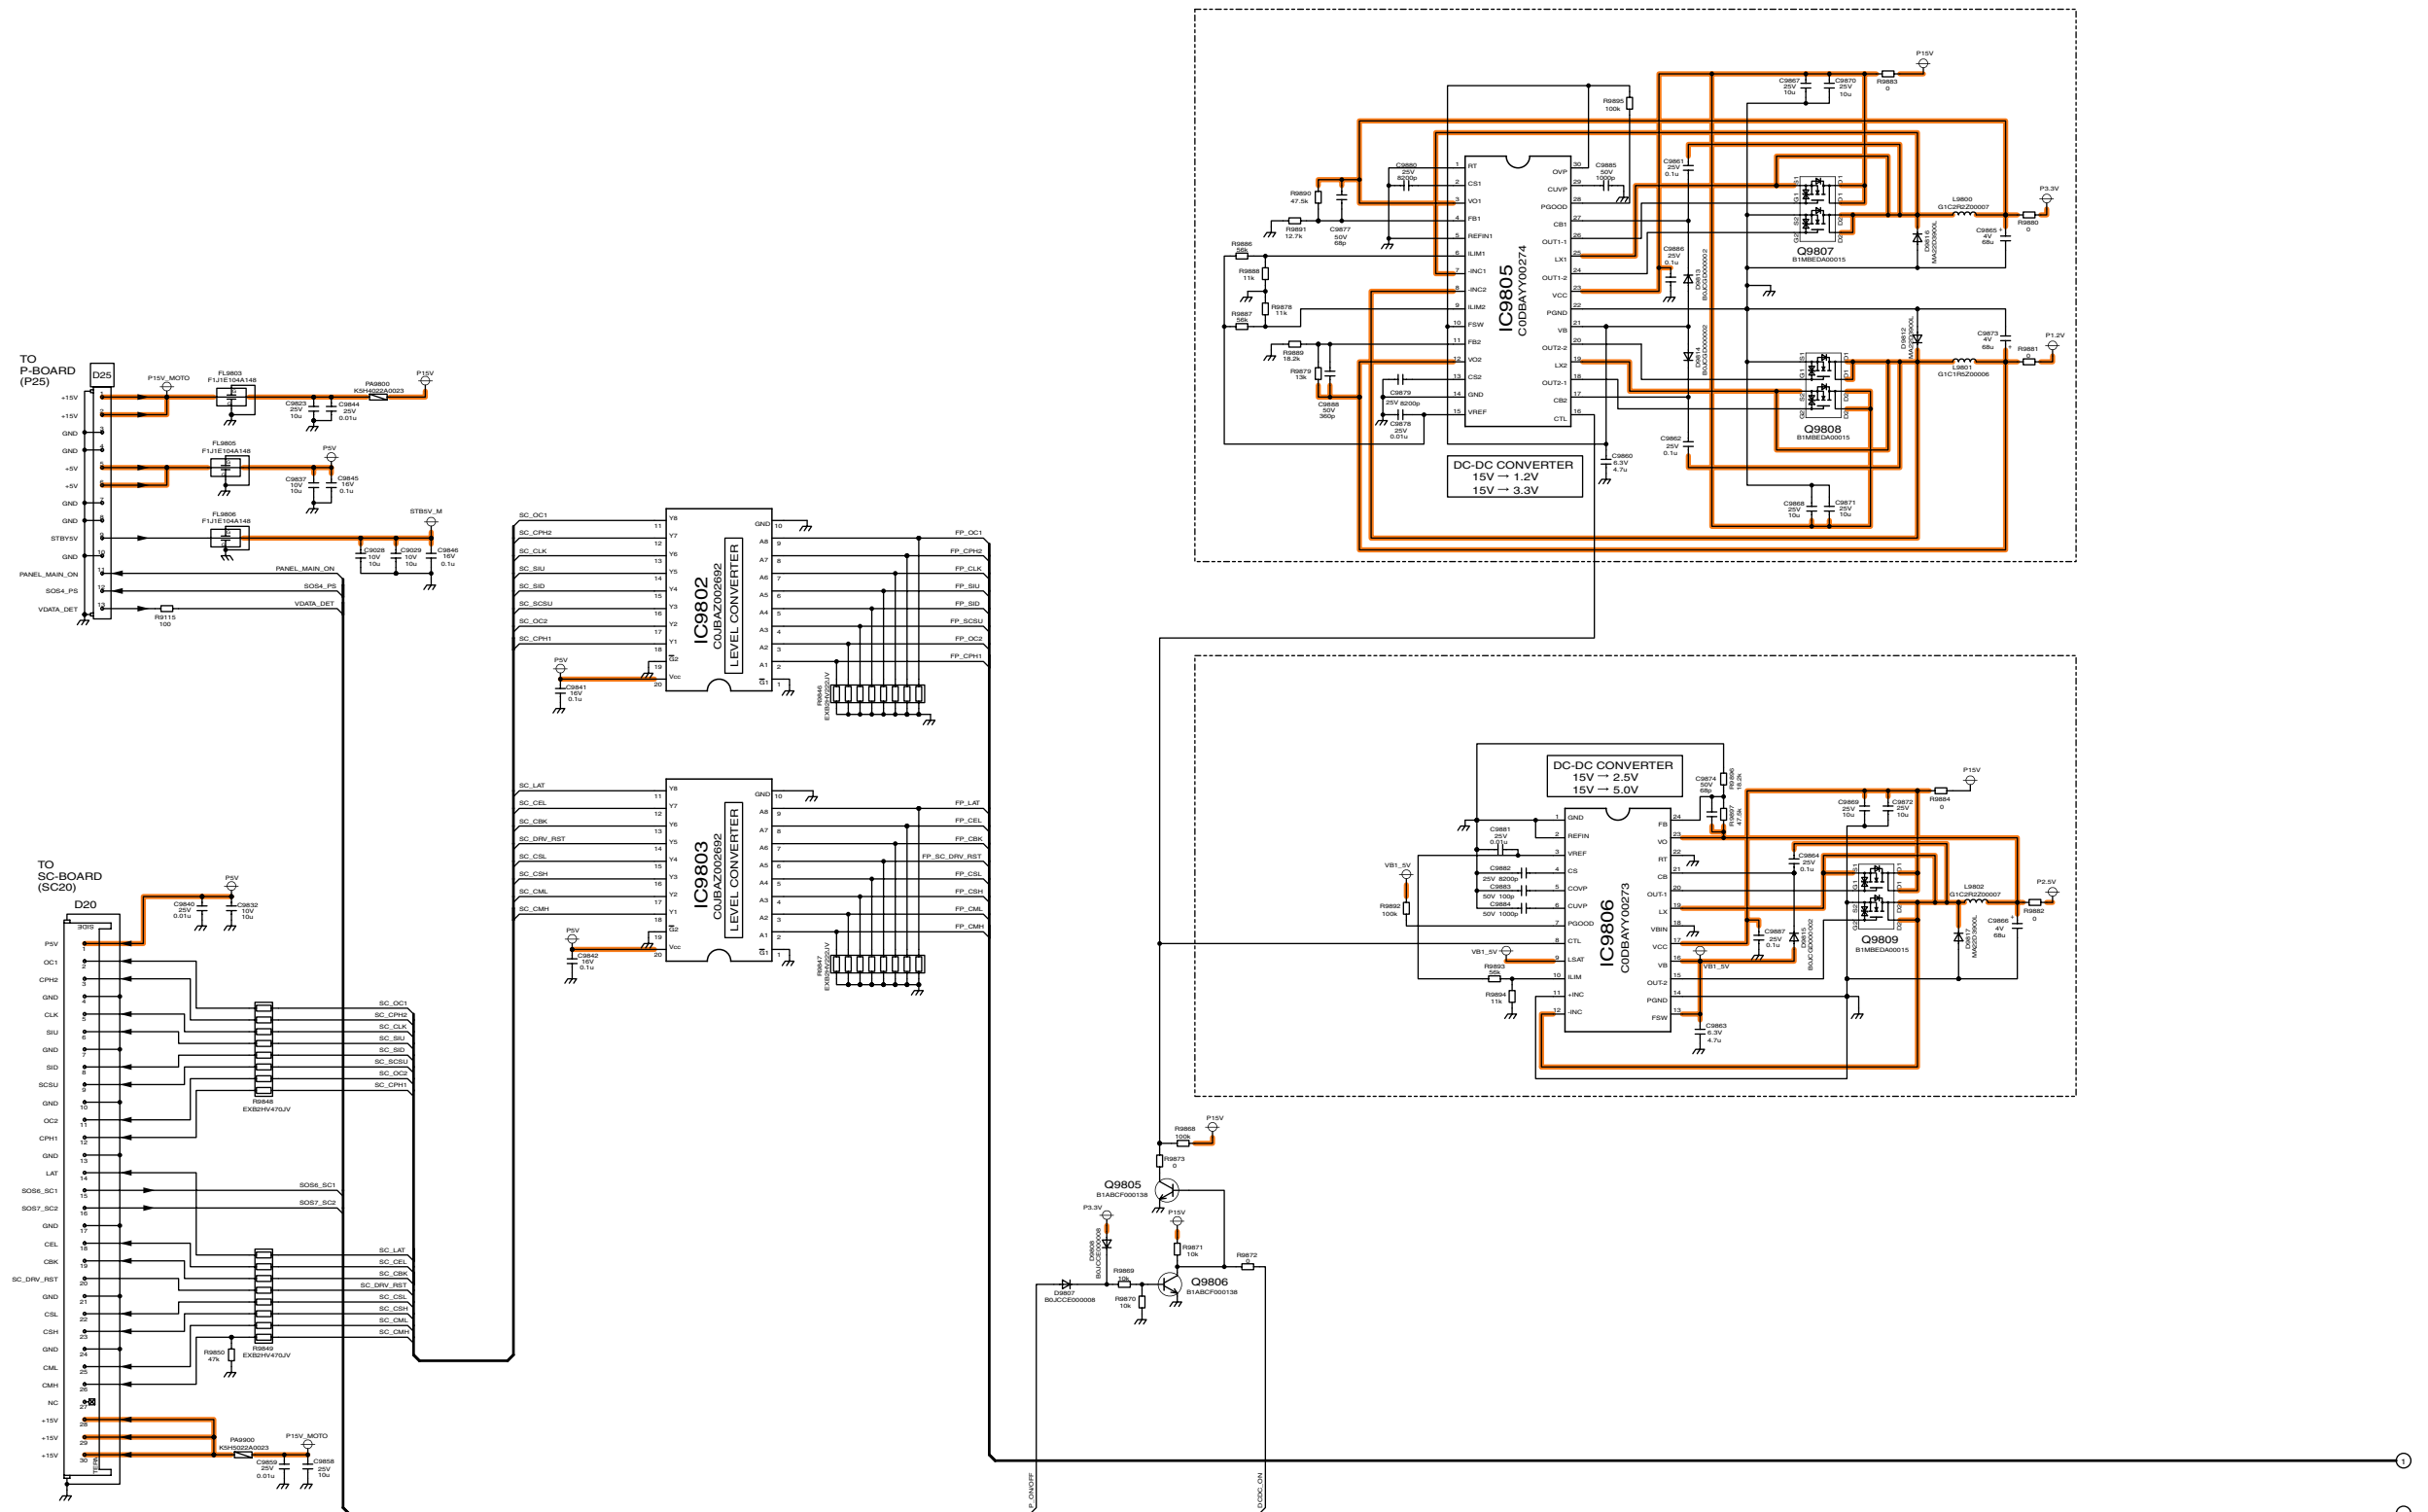

TH-50PV700AZ/H/M/MR
D-Board (1 of 6) Schematic Diagram

TH-50PV700AZ/H/M/MR
D-Board (1 of 6) Schematic Diagram

1

2

3

4

5

6


7

8

9

15.30. D-Board (2 of 6) Schematic Diagram


D-BOARD TZTNP01HMTP (2/6)

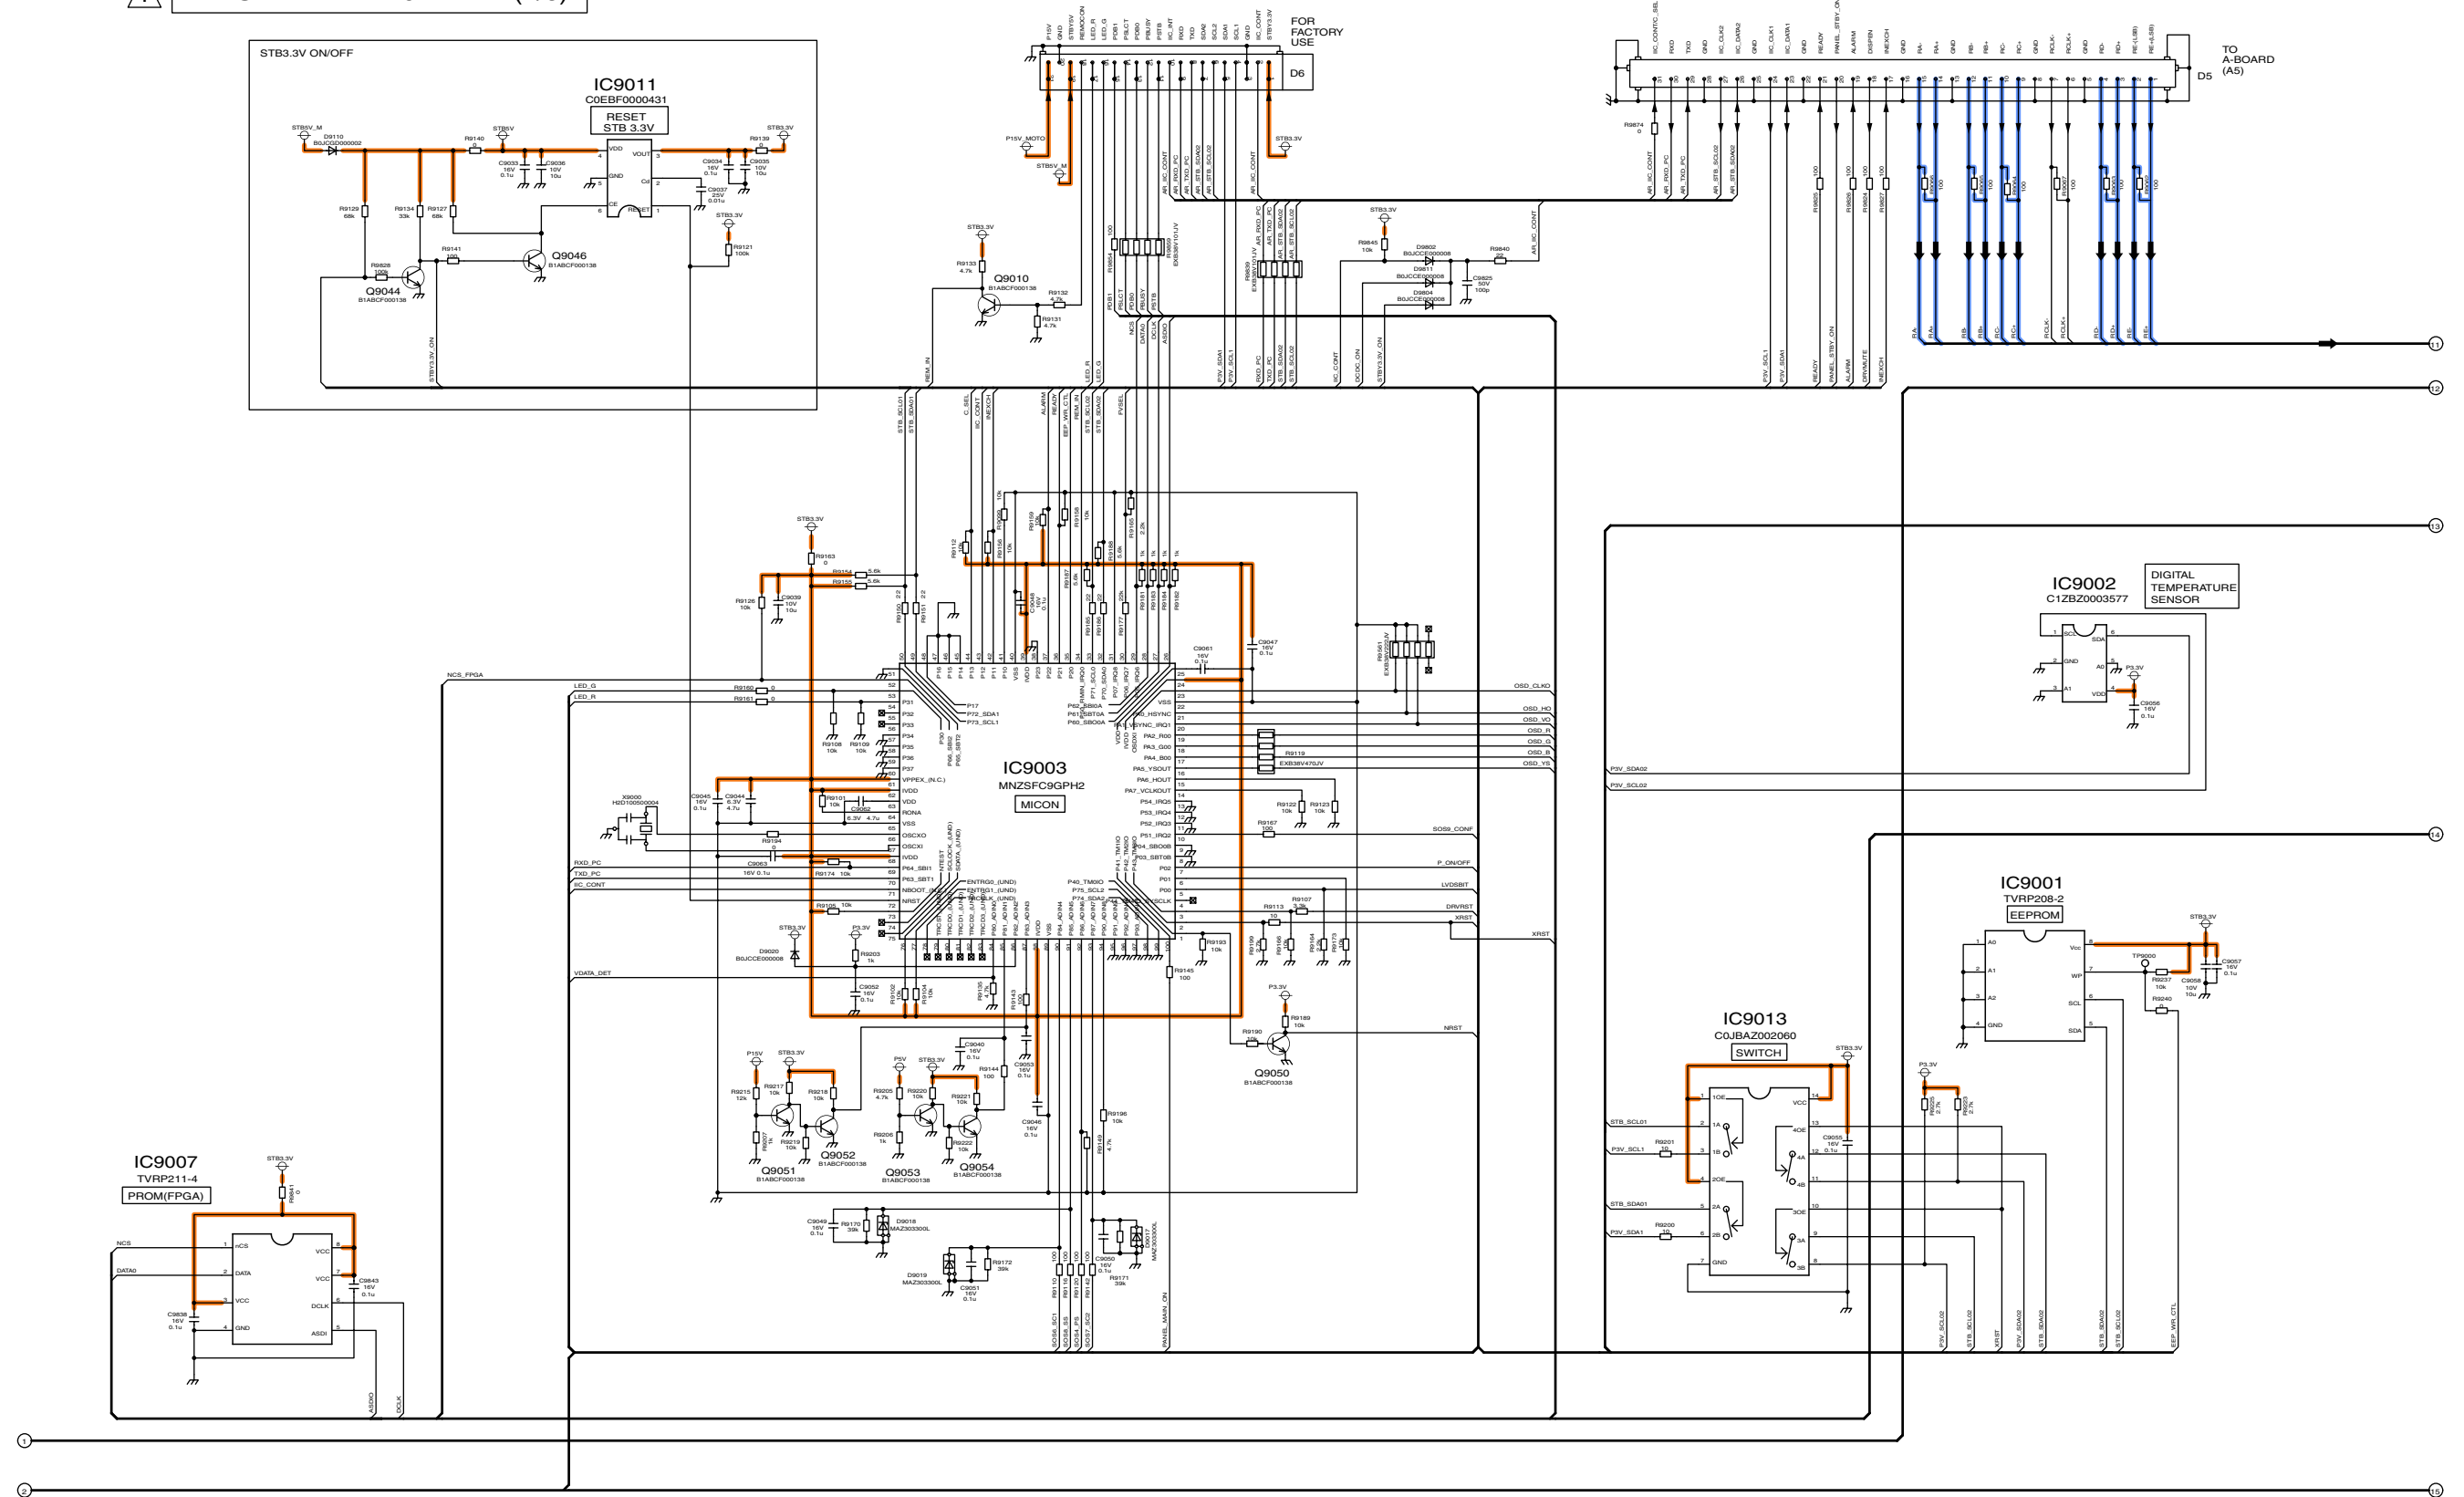

TH-50PV700AZ/H/M/MR
D-Board (2 of 6) Schematic Diagram


TH-50PV700AZ/H/M/MR
D-Board (2 of 6) Schematic Diagram

15.31. D-Board (3 of 6) Schematic Diagram

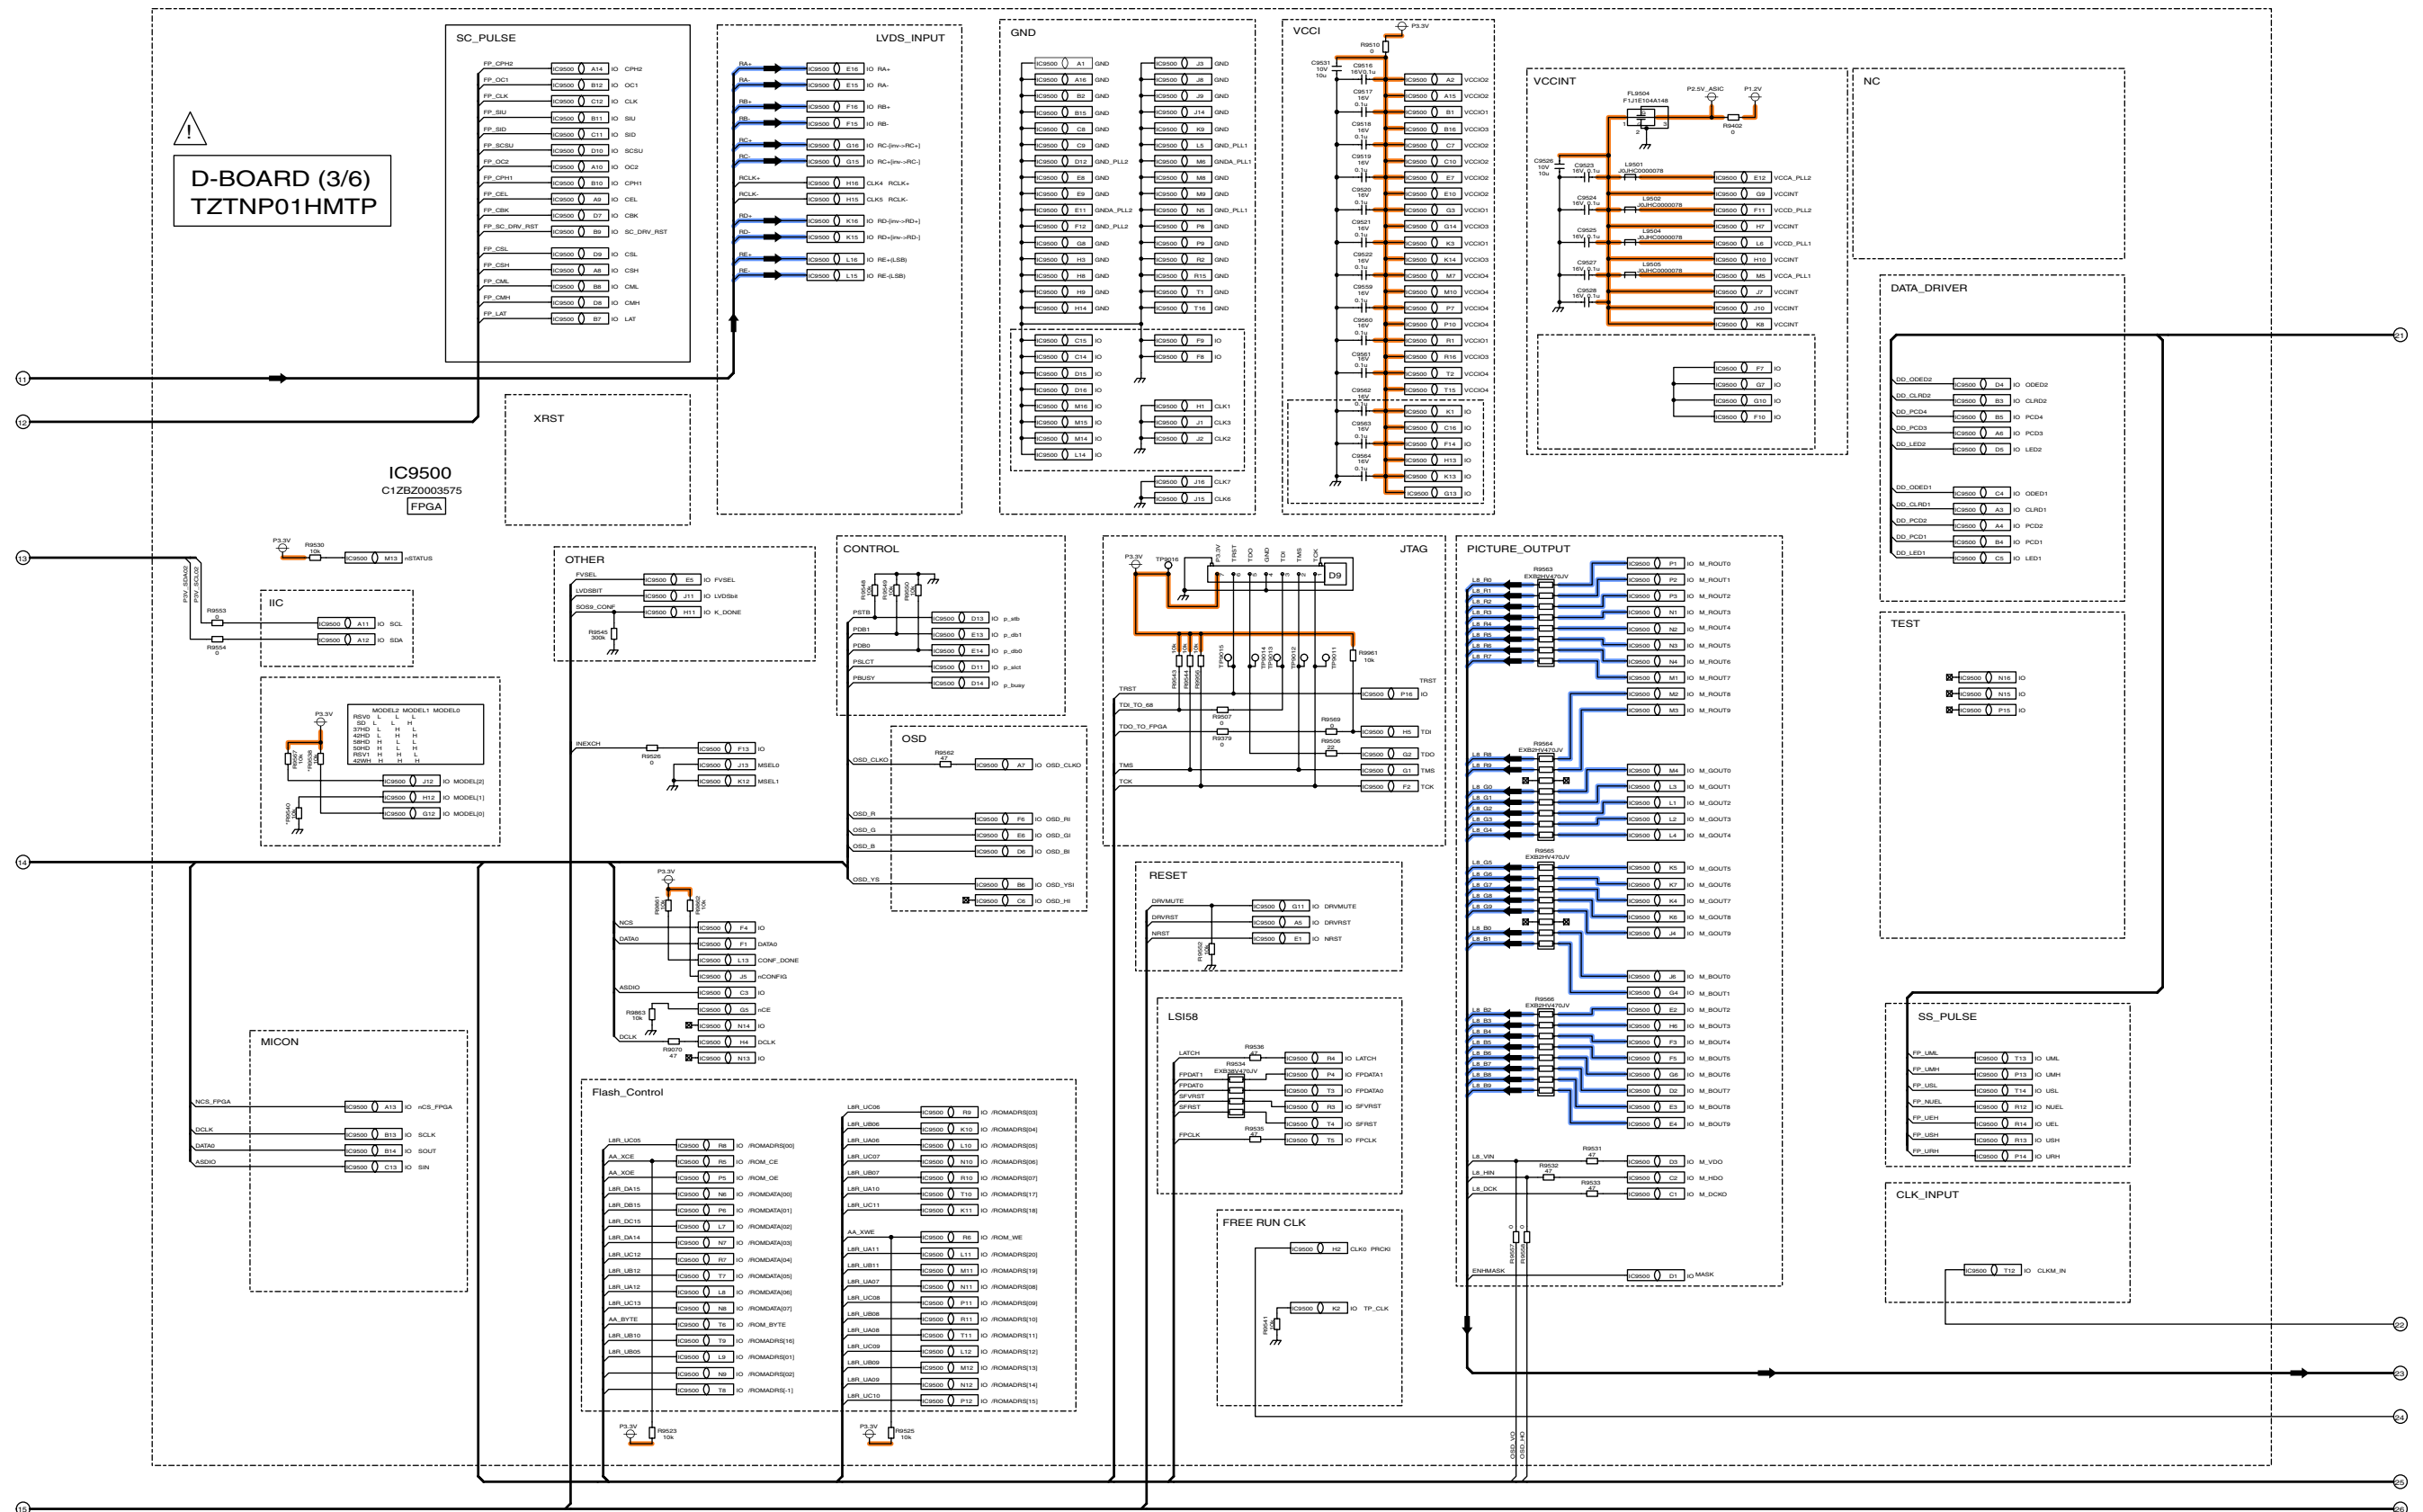

15.32. D-Board (4 of 6) Schematic Diagram

⚠ D-BOARD TZTNP01HMTP (4/6)

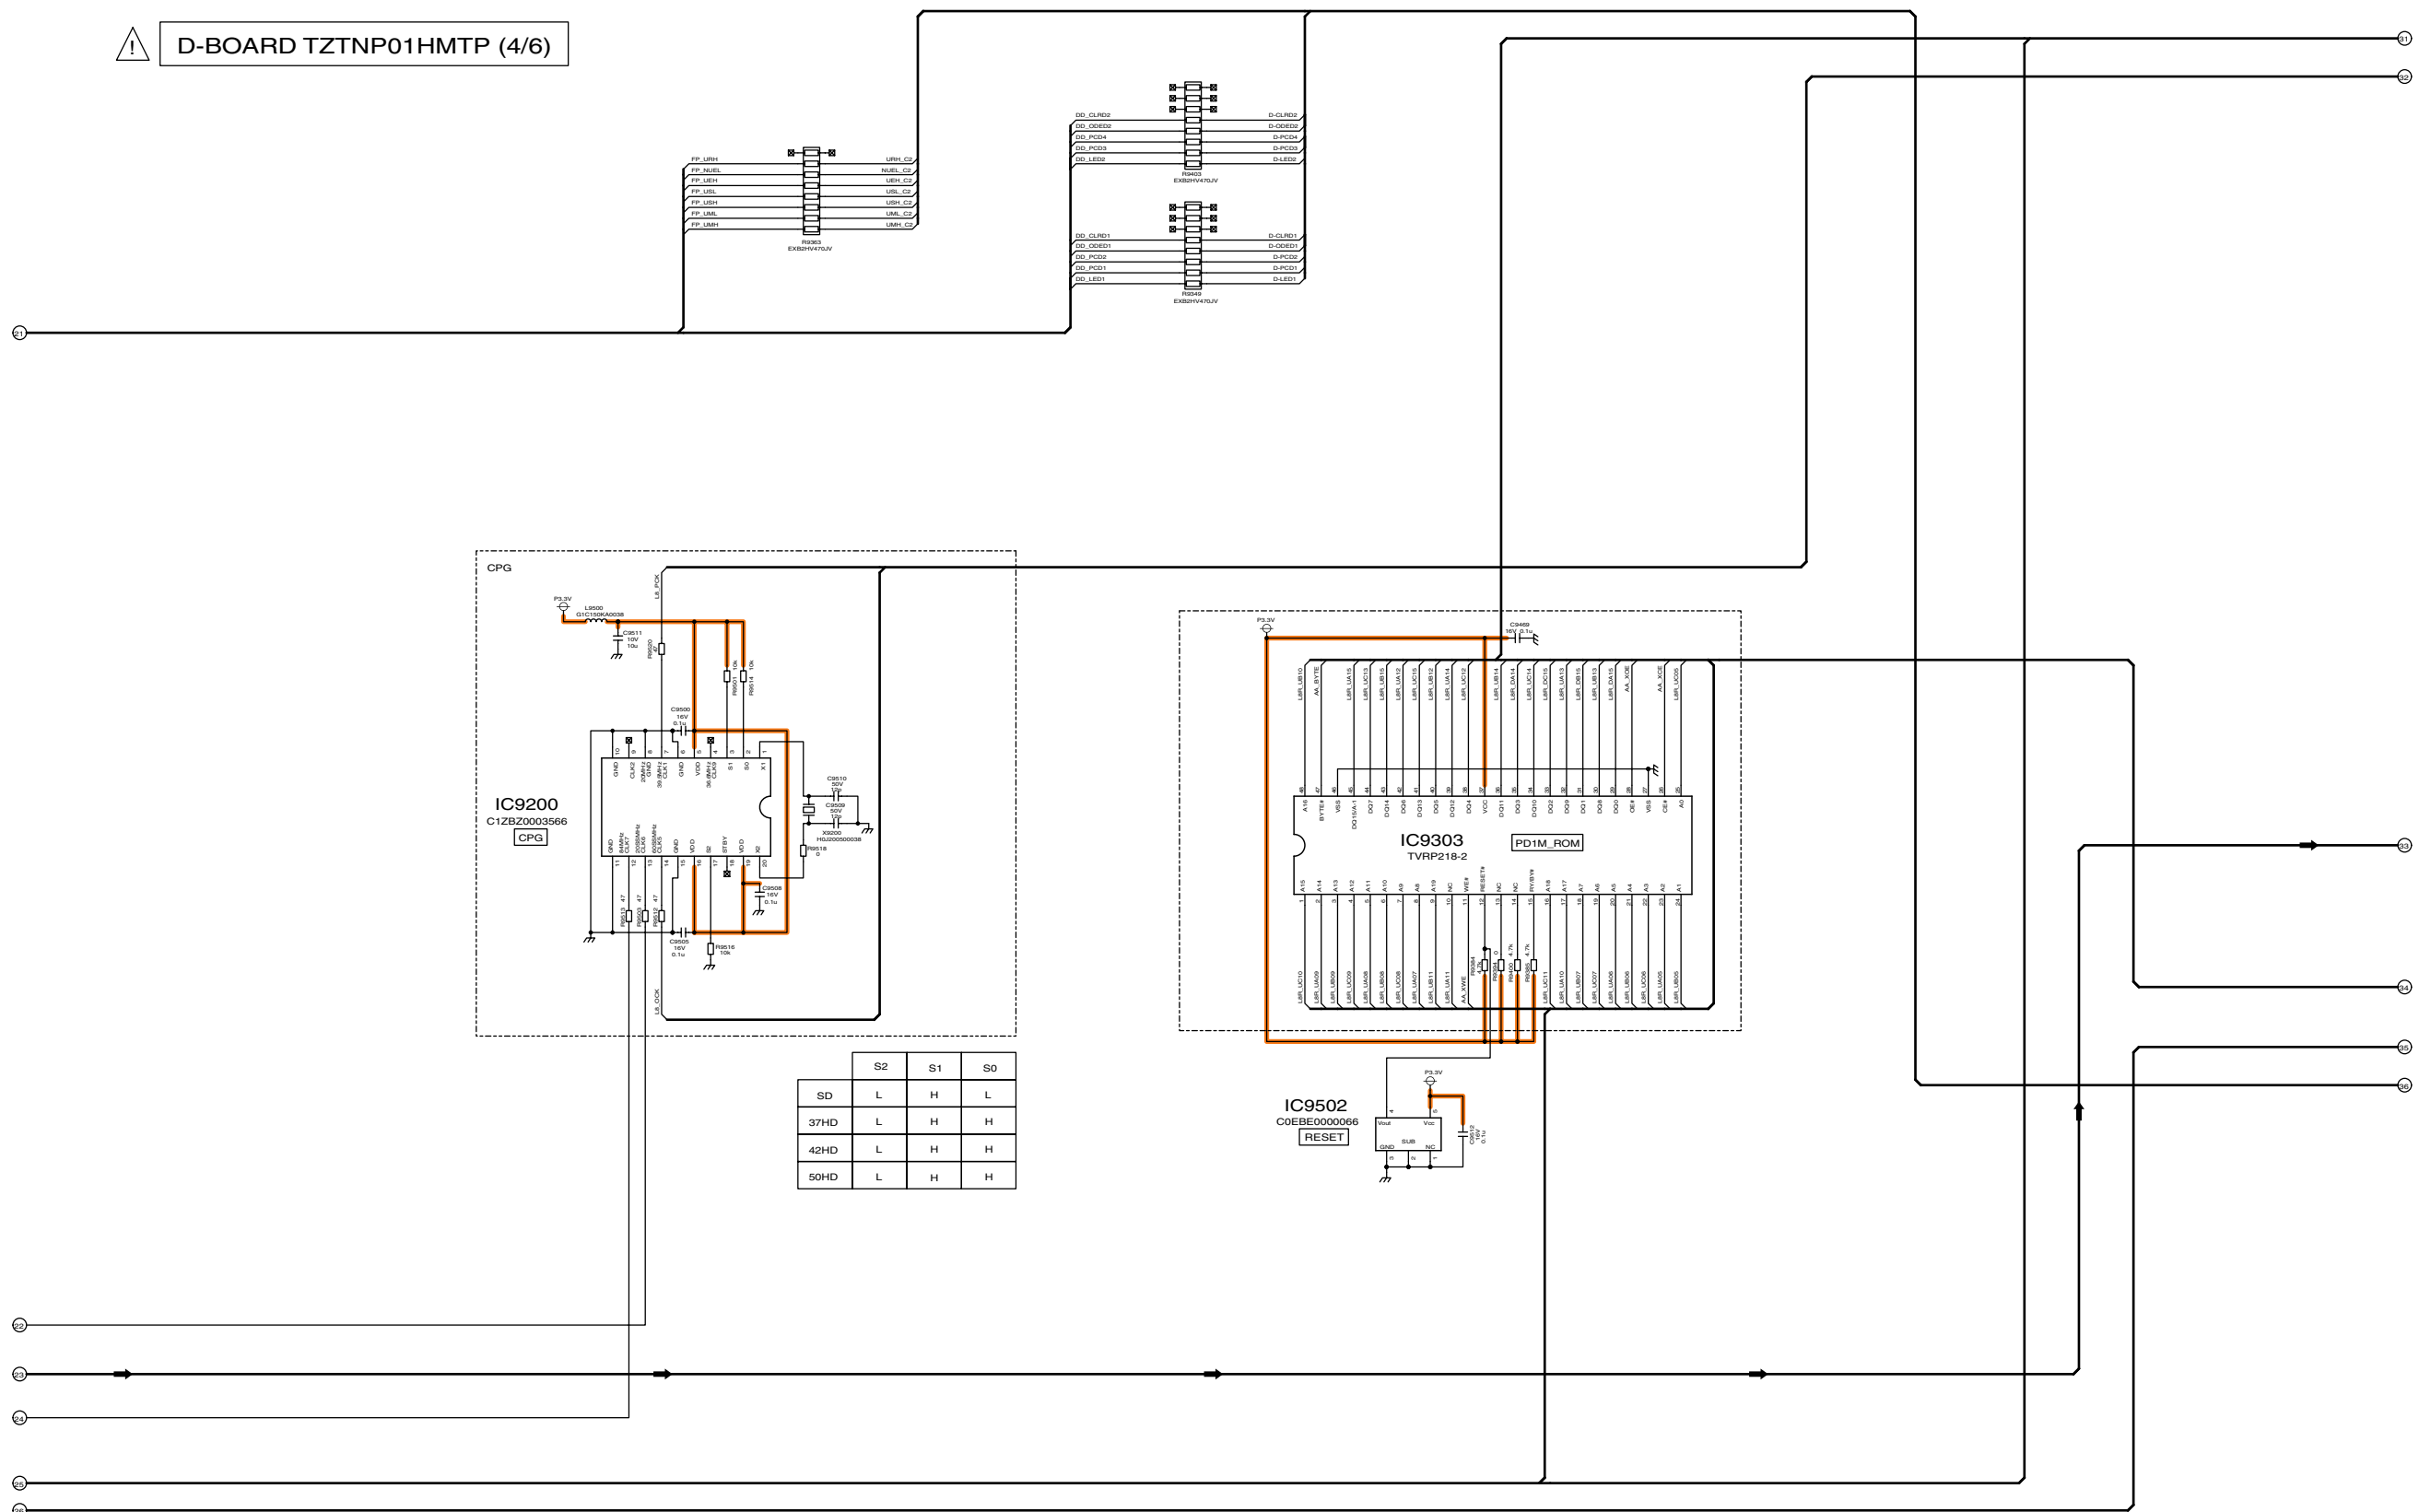

TH-50PV700AZ/H/M/MR
D-Board (4 of 6) Schematic Diagram

TH-50PV700AZ/H/M/MR
D-Board (4 of 6) Schematic Diagram

28

29

30

31

32


33

34

35

36

15.33. D-Board (5 of 6) Schematic Diagram

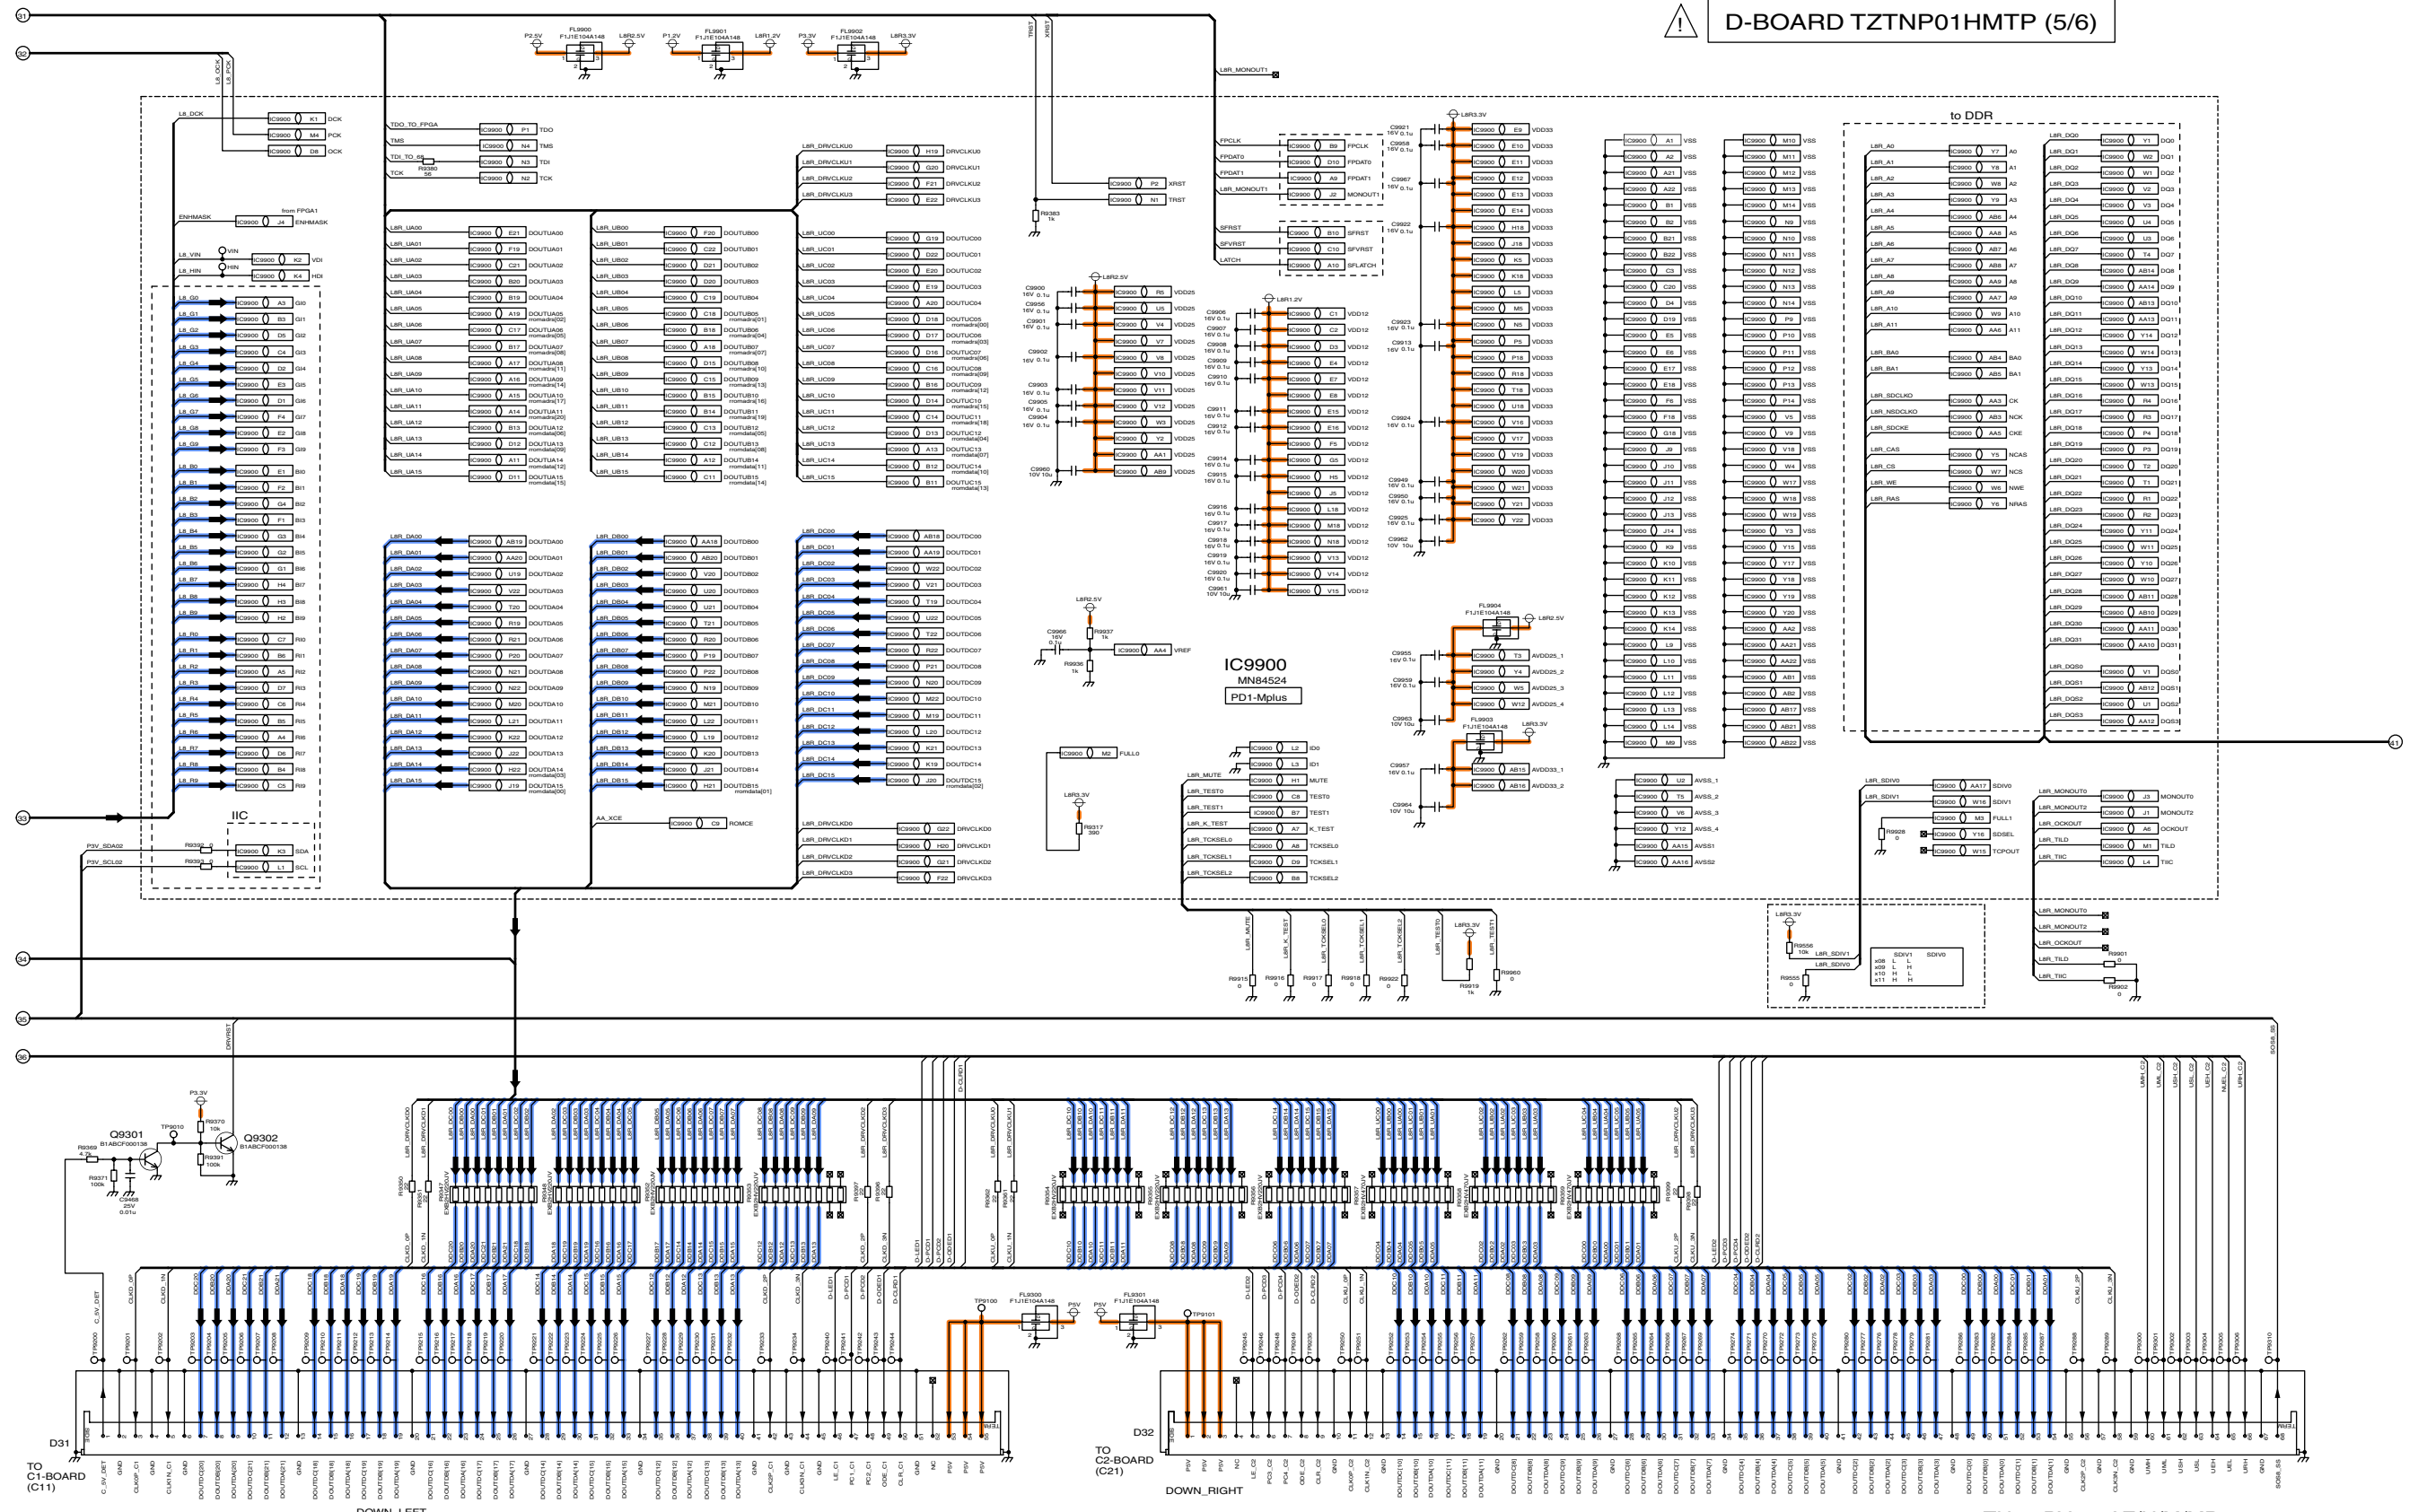

TH-50PV700AZ/H/M/MR
D-Board (5 of 6) Schematic Diagram

TH-50PV700AZ/H/M/MR
D-Board (5 of 6) Schematic Diagram

37

38

39

40

41


42

43

44



45

15.34. D-Board (6 of 6) Schematic Diagram

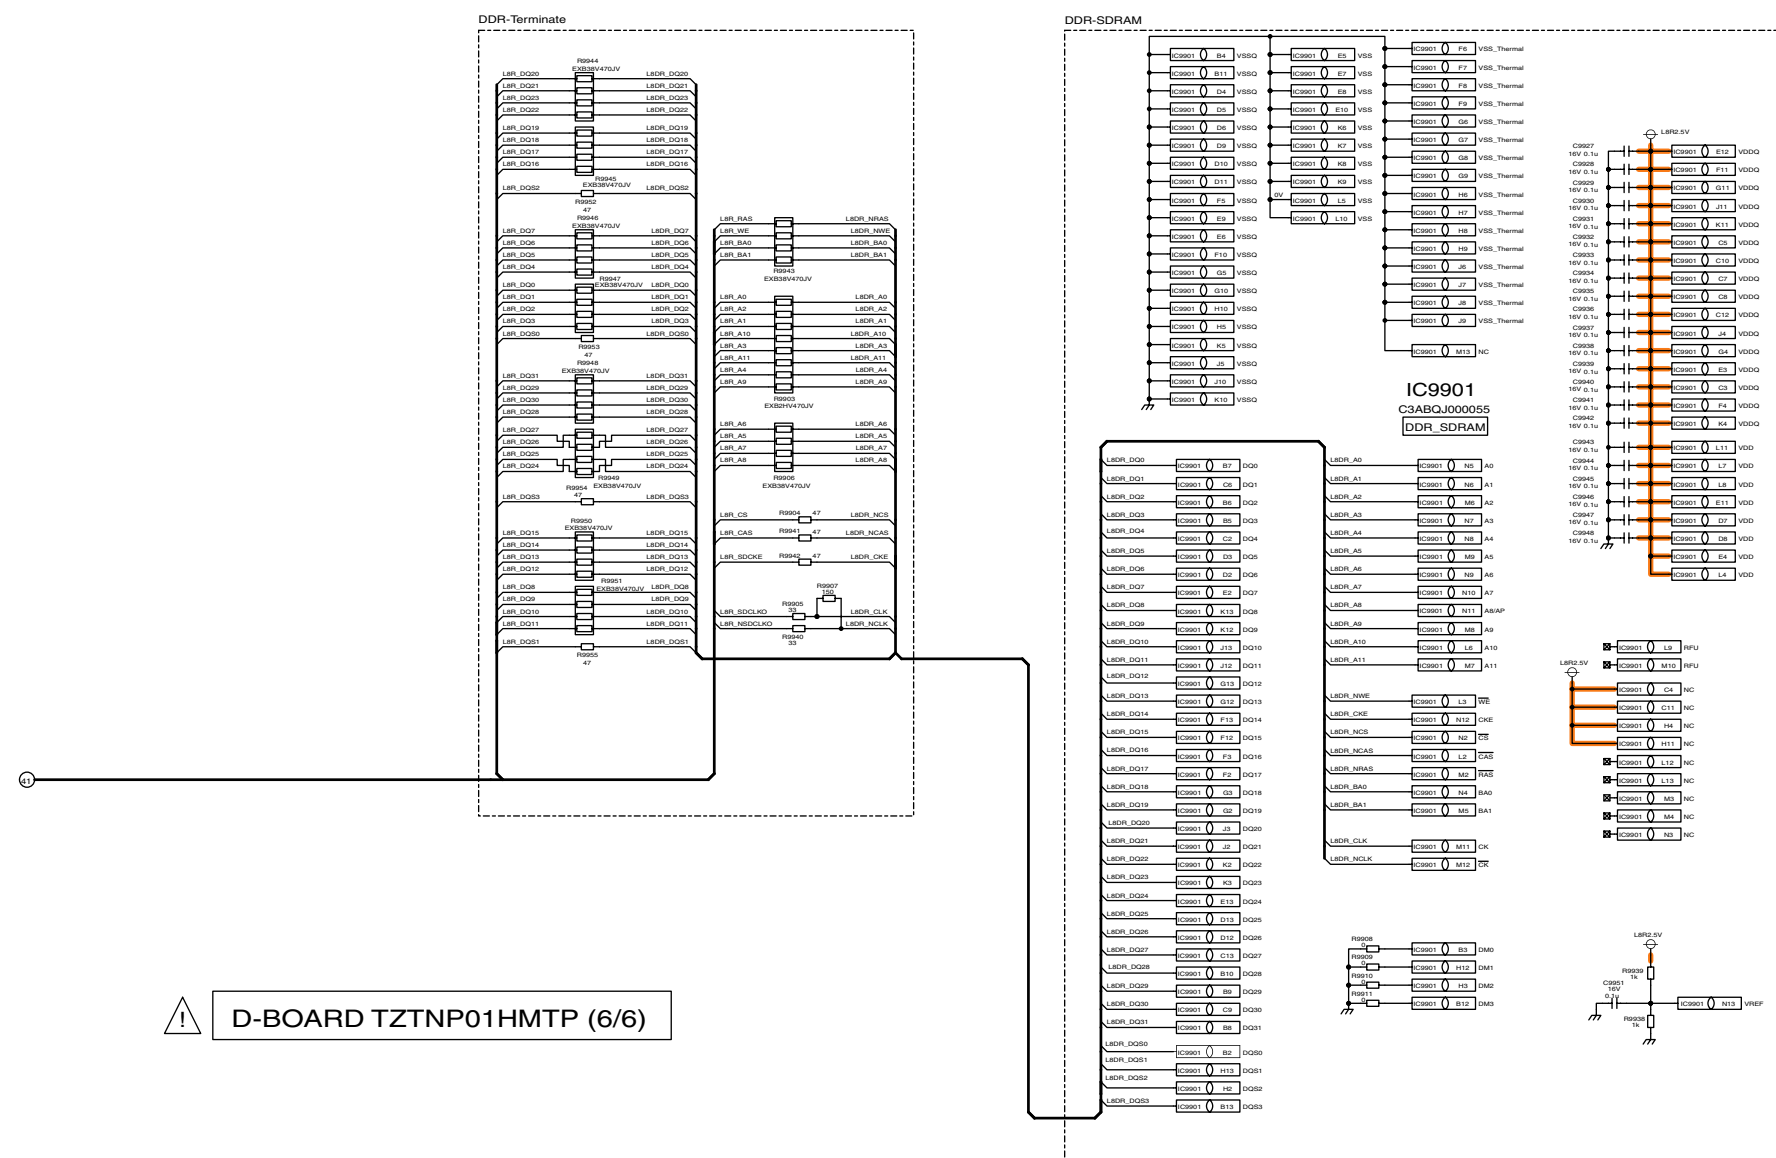


! D-BOARD TZTNP01HMTP (6/6)

15.35. C1, C2 and C3-Board Block Diagram

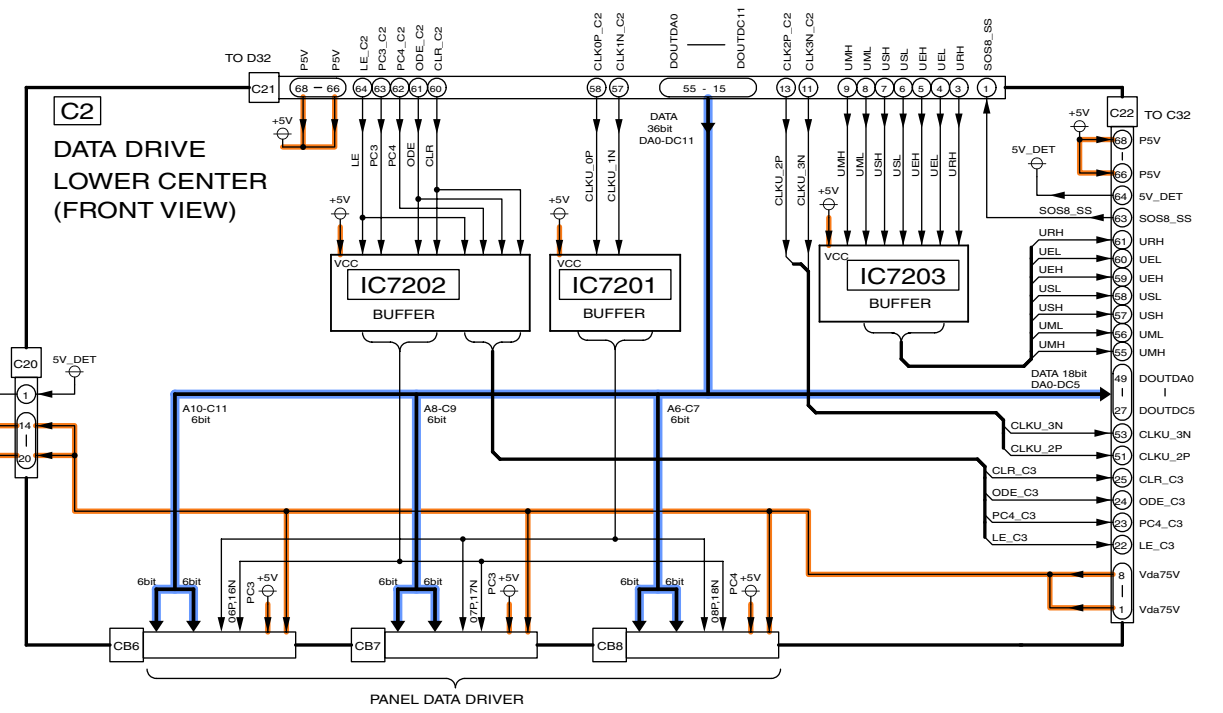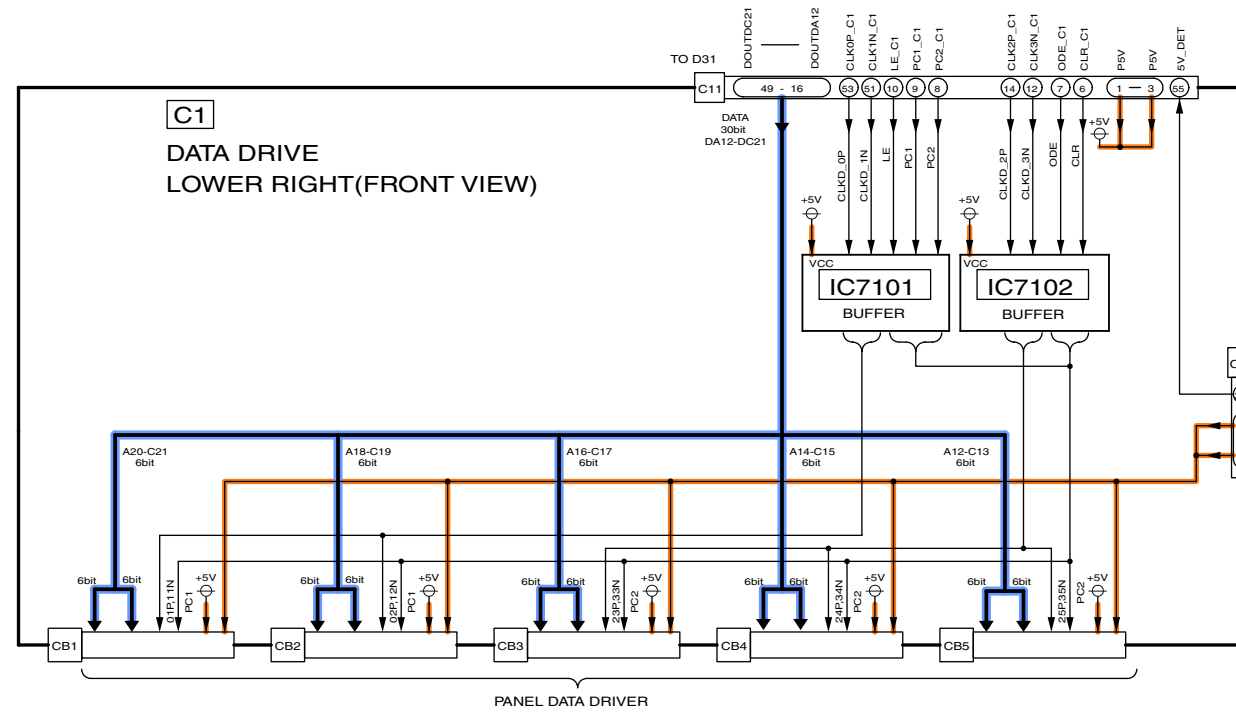


C3
DATA DRIVE
LOWER LEFT
(FRONT VIEW)

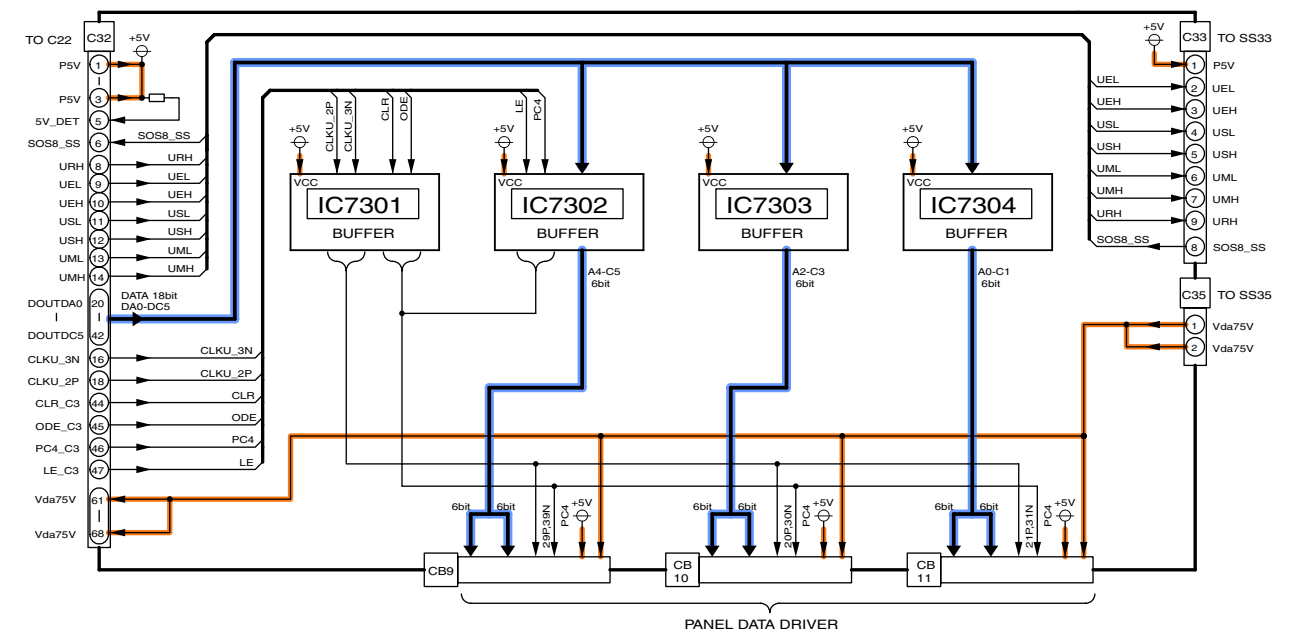

15.36. C1-Board (1 of 3) Schematic Diagram


 C1-BOARD TNPA4169 (1/3)

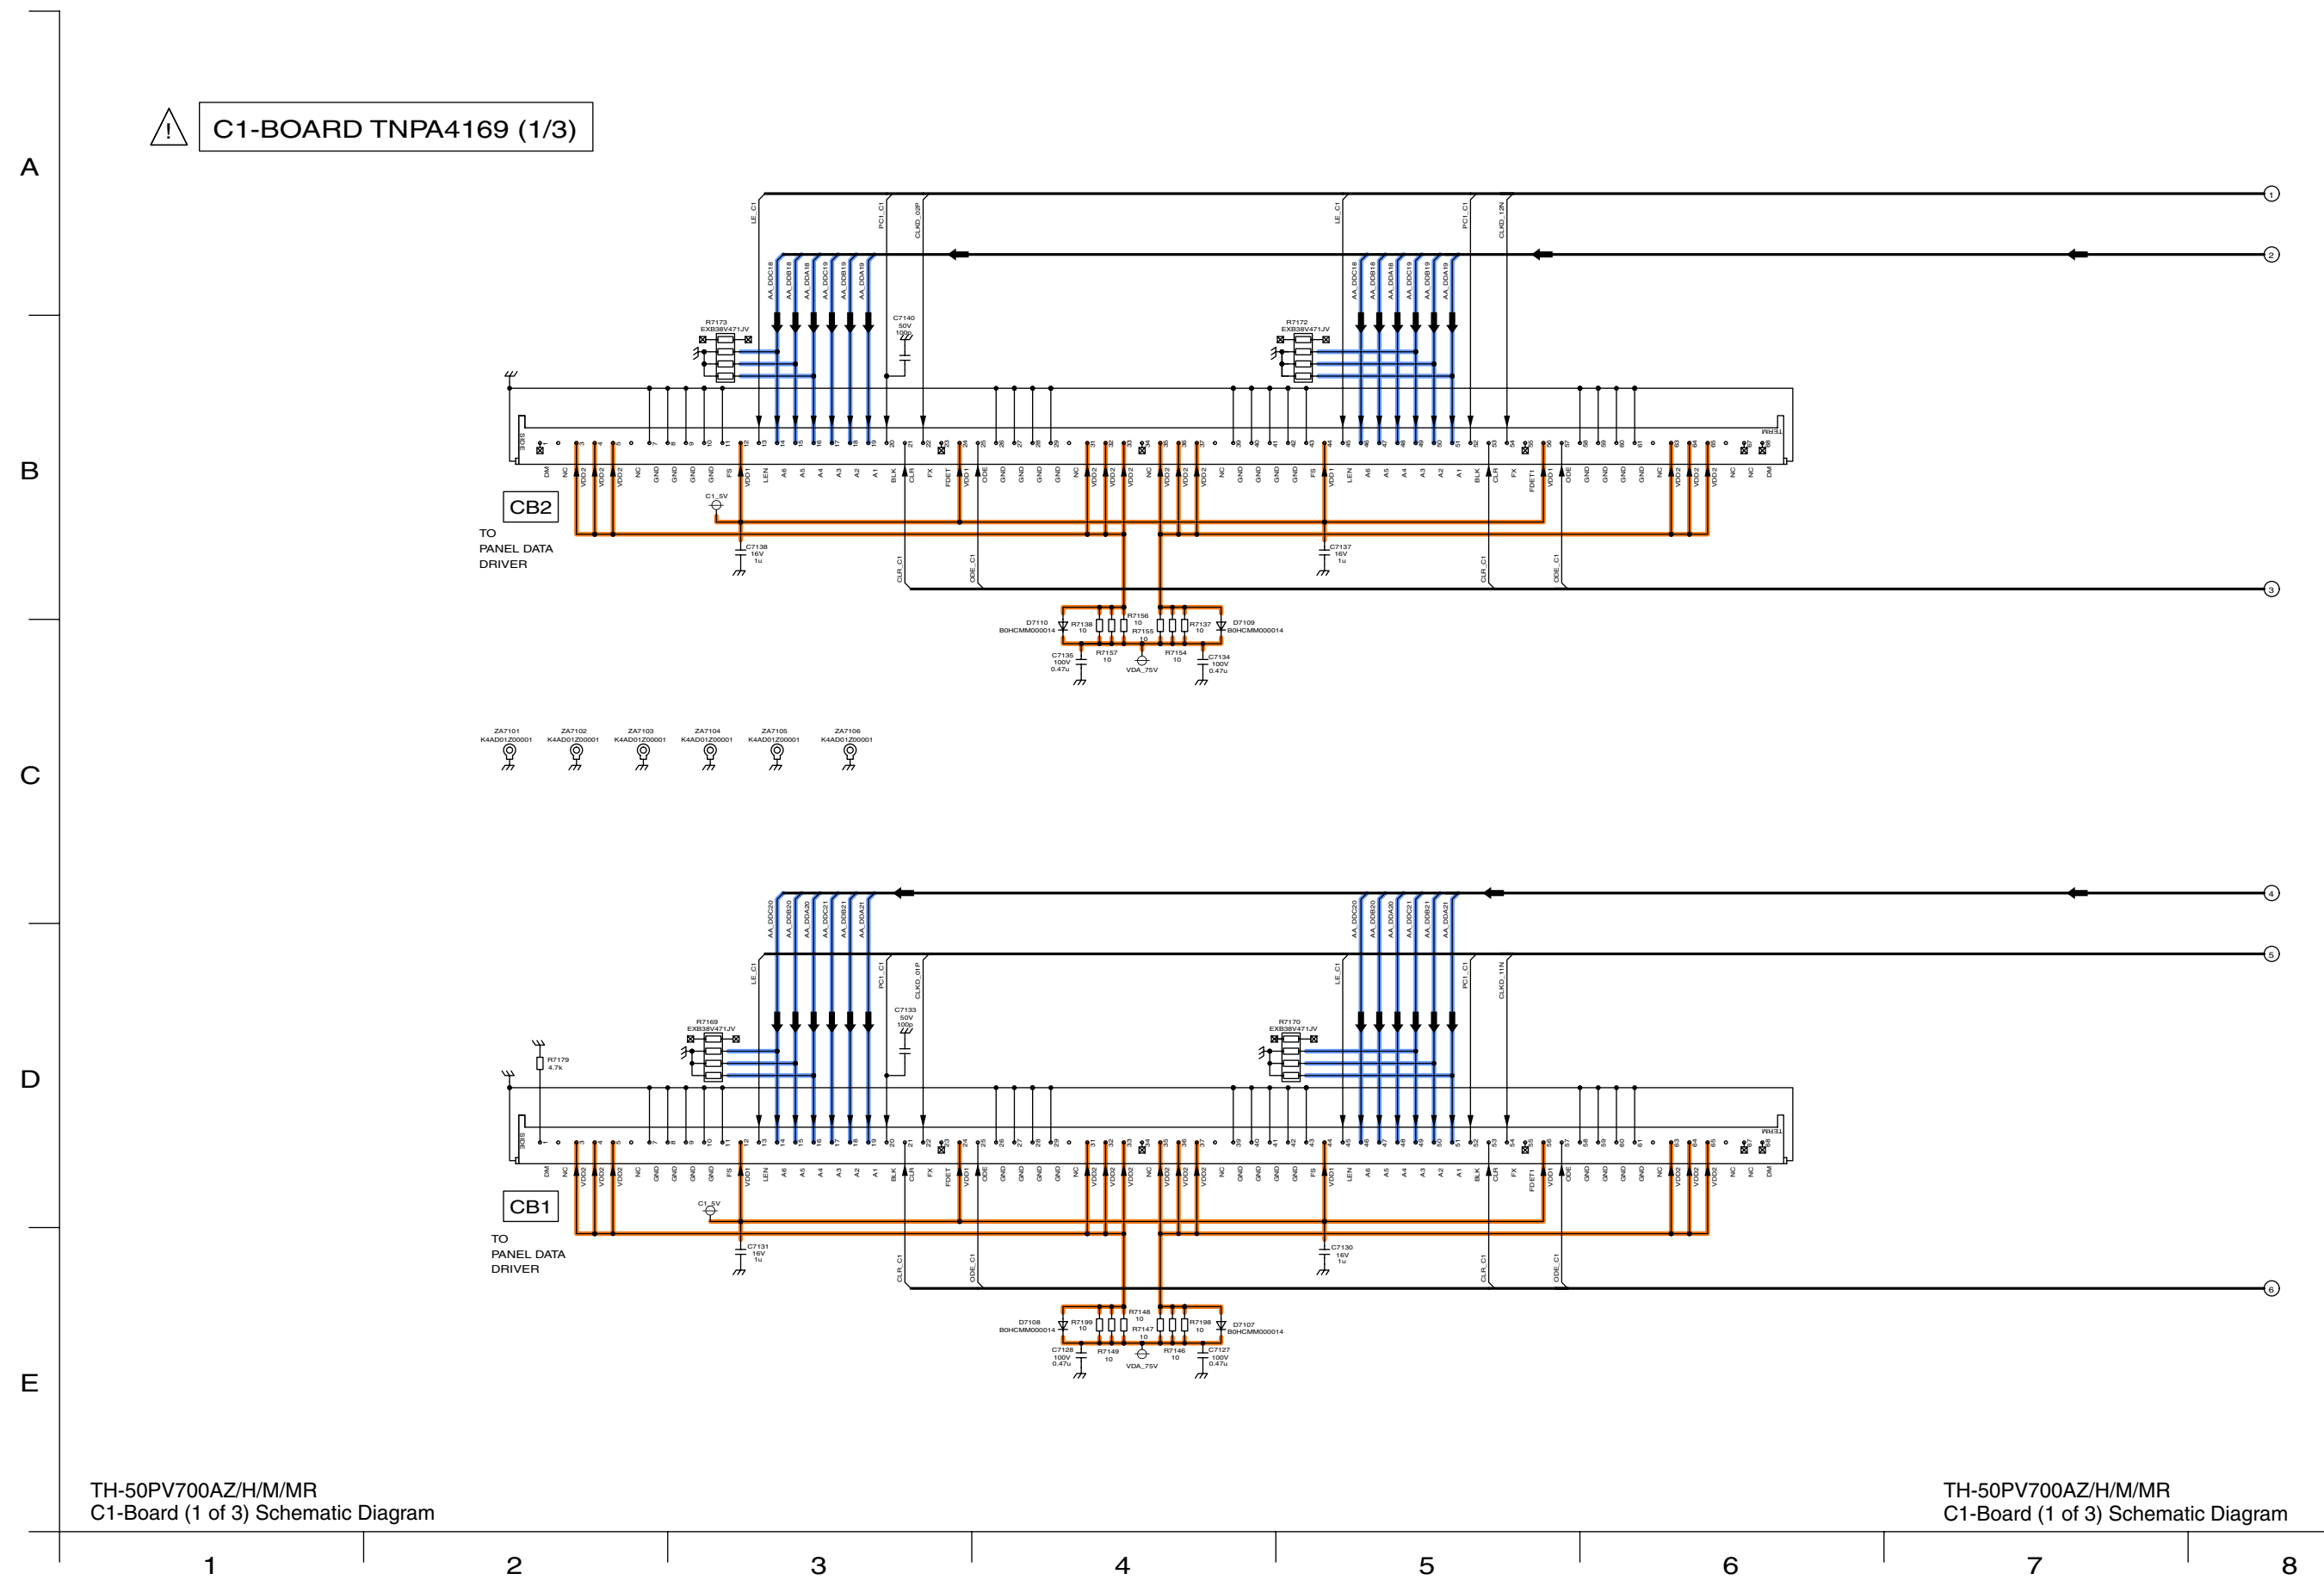

TH-50PV700AZ/H/M/MR
C1-Board (1 of 3) Schematic Diagram

TH-50PV700AZ/H/M/MR
C1-Board (1 of 3) Schematic Diagram

15.37. C1-Board (2 of 3) Schematic Diagram

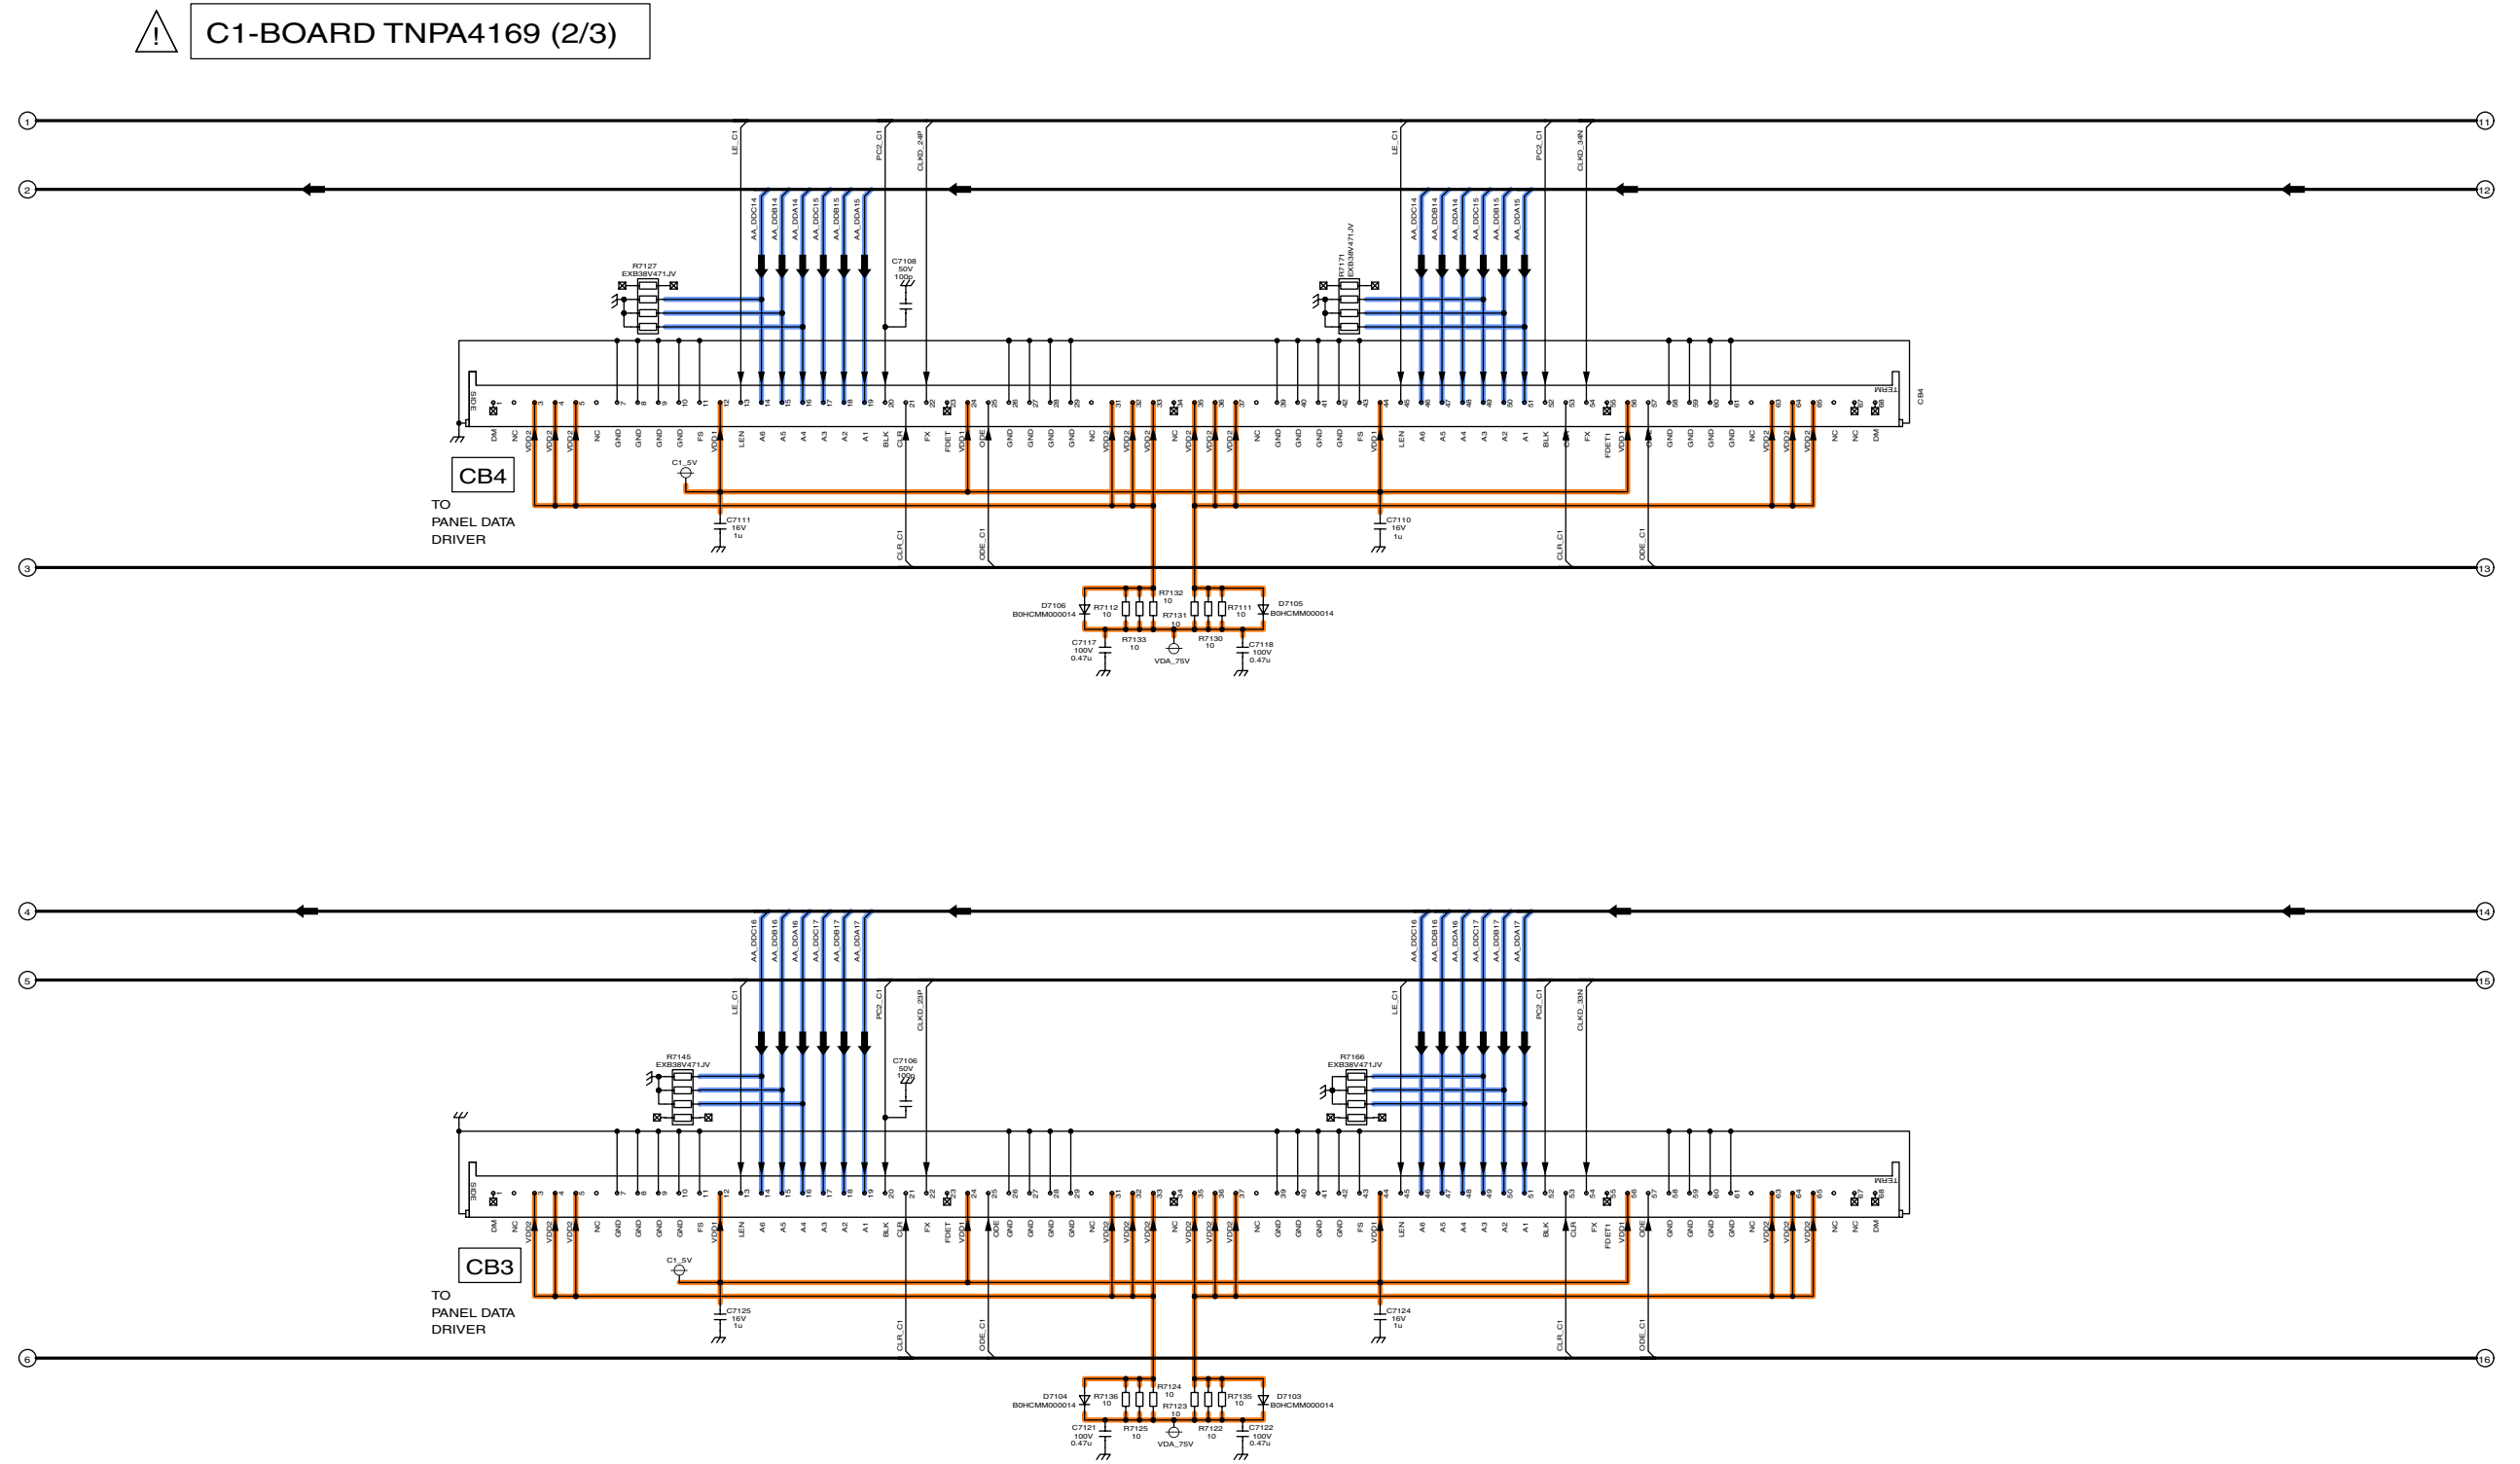

TH-50PV700AZ/H/M/MR
C1-Board (2 of 3) Schematic Diagram

TH-50PV700AZ/H/M/MR
C1-Board (2 of 3) Schematic Diagram

8

9

10

11

12


13

14

15

15.38. C1-Board (3 of 3) Schematic Diagram

C1-BOARD TNPA4169 (3/3)

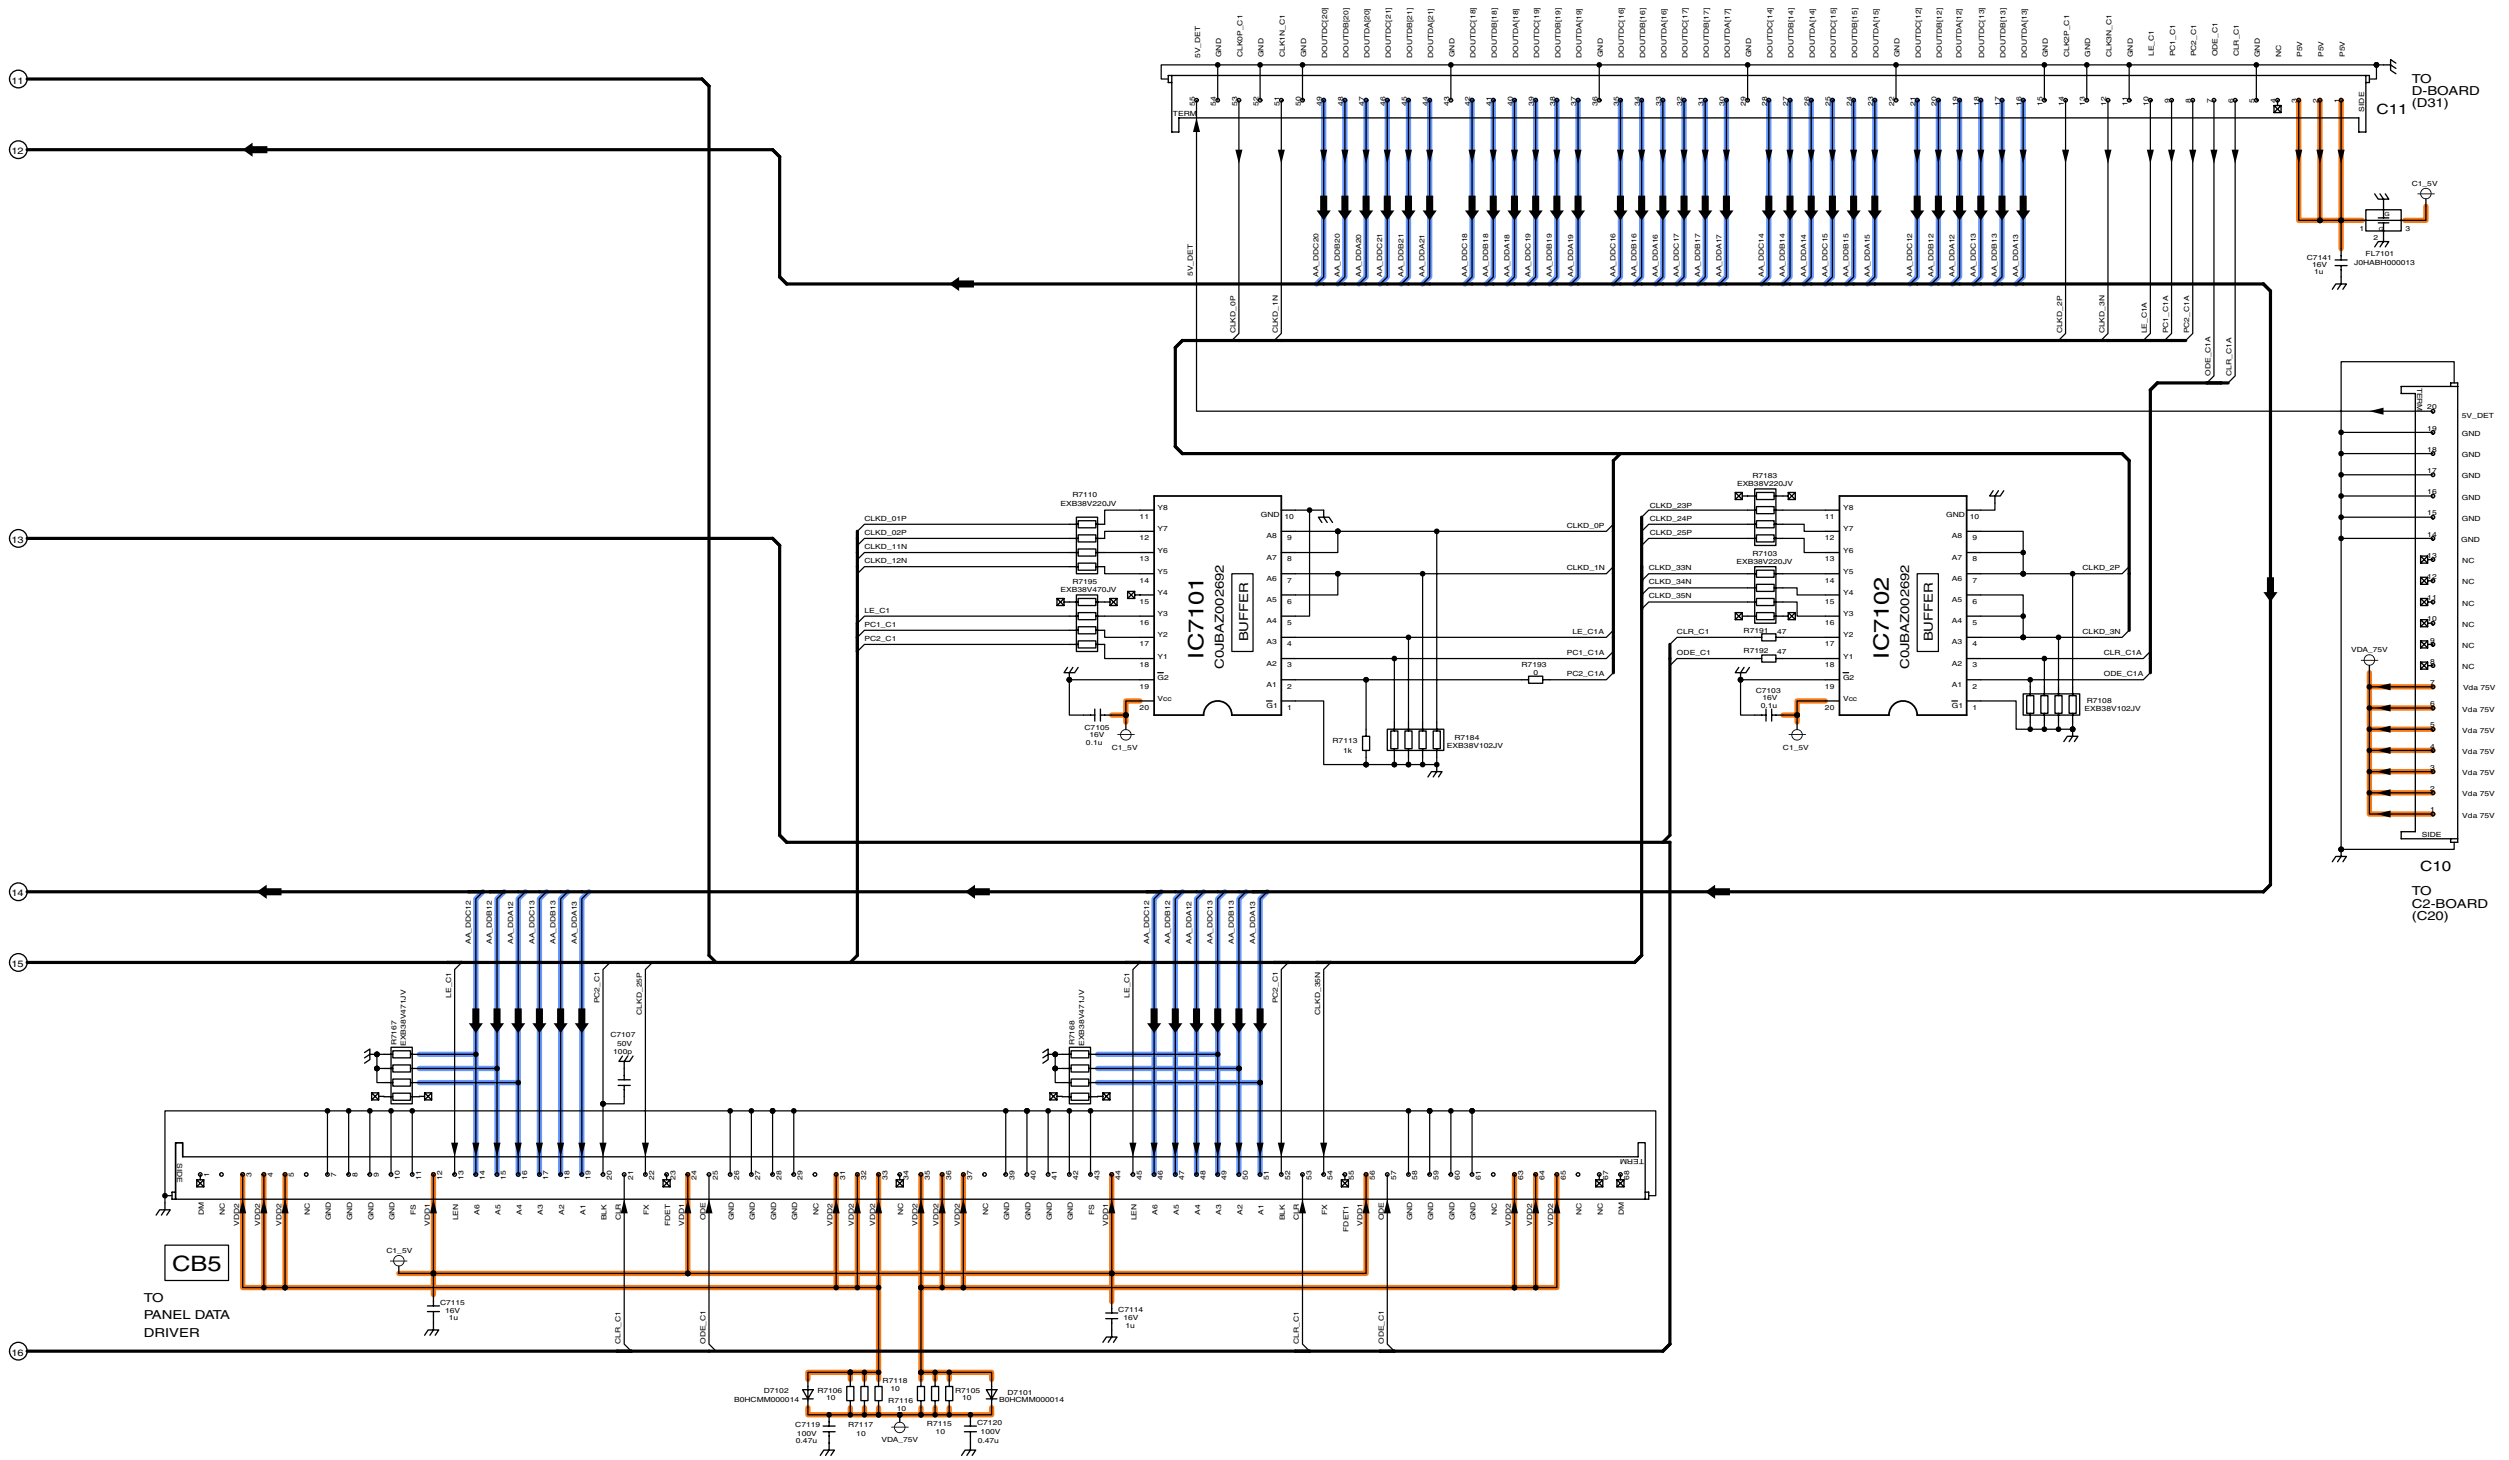

TH-50PV700AZ/H/M/MR
C1-Board (3 of 3) Schematic Diagram

TH-50PV700AZ/H/M/MR
C1-Board (3 of 3) Schematic Diagram

16

17

18

19


20

21

22

23

15.39. C2-Board (1 of 2) Schematic Diagram

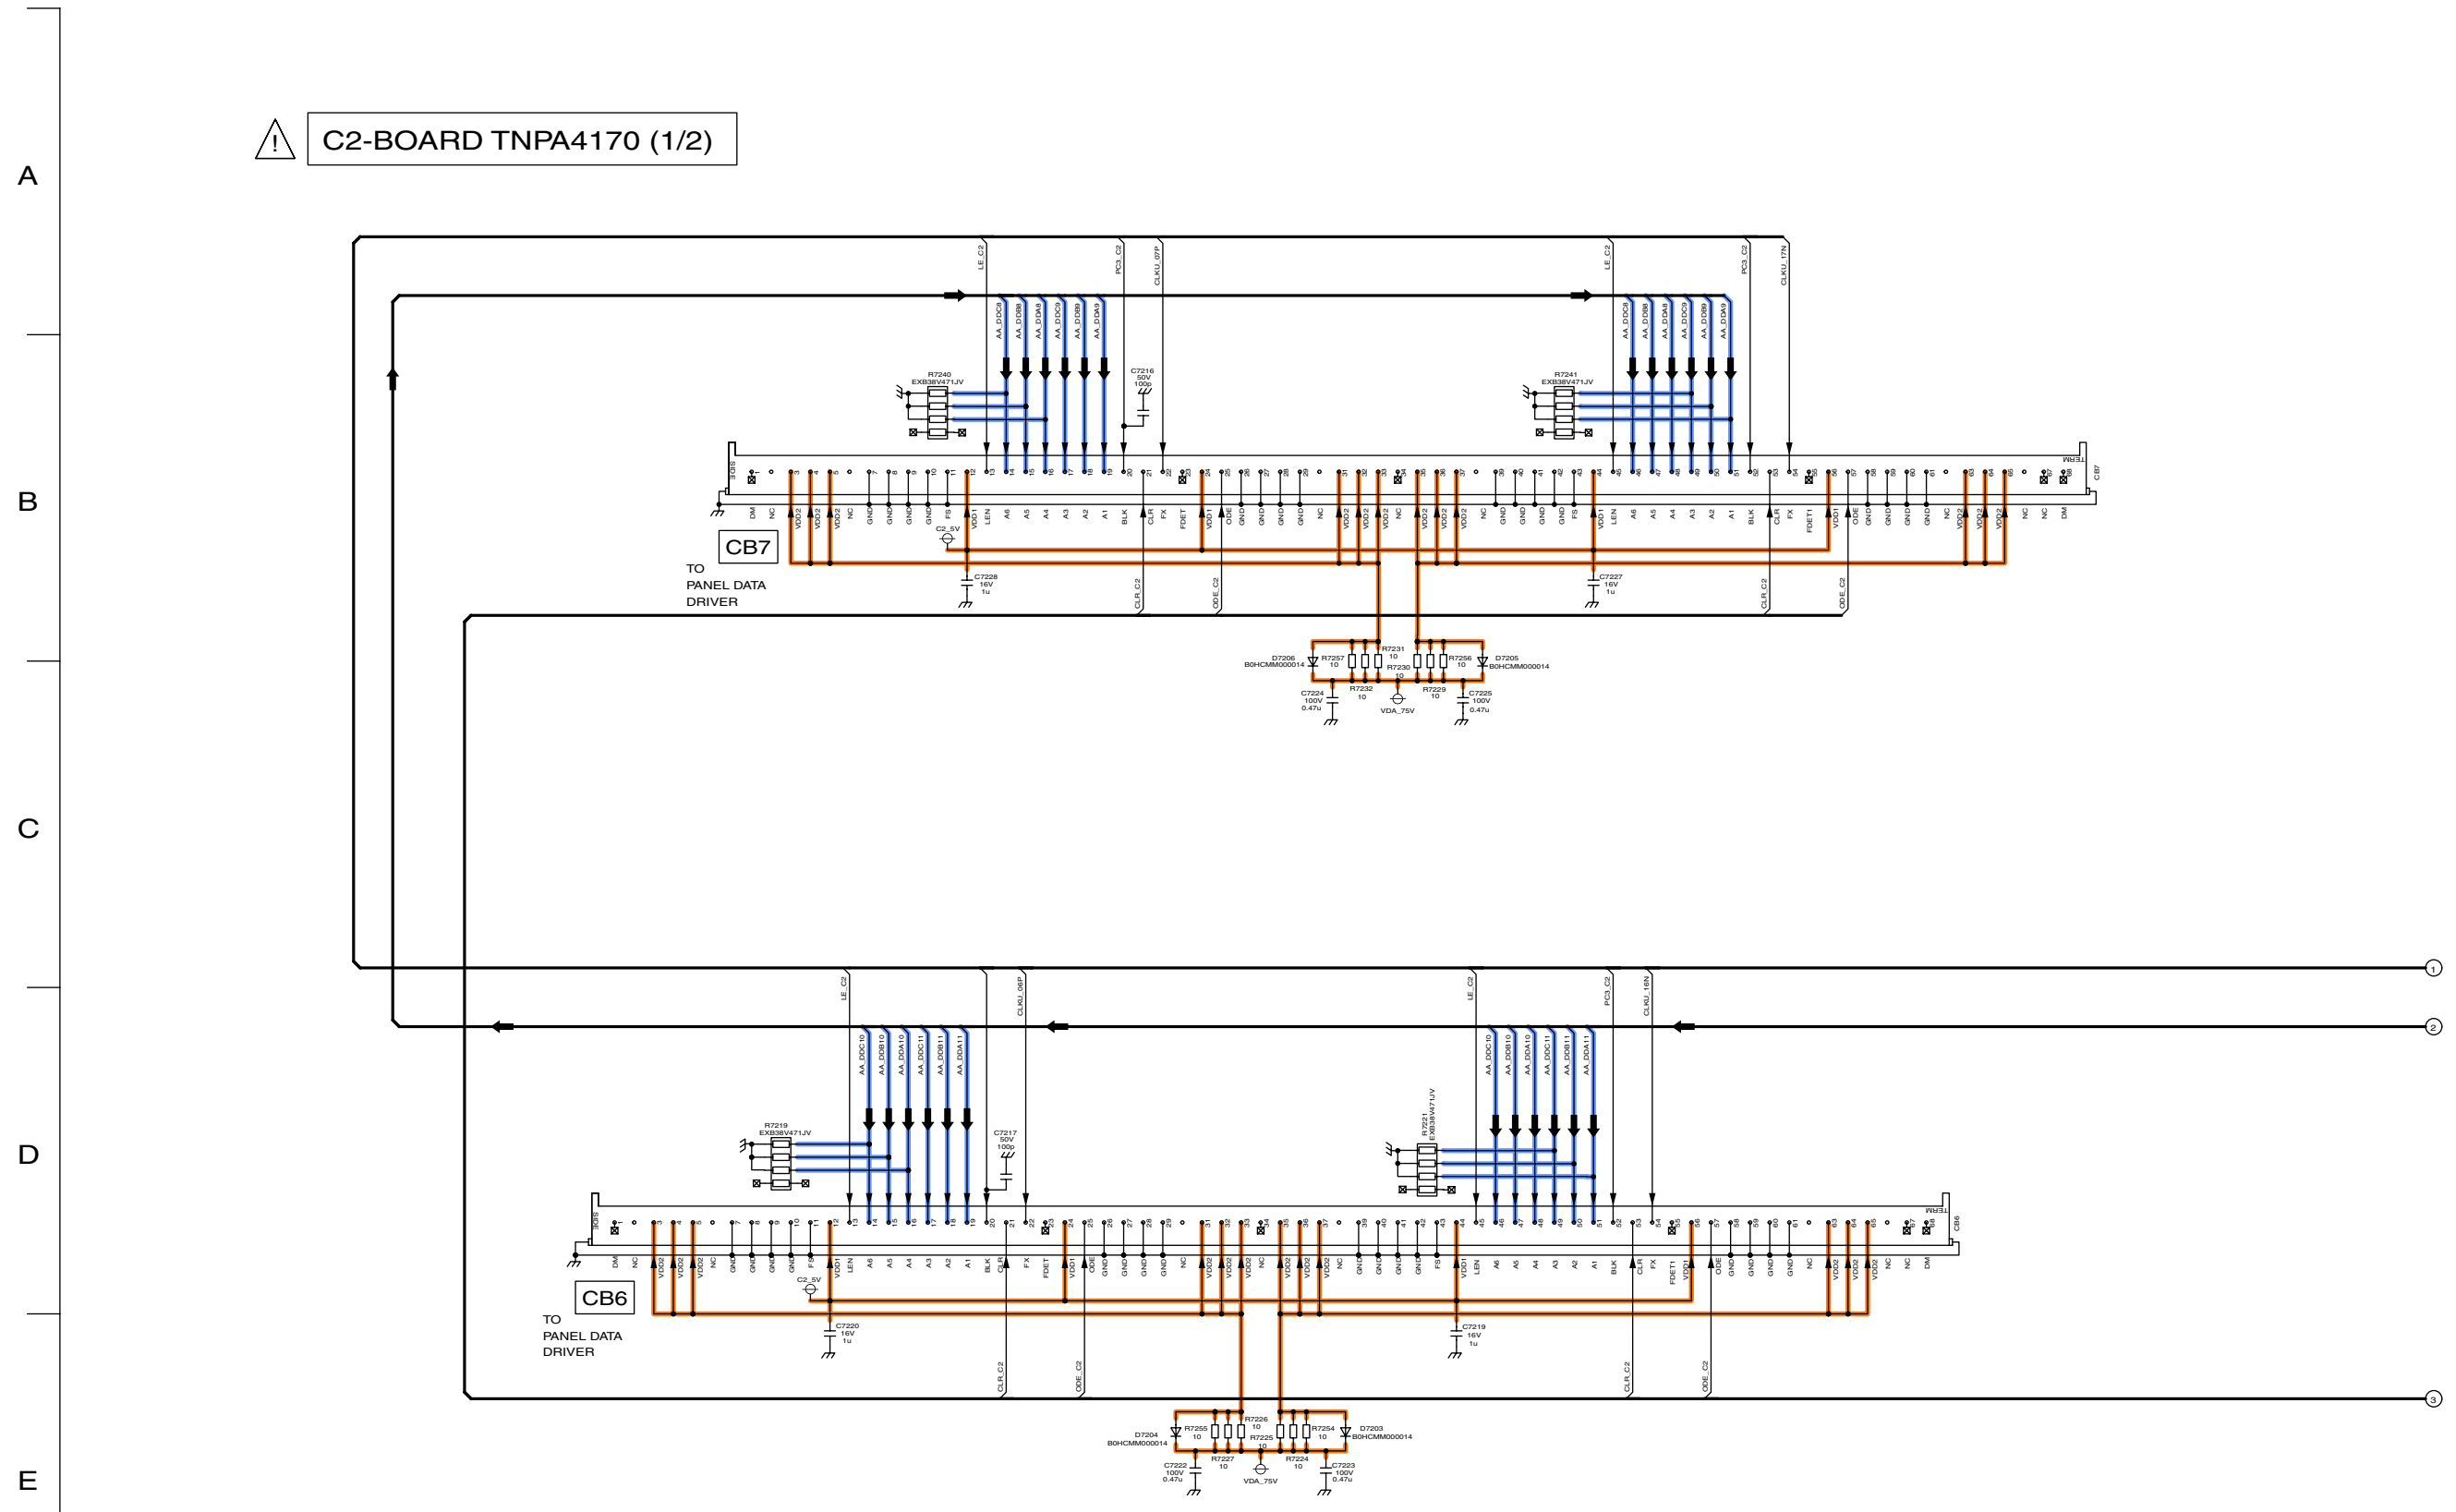


TH-50PV700AZ/H/M/MR
C2-Board (1 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
C2-Board (1 of 2) Schematic Diagram

1 2 3 4 5 6 7 8

15.40. C2-Board (2 of 2) Schematic Diagram

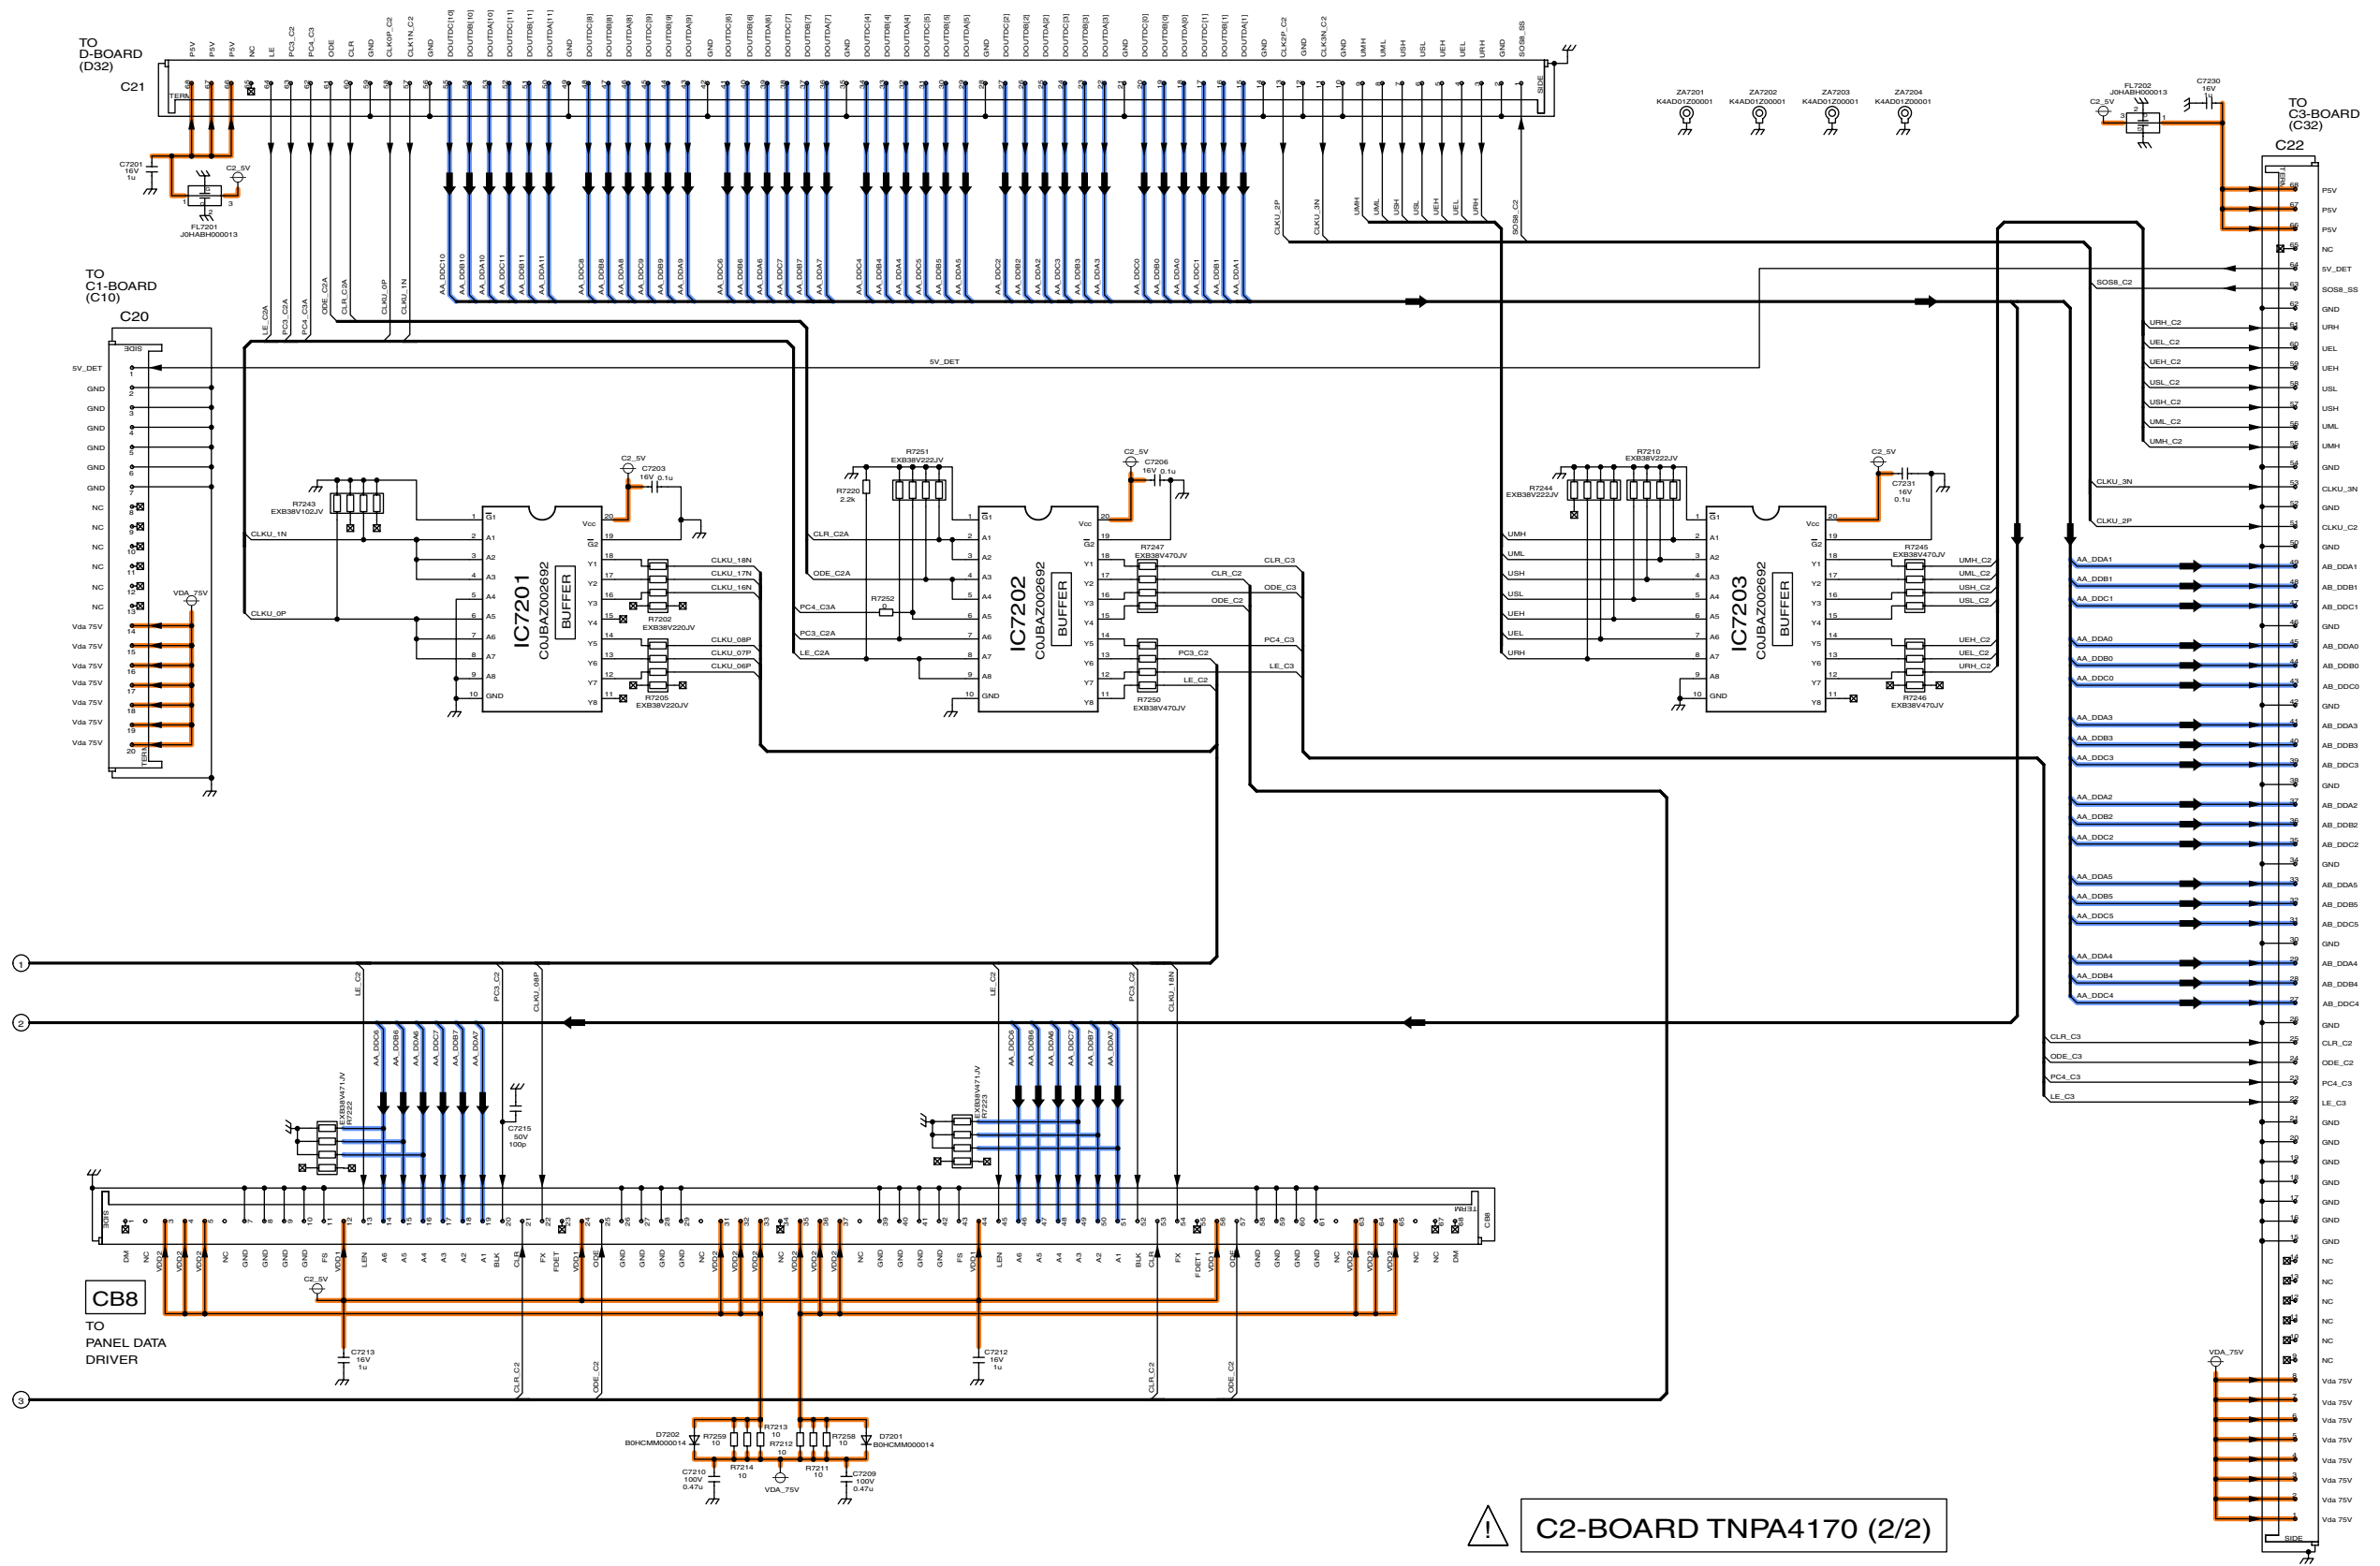


C2-BOARD TNPA4170 (2/2)

TH-50PV700AZ/H/M/MR
C2-Board (2 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
C2-Board (2 of 2) Schematic Diagram

15.41. C3-Board (1 of 2) Schematic Diagram

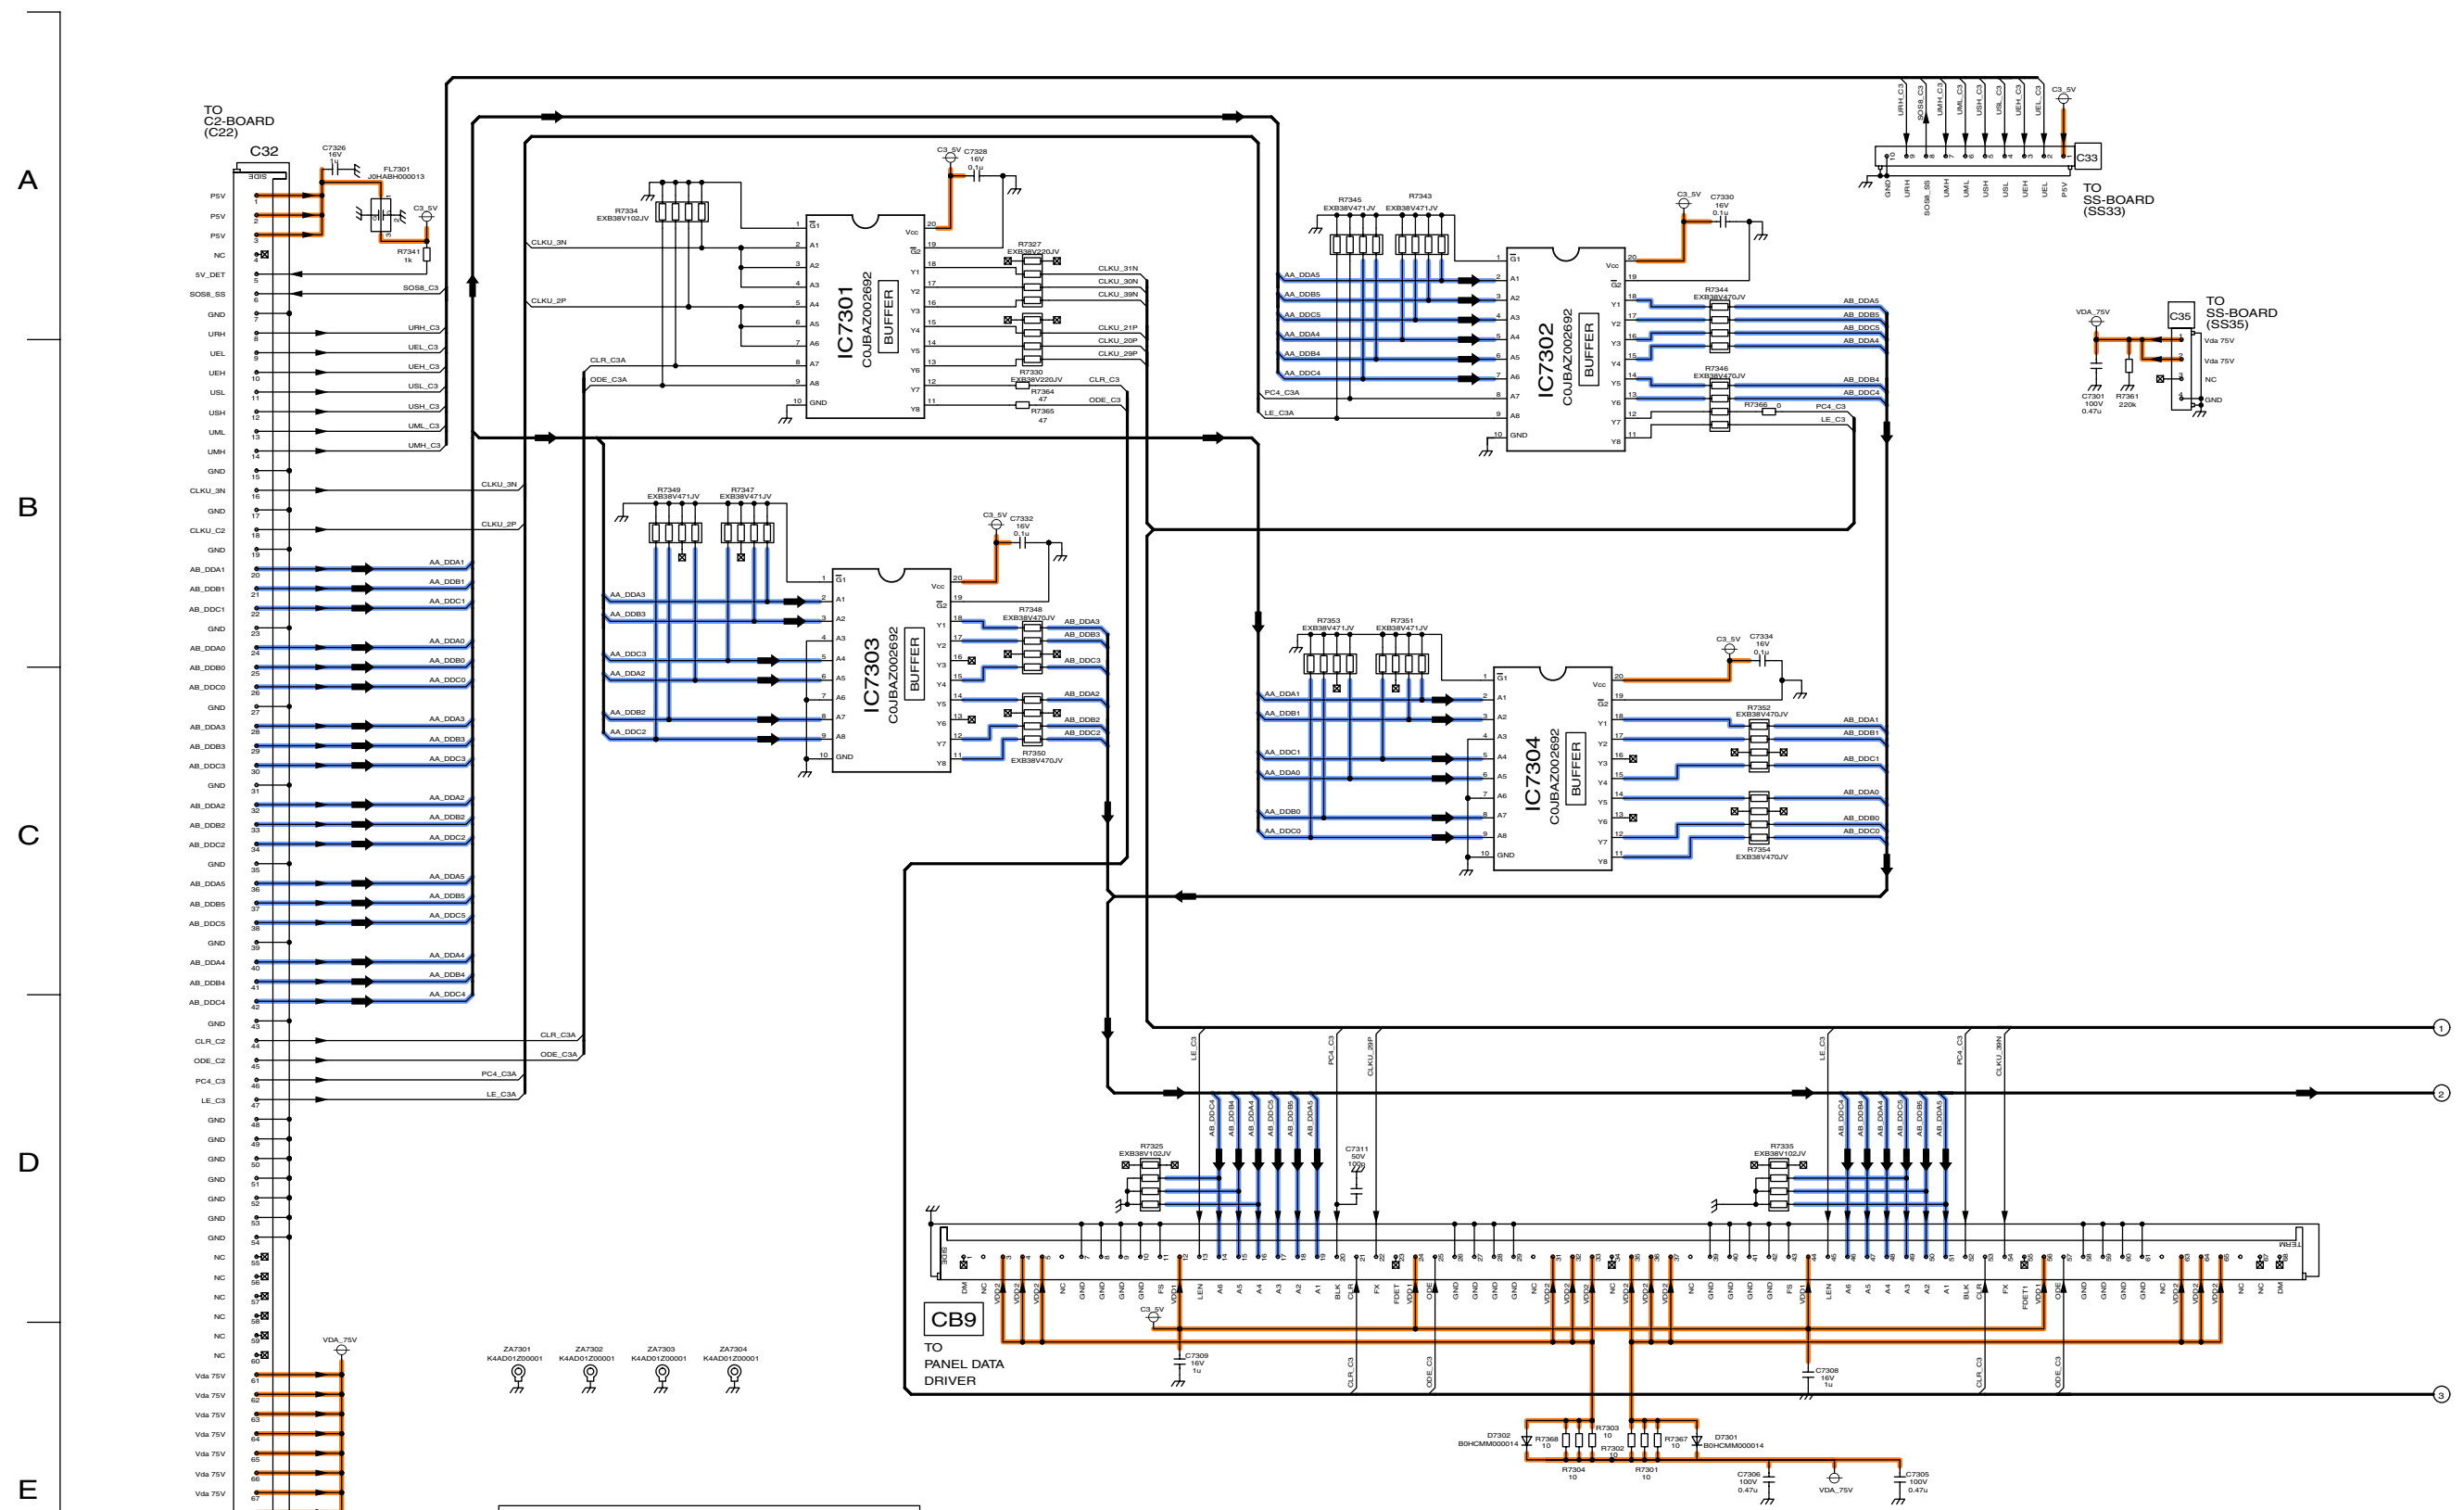


TH-50PV700AZ/H/M/MR
C3-Board (1 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
C3-Board (1 of 2) Schematic Diagram

15.42. C3-Board (2 of 2) Schematic Diagram

! C3-BOARD TNPA4171 (2/2)

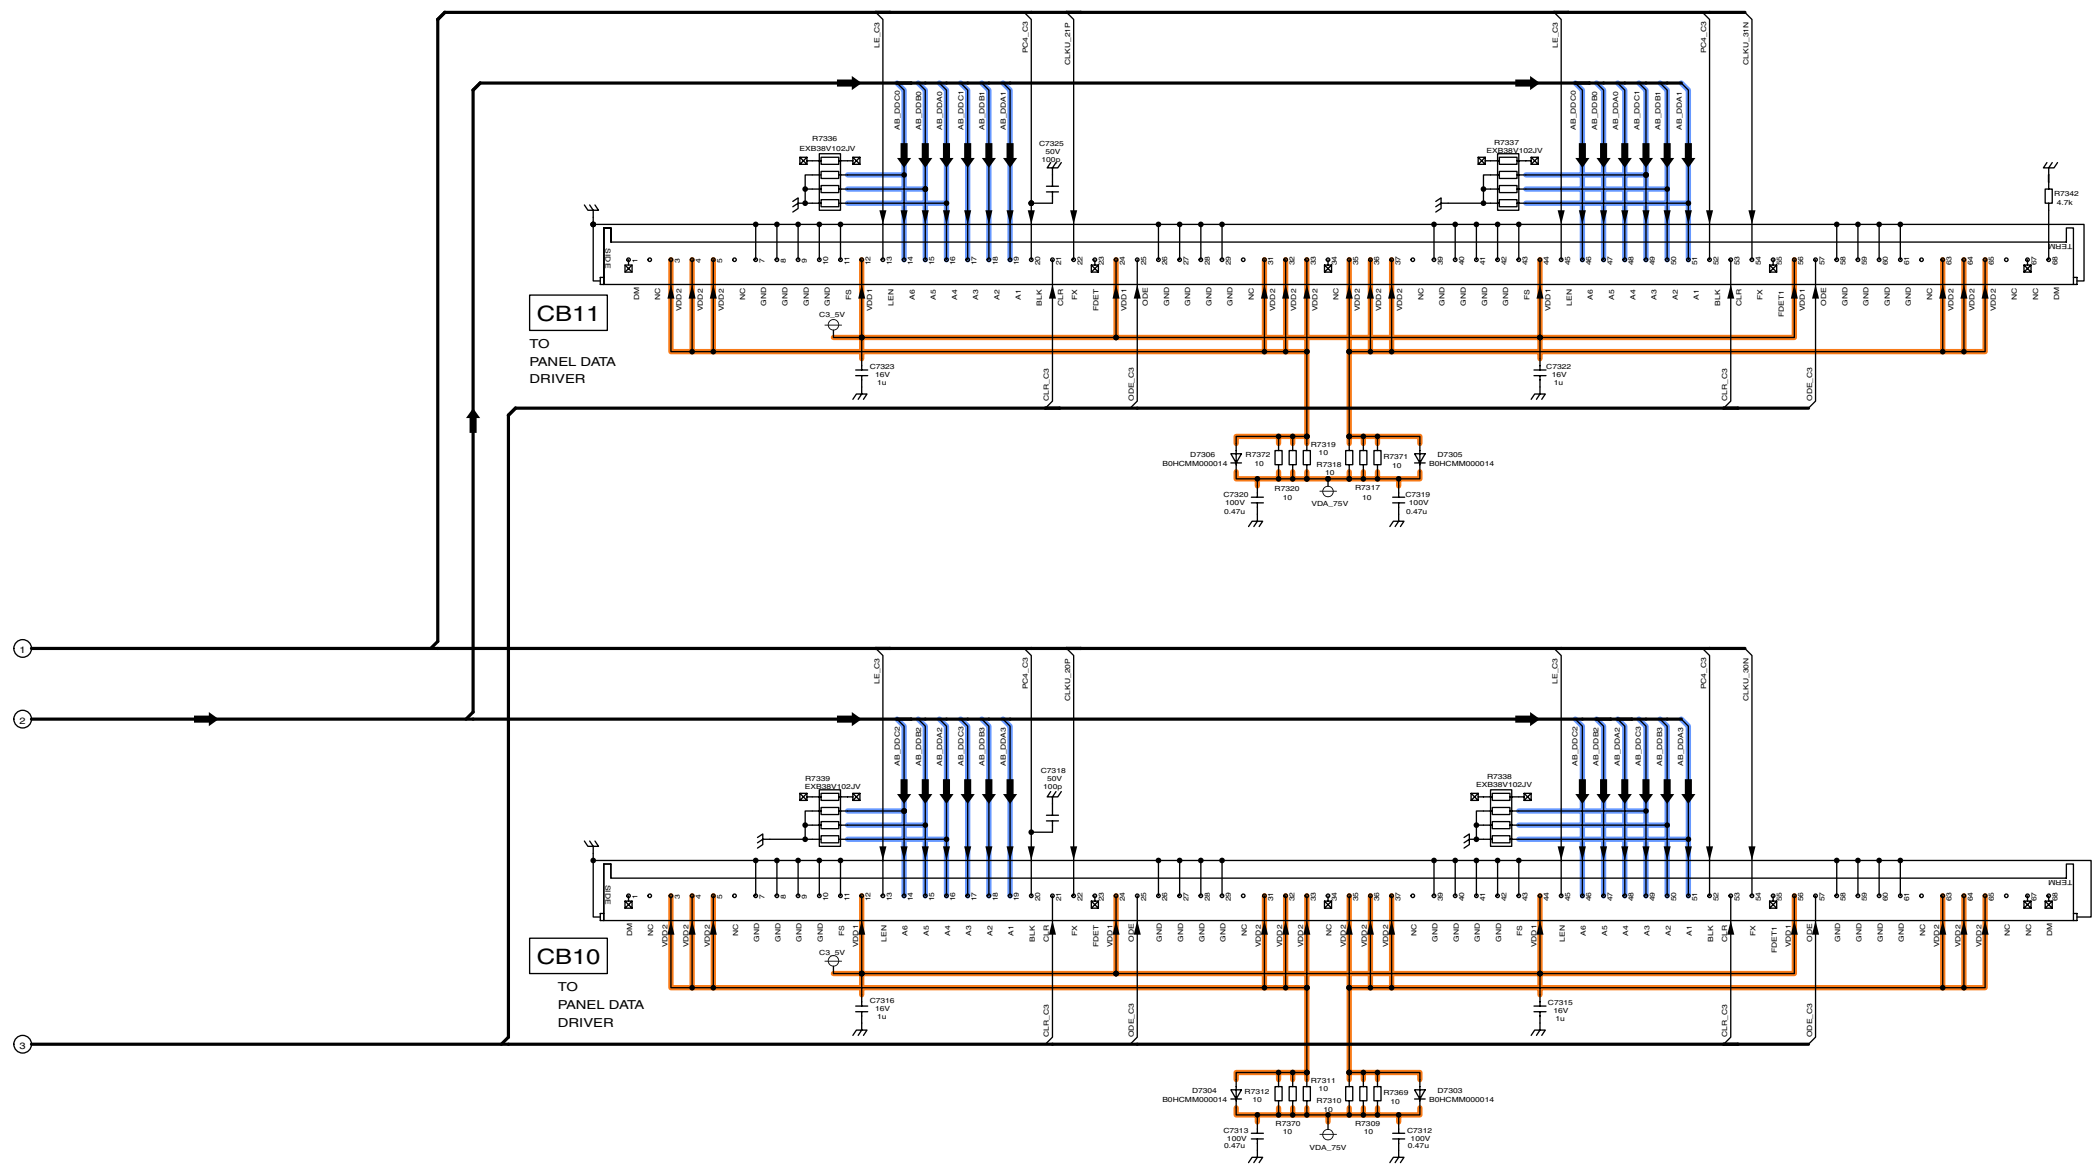


TH-50PV700AZ/H/M/MR
C3-Board (2 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
C3-Board (2 of 2) Schematic Diagram

8 9 10 11 12 13 14 15


15.43. SC, SU and SD-Board Block Diagram

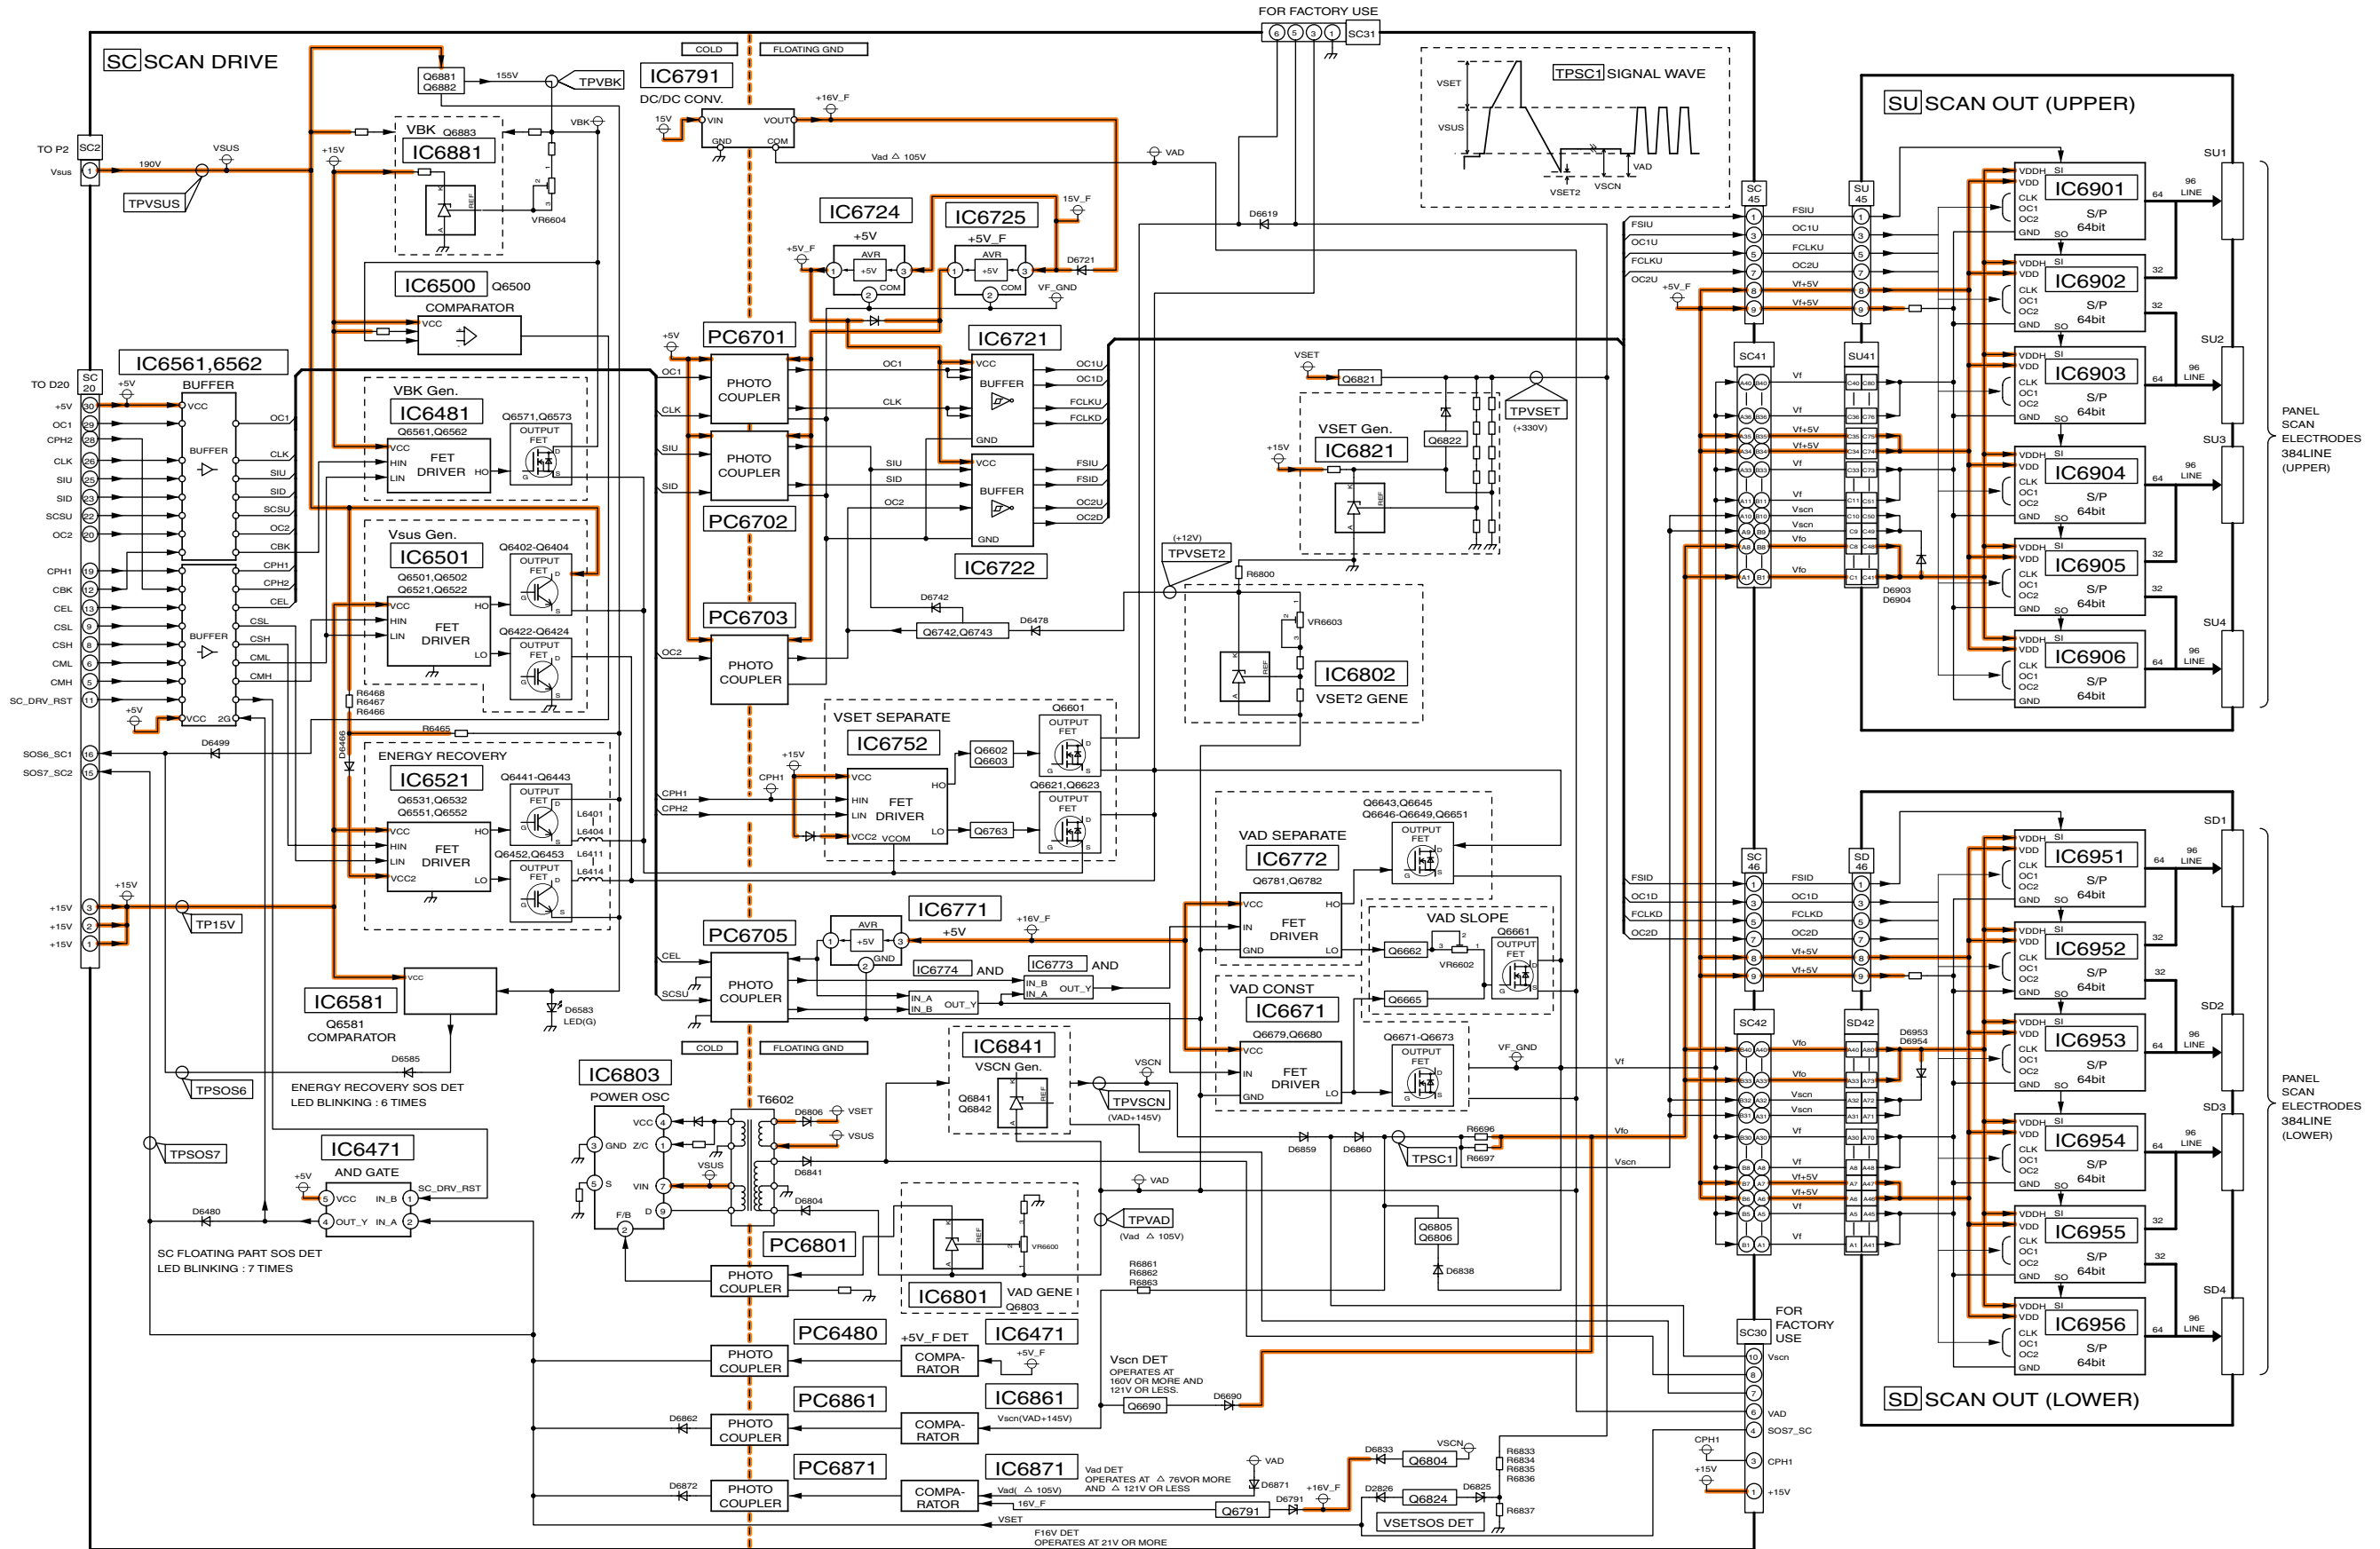

TH-50PV700AZ/H/M/MR
SC, SU and SD-Board Block Diagram

TH-50PV700AZ/H/M/MR
SC, SU and SD-Board Block Diagram


15.44. SC-Board (1 of 3) Schematic Diagram

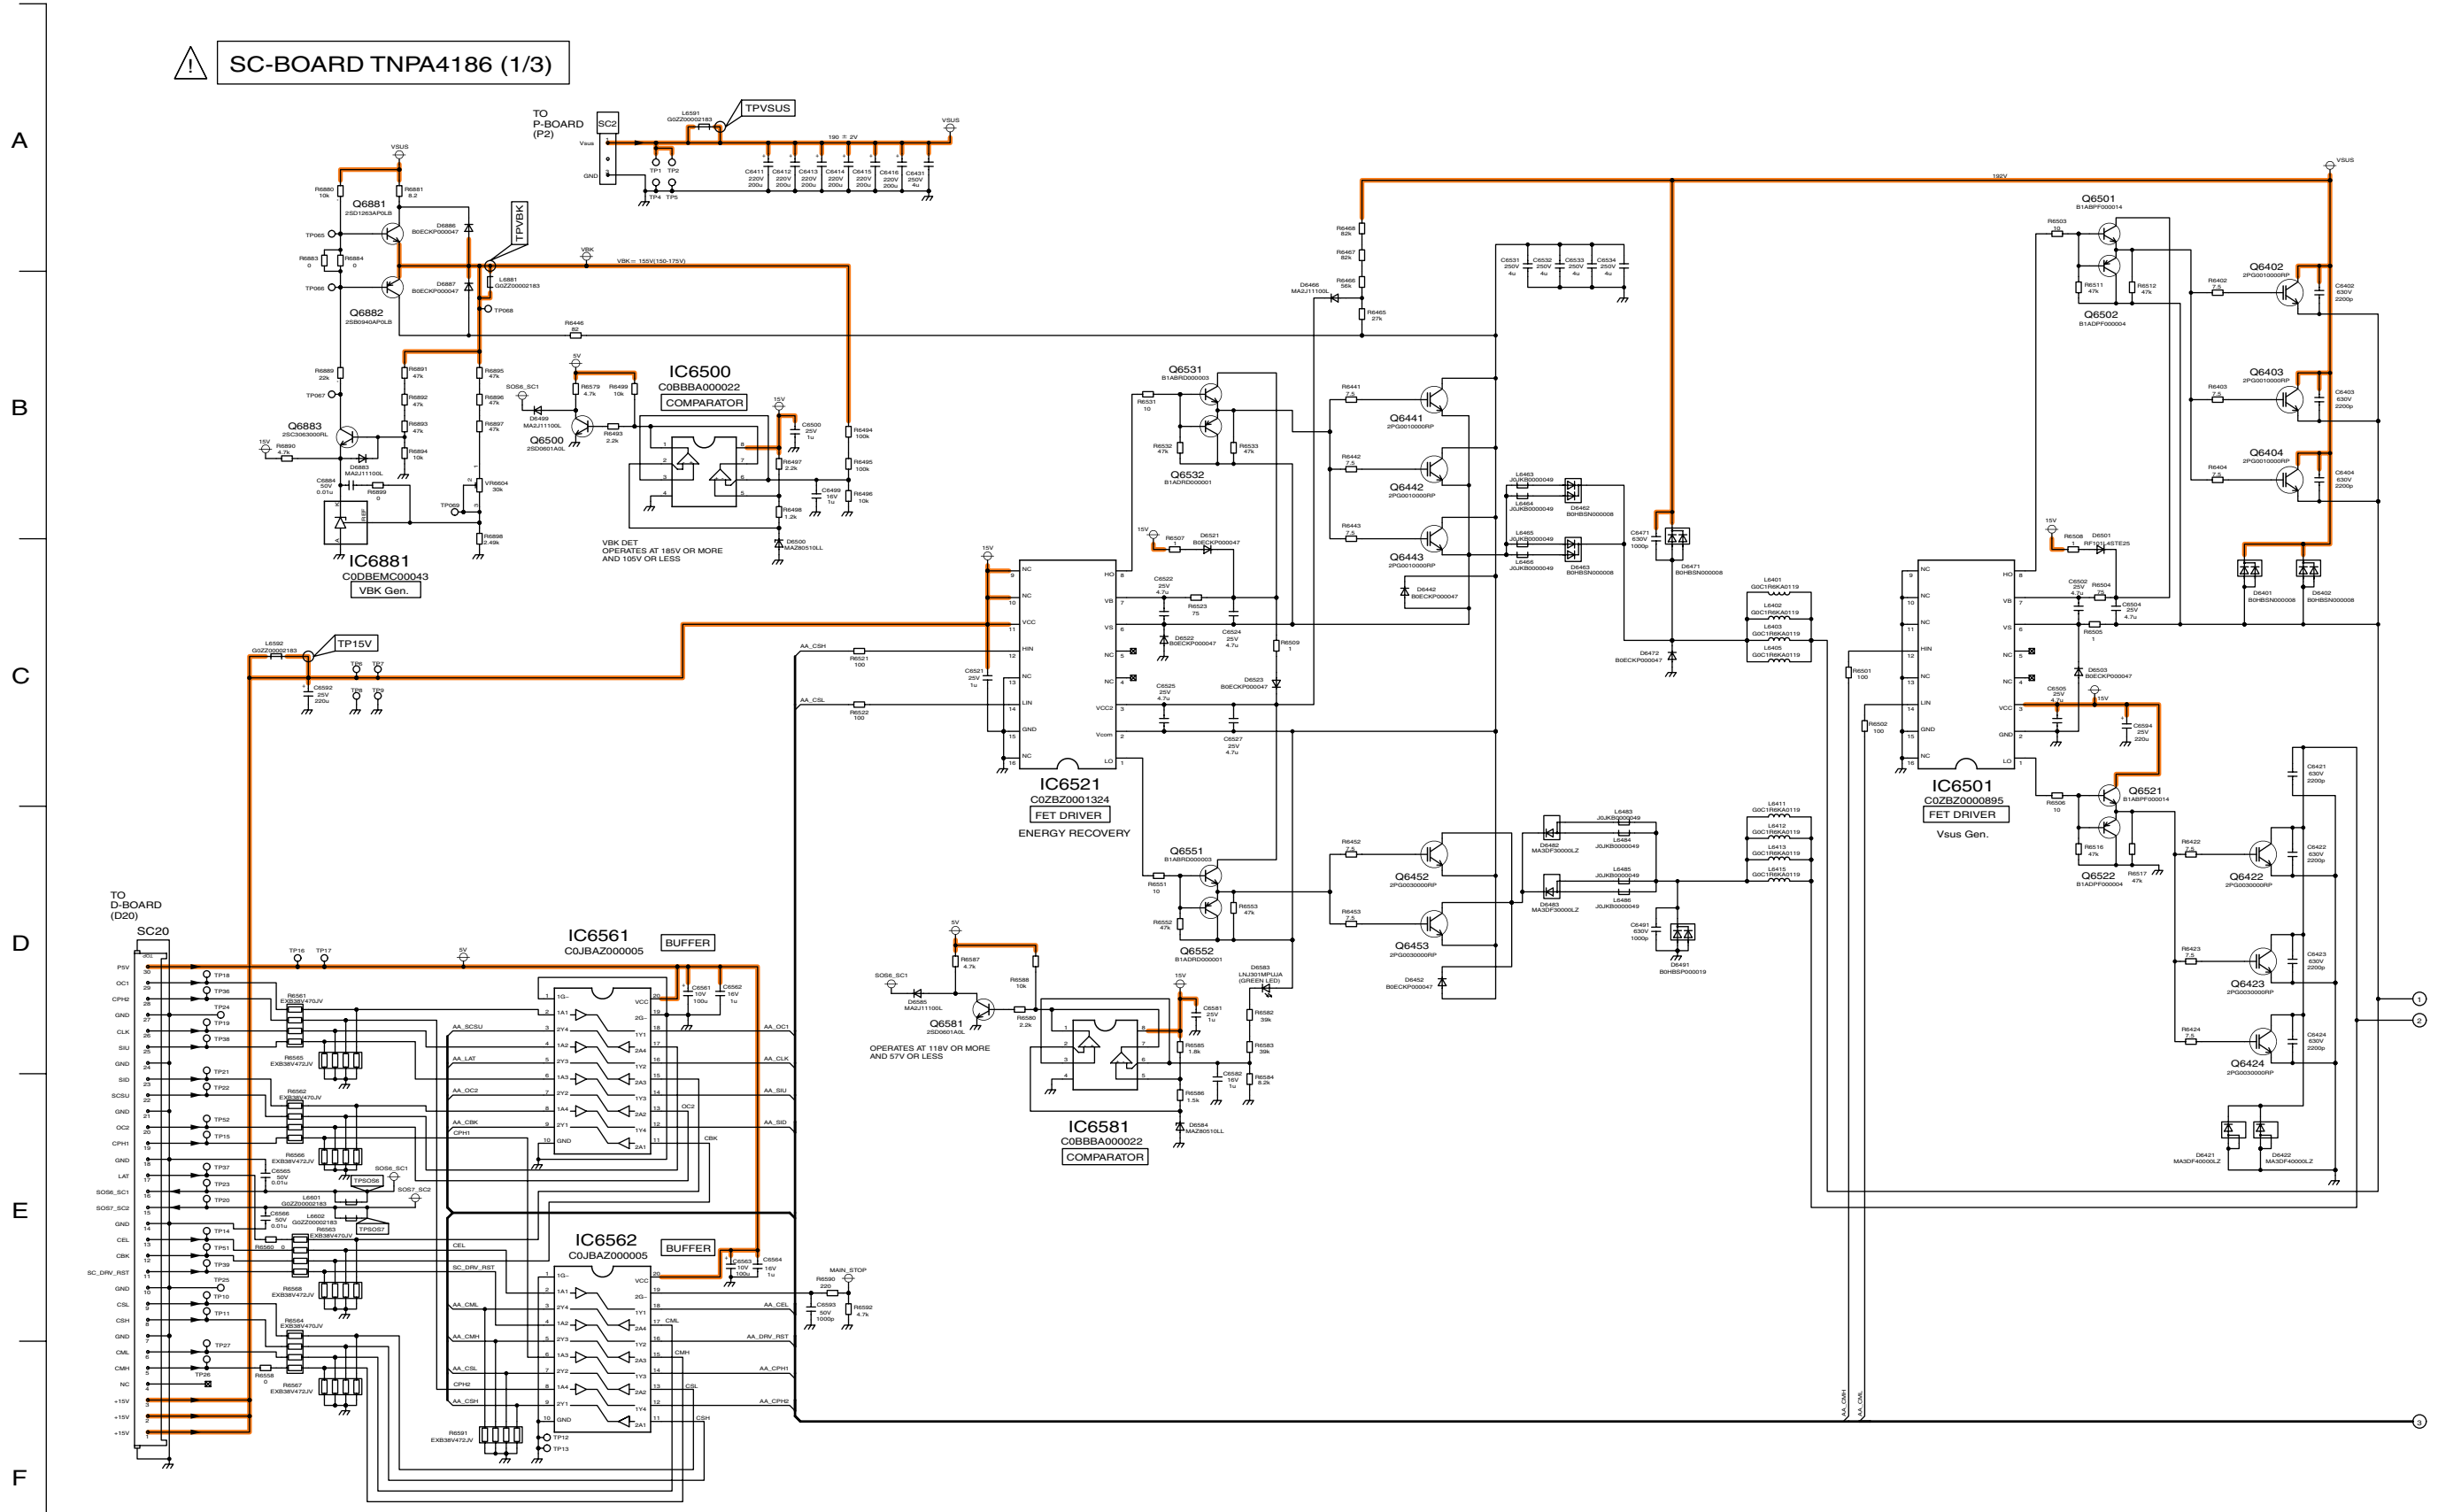

TH-50PV700AZ/H/M/MR
SC-Board (1 of 3) Schematic Diagram


TH-50PV700AZ/H/M/MR
SC-Board (1 of 3) Schematic Diagram

15.45. SC-Board (2 of 3) Schematic Diagram

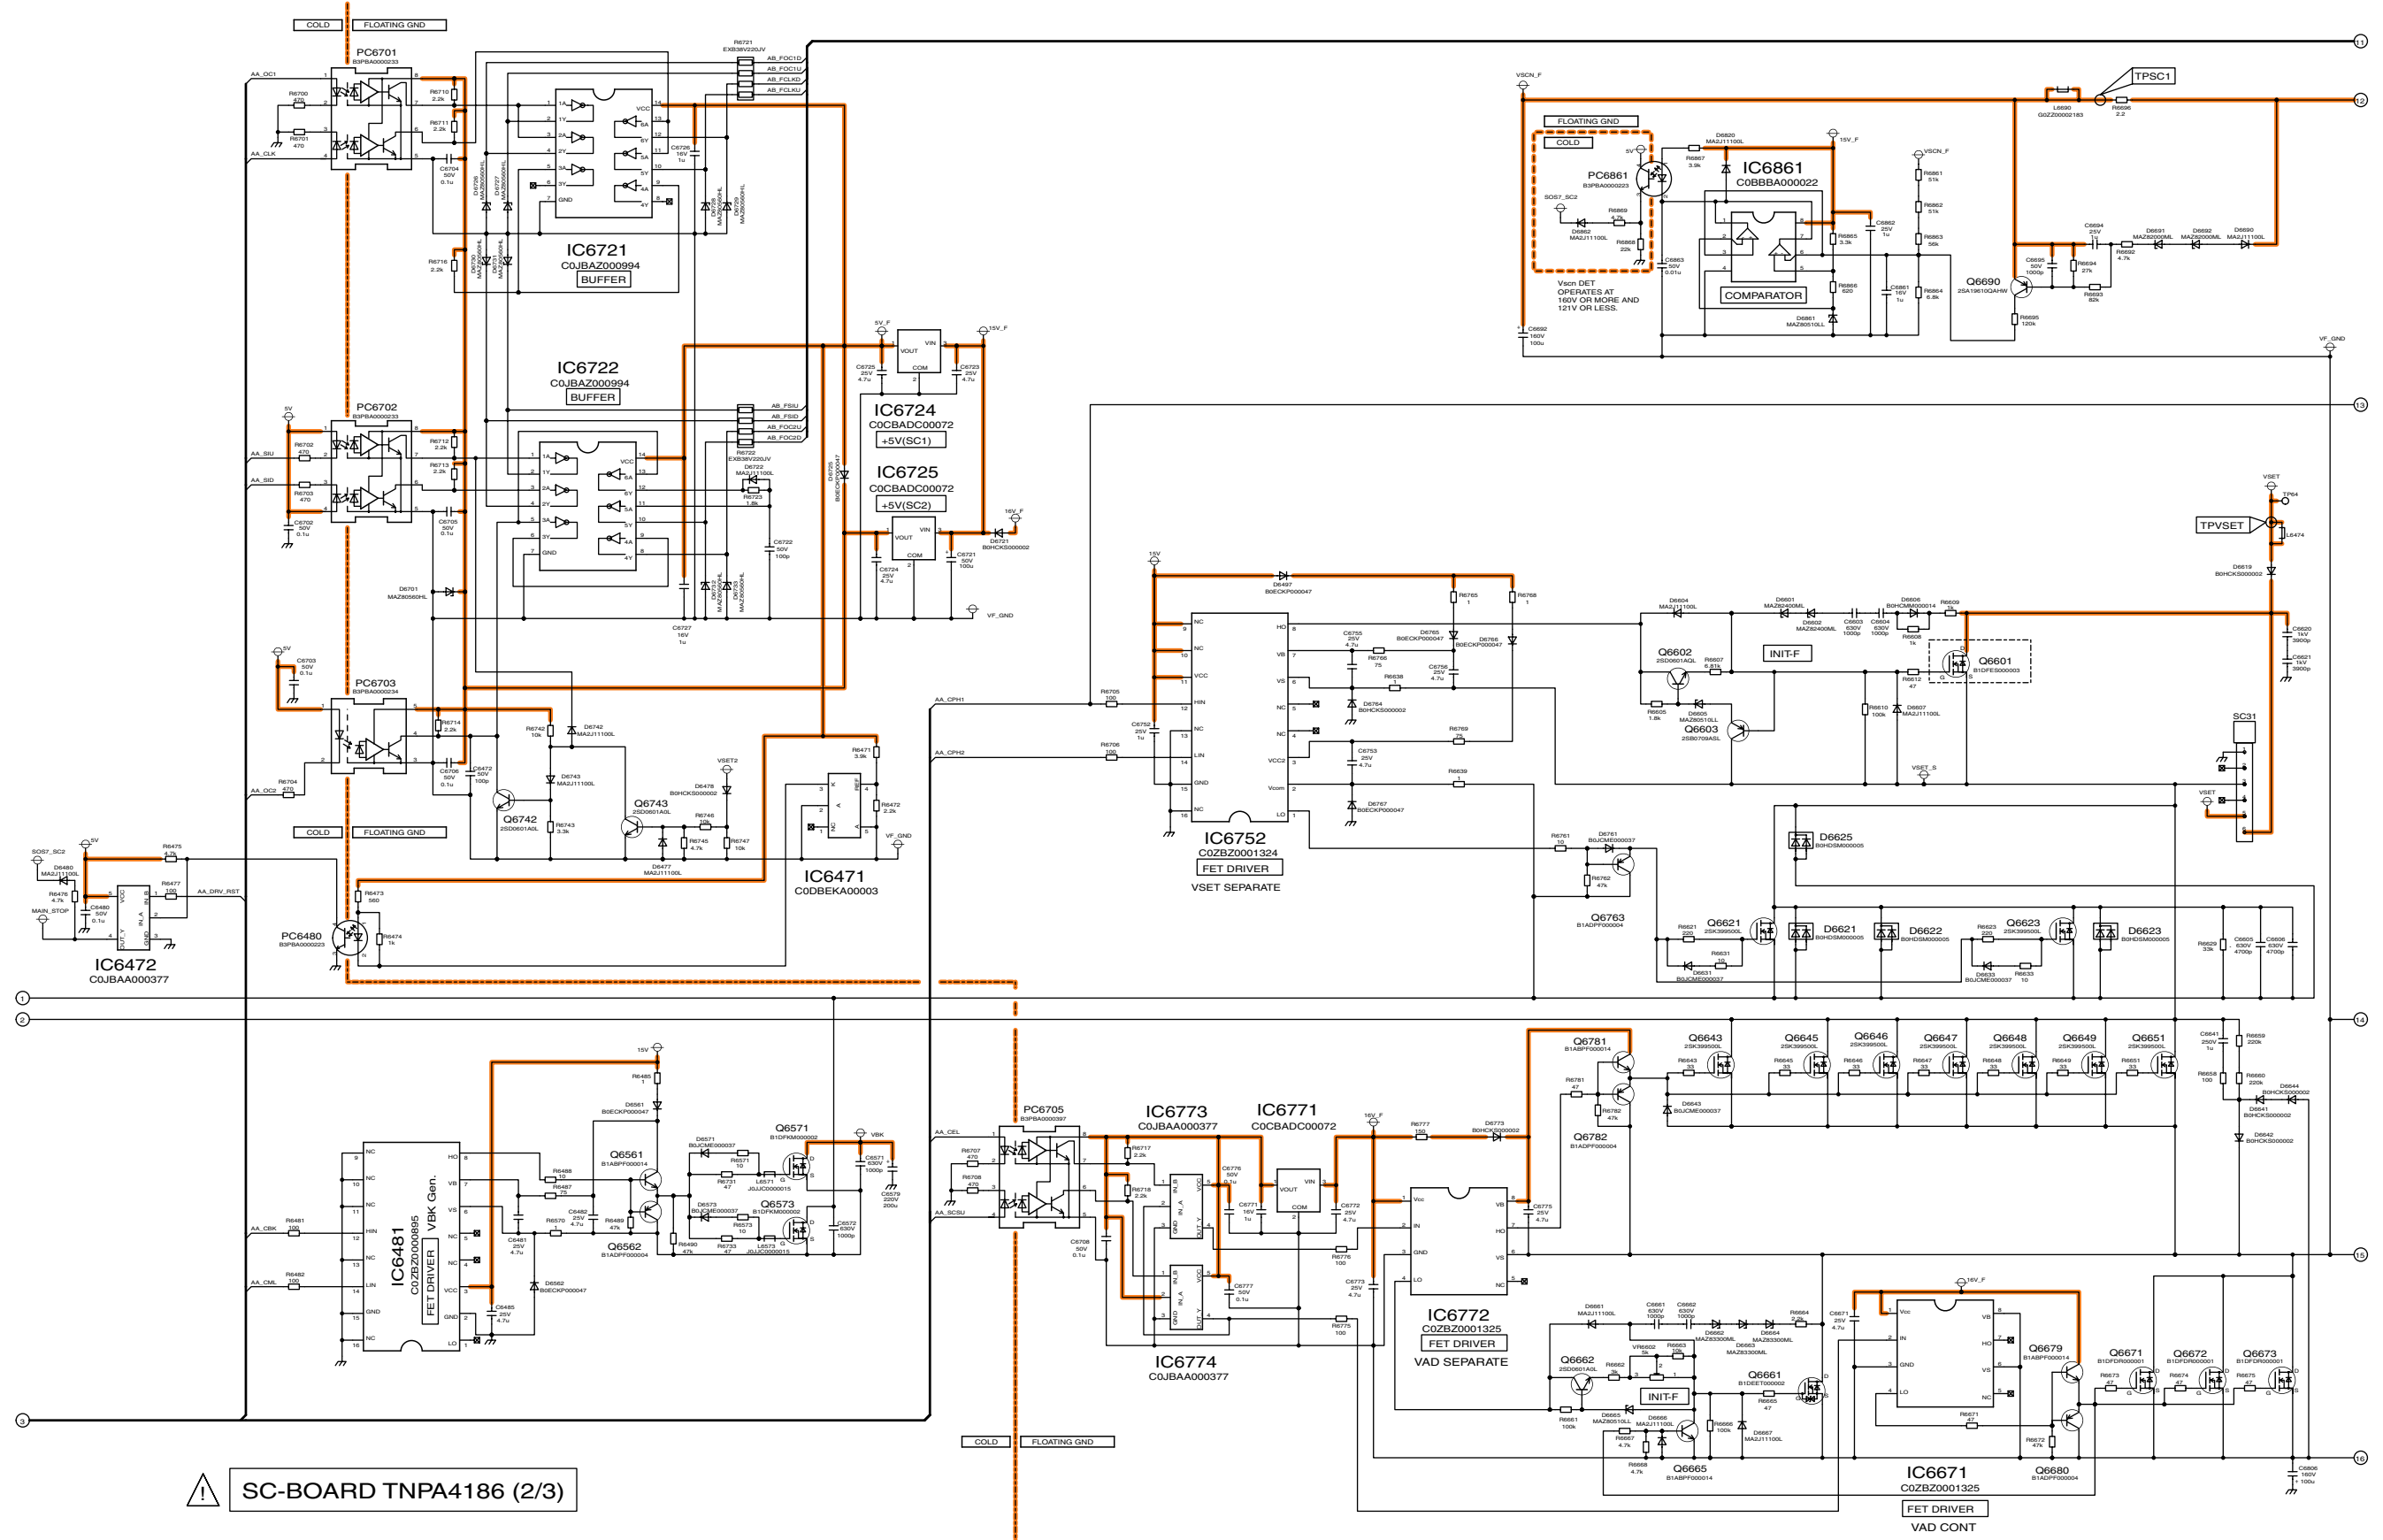

SC-BOARD TNPA4186 (2/3)


15.46. SC-Board (3 of 3) Schematic Diagram

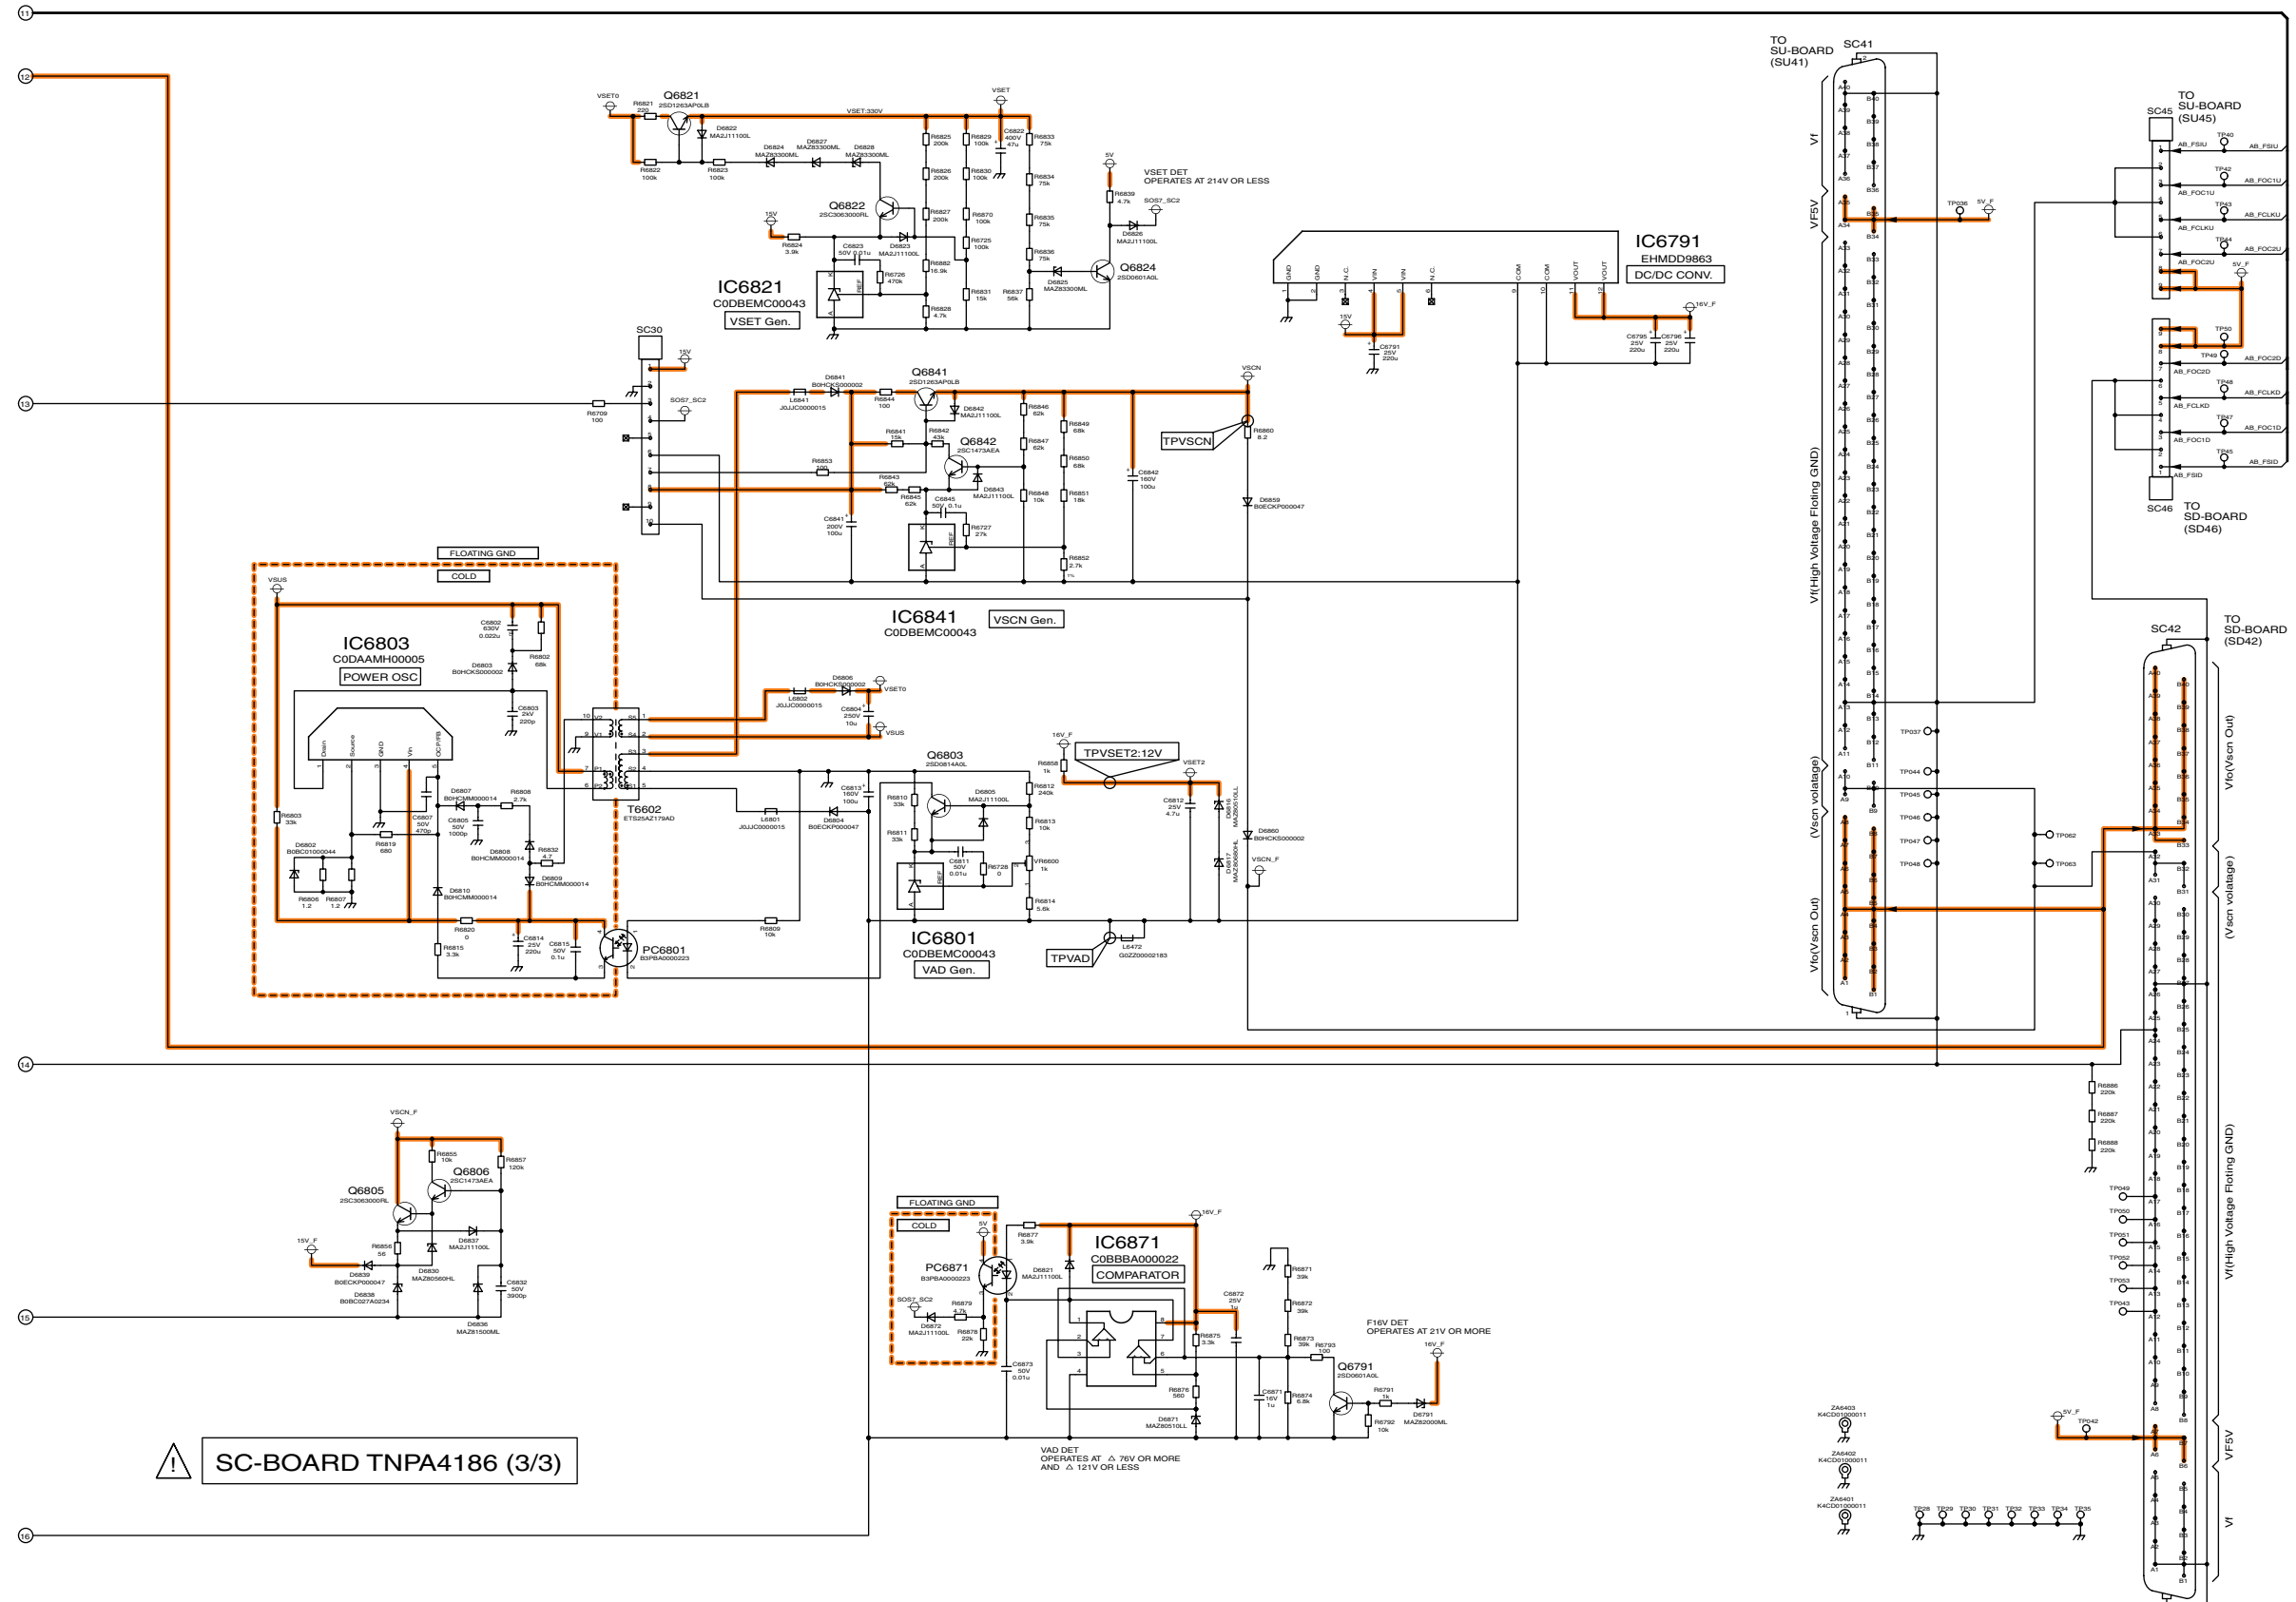

TH-50PV700AZ/H/M/MR
SC-Board (3 of 3) Schematic Diagram

TH-50PV700AZ/H/M/MR
SC-Board (3 of 3) Schematic Diagram

15.47. SU-Board (1 of 2) Schematic Diagram

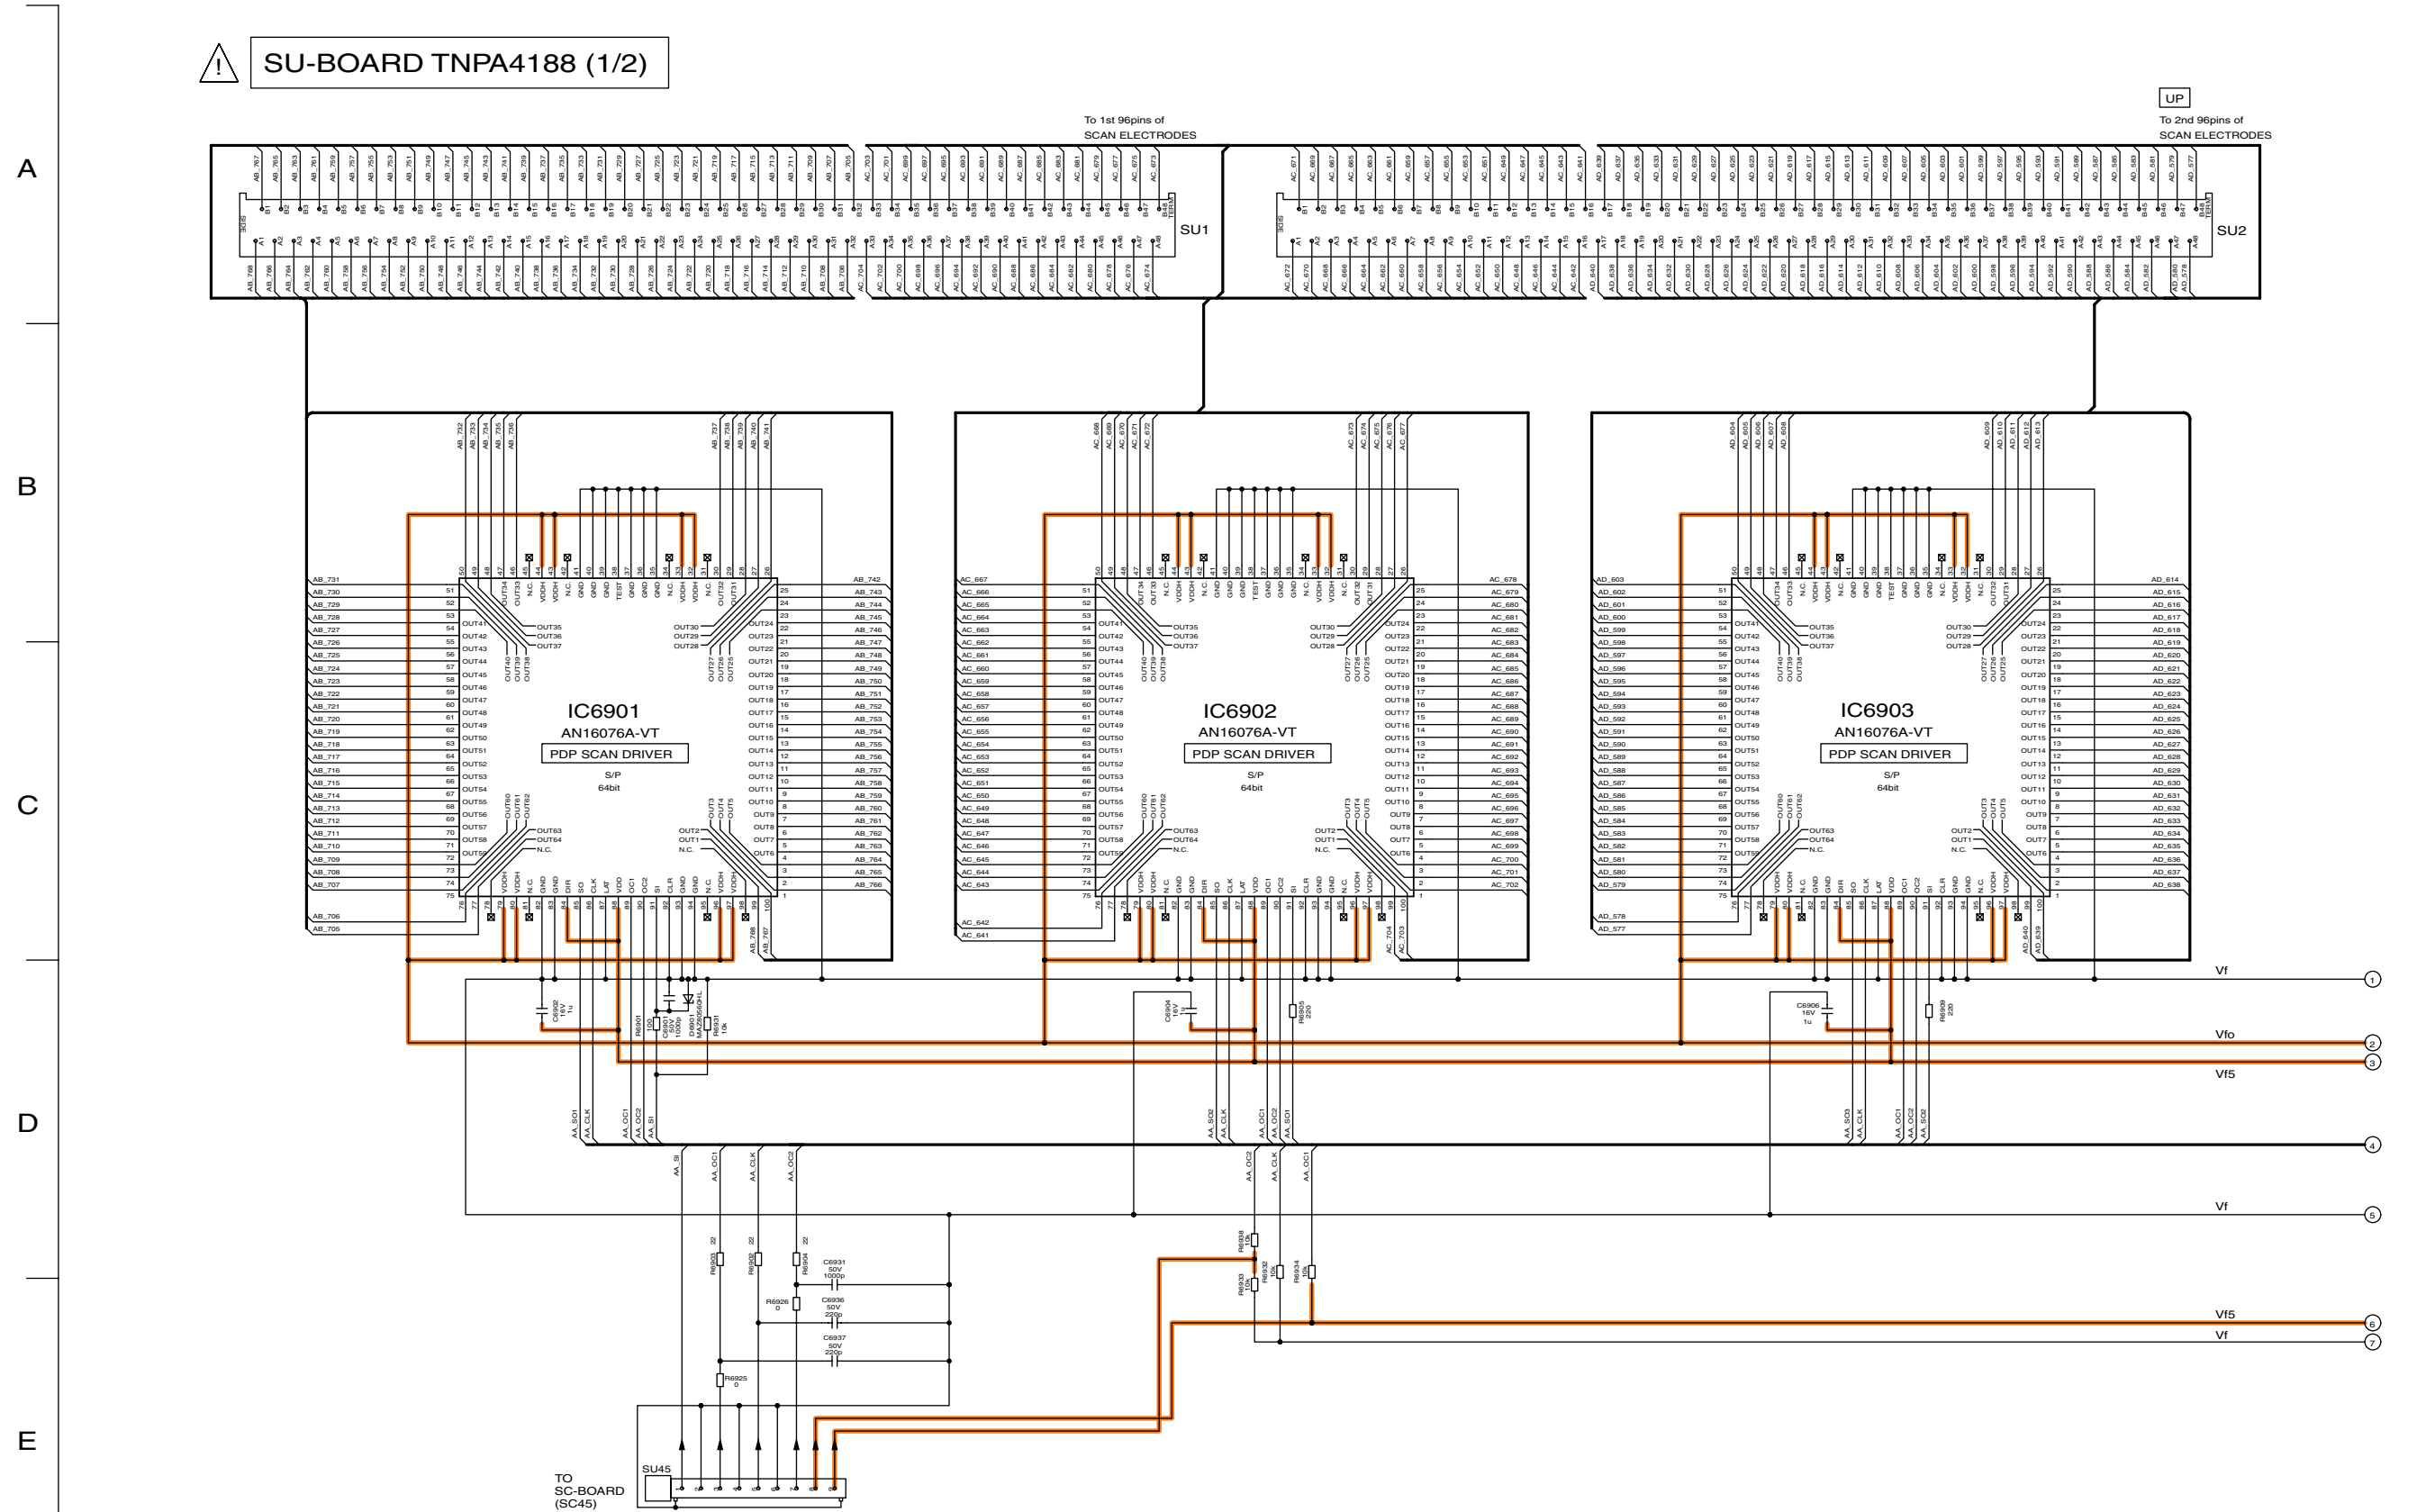


TH-50PV700AZ/H/M/MR
SU-Board (1 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
SU-Board (1 of 2) Schematic Diagram

15.48. SU-Board (2 of 2) Schematic Diagram

SU-BOARD TNPA4188 (2/2)

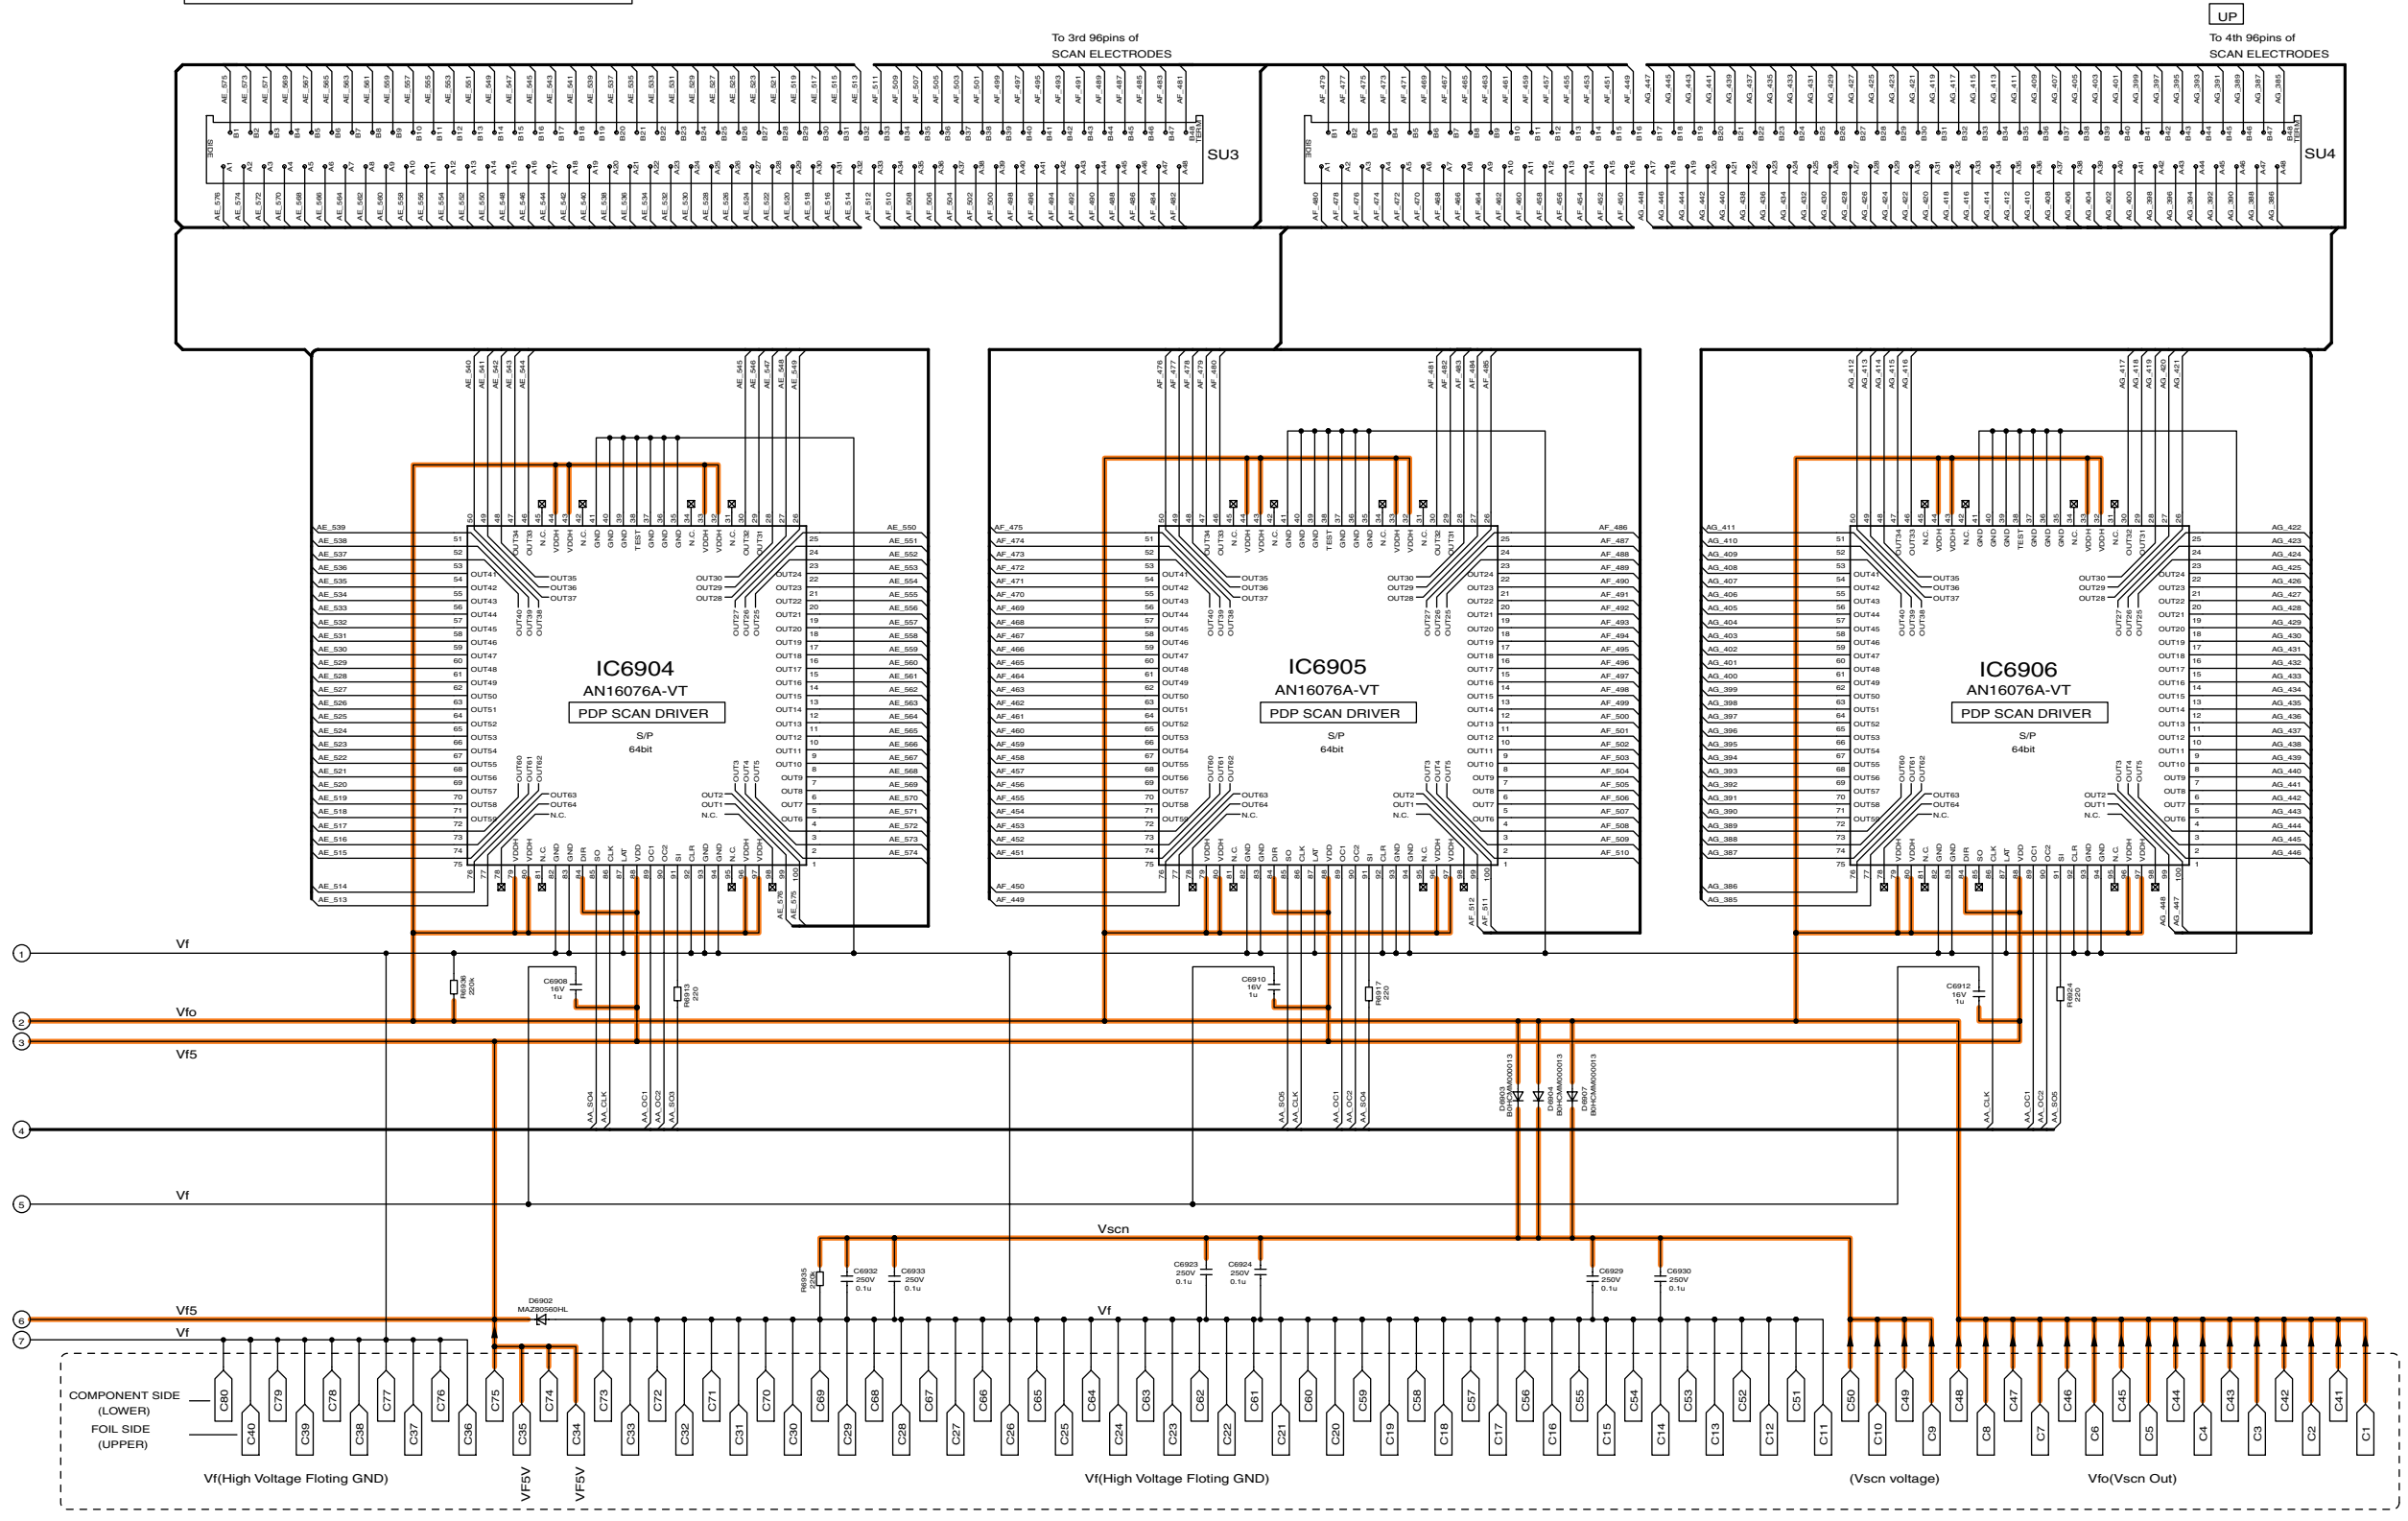


TH-50PV700AZ/H/M/MR
SU-Board (2 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
SU-Board (2 of 2) Schematic Diagram

8 9 10 11 12 13 14 15

15.49. SD-Board (1 of 2) Schematic Diagram

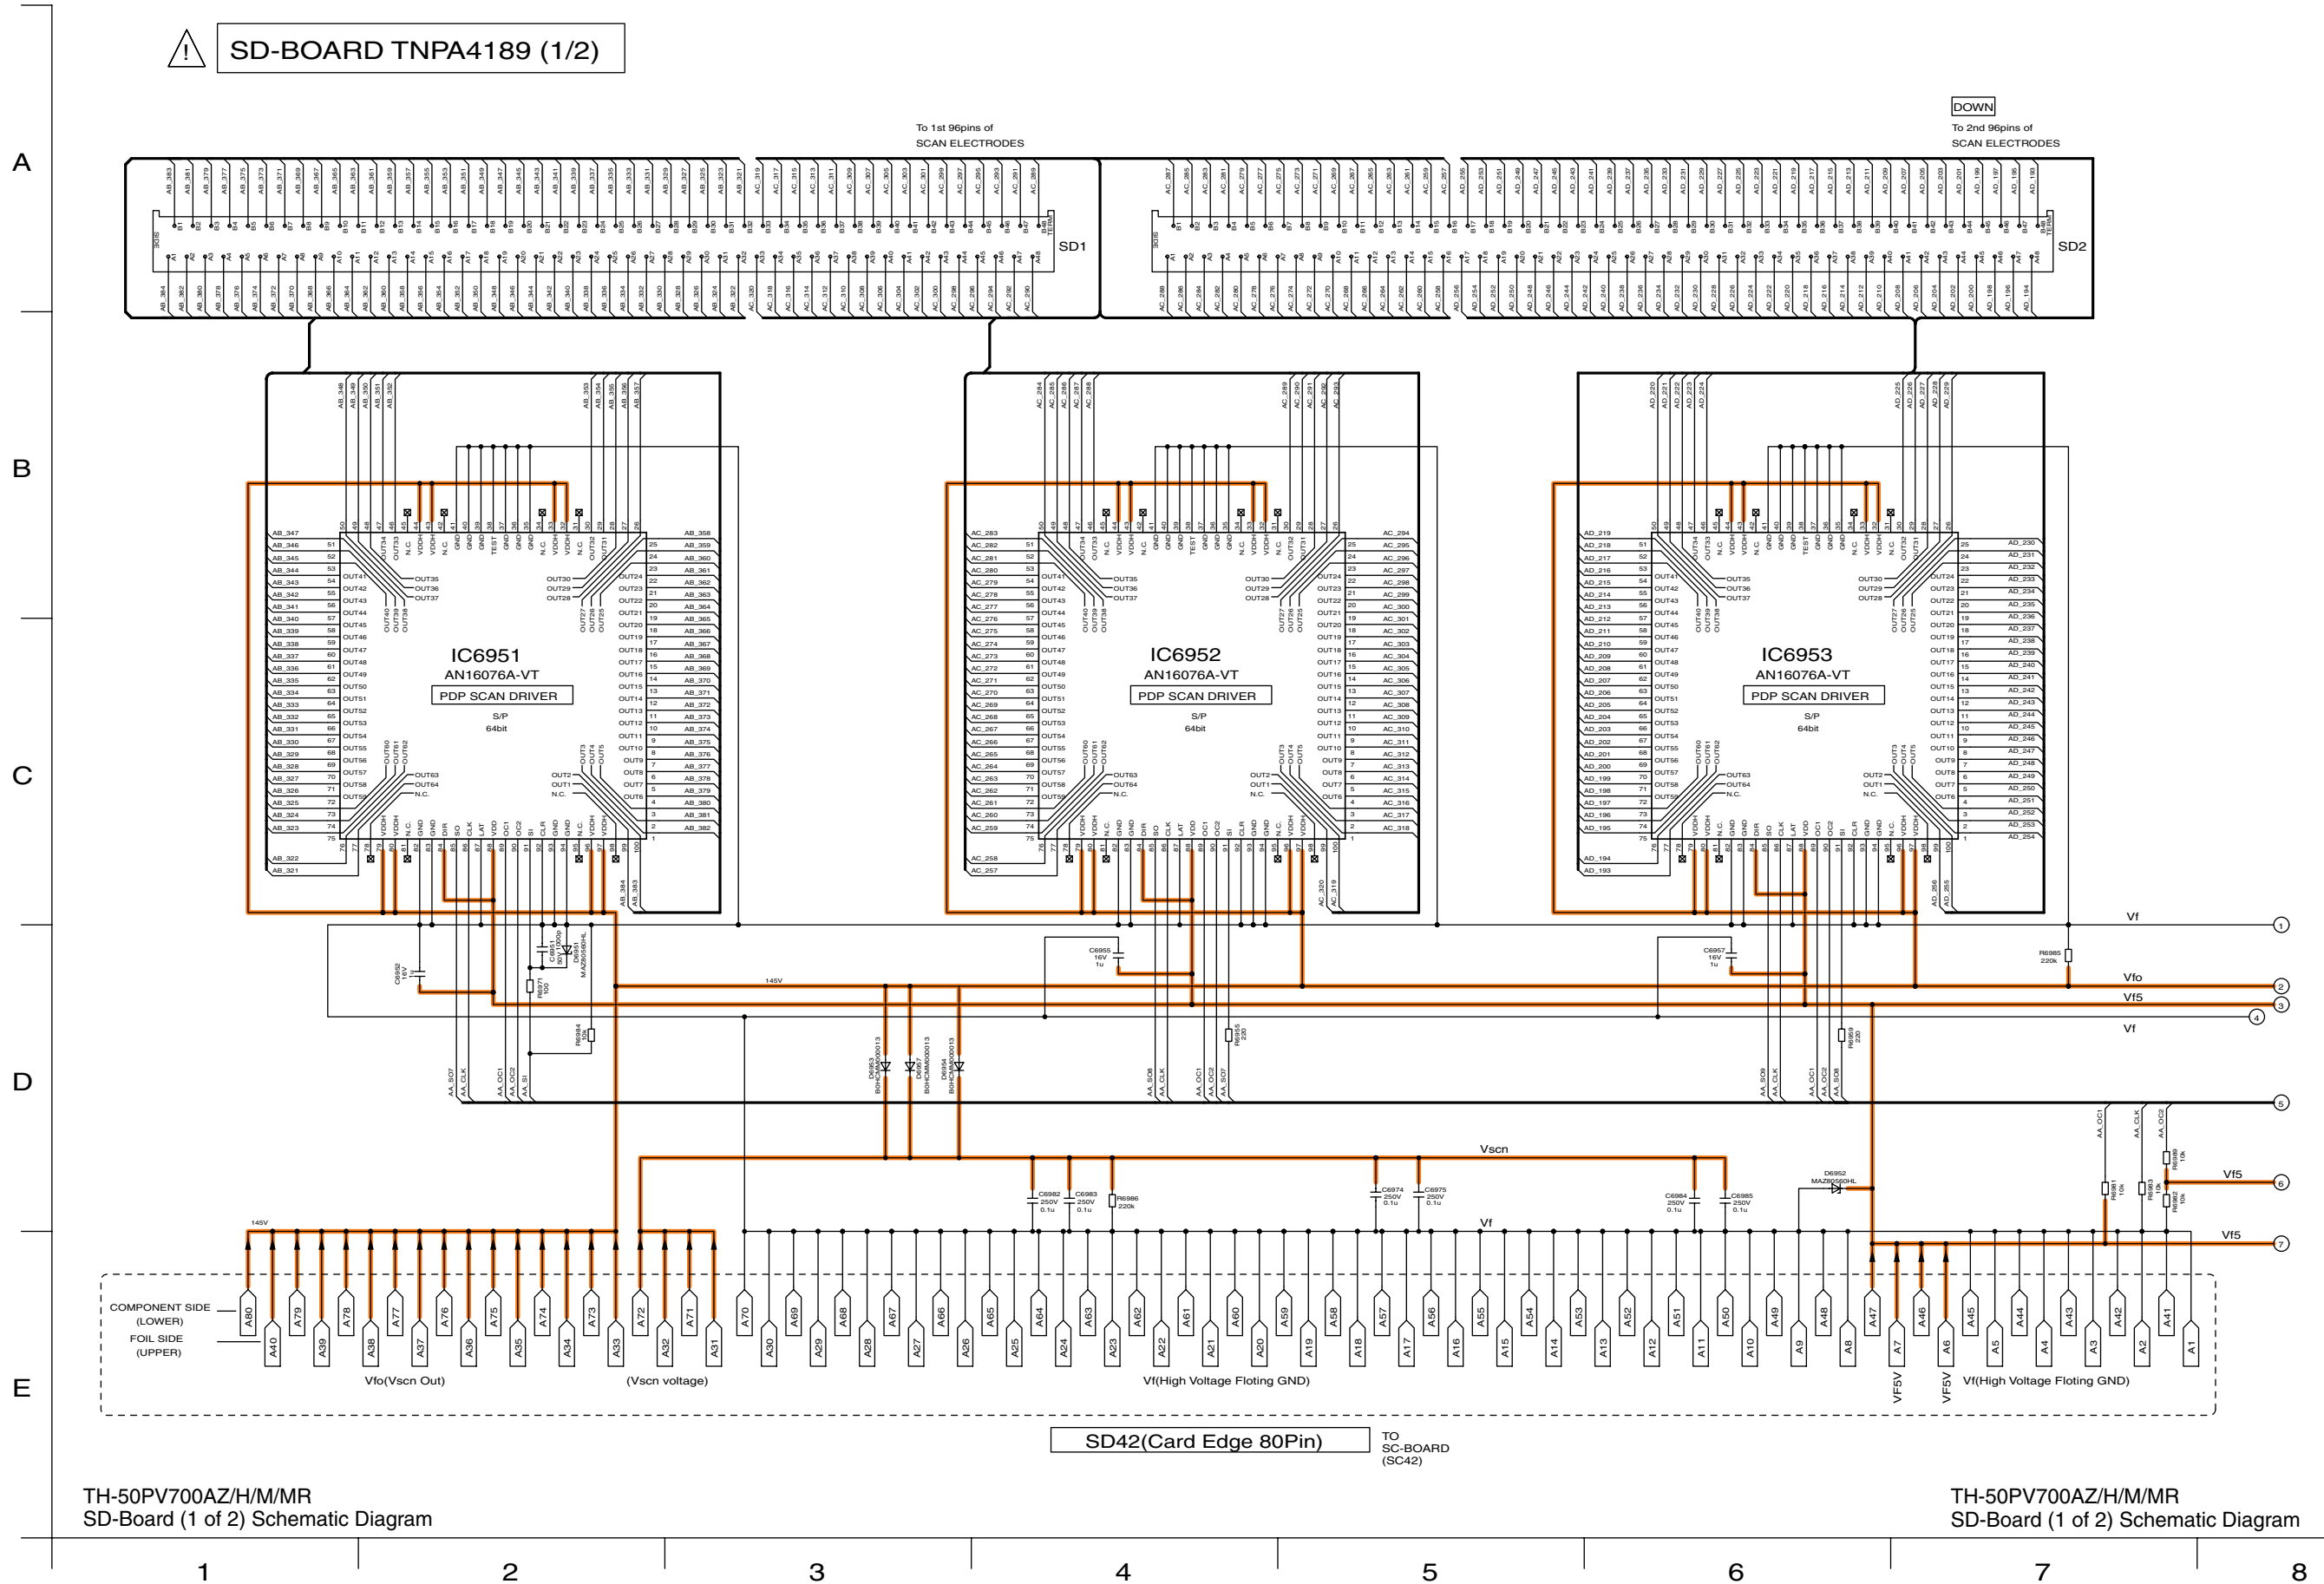


TH-50PV700AZ/H/M/MR
SD-Board (1 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
SD-Board (1 of 2) Schematic Diagram

15.50. SD-Board (2 of 2) Schematic Diagram

SD-BOARD TNPA4189 (2/2)

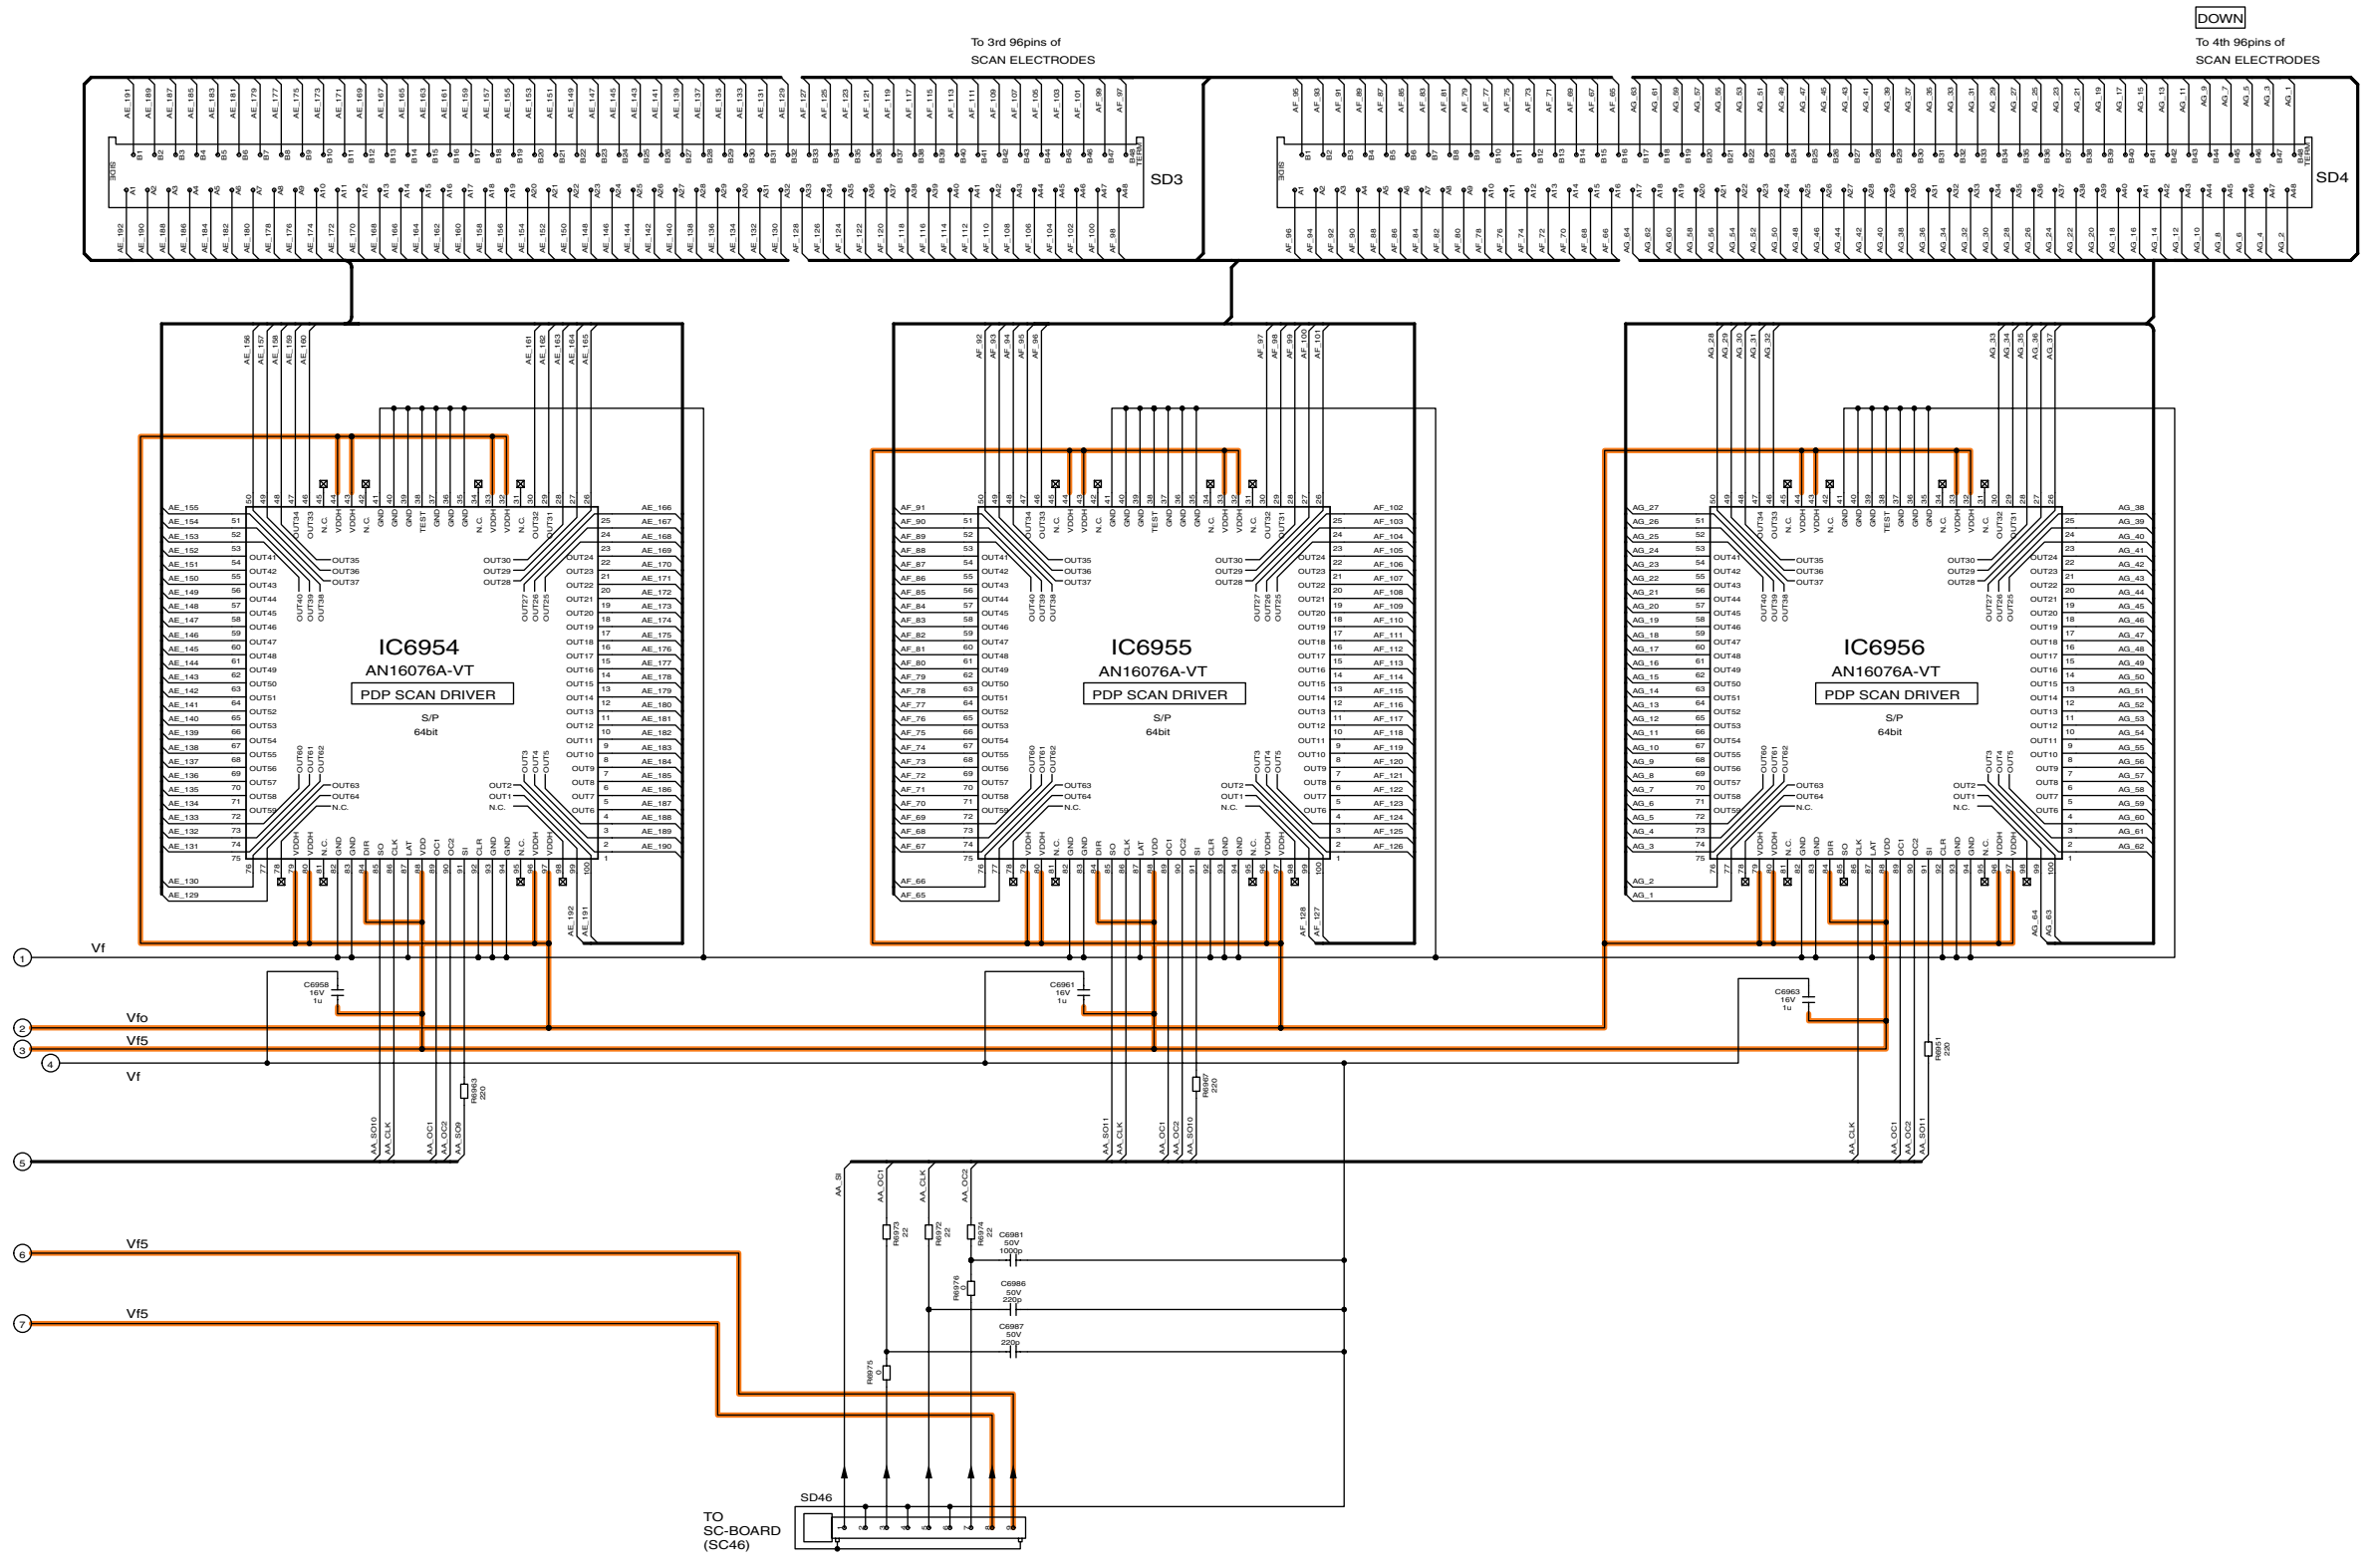


TH-50PV700AZ/H/M/MR
SD-Board (2 of 2) Schematic Diagram


TH-50PV700AZ/H/M/MR
SD-Board (2 of 2) Schematic Diagram

8 9 10 11 12 13 14 15

15.51. SS, SS2 and SS3-Board Block Diagram

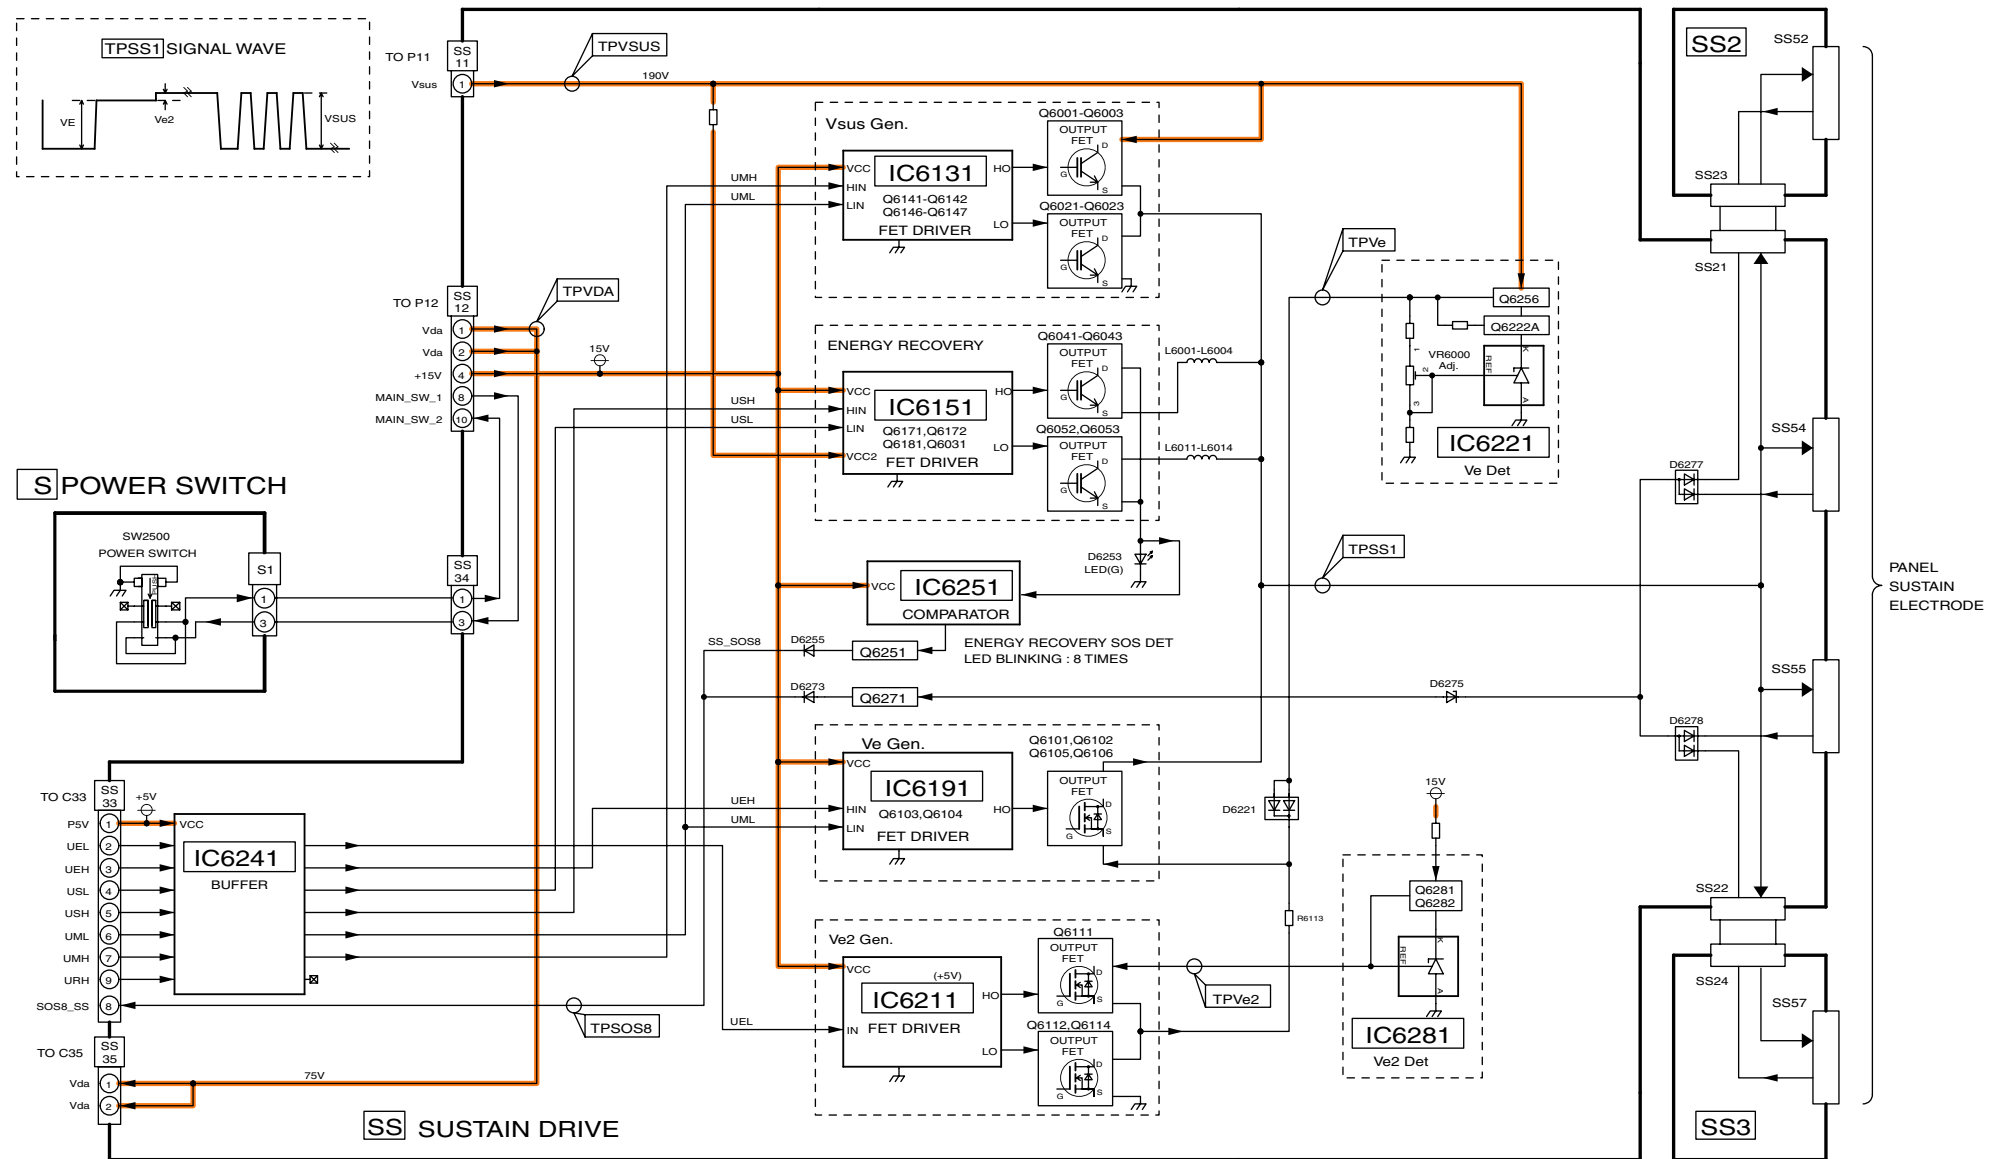

15.52. SS-Board (1 of 2) Schematic Diagram

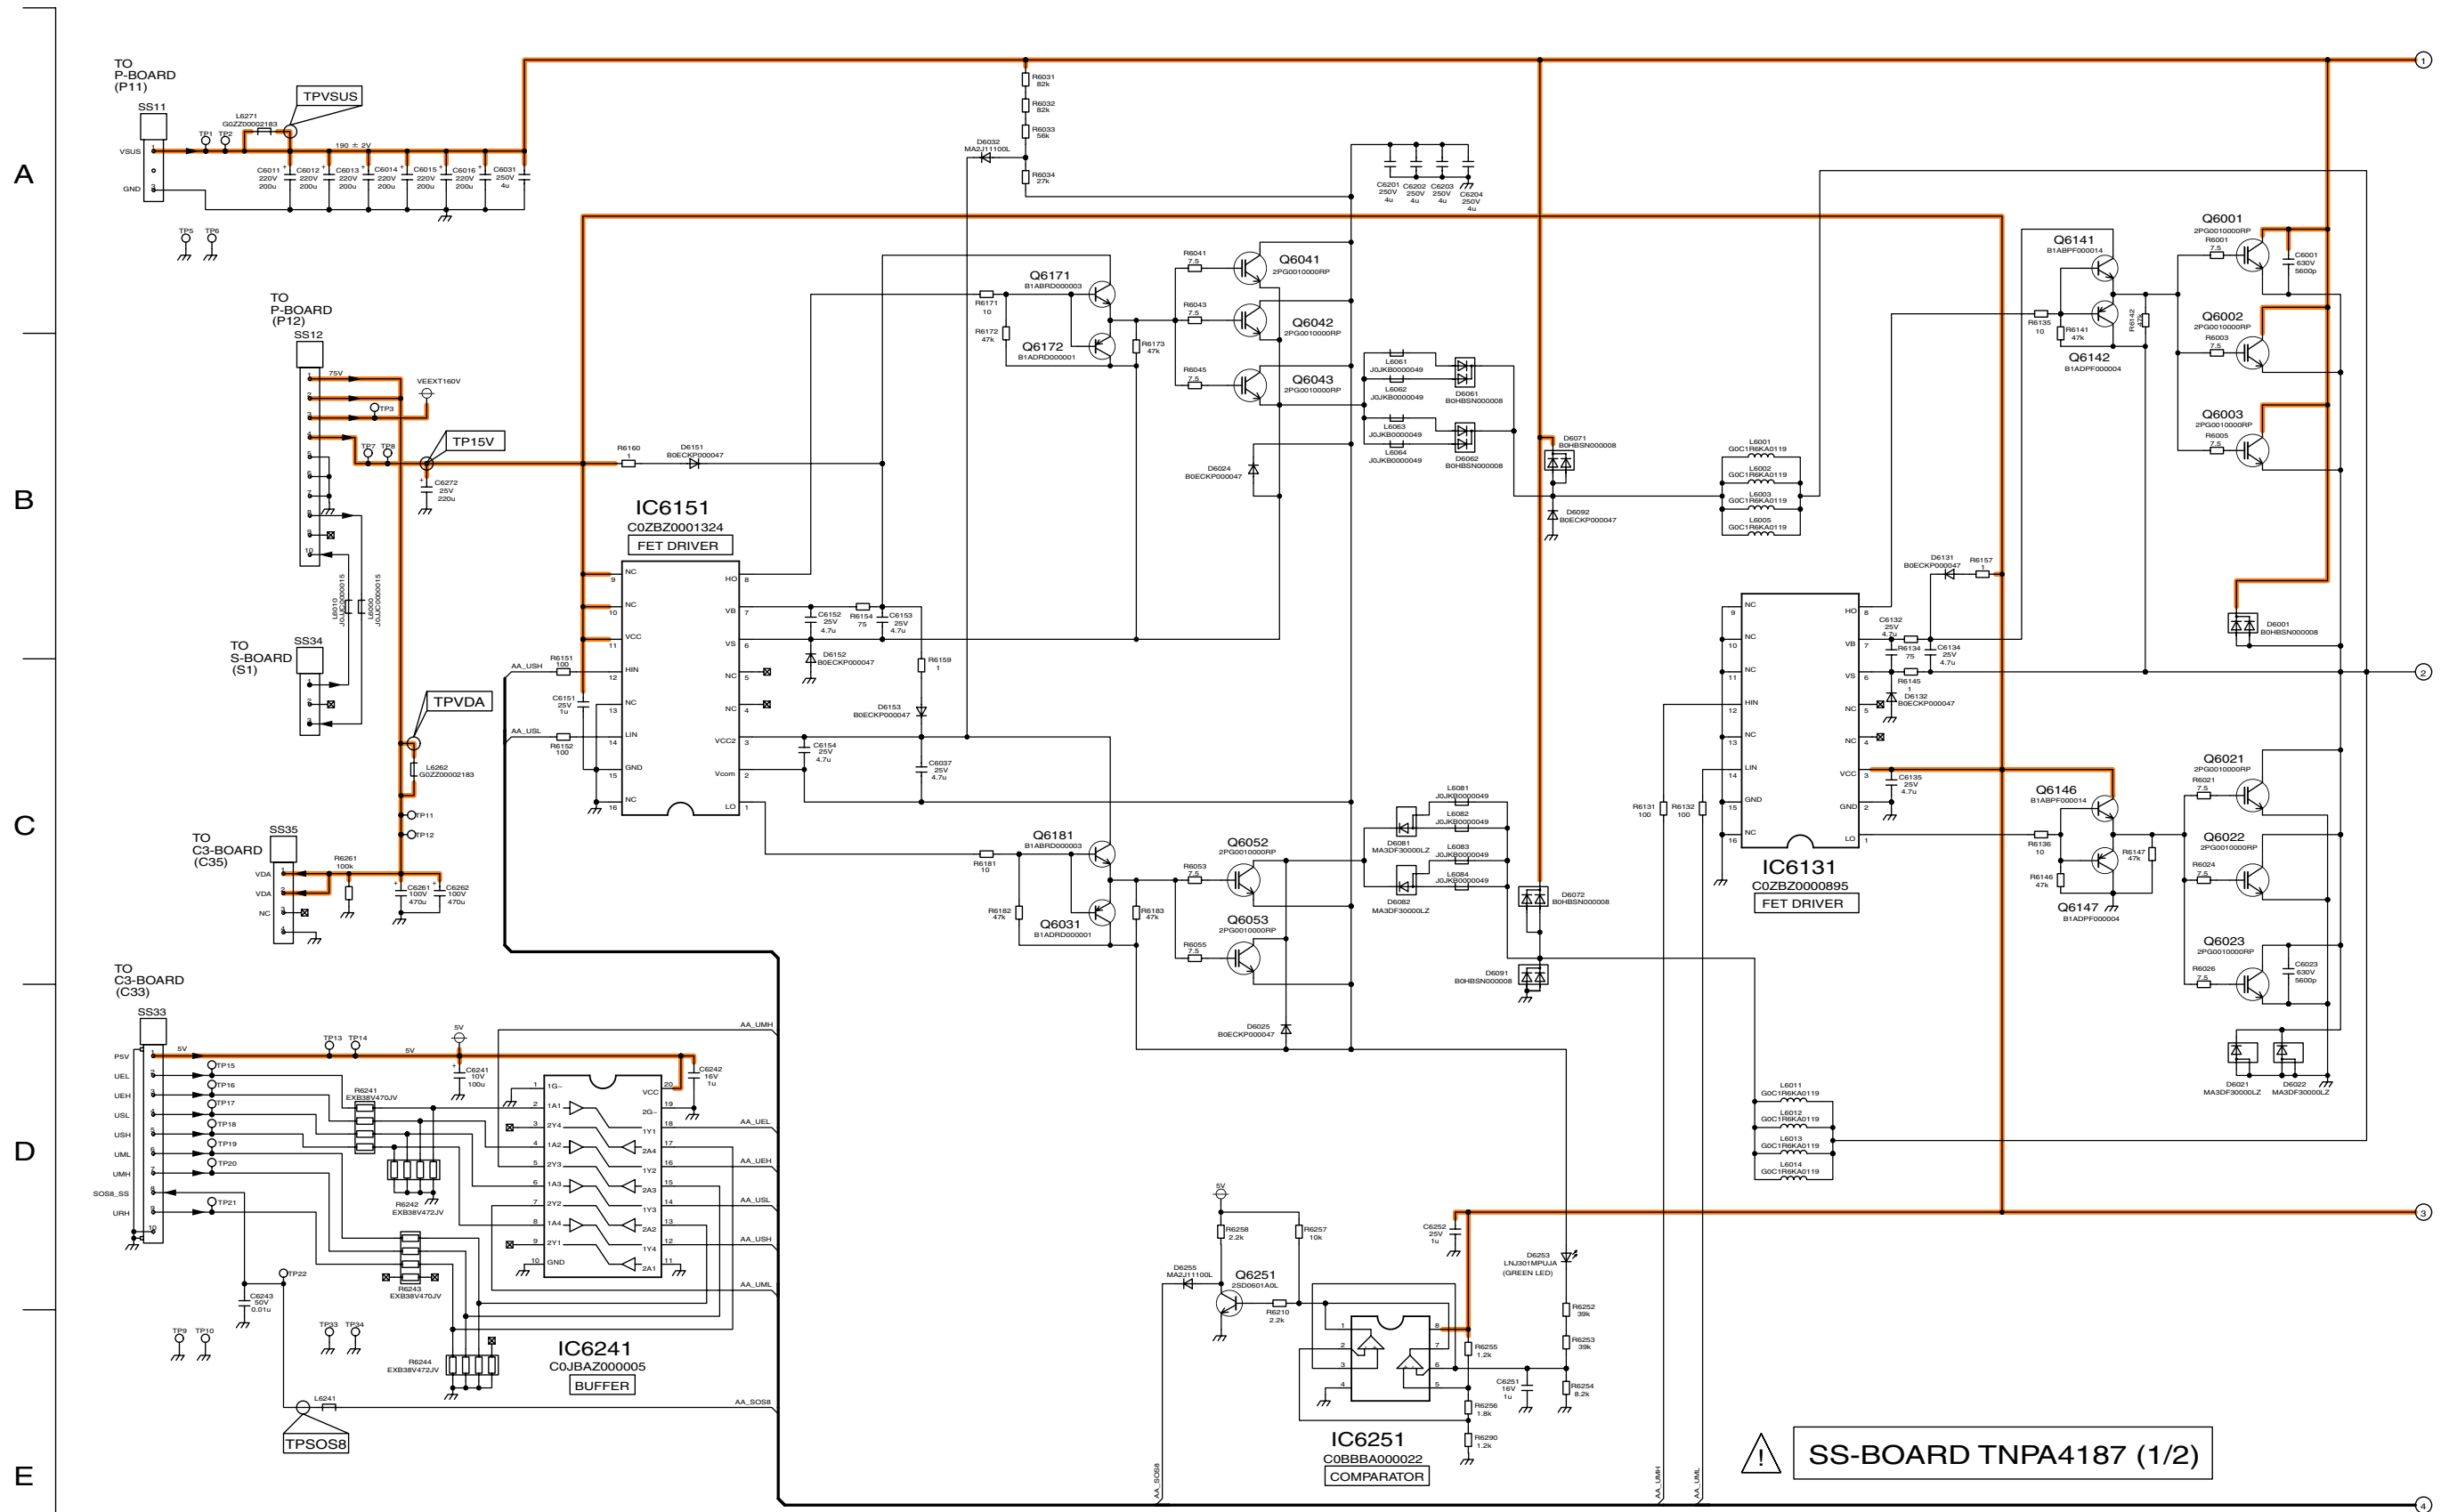


SS-BOARD TNPA4187 (1/2)

TH-50PV700AZ/H/M/MR
SS-Board (1 of 2) Schematic Diagram

TH-50PV700AZ/H/M/MR
SS-Board (1 of 2) Schematic Diagram

15.53. SS-Board (2 of 2), SS2 and SS3-Board Schematic Diagram

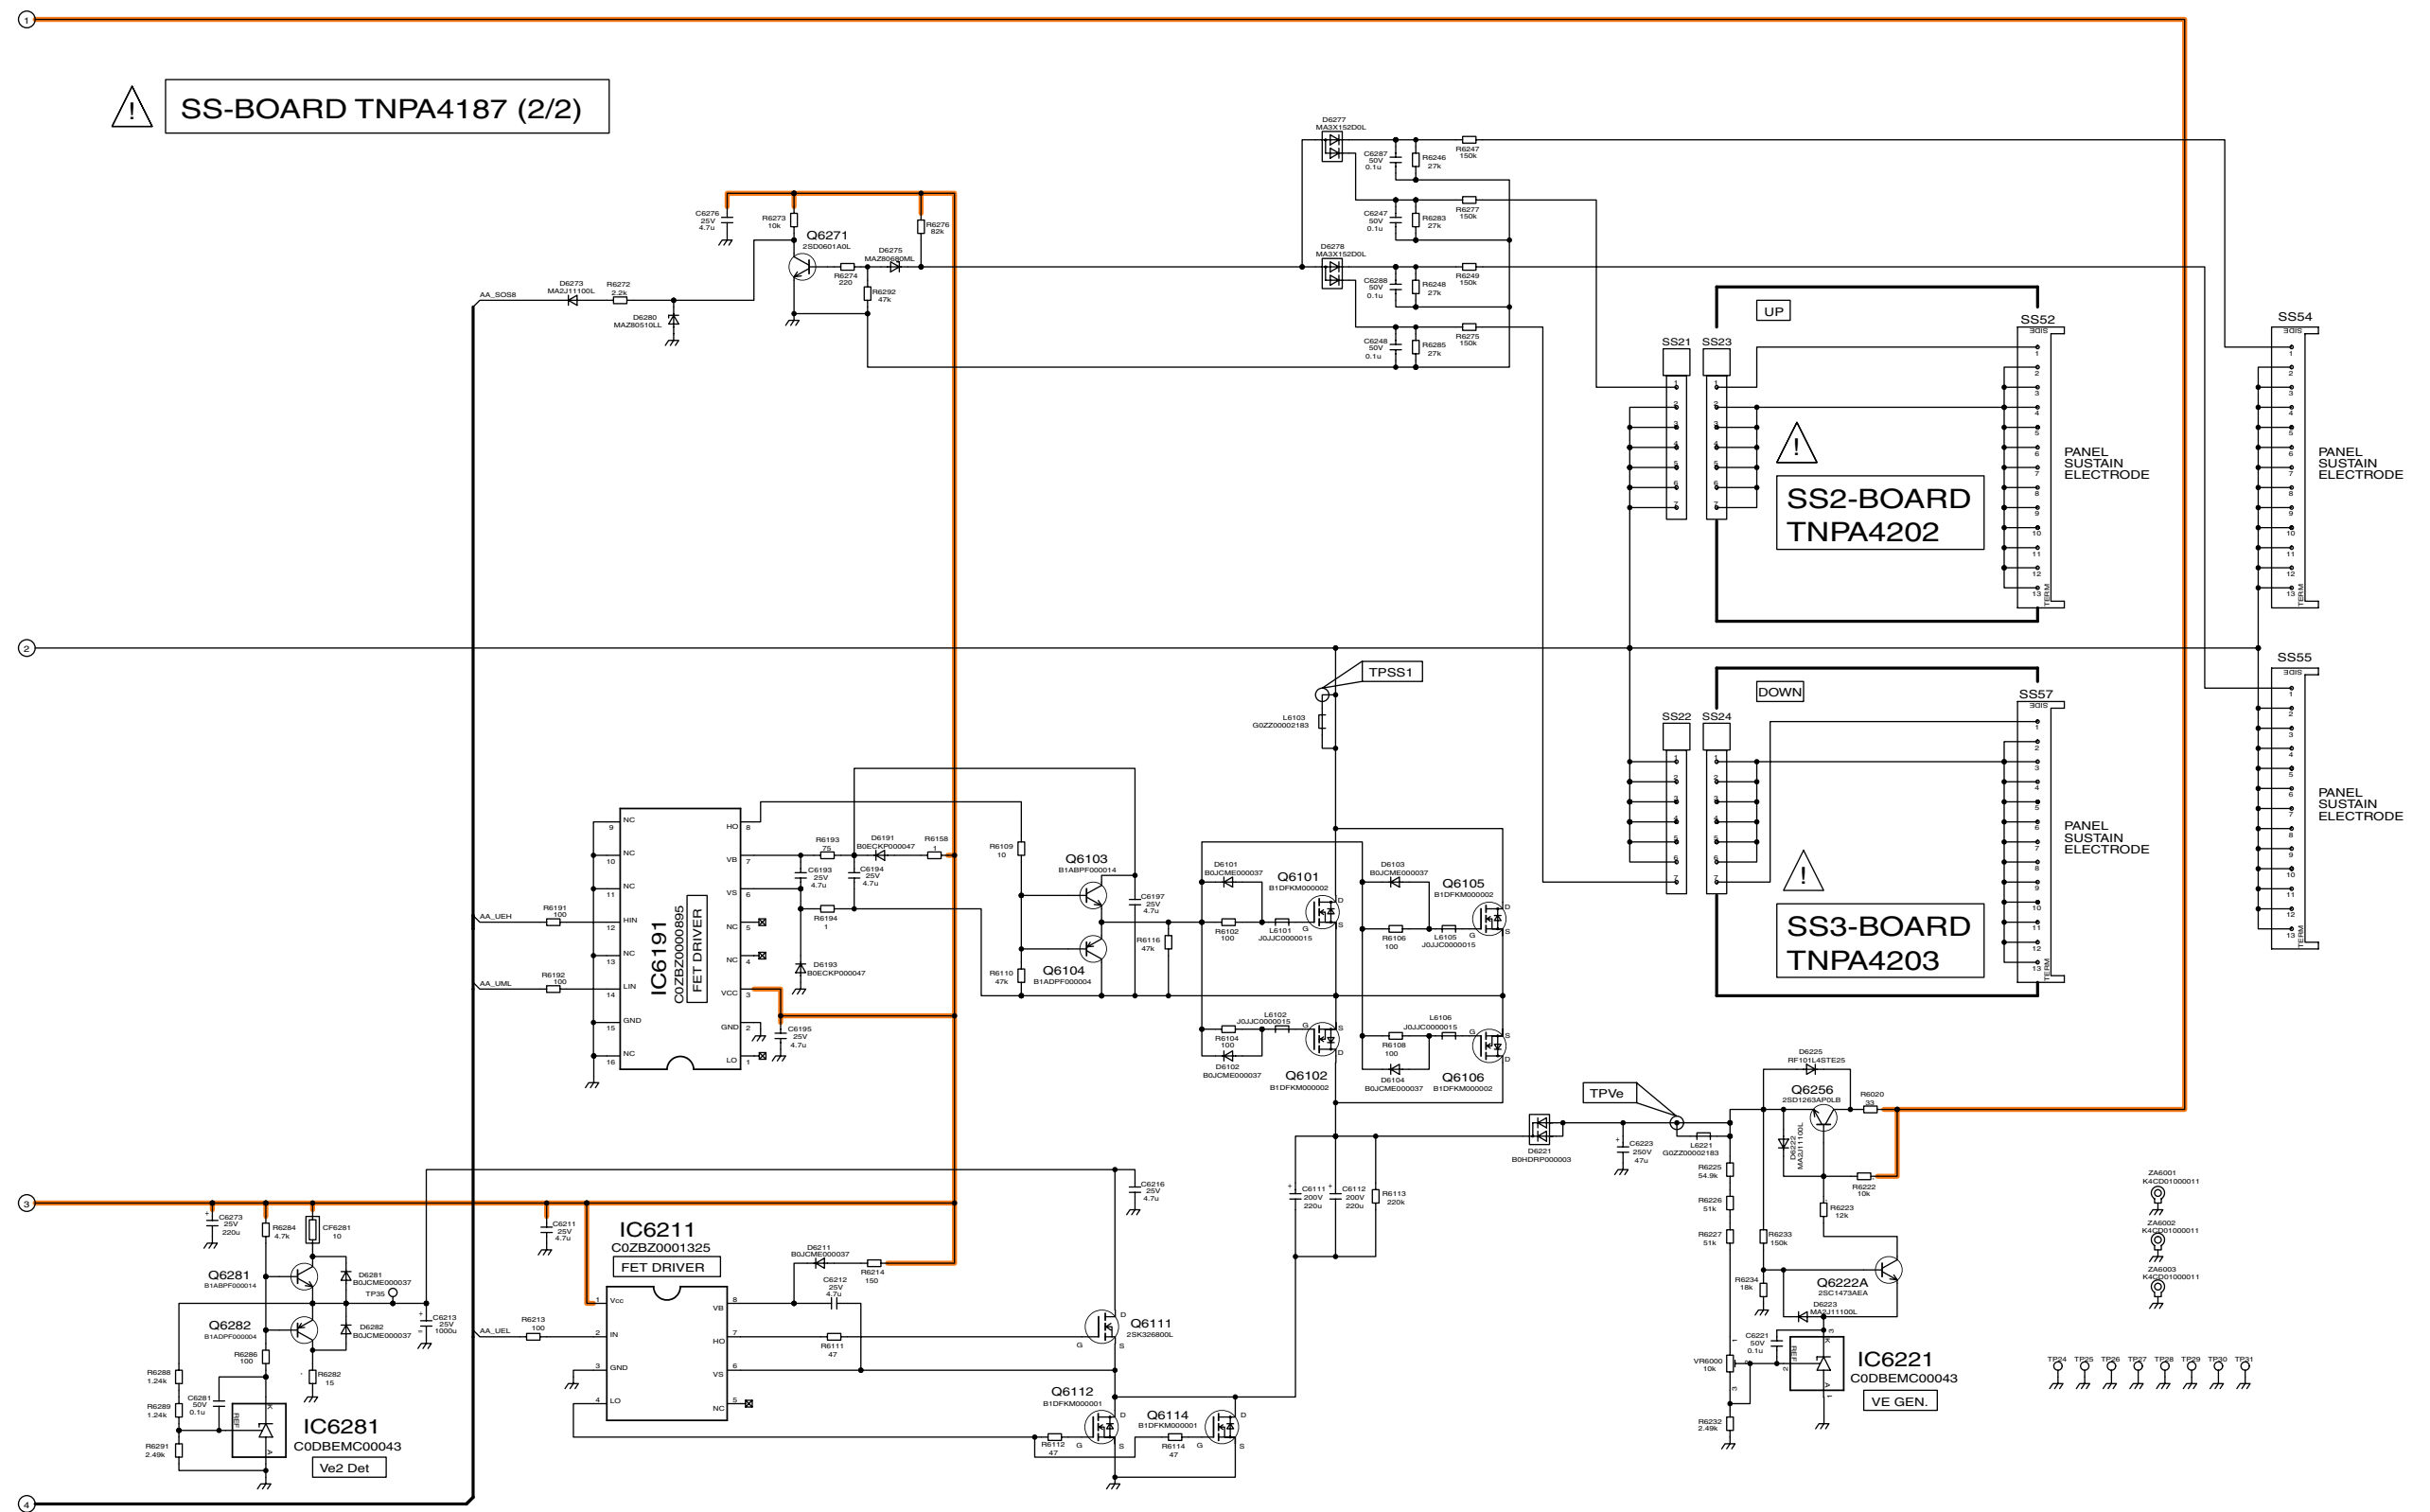

TH-50PV700AZ/H/M/MR
SS-Board (2 of 2), SS2 and SS3-Board Schematic Diagram

TH-50PV700AZ/H/M/MR
SS-Board (2 of 2), SS2 and SS3-Board Schematic Diagram

8

9

10

11

12

13

14

15

15.54. G, GS, and S-Board Block and Schematic Diagram

A






B

C

D

E

F

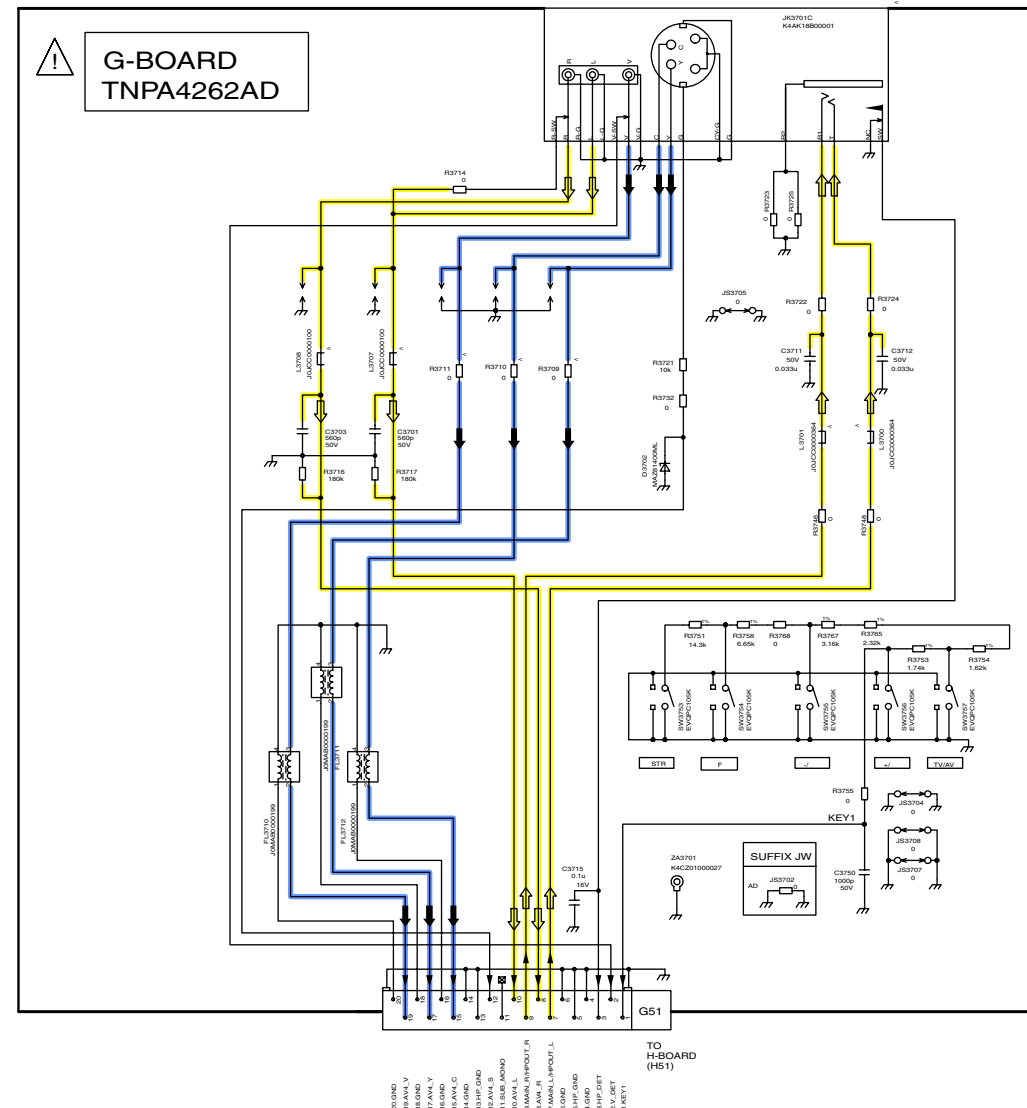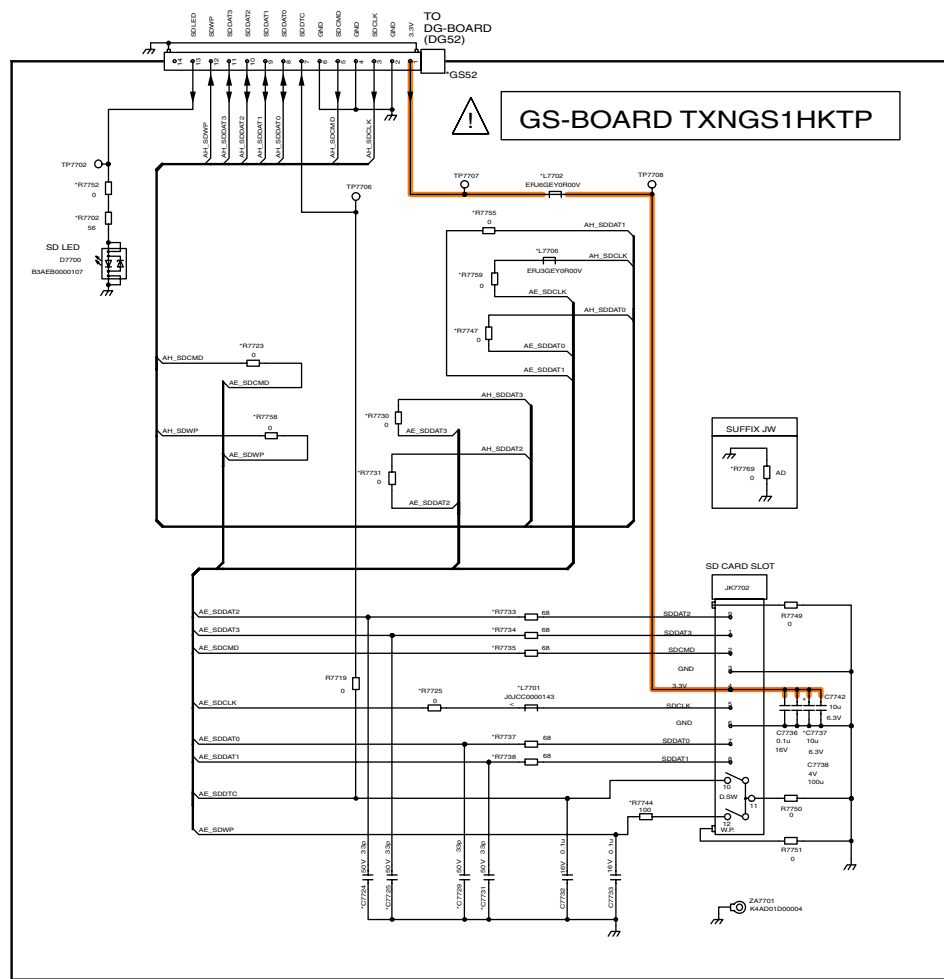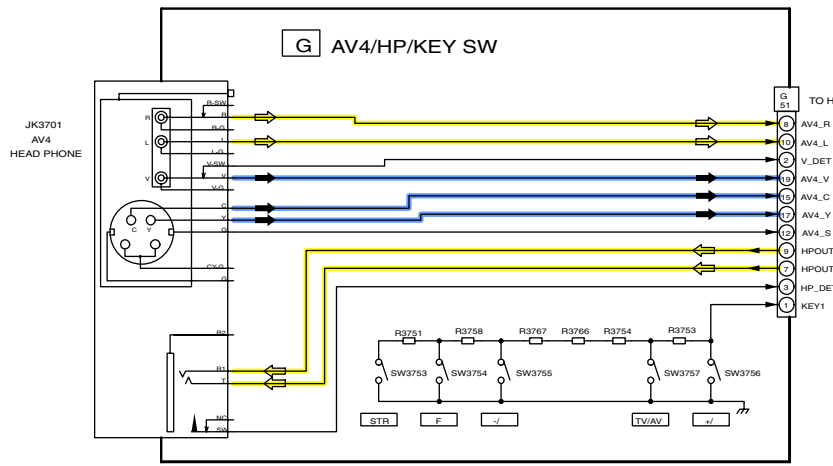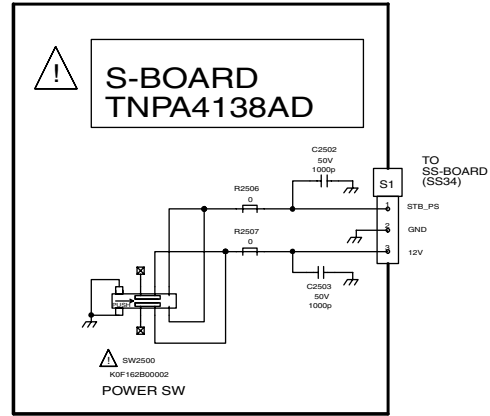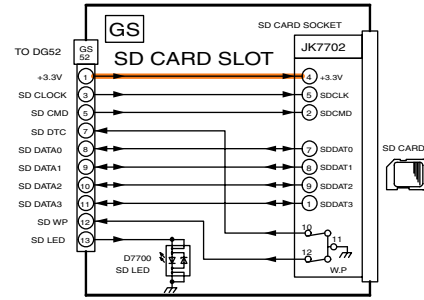

TH-50PV700AZ/H/M/MR
G, GS and S-Board Schematic Diagram

TH-50PV700AZ/H/M/MR
G, GS and S-Board Schematic Diagram

1

2

3

4

5

6


7

8


9

15.55. GH and K-Board Block and Schematic Diagram


A

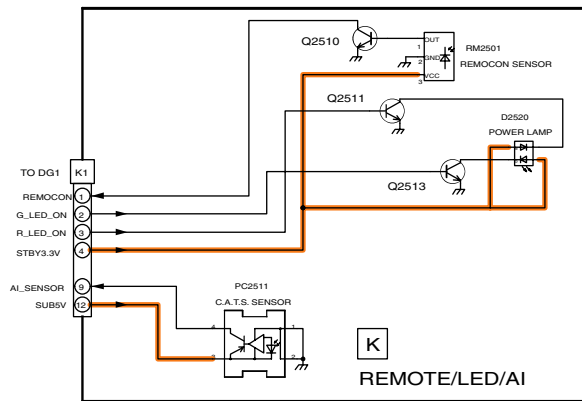


B

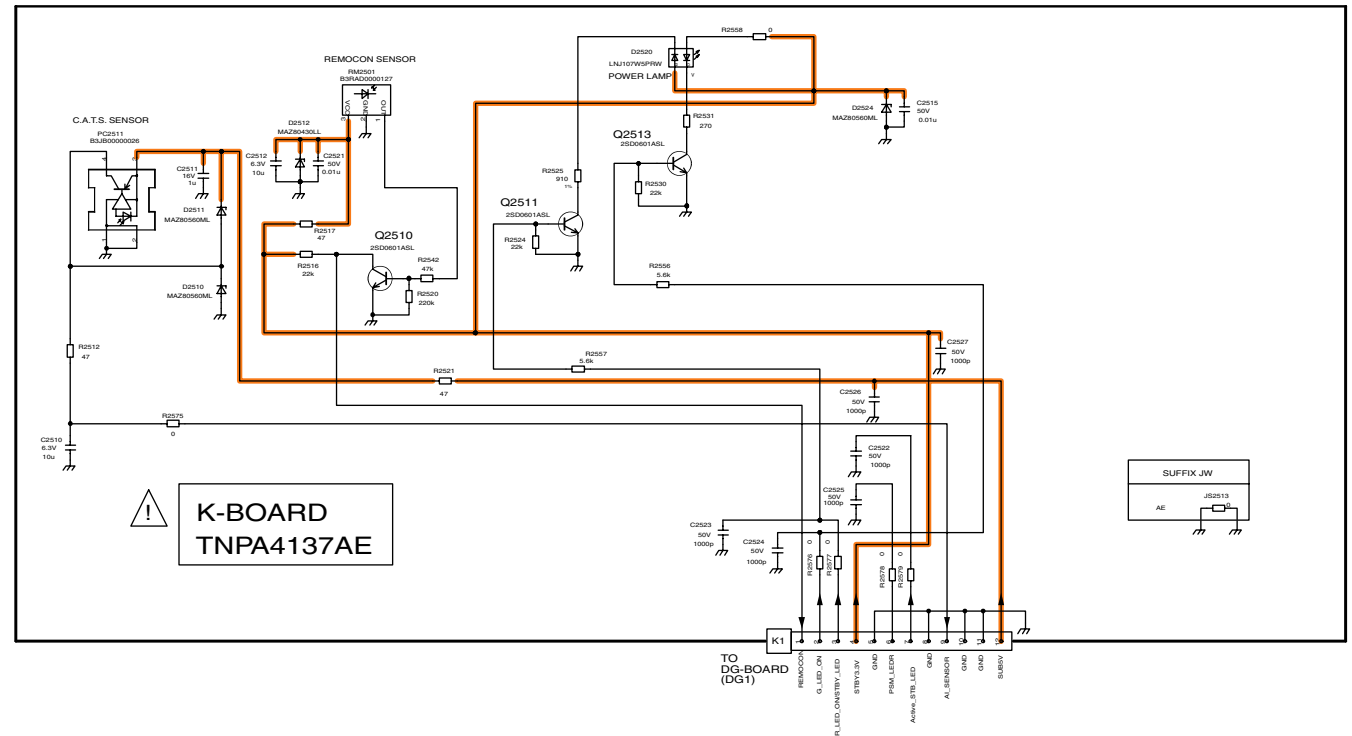

C

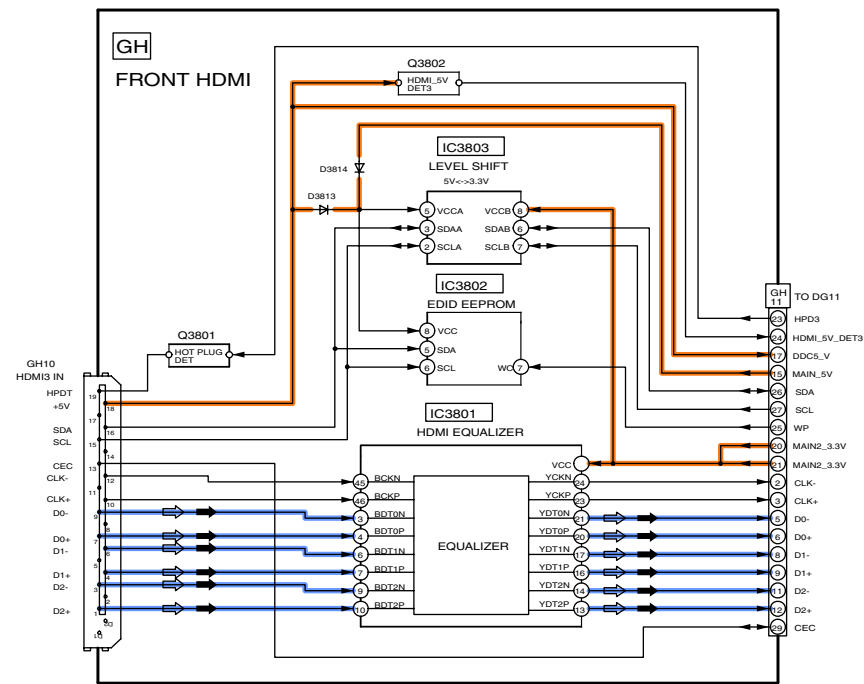

D

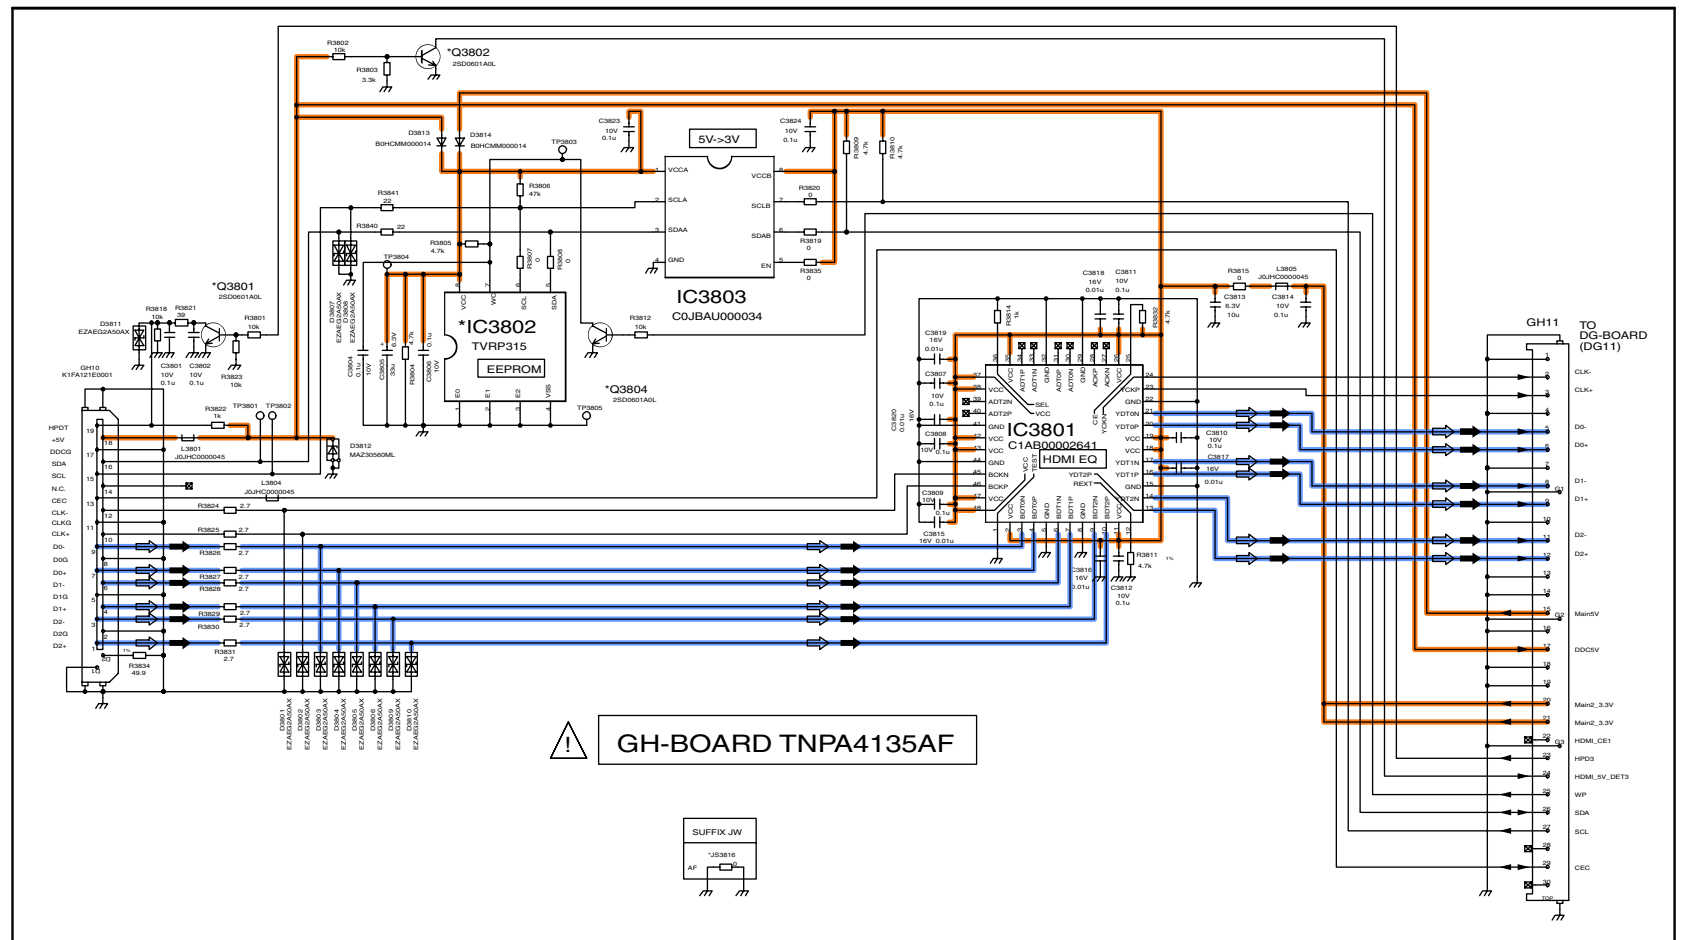

E

F

TH-50PV700AZ/H/M/MR
GH and K-Board Schematic Diagram

TH-50PV700AZ/H/M/MR
GH and K-Board Schematic Diagram

1

2

3

4

5

6


7

8


9

16 Exploded Views & Replacement Parts List


16.1. Exploded Views

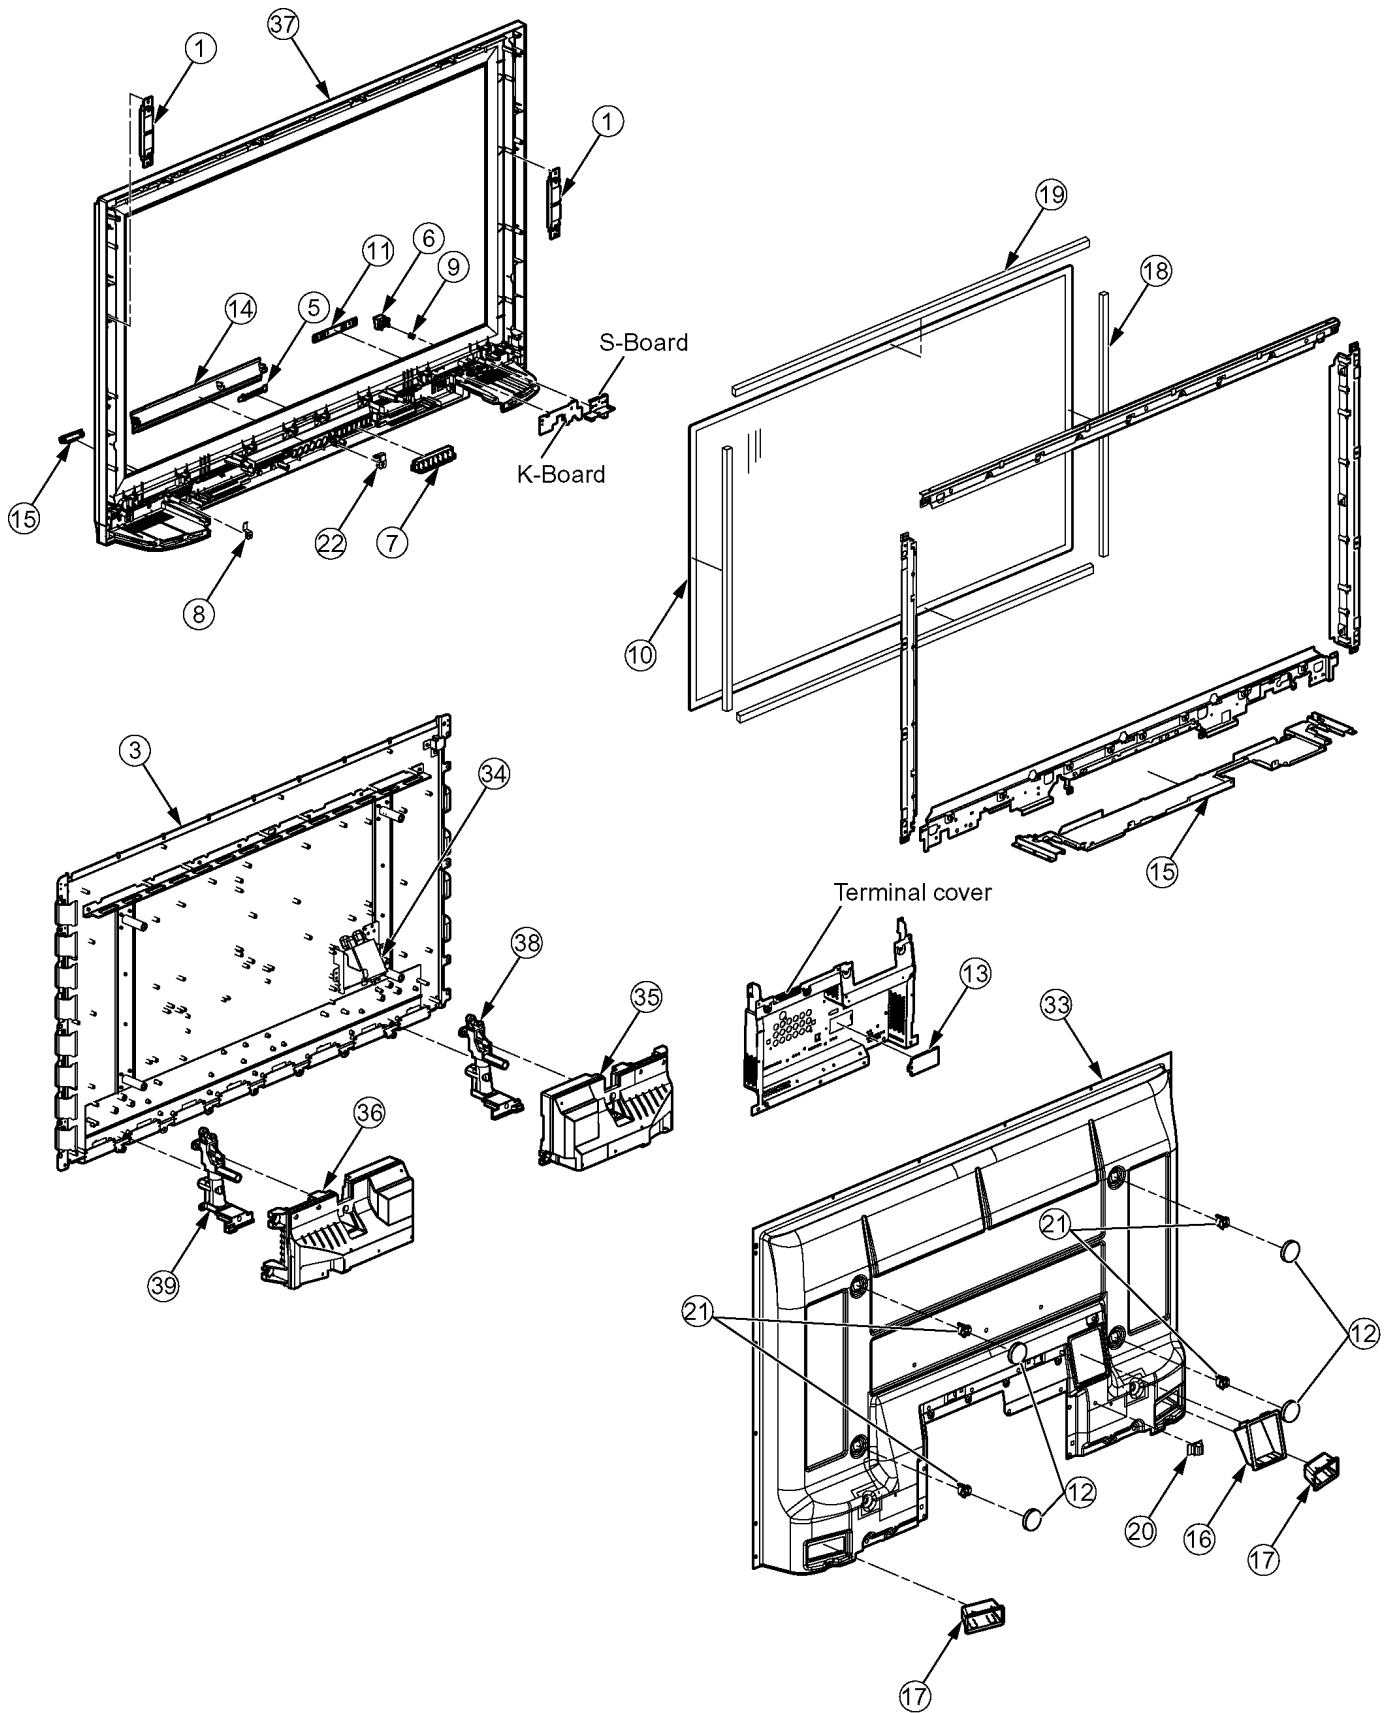


16.2. Packing Exploded Views (1)

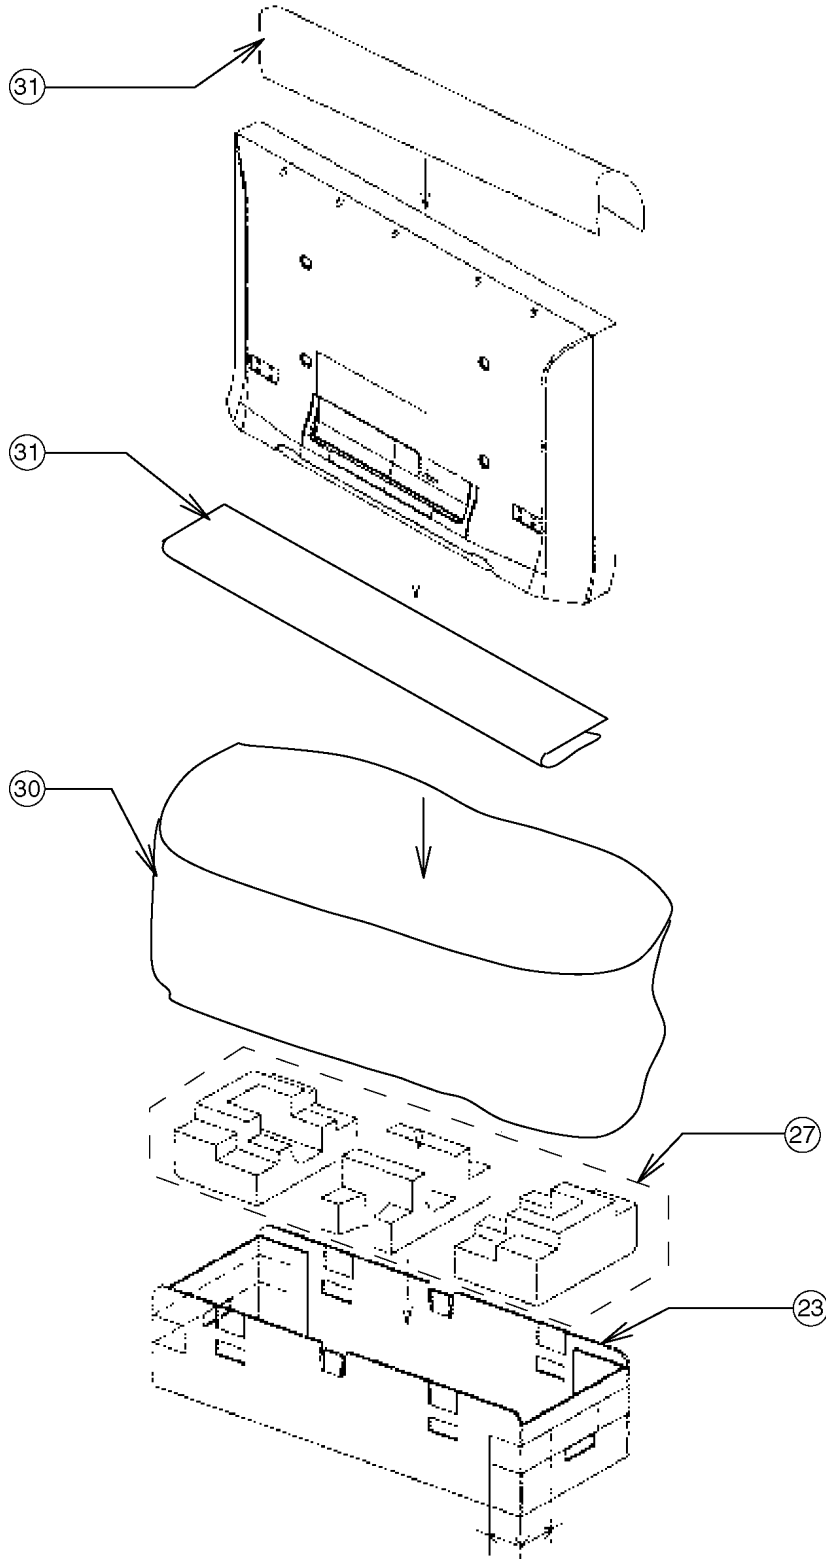

16.3. Packing Exploded Views (2)

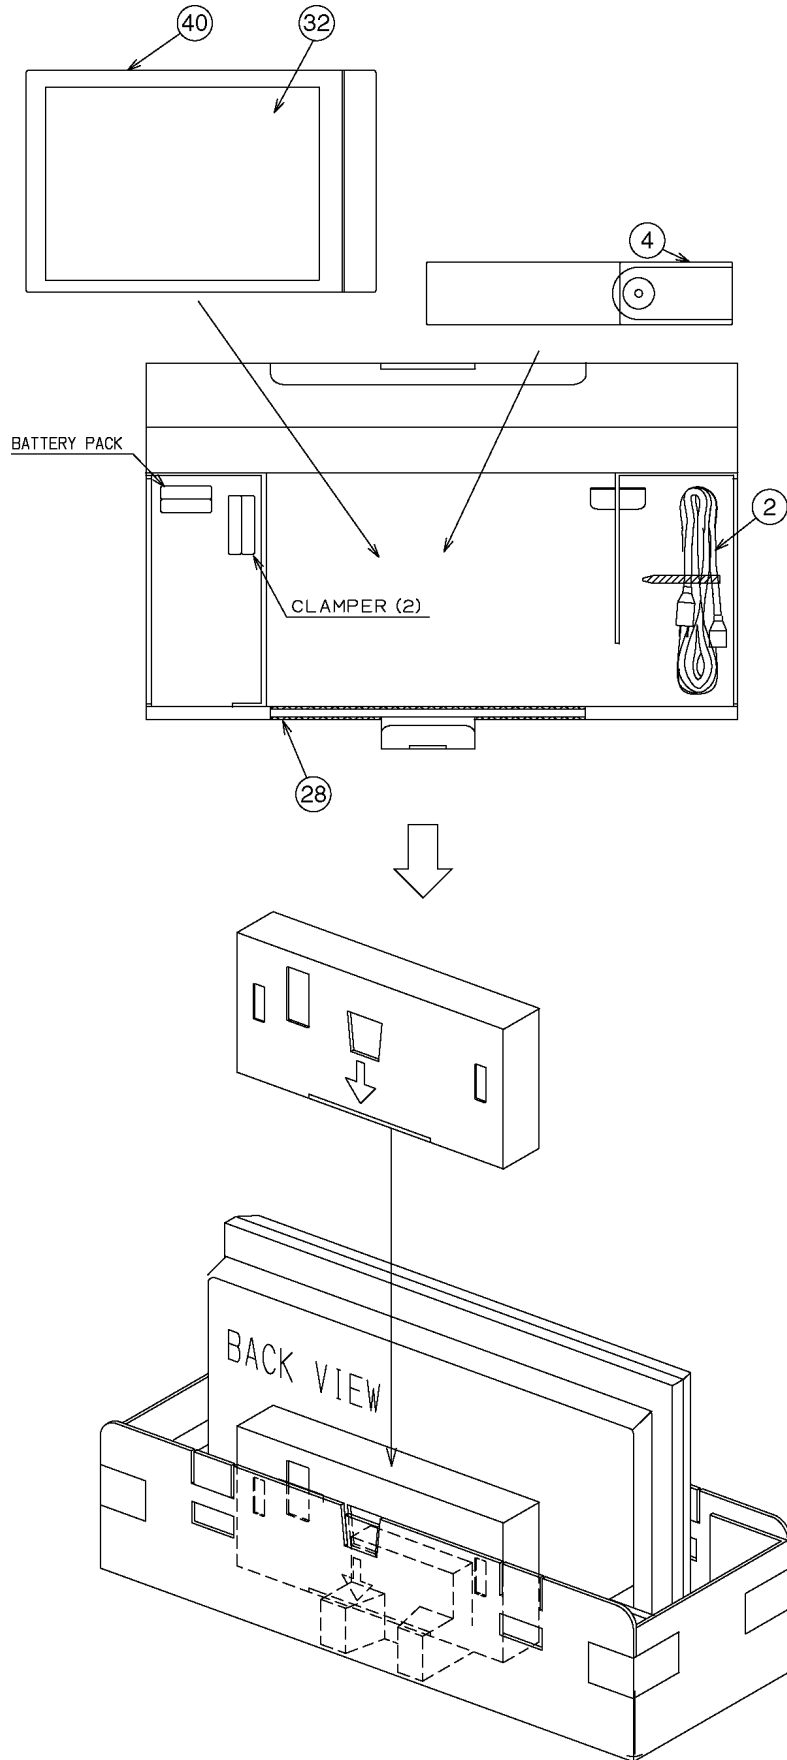

16.4. Packing Exploded Views (3)

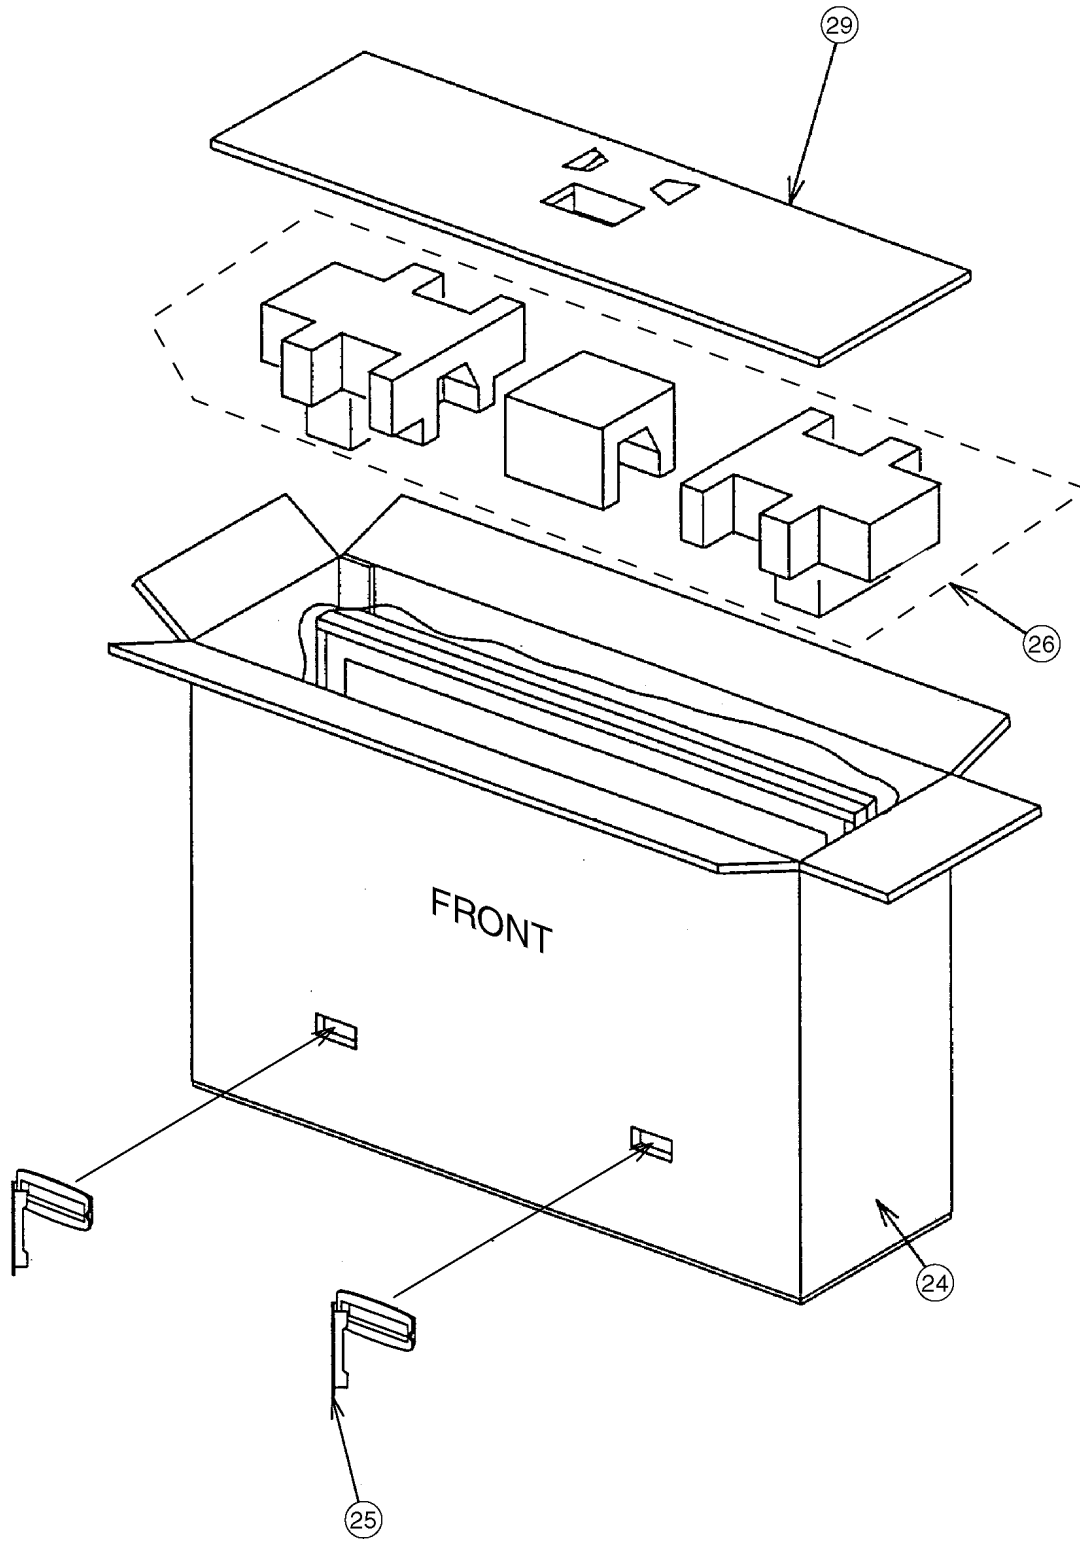

16.5. Replacement Parts List Notes

Important Safety Notice

Components identified by Δ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W
 Type Allowance

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z, 50V
 Type Allowance

| Type | Allowance |
|-------------------------------|----------------|
| C : Carbon | F : $\pm 1\%$ |
| F : Fuse | G : $\pm 2\%$ |
| M : Metal Oxide Metal Film | J : $\pm 5\%$ |
| S : Solid | K : $\pm 10\%$ |
| W : Wire Wound | M : $\pm 20\%$ |

| Type | Allowance |
|------------------|-------------------------|
| C : Ceramic | C : $\pm 0.25\text{pF}$ |
| E : Electrolytic | D : $\pm 0.5\text{pF}$ |
| P : Polyester | F : $\pm 1\text{pF}$ |
| Polypropylene | G : $\pm 3\text{pF}$ |
| Tantalum | J : $\pm 5\text{pF}$ |
| T : Tantalum | K : $\pm 10\text{pF}$ |
| | L : $\pm 15\text{pF}$ |
| | M : $\pm 20\text{pF}$ |
| | P : +100%, -0% |
| | Z : +80%, -20% |

16.6. Mechanical Replacement Parts List

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|---------------------------|-----|---------------------|
| 1 | EAS10D85E | SQUAWKER SP (L&R) | 2 | |
| | J0KF00000038 | CORE | 1 | |
| | J0KG00000042 | NOISE FILTER | 1 | |
| | J2ZZ00000036 | RF CABLE | 1 | TH-50PV700AZ/H/M |
| | K1ZZ00001424 | 3 PIECE CONNECTOR PLUG | 1 | |
| 2 | K2CK3DH00029 | AC CORD | 1 | TH-50PV700AZ ▲ |
| 2 | K2CN3DH00006 | AC CORD | 1 | TH-50PV700M/MR ▲ |
| 2 | K2CT3DH00018 | AC CORD | 1 | TH-50PV700H/M ▲ |
| 3 | MD50H10A1J | PLASMA DISPLAY PANEL | 1 | ▲ |
| 4 | N2QAYB000120 | REMOTE CONTROL | 1 | |
| 5 | TBMA220 | PANASONIC BADGE | 1 | |
| 6 | TBXA51101 | POWER BUTTON | 1 | |
| 7 | TBXA51202 | CONTROL BUTTON | 1 | |
| 8 | TESA297 | SD DOOR SPRING | 1 | |
| 9 | TESD078 | BUTTON SPRING | 1 | |
| | THEL037N | SCREW | 1 | |
| | THEL0429 | SCREW | 29 | |
| | THEL047J | SCREW (HDMI:2) | 2 | |
| | THEL049 | SCREW (WOOFER_SP) | 2 | |
| | THTA0419 | HOOK SCREW | 1 | |
| | THTA0419 | HOOK SCREW | 1 | |
| | THTF011N | SCREW | 85 | |
| 10 | TKGA5345 | FRONT GLASS | 1 | |
| 11 | TKKC5269 | LED PANEL | 1 | |
| 12 | TKKL5231-3 | M8 SPACER CAP | 4 | |
| 13 | TKKL5383 | ADJUSTMENT COVER | 1 | |
| 14 | TKPB06108 | DOOR | 1 | |
| 15 | TKPB06401 | SD DOOR | 1 | |
| 16 | TKPB13901 | INLET COVER | 1 | ▲ |
| 17 | TKRA46202 | HANDLE (REAR COVER) | 2 | |
| | TKXA22201 | POWER BUTTON BRACKET | 1 | |
| 18 | TMKG647 | SPONGE (TKG/LEFT/RIGHT) | 2 | |
| 19 | TMKG661-1 | SPONGE (TKG/UPPER/BOTTOM) | 2 | |
| | TMM15414-2 | CLAMPER | 1 | |
| | TMM16473-1 | CLAMPER | 2 | |
| | TMM17499 | CLAMPER | 1 | |
| | TMM25401 | CLAMPER | 1 | |
| | TMME047 | CLAMPER | 1 | |
| | TMME084 | CLAMPER | 1 | |
| | TMME190 | CLAMPER | 1 | |
| 20 | TMME226 | AC CORD CLAMPER | 1 | |
| | TMME258 | CABLE CLAMPER | 2 | |
| | TMME260 | CLAMPER | 10 | |
| | TMME285 | CLAMPER | 1 | |
| | TMME287 | CLAMPER | 4 | |
| | TMME292 | CLAMPER | 7 | |
| | TMME293 | CLAMPER | 1 | |
| | TMME305 | CLAMPER | 2 | |
| 21 | TMMX134 | M8-SPACER | 4 | |
| 22 | TMMX186 | DOOR SPRING | 1 | |
| 23 | TPCB95301 | CARTON BOX BOTTOM | 1 | |
| 24 | TPCC15501 | CARTON BOX TOP | 1 | TH-50PV700H ▲ |
| 24 | TPCC15502 | CARTON BOX TOP | 1 | TH-50PV700AZ ▲ |
| 24 | TPCC15503 | CARTON BOX TOP | 1 | TH-50PV700M ▲ |
| 24 | TPCC15504 | CARTON BOX TOP | 1 | TH-50PV700MR ▲ |
| 25 | TPD169487 | JOINT | 4 | |
| 26 | TPDA1546 | CUSHION TOP | 1 | |
| 27 | TPDA1547 | CUSHION BOTTOM | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|----------------------------|-----|-----------------------|
| 28 | TPDF0737 | PAPER BOX | 1 | |
| 29 | TPDF1647 | PAD TOP | 1 | |
| 30 | TPEH170 | PROTECT COVER | 1 | |
| 31 | TPEH273 | TOP PROTECT SHEET | 2 | |
| 32 | TQBC2183 | INSTRUCTION BOOK (ENGLISH) | 1 | TH-50PV700AZ ▲ |
| 32 | TQBC2184 | INSTRUCTION BOOK (ENGLISH) | 1 | TH-50PV700H/M/MR ▲ |
| 32 | TQBC2185 | INSTRUCTION BOOK (CHINESE) | 1 | TH-50PV700H ▲ |
| 32 | TQBC2186 | INSTRUCTION BOOK (ARABIC) | 1 | TH-50PV700M/MR ▲ |
| 32 | TQBC2187 | INSTRUCTION BOOK (PERSIAN) | 1 | TH-50PV700MR ▲ |
| | TSXL519 | CABLE (C10-C20) | 1 | |
| | TSXL554 | CABLE (C22-C32) | 1 | |
| | TSXL604 | CABLE (SC20-D20) | 1 | |
| | TSXL615 | CABLE (DG11-GH11) | 1 | |
| 33 | TTUA1627 | REAR COVER | 1 | TH-50PV700AZ ▲ |
| 33 | TTUA1628 | REAR COVER | 1 | TH-50PV700H ▲ |
| 33 | TTUA1629 | REAR COVER | 1 | TH-50PV700H ▲ |
| 33 | TTUA1630 | REAR COVER | 1 | TH-50PV700MR ▲ |
| 34 | TXAJS01HMTP | AC INLET ASSY | 1 | ▲ |
| 35 | TXFAB01HKTA | SPEAKER BOX ASSY (LEFT) | 1 | |
| 36 | TXFAB02HKTA | SPEAKER BOX ASSY (RIGHT) | 1 | |
| 37 | TXFKY01HKTHA | CABINET ASSY | 1 | ▲ |
| 38 | TXFMZ01GPTJ | STAND BLOCK ASSY LEFT | 1 | |
| 39 | TXFMZ02GPTJ | STAND BLOCK ASSY RIGHT | 1 | |
| | TXFSX01HMNTA | CABLE ASSY (D32-C21) | 1 | |
| | TXFSX01HNNTA | CABLE ASSY (D31-C11) | 1 | |
| | TXJH11HKTP | SPEAKER LEAD (H11-SP) | 1 | |
| | TXJH12HKTB | SPEAKER LEAD (H12-SP) | 1 | |
| | XTB4+12GFJ | SCREW | 43 | |
| | XTB4+12GFJ | SCREW | 2 | |
| | XTB4+12GFJK | SCREW | 23 | |
| | XTV3+10JFJK | SCREW | 4 | |
| | XTW3+10TFJ | SCREW | 2 | |
| | XYN3+F10FJ | SCREW | 1 | |
| | XYN3+F8FJ | SCREW | 37 | |
| | XYN3+J12FJ | SCREW | 42 | |
| | XYN3+J6FJ | SCREW | 1 | |
| | XYN4+E8FJ | SCREW | 1 | |
| | XYN4+F10FJ | SCREW | 13 | |
| | XYN5+C15FJ | SCREW | 8 | |
| 40 | XZBT6506 | POLY BAG | 1 | |

16.7. Electrical Replacement Parts List

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| F601.602 | K5D103BMA001 | TIME LAG FUSE HIGH | 2 | △ |
| C10 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C11 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| C20 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C21,22 | K1MN68BA0076 | 68P CONNECTOR | 2 | |
| C32 | K1MN68BA0076 | 68P CONNECTOR | 1 | |
| C33 | K1KA10B00218 | 10P CONNECTOR | 1 | |
| C35 | K1KA04BA0107 | 4P CONNECTOR | 1 | |
| C1102 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1103,04 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C1106 | F1H1H2700008 | E 27UF, 50V | 1 | |
| C1107 | F1H1H2200008 | E 22UF, 50V | 1 | |
| C1108 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C1109 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1111 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1112 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C1114 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C1117 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C1122 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C1123 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2000 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C2005,06 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2010,11 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2013,14 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2016,17 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2021,22 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2023 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2048-50 | ECJ1XB1H104K | C 10PF, J, 50V | 3 | |
| C2052,53 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2054 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2055,56 | ECJ1VC1H120J | C 12PF, J, 50V | 2 | |
| C2057,58 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2059 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C2088 | ECJ2FB1A475K | C 4.7UF, K, 10V | 1 | |
| C2089 | F1H1H5610007 | E 560UF, 50V | 1 | |
| C2091 | ECJ1VC1H100C | C 10PF, C, 50V | 1 | |
| C2092 | F1H1H2200008 | E 22UF, 50V | 1 | |
| C2096,97 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2098,99 | EEEB0J221UP | C 220PF, J, 6.3V | 2 | |
| C2100 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2101 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2102 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2105,06 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2107,08 | F2G0J470A019 | E 47UF 6.3V | 2 | |
| C2109,10 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2111 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C2112,13 | F2G0J470A019 | E 47UF 6.3V | 2 | |
| C2114,15 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2116 | F1H1H471A792 | E 470UF, 50V | 1 | |
| C2117 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2118 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2119 | EEEB1A221P | C 220PF, J, 10V | 1 | |
| C2120,21 | F1H1H5600007 | E 56UF, 50V | 2 | |
| C2124 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2126 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2128 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2130 | F1J0J106A021 | C 0.010UF, K, 16V | 1 | |
| C2131 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2133 | EEEB1H4R7R | C 4.7PF, J, 50V | 1 | |
| C2134 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2135,36 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2137 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C2138 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2143 | F1H1H181A792 | E 180UF, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C2146 | F1H1H181A792 | E 180UF, 50V | 1 | |
| C2147 | EEEB1C220R | C 22PF, J, 16V | 1 | |
| C2151 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C2153 | ECJ1VC1H330J | C 33PF, J, 50V | 1 | |
| C2154 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2155 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2157 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2159,60 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2161 | EEEB1C101UP | C 100PF, J, 16V | 1 | |
| C2162-67 | ECJ1VB1C105K | C 0.01UF, K, 16V | 6 | |
| C2170 | ECJ1VC1H330J | C 33PF, J, 50V | 1 | |
| C2171 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2173 | ECJ2FF1C475Z | C 0.047UF, Z, 16V | 1 | |
| C2174 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2175 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C2176 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2179 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C2180 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2183 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2184 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2185 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2186 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2187 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C2188 | F1H1H471A792 | E 470UF, 50V | 1 | |
| C2189 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2190,91 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C2192 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C2195 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2197,98 | ECJ1VB1C333K | C 0.033UF, K, 16V | 2 | |
| C2202 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C2203 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2204 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2213 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2216 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2244 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2245 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2246 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2251 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2263,64 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C2265-68 | ECJ1XC1H101J | C 100PF, J, 50V | 4 | |
| C2270,71 | F1H1H471A792 | E 470UF, 50V | 2 | |
| C2272 | ECJ2FF1C475Z | C 0.047UF, Z, 16V | 1 | |
| C2280 | ECJ2FB1A475K | C 4.7UF, K, 10V | 1 | |
| C2281 | F1H1H5610007 | E 560UF, 50V | 1 | |
| C2288,89 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C2301,02 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C2303-10 | F1J1E105A171 | E 1 UF 25V | 8 | |
| C2311-16 | ECJ1XB1H104K | C 10PF, J, 50V | 6 | |
| C2317-24 | ECJ1VB1C333K | C 0.033UF, K, 16V | 8 | |
| C2325,26 | F1J1H474A757 | C 0.47UF, 50V | 2 | |
| C2327-30 | ECJ1XB1H104K | C 10PF, J, 50V | 4 | |
| C2331,32 | F1J1H474A757 | C 0.47UF, 50V | 2 | |
| C2333-36 | ECJ1XB1H104K | C 10PF, J, 50V | 4 | |
| C2337-40 | F1H1H223A219 | E 0.22UF, 50V | 4 | |
| C2341-44 | ECJ1XB1H104K | C 10PF, J, 50V | 4 | |
| C2345-48 | F1H1H223A219 | E 0.22UF, 50V | 4 | |
| C2349 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2352 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2353-60 | ECJ1XB1H104K | C 10PF, J, 50V | 8 | |
| C2361,62 | EEEBG1E471P | E 470UF, 25V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|------------------|
| C2363,64 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2365 | EEEB1C221UP | C 220PF, J, 16V | 1 | |
| C2375-82 | F1H1H223A219 | E 0.022UF, 50V | 8 | |
| C2383-90 | ECJ1VB1H102K | C 1000UF, Z, 50V | 8 | |
| C2502,03 | ECJ2XB1H102K | C 1000PF, K, 50V | 2 | |
| C2510 | F1K0J1060020 | C 10UF, K, 6.3V | 1 | |
| C2511 | ECJ2XF1C105Z | C 1UF, Z, 16V | 1 | |
| C2512 | F1K0J1060020 | C 10UF, K, 6.3V | 1 | |
| C2515 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2521 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2522-27 | ECJ1VB1H102K | C 1000UF, Z, 50V | 6 | |
| C2601,02 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2801 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C2802,03 | FLJ1H474A757 | C 0.47UF, 50V | 2 | |
| C2804 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | TH-50PV700AZ/H/M |
| C2805-07 | FLJ1H474A757 | C 0.47UF, 50V | 3 | TH-50PV700AZ/H/M |
| C2813 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2814 | ECJ1VB1H472K | C 4700PF, K, 50V | 1 | |
| C2815 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2816 | EEEB1V220P | E 22UF, 35V | 1 | |
| C2817 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2819 | EEEB1E470P | C 47PF, J, 25V | 1 | |
| C3021 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C3023,24 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C3026 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3027,28 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C3029 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C3031 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3033 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C3040 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3043 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C3051-56 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 6 | |
| C3059,60 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C3062-64 | ECJ1VB1C105K | C 0.01UF, K, 16V | 3 | |
| C3070 | EEEB0J221UP | C 220PF, J, 6.3V | 1 | |
| C3075 | EEEB1C221UP | C 220PF, J, 16V | 1 | |
| C3078 | F1K0J226A008 | C 22UF, K, 6.3V | 1 | |
| C3081 | F2H0J1010009 | C 100UF, 6.3V | 1 | |
| C3100-02 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 3 | |
| C3103 | EEEB1C100R | C 10PF, J, 16V | 1 | |
| C3106 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | TH-50PV700AZ/H/M |
| C3115-17 | ECJ1XB1H104K | C 10PF, J, 50V | 3 | |
| C3118 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C3119 | EEEB1C100R | C 10PF, J, 16V | 1 | |
| C3120 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3201 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3202 | FLJ1H474A757 | C 0.47UF, 50V | 1 | TH-50PV700AZ/H/M |
| C3214 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3216 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3226-28 | ECJ1XB1H104K | C 10PF, J, 50V | 3 | |
| C3230 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3263 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3265-68 | ECJ1XB1H104K | C 10PF, J, 50V | 4 | |
| C3270 | EEEB0J102UP | C 1100PF, J, 6.3V | 1 | |
| C3271 | EEEB1C100R | C 10PF, J, 16V | 1 | |
| C3272 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3273 | F2G1H100A031 | E 10UF, 50V | 1 | |
| C3274-76 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 3 | |
| C3279 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C3280 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C3281 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C3285 | EEEB0J102UP | C 1100PF, J, 6.3V | 1 | TH-50PV700AZ/H/M |
| C3286 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | TH-50PV700AZ/H/M |
| C3291 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | TH-50PV700AZ/H/M |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|------------------|
| C3292 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | TH-50PV700AZ/H/M |
| C3293 | EEEB1C100R | C 10PF, J, 16V | 1 | TH-50PV700AZ/H/M |
| C3296 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | TH-50PV700AZ/H/M |
| C3298 | EEEB1V220P | E 22UF, 35V | 1 | TH-50PV700AZ/H/M |
| C3299 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | TH-50PV700AZ/H/M |
| C3300 | F2H0J1010009 | C 100UF, 6.3V | 1 | TH-50PV700AZ/H/M |
| C3305 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | TH-50PV700AZ/H/M |
| C3308 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | TH-50PV700AZ/H/M |
| C3701 | ECJ2XC1H561K | C 560PF, K, 50V | 1 | |
| C3703 | ECJ2XC1H561K | C 560PF, K, 50V | 1 | |
| C3711,12 | ECJ2VF1H333Z | C 0.033UF, Z, 50V | 2 | |
| C3715 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C3750 | FLJ1H102A721 | E 1000UF, 50V | 1 | |
| C3801,02 | FLG1A104A012 | C 0.01UF, K, 10V | 2 | |
| C3804 | FLG1A104A012 | C 0.01UF, K, 10V | 1 | |
| C3805 | EEEB0J330R | C 33PF, J, 6.3V | 1 | |
| C3806-12 | FLG1A104A012 | C 0.01UF, K, 10V | 7 | |
| C3813 | FLJ0J106A004 | C 0.010UF, K, 16V | 1 | |
| C3814 | FLG1A104A012 | C 0.01UF, K, 10V | 1 | |
| C3815-20 | ECJ0EB1C103K | C 0.010UF, K, 16V | 6 | |
| C3823,24 | FLG1A104A012 | C 0.01UF, K, 10V | 2 | |
| C4005,06 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4008 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4010,11 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4013-15 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4016 | FLJ1C475A170 | C 4.7UF, K, 16V | 1 | |
| C4018 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4019 | FLJ1H474A757 | C 0.47UF, 50V | 1 | |
| C4020,21 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4022 | FLJ1H474A757 | C 0.47UF, 50V | 1 | |
| C4023-25 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4027,28 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4030 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4032-34 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4035,36 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4038 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4039 | FLG1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4040 | FLG1H150A565 | E 15UF, 50V | 1 | |
| C4045,46 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4047 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4049 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4050 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4051-53 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4054 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C4500-03 | FLG1C104A081 | C 0.10UF, K, 16V | 4 | |
| C4506,07 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4508,09 | EEEB0J330R | C 33PF, J, 6.3V | 2 | |
| C4510,11 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4513-15 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4517 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4520 | FLJ1A106A043 | C 0.010UF, K, 10V | 1 | |
| C4521 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4522 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C4523 | FLJ1H474A757 | C 0.47UF, 50V | 1 | |
| C4524 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C4527 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4528 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4531 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4533 | FLG1H680A565 | E 68UF, 50V | 1 | |
| C4534,35 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C4538 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4539 | FLJ1A106A043 | C 0.010UF, K, 10V | 1 | |
| C4541 | F1H1H471A219 | E 470UF, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C4543-45 | F1G1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4546 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C4547 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4548,49 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C4550 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4551,52 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C4553 | F1G1H1020008 | E 1000UF, 50V | 1 | |
| C4555,56 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C4557 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4559,60 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4562 | F1H1H822A219 | E 8200UF, 50V | 1 | |
| C4563 | ECJ1VB1C823K | C 0.082UF, K, 16V | 1 | |
| C4564,65 | F1G1E1030005 | C 0.01UF, Z, 25V | 2 | |
| C4566 | ECJ1XB1C393K | C 0.039UF, K, 16V | 1 | |
| C4567 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C4568 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4569 | F1J1C684A097 | C 0.68UF, Z, 16V | 1 | |
| C4570 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4572,73 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4574 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4575 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4576 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4577,78 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4580 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4581 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4582,83 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4584,85 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4586 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4587 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4588 | ECJ1VB1C823K | C 0.082UF, K, 16V | 1 | |
| C4589 | F1G1H150A565 | E 15UF, 50V | 1 | |
| C4590 | ECJ0EC1H180J | C 180PF, K, 50V | 1 | |
| C4591,92 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4593 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4595 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4596 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4598 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4600,01 | F1G1E1030005 | C 0.01UF, Z, 25V | 2 | |
| C4602 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4604 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C4605 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4607 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4609 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4611 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4612 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4613 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4614 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4615 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4616,17 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4618 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4619 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4620 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4621-23 | F1G1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4624,25 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C4626-28 | F1G1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4629 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C4807 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C5501 | F2A1C471A537 | E 470UF, 16V | 1 | |
| C5502 | ECJ2VB1C104K | C 0.1UF, K, 16V | 1 | |
| C5503 | F2A1C471A537 | E 470UF, 16V | 1 | |
| C5504 | ECJ2VB1C104K | C 0.1UF, K, 16V | 1 | |
| C5521,22 | ECJ2VB1C104K | C 0.1UF, K, 16V | 2 | |
| C5551 | F2A1H331A257 | E 330UF, 50V | 1 | |
| C5552 | ECJ2VB1E104K | C 0.1UF, K, 25V | 1 | |
| C5595 | ECA1HM220 | E 22UF, 50V | 1 | |
| C5600 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5601 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C5602 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C5603,04 | F1G1E1030005 | C 0.01UF, Z, 25V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C5605 | F1J1A475A039 | C 4.7UF, K, 10V | 1 | |
| C5606 | F1H1H471A219 | E 470UF, 50V | 1 | |
| C5607 | F1G1H221A459 | E 220UF, 50V | 1 | |
| C5608 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C5609,10 | EEHBC1C470P | C 47PF, J, 16V | 2 | |
| C5615 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C5616 | ECJ0EB1A473K | C 0.047UF, K, 10V | 1 | |
| C5617 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5618,19 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C5620 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C5621 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5622 | F1J1A475A039 | C 4.7UF, K, 10V | 1 | |
| C5623 | ECJ0EB1H471K | C 470PF, K, 50V | 1 | |
| C5624 | F1G1H221A459 | E 220UF, 50V | 1 | |
| C5625 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5626,27 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C5628,29 | ECGRL0G680ER | C 68PF, J, 4V | 2 | |
| C5630,31 | EEHBC1C470P | C 47PF, J, 16V | 2 | |
| C5632 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5636-41 | F1G1C104A081 | C 0.10UF, K, 16V | 6 | |
| C5643 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C5644 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5645 | F1H1A225A051 | E 22UF, 50V | 1 | |
| C5661 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5662 | ECJ0EB1A473K | C 0.047UF, K, 10V | 1 | |
| C5663 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5670 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5673,74 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C5676 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C5690,91 | F2G0J470A019 | E 47UF 6.3V | 2 | |
| C5692,93 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C5694,95 | F2G0J470A019 | E 47UF 6.3V | 2 | |
| C5710-16 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 7 | |
| C5730 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5731 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C6001 | F1L2J562A022 | C 5600UF, K,6.3V | 1 | |
| C6011-16 | F2A2T201A002 | E 200UF, | 6 | |
| C6023 | F1L2J562A022 | C 5600UF, K,6.3V | 1 | |
| C6031 | F0C2E405A176 | E 0.040UF, 250V | 1 | |
| C6037 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6111,12 | F2A2D221A022 | E 220UF, 200V | 2 | |
| C6132 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6134,35 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6151 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6152-54 | F1L1E4750004 | C 4.7UF, 25V | 3 | |
| C6193-95 | F1L1E4750004 | C 4.7UF, 25V | 3 | |
| C6197 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6201-04 | F0C2E405A176 | E 0.040UF, 250V | 4 | |
| C6211,12 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6213 | F2A1E102A220 | E 1000UF, 25V | 1 | |
| C6216 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6221 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6223 | F2A2E470A022 | E 47UF, 250V | 1 | |
| C6241 | F2A1A101A439 | E 100UF, 10V | 1 | |
| C6242 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6243 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6247,48 | ECJ2XB1H104K | C 0.1UF, K, 50V | 2 | |
| C6251 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6252 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6261,62 | F2A2A471A072 | E 470UF, 100V | 2 | |
| C6272,73 | F2A1E221A487 | E 220UF, 25V | 2 | |
| C6276 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6281 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6287,88 | ECJ2XB1H104K | C 0.1UF, K, 50V | 2 | |
| C6402-04 | F1L2J222A022 | C 2200UF, K,6.3V | 3 | |
| C6411-16 | F2A2T201A002 | E 200UF, | 6 | |
| C6421-24 | F1L2J222A022 | C 2200UF, K,6.3V | 4 | |
| C6431 | F0C2E405A176 | E 0.040UF, 250V | 1 | |
| C6471 | F1L2J1020001 | C 1000UF, K,6.3V | 1 | |
| C6472 | ECJ2XC1H101J | C 100PF, J, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C6480 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6481,82 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6485 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6491 | F1L2J1020001 | C 1000UF, K,6.3V | 1 | |
| C6499 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6500 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6502 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6504,05 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6521 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6522 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6524,25 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6527 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6531-34 | F0C2E405A176 | E 0.040UF, 250V | 4 | |
| C6561 | F2A1A101A439 | E 100UF, 10V | 1 | |
| C6562 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6563 | F2A1A101A439 | E 100UF, 10V | 1 | |
| C6564 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6565,66 | ECJ2VB1H103K | C 0.01UF, K, 50V | 2 | |
| C6571,72 | F1L2J1020001 | C 1000UF, K,6.3V | 2 | |
| C6579 | F2A2T201A002 | E 200UF, | 1 | |
| C6581 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6582 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6592 | F2A1E221A487 | E 220UF, 25V | 1 | |
| C6593 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6594 | F2A1E221A487 | E 220UF, 25V | 1 | |
| C6603,04 | F1K2J102A014 | C 1000UF, K,6.3V | 2 | |
| C6605,06 | F1L2J472A022 | C 4700UF, K,6.3V | 2 | |
| C6620,21 | ECKD3A392KBP | C 3900PF, K, 1KV | 2 | |
| C6641 | ECQE2105RKB | P 1UF, 250V | 1 | |
| C6661,62 | F1K2J102A014 | C 1000UF, K,6.3V | 2 | |
| C6671 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6692 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6694 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6695 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6702-06 | ECJ2XB1H104K | C 0.1UF, K, 50V | 5 | |
| C6708 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6721 | F2A1H101A493 | E 100UF, 50V | 1 | |
| C6722 | ECJ2XC1H101J | C 100PF, J, 50V | 1 | |
| C6723-25 | F1L1E4750004 | C 4.7UF, 25V | 3 | |
| C6726,27 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C6752 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6753 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6755,56 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6771 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6772,73 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6775 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6776,77 | ECJ2XB1H104K | C 0.1UF, K, 50V | 2 | |
| C6791 | F2A1E221A487 | E 220UF, 25V | 1 | |
| C6795,96 | F2A1E221A487 | E 220UF, 25V | 2 | |
| C6802 | ECQE6223KF | P 0.022UF, K,400V | 1 | |
| C6803 | ECKD3D221KBP | C 220PF, K, 2KV | 1 | |
| C6804 | F2A2E100A022 | E 10UF, 250V | 1 | |
| C6805 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6806 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6807 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C6811 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6812 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6813 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6814 | F2A1E221A487 | E 220UF, 25V | 1 | |
| C6815 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6822 | F2A2G470A018 | E 470UF, 400V | 1 | |
| C6823 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6832 | ECJ2XB1H392K | C 3900PF, K, 50V | 1 | |
| C6841 | ECA2DHG101 | E 100UF, 200V | 1 | |
| C6842 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6845 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6861 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6862 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6863 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6871 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C6872 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6873 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C6884 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6901 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6902 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6904 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6906 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6908 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6910 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6912 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6923,24 | F1L2E1040002 | E 1000UF, 25V | 2 | |
| C6929,30 | F1L2E1040002 | E 1000UF, 25V | 2 | |
| C6931 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6932,33 | F1L2E1040002 | E 1000UF, 25V | 2 | |
| C6936,37 | ECJ2VB1H221K | C 220PF, K, 50V | 2 | |
| C6951 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6952 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6955 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6957,58 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C6961 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6963 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6974,75 | F1L2E1040002 | E 1000UF, 25V | 2 | |
| C6981 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6982-85 | F1L2E1040002 | E 1000UF, 25V | 4 | |
| C6986,87 | ECJ2VB1H221K | C 220PF, K, 50V | 2 | |
| C7103 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7105 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7106-08 | ECJ1XC1H101J | C 100PF, J, 50V | 3 | |
| C7110,11 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7114,15 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7117-22 | F1K2A474A006 | C 0.47UF, 6.3V | 6 | |
| C7124,25 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7127,28 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7130,31 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7133 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7134,35 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7137,38 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7140 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7141 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C7201 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C7203 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7206 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7209,10 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7212,13 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7215-17 | ECJ1XC1H101J | C 100PF, J, 50V | 3 | |
| C7219,20 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7222-25 | F1K2A474A006 | C 0.47UF, 6.3V | 4 | |
| C7227,28 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7230 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C7231 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7301 | F1K2A474A006 | C 0.47UF, 6.3V | 1 | |
| C7305,06 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7308,09 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7311 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7312,13 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7315,16 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7318 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7319,20 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7322,23 | F1H1C105A072 | C 1UF, K, 16V | 2 | |
| C7325 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7326 | F1H1C105A072 | C 1UF, K, 16V | 1 | |
| C7328 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7330 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7332 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7334 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7724,25 | ECJ1VC1H330J | C 33PF, J, 50V | 2 | |
| C7729 | ECJ1VC1H330J | C 33PF, J, 50V | 1 | |
| C7731 | ECJ1VC1H330J | C 33PF, J, 50V | 1 | |
| C7732,33 | ECJ1VF1C104Z | C 0.1UF, Z, 16V | 2 | |
| C7736 | ECJ1VF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C7737 | F1J0J106A020 | C 0.010UF, K, 16V | 1 | |
| C7738 | EEHHOG101R | C 100PF, J, 4V | 1 | |
| C7742 | F1J0J106A020 | C 0.010UF, K, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C8001 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C8002-05 | F1H0J1050012 | C 1UF, K, 16V | 4 | |
| C8006-08 | F1G1C104A081 | C 0.10UF, K, 16V | 3 | |
| C8009,10 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C8011-14 | F1G1C104A081 | C 0.10UF, K, 16V | 4 | |
| C8015,16 | F1H0J1050012 | C 1UF, K, 16V | 2 | |
| C8017 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C8018-21 | F1G1C104A081 | C 0.10UF, K, 16V | 4 | |
| C8022 | F1H0J1050012 | C 1UF, K, 16V | 1 | |
| C8023,24 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C8025-29 | F1G1C104A081 | C 0.10UF, K, 16V | 5 | |
| C8030,31 | F1H0J1050012 | C 1UF, K, 16V | 2 | |
| C8032 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C8033,34 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C8035,36 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C8037-41 | F1G1C104A081 | C 0.10UF, K, 16V | 5 | |
| C8042 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8043-51 | F1G1C104A081 | C 0.10UF, K, 16V | 9 | |
| C8052 | F1H0J1050012 | C 1UF, K, 16V | 1 | |
| C8053 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C8056,57 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C8058 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C8067 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C8068 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C8069 | F1G1H820A565 | E 82UF, 50V | 1 | |
| C8070-74 | F1G1C104A081 | C 0.10UF, K, 16V | 5 | |
| C8075 | F1J0G2260001 | C 0.001UF, 6.3V | 1 | |
| C8076-80 | F1G1C104A081 | C 0.10UF, K, 16V | 5 | |
| C8551,52 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C8555 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C8601 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C8621,22 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C8731 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C8802,03 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C9028,29 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C9033,34 | F1G1C104A083 | C 0.10UF, K, 16V | 2 | |
| C9035,36 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C9037 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C9039 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C9040 | F1G1C104A083 | C 0.10UF, K, 16V | 1 | |
| C9044 | ECJ2YB0J475K | C 3.3UF, Z, 4.7V | 1 | |
| C9045-53 | F1G1C104A083 | C 0.10UF, K, 16V | 9 | |
| C9055-57 | F1G1C104A083 | C 0.10UF, K, 16V | 3 | |
| C9058 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C9061 | F1G1C104A077 | C 0.10UF, K, 16V | 1 | |
| C9062 | ECJ2YB0J475K | C 3.3UF, Z, 4.7V | 1 | |
| C9063 | F1G1C104A083 | C 0.10UF, K, 16V | 1 | |
| C9468 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C9469 | F1G1C104A083 | C 0.10UF, K, 16V | 1 | |
| C9500 | F1G1C104A077 | C 0.10UF, K, 16V | 1 | |
| C9505 | F1G1C104A077 | C 0.10UF, K, 16V | 1 | |
| C9508 | F1G1C104A077 | C 0.10UF, K, 16V | 1 | |
| C9509,10 | F1G1H120A565 | E 12UF, 50V | 2 | |
| C9511 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C9516-25 | F1G1C104A077 | C 0.10UF, K, 16V | 10 | |
| C9526 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C9527,28 | F1G1C104A077 | C 0.10UF, K, 16V | 2 | |
| C9531 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C9559-64 | F1G1C104A077 | C 0.10UF, K, 16V | 6 | |
| C9823 | ECJ3YB1E106M | C 10 UF, K, 25V | 1 | |
| C9825 | F1G1H101A565 | C 100PF, K, 50V | 1 | |
| C9832 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C9837 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C9838 | F1G1C104A083 | C 0.10UF, K, 16V | 1 | |
| C9840 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C9841-43 | F1G1C104A083 | C 0.10UF, K, 16V | 3 | |
| C9844 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C9845,46 | F1G1C104A083 | C 0.10UF, K, 16V | 2 | |
| C9858 | ECJ3YB1E106M | C 10 UF, K, 25V | 1 | |
| C9859 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C9860 | ECJ2YB0J475K | C 3.3UF, Z, 4.7V | 1 | |
| C9861,62 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C9863 | ECJ2YB0J475K | C 3.3UF, Z, 4.7V | 1 | |
| C9864 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C9865,66 | ECGRL0G680ER | C 68PF, J, 4V | 2 | |
| C9867-72 | ECJ3YB1E106M | C 10 UF, K, 25V | 6 | |
| C9873 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C9874 | F1G1H680A565 | E 68UF, 50V | 1 | |
| C9877 | F1G1H680A565 | E 68UF, 50V | 1 | |
| C9878 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C9879,80 | F1G1E822A086 | C 8200UF, Z, 25V | 2 | |
| C9881 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C9882 | F1G1E822A086 | C 8200UF, Z, 25V | 1 | |
| C9883 | F1G1H101A565 | C 100PF, K, 50V | 1 | |
| C9884,85 | F1G1H1020008 | E 1000UF, 50V | 2 | |
| C9886,87 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C9888 | F1G1H361A565 | E 360UF, 50V | 1 | |
| C9900-25 | F1G1C104A077 | C 0.10UF, K, 16V | 26 | |
| C9927-51 | F1G1C104A077 | C 0.10UF, K, 16V | 25 | |
| C9955-59 | F1G1C104A077 | C 0.10UF, K, 16V | 5 | |
| C9960-64 | F1J1A106A043 | C 0.010UF, K, 10V | 5 | |
| C9966,67 | F1G1C104A077 | C 0.10UF, K, 16V | 2 | |
| CB1-11 | K1MN68BA0052 | 68P CONNECTOR | 11 | |
| CF6281 | D4DA91000001 | THERMISTOR | 1 | |
| D5 | K1KB31BA0064 | 31P CONNECTOR | 1 | |
| D6 | K1KA21A00011 | 21P CONNECTOR | 1 | |
| D9 | K1KA07A00292 | 7P CONNECTOR | 1 | |
| D20 | K1KY30BA0090 | 30P CONNECTOR | 1 | |
| D25 | K1KA13B00069 | 13P CONNECTOR | 1 | |
| D31 | K1MN55BA0257 | 55P CONNECTOR | 1 | |
| D32 | K1MN68BA0251 | 68P CONNECTOR | 1 | |
| D1107 | MA704A | DIODE | 1 | |
| D1112 | MA2J72800L | DIODE | 1 | |
| D2025 | K7AAAY000003 | PHOTO LINK | 1 | |
| D2026 | MA2J11100L | DIODE | 1 | |
| D2028,29 | MA2J11100L | DIODE | 2 | |
| D2031-34 | MA2J11100L | DIODE | 4 | |
| D2119 | B0BC01100001 | ZENER DIODE | 1 | |
| D2189 | MA2J11100L | DIODE | 1 | |
| D2301,02 | MA2J11100L | DIODE | 2 | |
| D2303 | MA3056H | ZENER DIODE | 1 | |
| D2304 | MA2J11100L | DIODE | 1 | |
| D2510,11 | MAZ80560ML | ZENER DIODE | 2 | |
| D2512 | MA8043LTX | ZENER DIODE | 1 | |
| D2520 | LNJ107W5PRW | LED | 1 | |
| D2524 | MAZ80560ML | ZENER DIODE | 1 | |
| D2632,33 | MA2J11100L | DIODE | 2 | |
| D2634 | MA3X78900L | ZENER DIODE | 1 | |
| D2635 | MA2J11100L | DIODE | 1 | |
| D2636 | MA3047H | ZENER DIODE | 1 | |
| D2637 | MA2J11100L | DIODE | 1 | |
| D2638 | B0BC03900015 | ZENER DIODE | 1 | |
| D3003 | MA8140M | ZENER DIODE | 1 | |
| D3005,06 | MA8140M | ZENER DIODE | 2 | |
| D3035-43 | MA8140M | ZENER DIODE | 9 | |
| D3044 | B0BC01100001 | ZENER DIODE | 1 | |
| D3045-49 | MA8140M | ZENER DIODE | 5 | |
| D3100 | MA8140M | ZENER DIODE | 1 | |
| D3102 | MA2J11100L | DIODE | 1 | |
| D3334-38 | MA2J11100L | DIODE | 5 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| D3702 | MA8140M | ZENER DIODE | 1 | |
| D3801-11 | EZAEG2A50AX | DIODE | 11 | |
| D3812 | MA3056MTX | ZENER DIODE | 1 | |
| D3813,14 | BOHCMM000014 | DIODE | 2 | |
| D4500-12 | EZAEG2A50AX | DIODE | 13 | |
| D4513 | MA3056MTX | ZENER DIODE | 1 | |
| D4514 | EZAEG2A50AX | DIODE | 1 | |
| D4515 | MA3056MTX | ZENER DIODE | 1 | |
| D4516-23 | EZAEG2A50AX | DIODE | 8 | |
| D4524-27 | BOHCMM000014 | DIODE | 4 | |
| D4528 | EZAEG2A50AX | DIODE | 1 | |
| D4532 | BOHCMM000014 | DIODE | 1 | |
| D5517 | MTZJ10B | ZENER DIODE | 1 | |
| D5518 | MTZJ12B | ZENER DIODE | 1 | |
| D5519 | MTZJ6R8B | ZENER DIODE | 1 | |
| D5521 | MA2J11100L | DIODE | 1 | |
| D5522 | MA3X152A0L | DIODE | 1 | |
| D5526 | MA3X152A0L | DIODE | 1 | |
| D5528 | MA8120M | ZENER DIODE | 1 | |
| D5529 | MAZ80680LL | ZENER DIODE | 1 | |
| D5530 | MA2J11100L | DIODE | 1 | |
| D5601,02 | MA22D3900L | DIODE | 2 | |
| D5603,04 | B0JCDD000002 | DIODE | 2 | |
| D5605 | MA22D3900L | DIODE | 1 | |
| D5606 | B0JCDD000002 | DIODE | 1 | |
| D5607,08 | MA8024LTX | ZENER DIODE | 2 | |
| D5609 | MA8056LTX | ZENER DIODE | 1 | |
| D5670 | MA2J11100L | DIODE | 1 | |
| D5671 | BOHCMM000014 | DIODE | 1 | |
| D5673 | BOHCMM000014 | DIODE | 1 | |
| D5690,91 | B0BC6R600005 | ZENER DIODE | 2 | |
| D6001 | BOHBSN000008 | DIODE | 1 | |
| D6021 | MA3DF30000LZ | ZENER DIODE | 1 | |
| D6024,25 | B0ECKP000047 | DIODE | 2 | |
| D6032 | MA2J11100L | DIODE | 1 | |
| D6061,62 | BOHBSN000008 | DIODE | 2 | |
| D6071,72 | BOHBSN000008 | DIODE | 2 | |
| D6081,82 | MA3DF30000LZ | ZENER DIODE | 2 | |
| D6091 | BOHBSN000008 | DIODE | 1 | |
| D6092 | B0ECKP000047 | DIODE | 1 | |
| D6101-04 | B0JCME000037 | DIODE | 4 | |
| D6131,32 | B0ECKP000047 | DIODE | 2 | |
| D6151-53 | B0ECKP000047 | DIODE | 3 | |
| D6191 | B0ECKP000047 | DIODE | 1 | |
| D6193 | B0ECKP000047 | DIODE | 1 | |
| D6211 | B0JCME000037 | DIODE | 1 | |
| D6221 | BOHDRP000003 | DIODE | 1 | |
| D6222,23 | MA2J11100L | DIODE | 2 | |
| D6225 | B0ECKP000047 | DIODE | 1 | |
| D6253 | LNJ301MPUJA | LED | 1 | |
| D6255 | MA2J11100L | DIODE | 1 | |
| D6273 | MA2J11100L | DIODE | 1 | |
| D6275 | MA8068M | ZENER DIODE | 1 | |
| D6277,78 | MA3X152A0L | DIODE | 2 | |
| D6280 | MAZ80510LL | ZENER DIODE | 1 | |
| D6281,82 | B0JCME000037 | DIODE | 2 | |
| D6401,02 | BOHBSN000008 | DIODE | 2 | |
| D6422 | MA3DF40000LZ | ZENER DIODE | 1 | |
| D6442 | B0ECKP000047 | DIODE | 1 | |
| D6452 | B0ECKP000047 | DIODE | 1 | |
| D6462,63 | BOHBSN000008 | DIODE | 2 | |
| D6466 | MA2J11100L | DIODE | 1 | |
| D6471 | BOHBSN000008 | DIODE | 1 | |
| D6472 | B0ECKP000047 | DIODE | 1 | |
| D6477 | MA2J11100L | DIODE | 1 | |
| D6478 | BOHCKS000002 | DIODE | 1 | |
| D6480 | MA2J11100L | DIODE | 1 | |
| D6482,83 | MA3DF30000LZ | ZENER DIODE | 2 | |
| D6491 | MA3DF40000LZ | ZENER DIODE | 1 | |
| D6497 | B0ECKP000047 | DIODE | 1 | |
| D6499 | MA2J11100L | DIODE | 1 | |
| D6500 | MAZ80510LL | ZENER DIODE | 1 | |
| D6501 | B0ECKP000047 | DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| D6503 | B0ECKP000047 | DIODE | 1 | |
| D6521-23 | B0ECKP000047 | DIODE | 3 | |
| D6561,62 | B0ECKP000047 | DIODE | 2 | |
| D6571 | B0JCME000037 | DIODE | 1 | |
| D6573 | B0JCME000037 | DIODE | 1 | |
| D6583 | LNJ301MPUJA | LED | 1 | |
| D6584 | MAZ80510LL | ZENER DIODE | 1 | |
| D6585 | MA2J11100L | DIODE | 1 | |
| D6601,02 | MA8240MTX | ZENER DIODE | 2 | |
| D6604 | MA2J11100L | DIODE | 1 | |
| D6605 | MAZ80510LL | ZENER DIODE | 1 | |
| D6606 | BOHCMM000014 | DIODE | 1 | |
| D6607 | MA2J11100L | DIODE | 1 | |
| D6619 | BOHCKS000002 | DIODE | 1 | |
| D6621-23 | BOHDSM000005 | DIODE | 3 | |
| D6625 | BOHDSM000005 | DIODE | 1 | |
| D6631 | B0JCME000037 | DIODE | 1 | |
| D6633 | B0JCME000037 | DIODE | 1 | |
| D6641,42 | BOHCKS000002 | DIODE | 2 | |
| D6643 | B0JCME000037 | DIODE | 1 | |
| D6644 | BOHCKS000002 | DIODE | 1 | |
| D6661 | MA2J11100L | DIODE | 1 | |
| D6662-64 | MA8330M | ZENER DIODE | 3 | |
| D6665 | MAZ80510LL | ZENER DIODE | 1 | |
| D6666,67 | MA2J11100L | DIODE | 2 | |
| D6690 | MA2J11100L | DIODE | 1 | |
| D6691,92 | MA8200M | ZENER DIODE | 2 | |
| D6701 | MA8056H | ZENER DIODE | 1 | |
| D6721 | BOHCKS000002 | DIODE | 1 | |
| D6722 | MA2J11100L | DIODE | 1 | |
| D6725 | B0ECKP000047 | DIODE | 1 | |
| D6726-33 | MA8056H | ZENER DIODE | 8 | |
| D6742,43 | MA2J11100L | DIODE | 2 | |
| D6761 | B0JCME000037 | DIODE | 1 | |
| D6764 | BOHCKS000002 | DIODE | 1 | |
| D6765-67 | B0ECKP000047 | DIODE | 3 | |
| D6773 | BOHCKS000002 | DIODE | 1 | |
| D6791 | MA8200M | ZENER DIODE | 1 | |
| D6802 | B0BC01000044 | ZENER DIODE | 1 | |
| D6803 | BOHCKS000002 | DIODE | 1 | |
| D6804 | B0EHP000003 | DIODE | 1 | |
| D6805 | MA2J11100L | DIODE | 1 | |
| D6806 | BOHCKS000002 | DIODE | 1 | |
| D6807-10 | BOHCMM000014 | DIODE | 4 | |
| D6816 | MAZ80510LL | ZENER DIODE | 1 | |
| D6817 | MAZ80680HL | ZENER DIODE | 1 | |
| D6820-23 | MA2J11100L | DIODE | 4 | |
| D6824,25 | MA8330M | ZENER DIODE | 2 | |
| D6826 | MA2J11100L | DIODE | 1 | |
| D6827,28 | MA8330M | ZENER DIODE | 2 | |
| D6830 | MA8056H | ZENER DIODE | 1 | |
| D6836 | MAZ81500ML | ZENER DIODE | 1 | |
| D6837 | MA2J11100L | DIODE | 1 | |
| D6838 | B0BC027A0234 | ZENER DIODE | 1 | |
| D6839 | B0ECKP000047 | DIODE | 1 | |
| D6841 | BOHCKS000002 | DIODE | 1 | |
| D6842,43 | MA2J11100L | DIODE | 2 | |
| D6859 | B0ECKP000047 | DIODE | 1 | |
| D6860 | BOHCKS000002 | DIODE | 1 | |
| D6861 | MAZ80510LL | ZENER DIODE | 1 | |
| D6862 | MA2J11100L | DIODE | 1 | |
| D6871 | MAZ80510LL | ZENER DIODE | 1 | |
| D6872 | MA2J11100L | DIODE | 1 | |
| D6883 | MA2J11100L | DIODE | 1 | |
| D6886,87 | B0ECKP000047 | DIODE | 2 | |
| D6901,02 | MA8056H | ZENER DIODE | 2 | |
| D6903,04 | BOHCMM000013 | DIODE | 2 | |
| D6907 | BOHCMM000013 | DIODE | 1 | |
| D6951,52 | MA8056H | ZENER DIODE | 2 | |
| D6953,54 | BOHCMM000013 | DIODE | 2 | |
| D6957 | BOHCMM000013 | DIODE | 1 | |
| D7101-10 | BOHCMM000014 | DIODE | 10 | |
| D7201-06 | BOHCMM000014 | DIODE | 6 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| D7301-06 | B0HCMM000014 | DIODE | 6 | |
| D7700 | B3AEB0000107 | LED | 1 | |
| D9017-19 | MA3033 | ZENER DIODE | 3 | |
| D9020 | B0JCCE000008 | DIODE | 1 | |
| D9110 | B0JCGD000002 | DIODE | 1 | |
| D9802 | B0JCCE000008 | DIODE | 1 | |
| D9804 | B0JCCE000008 | DIODE | 1 | |
| D9807,08 | B0JCCE000008 | DIODE | 2 | |
| D9811 | B0JCCE000008 | DIODE | 1 | |
| D9812 | MA22D3900L | DIODE | 1 | |
| D9813-15 | B0JCGD000002 | DIODE | 3 | |
| D9816,17 | MA22D3900L | DIODE | 2 | |
| | | | | |
| DG1 | K1KA12B00151 | 12P CONNECTOR | 1 | |
| DG2 | K1KB23A00003 | 23P CONNECTOR | 1 | |
| DG5 | K1KB31AA0140 | 31P CONNECTOR | 1 | |
| DG6 | K1KB80AA0218 | 80P CONNECTOR | 1 | |
| DG7 | K1KA04AA0104 | 4P CONNECTOR | 1 | |
| DG11 | K1KY30A00017 | 30P CONNECTOR | 1 | |
| DG31 | K1KA20AA0009 | 20P CONNECTOR | 1 | |
| DG32 | K1KA07AA0266 | 7P CONNECTOR | 1 | |
| DG33 | K1KA11AA0715 | 11P CONNECTOR | 1 | |
| DG34 | K1KA30AA0009 | 30P CONNECTOR | 1 | |
| DG52 | K1KA14A00248 | 14P CONNECTOR | 1 | |
| | | | | |
| FL2001,02 | J0HABB000004 | LC FILTER | 2 | |
| FL2003-06 | J0HABB000003 | LC FILTER | 4 | |
| FL3001,02 | J0HABB000003 | LC FILTER | 2 | |
| FL3003-05 | J0HABB000004 | LC FILTER | 3 | |
| FL3006,07 | J0JAD0000028 | CHIP INDUCTOR | 2 | |
| FL3008 | J0HABB000003 | LC FILTER | 1 | |
| FL3710-12 | J0MAB0000199 | LC FILTER | 3 | |
| FL4800-02 | J0JAD0000028 | CHIP INDUCTOR | 3 | |
| FL5730-34 | J0HABH000013 | LC FILTER | 5 | |
| FL7101 | J0HABH000013 | LC FILTER | 1 | |
| FL7201,02 | J0HABH000013 | LC FILTER | 2 | |
| FL7301 | J0HABH000013 | LC FILTER | 1 | |
| FL8801,02 | J0HAAA000013 | LC FILTER | 2 | |
| FL9300,01 | F1J1E104A148 | C 0.10UF, Z, 25V | 2 | |
| FL9504 | F1J1E104A148 | C 0.10UF, Z, 25V | 1 | |
| FL9803 | F1J1E104A148 | C 0.10UF, Z, 25V | 1 | |
| FL9805,06 | F1J1E104A148 | C 0.10UF, Z, 25V | 2 | |
| FL9900-04 | F1J1E104A148 | C 0.10UF, Z, 25V | 5 | |
| | | | | |
| G51 | K1KY20A00015 | 20P CONNECTOR | 1 | |
| | | | | |
| GH10 | K1FA121E0001 | 121P CONNECTOR | 1 | |
| GH11 | K1KY30A00017 | 30P CONNECTOR | 1 | |
| | | | | |
| GS52 | K1KA14B00129 | 14P CONNECTOR | 1 | |
| | | | | |
| H2 | K1KA23A00003 | 23P CONNECTOR | 1 | |
| H3,H4 | K1KA23A00005 | 23P CONNECTOR | 2 | |
| H6 | K1KB80AA0218 | 80P CONNECTOR | 1 | |
| H11 | K1KA05AA0190 | 5P CONNECTOR | 1 | |
| H12 | K1KA04AA0190 | 4P CONNECTOR | 1 | |
| H15 | K1KA04AA0714 | 4P CONNECTOR | 1 | |
| H51 | K1KA20AA0178 | 20P CONNECTOR | 1 | |
| | | | | |
| IC1100 | MNZSFD7GP42 | IC | 1 | |
| IC1101 | TVRP465-1 | IC | 1 | |
| IC2000 | C0JBAZ002261 | IC | 1 | |
| IC2008 | C0CBCBE00001 | IC | 1 | |
| IC2010 | C0CBCBC00190 | IC | 1 | |
| IC2011 | C0ABBB000230 | IC | 1 | |
| IC2012 | C1BB0000947 | IC | 1 | |
| IC2013 | C0DBGYY00281 | IC | 1 | |
| IC2105 | AN15862A-VT | IC | 1 | |
| IC2106 | C1AB00002746 | IC | 1 | |
| IC2107 | C0DBFFD00003 | IC | 1 | |
| IC2301,02 | C1AB00002730 | IC | 2 | |
| IC2303 | C0DBGYY00202 | IC | 1 | |
| IC2601 | C0JBAU000034 | IC | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|--------------|
| IC2610 | C0DBAJB00004 | IC | 1 | |
| IC3001 | AN15876A-VT | IC | 1 | |
| IC3801 | C1AB00002641 | IC | 1 | |
| IC3802 | TVRP315 | IC | 1 | |
| IC3803 | C0JBAU000034 | IC | 1 | |
| IC4001 | C1AB00002687 | IC | 1 | |
| IC4002 | C0CBCAC00275 | IC | 1 | |
| IC4004 | C0JBAZ002261 | IC | 1 | |
| IC4005 | C0CBCBC00190 | IC | 1 | |
| IC4500 | TVRP314 | IC | 1 | |
| IC4501 | TVRP313 | IC | 1 | |
| IC4503 | C1AB00002641 | IC | 1 | |
| IC4504 | C3EBEY000009 | IC | 1 | |
| IC4506 | C0DBGGF00001 | IC | 1 | |
| IC4507 | C0CBCBC00190 | IC | 1 | |
| IC4508,09 | C0CBCAD00082 | IC | 2 | |
| IC4510 | C1AB00002753 | IC | 1 | |
| IC4513,14 | C0JBAU000034 | IC | 2 | |
| IC4515 | NJM2903V | IC | 1 | |
| IC4800 | C1ZBZ0003577 | IC | 1 | |
| IC5550 | EHMDD9851 | LINEAR IC | 1 | |
| IC5600 | C0DBAYY00273 | IC | 1 | |
| IC5601 | C0DBAYY00274 | IC | 1 | |
| IC5660 | C0EBM0000026 | IC | 1 | |
| IC5670 | C0CBCBC00190 | IC | 1 | |
| IC5671 | C0EBF0000376 | IC | 1 | |
| IC6131 | C0ZBZ0000895 | IC | 1 | |
| IC6151 | C0ZBZ0001324 | IC | 1 | |
| IC6191 | C0ZBZ0000895 | IC | 1 | |
| IC6211 | C0ZBZ0001325 | IC | 1 | |
| IC6221 | C0DBEMC00043 | IC | 1 | |
| IC6241 | C0JBAZ000005 | IC | 1 | |
| IC6251 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6281 | C0DBEMC00043 | IC | 1 | |
| IC6471 | C0DBEKA00003 | IC | 1 | |
| IC6472 | C0JBAA000377 | IC | 1 | |
| IC6481 | C0ZBZ0000895 | IC | 1 | |
| IC6500 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6501 | C0ZBZ0000895 | IC | 1 | |
| IC6521 | C0ZBZ0001324 | IC | 1 | |
| IC6561,62 | C0JBAZ000005 | IC | 2 | |
| IC6581 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6671 | C0ZBZ0001325 | IC | 1 | |
| IC6721,22 | C0JBAZ000994 | IC | 2 | |
| IC6724,25 | C0CBADC00072 | IC | 2 | |
| IC6752 | C0ZBZ0001324 | IC | 1 | |
| IC6771 | C0CBADC00072 | IC | 1 | |
| IC6772 | C0ZBZ0001325 | IC | 1 | |
| IC6773,74 | C0JBAA000377 | IC | 2 | |
| IC6791 | EHMDD9863 | LINEAR IC | 1 | |
| IC6801 | C0DBEMC00043 | IC | 1 | |
| IC6803 | C0DAAMH00005 | IC | 1 | |
| IC6821 | C0DBEMC00043 | IC | 1 | |
| IC6841 | C0DBEMC00043 | IC | 1 | |
| IC6861 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6871 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6881 | C0DBEMC00043 | IC | 1 | |
| IC6901-06 | AN16076A-VT | IC | 6 | |
| IC6951-56 | AN16076A-VT | IC | 6 | |
| IC7101,02 | C0JBAZ001120 | IC | 2 | |
| IC7201-03 | C0JBAZ001120 | IC | 3 | |
| IC7301-04 | C0JBAZ001120 | IC | 4 | |
| IC8001 | MN2WS0039A | IC | 1 | |
| IC8002,03 | C3ABRG000080 | IC | 2 | |
| IC8004 | C0ZBZ0001030 | IC | 1 | |
| IC8554 | TVRP554 | IC | 1 | |
| IC8601 | TVRP294 | IC | 1 | TH-50PV700H |
| IC8601 | TVRP295 | IC | 1 | TH-50PV700M |
| IC8601 | TVRP296 | IC | 1 | TH-50PV700MR |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|------------------|
| IC8601 | TVRP297 | IC | 1 | TH-50PV700AZ |
| IC8621,22 | C0JBAZ002845 | IC | 2 | |
| IC9001 | TVRP208-2 | IC | 1 | |
| IC9002 | C1ZBZ0003577 | IC | 1 | |
| IC9003 | MNZSFC9GPH3 | IC | 1 | |
| IC9007 | TVRP211-4 | IC | 1 | |
| IC9011 | C0EBF0000431 | IC | 1 | |
| IC9013 | C0JBAZ002060 | IC | 1 | |
| IC9200 | C1ZBZ0003566 | IC | 1 | |
| IC9303 | TVRP218-2 | IC | 1 | |
| IC9500 | C1ZBZ0003575 | IC | 1 | |
| IC9802,03 | C0JBAZ001120 | IC | 2 | |
| IC9805 | C0DBAYY00274 | IC | 1 | |
| IC9806 | C0DBAYY00273 | IC | 1 | |
| IC9900 | MN84524 | IC | 1 | |
| IC9901 | C3ABQJ000055 | IC | 1 | |
| JA2 | ERJ6GEY0R00V | M 0.0 OHM, 1/10W | 1 | |
| JA4-A8 | ERJ6GEY0R00V | M 0.0 OHM, 1/10W | 5 | |
| | | | | |
| JK2003 | K2HA204A0053 | JACK | 1 | |
| JK3001 | K1FB315A0006 | CONNECTOR | 1 | |
| JK3100 | K1U936A00002 | CONNECTOR UNIT | 1 | |
| JK3701C | K4AK18B00003 | TERMINAL | 1 | |
| JK4500,01 | K1FY119D0002 | CONNECTOR | 2 | |
| JK7702 | K1NA09E00088 | 9P CONNECTOR | 1 | |
| | | | | |
| JS1100 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| JS1119 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | TH-50PV700H |
| JS1120 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | TH-50PV700M |
| JS1122 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | TH-50PV700AZ |
| JS1125 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | TH-50PV700MR |
| JS2031-33 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| JS2046 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2048,49 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| JS2051 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2059-62 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| JS2064 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2096 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2101 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2300,01 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| JS2513 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3003 | J0JCC0000100 | CHIP INDUCTOR | 1 | TH-50PV700AZ/H/M |
| JS3010-15 | ERJ6GEY0R00V | M 0.0 OHM, 1/10W | 6 | |
| JS3021 | J0JCC0000100 | CHIP INDUCTOR | 1 | TH-50PV700MR |
| JS3023,24 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| JS3032 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3206 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3208 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3209 | J0JCC0000100 | CHIP INDUCTOR | 1 | TH-50PV700AZ/H/M |
| JS3213 | ERJ6GEY0R00V | M 0.0 OHM, 1/10W | 1 | |
| JS3702 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3704,05 | ERJ6GEY0R00V | M 0.0 OHM, 1/10W | 2 | |
| JS3707,08 | ERJ6GEY0R00V | M 0.0 OHM, 1/10W | 2 | |
| JS3816 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS4001-03 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 3 | |
| JS4005 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| JS4007 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| JS4501 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| | | | | |
| K1 | K1KY12B00001 | 12P CONNECTOR | 1 | |
| | | | | |
| L1100 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2001,02 | J0JCC0000364 | CHIP INDUCTOR | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|------------------|
| L2003,04 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L2007,08 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L2011,12 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L2015,16 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L2021 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2022 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| L2026 | G1C6R8MA0061 | INDUCTOR COIL | 1 | |
| L2027 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L2029 | J0JCC0000077 | CHIP INDUCTOR | 1 | |
| L2034,35 | J0JCC0000364 | CHIP INDUCTOR | 2 | |
| L2039,40 | J0JHC0000045 | CHIP INDUCTOR | 2 | |
| L2300-07 | G1C330MA0291 | INDUCTION COIL | 8 | |
| L2308-10 | J0JJC0000011 | CHIP INDUCTOR | 3 | |
| L2647 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| L2648 | G1C470MA0077 | INDUCTION COIL | 1 | |
| L2649 | G1C100MA0072 | INDUCTION COIL | 1 | |
| L2650 | G1C3R3ZA0083 | INDUCTION COIL | 1 | |
| L3001-03 | J0JCC0000100 | BEAD CHOKE | 3 | |
| L3010 | J0JCC0000100 | BEAD CHOKE | 1 | |
| L3013 | J0JCC0000100 | BEAD CHOKE | 1 | |
| L3206-08 | J0JCC0000241 | CHIP INDUCTOR | 3 | |
| L3209 | J0JGC0000021 | CHIP INDUCTOR | 1 | |
| L3211 | J0JGC0000021 | CHIP INDUCTOR | 1 | |
| L3219,20 | J0JCC0000241 | CHIP INDUCTOR | 2 | TH-50PV700AZ/H/M |
| L3222 | J0JGC0000021 | CHIP INDUCTOR | 1 | TH-50PV700AZ/H/M |
| L3223,24 | J0JCC0000241 | CHIP INDUCTOR | 2 | TH-50PV700AZ/H/M |
| L3225,26 | J0JCC0000241 | CHIP INDUCTOR | 2 | |
| L3227 | J0JGC0000021 | CHIP INDUCTOR | 1 | TH-50PV700AZ/H/M |
| L3700,01 | J0JCC0000364 | CHIP INDUCTOR | 2 | |
| L3707,08 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L3801 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L3804,05 | J0JHC0000045 | CHIP INDUCTOR | 2 | |
| L4002 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L4004 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4006 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L4008 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4500-08 | J0JHC0000078 | CHIP INDUCTOR | 9 | |
| L4511 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4512 | J0JCC0000077 | CHIP INDUCTOR | 1 | |
| L4516-18 | J0JHC0000078 | CHIP INDUCTOR | 3 | |
| L4520,21 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L4524 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5550 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5551,52 | G0C150MA0056 | PEAKING COIL | 2 | |
| L5564 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5565 | G0A220GA0002 | CHOKE COIL | 1 | |
| L5566 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5600,01 | G1C2R2ZA0083 | INDUCTION COIL | 2 | |
| L5602 | G1C3R3ZA0083 | INDUCTION COIL | 1 | |
| L5604 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L5605 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L5606 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L5610,11 | J0JHC0000035 | CHIP INDUCTOR | 2 | |
| L5670 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5690,91 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L5692 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L5735 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L6000 | J0JJC0000015 | CHIP INDUCTOR | 1 | |
| L6001-03 | G0C1R6KA0119 | PEAKING COIL | 3 | |
| L6005 | G0C1R6KA0119 | PEAKING COIL | 1 | |
| L6010 | J0JJC0000015 | CHIP INDUCTOR | 1 | |
| L6011-14 | G0C1R6KA0119 | PEAKING COIL | 4 | |
| L6061-64 | J0JKB0000049 | FLAT CORE | 4 | |
| L6081-84 | J0JKB0000049 | FLAT CORE | 4 | |
| L6101,02 | J0JJC0000015 | CHIP INDUCTOR | 2 | |
| L6103 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6105,06 | J0JJC0000015 | CHIP INDUCTOR | 2 | |
| L6221 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6241 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6262 | G0ZZ00002183 | PEAKING COIL | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|-----------------------|
| L6271 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6401-03 | G0C1R6KA0119 | PEAKING COIL | 3 | |
| L6405 | G0C1R6KA0119 | PEAKING COIL | 1 | |
| L6411-13 | G0C1R6KA0119 | PEAKING COIL | 3 | |
| L6415 | G0C1R6KA0119 | PEAKING COIL | 1 | |
| L6463-66 | J0JKB0000049 | FLAT CORE | 4 | |
| L6472 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6474 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6483-86 | J0JKB0000049 | FLAT CORE | 4 | |
| L6571 | J0JJC0000015 | CHIP INDUCTOR | 1 | |
| L6573 | J0JJC0000015 | CHIP INDUCTOR | 1 | |
| L6591,92 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6601,02 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6690 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6801,02 | J0JJC0000015 | CHIP INDUCTOR | 2 | |
| L6841 | J0JJC0000015 | CHIP INDUCTOR | 1 | |
| L6881 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L7701 | J0JCC0000143 | CHIP INDUCTOR | 1 | |
| L7702 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| L7706 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| L8001-05 | J0JHC0000045 | CHIP INDUCTOR | 5 | |
| L8006 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| L8007-10 | J0JHC0000045 | CHIP INDUCTOR | 4 | |
| L8551 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L8621 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L8801 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8802 | J0JCC0000100 | BEAD CHOKE | 1 | |
| L9500 | G1C150KA0038 | INDUCTION COIL | 1 | |
| L9501,02 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L9504,05 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L9800 | G1C2R2Z00007 | INDUCTION COIL | 1 | |
| L9801 | G1C1R5Z00006 | INDUCTION COIL | 1 | |
| L9802 | G1C2R2Z00007 | INDUCTION COIL | 1 | |
| PA3,A4 | K1KB23A00004 | 23P CONNECTOR | 2 | |
| PA6 | K1KA12AA0191 | 12P CONNECTOR | 1 | |
| PA7 | K1KA11AA0191 | 11P CONNECTOR | 1 | |
| PA9800 | K5H4022A0023 | FUSE | 1 | |
| PA9900 | K5H5022A0023 | FUSE | 1 | |
| PAMM1 | TMME047 | CLAMPER | 1 | |
| PAMM11 | TMME300 | CLAMPER | 1 | |
| PAMM13 | TMME300 | CLAMPER | 1 | |
| PC2511 | B3JB00000026 | IC | 1 | |
| PC6480 | B3PBA0000223 | IC | 1 | |
| PC6701,02 | B3PBA0000233 | IC | 2 | |
| PC6703 | B3PBA0000234 | IC | 1 | |
| PC6705 | B3PBA0000397 | IC | 1 | |
| PC6801 | B3PBA0000223 | IC | 1 | |
| PC6861 | B3PBA0000223 | IC | 1 | |
| PC6871 | B3PBA0000223 | IC | 1 | |
| PCB | TNPA4179AE | CIRCUIT BOARD H | 1 | TH-50PV700AZ/H/M △ |
| PCB | TNPA4179AS | CIRCUIT BOARD H | 1 | TH-50PV700MR △ |
| PCB | TXNDG1HLTH | CIRCUIT BOARD DG | 1 | TH-50PV700H △ |
| PCB | TXNDG1HLTM | CIRCUIT BOARD DG | 1 | TH-50PV700M △ |
| PCB | TXNDG1HLTP | CIRCUIT BOARD DG | 1 | TH-50PV700AZ △ |
| PCB | TXNDG1HLTX | CIRCUIT BOARD DG | 1 | TH-50PV700MR △ |
| PCB | TNPA4178AG | CIRCUIT BOARD PA | 1 | △ |
| PCB | ETXMM655MEH | CIRCUIT BOARD P | 1 | △ |
| PCB | TNPA4169 | CIRCUIT BOARD C1 | 1 | △ |
| PCB | TNPA4170 | CIRCUIT BOARD C2 | 1 | △ |
| PCB | TNPA4171 | CIRCUIT BOARD C3 | 1 | △ |
| PCB | TZTNP01HMTP | CIRCUIT BOARD D | 1 | △ |
| PCB | TNPA4186 | CIRCUIT BOARD SC | 1 | △ |
| PCB | TNPA4189 | CIRCUIT BOARD SD | 1 | △ |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|------------------|
| PCB | TNPA4187 | CIRCUIT BOARD SS | 1 | △ |
| PCB | TNPA4202 | CIRCUIT BOARD SS2 | 1 | △ |
| PCB | TNPA4203 | CIRCUIT BOARD SS3 | 1 | △ |
| PCB | TNPA4188 | CIRCUIT BOARD SU | 1 | △ |
| PCB | TNPA4262AD | CIRCUIT BOARD G | 1 | △ |
| PCB | TNPA4135AF | CIRCUIT BOARD GH | 1 | △ |
| PCB | TNPA4137AE | CIRCUIT BOARD K | 1 | △ |
| PCB | TNPA4138AD | CIRCUIT BOARD S | 1 | △ |
| PCB | TXNGS1HKTP | CIRCUIT BOARD GS | 1 | △ |
| Q1107,08 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q2000,01 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q2002,03 | 2SC584500L | TRANSISTOR | 2 | |
| Q2015 | 2SA207700L | TRANSISTOR | 1 | |
| Q2016,17 | 2SC584500L | TRANSISTOR | 2 | |
| Q2021 | 2SA207700L | TRANSISTOR | 1 | |
| Q2031 | 2SA207700L | TRANSISTOR | 1 | |
| Q2033 | 2SA207700L | TRANSISTOR | 1 | |
| Q2034,35 | 2SC584500L | TRANSISTOR | 2 | |
| Q2039-42 | 2SC584500L | TRANSISTOR | 4 | |
| Q2101,02 | 2SC584500L | TRANSISTOR | 2 | |
| Q2301 | 2SA207700L | TRANSISTOR | 1 | |
| Q2510,11 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q2513 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q2635 | 2SC584500L | TRANSISTOR | 1 | |
| Q2636,37 | 2SA207700L | TRANSISTOR | 2 | |
| Q2638 | 2SC584500L | TRANSISTOR | 1 | |
| Q2639 | 2SK3065T100 | FET | 1 | |
| Q3031,32 | 2SC584500L | TRANSISTOR | 2 | |
| Q3200 | 2SA207700L | TRANSISTOR | 1 | |
| Q3201 | 2SA207700L | TRANSISTOR | 1 | TH-50PV700AZ/H/M |
| Q3801,02 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q3804 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q4000-02 | 2SA207700L | TRANSISTOR | 3 | |
| Q4500-05 | 2SD0601ARL | TRANSISTOR | 6 | |
| Q4514-17 | 2SB0709ARL | TRANSISTOR | 4 | |
| Q4520 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q5501 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q5521,22 | 2SA207700L | TRANSISTOR | 2 | |
| Q5523,24 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q5561 | B1DHDC000028 | TRANSISTOR | 1 | |
| Q5562 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q5600-02 | B1MBEDA00015 | TRANSISTOR | 3 | |
| Q5603,04 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q5690,91 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q5692,93 | B1DHDC000028 | TRANSISTOR | 2 | |
| Q6001-04 | 2PG0010000RP | TRANSISTOR | 4 | |
| Q6021-23 | 2PG0010000RP | TRANSISTOR | 3 | |
| Q6031 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6041-43 | 2PG0010000RP | TRANSISTOR | 3 | |
| Q6052,53 | 2PG0010000RP | TRANSISTOR | 2 | |
| Q6101,02 | B1DFKM000002 | TRANSISTOR | 2 | |
| Q6103 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6104 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6105,06 | B1DFKM000002 | TRANSISTOR | 2 | |
| Q6111 | 2SK326800L | FET | 1 | |
| Q6112 | B1DFKM000001 | TRANSISTOR | 1 | |
| Q6114 | B1DFKM000001 | TRANSISTOR | 1 | |
| Q6141 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6142 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6146 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6147 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6171 | B1ABRD000003 | TRANSISTOR | 1 | |
| Q6172 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6181 | B1ABRD000003 | TRANSISTOR | 1 | |
| Q6222A | 2SC1473AEA | TRANSISTOR | 1 | |
| Q6251 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6256 | 2SD1263A | TRANSISTOR | 1 | |
| Q6271 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6281 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6282 | B1ADPF000004 | TRANSISTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| Q6401-04 | 2PG0010000RP | TRANSISTOR | 4 | |
| Q6422-24 | 2PG0030000RP | TRANSISTOR | 3 | |
| Q6441-43 | 2PG0010000RP | TRANSISTOR | 3 | |
| Q6452,53 | 2PG0030000RP | TRANSISTOR | 2 | |
| Q6500 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6501 | BlABPF000014 | TRANSISTOR | 1 | |
| Q6502 | BlADPF000004 | TRANSISTOR | 1 | |
| Q6521 | BlABPF000014 | TRANSISTOR | 1 | |
| Q6522 | BlADPF000004 | TRANSISTOR | 1 | |
| Q6531 | BlABRD000003 | TRANSISTOR | 1 | |
| Q6532 | BlADRD000001 | TRANSISTOR | 1 | |
| Q6551 | BlABRD000003 | TRANSISTOR | 1 | |
| Q6552 | BlADRD000001 | TRANSISTOR | 1 | |
| Q6561 | BlABPF000014 | TRANSISTOR | 1 | |
| Q6562 | BlADPF000004 | TRANSISTOR | 1 | |
| Q6571 | BlDFKM000002 | TRANSISTOR | 1 | |
| Q6573 | BlDFKM000002 | TRANSISTOR | 1 | |
| Q6581 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6601 | BlDFES000003 | TRANSISTOR | 1 | |
| Q6602 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6603 | 2SB0709ARL | TRANSISTOR | 1 | |
| Q6621 | 2SK399500L | FET | 1 | |
| Q6623 | 2SK399500L | FET | 1 | |
| Q6643 | 2SK399500L | FET | 1 | |
| Q6645-49 | 2SK399500L | FET | 5 | |
| Q6651 | 2SK399500L | FET | 1 | |
| Q6661 | BlDEET000002 | TRANSISTOR | 1 | |
| Q6662 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6665 | BlABPF000014 | TRANSISTOR | 1 | |
| Q6671-73 | BlDFDR000001 | TRANSISTOR | 3 | |
| Q6679 | BlABPF000014 | TRANSISTOR | 1 | |
| Q6680 | BlADPF000004 | TRANSISTOR | 1 | |
| Q6690 | 2SA19610Q0HW | TRANSISTOR | 1 | |
| Q6742,43 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q6763 | BlADPF000004 | TRANSISTOR | 1 | |
| Q6781 | BlABPF000014 | TRANSISTOR | 1 | |
| Q6782 | BlADPF000004 | TRANSISTOR | 1 | |
| Q6791 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6803 | 2SD0814A | TRANSISTOR | 1 | |
| Q6805 | 2SC3063 | TRANSISTOR | 1 | |
| Q6806 | 2SC1473AEA | TRANSISTOR | 1 | |
| Q6821 | 2SD1263A | TRANSISTOR | 1 | |
| Q6822 | 2SC3063 | TRANSISTOR | 1 | |
| Q6824 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6841 | 2SD1263A | TRANSISTOR | 1 | |
| Q6842 | 2SC1473AEA | TRANSISTOR | 1 | |
| Q6881 | 2SD1263A | TRANSISTOR | 1 | |
| Q6882 | 2SB940A | TRANSISTOR | 1 | |
| Q6883 | 2SC1473AEA | TRANSISTOR | 1 | |
| Q8801 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q8802 | 2SB0709ARL | TRANSISTOR | 1 | |
| Q8911-13 | 2SD0601ARL | TRANSISTOR | 3 | |
| Q9010 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q9044 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q9046 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q9050-54 | 2SD0601ARL | TRANSISTOR | 5 | |
| Q9301,02 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q9805,06 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q9807-09 | BlMBEDA00015 | TRANSISTOR | 3 | |
| R1100 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1101 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1102 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1103 | ERJ2RKD330 | M 33 OHM, J,0.063W | 1 | |
| R1104 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1105-09 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 5 | |
| R1122 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R1124,25 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1134 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1144 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1146 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R1147 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1153 | ERJ2GEJ821 | M 820 OHM, J,0.063W | 1 | |
| R1162 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1163 | ERJ2GEJ105 | M 1MOHM, J,0.063W | 1 | |
| R1164 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1165 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 1 | |
| R1166 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1169 | ERJ2GED563X | M 56KOHM, J,0.063W | 1 | |
| R1170 | ERJ2GEJ273 | M 27KOHM, J,0.063W | 1 | |
| R1171 | ERJ2GED563X | M 56KOHM, J,0.063W | 1 | |
| R1172 | ERJ2GEJ273 | M 27KOHM, J,0.063W | 1 | |
| R1173 | ERJ6ENF2000 | M 200 OHM, J,1/10W | 1 | |
| R1174,75 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1179 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1181 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1182 | ERJ2GEJ273 | M 27KOHM, J,0.063W | 1 | |
| R1183,84 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1194 | ERJ2GED563X | M 56KOHM, J,0.063W | 1 | |
| R1195 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1196 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R1199 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1200,01 | ERJ2GEJ562 | M 5.6KOHM, J,0.063W | 2 | |
| R1203 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1204 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1205,06 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1209 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1216 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R1217 | ERJ2GED563X | M 56KOHM, J,0.063W | 1 | |
| R1218-20 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R1221 | ERJ3EKF7151 | M 7.15KOHM, 1/16W | 1 | |
| R1222,23 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |
| R1225-28 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 4 | |
| R1229 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1231-34 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 4 | |
| R1235 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1236,37 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R1243 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R1255 | ERJ2GEJ102X | M 1KOHM, J, 0.063W | 1 | |
| R2001 | ERJ2GEJ104 | M 100KOHM, J, 0.063W | 1 | |
| R2006 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R2007 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R2010-15 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 6 | |
| R2018 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R2020-23 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 4 | |
| R2024 | ERJ2RKD330 | M 33 OHM, J, 0.063W | 1 | |
| R2025 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R2027 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R2028 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R2029-34 | ERJ6GEYJ184 | M 180KOHM, J, 1/10W | 6 | |
| R2047 | ERJ3GEYJ331 | M 330 OHM, J, 1/16W | 1 | |
| R2048 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |
| R2049 | ERJ3GEYJ331 | M 330 OHM, J, 1/16W | 1 | |
| R2050 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |
| R2051, 52 | ERJ6GEYJ184 | M 180KOHM, J, 1/10W | 2 | |
| R2053, 54 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 2 | |
| R2056, 57 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 2 | |
| R2058 | ERJ3GEYJ301 | M 300 OHM, J, 1/16W | 1 | |
| R2059 | D0GB105JA057 | M 1MOHM, J, 1/16W | 1 | |
| R2084 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 1 | |
| R2085 | ERJ3GEYJ561 | M 560 OHM, J, 1/16W | 1 | |
| R2086 | ERJ3GEYJ471 | M 470 OHM, J, 1/16W | 1 | |
| R2088 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R2089 | ERJ3GEYJ561 | M 560 OHM, J, 1/16W | 1 | |
| R2092 | ERJ3GEYJ471 | M 470 OHM, J, 1/16W | 1 | |
| R2093 | ERJ3GEYJ332 | M 3.3KOHM, J, 1/16W | 1 | |
| R2094 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |
| R2096 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2097 | ERJ3GEYJ332 | M 3.3KOHM, J, 1/16W | 1 | |
| R2098, 99 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R2100 | ERJ3EKF2002 | M 20KOHM, 1/16W | 1 | |
| R2104 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R2106 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2110 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2111 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R2112 | D0GB105JA057 | M 1MOHM, J, 1/16W | 1 | |
| R2113 | ERJ3EKF1203 | M 120KOHM, 1/16W | 1 | |
| R2114 | ERJ3EKF7502 | M 75KOHM, 1/16W | 1 | |
| R2116, 17 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R2118 | D0GB105JA057 | M 1MOHM, J, 1/16W | 1 | |
| R2119 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2122 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2123 | D0GB473JA057 | M 47KOHM, J, 1/16W | 1 | |
| R2124 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2125 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R2127 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2128 | D0GB473JA057 | M 47KOHM, J, 1/16W | 1 | |
| R2129 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2131 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2132 | D0GB473JA057 | M 47KOHM, J, 1/16W | 1 | |
| R2137, 38 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 2 | |
| R2143, 44 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R2145, 46 | ERJ3EKF2002 | M 20KOHM, 1/16W | 2 | |
| R2149 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2150, 51 | ERJ3EKF2002 | M 20KOHM, 1/16W | 2 | |
| R2152 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | |
| R2154 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | |
| R2156 | ERJ3GEYJ331 | M 330 OHM, J, 1/16W | 1 | |
| R2160 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R2162 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R2164 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R2165 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2166 | ERJ3EKF1602 | M 16.0KOHM, 1/16W | 1 | |
| R2167 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R2168 | ERJ3EKF1602 | M 16.0KOHM, 1/16W | 1 | |
| R2169 | ERJ3EKF2202 | M 22KOHM, 1/16W | 1 | |
| R2170-75 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 6 | |
| R2178 | D0GB102JA057 | M 1KOHM, J, 1/16W | 1 | |
| R2179 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2180 | D0GB102JA057 | M 1KOHM, J, 1/16W | 1 | |
| R2181 | ERJ3EKF2202 | M 22KOHM, 1/16W | 1 | |
| R2182, 83 | ERJ3EKF3602 | M 36KOHM, 1/16W | 2 | |
| R2184, 85 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R2186 | ERJ3GEYJ823 | M 82KOHM, J, 1/16W | 1 | |
| R2187 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R2189 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2192, 93 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 2 | |
| R2194 | D0GB102JA057 | M 1KOHM, J, 1/16W | 1 | |
| R2195, 96 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 2 | |
| R2197 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R2198 | ERJ3EKF1583 | M 158KOHM, 1/16W | 1 | |
| R2205 | ERJ3GEYJ203 | M 20KOHM, J, 1/16W | 1 | |
| R2206 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2208-10 | D0GB103JA057 | M 10KOHM, J, 1/16W | 3 | |
| R2216 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2217 | D0GB473JA057 | M 47KOHM, J, 1/16W | 1 | |
| R2218 | D0GB102JA057 | M 1KOHM, J, 1/16W | 1 | |
| R2220 | D0GB123JA057 | M 12KOHM, J, 1/16W | 1 | |
| R2223-25 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R2227-32 | J0JCC0000100 | CHIP INDUCTOR | 6 | |
| R2233 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2235 | D0GB473JA057 | M 47KOHM, J, 1/16W | 1 | |
| R2236, 37 | D0GB102JA057 | M 1KOHM, J, 1/16W | 2 | |
| R2257 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2263 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2265 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 1 | |
| R2266 | ERJ3GEYJ561 | M 560 OHM, J, 1/16W | 1 | |
| R2270, 71 | EXB28V220J | RESISTOR ARRAY | 2 | |
| R2276 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2290, 91 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R2294-97 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| R2301, 02 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 2 | |
| R2305 | ERJ3GEYJ471 | M 470 OHM, J, 1/16W | 1 | |
| R2306, 07 | ERJ3GEYJ683 | M 68KOHM, J, 1/16W | 2 | |
| R2308, 09 | ERJ8GEYJ3R3V | M 3.3 OHM, J, 1/8W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|------------------|
| R2311-16 | ERJ8GEYJ3R3V | M 3.3 OHM, J, 1/8W | 6 | |
| R2317-26 | ERJ6GEYJ100V | M 10 OHM, J, 1/10W | 10 | |
| R2330 | DOGB102JA057 | M 1KOHM, J, 1/16W | 1 | |
| R2331 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |
| R2506, 07 | J0JHC0000096 | CHIP INDUCTOR | 2 | |
| R2512 | ERJ6GEYJ470V | M 47 OHM, J, 1/10W | 1 | |
| R2516 | ERJ3GEYJ223 | M 22KOHM, J, 1/16W | 1 | |
| R2517 | ERJ6GEYJ470V | M 47 OHM, J, 1/10W | 1 | |
| R2520 | ERJ3GEYJ224 | M 220KOHM, J, 1/16W | 1 | |
| R2521 | ERJ6GEYJ470V | M 47 OHM, J, 1/10W | 1 | |
| R2524 | ERJ3GEYJ223 | M 22KOHM, J, 1/16W | 1 | |
| R2525 | ERJ3EKF5760 | M 576 OHM, 1/16W | 1 | |
| R2530 | ERJ3GEYJ223 | M 22KOHM, J, 1/16W | 1 | |
| R2531 | ERJ3GEYJ271 | M 270 OHM, J, 1/16W | 1 | |
| R2542 | DOGB473JA057 | M 47KOHM, J, 1/16W | 1 | |
| R2556, 57 | ERJ3GEYJ562 | M 5.6KOHM, J, 1/16W | 2 | |
| R2558 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R2575 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2576, 77 | J0JCC0000241 | CHIP INDUCTOR | 2 | |
| R2578, 79 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R2601-03 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R2624, 25 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 2 | |
| R2628, 29 | ERJ3GEYJ752 | M 7.5KOHM, J, 1/16W | 2 | |
| R2853 | DOGB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2854 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |
| R2855 | DOGB473JA057 | M 47KOHM, J, 1/16W | 1 | |
| R2856 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2857 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 1 | |
| R2858 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |
| R2859 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 1 | |
| R2860 | DOGB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2861 | DOGB102JA057 | M 1KOHM, J, 1/16W | 1 | |
| R2863, 64 | DOGB102JA057 | M 1KOHM, J, 1/16W | 2 | |
| R2865 | DOGB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R2866 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |
| R2867 | ERJ6ENF8202 | M 82KOHM, 1/10W | 1 | |
| R2868 | ERJ6ENF1602 | M 16KOHM, 1/10W | 1 | |
| R2869 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 1 | |
| R2890 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 1 | |
| R3001-10 | ERJ6RED750 | M 75 OHM, 1/10W | 10 | |
| R3012 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3020-22 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 3 | |
| R3044, 45 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R3059 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R3062-65 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 4 | |
| R3068 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3069 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R3072-74 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 3 | |
| R3086 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | TH-50PV700AZ/H/M |
| R3087 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R3089 | ERJ3GEYJ331 | M 330 OHM, J, 1/16W | 1 | |
| R3090 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | |
| R3096-01 | ERJ3GEYJ680 | M 68 OHM, J, 1/16W | 6 | |
| R3102 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 1 | TH-50PV700MR |
| R3103 | J0JGC0000021 | CHIP INDUCTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|------------------|
| R3104 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 1 | TH-50PV700MR |
| R3105 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | TH-50PV700AZ/H/M |
| R3107 | DOGB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R3109 | J0JGC0000021 | CHIP INDUCTOR | 1 | |
| R3110 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3111 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | |
| R3112 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | TH-50PV700AZ/H/M |
| R3113 | DOGB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R3119 | ERJ3EKF1000 | M 100 OHM, 1/16W | 1 | |
| R3120 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | |
| R3121 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 1 | |
| R3123 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 1 | |
| R3130, 31 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 2 | |
| R3133 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | |
| R3135 | ERJ3EKF1000 | M 100 OHM, 1/16W | 1 | |
| R3137 | ERJ3EKF1000 | M 100 OHM, 1/16W | 1 | |
| R3140 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 1 | |
| R3143 | ERJ6ENF69R8 | M 69.8OHM, 1/10W | 1 | |
| R3145 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 1 | |
| R3168 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R3174-76 | ERJ3GEYJ680 | M 68 OHM, J, 1/16W | 3 | |
| R3177 | DOGB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R3180 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R3188 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3191 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | |
| R3202 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3205 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3206 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R3215 | J0JCC0000100 | CHIP INDUCTOR | 1 | TH-50PV700AZ/H/M |
| R3216 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3222 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3227-29 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R3233, 34 | ERJ6RED750 | M 75 OHM, 1/10W | 2 | |
| R3236-38 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R3239 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R3240 | ERJ3EKF5600 | M 560 OHM, 1/16W | 1 | |
| R3243 | ERJ6GEYJ271 | M 270 OHM, J, 1/10W | 1 | |
| R3244 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3246 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3247 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | |
| R3249 | DOGB152JA057 | M 1.5KOHM, J, 1/16W | 1 | |
| R3250, 51 | DOGB152JA057 | M 1.5KOHM, J, 1/16W | 2 | TH-50PV700AZ/H/M |
| R3252 | ERJ6GEYJ271 | M 270 OHM, J, 1/10W | 1 | TH-50PV700AZ/H/M |
| R3253, 54 | J0JCC0000100 | CHIP INDUCTOR | 2 | TH-50PV700AZ/H/M |
| R3255 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | TH-50PV700AZ/H/M |
| R3256 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | TH-50PV700AZ/H/M |
| R3259 | ERJ3GEYJ221 | M 220 OHM, J, 1/16W | 1 | TH-50PV700AZ/H/M |
| R3260 | ERJ3EKF5600 | M 560 OHM, 1/16W | 1 | TH-50PV700AZ/H/M |
| R3266 | DOGB152JA057 | M 1.5KOHM, J, 1/16W | 1 | |
| R3268 | DOGB473JA057 | M 47KOHM, J, 1/16W | 1 | TH-50PV700MR |
| R3302 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R3305 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R3306, 07 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 2 | |
| R3308, 09 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R3310 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3313 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3318 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3348, 49 | ERJ3GEYJ680 | M 68 OHM, J, 1/16W | 2 | |
| R3350 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3709-11 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R3714 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3716, 17 | ERJ6GEYJ184 | M 180KOHM, J, 1/10W | 2 | |
| R3721 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R3722-25 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| R3732 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3746 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3748 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3750 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3751 | ERJ6ENF1432 | M14.3KOHM, 1/10W | 1 | |
| R3753 | ERJ6ENF1741 | M1.74KOHM, 1/10W | 1 | |
| R3754 | ERJ6ENF1621 | M1.62KOHM, 1/10W | 1 | |
| R3755 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3758 | ERJ6ENF6651 | M6.65KOHM, 1/10W | 1 | |
| R3765 | ERJ6ENF2321 | M2.32KOHM, 1/10W | 1 | |
| R3767 | ERJ6ENF3161 | M3.16KOHM, 1/10W | 1 | |
| R3768 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3801, 02 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R3803 | ERJ2GEJ332 | M 3.3KOHM, J, 0.063W | 1 | |
| R3804, 05 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 2 | |
| R3806 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R3807, 08 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 2 | |
| R3809, 10 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 2 | |
| R3811 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R3812 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R3814 | ERJ2GEJ102X | M 1KOHM, J, 0.063W | 1 | |
| R3815 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R3818 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R3819, 20 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 2 | |
| R3821 | ERJ2GEJ390 | M 39 OHM, J, 0.063W | 1 | |
| R3822 | ERJ2GEJ102X | M 1KOHM, J, 0.063W | 1 | |
| R3823 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R3824-31 | ERJ2GEJ2R7X | M 2.7OHM, J, 0.063W | 8 | |
| R3832 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 1 | |
| R3834 | ERJ3EKF49R9 | M 49.9 OHM, 1/16W | 1 | |
| R3835 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R3840, 41 | ERJ2GEJ220 | M 22 OHM, J, 0.063W | 2 | |
| R4002, 03 | EXB2HV680J | RESISTOR ARRAY | 2 | |
| R4004, 05 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 2 | |
| R4006 | ERJ2GEJ220 | M 22 OHM, J, 0.063W | 1 | |
| R4007 | ERJ3EKF7500 | M 750 OHM, 1/16W | 1 | |
| R4010 | ERJ3EKF1821 | M1.82KOHM, 1/16W | 1 | |
| R4011, 12 | ERJ2GEJ220 | M 22 OHM, J, 0.063W | 2 | |
| R4013 | ERJ2GEJ681 | M 680 OHM, J, 0.063W | 1 | |
| R4014 | ERJ2GEJ102X | M 1KOHM, J, 0.063W | 1 | |
| R4016 | ERJ2GEJ681 | M 680 OHM, J, 0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R4017 | ERJ2GEJ102X | M 1KOHM, J, 0.063W | 1 | |
| R4019 | ERJ2GEJ102X | M 1KOHM, J, 0.063W | 1 | |
| R4025 | D0GB202JA057 | M 2KOHM, J, 1/16W | 1 | |
| R4028, 29 | ERJ2GEJ101 | M 100 OHM, J, 0.063W | 2 | |
| R4034 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R4200-02 | ERJ2RKD330 | M 33 OHM, J, 0.063W | 3 | |
| R4242 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R4284 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R4286-88 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 3 | |
| R4317-30 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 14 | |
| R4500, 01 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R4502, 03 | ERJ2RKD330 | M 33 OHM, J, 0.063W | 2 | |
| R4506, 07 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R4508-23 | ERJ2GEJ2R2X | M 2.2OHM, J, 0.063W | 16 | |
| R4524, 25 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R4526, 27 | ERJ2GEJ102X | M 1KOHM, J, 0.063W | 2 | |
| R4528 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R4529 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 1 | |
| R4530 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R4531 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 1 | |
| R4532, 33 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R4535, 36 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 2 | |
| R4538 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R4539 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R4540 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R4541-43 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 3 | |
| R4544-47 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 4 | |
| R4552 | ERJ2GEJ220 | M 22 OHM, J, 0.063W | 1 | |
| R4561 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R4562, 63 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 2 | |
| R4564, 65 | ERJ2GEJ220 | M 22 OHM, J, 0.063W | 2 | |
| R4567 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R4578, 79 | ERJ2GEJ151 | M 150 OHM, J, 0.063W | 2 | |
| R4585 | ERJ2GEJ101 | M 100 OHM, J, 0.063W | 1 | |
| R4587 | ERJ3GEYF821 | M 820 OHM, 1/16W | 1 | |
| R4593 | ERJ3EKF1001 | M 1KOHM, 1/16W | 1 | |
| R4596-98 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 3 | |
| R4601 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 1 | |
| R4604 | ERJ3EKF7501 | M 7.5KOHM, 1/16W | 1 | |
| R4606 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R4611 | ERJ3EKF1371 | M 1.37KOHM, 1/16W | 1 | |
| R4612 | ERJ3EKF1501 | M 1.5KOHM, 1/16W | 1 | |
| R4613, 14 | ERJ2GEJ220 | M 22 OHM, J, 0.063W | 2 | |
| R4615 | ERJ3EKF1600 | M 160 OHM, 1/16W | 1 | |
| R4622 | ERJ2GEJ101 | M 100 OHM, J, 0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R4624 | ERJ3EKF1691 | M1.69KOHM, 1/16W | 1 | |
| R4626 | ERJ2GEJ105 | M 1MOHM, J,0.063W | 1 | |
| R4627 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4628, 29 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R4631 | ERJ3EKF4990 | M 499 OHM, 1/16W | 1 | |
| R4634 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4635 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R4636-38 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R4639, 40 | EXB28V680JX | RESISTOR ARRAY | 2 | |
| R4641 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4642 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R4643, 44 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4645-47 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R4648 | EXB28V330J | RESISTOR ARRAY | 1 | |
| R4649 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R4650, 51 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 2 | |
| R4652 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4653 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4654 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R4655 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4656 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R4657, 58 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4659 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4661 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4663 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4665, 66 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |
| R4667 | ERJ2GEJ151 | M 150 OHM, J,0.063W | 1 | |
| R4670 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R4672 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4676-81 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 6 | |
| R4682 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R4683 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4686 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4687, 88 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4689-92 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R4694 | ERJ2RKD330 | M 33 OHM, J,0.063W | 1 | |
| R4698, 99 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R4702, 03 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R4706 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4707 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4708 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4800 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R4819, 20 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4838 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4856-65 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 10 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R4872 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5485 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R5506, 07 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 2 | |
| R5508 | ERJ6GEYF473 | M 47KOHM, J,1/10W | 1 | |
| R5509 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R5531 | ERJ6GEYG222 | M 2.2KOHM, J,1/10W | 1 | |
| R5532 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5533 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 1 | |
| R5534 | ERJ6GEYF473 | M 47KOHM, J,1/10W | 1 | |
| R5535 | ERJ6GEYG222 | M 2.2KOHM, J,1/10W | 1 | |
| R5536 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5537 | ERJ6GEYG681 | M 680 OHM, J,1/10W | 1 | |
| R5538 | ERJ6GEYG222 | M 2.2KOHM, J,1/10W | 1 | |
| R5540 | ERJ6GEYJ471 | M 470 OHM, J,1/10W | 1 | |
| R5542 | ERJ6GEYJ471 | M 470 OHM, J,1/10W | 1 | |
| R5544 | ERJ6GEYG221 | M 220 OHM, J,1/10W | 1 | |
| R5546, 47 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 2 | |
| R5548, 49 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 2 | |
| R5554 | ERJ6ENF2611 | M2.61KOHM, 1/10W | 1 | |
| R5555 | ERJ6ENF1271 | M1.27KOHM, 1/10W | 1 | |
| R5570 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 1 | |
| R5571 | ERJ6GEYF473 | M 47KOHM, J,1/10W | 1 | |
| R5572 | ERJ6GEYG222 | M 2.2KOHM, J,1/10W | 1 | |
| R5573 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5600 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R5604 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R5605 | ERJ3EKF1272 | M12.7KOHM, 1/16W | 1 | |
| R5606-09 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R5610 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R5611 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R5612 | ERJ3EKF2322 | M23.2KOHM, 1/16W | 1 | |
| R5620 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R5621 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R5622 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R5623 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R5625-28 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R5629 | ERJ3EKF3012 | M30.1KOHM, 1/16W | 1 | |
| R5630 | ERJ3EKF4752 | M47.5KOHM, 1/16W | 1 | |
| R5631 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R5632 | ERJ3EKF3002 | M 30KOHM, 1/16W | 1 | |
| R5633, 34 | ERJ3EKF1602 | M16.0KOHM, 1/16W | 2 | |
| R5635 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R5636 | ERJ2GEJ683 | M 68KOHM, J,0.063W | 1 | |
| R5637 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5638 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5641 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R5644 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R5646 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5647 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R5660 | ERJ2GEJ562 | M 5.6KOHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R5661 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R5662 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R5670 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R5671 | ERJ2GEJ183 | M 18KOHM, J, 0.063W | 1 | |
| R5672 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R5674 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R5690, 91 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R5692, 93 | D0GB473JA057 | M 47KOHM, J, 1/16W | 2 | |
| R5694, 95 | D0GB102JA057 | M 1KOHM, J, 1/16W | 2 | |
| R5696, 97 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R5730, 31 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 2 | |
| R5732 | ERJ2GEJ223 | M 22KOHM, J, 0.063W | 1 | |
| R5733 | ERJ2GED563X | M 56KOHM, J, 0.063W | 1 | |
| R6001 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6003 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6005 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6007 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6020 | ERF5TJ330 | W 33 OHM, 5W | 1 | |
| R6021 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6024 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6026 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6031, 32 | ERJ6ENF8202 | M 82KOHM, 1/10W | 2 | |
| R6033 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6034 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R6041 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6043 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6045 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6053 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6055 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 1 | |
| R6102 | ERJT06J101V | M 100 OHM, F, 0.25W | 1 | |
| R6104 | ERJT06J101V | M 100 OHM, F, 0.25W | 1 | |
| R6106 | ERJT06J101V | M 100 OHM, F, 0.25W | 1 | |
| R6108 | ERJT06J101V | M 100 OHM, F, 0.25W | 1 | |
| R6109 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6110 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R6111, 12 | ERJT06J470V | M 47 OHM, F, 0.25W | 2 | |
| R6113 | ERJ14YJ224 | M 220KOHM, J, 1/4W | 1 | |
| R6114 | ERJT06J470V | M 47 OHM, F, 0.25W | 1 | |
| R6116 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R6131, 32 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6134 | ERJT06J750V | M 75 OHM, F, 0.25W | 1 | |
| R6135, 36 | ERJT06J100V | M 10 OHM, F, 0.25W | 2 | |
| R6141, 42 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6145 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 1 | |
| R6146, 47 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6151, 52 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6154 | ERJT06J750V | M 75 OHM, F, 0.25W | 1 | |
| R6157-60 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 4 | |
| R6171 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R6172, 73 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6181 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6182, 83 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6191, 92 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6193 | ERJT06J750V | M 75 OHM, F, 0.25W | 1 | |
| R6194 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 1 | |
| R6210 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6213 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6214 | ERJT06J151V | M 150 OHM, F, 0.25W | 1 | |
| R6222 | ERG1FJS103D | M 10KOHM, J, 1W | 1 | |
| R6223 | ERG2FJS123D | M 12KOHM, J, 2W | 1 | |
| R6225 | ERJ6ENF5492 | M 54.9KOHM, 1/10W | 1 | |
| R6226 | ERJ6ENF5622 | M 56.2KOHM, 1/10W | 1 | |
| R6227 | ERJ6ENF5102 | M 51KOHM, 1/10W | 1 | |
| R6232 | ERJ6ENF2491 | M 24.9KOHM, 1/10W | 1 | |
| R6233 | ERJ14YJ154 | M 150KOHM, J, 1/4W | 1 | |
| R6234 | ERJ6GEYG183 | M 18KOHM, J, 1/10W | 1 | |
| R6241 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R6242 | EXB38V472JV | RESISTOR ARRAY | 1 | |
| R6243 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R6244 | EXB38V472JV | RESISTOR ARRAY | 1 | |
| R6246 | ERJ6GEYJ273 | M 27KOHM, J, 1/10W | 1 | |
| R6247 | ERJT08J154V | M 150KOHM, J, 0.33W | 1 | |
| R6248 | ERJ6GEYJ273 | M 27KOHM, J, 1/10W | 1 | |
| R6249 | ERJT08J154V | M 150KOHM, J, 0.33W | 1 | |
| R6252, 53 | ERJ6ENF3902 | M 39KOHM, 1/10W | 2 | |
| R6254 | ERJ6ENF8201 | M 8.2KOHM, 1/10W | 1 | |
| R6255 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6256 | ERJ6ENF1801 | M 1.8KOHM, 1/10W | 1 | |
| R6257 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6258 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6261 | ERJ6GEYG104 | M 100KOHM, J, 1/10W | 1 | |
| R6272 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6273 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6274 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6275 | ERJT08J154V | M 150KOHM, J, 0.33W | 1 | |
| R6276 | ERJ6GEYG823 | M 82KOHM, J, 1/10W | 1 | |
| R6277 | ERJT08J154V | M 150KOHM, J, 0.33W | 1 | |
| R6282 | ERG2FJS150D | M 15 OHM, J, 2W | 1 | |
| R6283 | ERJ6GEYJ273 | M 27KOHM, J, 1/10W | 1 | |
| R6284 | ERJ6GEYF472 | M 47.7KOHM, J, 1/10W | 1 | |
| R6285 | ERJ6GEYJ273 | M 27KOHM, J, 1/10W | 1 | |
| R6286 | ERJT06J101V | M 100 OHM, F, 0.25W | 1 | |
| R6288, 89 | ERJ6ENF1241 | M 1.24KOHM, 1/10W | 2 | |
| R6290 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6291 | ERJ6ENF2491 | M 24.9KOHM, 1/10W | 1 | |
| R6292 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R6401-04 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 4 | |
| R6422-24 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 3 | |
| R6441-43 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 3 | |
| R6446 | ERF5TJ820 | W 82 OHM, 5W | 1 | |
| R6452, 53 | ERJT08J7R5V | M 7.5OHM, J, 0.33W | 2 | |
| R6465 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R6466 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6467, 68 | ERJ6ENF8202 | M 82KOHM, 1/10W | 2 | |
| R6471 | ERJ6GEYG392 | M 39KOHM, J, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R6472 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6473 | ERJ6GEYF561 | M 560 OHM, J, 1/10W | 1 | |
| R6474 | ERJ6GEYGL02 | M 1KOHM, J, 1/10W | 1 | |
| R6475, 76 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 2 | |
| R6477 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6481, 82 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6485 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 1 | |
| R6487 | ERJT06J750V | M 75 OHM, F, 0.25W | 1 | |
| R6488 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6489, 90 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6493 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6494, 95 | ERJ6ENF1003 | M 100KOHM, 1/10W | 2 | |
| R6496 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R6497 | ERJ6ENF2201 | M 2.2KOHM, 1/10W | 1 | |
| R6498 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6499 | ERJ6GEYGL03 | M 10KOHM, J, 1/10W | 1 | |
| R6501, 02 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6503 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6504 | ERJT06J750V | M 75 OHM, F, 0.25W | 1 | |
| R6505 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 1 | |
| R6506 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6507-09 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 3 | |
| R6511, 12 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6516, 17 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6521, 22 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6523 | ERJT06J750V | M 75 OHM, F, 0.25W | 1 | |
| R6531 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6532, 33 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6551 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6552, 53 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R6558 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R6560 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R6561-64 | EXB38V470J | RESISTOR ARRAY | 4 | |
| R6565-68 | EXB38V472JV | RESISTOR ARRAY | 4 | |
| R6570 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 1 | |
| R6571 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6573 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6579 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6580 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6582, 83 | ERJ6ENF3902 | M 39KOHM, 1/10W | 2 | |
| R6584 | ERJ6ENF8201 | M 8.2KOHM, 1/10W | 1 | |
| R6585 | ERJ6ENF1801 | M 1.8KOHM, 1/10W | 1 | |
| R6586 | ERJ6ENF2201 | M 2.2KOHM, 1/10W | 1 | |
| R6587 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6588 | ERJ6GEYGL03 | M 10KOHM, J, 1/10W | 1 | |
| R6590 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6591 | EXB38V472JV | RESISTOR ARRAY | 1 | |
| R6592 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6605 | ERJ6GEYGL82 | M 1.8KOHM, J, 1/10W | 1 | |
| R6607 | ERJ6ENF6811 | M 6.81KOHM, 1/10W | 1 | |
| R6608, 09 | ERJT08J102V | M 1KOHM, J, 0.33W | 2 | |
| R6610 | ERJ6GEYGL04 | M 100KOHM, J, 1/10W | 1 | |
| R6612 | ERJT06J470V | M 47 OHM, F, 0.25W | 1 | |
| R6621 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6623 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6629 | ERG2FJS333D | M 33KOHM, J, 2W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R6631 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6633 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6638, 39 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 2 | |
| R6643 | ERJT06J330V | M 33 OHM, F, 0.25W | 1 | |
| R6645-49 | ERJT06J330V | M 33 OHM, F, 0.25W | 5 | |
| R6651 | ERJT06J330V | M 33 OHM, F, 0.25W | 1 | |
| R6658 | DOD1101JA009 | M 100 OHM, J, 1W | 1 | |
| R6659, 60 | ERJ6GEYJ224 | M 220KOHM, J, 1/10W | 2 | |
| R6661 | ERJ6GEYGL04 | M 100KOHM, J, 1/10W | 1 | |
| R6662 | ERJ6ENF2201 | M 2.2KOHM, 1/10W | 1 | |
| R6663 | ERJ6GEYGL03 | M 10KOHM, J, 1/10W | 1 | |
| R6664 | ERJT08J222V | M 2.2KOHM, J, 0.33W | 1 | |
| R6665 | ERJT06J470V | M 47 OHM, F, 0.25W | 1 | |
| R6666 | ERJ6GEYGL04 | M 100KOHM, J, 1/10W | 1 | |
| R6667, 68 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 2 | |
| R6671 | ERJT06J470V | M 47 OHM, F, 0.25W | 1 | |
| R6672 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R6673-75 | ERJT06J470V | M 47 OHM, F, 0.25W | 3 | |
| R6692 | D0GZ472JA020 | M 4.7KOHM, J, 0.5W | 1 | |
| R6693 | ERJ6GEYG823 | M 82KOHM, J, 1/10W | 1 | |
| R6694 | ERJ6GEYJ273 | M 27KOHM, J, 1/10W | 1 | |
| R6695 | ERJ8GEYJ124 | M 120KOHM, J, 1/8W | 1 | |
| R6696 | ERF5TK2R2 | W 2.2 OHM, K, 5W | 1 | |
| R6700-04 | ERJ6GEYJ471 | M 470 OHM, J, 1/10W | 5 | |
| R6705, 06 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6707, 08 | ERJ6GEYJ471 | M 470 OHM, J, 1/10W | 2 | |
| R6709 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6710-14 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 5 | |
| R6716-18 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 3 | |
| R6721, 22 | EXB38V220JV | RESISTOR ARRAY | 2 | |
| R6723 | ERJ6GEYGL82 | M 1.8KOHM, J, 1/10W | 1 | |
| R6725 | ERJ6GEYGL04 | M 100KOHM, J, 1/10W | 1 | |
| R6726 | ERJ6GEYJ474 | M 470KOHM, J, 1/10W | 1 | |
| R6727 | ERJ6GEYJ273 | M 27KOHM, J, 1/10W | 1 | |
| R6728 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R6731 | ERJT06J470V | M 47 OHM, F, 0.25W | 1 | |
| R6733 | ERJT06J470V | M 47 OHM, F, 0.25W | 1 | |
| R6742 | ERJ6GEYGL03 | M 10KOHM, J, 1/10W | 1 | |
| R6743 | ERJ6GEYG332 | M 3.3KOHM, J, 1/10W | 1 | |
| R6745 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6746, 47 | ERJT06J103V | M 10KOHM, F, 0.25W | 2 | |
| R6761 | ERJT06J100V | M 10 OHM, F, 0.25W | 1 | |
| R6762 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R6765 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 1 | |
| R6766 | ERJT06J750V | M 75 OHM, F, 0.25W | 1 | |
| R6768 | ERJT08J1R0V | M 1.8OHM, J, 0.33W | 1 | |
| R6769 | ERJT06J750V | M 75 OHM, F, 0.25W | 1 | |
| R6775, 76 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6777 | ERJT06J151V | M 150 OHM, F, 0.25W | 1 | |
| R6781 | ERJT06J470V | M 47 OHM, F, 0.25W | 1 | |
| R6782 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R6791 | ERJ6GEYGL02 | M 1KOHM, J, 1/10W | 1 | |
| R6792 | ERJ6GEYGL03 | M 10KOHM, J, 1/10W | 1 | |
| R6793 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R6802 | ERG2FJS683D | M 68KOHM, J, 2W | 1 | |
| R6803 | ERG3FJS333D | M 33KOHM, J, 3W | 1 | |
| R6806,07 | ERX12SJ1R2 | M 1.2 OHM, J, 1/2W | 2 | |
| R6808 | ERJT06J272V | M 2.7KOHM, F, 0.25W | 1 | |
| R6809 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6810,11 | ERJ6GEYF333 | M 33KOHM, J, 1/10W | 2 | |
| R6812 | ERJ6ENF2403 | M 240KOHM, 1/10W | 1 | |
| R6813 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R6814 | ERJ6ENF5601 | M 5.6KOHM, 1/10W | 1 | |
| R6815 | ERJ6GEYG332 | M 3.3KOHM, J, 1/10W | 1 | |
| R6819 | ERJ6GEYG681 | M 680 OHM, J, 1/10W | 1 | |
| R6820 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R6821 | ERF5TJ221 | W 220 OHM, J, 5W | 1 | |
| R6822 | ERJ12YJ104U | M 100KOHM, 1/2W | 1 | |
| R6823 | ERGLFJS104D | M 100KOHM, J, 1W | 1 | |
| R6824 | ERJ6GEYG392 | M 3.9KOHM, J, 1/10W | 1 | |
| R6825-27 | ERJ6ENF2003 | M 200KOHM, 1/10W | 3 | |
| R6828 | ERJ6ENF4701 | M 4.7KOHM, 1/10W | 1 | |
| R6829,30 | ERJ6GEYG104 | M 100KOHM, J, 1/10W | 2 | |
| R6831 | ERJ6GEYG153 | M 15KOHM, J, 1/10W | 1 | |
| R6832 | ERJT08J4R7V | M 4.7OHM, J, 0.33W | 1 | |
| R6833-36 | ERJ6ENF7502 | M 75KOHM, 1/10W | 4 | |
| R6837 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6839 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6841 | ERJ12YJ153U | M 15KOHM, 1/2W | 1 | |
| R6842 | ERJ12YJ433U | M 43KOHM, 1/2W | 1 | |
| R6843 | ERJ6GEYJ623 | M 62KOHM, J, 1/10W | 1 | |
| R6844 | D0D2101JA021 | M 100 OHM, J, 2W | 1 | |
| R6845-47 | ERJ6GEYJ623 | M 62KOHM, J, 1/10W | 3 | |
| R6848 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6849,50 | ERJ6ENF6802 | M 68KOHM, 1/10W | 2 | |
| R6851 | ERJ6ENF1802 | M 18KOHM, 1/10W | 1 | |
| R6852 | ERJ6ENF2701 | M 2.7KOHM, 1/10W | 1 | |
| R6853 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6855 | ERJ12YJ103 | M 10KOHM, J, 1/2W | 1 | |
| R6856 | ERQ12AJW560E | F 56 OHM, J, 1/2W | 1 | |
| R6857 | ERJ12YJ124U | M 120KOHM, 1/2W | 1 | |
| R6858 | ERJ6GEYG102 | M 10KOHM, J, 1/10W | 1 | |
| R6860 | D0D28R2JA021 | M 8.2 OHM, J, 2W | 1 | |
| R6861,62 | ERJ6ENF5102 | M 51KOHM, 1/10W | 2 | |
| R6863 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6864 | ERJ6ENF6801 | M 6.8KOHM, 1/10W | 1 | |
| R6865 | ERJ6ENF3301 | M 3.3KOHM, 1/10W | 1 | |
| R6866 | ERJ6ENF6200 | M 620 OHM, 1/10W | 1 | |
| R6867 | ERJ6GEYG392 | M 3.9KOHM, J, 1/10W | 1 | |
| R6868 | ERJ6GEYJ223 | M 22KOHM, J, 1/10W | 1 | |
| R6869 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6870 | ERJ6GEYG104 | M 100KOHM, J, 1/10W | 1 | |
| R6871-73 | ERJ6ENF3902 | M 39KOHM, 1/10W | 3 | |
| R6874 | ERJ6ENF6801 | M 6.8KOHM, 1/10W | 1 | |
| R6875 | ERJ6ENF3301 | M 3.3KOHM, 1/10W | 1 | |
| R6876 | ERJ6RBD561 | M 560 OHM, 1/10W | 1 | |
| R6877 | ERJ6GEYG392 | M 3.9KOHM, J, 1/10W | 1 | |
| R6878 | ERJ6GEYJ223 | M 22KOHM, J, 1/10W | 1 | |
| R6879 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6880 | ERGLFJS103D | M 10KOHM, J, 1W | 1 | |
| R6881 | ERG2FNJS8R2E | M 8.2 OHM, J, 2W | 1 | |
| R6882 | ERJ6ENF1692 | M 16.9KOHM, 1/10W | 1 | |
| R6883,84 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 2 | |
| R6886-88 | ERJ6GEYJ224 | M 220KOHM, J, 1/10W | 3 | |
| R6889 | ERG2FJS223D | M 22KOHM, J, 2W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R6890 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6891-93 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 3 | |
| R6894 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6895-97 | ERJ6ENF4702 | M 47KOHM, 1/10W | 3 | |
| R6898 | ERJ6ENF2491 | M 2.49KOHM, 1/10W | 1 | |
| R6899 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R6901 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6902-04 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 3 | |
| R6905 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6909 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6913 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6917 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6924 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6925,26 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R6931-34 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 4 | |
| R6935,36 | ERJ8GEYJ224 | M 220KOHM, J, 1/8W | 2 | |
| R6938 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6951 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6955 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6959 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6963 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6967 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6971 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6972-74 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 3 | |
| R6975,76 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R6981-84 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 4 | |
| R6985,86 | ERJ8GEYJ224 | M 220KOHM, J, 1/8W | 2 | |
| R6989 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R7103 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R7105,06 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 2 | |
| R7108 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7110 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R7111,12 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 2 | |
| R7113 | D0GB102JA057 | M 1KOHM, J, 1/16W | 1 | |
| R7115-18 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7122-25 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7127 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7130-33 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7135-38 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7145 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7146-49 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7154-57 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7166-73 | EXB38V471J | RESISTOR ARRAY | 8 | |
| R7179 | D0GF472JA047 | M 4.7KOHM, J, 0.33W | 1 | |
| R7183 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R7184 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7191,92 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 2 | |
| R7193 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R7195 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7198,99 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 2 | |
| R7202 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R7205 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R7210 | EXB38V222J | RESISTOR ARRAY | 1 | |
| R7211-14 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7219 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7220 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 1 | |
| R7221-23 | EXB38V471J | RESISTOR ARRAY | 3 | |
| R7224-27 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7229-32 | D0GZ100JA020 | M 10 OHM, J, 0.5W | 4 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R7240,41 | EXB38V471J | RESISTOR ARRAY | 2 | |
| R7243 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7244 | EXB38V222J | RESISTOR ARRAY | 1 | |
| R7245-47 | EXB38V470J | RESISTOR ARRAY | 3 | |
| R7250 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7251 | EXB38V222J | RESISTOR ARRAY | 1 | |
| R7252 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R7254-59 | DOGZ100JA020 | M 10 OHM, J, 0.5W | 6 | |
| R7301-04 | DOGZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7309-12 | DOGZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7317-20 | DOGZ100JA020 | M 10 OHM, J, 0.5W | 4 | |
| R7325 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7327 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R7330 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R7334-39 | EXB38V102J | RESISTOR ARRAY | 6 | |
| R7341 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 1 | |
| R7342 | DOGF472JA047 | M 4.7KOHM, J, 0.33W | 1 | |
| R7343 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7344 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7345 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7346 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7347 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7348 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7349 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7350 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7351 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7352 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7353 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7354 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7361 | ERJ6GEYJ224 | M 220KOHM, J, 1/10W | 1 | |
| R7364, 65 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 2 | |
| R7366 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R7367-72 | DOGZ100JA020 | M 10 OHM, J, 0.5W | 6 | |
| R7702 | ERJ3GEYJ560 | M 56 OHM, J, 1/16W | 1 | |
| R7719 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R7723 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R7725 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R7730,31 | JOJCC0000100 | CHIP INDUCTOR | 2 | |
| R7733-35 | ERJ3GEYJ680 | M 68 OHM, J, 1/16W | 3 | |
| R7737,38 | ERJ3GEYJ680 | M 68 OHM, J, 1/16W | 2 | |
| R7744 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R7747 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R7749-52 | JOJCC0000100 | CHIP INDUCTOR | 4 | |
| R7755 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R7758, 59 | JOJCC0000100 | CHIP INDUCTOR | 2 | |
| R7769 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R8001 | ERJ2GEJ181 | M 180 OHM, J, 0.063W | 1 | |
| R8002 | ERJ2GEJ820 | M 82 OHM, J, 0.063W | 1 | |
| R8003 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R8004 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R8005 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8006 | ERJ3EKF6801 | M 6.8KOHM, 1/16W | 1 | |
| R8023-29 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 7 | |
| R8030 | ERJ2GEJ101 | M 100 OHM, J, 0.063W | 1 | |
| R8031,32 | ERJ3EKF2700 | M 270 OHM, 1/16W | 2 | |
| R8035 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8039 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8056-73 | ERJ2GEJ470 | M 47 OHM, J, 0.063W | 18 | |
| R8074 | ERJ2GEJ221 | M 220 OHM, J, 0.063W | 1 | |
| R8075-78 | ERJ2GEJ470 | M 47 OHM, J, 0.063W | 4 | |
| R8079, 80 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 2 | |
| R8081 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R8082 | D1BA75R0A026 | M0.75KOHM, 1/10W | 1 | |
| R8083 | ERJ2GEJ301 | M 300 OHM, J, 0.063W | 1 | |
| R8084 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8086 | ERJ2GEJ104 | M 100KOHM, J, 0.063W | 1 | |
| R8087 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8090 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8091 | ERJ2GEJ101 | M 100 OHM, J, 0.063W | 1 | |
| R8093 | ERJ2GEJ470 | M 47 OHM, J, 0.063W | 1 | |
| R8095 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8097 | ERJ2GEJ221 | M 220 OHM, J, 0.063W | 1 | |
| R8098, 99 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R8100 | ERJ2GEJ470 | M 47 OHM, J, 0.063W | 1 | |
| R8101 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8106 | ERJ2GEJ202 | M 2KOHM, J, 0.063W | 1 | |
| R8107 | ERJ2GEJ101 | M 100 OHM, J, 0.063W | 1 | |
| R8111 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8328 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8471 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8472 | D1HG1038A002 | NETWORK RESISTER | 1 | |
| R8474, 75 | EXB28V103JX | RESISTOR ARRAY | 2 | |
| R8501 | ERJ2GEJ101 | M 100 OHM, J, 0.063W | 1 | |
| R8502-04 | ERJ2GEJ331 | M 330 OHM, J, 0.063W | 3 | |
| R8506 | ERJ2GEJ331 | M 330 OHM, J, 0.063W | 1 | |
| R8507-10 | ERJ3EKF91R0 | M 91 OHM, 1/16W | 4 | |
| R8512 | ERJ3EKF1800 | M 180 OHM, 1/16W | 1 | |
| R8513 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8517-19 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 3 | |
| R8551 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8555-61 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 7 | |
| R8564 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8601, 02 | ERJ2GEJ220 | M 22 OHM, J, 0.063W | 2 | |
| R8603 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R8604 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R8605 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R8621-36 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 16 | |
| R8653 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8655 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8702 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8703 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R8709 | DOYAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8710 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R8711, 12 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R8732 | ERJ2GEJ101 | M 100 OHM, J, 0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R8735-39 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 5 | |
| R8742 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8745, 46 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R8749 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8802-09 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 8 | |
| R8812 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8813 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R8814-17 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 4 | |
| R8818, 19 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 2 | |
| R8820 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8821 | ERJ3GEYJ560 | M 56 OHM, J, 1/16W | 1 | |
| R8822 | ERJ6ENF2000 | M 200 OHM, J, 1/10W | 1 | |
| R8823 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 1 | |
| R8826 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R8828 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8832 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8833 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R8851-54 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 4 | |
| R8855-60 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 6 | |
| R8862-64 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 3 | |
| R8865-67 | EXB2HV680J | RESISTOR ARRAY | 3 | |
| R8868 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R8869 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8870 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8871 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8874-76 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 3 | |
| R8877-89 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 13 | |
| R8891, 92 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 2 | |
| R8893 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8894 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R8895-97 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 3 | |
| R8898, 99 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 2 | |
| R8900, 01 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 2 | |
| R8904-10 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 7 | |
| R8911-18 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 8 | |
| R8919-22 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 4 | |
| R8923, 24 | ERJ2GEJ222 | M 2.2KOHM, J, 0.063W | 2 | |
| R8925, 26 | ERJ2GEJ472 | M 4.7KOHM, J, 0.063W | 2 | |
| R8927 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R8928 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R8929 | EXB2HVR000 | RESISTOR ARRAY | 1 | |
| R8930 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R8932 | ERJ2GEJ473 | M 47KOHM, J, 0.063W | 1 | |
| R8933-35 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 3 | |
| R8947 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R8948 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R8952 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R8963 | ERJ2GEJ103 | M 10KOHM, J, 0.063W | 1 | |
| R9062-67 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 6 | |
| R9070 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 1 | |
| R9099 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9101, 02 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9104, 05 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9107 | ERJ3GEYJ332 | M 3.3KOHM, J, 1/16W | 1 | |
| R9108, 09 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9110 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R9112 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9113 | ERJ3GEYJ100 | M 10 OHM, J, 1/16W | 1 | |
| R9115, 16 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 2 | |
| R9119 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9120 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R9121 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 1 | |
| R9122, 23 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9126 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9127 | ERJ3GEYJ683 | M 68KOHM, J, 1/16W | 1 | |
| R9129 | ERJ3GEYJ683 | M 68KOHM, J, 1/16W | 1 | |
| R9131-33 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 3 | |
| R9134 | ERJ3GEYJ333 | M 33KOHM, J, 1/16W | 1 | |
| R9135 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 1 | |
| R9141-45 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 5 | |
| R9149 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 1 | |
| R9150, 51 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 2 | |
| R9154, 55 | ERJ3GEYJ562 | M 5.6KOHM, J, 1/16W | 2 | |
| R9156 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9158, 59 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9160, 61 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R9164, 65 | ERJ3GEYJ222 | M 2.2KOHM, J, 1/16W | 2 | |
| R9166 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9167 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R9170-72 | D0GB393JA041 | M 39KOHM, J, 1/16W | 3 | |
| R9173, 74 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9177 | ERJ3GEYJ223 | M 22KOHM, J, 1/16W | 1 | |
| R9181-84 | D0GB102JA057 | M 1KOHM, J, 1/16W | 4 | |
| R9185, 86 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 2 | |
| R9187, 88 | ERJ3GEYJ562 | M 5.6KOHM, J, 1/16W | 2 | |
| R9189, 90 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9193 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9194 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9196 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9199 | ERJ3GEYJ272 | M 2.7KOHM, J, 1/16W | 1 | |
| R9200, 01 | ERJ3GEYJ100 | M 10 OHM, J, 1/16W | 2 | |
| R9203 | D0GB102JA057 | M 1KOHM, J, 1/16W | 1 | |
| R9205 | ERJ3GEYJ472 | M 4.7KOHM, J, 1/16W | 1 | |
| R9206, 07 | D0GB102JA057 | M 1KOHM, J, 1/16W | 2 | |
| R9215 | D0GB123JA057 | M 12KOHM, J, 1/16W | 1 | |
| R9217-22 | D0GB103JA057 | M 10KOHM, J, 1/16W | 6 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R9223 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9225 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9237 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9240 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9317 | ERJ3GEYJ391 | M 390 OHM,J,1/16W | 1 | |
| R9347,48 | EXB2HV220JV | RESISTOR ARRAY | 2 | |
| R9349 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9350,51 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9352-56 | EXB2HV220JV | RESISTOR ARRAY | 5 | |
| R9357-59 | EXB2HV470JV | RESISTOR ARRAY | 3 | |
| R9361,62 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9363 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9369 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9370 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9371 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9379 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9380 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 1 | |
| R9383 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R9384,85 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9391 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9392,93 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R9396-99 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 4 | |
| R9402 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R9403 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9501 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9503 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9506 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9507 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9512,13 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R9514 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9516 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9518 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9520 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9523 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9525 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9526 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9530 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9531-33 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R9534 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9535,36 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R9538 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9540,41 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R9543,44 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R9545 | ERJ3GEYJ304 | M 300KOHM,J,1/16W | 1 | |
| R9548-50 | D0GB103JA057 | M 10KOHM,J,1/16W | 3 | |
| R9552 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9553-55 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R9556 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9557,58 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R9561 | EXB38V222J | RESISTOR ARRAY | 1 | |
| R9562 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9563-66 | EXB2HV470JV | RESISTOR ARRAY | 4 | |
| R9567 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9569 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9824-27 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 4 | |
| R9828 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9839 | EXB38V101JV | RESISTOR ARRAY | 1 | |
| R9840 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9845 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9846,47 | EXB2HV222JV | RESISTOR ARRAY | 2 | |
| R9848,49 | EXB2HV470JV | RESISTOR ARRAY | 2 | |
| R9850 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R9854 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R9859 | EXB38V101JV | RESISTOR ARRAY | 1 | |
| R9861-63 | D0GB103JA057 | M 10KOHM,J,1/16W | 3 | |
| R9868 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9869-71 | D0GB103JA057 | M 10KOHM,J,1/16W | 3 | |
| R9872 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9874 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9878 | ERJ3EKF1102 | M 11KOHM, 1/16W | 1 | |
| R9879 | ERJ3EKF1302 | M 13KOHM, 1/16W | 1 | |
| R9886,87 | ERJ3EKF5602 | M 56KOHM, 1/16W | 2 | |
| R9888 | ERJ3EKF1102 | M 11KOHM, 1/16W | 1 | |
| R9889 | ERJ3EKF1742 | M17.2KOHM, 1/16W | 1 | |
| R9890 | ERJ3EKF4752 | M47.5KOHM, 1/16W | 1 | |
| R9891 | ERJ3EKF1272 | M12.7KOHM, 1/16W | 1 | |
| R9892 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9893 | ERJ3EKF5602 | M 56KOHM, 1/16W | 1 | |
| R9894 | ERJ3EKF1102 | M 11KOHM, 1/16W | 1 | |
| R9895 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9896 | ERJ3EKF1822 | M18.2KOHM, 1/16W | 1 | |
| R9897 | ERJ3EKF4752 | M47.5KOHM, 1/16W | 1 | |
| R9901,02 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R9903 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9904 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9905 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9906 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9907 | D0GB151JA057 | M 150 OHM,J,1/16W | 1 | |
| R9908-11 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| R9915-18 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| R9919 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R9922 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9928 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9936-39 | ERJ3EKF1001 | M 1KOHM, 1/16W | 4 | |
| R9940 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9941,42 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R9943-51 | EXB38V470J | RESISTOR ARRAY | 9 | |
| R9952-55 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 4 | |
| R9956 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9960 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9961 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| RM2501 | PNA4701M05TV | REMOCON RECEIVER | 1 | |
| S1 | K1KA03BA0061 | 3P CONNECTOR | 1 | |
| SC2 | K1KA02A00676 | 2P CONNECTOR | 1 | |
| SC20 | K1KY30AA0369 | 30P CONNECTOR | 1 | |
| SC30 | K1KA10AA0191 | 10P CONNECTOR | 1 | |
| SC41 | K1ML80B00001 | 80P CONNECTOR | 1 | |
| SC43 | K1ML80B00001 | 80P CONNECTOR | 1 | |
| SC45,46 | K1KA09AA0707 | 9P CONNECTOR | 2 | |
| SCMM2, M3 | TMME260 | CLAMPER | 2 | |
| SD1-D4 | K1MN96BA0260 | 96P CONNECTOR | 4 | |
| SD46 | K1KB09AA0219 | 9P CONNECTOR | 1 | |
| SS11 | K1KA02A00676 | 2P CONNECTOR | 1 | |
| SS12 | K1KA10AA0194 | 10P CONNECTOR | 1 | |
| SS21,22 | K1KA07A00170 | 7P CONNECTOR | 2 | |
| SS23,24 | K1KB07AA0087 | 7P CONNECTOR | 2 | |
| SS33 | K1KA10A00416 | 10P CONNECTOR | 1 | |
| SS34 | K1KA03AA0193 | 3P CONNECTOR | 1 | |
| SS35 | K1KA04AA0193 | 4P CONNECTOR | 1 | |
| SS52 | K1MN13B00091 | 13P CONNECTOR | 1 | |
| SS54,55 | K1MN13B00091 | 13P CONNECTOR | 2 | |
| SS57 | K1MN13B00091 | 13P CONNECTOR | 1 | |
| SSMM1 | TMME260 | CLAMPER | 1 | |
| SU1-U4 | K1MN96BA0260 | 96P CONNECTOR | 4 | |
| SU45 | K1KB09AA0219 | 9P CONNECTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-----------------------------|-----|-----------------------|
| SW2500 | K0F162B00002 | SWITCH | 1 | |
| SW3753-57 | EVQPC105K | SWITCH | 5 | |
| T6602 | ETS25AZ179AD | SWITCHING TRANS | 1 | |
| TU3200 | ENGF9701GF | TUNER | 1 | △ |
| TU3201 | ENG39D01GF | TUNER | 1 | TH-50PV700AZ/H/M △ |
| VR6000 | EVMEASA00B14 | CONTROL 10KOHMB 0.3W | 1 | |
| VR6600 | EVMEASA00B13 | CONTROL 1KOHMB 0.3W | 1 | |
| VR6602 | EVMEASA00B53 | CONTROL 5KOHMB 0.3W | 1 | |
| VR6604 | EVMEASA00B34 | CONTROL 30KOHMB 0.3W | 1 | |
| X1100 | H0J100500035 | CRYSTAL | 1 | |
| X2010 | H0J245500082 | CRYSTAL | 1 | |
| X4500 | H0J270500113 | CRYSTAL | 1 | |
| X8001 | H0J270500061 | CRYSTAL | 1 | |
| X9000 | H2D100500004 | CRYSTAL | 1 | |
| X9200 | H0J200500038 | CRYSTAL | 1 | |
| ZA0001 | K4AZ01D00004 | TERMINAL | 1 | |
| ZA0002 | K4CD08000002 | AV TERMINAL | 1 | |
| ZA0004,05 | K4AZ01D00004 | TERMINAL | 2 | |
| ZA0006,07 | K4CD08000002 | AV TERMINAL | 2 | |
| ZA3001-08 | K4CD08000002 | AV TERMINAL | 8 | |
| ZA3701 | K4CZ01000027 | COMPATIBLE WITH JALCO K9 | 1 | |
| ZA5501-03 | K4CZ01000027 | COMPATIBLE WITH JALCO K9 | 3 | |
| ZA6001-03 | K4CD01000011 | AV TERMINAL | 3 | |
| ZA6401-03 | K4CD01000011 | AV TERMINAL | 3 | |
| ZA7101-06 | K4AD01Z00001 | TERMINAL | 6 | |
| ZA7201-04 | K4AD01Z00001 | TERMINAL | 4 | |
| ZA7301-04 | K4AD01Z00001 | TERMINAL | 4 | |
| ZA7701 | K4AD01D00004 | TERMINAL | 1 | |
| ZA9001 | K4CD01000011 | AV TERMINAL | 1 | |
| A601,02 | RA362MSV7 | ARRESTOR | 2 | |
| C201 | KZE1H560 | ELECTROLYTIC CAPACITOR | 1 | |
| C202,03 | RR3DD221K | CERAMIC CAPACITOR | 2 | |
| C204 | MPEF12393H | PLASTIC FILM CAPACITOR | 1 | |
| C205 | MPEF12473H | PLASTIC FILM CAPACITOR | 1 | |
| C251 | MBB224K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C253 | MBB224K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C254,55 | ECQE6223KF | P 0.022UF, K, 400V | 2 | |
| C256-58 | KMQ220901Z | ELECTROLYTIC CAPACITOR | 3 | |
| C301 | KZE1H560 | ELECTROLYTIC CAPACITOR | 1 | |
| C302,03 | RR3DD101K | CERAMIC CAPACITOR | 2 | |
| C304 | MPEF12333H | PLASTIC FILM CAPACITOR | 1 | |
| C351 | ECQV1H224JL | PLASTIC FILM CAPACITOR | 1 | |
| C352 | KZE1E182S | C 1800UF 25V | 1 | |
| C354 | MBB224K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C355 | ECJ2VB1H223K | C 0.022UF, K, 50V | 1 | |
| C356 | MBB104K5 | CERAMIC CHIP CAPACITOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|---------------------------|-----|---------|
| C357,58 | KZE1E471L | ELECTROLYTIC CAPACITOR | 2 | |
| C401,02 | TAB104K2E | CERAMIC CHIP CAPACITOR | 2 | |
| C403 | KMQ2C471H | ELECTROLYTIC CAPACITOR | 1 | |
| C404 | KZE1H221 | ELECTROLYTIC CAPACITOR | 1 | |
| C405 | MBB224K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C406-08 | KZE2A471S | C 470UF 100V | 3 | |
| C451 | KZE1A471 | ELECTROLYTIC CAPACITOR | 1 | |
| C501 | ECQU2A103ML | PLASTIC FILM CAPACITOR | 1 | △ |
| C503 | KMQ2W560 | ELECTROLYTIC CAPACITOR | 1 | |
| C504 | KZE1H560 | ELECTROLYTIC CAPACITOR | 1 | |
| C505 | YBB474K1 | CERAMIC CHIP CAPACITOR | 1 | |
| C506 | TBB106K1A | C 10U 10V | 1 | |
| C507 | KZE1H221 | ELECTROLYTIC CAPACITOR | 1 | |
| C508 | KZE1H560 | ELECTROLYTIC CAPACITOR | 1 | |
| C509 | ECKENA101KBR | C 100P 250V | 1 | △ |
| C551 | KZE1A471 | ELECTROLYTIC CAPACITOR | 1 | |
| C552 | TBB474K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C554 | MBB103K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C555 | KZE1E470 | C 470U 25V | 1 | |
| C556 | MBB103K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C601 | ECQU2A105ML | P 1UF, 250V | 1 | △ |
| C602 | ECQU2A104ML | PLASTIC FILM CAPACITOR | 1 | △ |
| C603,04 | ECKENA221KBR | C 221P 250V | 2 | △ |
| C605 | DE1R102K | CERAMIC CAPACITOR | 1 | |
| C606 | MMXC2W105K | C 1P 450V | 1 | |
| C608 | MMXC2W105K | C 1P 450V | 1 | |
| C610 | MBB224K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C611 | KZE1H560 | ELECTROLYTIC CAPACITOR | 1 | |
| C612-14 | KMQ2W221L | C 220U 450V | 3 | |
| C615 | ECKENA101KBR | C 100P 250V | 1 | △ |
| C620,21 | ECKENA221KBR | C 221P 250V | 2 | △ |
| C623 | MPEF12223H | PLASTIC FILM CAPACITOR | 1 | |
| C624,25 | RR3AD471K | CERAMIC CAPACITOR | 2 | |
| C701 | KZE1A471 | ELECTROLYTIC CAPACITOR | 1 | |
| D201,02 | AG01A | DIODE | 2 | |
| D251 | D4SBL40 | DIODE | 1 | |
| D253 | 1SS355 | DIODE | 1 | |
| D351 | YG805C06R | DIODE | 1 | |
| D352 | AG01A | DIODE | 1 | |
| D353 | YG805C06R | DIODE | 1 | |
| D401 | D6SBN20 | DIODE | 1 | |
| D402 | AG01A | DIODE | 1 | |
| D403 | YG901C3R | DIODE | 1 | |
| D451 | RK39 | DIODE | 1 | |
| D501 | B0EBKT000007 | DIODE | 1 | △ |
| D504 | ST3D82 | DIODE | 1 | |
| D505 | AG01A | DIODE | 1 | |
| D506 | RF101A2S | DIODE | 1 | |
| D551 | RK39 | DIODE | 1 | |
| D552 | 1SS355 | DIODE | 1 | |
| D553 | B0JCMD000024 | DIODE | 1 | |
| D601,02 | 1SS355 | DIODE | 2 | |
| D603,04 | AP01C | DIODE | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| D605,06 | B0EAKR000059 | DIODE | 2 | |
| D701 | 1SS355 | DIODE | 1 | |
| D702 | B0JCMD000024 | DIODE | 1 | |
| F201 | HU216005BP | CARTRIDGE FUSE | 1 | |
| F301 | HU216005BP | CARTRIDGE FUSE | 1 | |
| F603 | HU382T2 | MICRO FUSE | 1 | |
| IC251 | HA17431UA | INTEGRATED CIRCUIT | 1 | |
| IC351 | HA17431UA | INTEGRATED CIRCUIT | 1 | |
| IC401 | HA17431UA | INTEGRATED CIRCUIT | 1 | |
| IC451 | PQ1CN41H2Z | VOLTAGE REGULATOR | 1 | |
| IC501 | MIP3E30MP | IC | 1 | |
| IC551 | HA17431UA | INTEGRATED CIRCUIT | 1 | |
| IP351 | ERBSE0R75U | MICRO FUSE | 1 | |
| IP701 | ERBSE0R75U | MICRO FUSE | 1 | |
| K601 | KQ3298 | RELAY | 1 | △ |
| K602 | DJ5D2QT8 | RELAY | 1 | △ |
| L401 | LH8TB681K | CHOKE | 1 | |
| L402 | H221012HY | CHOKE | 1 | |
| L403 | EXCELSA35 | BEAD CHOKE | 1 | |
| L404 | EXCELSR35 | BEAD CHOKE | 1 | |
| L451 | SNK1012A | CHOKE | 1 | |
| L501 | EXCELSA35 | BEAD CHOKE | 1 | |
| L502,03 | EXCELDLR35 | BEAD CHOKE | 2 | |
| L601,02 | B3180207Z | FILTER CHOKE | 2 | △ |
| L603 | ETB50CZ13GAD | CHOKE TRANS | 1 | |
| L607,08 | EXCELDLR35 | BEAD CHOKE | 2 | |
| MC201 | MLQNF153 | MODULE | 1 | △ |
| MC202 | MLKJA154 | MODULE | 1 | △ |
| MC203 | MP00R3 | MODULE | 1 | △ |
| MC301 | MLQNF682 | MODULE | 1 | △ |
| MC351 | MLJFF103 | MODULE | 1 | △ |
| MC401 | MLPSC103 | MODULE | 1 | △ |
| MC501 | MLTZB100 | MODULE | 1 | △ |
| MC502 | MLJHA103 | MODULE | 1 | △ |
| MC601 | MLLPD103 | MODULE | 1 | △ |
| MC602 | MP00P18 | MODULE | 1 | △ |
| MC603 | MP00P13 | MODULE | 1 | △ |
| MC701 | MLZDE103 | MODULE | 1 | △ |
| P2 | B2P3-VH-B | CONNECTOR | 1 | |
| P6 | B12B-EH-A | CONNECTOR | 1 | |
| P7 | B11B-EH-A | CONNECTOR | 1 | |
| P9 | B03P-VL | CONNECTOR | 1 | △ |
| P11 | B2P3-VH-B | CONNECTOR | 1 | |
| P12 | B10B-PH-KS | CONNECTOR | 1 | |
| P23 | B3B-PH-KS | CONNECTOR | 1 | |
| P25 | B13B-PH-KS | CONNECTOR | 1 | |
| PC201,02 | PS2581A | PHOTO COUPLER | 2 | △ |
| PC301,02 | PS2581A | PHOTO COUPLER | 2 | △ |
| PC401 | PS2581A | PHOTO COUPLER | 1 | △ |
| PC501,02 | PS2581A | PHOTO COUPLER | 2 | △ |
| Q301,02 | FMA16N55G | FIELD EFFECT TRANSISTOR | 2 | △ |
| Q351,52 | 2SK2510 | FIELD EFFECT TRANSISTOR | 2 | |
| Q401 | 2SK3607 | FIELD EFFECT TRANSISTOR | 1 | |
| Q402,03 | 2SA17670Q1TV | TRANSISTOR | 2 | |
| Q551 | HAT1130R | FET | 1 | |
| Q552 | 2SB710AQRSTX | TRANSISTOR | 1 | |
| Q602 | 2SD2185 | TRANSISTOR | 1 | |
| Q603 | 2SB14400RL | TRANSISTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-----------------------------|-----|---------|
| Q701,02 | 2SD602A-R | TRANSISTOR | 2 | |
| Q704 | 2SK3018 | FIELD EFFECT TRANSISTOR | 1 | |
| R201 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R202 | ERQ14AJ4R7J | FUSIBLE METAL FILM RESISTOR | 1 | |
| R203,04 | ERJ6GEYJ334 | M 330KOHM,J,1/10W | 2 | |
| R205 | ERJ6ENF1782 | M17.8KOHM, 1/10W | 1 | |
| R206-08 | ERJ12YJ683 | M 68KOHM, 1/2W | 3 | |
| R215,16 | SG732K220 | CHIP RESISTOR | 2 | |
| R251-54 | ERJ6ENF6802 | M 68KOHM, 1/10W | 4 | |
| R258 | ERJ6GEYJ220 | M 22 OHM,J,1/10W | 1 | |
| R259 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 1 | |
| R260 | ERJ6GEYF151 | M 150 OHM,F,1/10W | 1 | |
| R261 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 1 | |
| R263 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R264 | ERJ6ENF4701 | M 4.7KOHM, 1/10W | 1 | |
| R265 | ERJ6ENF1073 | M 107KOHM, 1/10W | 1 | |
| R266 | ERJ6GEYF472 | M 4.7KOHM,F,1/10W | 1 | |
| R267-69 | ERJ6ENF1073 | M 107KOHM, 1/10W | 3 | |
| R270 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R301 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R302 | ERQ14AJ4R7J | FUSIBLE METAL FILM RESISTOR | 1 | |
| R303,04 | ERJ6GEYJ334 | M 330KOHM,J,1/10W | 2 | |
| R305 | ERJ6ENF4421 | M4.42KOHM, 1/10W | 1 | |
| R306-08 | ERJ12YJ683 | M 68KOHM, 1/2W | 3 | |
| R309 | ERG18J680 | METAL OXIDE RESISTOR | 1 | |
| R310 | ERG12SJ220 | METAL OXIDE FILM RESISTOR | 1 | |
| R351 | ERJ6ENF1052 | M10.5KOHM, 1/10W | 1 | |
| R352 | ERJ12YJ100 | M 10 OHM,J, 1/2W | 1 | |
| R353 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R355 | ERJ6GEYJ682 | CHIP RESISTOR | 1 | |
| R356 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R358 | ERJ6ENF4701 | M 4.7KOHM, 1/10W | 1 | |
| R359 | ERJ6ENF2102 | M 21KOHM, 1/10W | 1 | |
| R362 | ERJ12YJ332 | M 3.3KOHM,J, 1/2W | 1 | |
| R363,64 | ERJ6GEYF333 | M 33KOHM,J,1/10W | 2 | |
| R365 | ERJ6ENF1052 | M10.5KOHM, 1/10W | 1 | |
| R366 | ERJ6ENF6981 | M6.98KOHM, 1/10W | 1 | |
| R367 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R368,69 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R370 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R371 | ERJ6ENF6981 | M6.98KOHM, 1/10W | 1 | |
| R403 | ERJ12YJ100 | M 10 OHM,J, 1/2W | 1 | |
| R404 | ERJ6ENF2152 | M21.5KOHM, 1/10W | 1 | |
| R405 | MPC2WR10J | METAL PLATE RESISTOR | 1 | |
| R406 | ERJ6ENF2152 | M21.5KOHM, 1/10W | 1 | |
| R407 | ERJ6GEYJ220 | M 22 OHM,J,1/10W | 1 | |
| R408 | ERJ6GEYJ5R6 | M 5.6 OHM,J,1/10W | 1 | |
| R409 | ERJ6GEYF473 | M 47KOHM,J,1/10W | 1 | |
| R410 | ERJ6ENF2152 | M21.5KOHM, 1/10W | 1 | |
| R411,12 | ERJ6GEYJ152 | CHIP RESISTOR | 2 | |
| R413,14 | ERJ6ENF1622 | M16.2KOHM, 1/10W | 2 | |
| R415 | ERJ6ENF8662 | CHIP RESISTOR | 1 | |
| R416 | ERJ6ENF8061 | M8.06KOHM, 1/10W | 1 | |
| R417-19 | ERJ6ENF3572 | M35.7KOHM, 1/10W | 3 | |
| R420 | ERJ6ENF2870 | M 287 OHM, 1/10W | 1 | |
| R451 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R452 | ERJ6GEYF124 | CHIP RESISTOR | 1 | |
| R453 | ERJ6GEYF473 | M 47KOHM,J,1/10W | 1 | |
| R454 | ERJ6ENF3001 | M 3KOHM, 1/10W | 1 | |
| R455 | ERJ6ENF1001 | M 1KOHM, 1/10W | 1 | |
| R456 | ERJ6ENF1332 | M13.3KOHM, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|--------------------------------|-----|---------|
| R505 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R506-11 | ERJ6ENF8253 | M 825KOHM, 1/10W | 6 | |
| R514-21 | ERJ6ENF2703 | M 270KOHM, 1/10W | 8 | |
| R522 | ERJ6GEYJ180 | M 18 OHM, J, 1/10W | 1 | |
| R551 | ERJ6GEYGL21 | CHIP RESISTOR | 1 | |
| R552 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R553 | ERJ6GEYJ150 | M 15 OHM, J, 1/10W | 1 | |
| R555 | ERJ6ENF1072 | M10.7KOHM, 1/10W | 1 | |
| R556 | ERJ6ENF1022 | M10.2KOHM, 1/10W | 1 | |
| R557 | ERJ6GEYG392 | M 3.9KOHM, J, 1/10W | 1 | |
| R558 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R559 | ERJ6GEYG332 | M 3.3KOHM, J, 1/10W | 1 | |
| R561 | ERJ6ENF2152 | M21.5KOHM, 1/10W | 1 | |
| R562 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R563, 64 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 2 | |
| R601 | RCRU5J125 | METAL GLAZE FIXED RESISTOR | 1 | △ |
| R602 | R5B100J | W 10 OHM, J, 5W | 1 | |
| R603 | ERJ6ENF1693 | M 169KOHM, 1/10W | 1 | |
| R604-06 | ERJ6ENF1783 | M 178KOHM, 1/10W | 3 | |
| R607-10 | ERJ6ENF3743 | CHIP RESISTOR | 4 | |
| R611 | ERJ6ENF1783 | M 178KOHM, 1/10W | 1 | |
| R617, 18 | RF5EJR15B | METAL PLATE RESISTOR | 2 | |
| R619 | RF5EJR10B | METAL PLATE RESISTOR | 1 | |
| R621 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R622 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R623 | ERJ12YJ470 | M 47 OHM, J, 1/2W | 1 | |
| R624 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R625 | ERJ12YJ470 | M 47 OHM, J, 1/2W | 1 | |
| R626 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R627 | ERJ12YJ470 | M 47 OHM, J, 1/2W | 1 | |
| R628 | ERQ14AJ330J | FUSIBLE METAL FILM RESISTOR | 1 | |
| R629 | ERJ6GEYG154 | CHIP RESISTOR | 1 | |
| R630 | ERJ6ENF5902 | M 59KOHM, 1/10W | 1 | |
| R631-36 | ERJ6ENF1103 | M 110KOHM, 1/10W | 6 | |
| R637 | RCR6J825 | METAL GLAZE FIXED RESISTOR | 1 | △ |
| R638 | RCRU5J155 | METAL GLAZE FIXED RESISTOR | 1 | △ |
| R701 | ERJ6GEYG182 | M 1.8KOHM, J, 1/10W | 1 | |
| R702 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R703 | ERJ6GEYG182 | M 1.8KOHM, J, 1/10W | 1 | |
| R704 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R706 | ERJ6GEYG182 | M 1.8KOHM, J, 1/10W | 1 | |
| R707 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R708 | ERJ14YJ471 | CHIP RESISTOR | 1 | |
| R709 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R710 | ERJ6GEYG182 | M 1.8KOHM, J, 1/10W | 1 | |
| R711 | ERJ14YJ471 | CHIP RESISTOR | 1 | |
| R712 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R713 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R716 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R717 | ERJ6GEYJ474 | M 470KOHM, J, 1/10W | 1 | |
| R718 | ERJ6GEYG470V | M 47 OHM, J, 1/10W | 1 | |
| RF601 | A5MC100JP2 | 139C 10 | 1 | △ |
| T201 | ETB50LZ15GAD | TRANSFORMER | 1 | △ |
| T301 | ETB50LZ14GAD | TRANSFORMER | 1 | △ |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| T501 | ETB25BG118AD | TRANSFORMER | 1 | △ |
| VR251 | EVMEASA01B25 | VARIABLE RESISTOR | 1 | |
| VR351 | EVMEASA01B14 | VARIABLE RESISTOR | 1 | |
| VR401 | EVMEASA01B24 | VARIABLE RESISTOR | 1 | |
| Z501 | ERZVGAD471 | VARISTOR | 1 | △ |
| Z601 | ERZVGED751 | VARISTOR | 1 | △ |
| Z602 | ERZVGAD471 | VARISTOR | 1 | △ |
| ZD201, 02 | MAZ4270NMF | ZENER DIODE | 2 | |
| ZD301, 02 | MAZ4270NMF | ZENER DIODE | 2 | |
| ZD305 | MAZ4270NMF | ZENER DIODE | 1 | |
| ZD401 | MA4033 | ZENER DIODE | 1 | |
| ZD402 | MA8360 | ZENER DIODE | 1 | |
| ZD451 | MAZ4068NMF | ZENER DIODE | 1 | |
| ZD501, 02 | MA4300N | ZENER DIODE | 2 | |
| ZD503 | MA4082N | ZENER DIODE | 1 | |
| ZD601 | MA4047N | ZENER DIODE | 1 | |