


Service Manual

Plasma Television

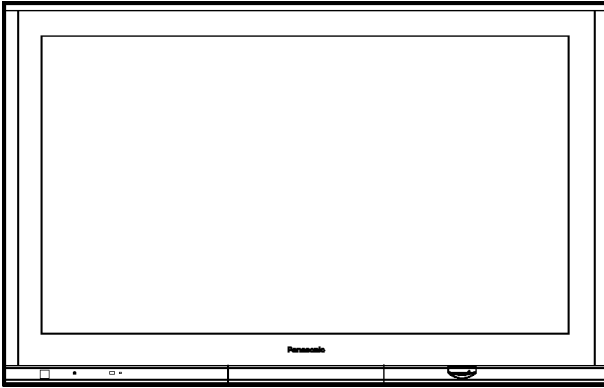

TH-58PZ700A
TH-58PY700AZ
TH-58PY700M
TH-58PY700MR
 GPF10DA Chassis

Specifications

| | |
|--------------------------|--|
| Power Source | AC 220-240 V, 50 / 60 Hz |
| Power Consumption | |
| Average use | 672 W |
| Standby condition | 0.4 W |
| Display panel | |
| Aspect Ratio | 16 : 9 |
| Visible screen size | 148 cm (diagonal) 1,287 mm (W) × 723 mm (H) |
| Number of pixels | 2,073,600 (1,920 (W) × 1,080 (H)) [5,760 × 1,080 dots] |
| Sound | |
| Speaker | Woofer (φ 80 mm) × 2 pcs, Tweeter (23 mm × 100 mm) × 2 pcs |
| Audio Output | 31 W [15.5 W + 15.5 W], 10 % THD |
| Headphones | M3 (3.5 mm) stereo mini Jack × 1 |
| PC signals | VGA, SVGA, XGA SXGA (compressed) Horizontal scanning frequency 31 - 69 kHz Vertical scanning frequency 59 - 86 Hz |

Receiving Systems/Band name (AZ/M/MR)

| 17 Systems | Function |
|------------------------------|--|
| 1 PAL B, G, H | Reception of broadcast transmissions and Playback from Video Cassette Tape Recorders |
| 2 PAL I | |
| 3 PAL D, K | |
| 4 SECAM B, G | |
| 5 SECAM D, K | |
| 6 SECAM K1 | |
| 7 NTSC M (NTSC 3.58/4.5 MHz) | |

| 17 Systems | Function |
|----------------------|---|
| 8 NTSC 4.43/5.5 MHz | Playback from Special VCR's or DVD |
| 9 NTSC 4.43/6.0 MHz | |
| 10 NTSC 4.43/6.5 MHz | |
| 11 NTSC 3.58/5.5 MHz | |
| 12 NTSC 3.58/6.0 MHz | |
| 13 NTSC 3.58/6.5 MHz | |
| 14 SECAM I | |
| 15 PAL 60 Hz/5.5 MHz | Playback from Special Disc Players and Special VCR's or DVD |
| 16 PAL 60 Hz/6.0 MHz | |
| 17 PAL 60 Hz/6.5 MHz | |

| | | |
|--------------------------------------|---|--|
| Receiving Channels | VHF BAND | |
| (Regular TV) | 2-12 (PAL/SECAM B, K1) | 0-12 (PAL B AUST.) |
| (AZ/M/MR) | 1-9 (PAL B N.Z.) | 1-12 (PAL/SECAM D) |
| | 1-12 (NTSC M Japan) | 2-13 (NTSC M USA) |
| | UHF BAND | |
| | 21-69 (PAL G, H, I/SECAM G, K, K1) | 28-69 (PAL B AUST.) |
| | 13-57 (PAL D, K) | 13-62 (NTSC M Japan) |
| | 14-69 (NTSC M USA) | |
| | CATV | |
| | S1-S20 (OSCAR) | 1-125 (USA CATV) |
| | C13-C49 (JAPAN) | S21-S41 (HYPER) |
| | Z1-Z37 (CHINA) | 5A, 9A (AUST.) |
| Receiving Systems / Band name | PAL B/G | Reception of Off air broadcasts |
| (A) | DVB-T | 7 MHz VHF / UHF (Australia) free-to-air TV broadcast reception |
| | PAL 60 Hz | Playback of NTSC tape from some PAL Video recorders (VCR) |
| | M.NTSC | Playback from M. NTSC Video recorders (VCR) |
| | NTSC | Playback from NTSC Video recorders (VCR) |
| Aerial - Rear | VHF / UHF (AZ/M/MR), Standard Belling & Lee connector (A) | |
| Operating Conditions | Temperature: 0 °C - 35 °C | |
| | Humidity: 20 % - 80 % RH (non-condensing) | |
| Connection Terminals | | |
| AV1 Input | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| S-VIDEO | Mini DIN 4-pin | Y: 1.0 V [p-p] (75 ohm) C: 0286V [p-p] (75 ohm) |
| AV2 Input | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| COMPONENT | Y | Y: 1.0 V [p-p] (including synchronization) |
| | P _B /C _B , P _R /C _R | ± 0.35 V [p-p] |
| AV3 Input | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| COMPONENT | Y | Y: 1.0 V [p-p] (including synchronization) |
| | P _B /C _B , P _R /C _R | ± 0.35 V [p-p] |
| AV4 Input | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| S-VIDEO | Mini DIN 4-pin | Y: 1.0 V [p-p] (75 ohm) C: 0286V [p-p] (75 ohm) |
| Monitor Output | | |
| AUDIO L-R | RCA PIN Type × 2 | 0.5 V [rms] (high impedance) |
| VIDEO | RCA PIN Type × 1 | 1.0 V [p-p] (75 ohm) |
| Others | | |
| HDMI 1/2/3 Input | TYPE A Connectors | · This TV supports "HDAVI Control 2" function |
| PC Input | HIGH-DENSITY D-SUB 15PIN | R,G,B/0.7 V [p-p] (75 ohm) |
| | | HD, VD/TTL Level 2.0 - 5.0 V[p-p] (high impedance) |
| Audio Input | RCA PIN Type × 2 | 0.5 V [rms] |
| DIGITAL AUDIO OUT | PCM / Dolby Digital, Fiber optic | |
| Card slot | SD CARD slot × 1 | |
| Dimensions (W × H × D) | 1,454 mm × 918 mm × 144 mm | |
| Mass | 64.0 kg Net | |

Note:

- Design and Specifications are subject to change without notice. Mass and Dimensions shown are approximate.

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

| | Page | | Page |
|--|------|---|------|
| 1 Applicable signals | 5 | 7 Caution statement | 21 |
| 2 Safety Precautions | 6 | 7.1. Caution statement. | 21 |
| 2.1. General Guidelines | 6 | 8 Location of Lead Wiring | 22 |
| 2.2. Touch-Current Check | 6 | 8.1. Lead of Wiring (1) | 22 |
| 3 Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices | 7 | 8.2. Lead of Wiring (2) | 23 |
| 4 About lead free solder (PbF) | 8 | 8.3. Lead of Wiring (3) | 24 |
| 5 Service Hint | 9 | 9 Self-check Function | 25 |
| 6 Plasma panel replacement method | 10 | 9.1. Check of the IIC bus lines | 25 |
| 6.1. Remove the Back cover | 10 | 9.2. Power LED Blinking timing chart | 26 |
| 6.2. Remove the fan | 10 | 9.3. No Power | 27 |
| 6.3. Remove the rear terminal cover | 10 | 9.4. No Picture | 28 |
| 6.4. Remove the P-Board | 10 | 9.5. Local screen failure | 29 |
| 6.5. Remove the tuner unit | 12 | 10 Service Mode | 30 |
| 6.6. Remove the DH-Board | 12 | 10.1. How to enter into Service Mode | 30 |
| 6.7. Remove the DG-Board | 13 | 10.2. Service tool mode | 32 |
| 6.8. Remove the H-Board | 13 | 11 Adjustment Procedure | 33 |
| 6.9. Remove the speaker box assy (left, right) | 13 | 11.1. Driver Set-up | 33 |
| 6.10. Remove the JG-Board | 14 | 11.2. Initialization Pulse Adjust | 34 |
| 6.11. Remove the PA-Board | 14 | 11.3. P.C.B. (Printed Circuit Board) exchange | 34 |
| 6.12. Remove the D-Board | 14 | 11.4. Adjustment Volume Location | 35 |
| 6.13. Remove the SU-Board | 15 | 11.5. Test Point Location | 35 |
| 6.14. Remove the SD-Board | 15 | 12 Adjustment | 36 |
| 6.15. Remove the SC-Board | 15 | 12.1. Sub-Contrast adjustment | 36 |
| 6.16. Remove the SS2-Board | 15 | 12.2. PAL panel white balance adjustment | 37 |
| 6.17. Remove the SS3-Board | 16 | 12.3. HD white balance adjustment | 38 |
| 6.18. Remove the SS-Board | 16 | 13 Hotel mode | 39 |
| 6.19. Remove the C1-Board | 16 | 14 Conductor Views | 41 |
| 6.20. Remove the C2-Board | 16 | 14.1. P(MULTI)-Board | 41 |
| 6.21. Remove the C3-Board | 17 | 14.2. P(SUS)-Board | 44 |
| 6.22. Remove the C4-Board | 17 | 14.3. PA-Board | 47 |
| 6.23. Remove the C5-Board | 17 | 14.4. G-Board | 48 |
| 6.24. Remove the C6-Board | 17 | 14.5. H-Board | 49 |
| 6.25. Remove the stand brackets and rear mounting metals ... | 18 | 14.6. GH and GS-Board | 51 |
| 6.26. Remove the front bracket | 18 | 14.7. JG-Board | 52 |
| 6.27. Remove the G-Board and GH-Board | 18 | 14.8. DG-Board | 54 |
| 6.28. Remove the GS-Board | 18 | 14.9. DH-Board | 57 |
| 6.29. Remove the S-Board | 19 | 14.10. D-Board | 58 |
| 6.30. Remove the K-Board | 19 | 14.11. C1-Board | 60 |
| 6.31. Remove the Plasma panel section from the Cabinet assy (glass) | 19 | 14.12. C2-Board | 61 |
| 6.32. Remove the squawker speaker | 20 | 14.13. C3-Board | 62 |
| 6.33. Replace the plasma panel (finished) | 20 | 14.14. C4-Board | 63 |
| | | 14.15. C5-Board | 64 |
| | | 14.16. C6-Board | 65 |

| | | | |
|--|-----------|---|------------|
| 14.17. SC-Board | 66 | 15.44. DH-Board (3 of 4) Schematic Diagram | 119 |
| 14.18. SU-Board | 69 | 15.45. DH-Board (4 of 4) Schematic Diagram | 120 |
| 14.19. SD-Board | 70 | 15.46. D-Board (1 of 2) Block Diagram | 121 |
| 14.20. SS-Board | 71 | 15.47. D-Board (2 of 2) Block Diagram | 122 |
| 14.21. K and S-Board | 74 | 15.48. D-Board (1 of 8) Schematic Diagram | 123 |
| 15 Schematic and Block Diagram | 75 | 15.49. D-Board (2 of 8) Schematic Diagram | 124 |
| 15.1. Schematic Diagram Note | 75 | 15.50. D-Board (3 of 8) Schematic Diagram | 125 |
| 15.2. Main Block Diagram | 76 | 15.51. D-Board (4 of 8) Schematic Diagram | 126 |
| 15.3. P-Board (1 of 2) Block Diagram | 77 | 15.52. D-Board (5 of 8) Schematic Diagram | 127 |
| 15.4. P-Board (2 of 2) Block Diagram | 78 | 15.53. D-Board (6 of 8) Schematic Diagram | 128 |
| 15.5. P-Board (1 of 2) Schematic Diagram | 79 | 15.54. D-Board (7 of 8) Schematic Diagram | 129 |
| 15.6. P-Board (2 of 2) Schematic Diagram | 80 | 15.55. D-Board (8 of 8) Schematic Diagram | 130 |
| 15.7. PA-Board Block Diagram | 81 | 15.56. C1, C2, C5 and C6 Block Diagram | 131 |
| 15.8. PA-Board Schematic Diagram | 82 | 15.57. C2, C3, C4 and C5-Board Block Diagram | 132 |
| 15.9. G, and S-Board Schematic Diagram | 84 | 15.58. C1-Board (1 of 2) Schematic Diagram | 133 |
| 15.10. H-Board (1 of 2) Block Diagram | 85 | 15.59. C1-Board (2 of 2) Schematic Diagram | 134 |
| 15.11. H-Board (2 of 2) Block Diagram | 86 | 15.60. C2-Board (1 of 2) Schematic Diagram | 135 |
| 15.12. H-Board (1 of 5) Schematic Diagram | 87 | 15.61. C2-Board (2 of 2) Schematic Diagram | 136 |
| 15.13. H-Board (2 of 5) Schematic Diagram | 88 | 15.62. C3-Board (1 of 2) Schematic Diagram | 137 |
| 15.14. H-Board (3 of 5) Schematic Diagram | 89 | 15.63. C3-Board (2 of 2) Schematic Diagram | 138 |
| 15.15. H-Board (4 of 5) Schematic Diagram | 90 | 15.64. C4-Board (1 of 2) Schematic Diagram | 139 |
| 15.16. H-Board (5 of 5) Schematic Diagram | 91 | 15.65. C4-Board (2 of 2) Schematic Diagram | 140 |
| 15.17. GH and K-Board Schematic Diagram | 92 | 15.66. C5-Board (1 of 2) Schematic Diagram | 141 |
| 15.18. GS-Board Block Diagram | 93 | 15.67. C5-Board (2 of 2) Schematic Diagram | 142 |
| 15.19. GS-Board Schematic Diagram | 94 | 15.68. C6-Board (1 of 2) Schematic Diagram | 143 |
| 15.20. JG-Board Block Diagram | 95 | 15.69. C6-Board (2 of 2) Schematic Diagram | 144 |
| 15.21. JG-Board (1 of 5) Schematic Diagram | 96 | 15.70. SC-Board Block Diagram | 145 |
| 15.22. JG-Board (2 of 5) Schematic Diagram | 97 | 15.71. SC-Board (1 of 2) Schematic Diagram | 146 |
| 15.23. JG-Board (3 of 5) Schematic Diagram | 98 | 15.72. SC-Board (2 of 2) Schematic Diagram | 147 |
| 15.24. JG-Board (4 of 5) Schematic Diagram | 99 | 15.73. SU and SD-Board Block Diagram | 148 |
| 15.25. JG-Board (5 of 5) Schematic Diagram | 100 | 15.74. SU-Board (1 of 3) Schematic Diagram | 149 |
| 15.26. DG-Board (1 of 3) Block Diagram | 101 | 15.75. SU-Board (2 of 3) Schematic Diagram | 150 |
| 15.27. DG-Board (2 of 3) Block Diagram | 102 | 15.76. SU-Board (3 of 3) Schematic Diagram | 151 |
| 15.28. DG-Board (3 of 3) Block Diagram | 103 | 15.77. SD-Board (1 of 3) Schematic Diagram | 152 |
| 15.29. DG-Board (1 of 12) Schematic Diagram | 104 | 15.78. SD-Board (2 of 3) Schematic Diagram | 153 |
| 15.30. DG-Board (2 of 12) Schematic Diagram | 105 | 15.79. SD-Board (3 of 3) Schematic Diagram | 154 |
| 15.31. DG-Board (3 of 12) Schematic Diagram | 106 | 15.80. SS, SS2 and SS3-Board Block Diagram | 155 |
| 15.32. DG-Board (4 of 12) Schematic Diagram | 107 | 15.81. SS-Board (1 of 2) Schematic Diagram | 156 |
| 15.33. DG-Board (5 of 12) Schematic Diagram | 108 | 15.82. SS-Board (2 of 2), SS2 and SS3 Schematic Diagram .. | 157 |
| 15.34. DG-Board (6 of 12) Schematic Diagram | 109 | 16 Exploded Views & Replacement Parts List | 159 |
| 15.35. DG-Board (7 of 12) Schematic Diagram | 110 | 16.1. Exploded Views | 159 |
| 15.36. DG-Board (8 of 12) Schematic Diagram | 111 | 16.2. Fan Exploded Views | 160 |
| 15.37. DG-Board (9 of 12) Schematic Diagram | 112 | 16.3. Packing Exploded Views (1) | 161 |
| 15.38. DG-Board (10 of 12) Schematic Diagram | 113 | 16.4. Packing Exploded Views (2) | 162 |
| 15.39. DG-Board (11 of 12) Schematic Diagram | 114 | 16.5. Packing Exploded Views (3) | 163 |
| 15.40. DG-Board (12 of 12) Schematic Diagram | 115 | 16.6. Replacement Parts List Notes | 164 |
| 15.41. DH-Board Block Diagram | 116 | 16.7. Mechanical Replacement Parts List | 165 |
| 15.42. DH-Board (1 of 4) Schematic Diagram | 117 | 16.8. Electrical Replacement Parts List | 166 |
| 15.43. DH-Board (2 of 4) Schematic Diagram | 118 | | |

1 Applicable signals

Input signal that can be displayed

COMPONENT (Y, P_B, P_R), HDMI

* Mark: Applicable input signal

| Signal name | COMPONENT | HDMI |
|---------------------|-----------|------|
| 525 (480) / 60i | * | * |
| 525 (480) / 60p | * | * |
| 625 (576) / 50i | * | * |
| 625 (576) / 50p | * | * |
| 750 (720) / 60p | * | * |
| 750 (720) / 50p | * | * |
| 1,125 (1,080) / 60i | * | * |
| 1,125 (1,080) / 50i | * | * |
| 1,125 (1,080) / 60p | | * |
| 1,125 (1,080) / 50p | | * |

PC (D-sub 15P)

| Signal name | Horizontal frequency (kHz) | Vertical frequency (Hz) |
|----------------------------|----------------------------|-------------------------|
| 640 × 400 @70 Hz | 31.47 | 70.07 |
| 640 × 480 @60 Hz | 31.47 | 59.94 |
| 640 × 480 @75 Hz | 37.50 | 75.00 |
| 800 × 600 @60 Hz | 37.88 | 60.32 |
| 800 × 600 @75 Hz | 46.88 | 75.00 |
| 800 × 600 @85 Hz | 53.67 | 85.06 |
| 852 × 480 @60 Hz | 31.44 | 59.89 |
| 1,024 × 768 @60 Hz | 48.36 | 60.00 |
| 1,024 × 768 @70 Hz | 56.48 | 70.07 |
| 1,024 × 768 @75 Hz | 60.02 | 75.03 |
| 1,024 × 768 @85 Hz | 68.68 | 85.00 |
| 1,280 × 1,024 @60 Hz | 63.98 | 60.02 |
| 1,366 × 768 @60 Hz | 48.39 | 60.04 |
| Macintosh13" (640 × 480) | 35.00 | 66.67 |
| Macintosh16" (832 × 624) | 49.73 | 74.55 |
| Macintosh21" (1,152 × 870) | 68.68 | 75.06 |

Note

- Signals other than above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.
- Applicable input signal for PC is basically compatible to VESA standard timing.
- PC signal is magnified or compressed for display, so that it may not be possible to show fine detail with sufficient clarity.

2 Safety Precautions

2.1. General Guidelines

1. When conducting repairs and servicing, do not attempt to modify the equipment, its parts or its materials.
2. When wiring units (with cables, flexible cables or lead wires) are supplied as repair parts and only one wire or some of the wires have been broken or disconnected, do not attempt to repair or re-wire the units. Replace the entire wiring unit instead.
3. When conducting repairs and servicing, do not twist the Faston connectors but plug them straight in or unplug them straight out.
4. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
5. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
6. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

2.2. Touch-Current Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use Leakage Current Tester (Simpson 228 or equivalent) to measure the potential across the measuring network.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
6. The potential at any point (TOUCH CURRENT) expressed as voltage U_1 and U_2 , does not exceed the following values:
For a. c.: $U_1 = 35$ V (peak) and $U_2 = 0.35$ V (peak);
For d. c.: $U_1 = 1.0$ V,


Note:

The limit value of $U_2 = 0.35$ V (peak) for a. c. and $U_1 = 1.0$ V for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

The limit value $U_1 = 35$ V (peak) for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz.

7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

Measuring network for TOUCH CURRENTS

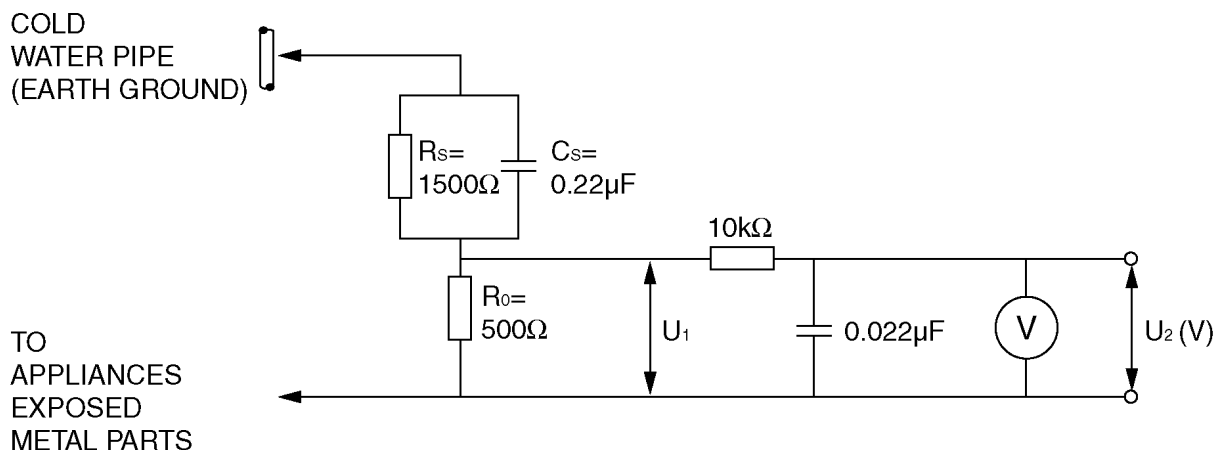

Resistance values in ohms (Ω)

V: Voltmeter or oscilloscope
(r.m.s. or peak reading)

Input resistance: ≥ 1 M Ω

Input capacitance: ≤ 200 pF

Frequency range: 15 Hz to 1 MHz and d.c. respectively

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

Figure 1

3 Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).


1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise ham less motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

4 About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).

That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.


PCBs manufactured using lead free solder will have the PbF within a leaf Symbol **PbF** stamped on the back of PCB.

Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).

If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.

- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

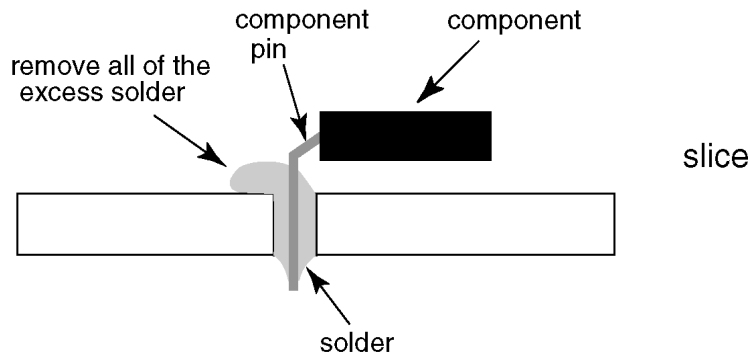



Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

| 0.3mm X 100g | 0.6mm X 100g | 1.0mm X 100g |
|--------------|--------------|--------------|
| | | |

5 Service Hint

Remove the Rear Cover

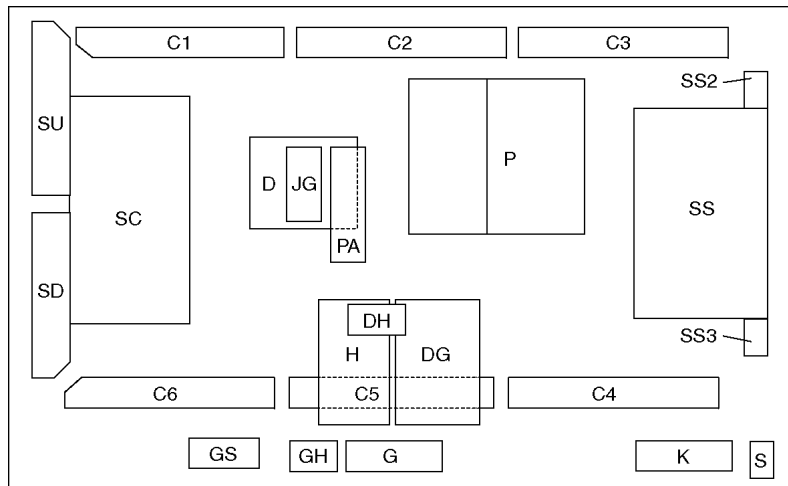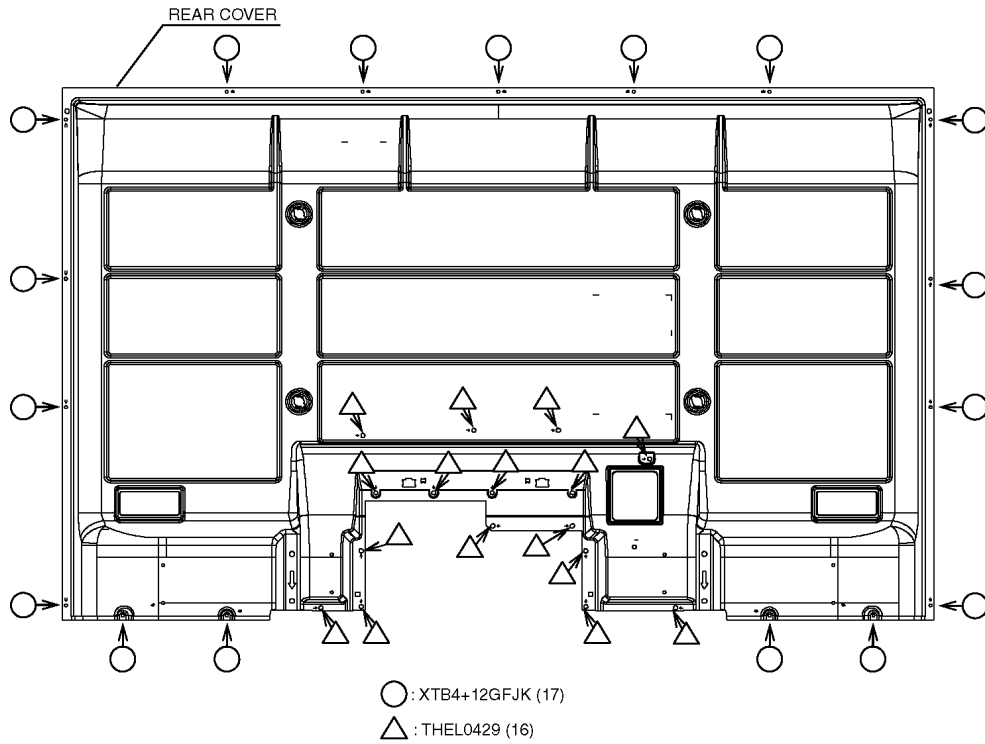

| Board Name | Function | Board Name | Function |
|------------|--|------------|--|
| P | Power Supply | D | Format Converter, Plasma AI, Sub-Field Processor |
| PA | Fan control | C1 | Data Driver (Upper Right) |
| H | Speaker out, Sound Processor AV Terminal, AV Switch | C2 | Data Driver (Upper Center) |
| DG | DC-DC Converter Digital Signal Processor, Microcomputer HDMI Interface, Peaks Lite 2 | C3 | Data Driver (Upper Left) |
| DH | Full HD | C4 | Data Driver (Lower Left) |
| G | Front terminal, Key Switch | C5 | Data Driver (Lower Center) |
| K | Remote receiver, Power LED | C6 | Data Driver (Lower Right) |
| S | Power Switch | SC | Scan Drive |
| GS | SD Card Slot | SU | Scan out (Upper) |
| JG | H264 Decoder | SD | Scan out (Lower) |
| GH | HDMI3 terminal | SS | Sustain Drive |
| | | SS2 | Sustain Connector (Upper) |
| | | SS3 | Sustain Connector (Lower) |



6 Plasma panel replacement method

6.1. Remove the Back cover

1. See Service Hint. (Section 5)


6.2. Remove the fan

1. Disconnect the relay connectors.
2. Remove the screws (×3 → each) and remove the fan A and fan B.

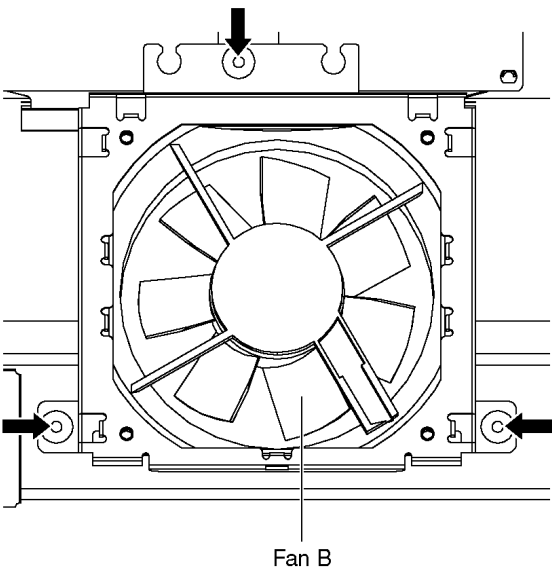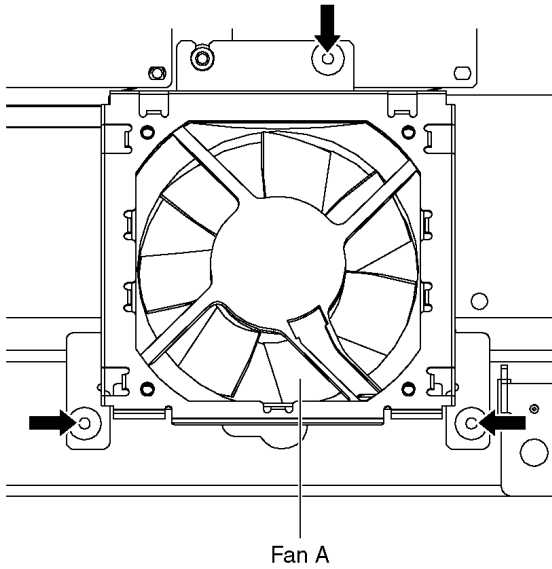

6.3. Remove the rear terminal cover

1. Remove the screws (×12 →, ×4 ⇨, ×2 ⇩).
2. Remove the rear terminal cover.

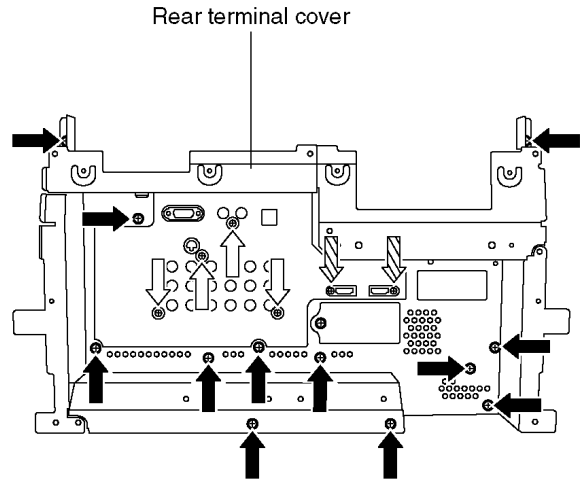


6.4. Remove the P-Board


Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (P2, P5, P9, P10, P11, P12, P23 and P25).
3. Remove the screws (×8 →) and remove the P-Board unit.

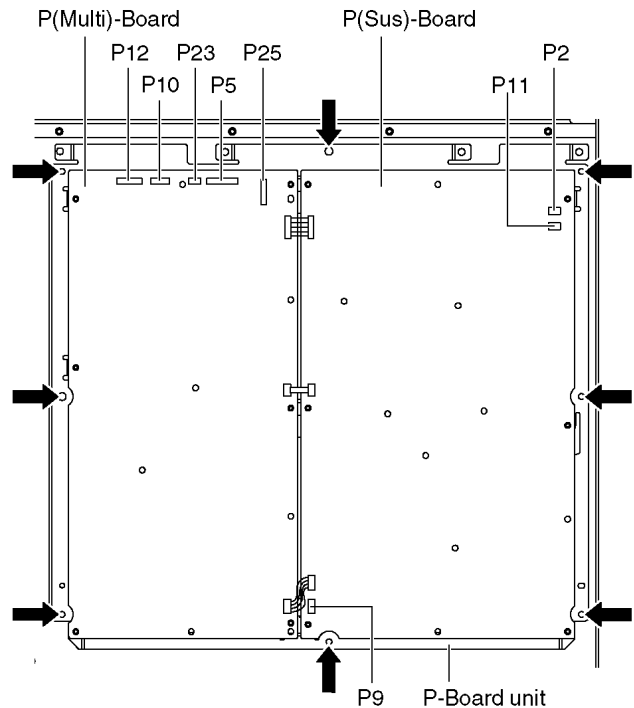


4. Remove the screws (×28 →) on the back side.

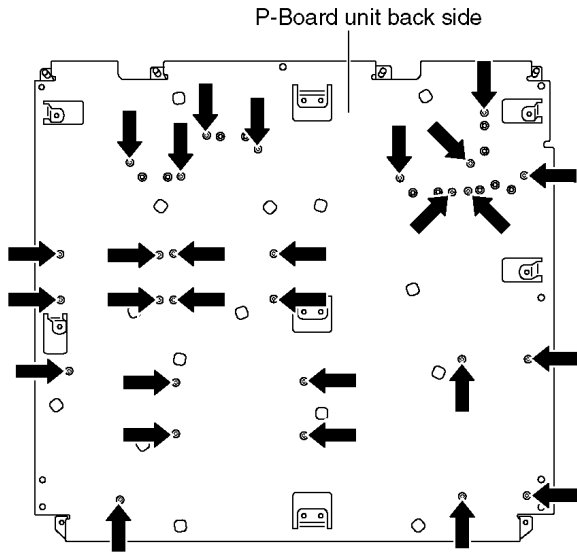

5. Disconnect the connectors (CN06-CN02, CN08-CN1602 and CN1701-CN1601).

6. Remove the screws (×12 ➡).

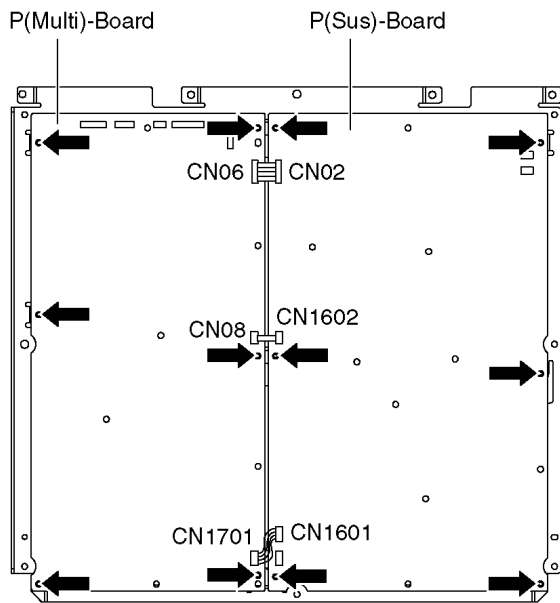


7. Remove the molding props (×8 ➡).

8. Remove the P(Multi)-Board.


9. Remove the molding props (×13 ⇄).


10. Remove the P(Sus)-Board.

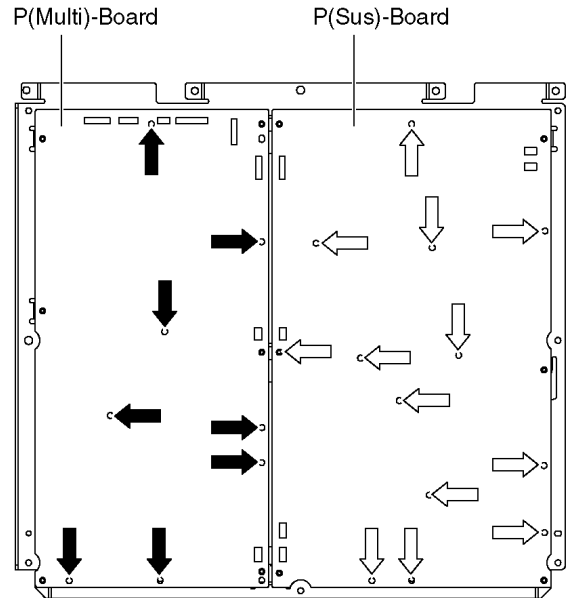

Note:


When assembling the P(Multi)-Board and the P(Sus)-Board, the position of each hole of the insulation sheets(A, B, C, D) is set to the position of each hole of the P(Multi)-Board and the P(Sus)-Board and then assemble them. (➡ marks indicate setting positions.)

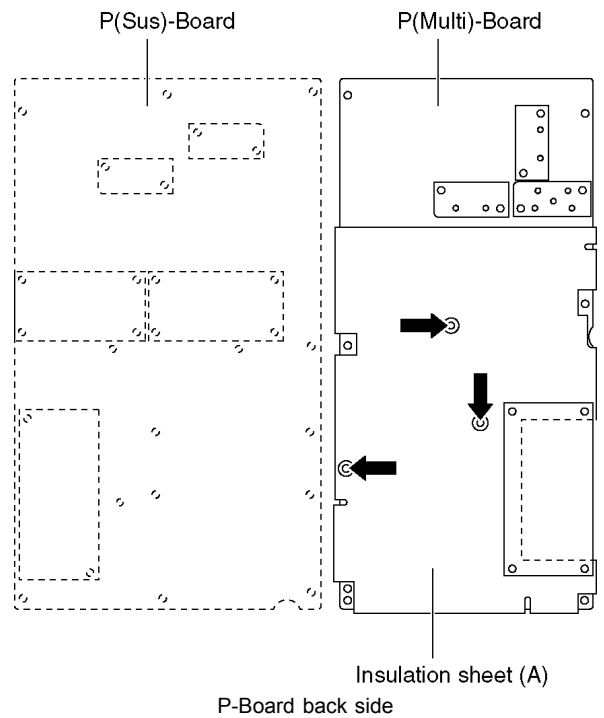

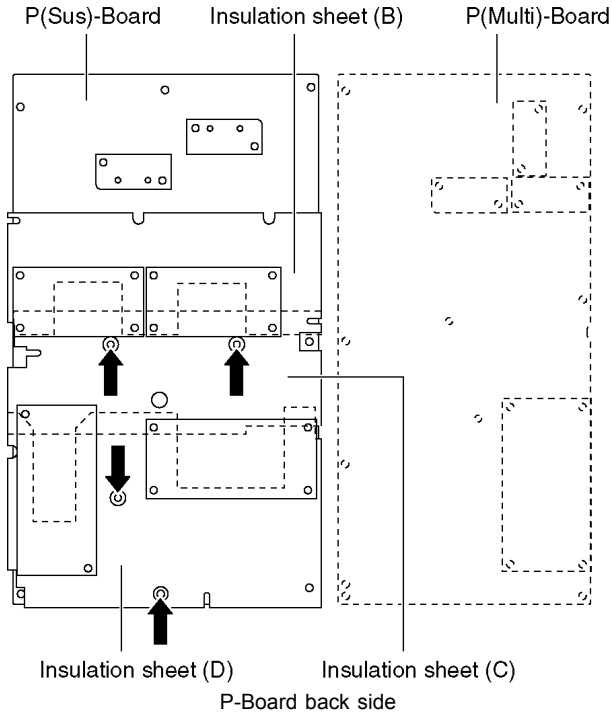


6.5. Remove the tuner unit

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (DG1, DG11, DG23, DG35, DG52, DH5, DH8, H3, H8, H11, H12 and H51).
3. Remove the screws (×4 →) and remove the tuner unit.

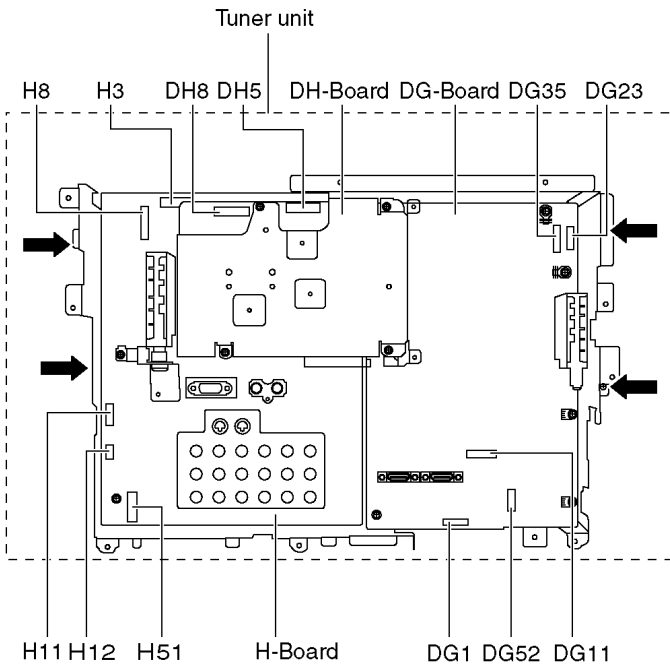


6.6. Remove the DH-Board


1. Remove the tuner unit. (See section 6.5.)
2. Remove the screws (×4 →) and remove the DH-Board cover and DH-Board.
(Be careful the connector (DH25-DG25) when remove the DH-Board.)

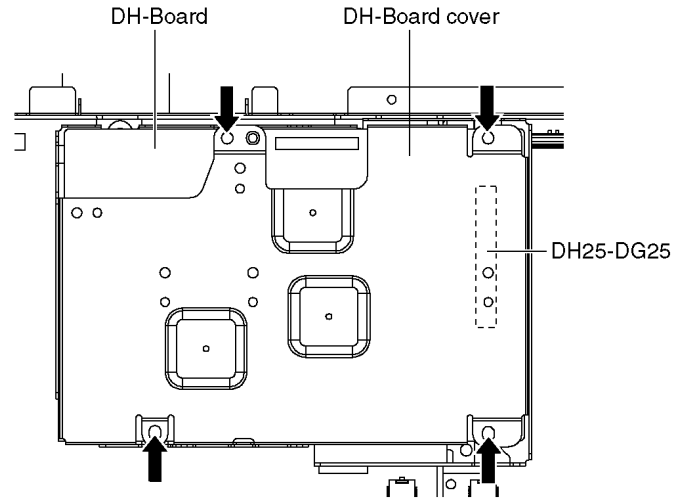

3. Remove the screw (×1 →) and remove the DH-Board from DH-Board cover.

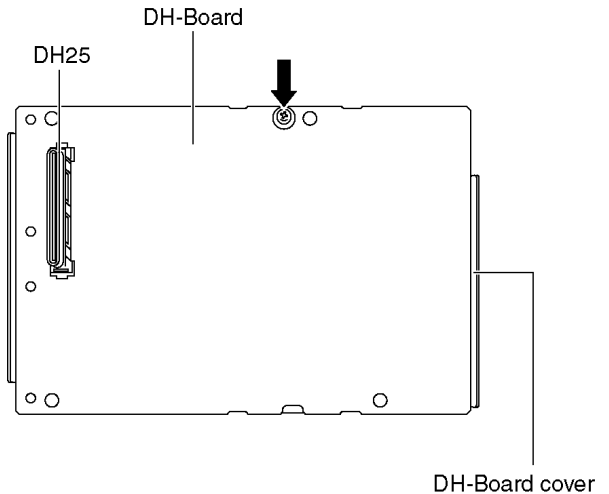


4. Remove the screws (×4 →) and remove the DH-Board frame.

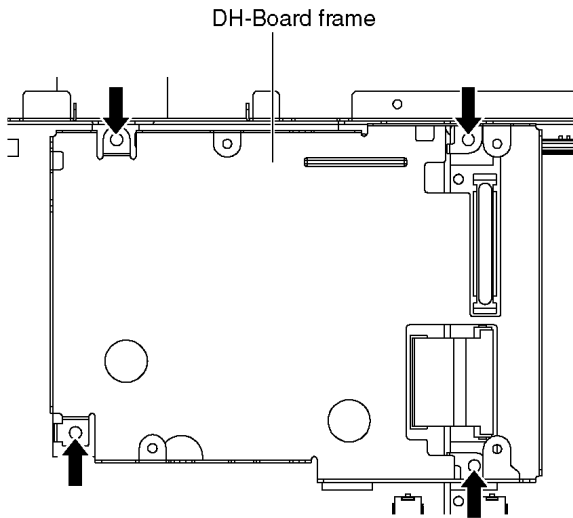


6.7. Remove the DG-Board

1. Remove the tuner unit. (See section 6.5.)
2. Remove the DH-Board and the DH-Board frame. (See section 6.6.)
3. Disconnect the connector (DG2 and DG6).
4. Remove the screws ($\times 5$ \rightarrow) and remove the DG-Board.

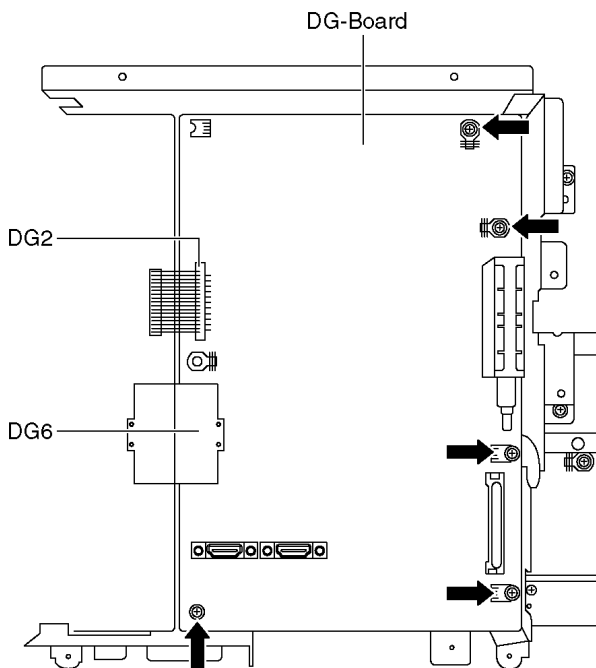



6.8. Remove the H-Board

1. Remove the tuner unit. (See section 6.5.)
2. Remove the DH-Board and the DH-Board frame. (See section 6.6.)
3. Remove the screw ($\times 1$ \rightarrow , $\times 1$ \Rightarrow) and remove the tuner mounting metal.
4. Disconnect the connector (DG2 and DG6).
5. Remove the screws ($\times 5$ \rightarrow) and remove the H-Board.

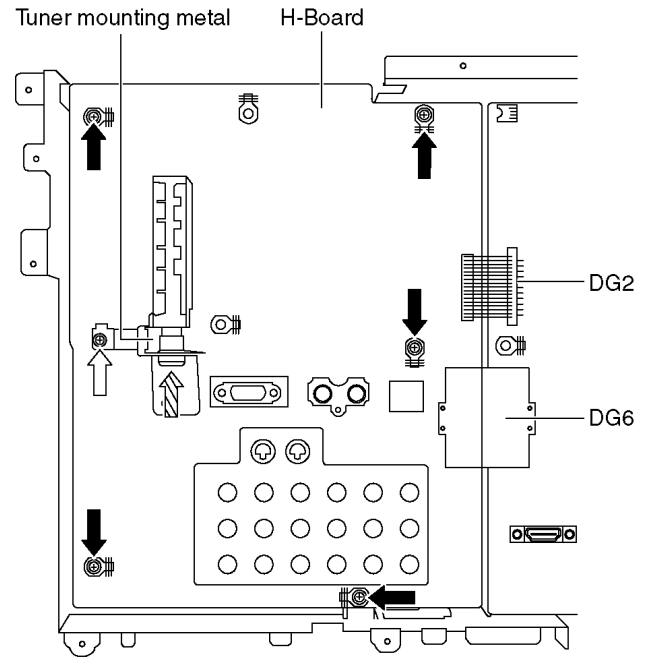


6.9. Remove the speaker box assy (left, right)

1. Unlock the cable clampers to free the cable.
2. Disconnect the relay connectors.
3. Remove the screw ($\times 1$ \rightarrow) and remove the speaker box assy (left, right).

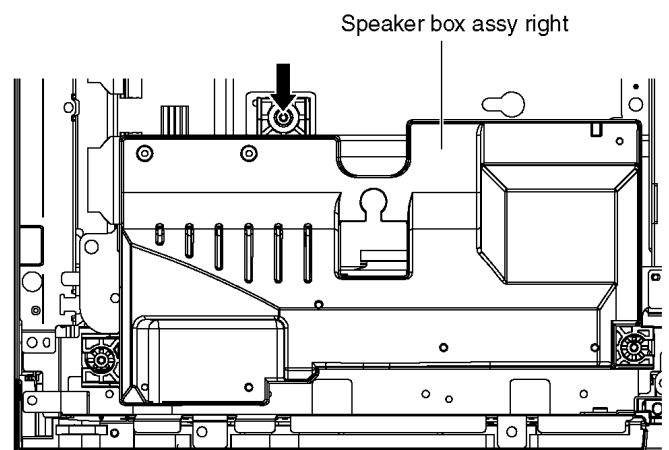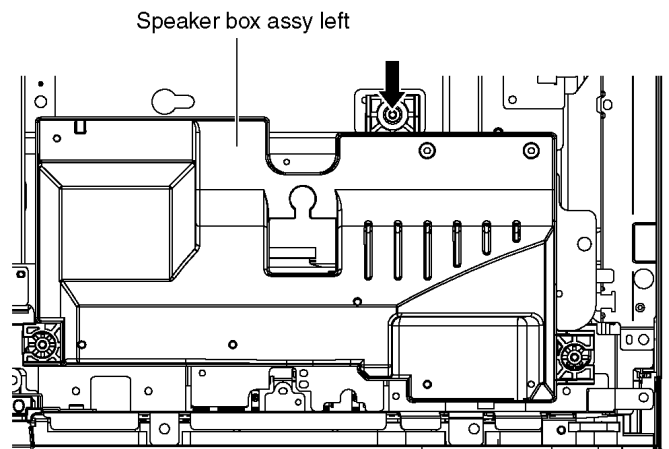


6.10. Remove the JG-Board

1. Disconnect the connector (JG8, JG9, JG10 and JG19).
2. Remove the screws (×4 ➡) and remove the JG-Board.

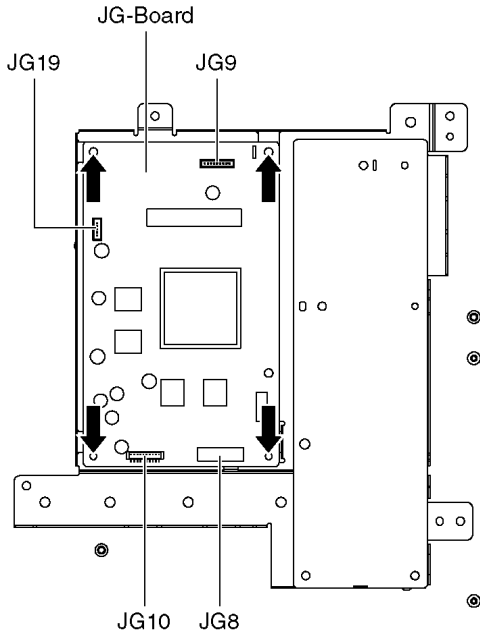


6.11. Remove the PA-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (PA3, PA5, PA8, PA10, PA32, PA34 and PA38).
3. Remove the screws (×4 ➡) and remove the PA-Board.

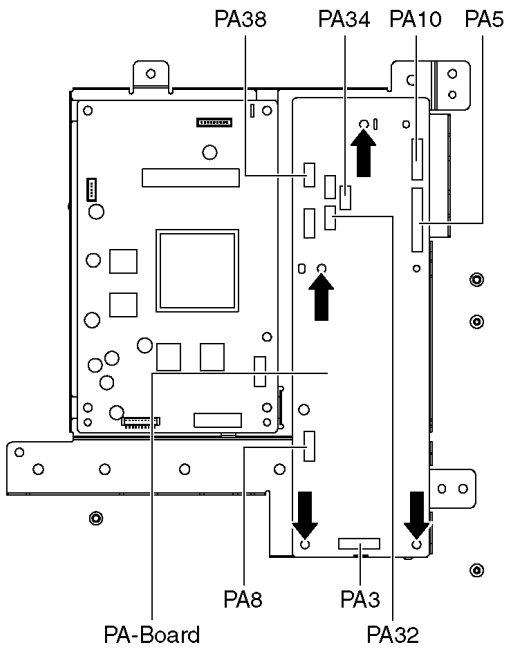


4. Remove the JG-Board. (See section 6.10.)
5. Remove the screws (×4 ➡) and remove the PA-Board fixing metal.

PA-Board fixing metal

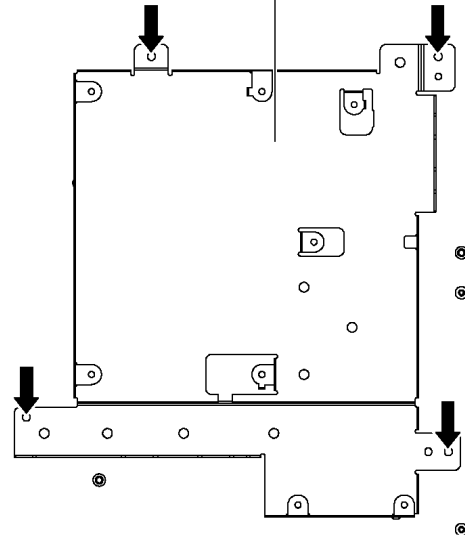


6.12. Remove the D-Board

1. Remove the PA-Board fixing metal. (See section 6.11.)
2. Disconnect the connectors (D3, D5, D20 and D25).
3. Disconnect the flexible cables (D31, D32, D33, D34, D35 and D36).
4. Remove the screws (×4 ➡) and remove the D-Board.

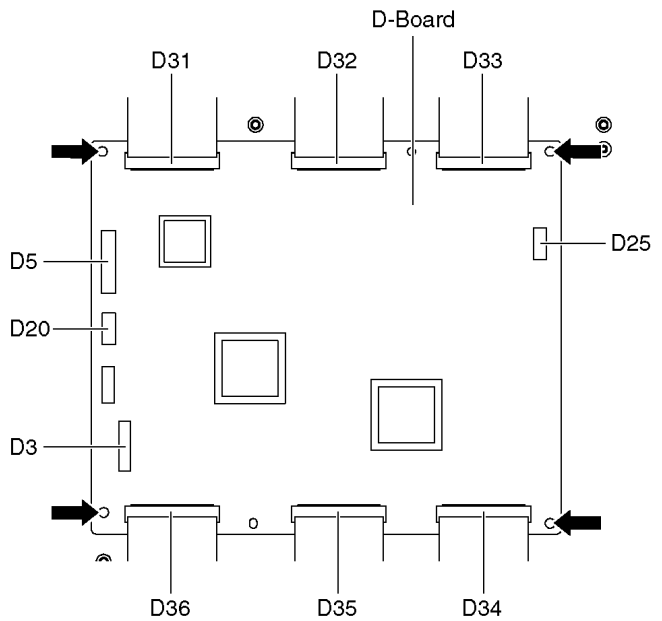


6.13. Remove the SU-Board

1. Remove the screws ($\times 4 \rightarrow$).
2. Remove the flexible cables (SU1, SU2, SU3, SU4 and SU5) connected to the SU-Board and remove the connectors (SC45-SU45).
3. Slide the SU-Board to the left to disconnect from connectors (SC41-SU41 and SC42-SU42) on the SC-Board and remove the SU-Board.

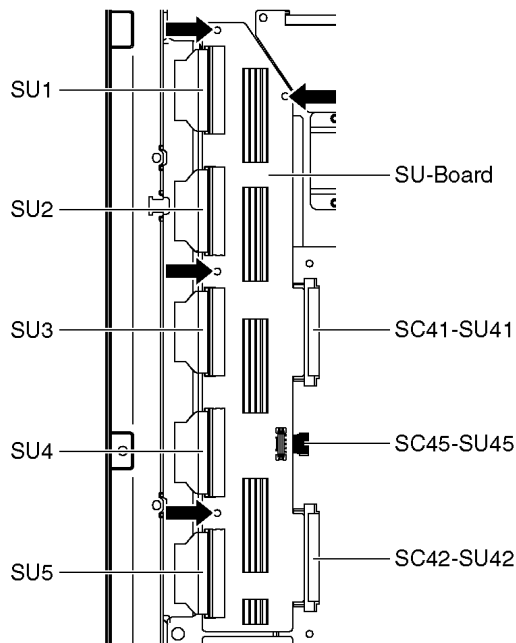


6.14. Remove the SD-Board

1. Remove the screws ($\times 4 \rightarrow$).
2. Remove the flexible cables (SD1, SD2, SD3, SD4 and SD5) connected to the SD-Board and remove the connector (SC46-SD46).
3. Slide the SD-Board to the left to disconnect from connectors (SC43-SD43 and SC44-SD44) on the SC-Board and remove the SD-Board.

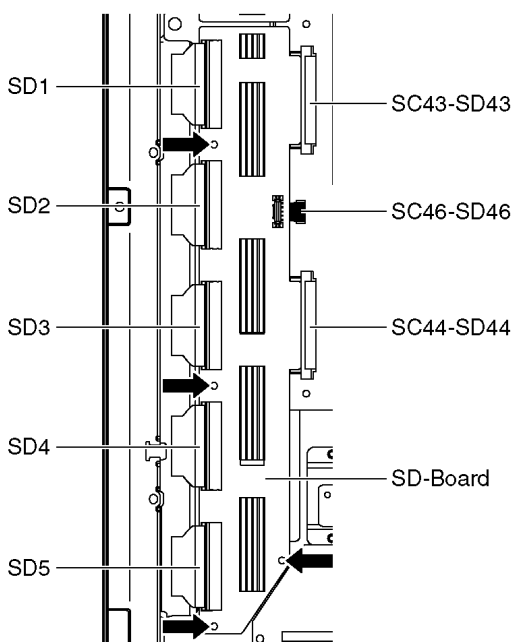


6.15. Remove the SC-Board

1. Unlock the cable clampers to free the cable.
2. Remove the SU-Board and SD-Board. (See section 6.13. and 6.14.)
3. Disconnect the connectors (SC2, SC20 and SC23).
4. Remove the screws ($\times 10 \rightarrow$) and remove the SC-Board.

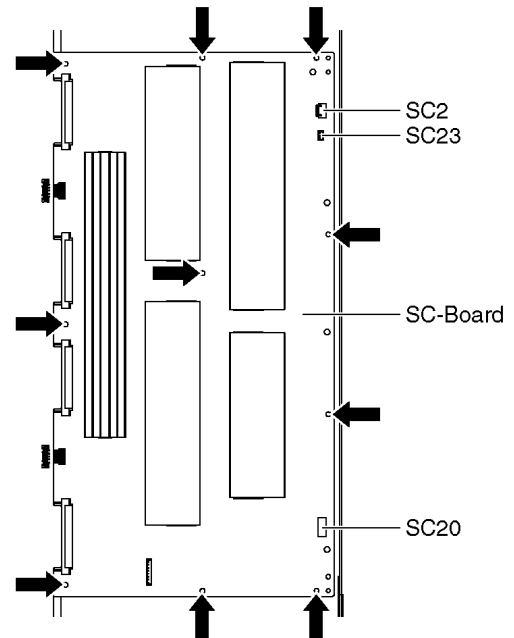


6.16. Remove the SS2-Board

1. Disconnect the connector (SS23) and disconnect the flexible cable (SS55).
2. Remove the screws ($\times 2 \rightarrow$) and remove the SS2-Board.

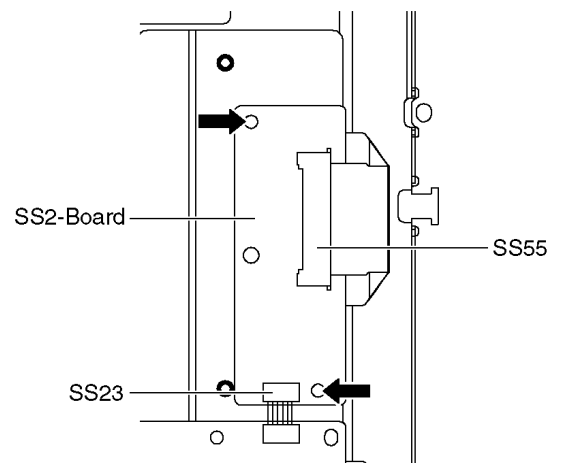


6.17. Remove the SS3-Board

1. Disconnect the connector (SS22) and disconnect the flexible cable (SS56).
2. Remove the screws (×2 ➡) and remove the SS3-Board.

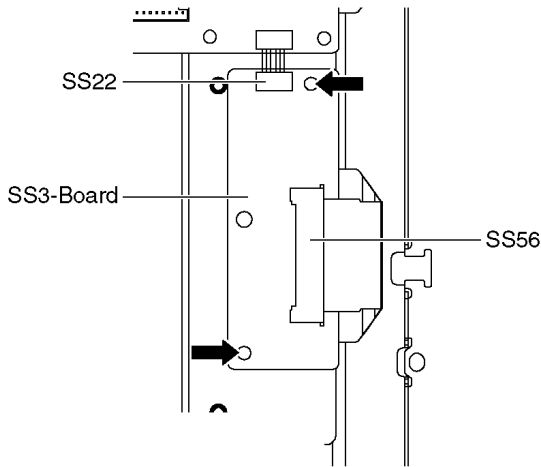


6.18. Remove the SS-Board

1. Disconnect the connectors (SS11, SS12, SS22, SS23, SS35, SS42 and SS44).
2. Remove a short-jumper connector SS34 and re-use for new SS-Board.
3. Disconnect the flexible cables (SS53, SS54, SS55 and SS56).
4. Remove the screws (×10 ➡) and remove the SS-Board.

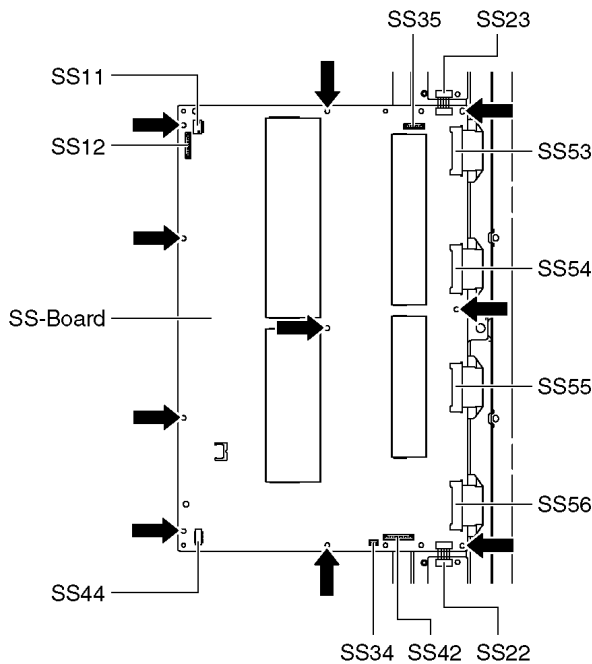


6.19. Remove the C1-Board

1. Remove the fan. (See section 6.2.)
2. Remove the flexible cables holder fastening screws (×10 ⇨).
3. Disconnect the flexible cables (CA1, CA2, CA3, CA4, and CA5).
4. Disconnect the flexible cables (C10 and C11).
5. Remove the screws (×6 ➡) and remove the C1-Board.

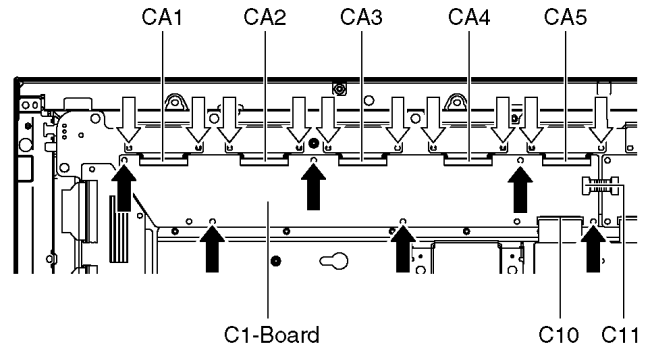


6.20. Remove the C2-Board

1. Remove the fans. (See section 6.2.)
2. Remove the flexible cables holder fastening screws (×10 ⇨).
3. Disconnect the flexible cables (CA6, CA7, CA8, CA9 and CA10).
4. Disconnect the flexible cables (C21, C22, C24 and C25).
5. Remove the screws (×6 ➡) and remove the C2-Board.

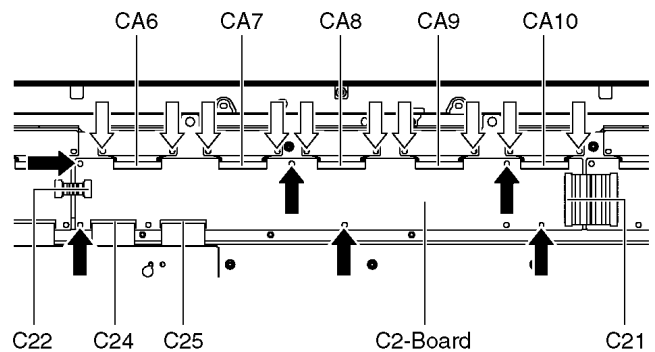


6.21. Remove the C3-Board

1. Remove the fans. (See section 6.2.)
2. Remove the flexible cables holder fastening screws ($\times 10 \Rightarrow$).
3. Disconnect the flexible cables (CA11, CA12, CA13, CA14 and CA15).
4. Disconnect the flexible cable (C31).
5. Disconnect the connector (C35).
6. Remove the screws ($\times 6 \Rightarrow$) and remove the C3-Board.

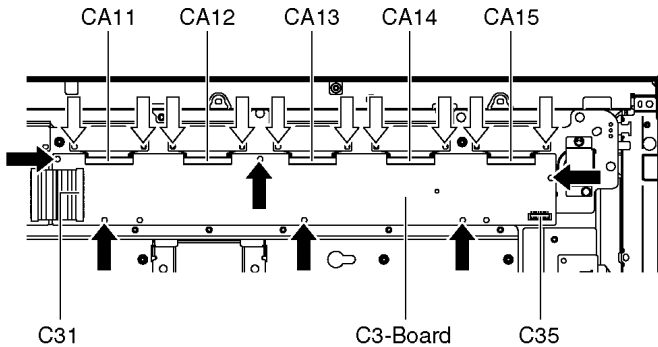


6.22. Remove the C4-Board

1. Remove the speaker box assy left. (See section 6.9.)
2. Remove the flexible cables holder fastening screws ($\times 10 \Rightarrow$).
3. Disconnect the flexible cables (CB11, CB12, CB13, CB14 and CB15).
4. Disconnect the flexible cable (C41).
5. Disconnect the connectors (C42 and C44).
6. Remove the screws ($\times 6 \Rightarrow$) and remove the C4-Board.

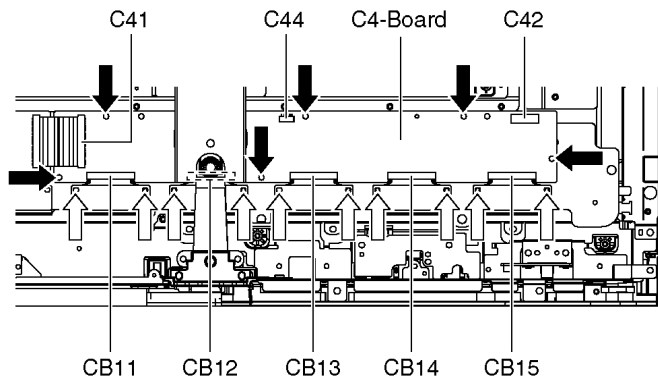


6.23. Remove the C5-Board

1. Remove the tuner unit. (See section 6.5.)
2. Remove the flexible cables holder fastening screws ($\times 10 \Rightarrow$).
3. Disconnect the flexible cables (CB6, CB7, CB8, CB9 and CB10).
4. Disconnect the flexible cables (C51, C52, C54 and C55).
5. Remove the screws ($\times 6 \Rightarrow$) and remove the C5-Board.

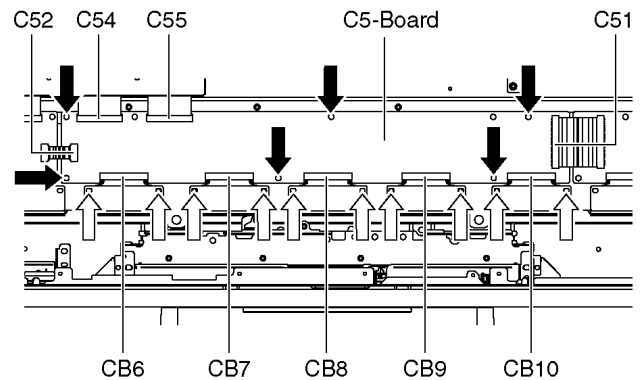


6.24. Remove the C6-Board

1. Remove the speaker box assy right. (See section 6.9.)
2. Remove the flexible cables holder fastening screws ($\times 10 \Rightarrow$).
3. Disconnect the flexible cables (CB1, CB2, CB3, CB4 and CB5).
4. Disconnect the flexible cables (C60 and C61).
5. Remove the screws ($\times 6 \Rightarrow$) and remove the C6-Board.

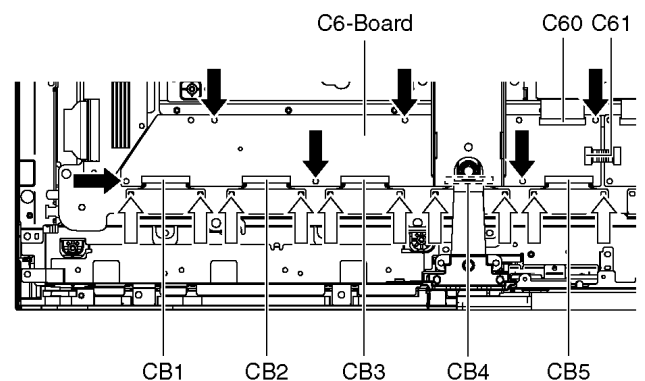


6.25. Remove the stand brackets and rear mounting metals

1. Remove the plasma panel section from the servicing stand and lay on a flat surface such as a table (covered) with the plasma panel surface facing downward.
2. Remove the stand brackets (left, right) fastening screw (× 1 each).
3. Remove the rear mounting metals (left, right) fastening screws (×4 each).
4. Remove the stand brackets and rear mounting metals.

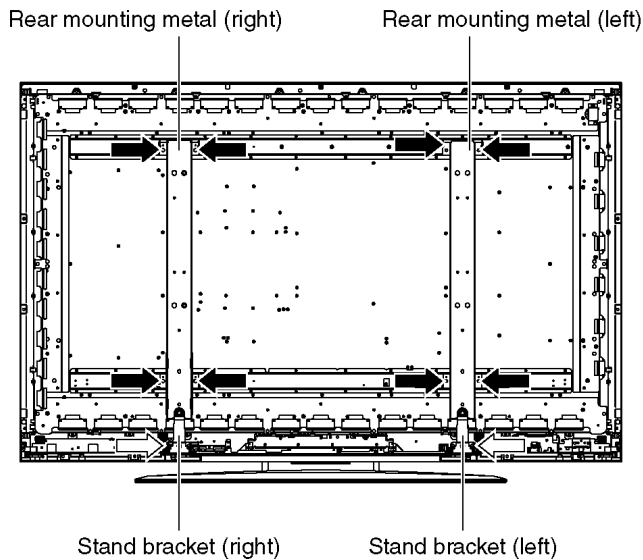


5. Remove the fastening screws (×4 each).
6. Remove the stand brackets from rear mounting metals.

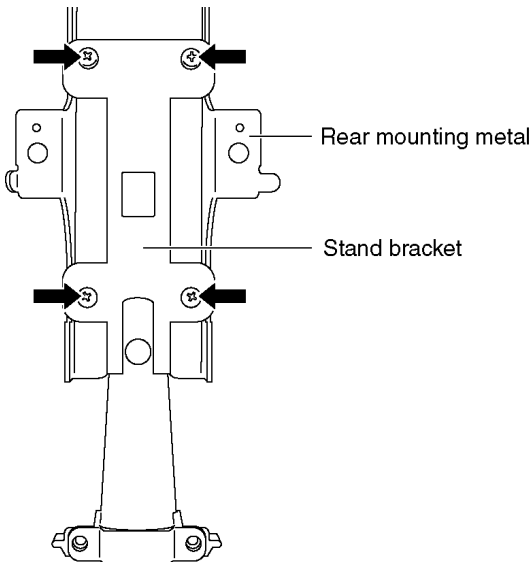


6.26. Remove the front bracket

1. Unlock the cable clampers to free the cable.
2. Remove the screws (×3) and remove the front bracket.

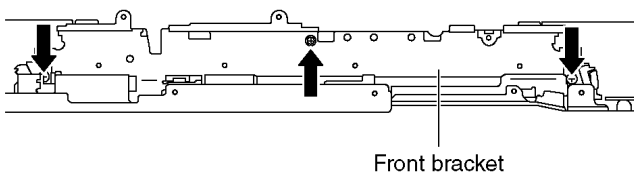


6.27. Remove the G-Board and GH-Board

1. Remove the front bracket. (See section 6.26.)
2. Remove the screws (×4) and remove the front shield case (front).

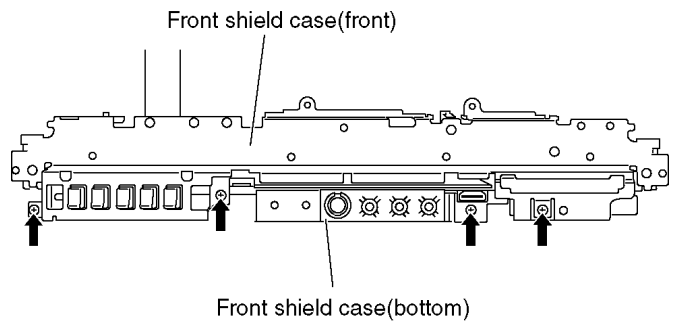


3. Remove the screws (×4) and disconnect the connector (G51, G52 and GH11).
4. Remove the G-Board and GH-Board.

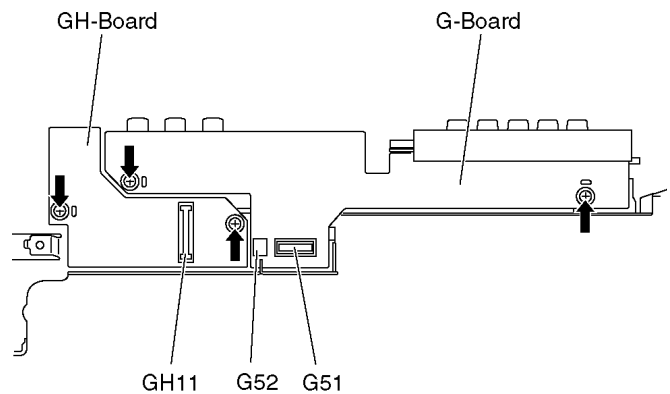


6.28. Remove the GS-Board

1. Remove the stand bracket right and rear mounting metal right. (See section 6.25.)
2. Unlock the cable clampers to free the cable.
3. Remove the screws (×2).
4. Remove the SD card unit.

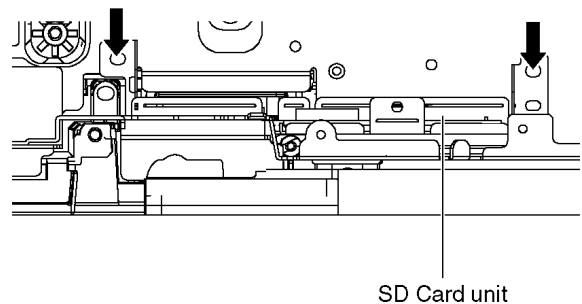


5. Disconnect the connector (GS09 and GS52).
6. Remove the screw (×1).
7. Remove the GS-Board.

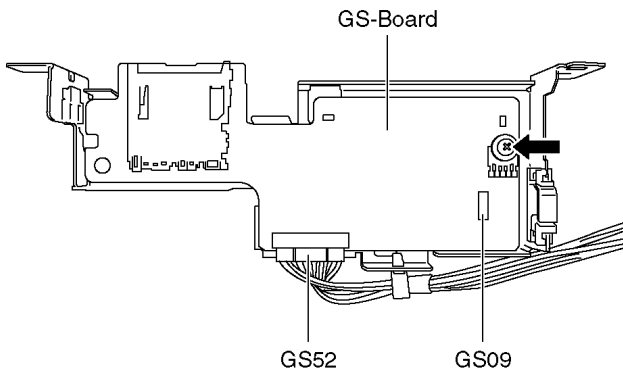


6.29. Remove the S-Board

1. Remove the speaker box assy left. (See section 6.9.)
2. Remove the screws (×2 →) and remove the S-Board unit.

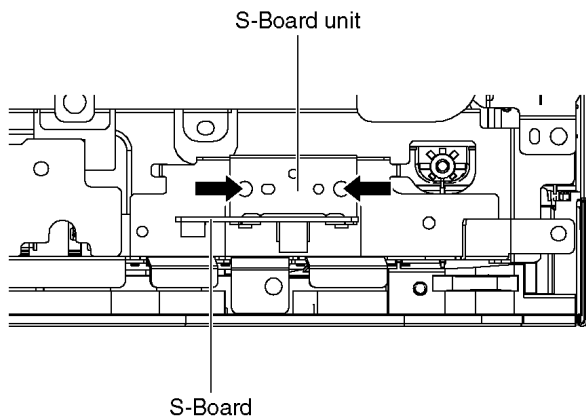


3. Disconnect the connector (S1).
4. Remove the screws (×2 →) and remove the S-Board.

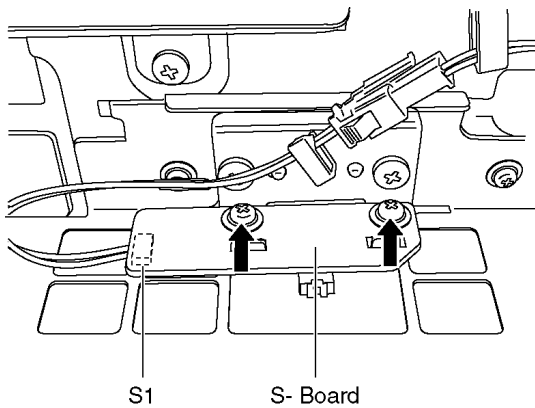


6.30. Remove the K-Board

1. Remove the speaker box assy left. (See section 6.9.)
2. Unlock the cable clampers to free the cable.
3. Remove the screws (×2 →).
4. Disconnect the connectors (K1) and remove the K-Board.

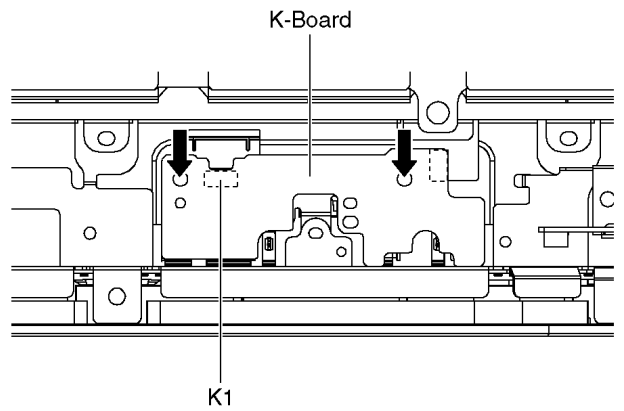


6.31. Remove the Plasma panel section from the Cabinet assy (glass)

1. Remove the stand brackets (left, right) fastening screw (×1 ⇔ each).
2. Remove the cabinet assy and the plasma panel fastening screws (×14 →).

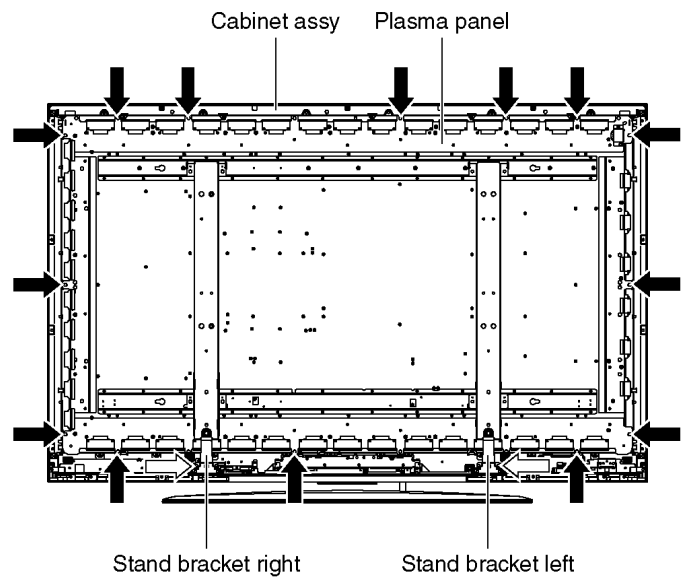


3. For leaving the plasma panel from the cabinet assy, pull the bottom of the front frame forward, lift, and remove.

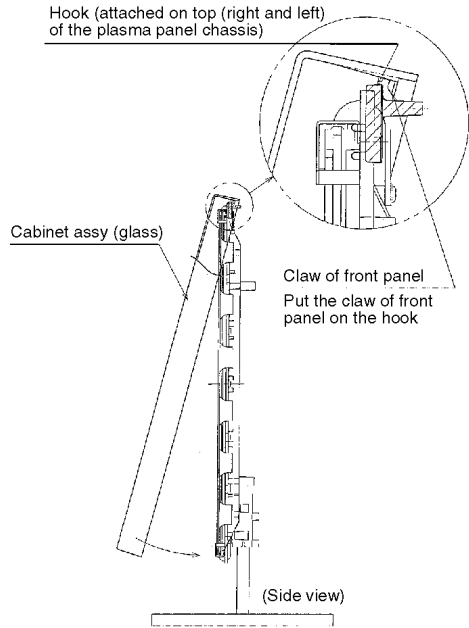


6.32. Remove the squawker speaker

1. Remove the cabinet assy. (See section 6.31.)
2. Disconnect the relay connectors.
3. Remove the screws (×12 ➡).
4. Remove the glass holders (left, right).

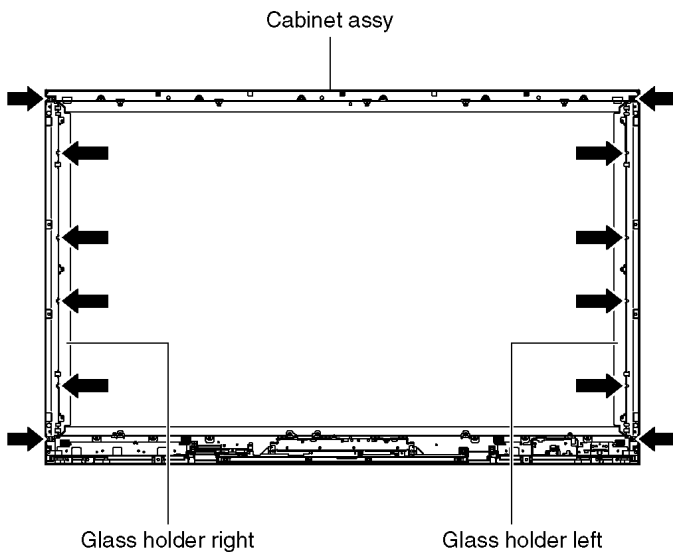

5. Remove the screws (×2 ➡).
6. Remove the squawker speaker.

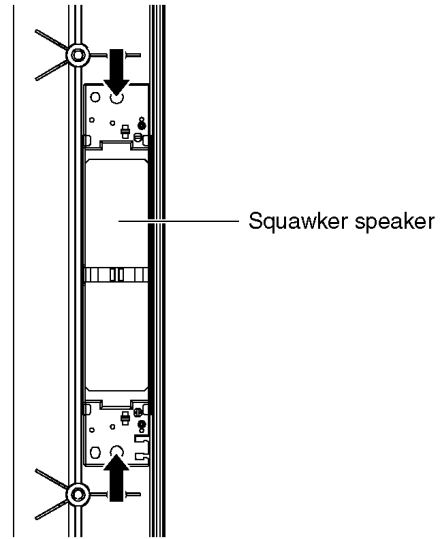

6.33. Replace the plasma panel (finished)

1. Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
2. Attach the C1, C2, C3,C4,C5-Board and the C6-Board, connect the flexible cables (×30) from the Plasma panel to the C1, C2, C3,C4,C5-Board and the C6-Board, and fit the flexible cable holders.
3. Attach the Hooks (left, right) and fit the Reinforcement Angles (L, R) and the Connection Plate (A, B, C, D) to the new plasma panel.
4. Place the plasma panel section on the servicing stand.
5. Attach the cabinet assy and each P.C.Board and so on, to the new plasma panel.

*** When fitting the cabinet assy, be careful not to allow any debris, dust or handling residue to remain between the front glass and plasma panel.**

7 Caution statement

7.1. Caution statement.

Caution:

Please confirm that all flexible cables are assembled correctly.


Also make sure that they are locked in the connectors.

Verify by giving the flexible cables a very slight pull.

8 Location of Lead Wiring

8.1. Lead of Wiring (1)




The wire is dressed as shown in figure.

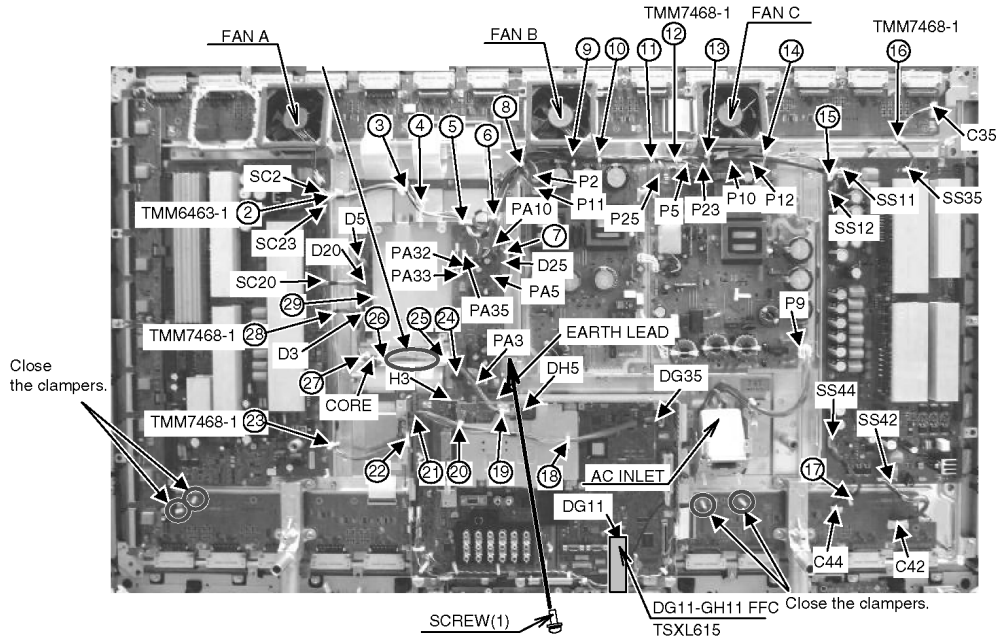

| Connector No. | Clamper No. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|-------------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|--|--|--|--|--|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | | | | | | | | | | | |
| H51 - G51 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DG52 - GS52 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H11 - SP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H12 - SP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D3 - DG35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 - PA3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H8 - JG10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P5 - PA5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DH5 - D5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DH8 - JG8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GS9 - JG19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| JG9 - DG23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P10 - PA10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FAN-A - PA32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FAN-B - PA34 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FAN-C - PA36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AC-INLET - P9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DG11(FFC) - GH11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D25 - P25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C35 - SS35 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C42 - SS42 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C44 - SS44 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SS11 - P11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SS12 - P12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P23 - SC23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D20 - SC20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SC2 - P2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

8.2. Lead of Wiring (2)


The wire is dressed as shown in figure.

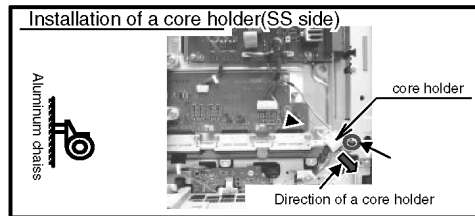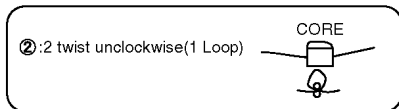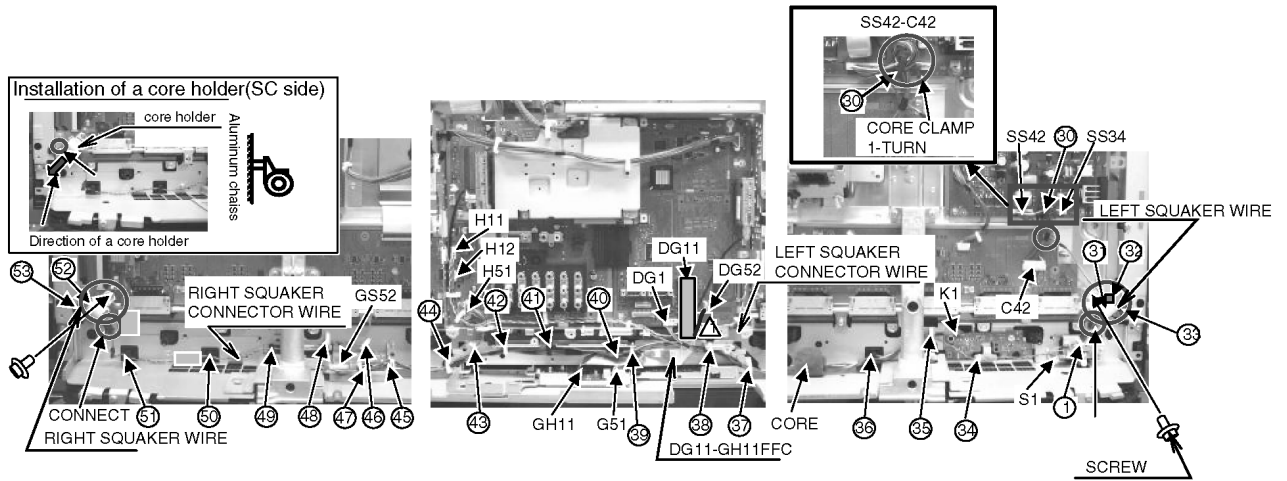


| CONNECTION AND CLAMPING | | Clamper No. | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|-------------------|-------------|----|----|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | | 30 | 31 | 32 | 33 | 1 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 |
| LEFT WOOFER CONNECTION WIRE | H11 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LEFT WOOFER WIRE | ② | | ○ | | | | | | | | | | | | | | | | | | | | | | |
| RIGHT WOOFER CONNECTION WIRE | H12 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | RIGHT WOOFER WIRE | | | | | | | | | | | | | | | | | | | | | | | | | |
| DG52 | GS52 | | | | | | | | | | | | | | | | | | | | | | | | | |
| K1 | DG1 | | | | | | | | | | | | | | | | | | | | | | | | | |
| DG11 | GH11 | | | | | | | | | | | | | | | | | | | | | | | | | |
| H51 | G51 | | | | | | | | | | | | | | | | | | | | | | | | | |
| S1 | SS34 | ○ | ○ | ○ | | | | | | | | | | | | | | | | | | | | | | |
| C42 | SS42 | ② | | | | | | | | | | | | | | | | | | | | | | | | |

8.3. Lead of Wiring (3)

The wire is dressed as shown in figure.

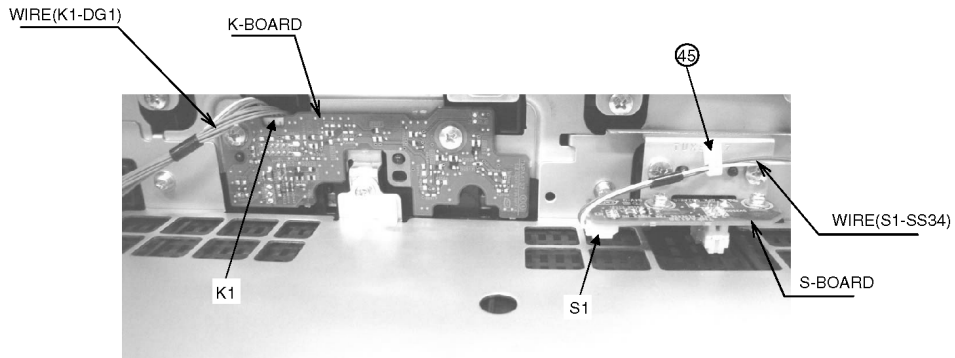

| CONNECTION AND CLAMPING | | CLAMP No. | | | | | | |
|-------------------------|--|-----------|--|--|--|--|--|--|
| | | 45 | | | | | | |
| S1 - SS34 | | ○ | | | | | | |
| K1 - DG1 | | | | | | | | |

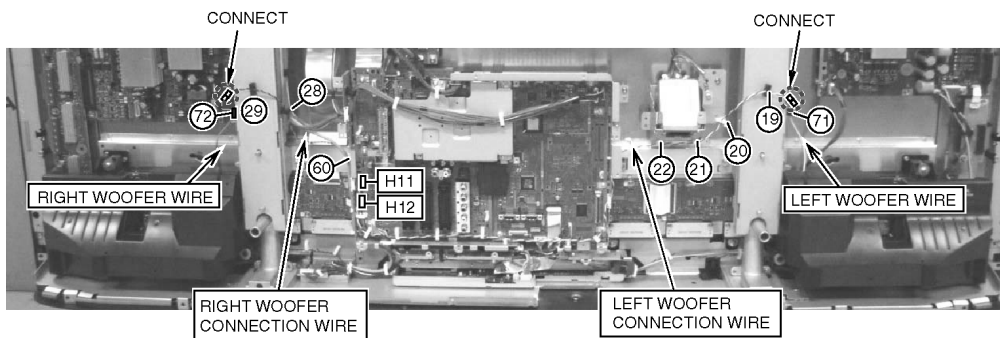

| CONNECTION AND CLAMPING | | CLAMP No. | | | | | | | | |
|------------------------------|-------------------|-----------|----|----|----|----|----|----|----|----|
| | | 19 | 20 | 21 | 22 | 28 | 29 | 60 | 71 | 72 |
| LEFT WOOFER CONNECTION WIRE | H11 | ○ | ○ | ○ | ○ | | | | | |
| | LEFT WOOFER WIRE | | | | | | | | ○ | |
| RIGHT WOOFER CONNECTION WIRE | H12 | | | | | ○ | ○ | ○ | | |
| | RIGHT WOOFER WIRE | | | | | | | | | ○ |

9 Self-check Function

Use the self-check function to test the unit.

1. Checking the IIC bus lines
2. Power LED Blinking timing

9.1. Check of the IIC bus lines

9.1.1. How to access

Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [OK] button on the remote control for more than 3 seconds.

Self-check indication and forced to factory shipment setting:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [MENU] button on the remote control for more than 3 seconds.

9.1.2. Screen display

| | | |
|--------------|--|---------------------|
| 58FHD SET | Panasonic 2007PDP SELF CHECK COMPLETE | 58pz700a.dat:000027 |
|--------------|--|---------------------|

| | | | | | |
|-----------|----|-------------|------------|----------|----------|
| ADV | OK | PEAKS-SOFT | 1.010 | SUM | 1b90 |
| VSW | OK | PEAKS-EEP | 01.02.0281 | OPTION 1 | 3c |
| ADAV | OK | GENX-SOFT | 1.00.00 | OPTION 2 | 00 |
| ASW | OK | GENX-EEP | 1.02.00 | OPTION 3 | 00 |
| GENX | OK | GENX-ROMCOR | 1.01.00 | Check | 3c |
| MEN1 | OK | PDP-MCU | 05.03 | Model ID | 04 |
| MEN2 | OK | PDP-EEP | 57.01 | | 02010000 |
| TUN1 | OK | PDP-FPGA | 66.03 | | 00000040 |
| ※2 TUN2 | OK | PDP-PD1-M | 58.00 | | |
| GC3F3 | OK | GC5P-EEP | 20 | | |
| ※1 D-TUN | OK | FPGA | 1.01 | | |
| ※1 OFDM | OK | Pro-SOFT | 0.470 | | |
| PDP-PANEL | OK | Pro-EEP | 1.00 | | |
| TEMP | OK | Pro-BOOT | 0.100 | | |
| GC5P | OK | USB-Reader | 4.99 | | |
| FPGA | OK | | | | |
| H.264 | OK | | | | |

※1 PZ model only

※2 Displayed for 2 tuner models only

9.1.3. Check Point

Confirm the following parts if NG was displayed.

| Display | Ref. No. | Description | P.C.B. |
|-----------|----------|---------------------|----------|
| ADV | IC4510 | AD/HDMI | DG-Board |
| VSW | IC3001 | Video SW | H-Board |
| ADAV | IC2106 | Sound Processor | H-Board |
| ASW | IC3101 | Audio SW | H-Board |
| GENX | IC1100 | GenX (STB MCU) | DG-Board |
| MEM1 | IC1101 | EEPROM (GenX) | DG-Board |
| MEM2 | IC8601 | EEPROM (Peaks) | DG-Board |
| TUN1 | TU3200 | Tuner (Main) | H-Board |
| TUN2 | TU3201 | Tuner (Sub) | H-Board |
| GC3FS | IC4001 | Global core (Sub) | DG-Board |
| D-TUN | TU8301 | Tuner (Digital) | DG-Board |
| OFDM | IC8301 | Digital demodulator | DG-Board |
| PDP-PANEL | IC9003 | MICOM | D-Board |
| TEMP | IC4800 | Temp Sensor | DG-Board |
| GC5P | IC5100 | Global core | DH-Board |
| FPGA | IC5105 | FPGA | DH-Board |
| H.264 | IC1501 | H.264 | JG-Board |

9.1.4. Exit

Disconnect the AC cord from wall outlet.

9.2. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.


| Blinking Times | Blinking timing | Contents | Check point |
|----------------|-----------------|--|----------------------------------|
| 1 | | No particular check point | - |
| | | Panel Status | - |
| | | STB 5V SENSE Time out | DG-Board |
| 2 | | 15V SOS | D-Board |
| 3 | | 3.3V SOS | D-Board |
| 4 | | Power SOS | P-Board |
| 5 | | 5V SOS | D-Board |
| 6 | | Driver SOS1 (SC Energy recovery circuit) | SU-Board SD-Board SC-Board |
| 7 | | Driver SOS2 (SC floating voltage area) | SU-Board SD-Board SC-Board |
| 8 | | Driver SOS3 (SS Energy recovery circuit) | SS-Board |
| 9 | | Panel Config SOS | - |
| 10 (0a) | | Sub 5V SOS Main 3.3V SOS DTV 9V SOS Tuner Power SOS | DG-Board |
| 11 (0b) | | Fan SOS | FAN PA-Board |
| 12 (0c) | | Sound SOS | H-Board |
| 13 (0d) | | Communication Error with IC8001 (Pesks Lite 2) | DG-Board |

9.3. No Power


First check point

There are following 2 states of No Power indication by power LED.


1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 9.2.)

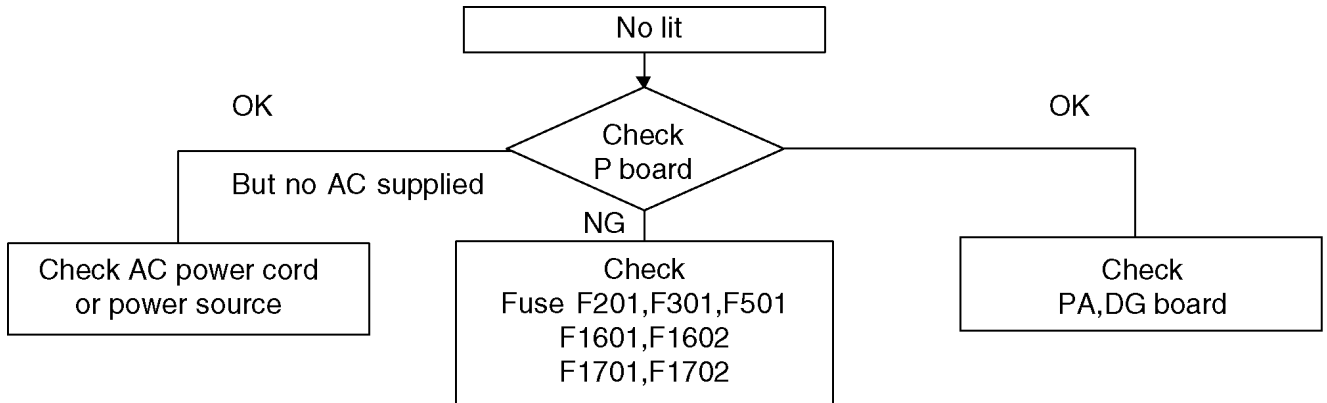

9.4. No Picture

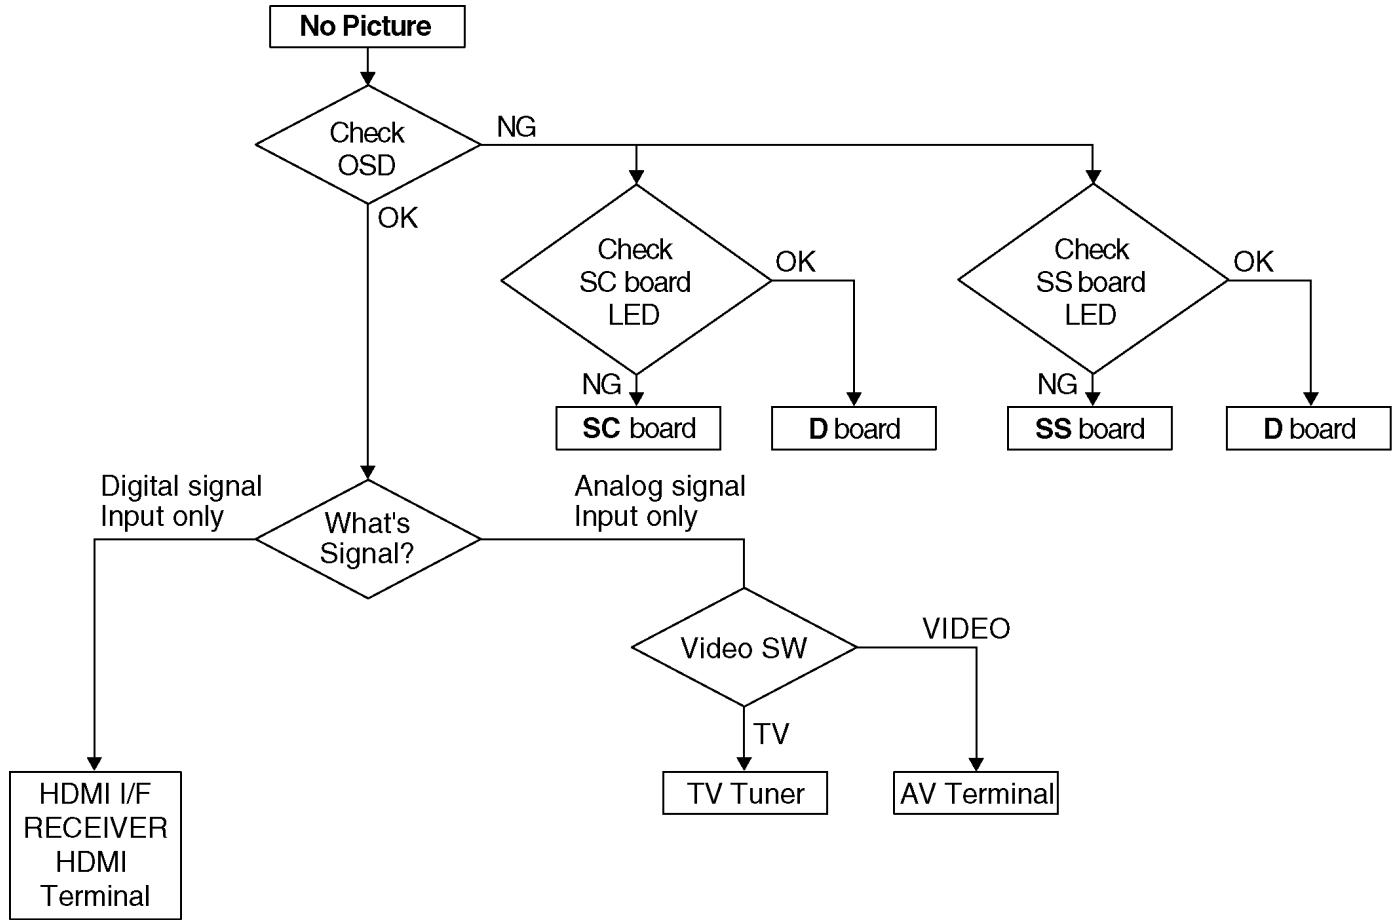


Drive circuits LED indicator

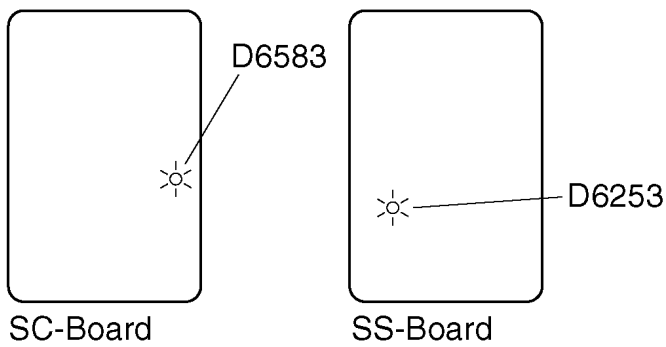

9.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

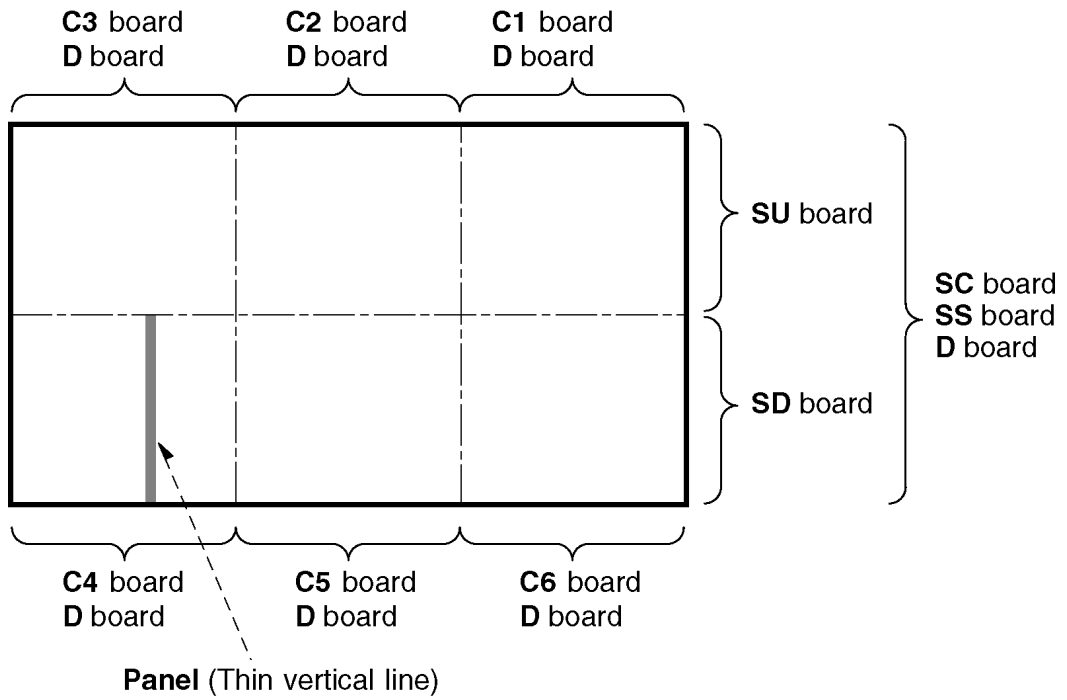


<Local screen failure chart>

Fig-1

10 Service Mode

10.1. How to enter into Service Mode

While pressing [VOLUME (-)] button of the main unit, press [INFO](PZ model)/[RECALL](PY model) button of the remote control three times within 3 seconds.

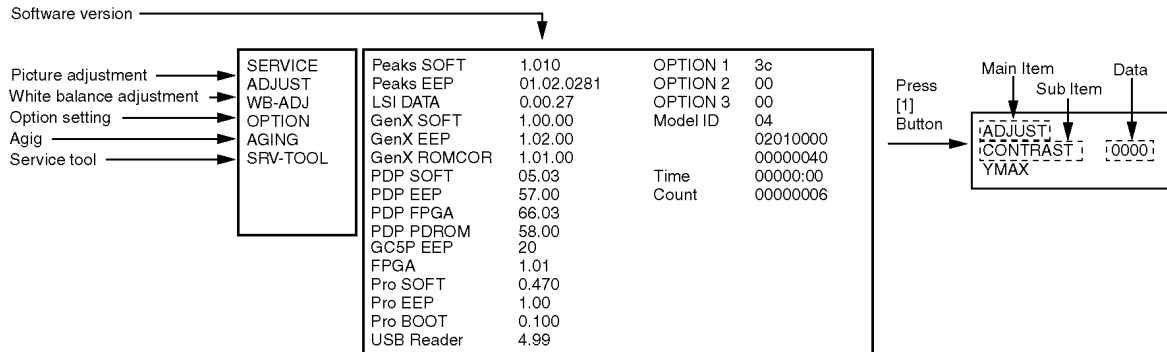

10.1.1. Key command

- “1” button...Main items Selection in forward direction
- “2” button...Main items Selection in reverse direction
- “3” button...Sub items Selection in forward direction
- “4” button...Sub items Selection in reverse direction
- “RED” button...All Sub items Selection in reverse direction
- “GREEN” button...All Sub items Selection in forward direction
- “VOL” button...Value of sub items change in forward direction (+), in reverse direction (-)

10.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

| Main item | Sub item | Sample data | Remark |
|-----------|--------------------------|-------------|----------|
| ADJUST | CONTRAST | 24B | |
| | COLOR | 2B | |
| | TINT | 00 | |
| | Video-Gain2 | 199 | |
| | SUB-BRT | 810 | |
| | H-POS | 0 | |
| | H-AMP | 0 | |
| | V-POS | 0 | |
| | V-AMP | 0 | |
| | WB-ADJ | R-CUT | |
| G-CUT | | 80 | |
| B-CUT | | 80 | |
| R-DRV | | E6 | |
| G-DRV | | DB | |
| B-DRV | | FC | |
| ALL-CUT | | 80 | |
| ALL-DRV | | FC | |
| OPTION | Panel-Type | 58FHD | |
| | Boot | ROM | |
| | STBY-SET | 00 | |
| | Emergency | ON | |
| | Y/C Delay | -1 | |
| | OPT 1 | 00111100 | |
| | OPT 2 | 11100010 | |
| | OPT 3 | 01101111 | |
| AGING | RGBW | | |
| | All white (COUNTER) | | |
| | All white | | |
| | All red | | |
| | All green | | |
| | All blue | | |
| | ON/OFF | | |
| | Diagonal lamp W | | |
| | Diagonal lamp R | | |
| | Diagonal lamp G | | |
| | Diagonal lamp B | | |
| | 1% WINDOW | | |
| | COLOR BAR | | |
| | A B zone/checkerd 4 trio | | |
| | SCROLL BAR | | |
| 2dot | | | |
| SRV-TOOL | | | see next |

| Destinations | A | AZ | M | MR |
|--------------|-----------|-------------|--------|------|
| | Australia | New Zealand | M.East | IRAN |
| OPTION1 | 18 | 38 | 38 | 38 |
| OPTION2 | 22 | E2 | E2 | E2 |
| OPTION3 | 00 | 6F | 6F | 6F |

10.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

10.2. Service tool mode

10.2.1. How to access

1. Select "SRV-TOOL" in Service Mode.
2. Press [OK] button on the remote control.

| | | | |
|-----------------------------------|---------------------------|---------------|--|
| | SRV-TOOL | | |
| | | | |
| | | | |
| Display of TD2Microcode version → | TD2Microcode:81c0000e | | |
| Display of Flash ROM maker code → | Flash ROM : 1 - 227E | | |
| Display of SOS History → | PTCT : 00 .00 .00 .00 .00 | Time 00000:40 | Count 0000022 ← POWER ON TIME/COUNT Press [MUTE] buton (3sec) |
| | | | |

10.2.2. Display of SOS History

SOS History (Number of LED blinking) indication.

From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.

This indication except 2nd and 1st occurrence after shipment will be cleared by "Self-check indication and forced to factory shipment setting".

10.2.3. POWER ON TIME/COUNT

Time : Cumulative power on time, indicated hour : minute by decimal

Count : Number of ON times by decimal

Note : This indication will not cleared by self-check or any command.

10.2.4. Exit

1. Disconnect the AC code from wall outlet.

11 Adjustment Procedure

11.1. Driver Set-up

11.1.1. Item / Preparation

1. Input a white signal to plasma video input.

2. Set the picture controls as follows.

Picture menu: Dynamic

PNR: OFF

Aspect: 16:9

Caution

1. First perform Vsus adjustment.

2. Confirmation of Vscn voltage should be performed after confirmation of Vad adjustment.

When Vad=-90V, Voltage of Vscn is 50V \pm 4V.

11.1.2. Adjustments


Adjust driver section voltages referring the panel data on the panel data label.

Check or adjust the following voltages with the multimeter.

| Name | Test Point | Voltage | Volume | Remarks |
|------|-------------|-------------------|-------------|---------|
| Vsus | TPVSUS (SS) | Vsus \pm 2V | VR251 (P) | * |
| Ve | TPVE (SS) | Ve \pm 1V | VR6000 (SS) | * |
| Vset | TPVSET (SC) | 240V \pm 7V | Fixed | |
| Vad | TPVAD (SC) | -90V \pm 1V | VR6600 (SC) | |
| Vscn | TPVSCN (SC) | Vad+140V \pm 4V | Fixed | |
| Vda | TPVDA (SS) | 75V + 1V, -3V | Fixed | |

*See the Panel label.

Panel Label information

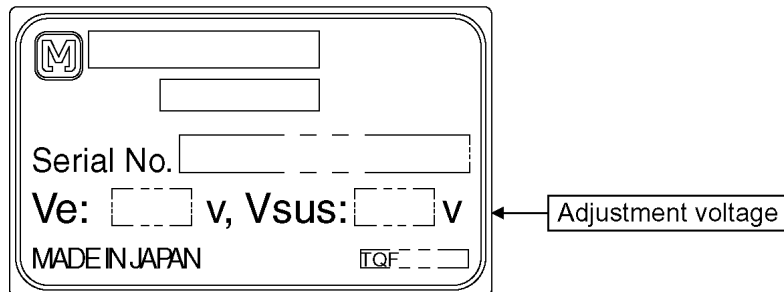

11.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.
2. Set the picture controls as follows.

Picture menu: Dynamic

PNR: OFF


Aspect: 16:9

3. Connect Oscilloscope to TPSC1 (SC).

Check that the flat section(T1) is less than 40µs.

Check and adjust that the falling pulse(T2) period are each within specification.

| | Test point | Volume | Level |
|----|------------|-------------|---------------|
| T2 | TPSC1 (SC) | VR6602 (SC) | 160 ± 10µ Sec |

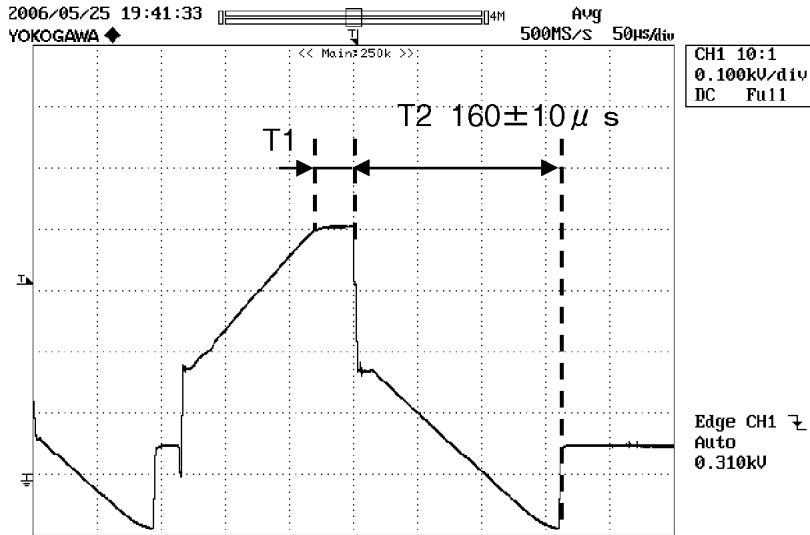

11.3. P.C.B. (Printed Circuit Board) exchange

11.3.1. Caution

1. To remove P.C.B. , wait 1 minute after power was off for discharge from electrolysis capacitors.

11.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.


| P.C.B. | Name | Test Point | Voltage | Volume | Remarks |
|-------------|---|-------------|-----------|-------------|---------|
| P Board | Vsus | TPVSUS (SS) | Vsus ± 2V | VR251 (P) | * |
| SC Board | Vad | TPVAD (SC) | -90V ± 1V | VR6600 (SC) | |
| SS Board | Ve | TPVE (SS) | Ve ± 1V | VR6000 (SS) | * |
| D, DG Board | White balance and Sub brightness for NTSC, PAL, HD, PC and 625i signals | | | | |

*See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

11.4. Adjustment Volume Location

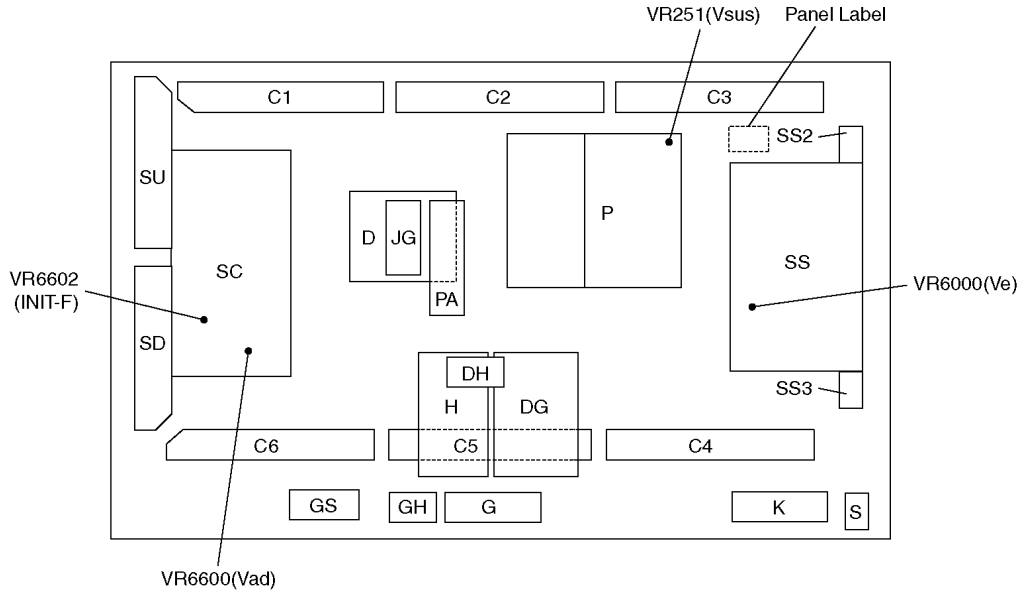

11.5. Test Point Location

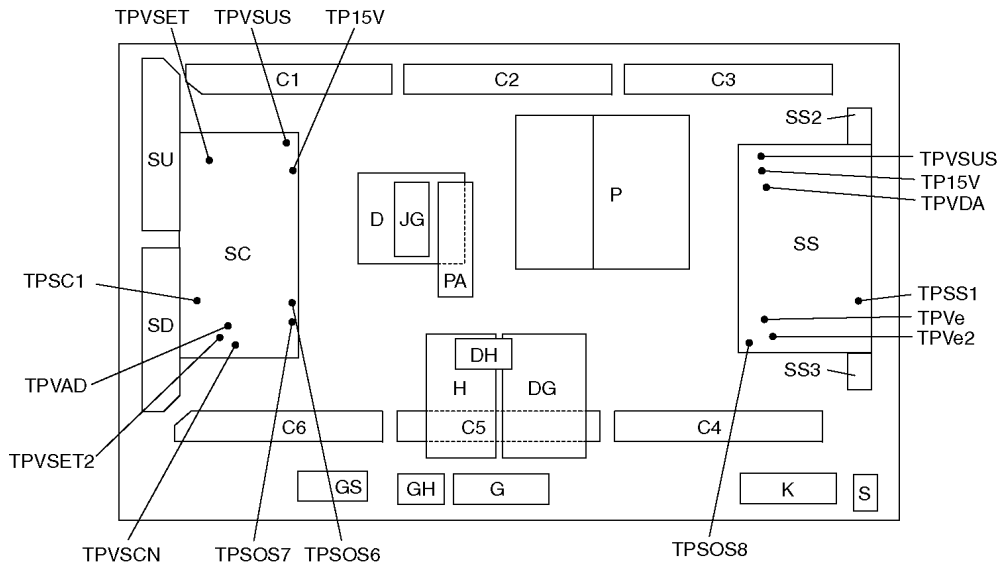


12 Adjustment


12.1. Sub-Contrast adjustment

| Name of measuring instrument | Connection | Remarks | | | | | | | | | | | | | | | | |
|---|------------|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|
| RF generator Base Band generator | | | | | | | | | | | | | | | | | | |
| Preparation (AV) | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. Receive AV1 (PAL 100% Full White or Split Colour bar shown as below) .</p> <div style="text-align: center; border: 1px solid black; width: 200px; margin: 10px auto;"> <table border="1" style="border-collapse: collapse;"> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td colspan="2" style="width: 40px; height: 20px; text-align: center;">100% White</td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> </table> </div> <p>2. Goes into service mode. 3. Push "1" or "2" key, and goes into service mode for "Sub-Contrast".</p> | | | | | | | | | | | | 100% White | | | | | | |
| | | | | | | | | | | | | | | | | | | |
| | | 100% White | | | | | | | | | | | | | | | | |
| Adjustment of AV system | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p> | | | | | | | | | | | | | | | | | | |
| Preparation (RF) | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. Receive RF (PAL 100% Full White or Split Colour bar shown as below.)</p> <div style="text-align: center; border: 1px solid black; width: 200px; margin: 10px auto;"> <table border="1" style="border-collapse: collapse;"> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td colspan="2" style="width: 40px; height: 20px; text-align: center;">100% White</td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> </table> </div> <p>2. Goes into service mode. 3. Push "1" or "2" key, and goes into service mode for "Sub-Contrast".</p> | | | | | | | | | | | | 100% White | | | | | | |
| | | | | | | | | | | | | | | | | | | |
| | | 100% White | | | | | | | | | | | | | | | | |
| Adjustment of RF system | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p> | | | | | | | | | | | | | | | | | | |
| Preparation (HD) | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. Receive Component (1080i/ 60Hz or 1080i/ 50Hz, 100% Full White or Split colour bar as shown below.)</p> <div style="text-align: center; border: 1px solid black; width: 200px; margin: 10px auto;"> <table border="1" style="border-collapse: collapse;"> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> <tr> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td colspan="2" style="width: 40px; height: 20px; text-align: center;">100% White</td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> <td style="width: 20px; height: 20px;"></td> </tr> </table> </div> <p>2. Goes into service mode. 3. Push "1" or "2" key, and goes into service mode for "Sub-Contrast".</p> | | | | | | | | | | | | 100% White | | | | | | |
| | | | | | | | | | | | | | | | | | | |
| | | 100% White | | | | | | | | | | | | | | | | |
| Adjustment of HD system | | Remarks | | | | | | | | | | | | | | | | |
| <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p> | | | | | | | | | | | | | | | | | | |

12.2. PAL panel white balance adjustment

| Instrument Name | Connection | Remarks | | | | | | | | | | | | |
|---|---------------------------|--|------------|---|---|------|-------|-------|--------|-------|-------|-----|-------|-------|
| <ul style="list-style-type: none"> W/B pattern Color analyzer (Minolta CA-100 or equivalent) | RF input Panel surface | User setting: Normal | | | | | | | | | | | | |
| Procedure | | Remarks | | | | | | | | | | | | |
| <ul style="list-style-type: none"> Asing time is longer than 15min. Make sure the front panel to be used on the final set is fitted. Make sure a color signal is not being shown before adjustment. Put the color analyzer where there is little colour variation. Complete the adjustment within 10 minutes after the turn on electricity. Turn on the power supply again when it is not possible to complete it by aging etc. | | Picture menu : Dynamic ASPECT : 16:9 <ul style="list-style-type: none"> Highlight section Signal amplitude 75% PAL White Balance Pattern  High light 75% Low light 15% | | | | | | | | | | | | |
| <ol style="list-style-type: none"> Display the white balance pattern. Enter the Service mode. A number key "1" and "2" are operated and "WB-ADJ" is displayed. Check that the color balance is "HIGH". Select "G-CUTOFF" item, using the number-key "3" or "4", and set to "80", using the volume-key "+" or "-". Also, "B-CUTOFF" and "R-CUTOFF" set to "80". Set "G-DRIVE" at "D0". Touch the signal receiver of color analyzer to the highlight window's center, and adjust B drive and R drive so x, y become the "COLOR TEMP HIGH" in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) Set color balance to NORMAL using "7" key. Fix G cutoff , B cutoff and R cutoff at "80". Fix G drive at "D0". Adjust B drive and R drive so the highlight window's x, y become the "COLOR TEMP NORMAL" in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) Set color balance to "LOW" using "7" key. Fix G cutoff, B cutoff and R cutoff to "80". Fix G drive to "D0". Adjust B drive and R drive so the highlight window's x, y become the "COLOR TEMP LOW" shown in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) | | | | | | | | | | | | | | |
| <p>Table 1. Color temp target value</p> <table border="1"> <thead> <tr> <th>COLOR TEMP</th> <th>x</th> <th>y</th> </tr> </thead> <tbody> <tr> <td>HIGH</td> <td>0.276</td> <td>0.276</td> </tr> <tr> <td>NORMAL</td> <td>0.288</td> <td>0.296</td> </tr> <tr> <td>LOW</td> <td>0.313</td> <td>0.329</td> </tr> </tbody> </table> | | | COLOR TEMP | x | y | HIGH | 0.276 | 0.276 | NORMAL | 0.288 | 0.296 | LOW | 0.313 | 0.329 |
| COLOR TEMP | x | y | | | | | | | | | | | | |
| HIGH | 0.276 | 0.276 | | | | | | | | | | | | |
| NORMAL | 0.288 | 0.296 | | | | | | | | | | | | |
| LOW | 0.313 | 0.329 | | | | | | | | | | | | |

12.3. HD white balance adjustment

| Instrument Name | Connection | Remarks | | | | | | | | | | | | |
|--|---|--|------------|---|---|------|-------|-------|--------|-------|-------|-----|-------|-------|
| <ul style="list-style-type: none"> 1080i W/B Pattern Color analyzer (Minolta CA-100 or equivalent) | <ul style="list-style-type: none"> RF input Panel surface | User setting: Normal | | | | | | | | | | | | |
| Procedure | | Remarks | | | | | | | | | | | | |
| <p>Asing time is longer than 15min.</p> <p>Make sure the front panel to be used on the final set is fitted.</p> <p>Make sure a color signal is not being shown before adjustment.</p> <p>Put the color analyzer where there is little colour variation.</p> <p>Complete the adjustment within 10 minutes after the turn on electricity.</p> <p>Turn on the power supply again when it is not possible to complete it by aging etc.</p> <ol style="list-style-type: none"> Display the white balance pattern. Enter the service mode. A number key "1" and "2" are operated and "WB-ADJ" is displayed. Check that the color balance is "HIGH". Select "G-CUTOFF" item, using the number-key "3" or "4", and set to "80", using the volume-key "+" or "-". Also, "B-CUTOFF" and "R-CUTOFF" set to "80". Set "G-DRIVE" at "D0". Touch the signal receiver of color analyzer to the highlight window's center, and adjust B drive and R drive so x, y become the "Color balance Cool" in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) Set color balance to NORMAL using "7" key. Fix G cutoff , B cutoff and R cutoff at "80". Fix G drive at "D0". Adjust B drive and R drive so the highlight window's x, y become the "Color balance Normal" in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) Set color balance to "LOW". Fix G cutoff, B cutoff and R cutoff to "80". Fix G drive to "D0". Adjust B drive and R drive so the highlight window's x, y become the "Color balance Warm" shown in the below table. All RGB drive increase so that the maximum drive value of RGB may become "FC". ("ALL-DRIVE" set to "FC".) | | <p>Picture menu: Dynamic ASPECT:16:9</p> <ul style="list-style-type: none"> Highlight section Signal amplitude 75% <p>PAL White Balance Pattern</p>  <p>High light 75% Low light 15%</p> <p>* The Color balance COOL differs from Japanese model values.</p> | | | | | | | | | | | | |
| <p>Table 1. Color temp target value</p> <table border="1"> <thead> <tr> <th>COLOR TEMP</th> <th>x</th> <th>y</th> </tr> </thead> <tbody> <tr> <td>HIGH</td> <td>0.276</td> <td>0.276</td> </tr> <tr> <td>NORMAL</td> <td>0.288</td> <td>0.296</td> </tr> <tr> <td>LOW</td> <td>0.313</td> <td>0.329</td> </tr> </tbody> </table> | | | COLOR TEMP | x | y | HIGH | 0.276 | 0.276 | NORMAL | 0.288 | 0.296 | LOW | 0.313 | 0.329 |
| COLOR TEMP | x | y | | | | | | | | | | | | |
| HIGH | 0.276 | 0.276 | | | | | | | | | | | | |
| NORMAL | 0.288 | 0.296 | | | | | | | | | | | | |
| LOW | 0.313 | 0.329 | | | | | | | | | | | | |

13 Hotel mode

1. Purpose

Restrict a function for hotels.

2. Access command to the Hotel mode setup menu


In order to display the Hotel mode setup menu, please enter the following command (**within 2 second**).

[TV] : Vol. "Down" + [REMOTE] : AV (3 times)

Then, the Hotel mode setup menu is displayed.

| Hotel Mode | |
|-------------------|-----|
| Hotel Mode | Off |
| Initial INPUT | Off |
| Initial POS | Off |
| Initial VOL Level | Off |
| Maximum Vol Level | 63 |
| Button Lock | Off |
| Remote Lock | Off |

Select



EXIT
Change
RETURN

3. To exit the Hotel mode setup menu

Disconnect AC power cord from wall outlet.


4. Explain the Hotel mode setup menu

| item | Function |
|-------------------|---|
| Hotel Mode | Select hotel mode ON/OFF |
| Initial INPUT | Select input signal modes. Set the input, when each time power is switched on. Selection : Off/Analogue/DVB/AV1/AV2/AV3/AV4/ COMPONENT/PC/HDMI1/HDMI2/HDMI3 · Off: give priority to a last memory. · PC: selectable with VGA option |
| Initial POS | Select programme number. Selection : Off/0 to 99 · Off: give priority to a last memory |
| Initial VOL level | Adjust the volume when each time power is switched on. Selection/Range : Off/0 to 63 · Off: give priority to a last memory |
| Maximum VOL level | Adjust maximum volume. Range : 0 to 63 |
| Button lock | Select local key conditions. Selection : Off/SETUP/MENU/All · Off: altogether valid · SETUP: only F-key is invalid (Tuning guide(menu) can not be selected.) · MENU: only F-key is invalid (only Volume/Mute can be selected.) · ALL: altogether invalid. |
| Remote lock | Select remote control key conditions. Selection : Off/SETUP/MENU · Off: altogether valid · SETUP: only Setup menu is invalid · MENU: Picture/Sound/Setup menu are invalid |

14 Conductor Views


14.1. P(MULTI)-Board

P(1)-BOARD (FOIL SIDE)
ETXMM625MGHA

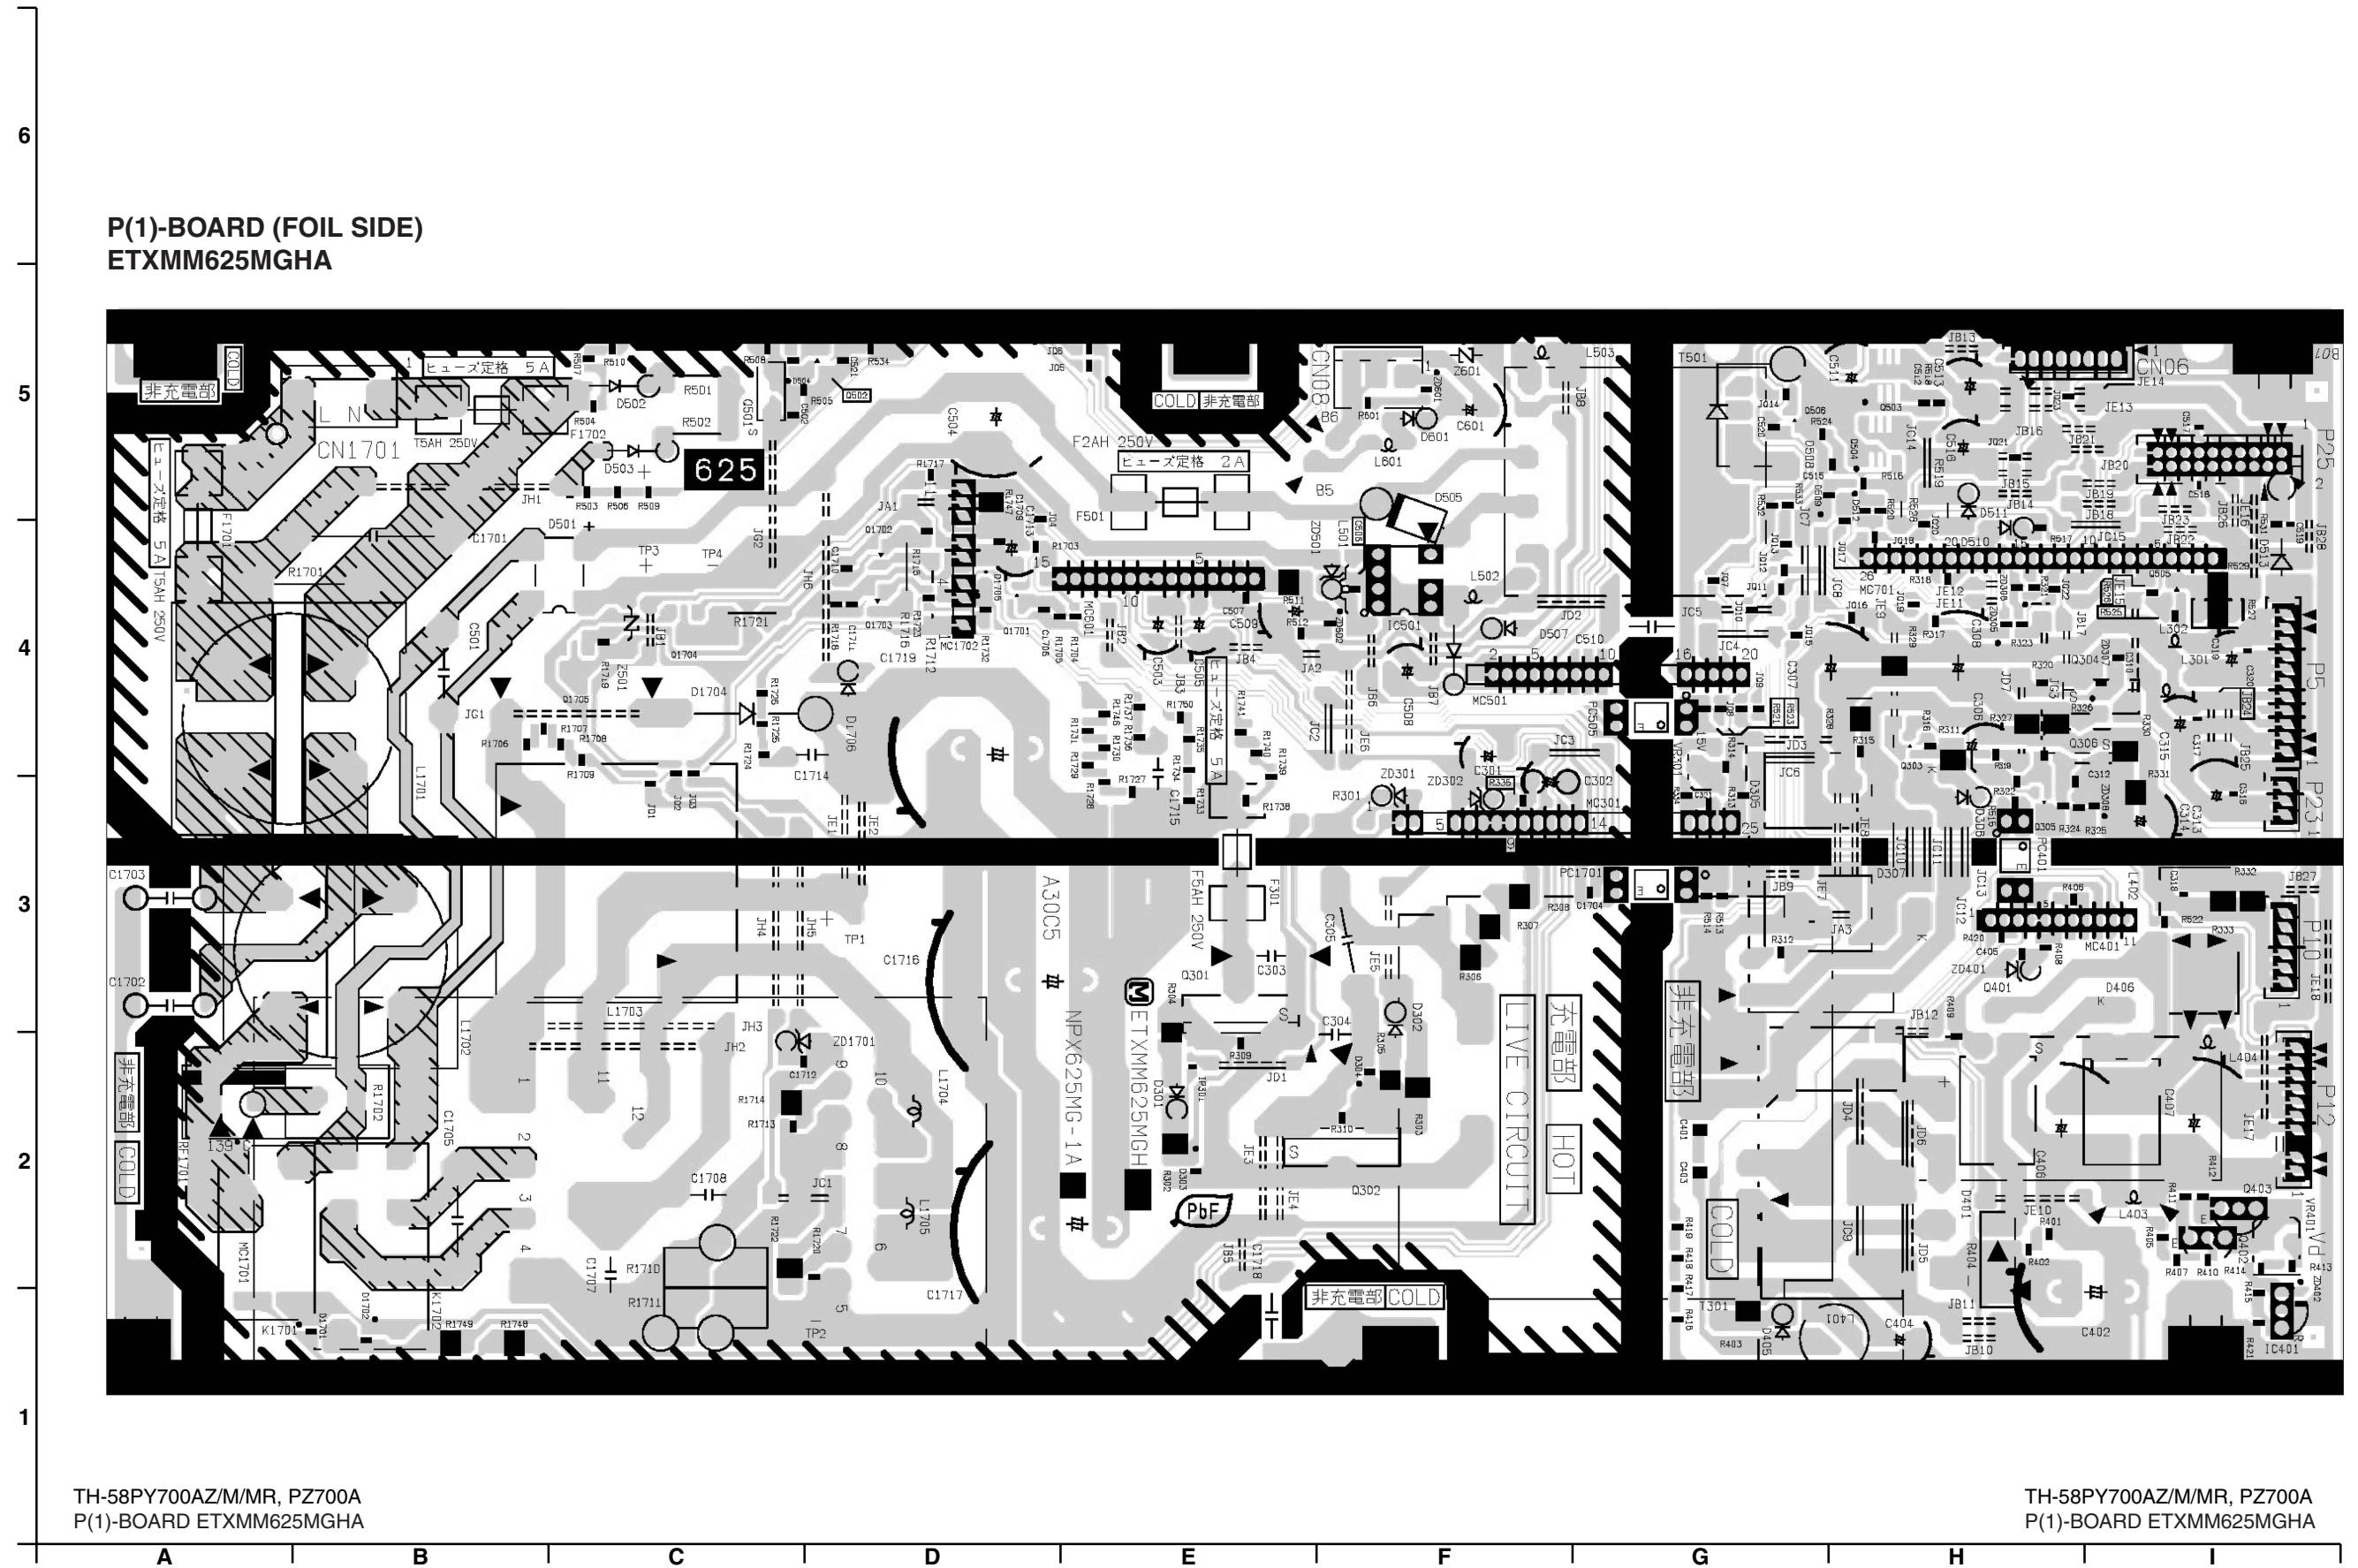

TH-58PY700AZ/M/MR, PZ700A
P(1)-BOARD ETXMM625MGHA

TH-58PY700AZ/M/MR, PZ700A
P(1)-BOARD ETXMM625MGHA

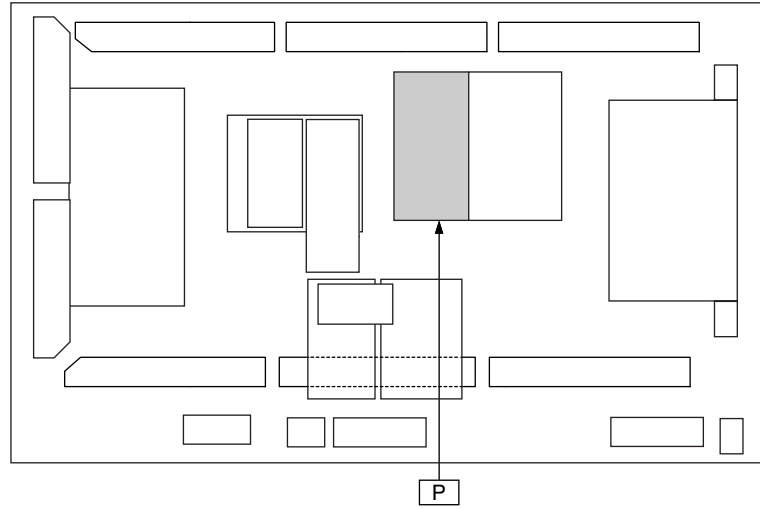

Parts Location

| P(1)-BOARD (FOIL SIDE) | | | | | |
|------------------------|-----|----------------------|-----|---------------|-----|
| IC | | MODULE | | TP | |
| IC401 | I-1 | MC301 | G-3 | TP1 | D-3 |
| IC501 | F-4 | MC401 | I-3 | TP2 | D-1 |
| TRANSISTOR | | MC501 | F-4 | TP3 | C-4 |
| Q301 | E-3 | MC601 | E-4 | TP4 | C-4 |
| Q302 | F-2 | MC701 | H-4 | VOLUME | |
| Q303 | H-4 | MC1701 | A-2 | VR301 | G-4 |
| Q304 | H-4 | MC1702 | D-4 | VR401 | I-2 |
| Q305 | H-3 | PHOTO COUPLER | | | |
| Q306 | I-4 | PC401 | H-3 | | |
| Q401 | H-3 | PC505 | G-4 | | |
| Q402 | I-2 | PC1701 | G-3 | | |
| Q403 | I-2 | | | | |
| Q501 | C-5 | | | | |
| Q502 | D-5 | | | | |
| Q503 | H-5 | | | | |
| Q504 | C-5 | | | | |
| Q505 | I-4 | | | | |
| Q506 | G-5 | | | | |
| Q1701 | D-4 | | | | |
| Q1702 | D-4 | | | | |
| Q1703 | D-4 | | | | |
| Q1704 | C-4 | | | | |
| Q1705 | C-4 | | | | |

TH-58PY700AZ/M/MR, PZ700A
P(1)-BOARD PARTS LOCATION


Parts Location

| P(1)-BOARD (COMPONENT SIDE) | | | | | |
|-----------------------------|-----|----------------------|-----|---------------|-----|
| IC | | MODULE | | TP | |
| IC401 | I-5 | MC301 | F-3 | TP1 | D-4 |
| IC501 | F-2 | MC401 | H-4 | TP2 | C-5 |
| TRANSISTOR | | MC501 | F-3 | TP3 | C-2 |
| Q301 | E-4 | MC601 | D-2 | TP4 | C-2 |
| Q302 | E-4 | MC701 | G-2 | VOLUME | |
| Q304 | H-3 | MC1702 | D-2 | VR301 | G-3 |
| Q306 | H-3 | PHOTO COUPLER | | VR401 | I-5 |
| Q402 | I-5 | PC401 | H-3 | | |
| Q403 | I-5 | PC505 | F-3 | | |
| | | PC1701 | G-3 | | |

TH-58PY700AZ/M/MR, PZ700A
P(1)-BOARD PARTS LOCATION

P(1)-BOARD (COMPONENT SIDE)
ETXMM625MGHA

6
5
4
3
2
1

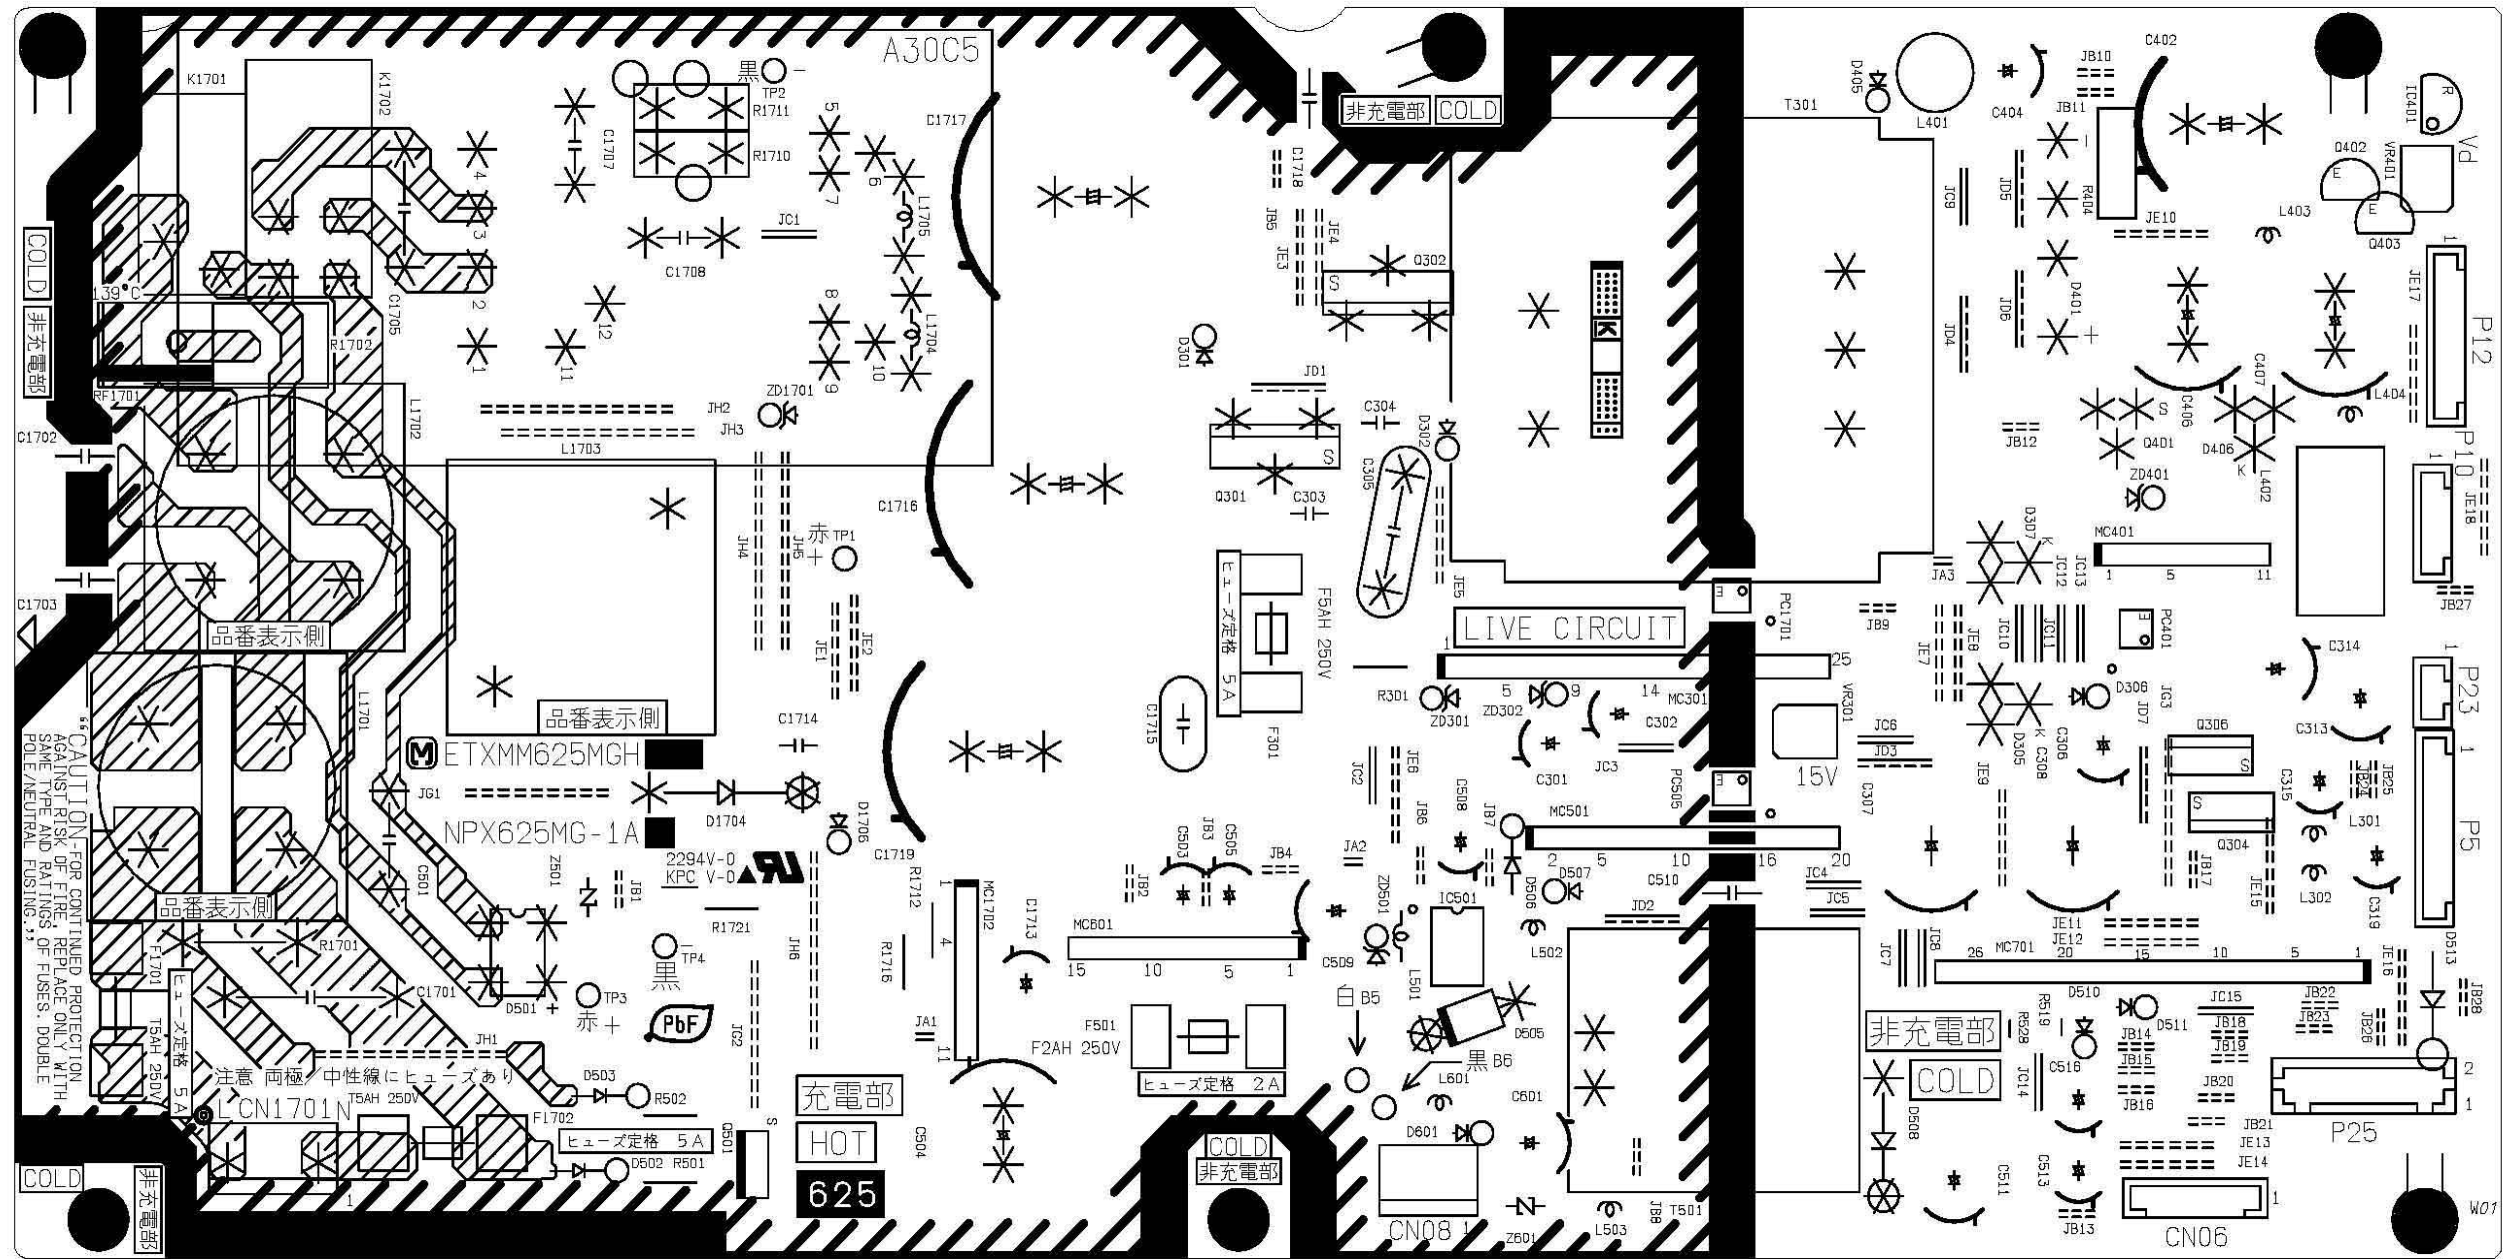


TH-58PY700AZ/M/MR, PZ700A
 P(1)-BOARD ETXMM625MGHA

TH-58PY700AZ/M/MR, PZ700A
 P(1)-BOARD ETXMM625MGHA

A B C D E F G H I


14.2. P(SUS)-Board

P(2)-BOARD (FOIL SIDE)
ETXMM625MGHA

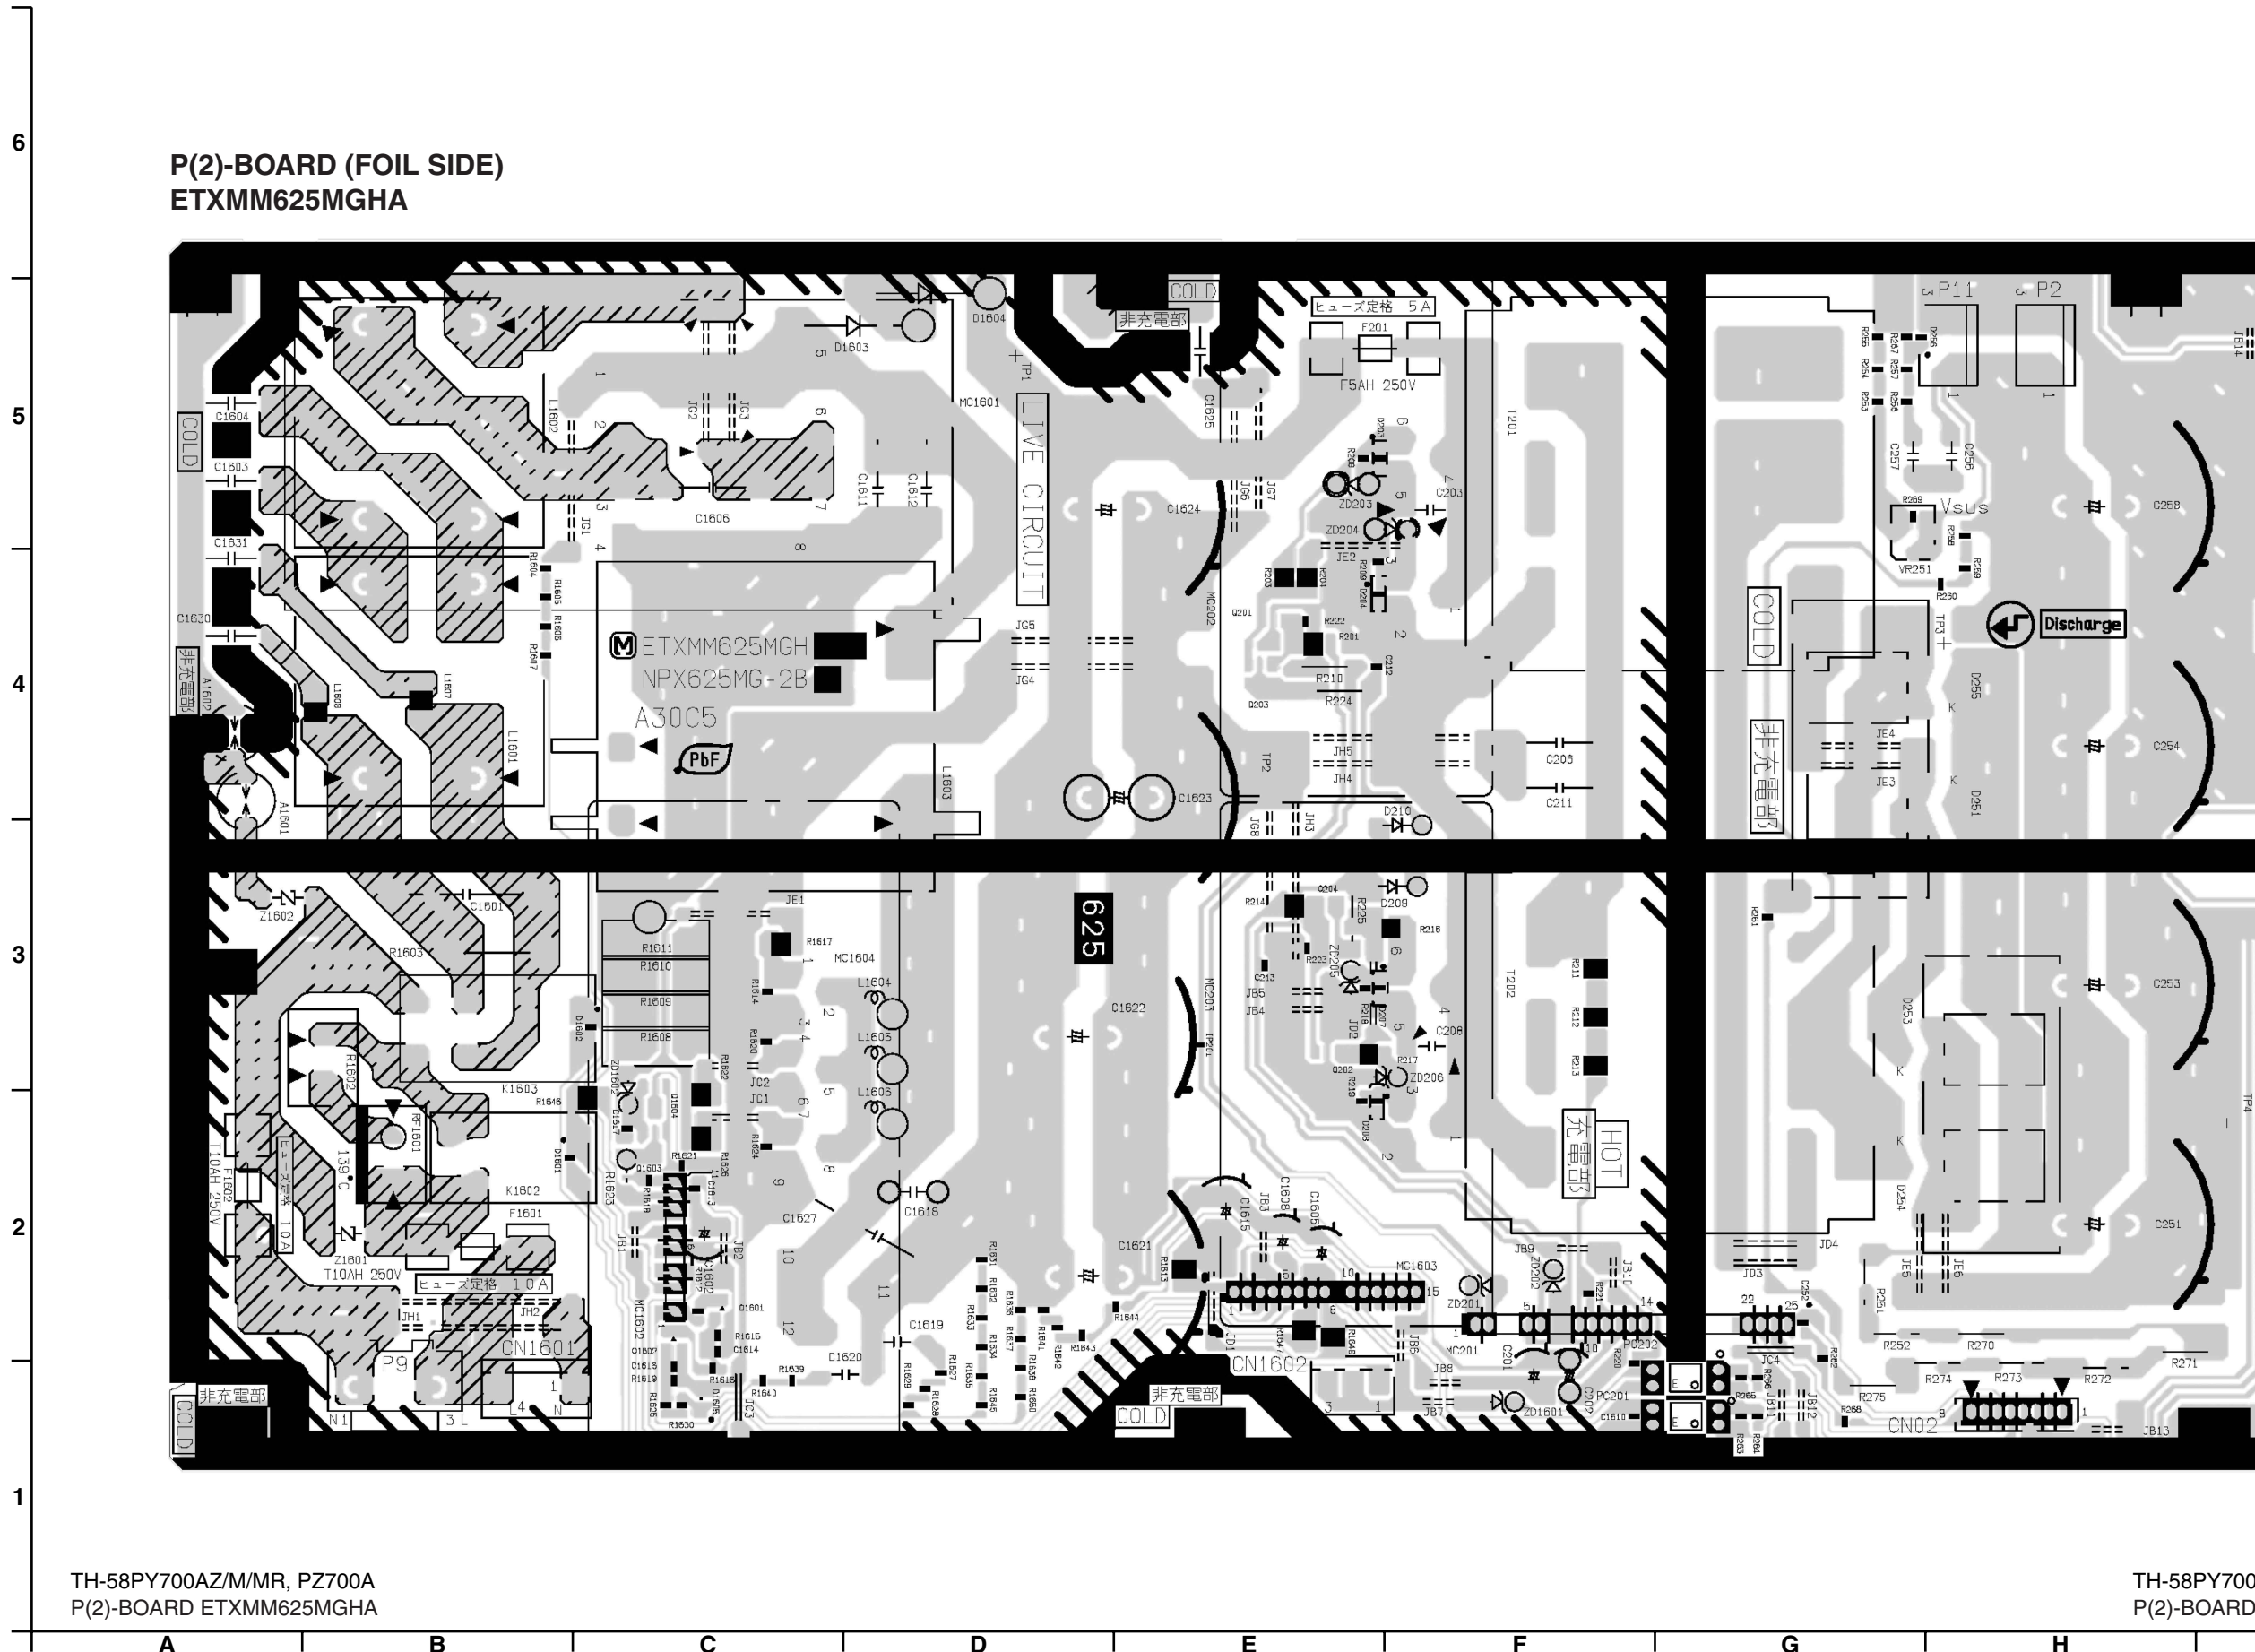

TH-58PY700AZ/M/MR, PZ700A
P(2)-BOARD ETXMM625MGHA

TH-58PY700AZ/M/MR, PZ700A
P(2)-BOARD ETXMM625MGHA

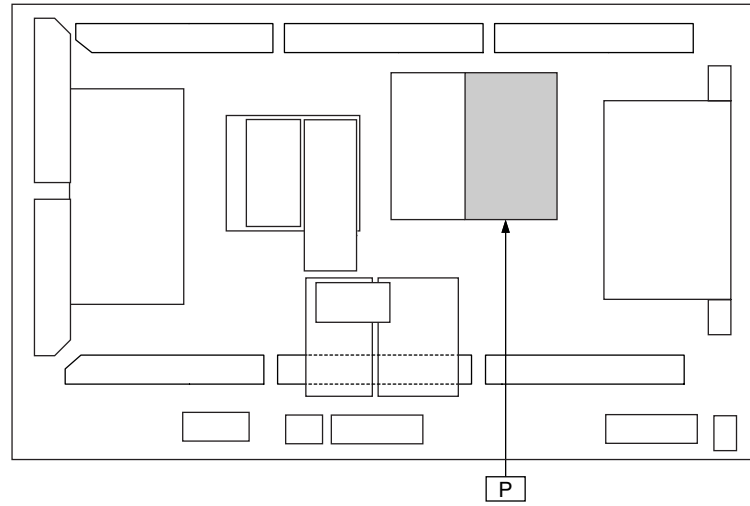

Parts Location


| P(2)-BOARD (FOIL SIDE) | | | |
|------------------------|-----|---------------|-----|
| TRANSISTOR | | MODULE | |
| Q201 | E-4 | MC201 | F-2 |
| Q202 | E-3 | MC202 | E-4 |
| Q203 | E-4 | MC203 | E-3 |
| Q204 | E-3 | MC1601 | D-5 |
| Q1601 | C-2 | MC1602 | C-2 |
| Q1602 | C-2 | MC1603 | F-2 |
| Q1603 | C-2 | MC1604 | C-3 |
| Q1604 | C-2 | | |
| VOLUME | | PHOTO COUPLER | |
| VR251 | G-4 | PC201 | F-1 |
| | | PC202 | F-2 |

Parts Location

| P(2)-BOARD (COMPONENT SIDE) | | | |
|-----------------------------|-----|--------|-----|
| MODULE | | VOLUME | |
| MC201 | F-5 | VR251 | G-2 |
| MC1602 | C-5 | | |
| MC1603 | F-5 | | |
| PHOTO COUPLER | | | |
| PC201 | F-5 | | |
| PC202 | F-5 | | |

**P(2)-BOARD (COMPONENT SIDE)
ETXMM625MGHA**

6
5
4
3
2
1

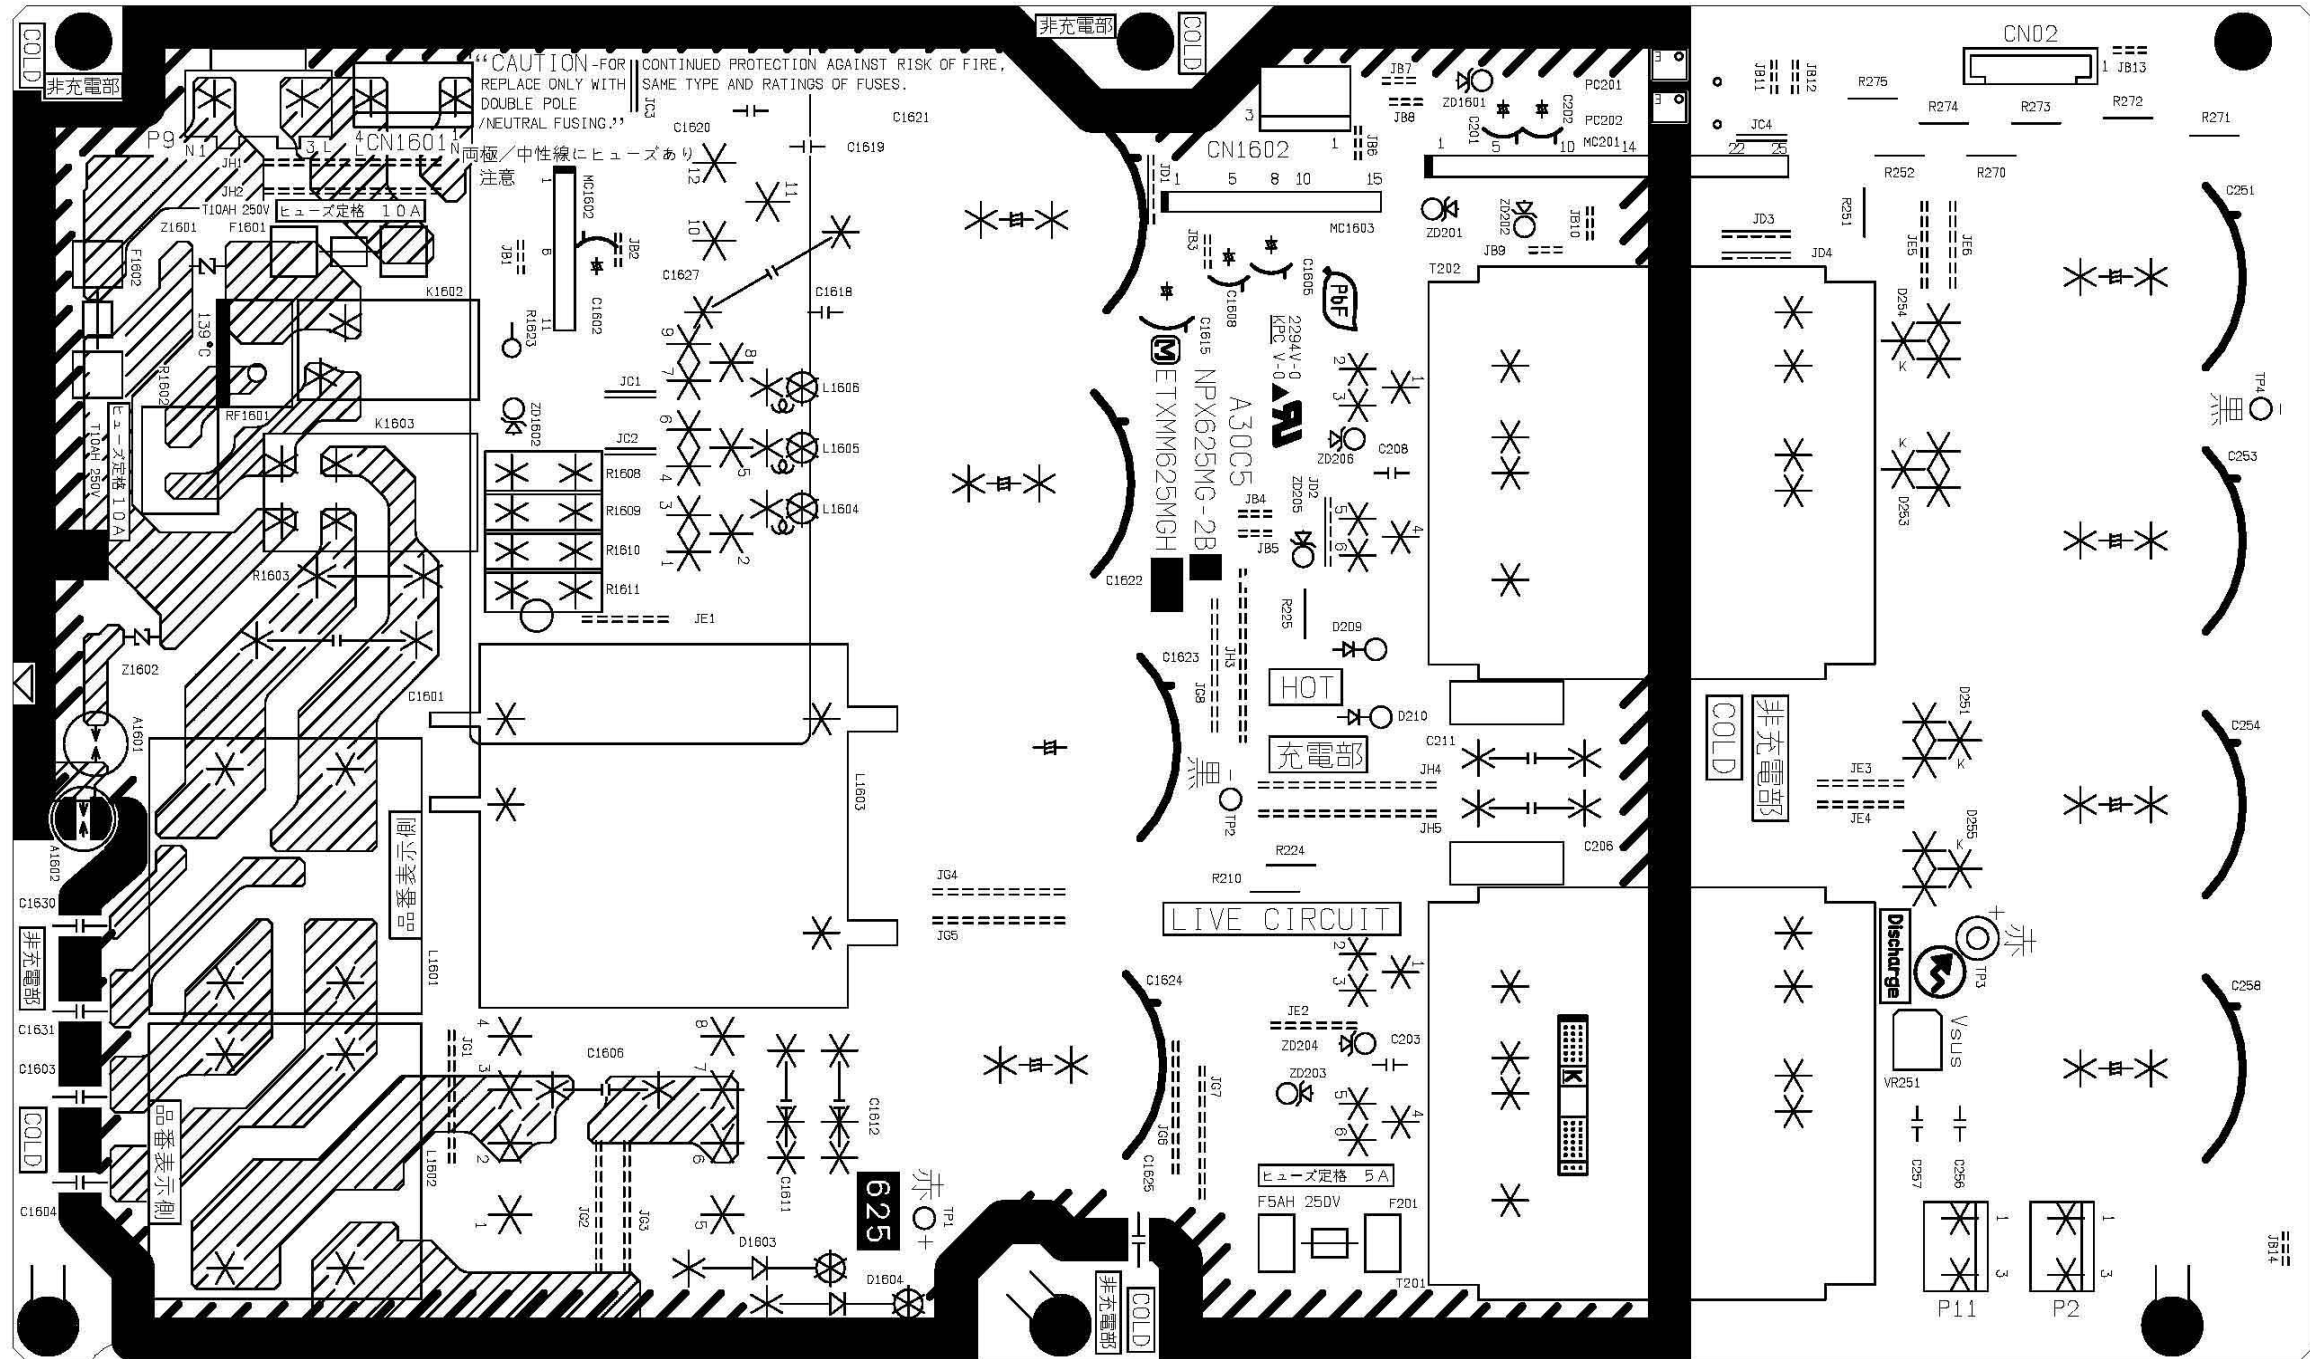



A B C D E F G H I

14.3. PA-Board


6
5
4
3
2
1

A B C D E F G H I

**PA-BOARD (FOIL SIDE)
TNPA4274AG**

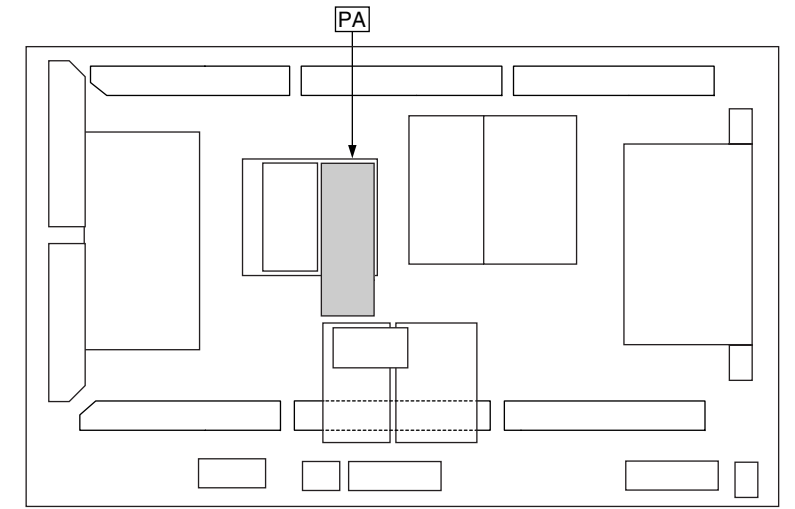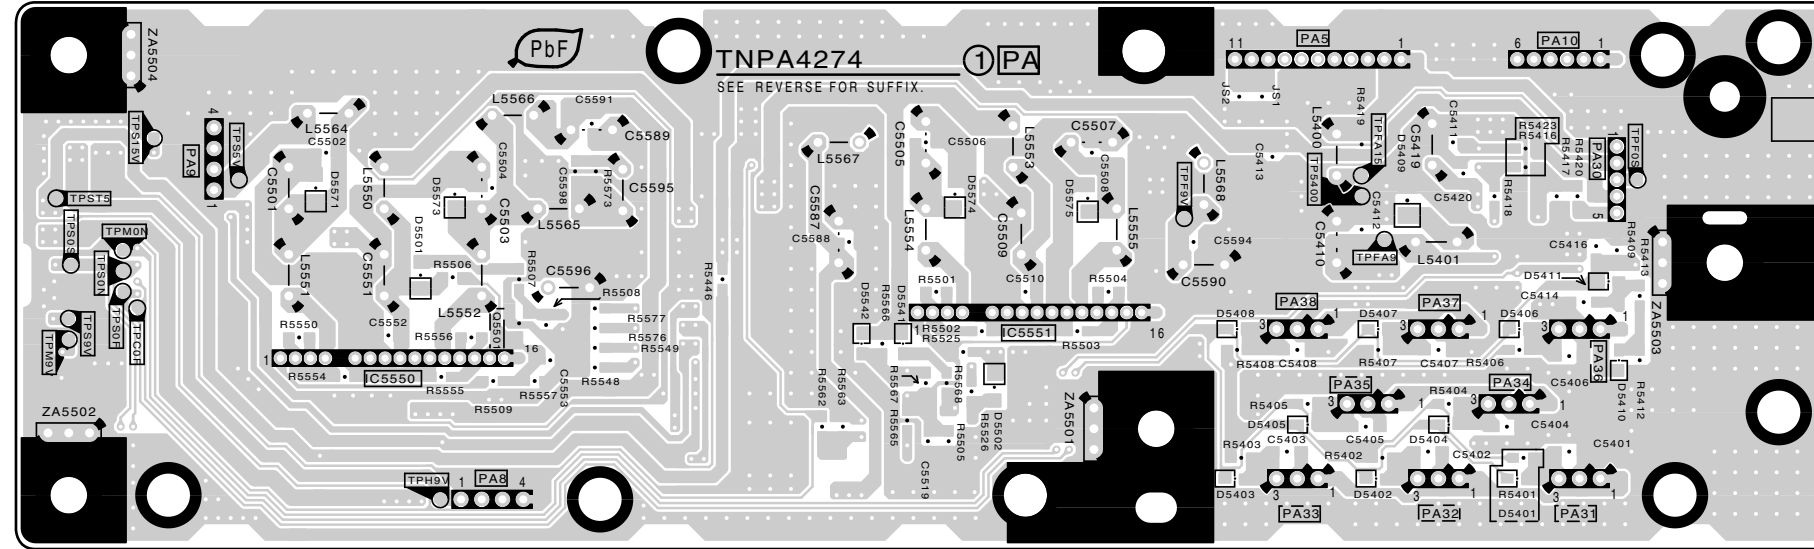

**PA-BOARD (COMPONENT SIDE)
TNPA4274AG**

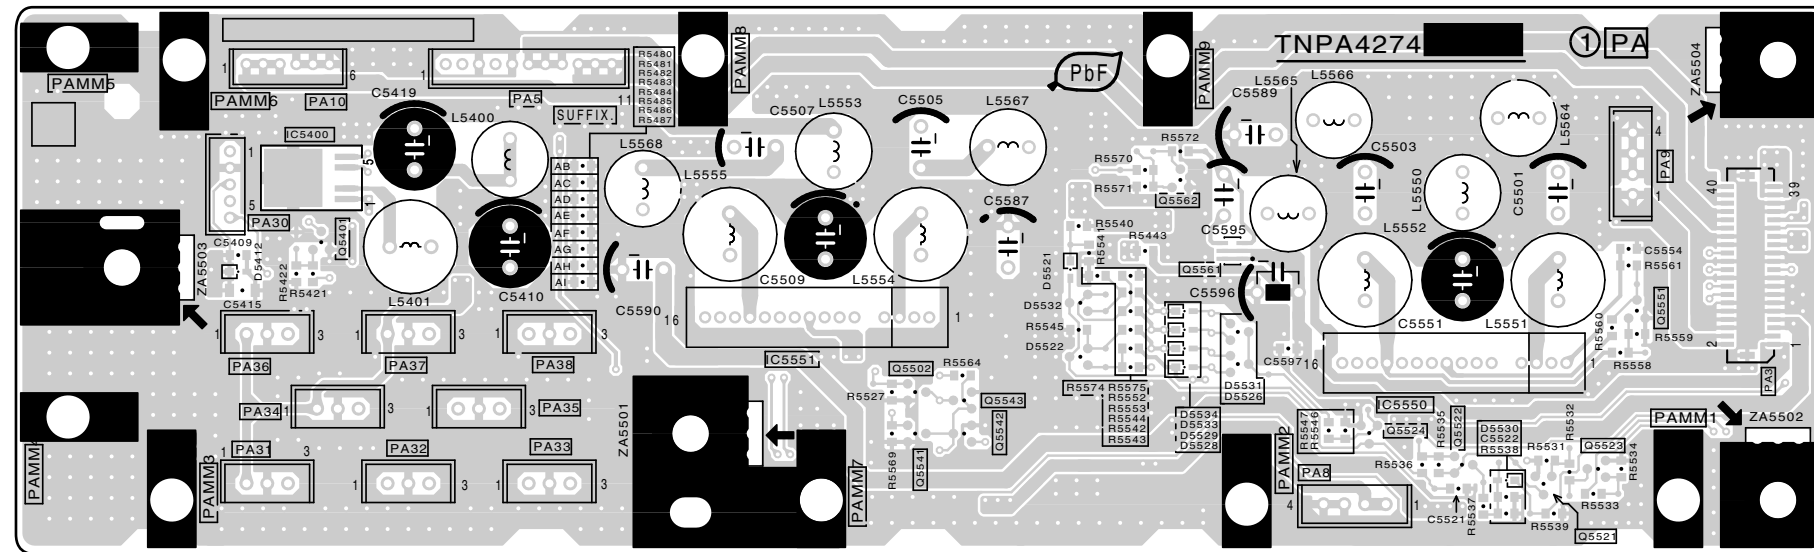

Parts Location

| PA-BOARD | |
|-------------------|-----|
| IC | |
| IC5400 | B-2 |
| IC5550 | B-4 |
| IC5550 | E-2 |
| IC5551 | C-2 |
| IC5551 | D-4 |
| TRANSISTOR | |
| Q5401 | B-2 |
| Q5501 | B-4 |
| Q5502 | D-2 |
| Q5521 | F-1 |
| Q5522 | F-1 |
| Q5523 | F-1 |
| Q5524 | E-1 |
| Q5541 | D-1 |
| Q5542 | D-1 |
| Q5543 | D-2 |
| Q5551 | F-2 |
| Q5561 | E-2 |
| Q5562 | E-2 |
| TP | |
| TP5400 | E-5 |
| TPCOF | A-4 |
| TPF9V | E-5 |
| TPFA15 | E-5 |
| TPFA9 | E-5 |
| TPFOS | F-5 |
| TPH9V | B-4 |
| TPM9V | A-4 |
| TPMON | A-5 |
| TPS15V | A-5 |
| TPS5V | A-5 |
| TPS9V | A-4 |
| TPSOV | A-4 |
| TPSON | A-5 |
| TPSOS | A-5 |
| TPST5 | A-5 |



TH-58PY700AZ/M/MR, PZ700A
PA-BOARD TNPA4274AG

TH-58PY700AZ/M/MR, PZ700A
PA-BOARD TNPA4274AG


14.4. G-Board

6
5
4
3
2
1

**G-BOARD (FOIL SIDE)
TNPA4262AD**

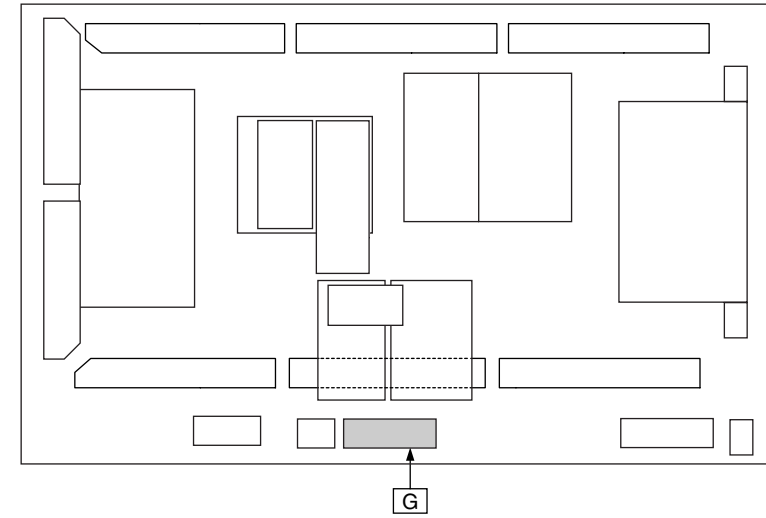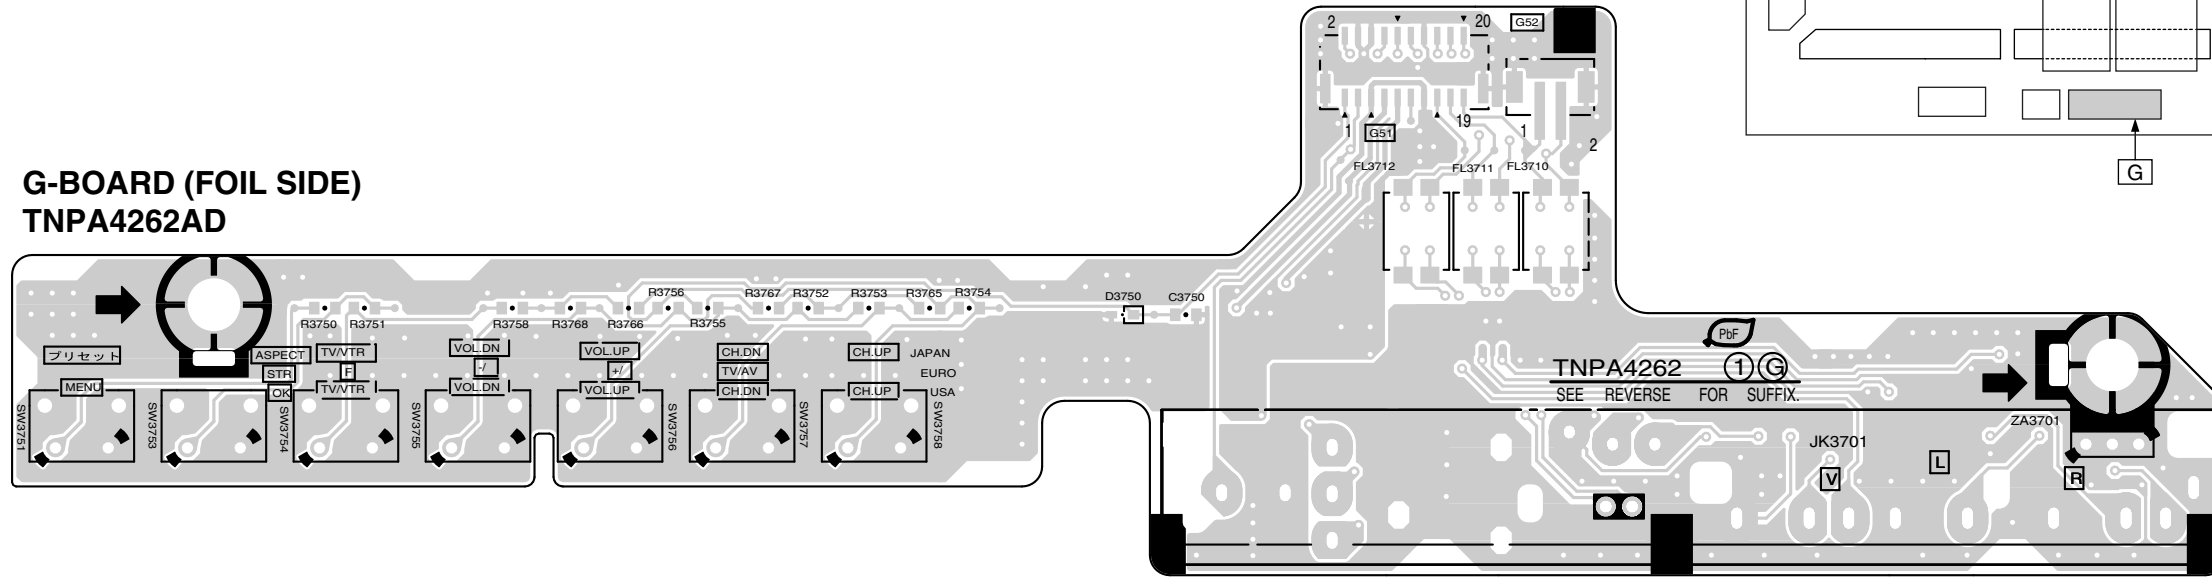

**G-BOARD (COMPONENT SIDE)
TNPA4262AD**

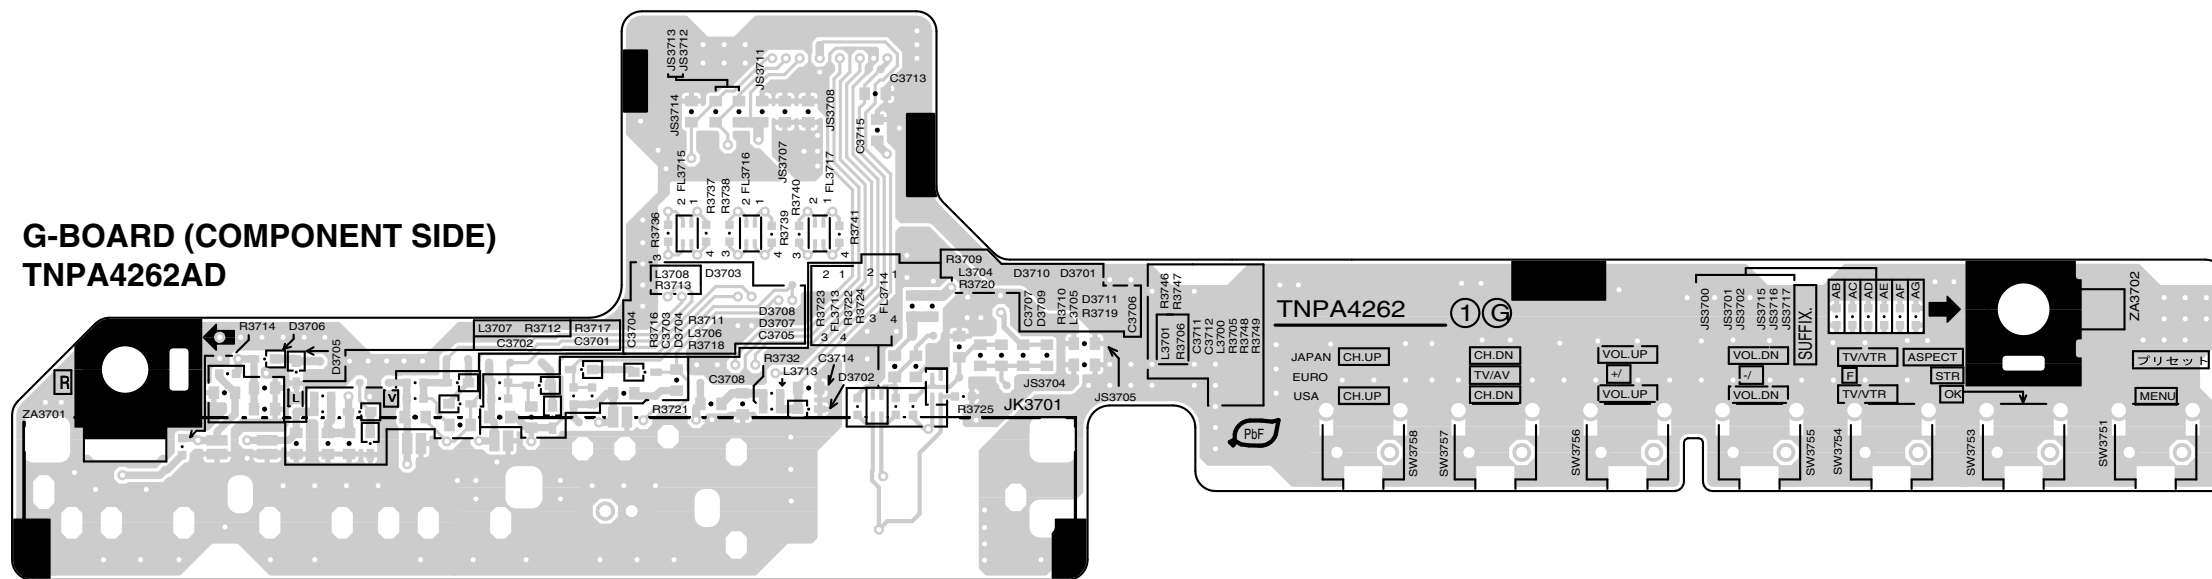

TH-58PY700AZ/M/MR, PZ700A
G-BOARD TNPA4262AD



TH-58PY700AZ/M/MR, PZ700A
G-BOARD TNPA4262AD

A B C D E F G H I

14.5. H-Board

H-BOARD (FOIL SIDE)
TNPA4279AD(700A) TNPA4279AB(700AZ/M) TXN/H1HGTX(700MR)

6
5
4
3
2
1

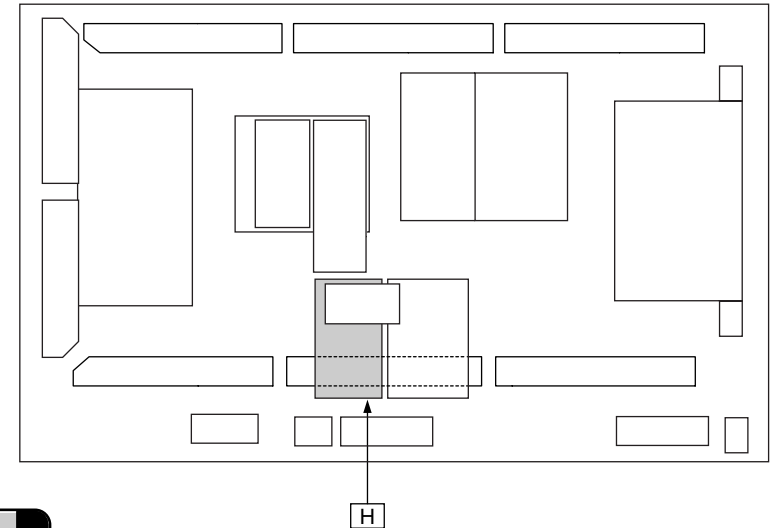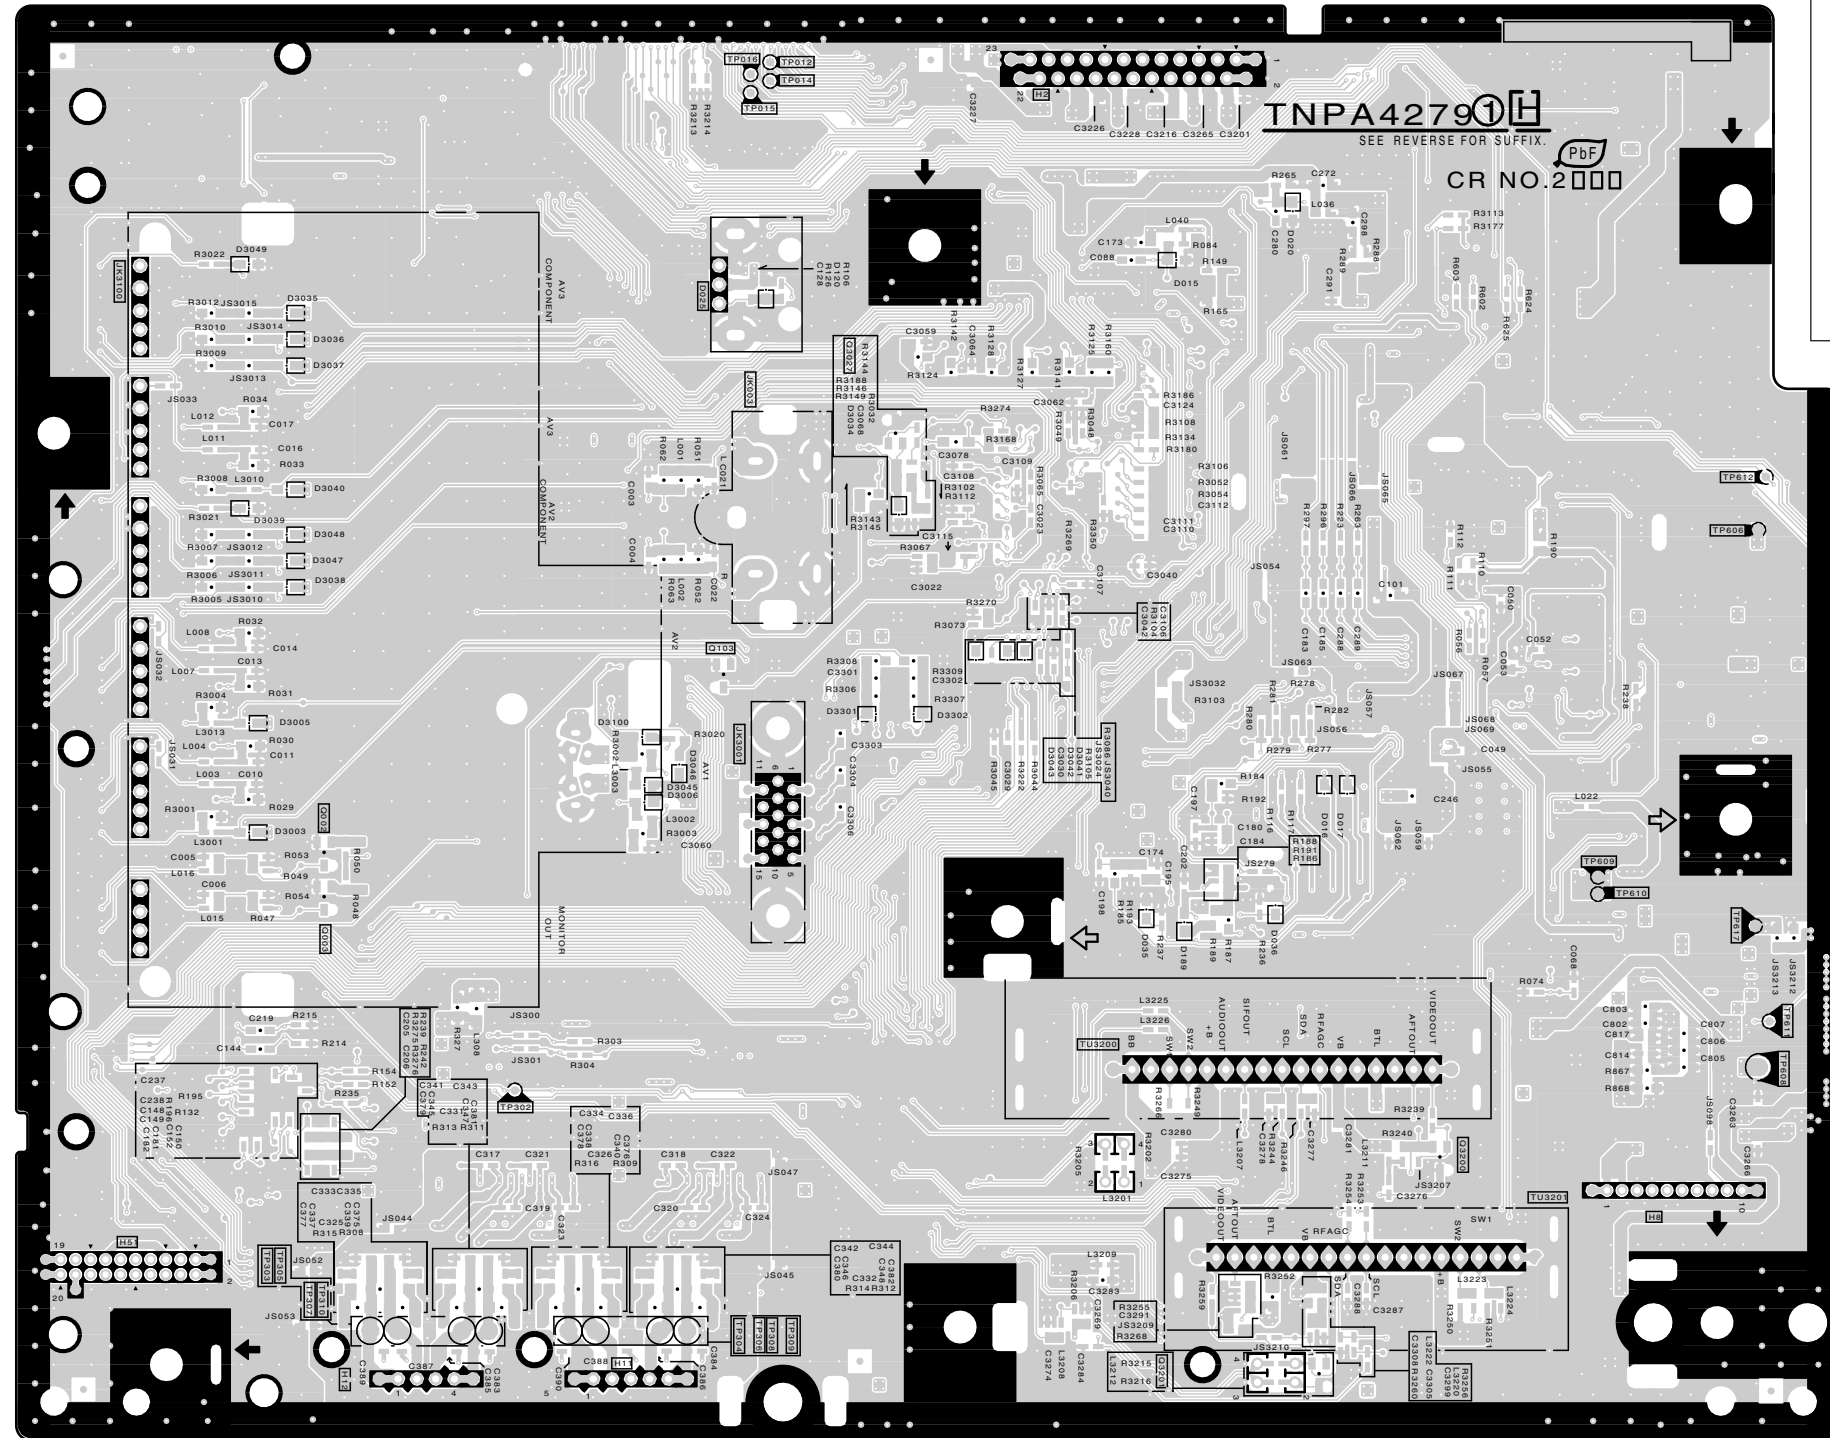

Parts Location

| H-BOARD (FOIL SIDE) | | | |
|---------------------|-----|--------|-----|
| TRANSISTOR | | TP | |
| Q2002 | B-3 | TP2012 | C-3 |
| Q2003 | B-3 | TP2014 | C-3 |
| Q2103 | C-3 | TP2015 | C-3 |
| Q3027 | D-4 | TP2016 | C-3 |
| Q3200 | F-2 | TP2302 | B-1 |
| Q3201 | E-1 | TP2302 | B-2 |
| | | TP2303 | B-1 |
| | | TP2304 | C-1 |
| | | TP2305 | B-1 |
| | | TP2306 | C-1 |
| | | TP2307 | B-1 |
| | | TP2308 | C-1 |
| | | TP2309 | C-1 |
| | | TP2310 | B-1 |
| | | TP2606 | G-4 |
| | | TP2608 | G-2 |
| | | TP2609 | F-3 |
| | | TP2610 | F-3 |
| | | TP2611 | G-2 |
| | | TP2612 | G-4 |
| | | TP2617 | F-3 |

TH-58PZ700A
H-BOARD TNPA4279AD

TH-58PY700AZ/M
H-BOARD TNPA4279AB

TH-58PY700MR
H-BOARD TXN/H1HGTX

TH-58PZ700A
H-BOARD TNPA4279AD

TH-58PY700AZ/M
H-BOARD TNPA4279AB

TH-58PY700MR
H-BOARD TXN/H1HGTX

A

B

C

D

E



F

G

H

I

H-BOARD (COMPONENT SIDE)
TNPA4279AD(700A) TNPA4279AB(700AZ/M) TXN/H1HGTX(700MR)

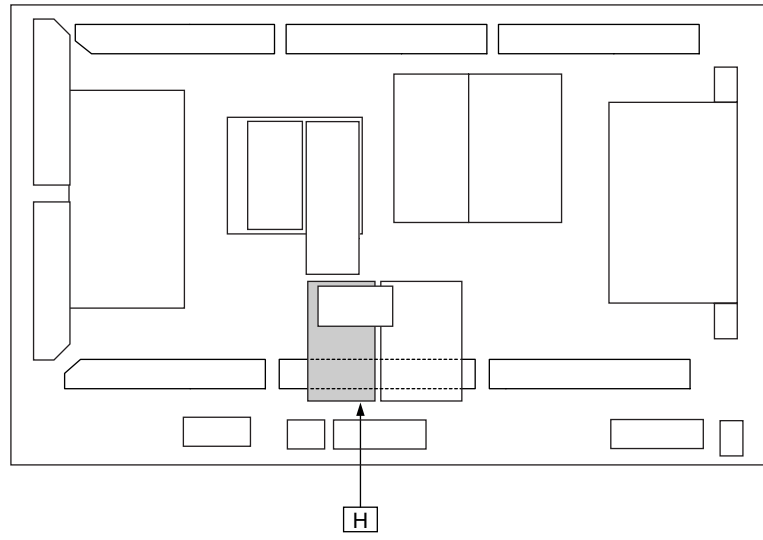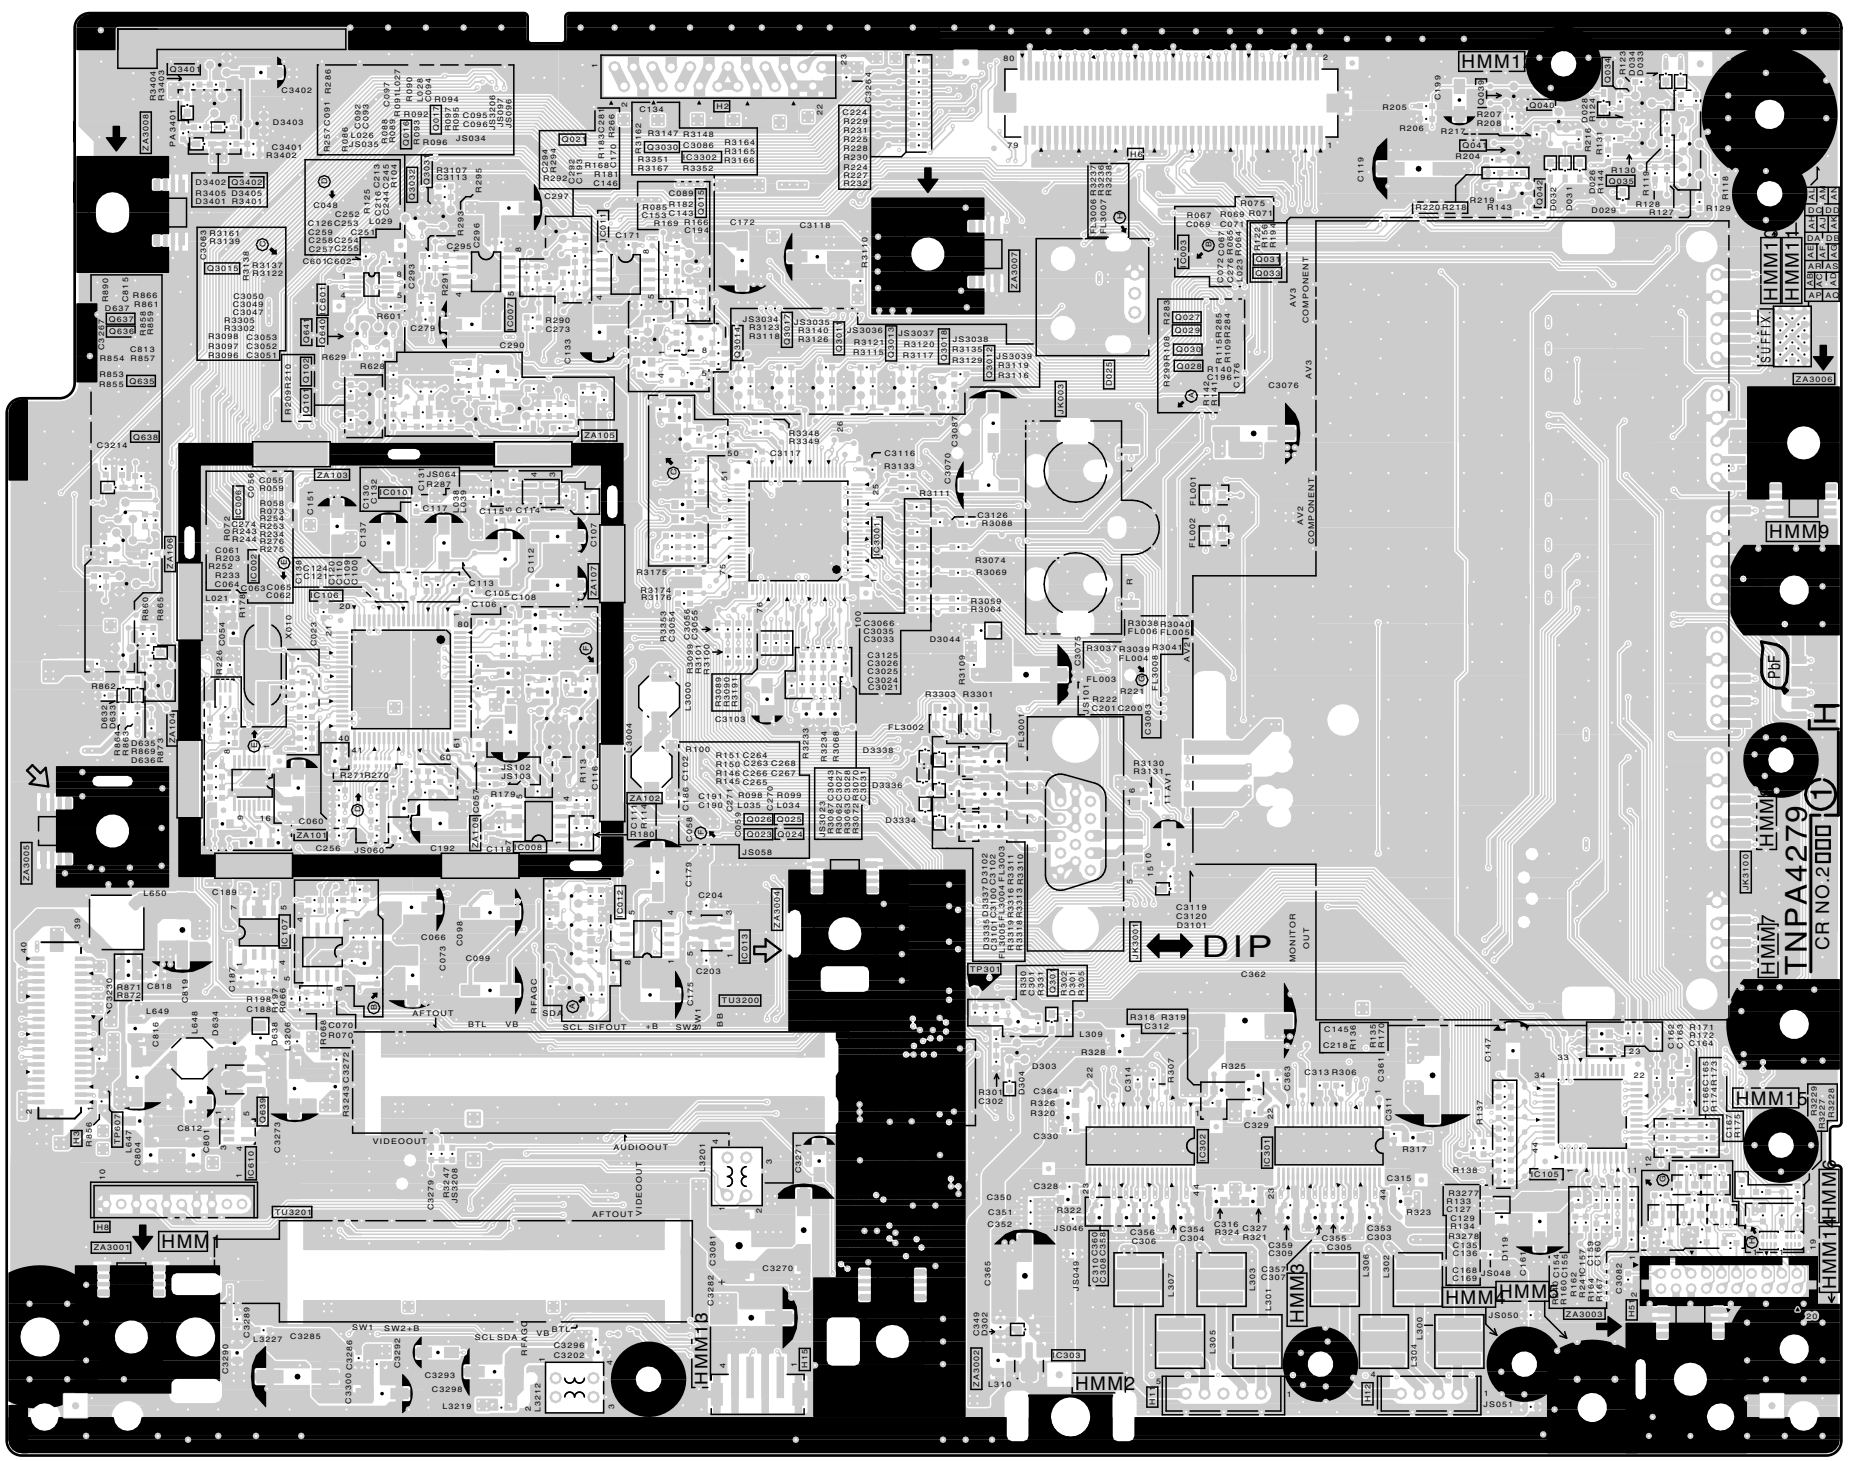

Parts Location

| H-BOARD (COMPONENT SIDE) | | | | | |
|--------------------------|-----|------------|-----|--------|-----|
| IC | | TRANSISTOR | | TP | |
| IC2002 | B-4 | Q2015 | C-5 | TP2301 | D-2 |
| IC2003 | E-5 | Q2016 | B-5 | TP2607 | A-2 |
| IC2006 | A-4 | Q2017 | B-5 | | |
| IC2007 | B-5 | Q2021 | C-5 | | |
| IC2008 | B-3 | Q2023 | C-3 | | |
| IC2010 | B-4 | Q2024 | C-3 | | |
| IC2011 | C-5 | Q2025 | C-3 | | |
| IC2012 | C-3 | Q2026 | C-3 | | |
| IC2013 | C-3 | Q2027 | E-5 | | |
| IC2105 | F-2 | Q2028 | E-4 | | |
| IC2106 | B-4 | Q2029 | E-5 | | |
| IC2107 | B-3 | Q2030 | E-5 | | |
| IC2301 | E-2 | Q2031 | E-5 | | |
| IC2302 | E-2 | Q2033 | E-5 | | |
| IC2303 | D-1 | Q2034 | F-5 | | |
| IC2601 | B-5 | Q2035 | F-5 | | |
| IC2610 | B-2 | Q2039 | F-5 | | |
| IC3001 | D-4 | Q2040 | F-5 | | |
| IC3302 | C-5 | Q2041 | F-5 | | |
| | | Q2042 | F-5 | | |
| | | Q2101 | B-4 | | |
| | | Q2102 | B-4 | | |
| | | Q2301 | D-2 | | |
| | | Q2635 | A-4 | | |
| | | Q2636 | A-5 | | |
| | | Q2637 | A-5 | | |
| | | Q2638 | A-4 | | |
| | | Q2639 | B-2 | | |
| | | Q2640 | B-5 | | |
| | | Q2641 | B-5 | | |
| | | Q3011 | D-4 | | |
| | | Q3012 | D-4 | | |
| | | Q3013 | D-4 | | |
| | | Q3014 | C-5 | | |
| | | Q3015 | A-5 | | |
| | | Q3017 | C-5 | | |
| | | Q3018 | D-4 | | |
| | | Q3030 | C-5 | | |
| | | Q3031 | B-5 | | |
| | | Q3032 | B-5 | | |
| | | Q3401 | A-5 | | |
| | | Q3402 | A-5 | | |

TH-58PZ700A
H-BOARD TNPA4279AD

TH-58PY700AZ/M
H-BOARD TNPA4279AB

TH-58PY700MR
H-BOARD TXN/H1HGTX


TH-58PZ700A
H-BOARD TNPA4279AD

TH-58PY700AZ/M
H-BOARD TNPA4279AB

TH-58PY700MR
H-BOARD TXN/H1HGTX


A B C D E F G H I

14.6. GH and GS-Board

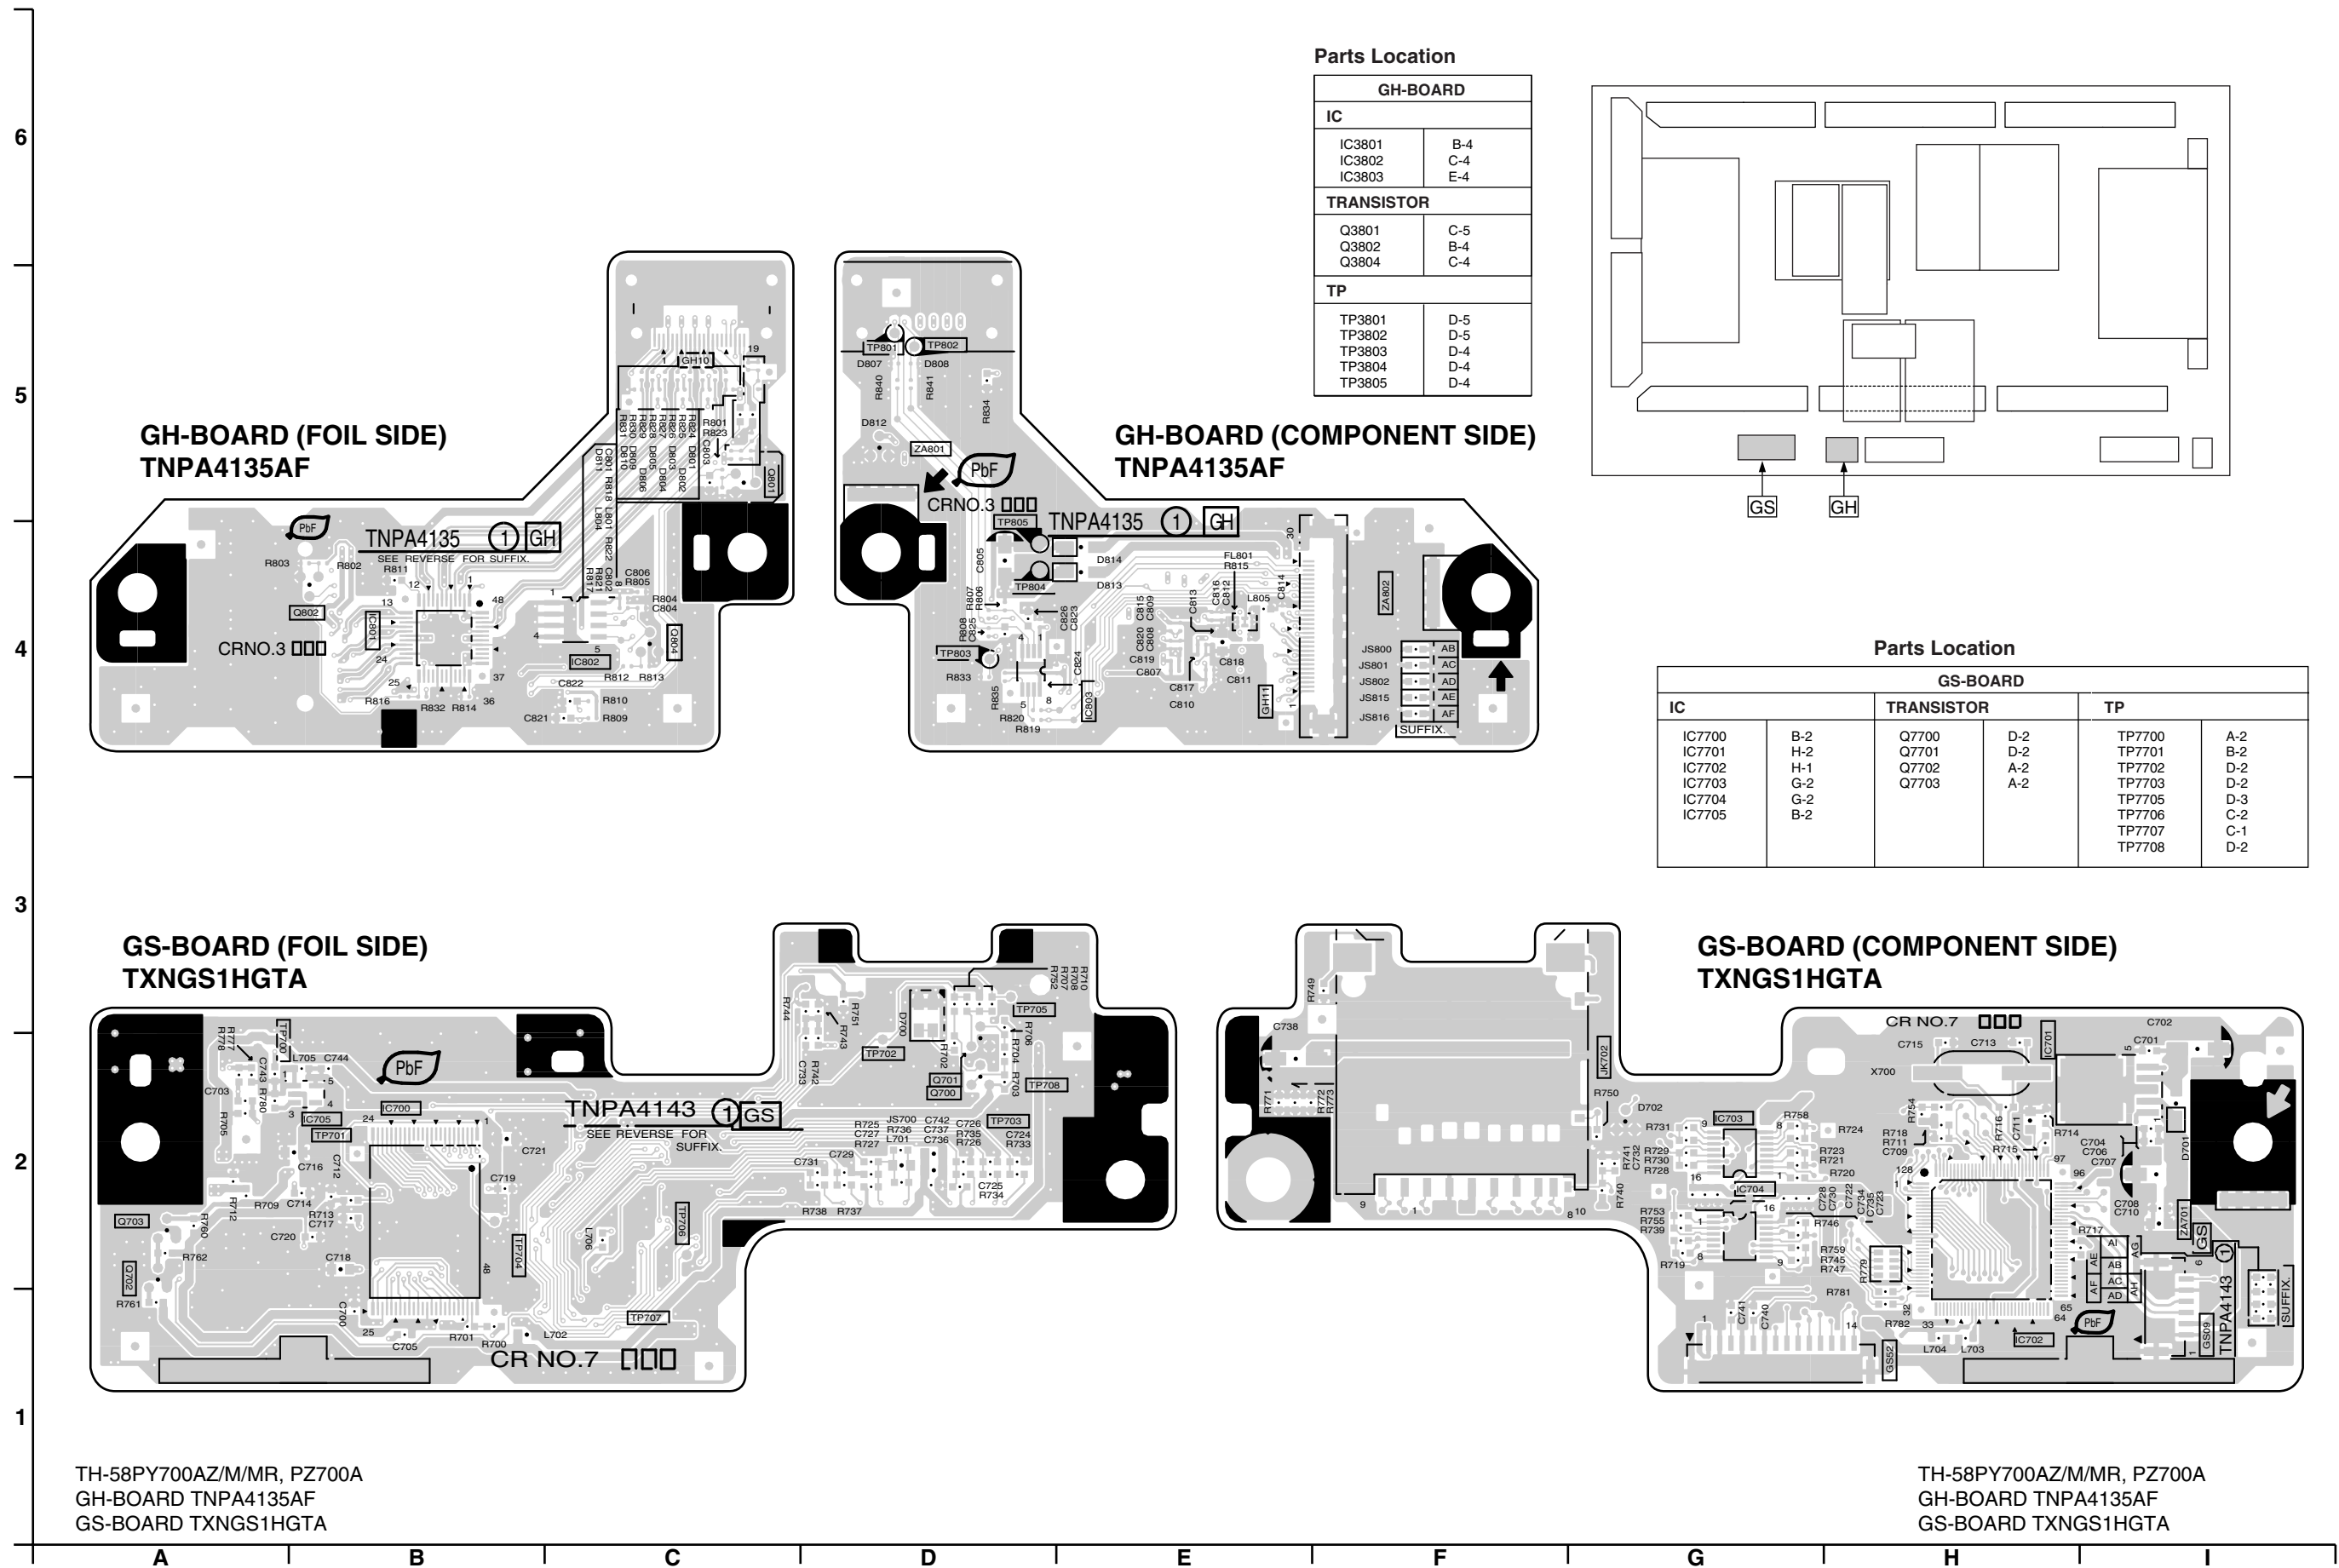

Parts Location

| GH-BOARD | |
|-------------------|-----|
| IC | |
| IC3801 | B-4 |
| IC3802 | C-4 |
| IC3803 | E-4 |
| TRANSISTOR | |
| Q3801 | C-5 |
| Q3802 | B-4 |
| Q3804 | C-4 |
| TP | |
| TP3801 | D-5 |
| TP3802 | D-5 |
| TP3803 | D-4 |
| TP3804 | D-4 |
| TP3805 | D-4 |

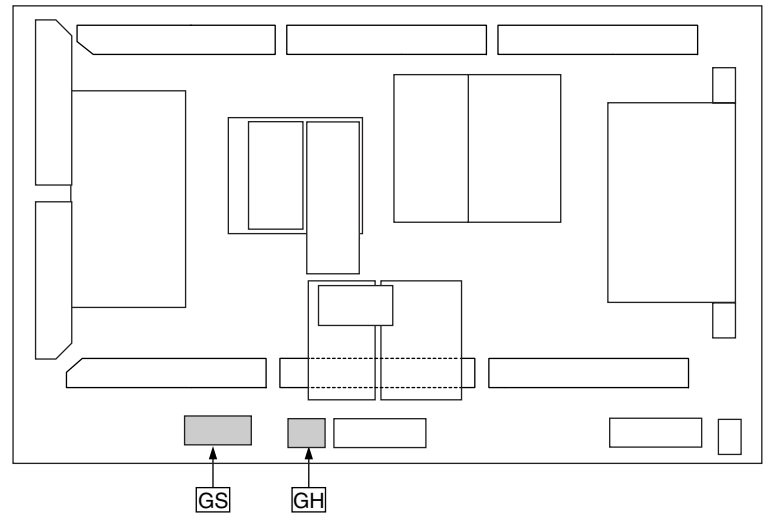



Parts Location

| GS-BOARD | | | | | |
|----------|-----|------------|-----|--------|-----|
| IC | | TRANSISTOR | | TP | |
| IC7700 | B-2 | Q7700 | D-2 | TP7700 | A-2 |
| IC7701 | H-2 | Q7701 | D-2 | TP7701 | B-2 |
| IC7702 | H-1 | Q7702 | A-2 | TP7702 | D-2 |
| IC7703 | G-2 | Q7703 | A-2 | TP7703 | D-2 |
| IC7704 | G-2 | | | TP7705 | D-3 |
| IC7705 | B-2 | | | TP7706 | C-2 |
| | | | | TP7707 | C-1 |
| | | | | TP7708 | D-2 |

TH-58PY700AZ/M/MR, PZ700A
GH-BOARD TNPA4135AF
GS-BOARD TXNGS1HGTA

TH-58PY700AZ/M/MR, PZ700A
GH-BOARD TNPA4135AF
GS-BOARD TXNGS1HGTA

14.7. JG-Board

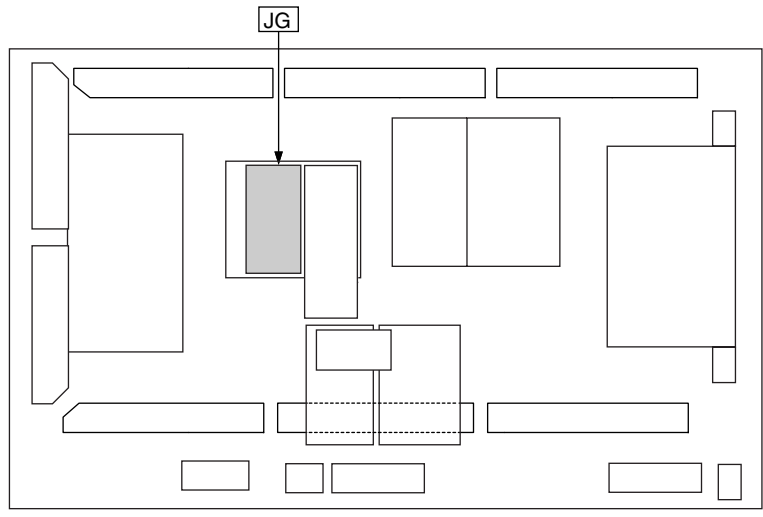
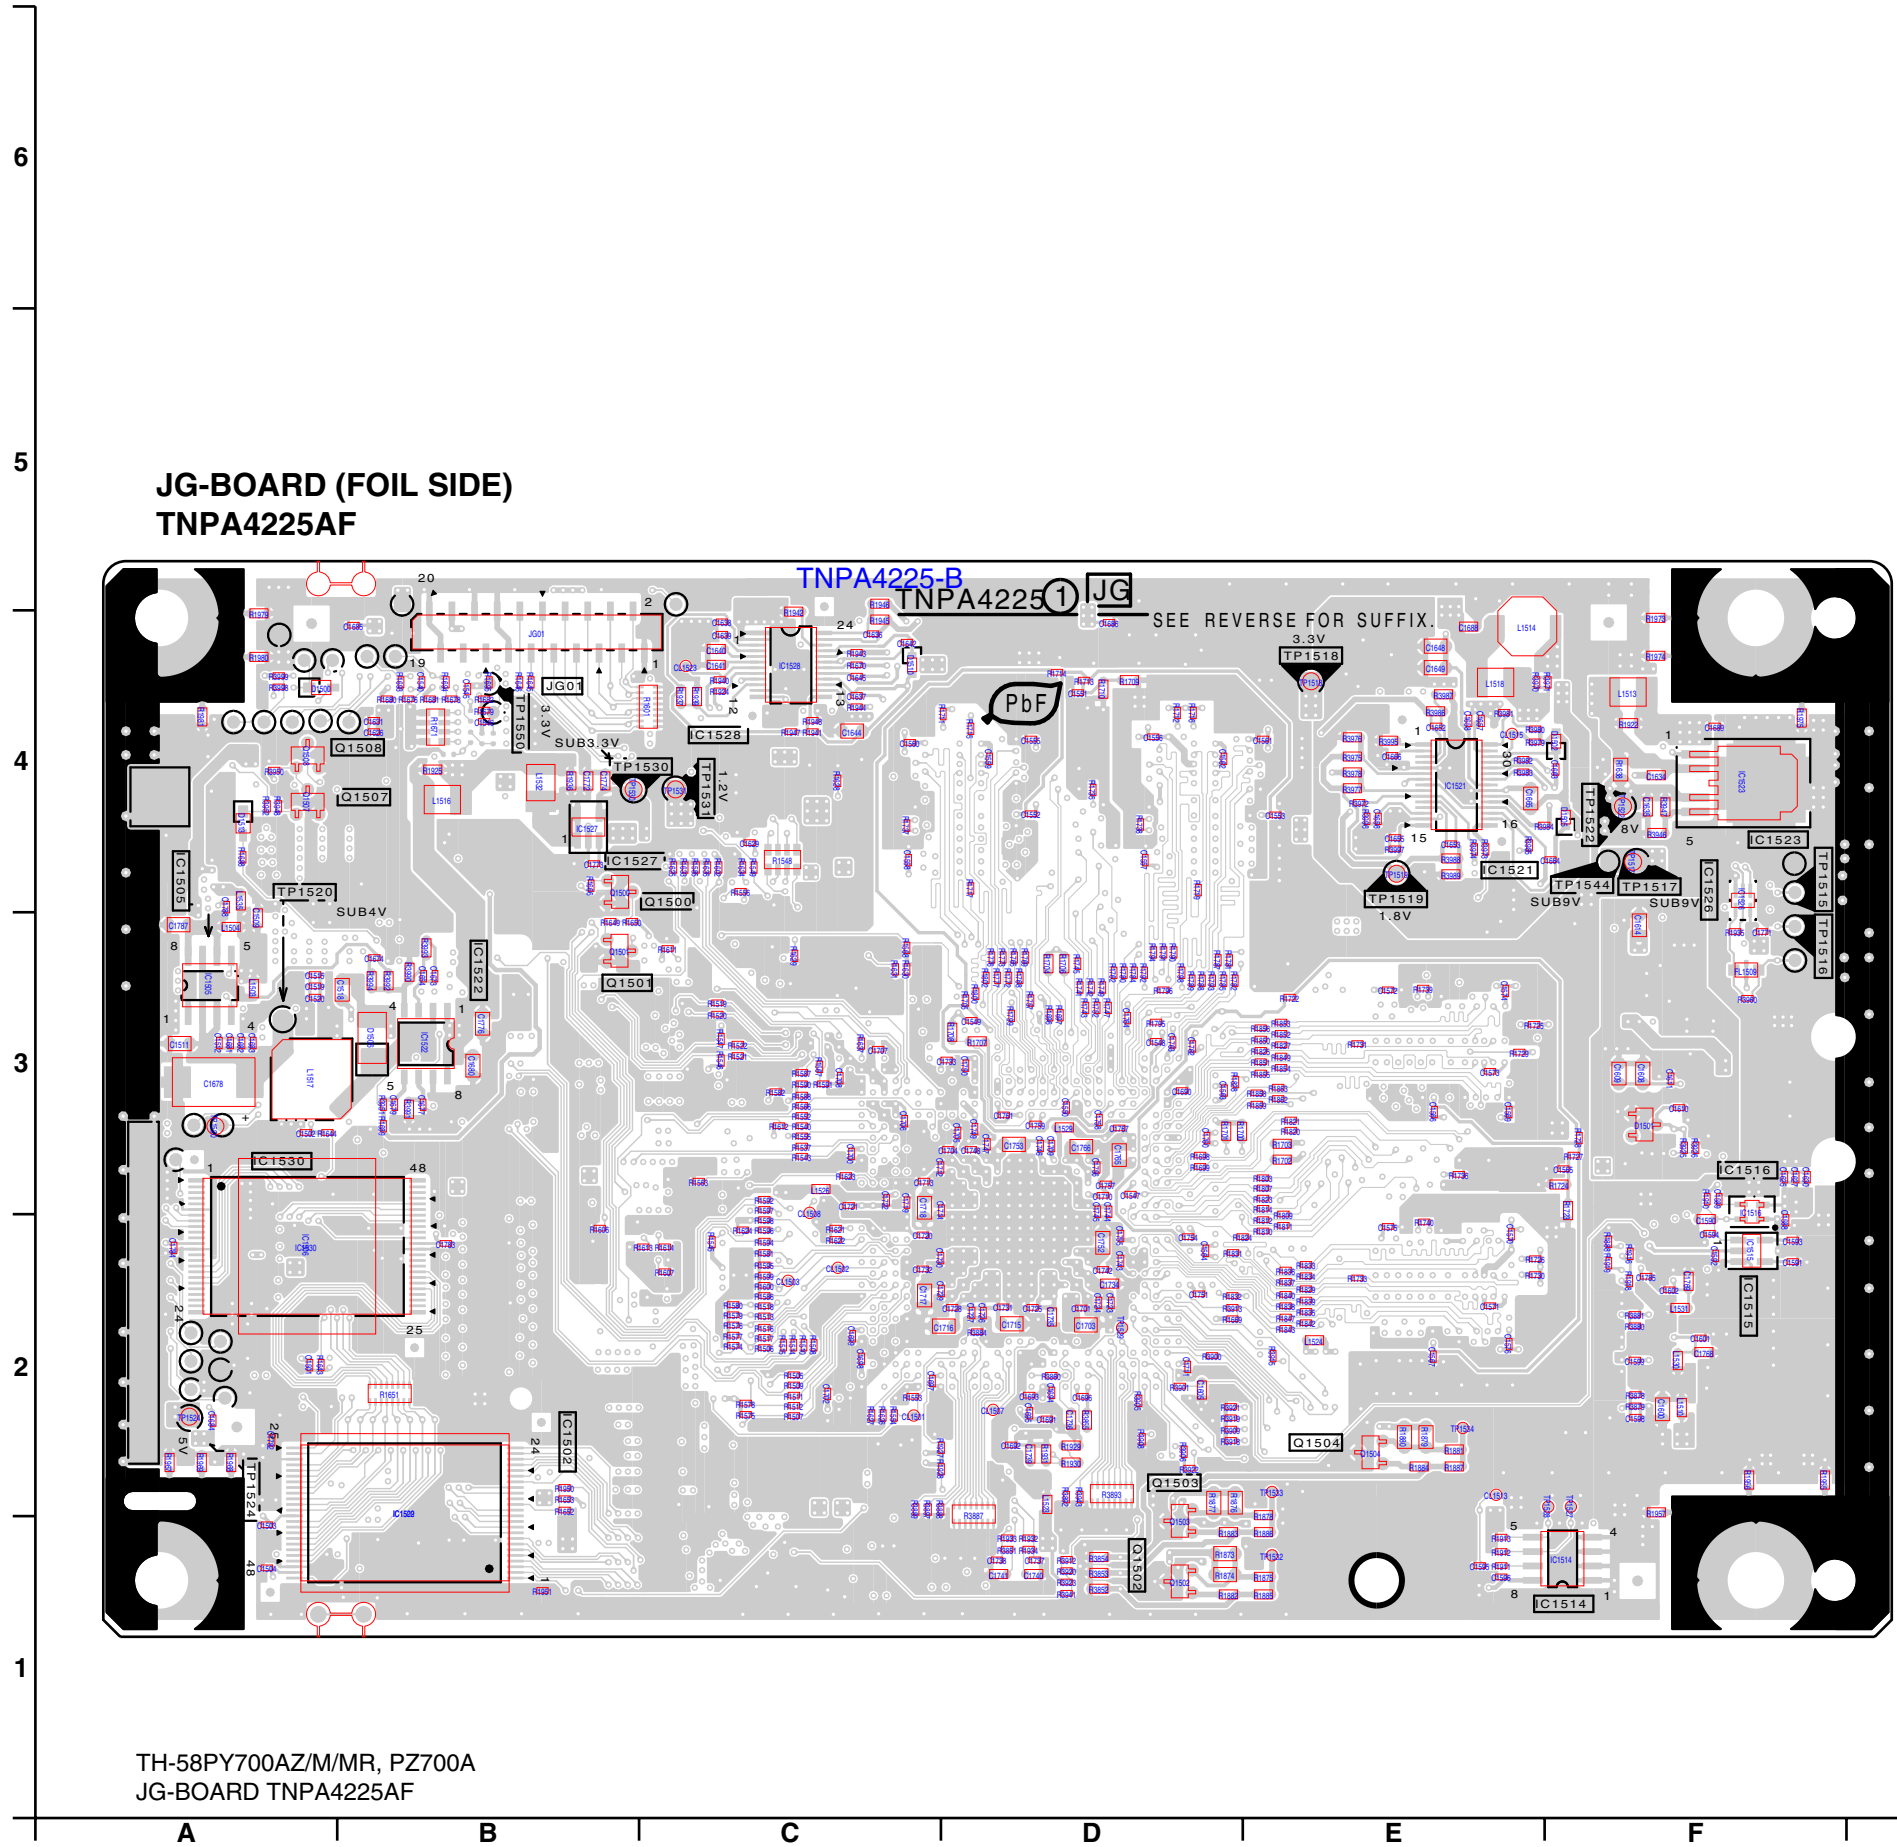


Parts Location

| JG-BOARD | |
|-------------------|-----|
| IC | |
| IC1502 | B-2 |
| IC1505 | A-4 |
| IC1514 | F-1 |
| IC1515 | F-2 |
| IC1516 | F-3 |
| IC1521 | E-4 |
| IC1522 | B-3 |
| IC1523 | F-4 |
| IC1526 | F-4 |
| IC1527 | B-4 |
| IC1528 | C-4 |
| IC1530 | A-3 |
| TRANSISTOR | |
| Q1500 | C-4 |
| Q1501 | B-3 |
| Q1502 | D-1 |
| Q1503 | D-2 |
| Q1504 | E-2 |
| Q1507 | B-4 |
| Q1508 | B-4 |
| TP | |
| TP1515 | F-4 |
| TP1516 | F-3 |
| TP1517 | F-4 |
| TP1518 | E-4 |
| TP1519 | E-4 |
| TP1520 | A-3 |
| TP1522 | F-4 |
| TP1524 | A-2 |
| TP1530 | B-4 |
| TP1531 | C-4 |
| TP1544 | F-4 |
| TP1550 | B-4 |

6
5
4
3
2
1

**JG-BOARD (COMPONENT SIDE)
TNPA4225AF**

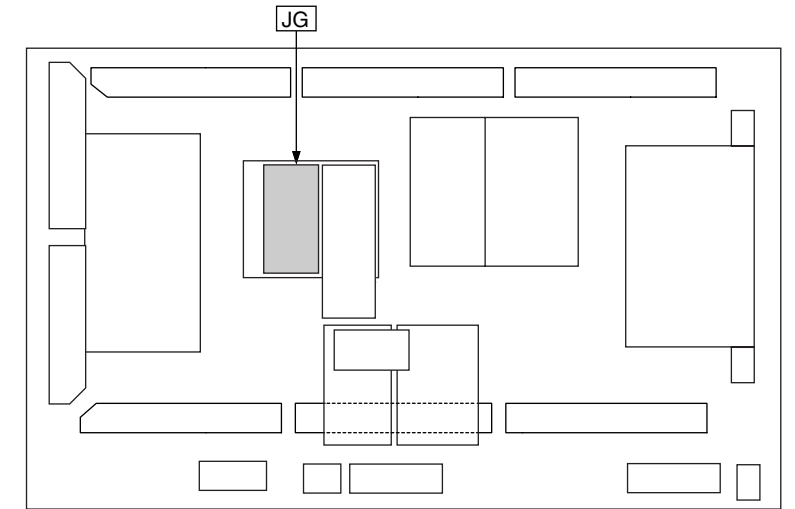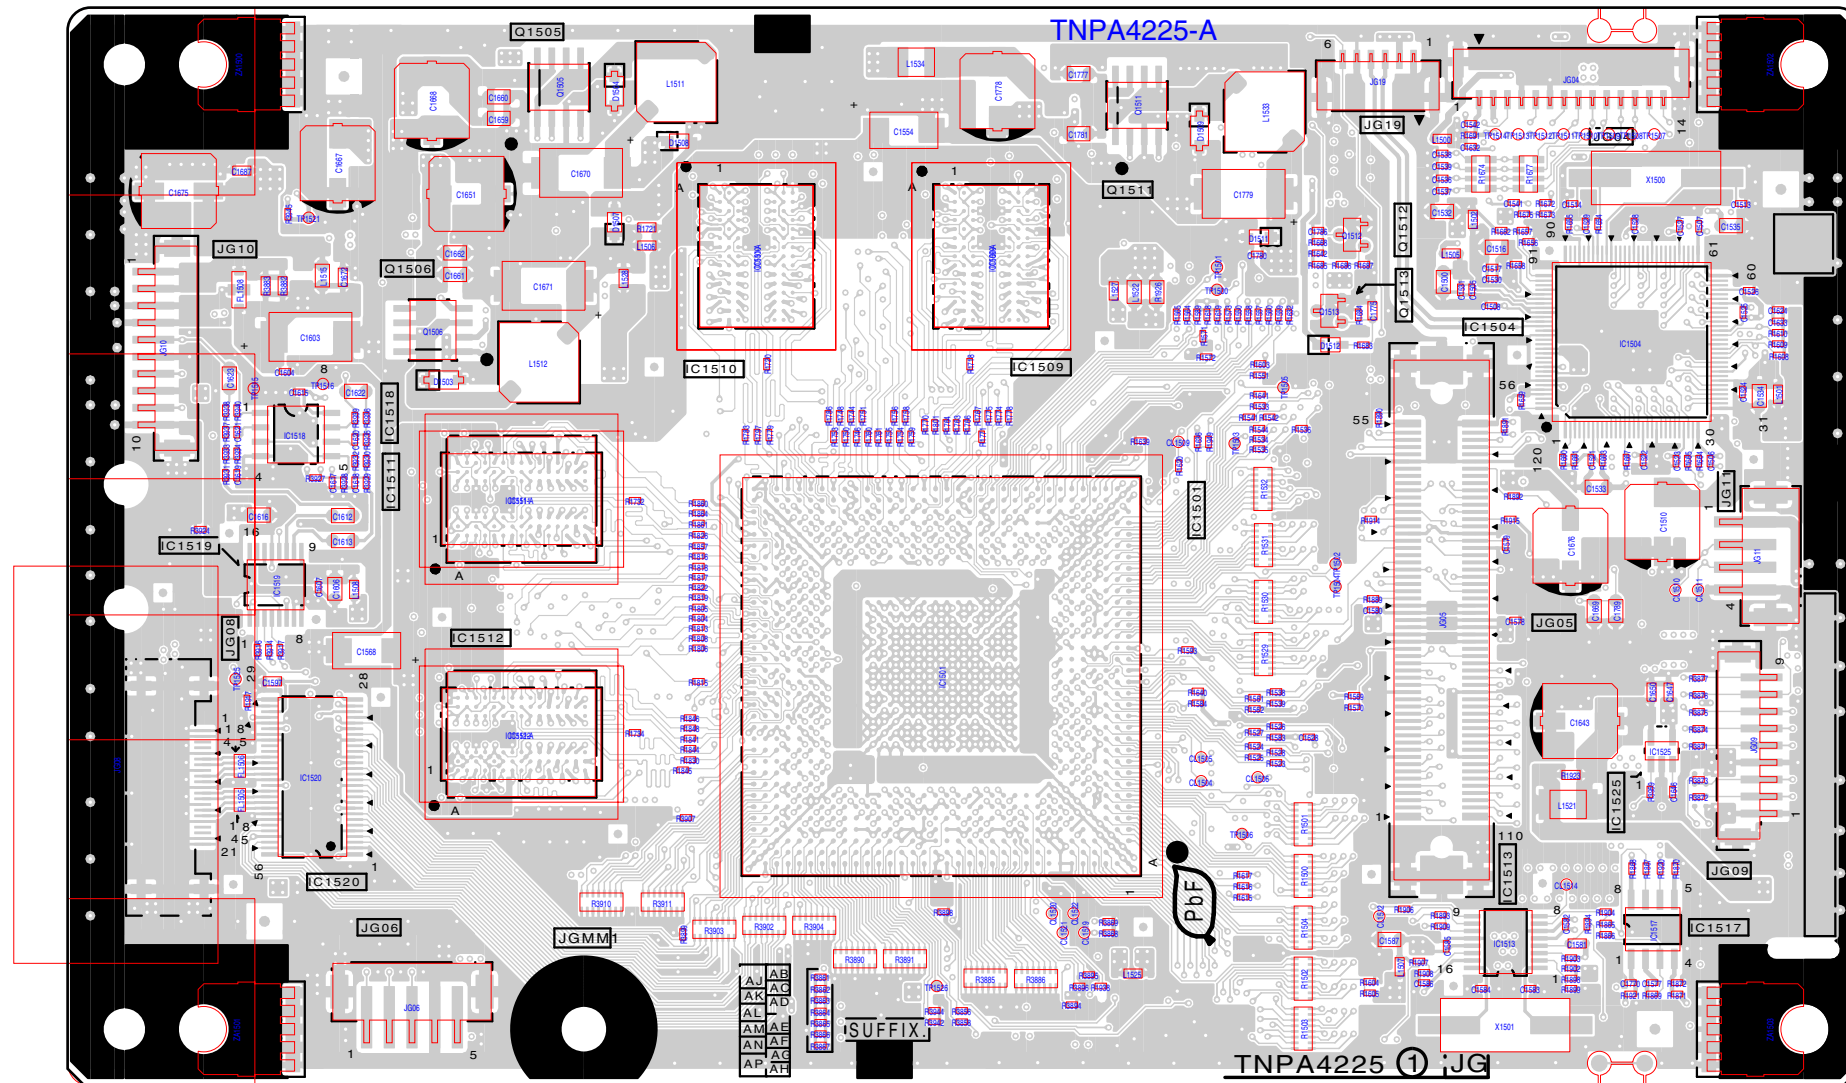

Parts Location

| JG-BOARD | |
|-------------------|-----|
| IC | |
| IC1501 | E-3 |
| IC1504 | F-4 |
| IC1509 | D-3 |
| IC1510 | C-3 |
| IC1511 | B-3 |
| IC1512 | B-3 |
| IC1513 | F-2 |
| IC1517 | F-2 |
| IC1518 | B-3 |
| IC1519 | A-3 |
| IC1520 | B-2 |
| IC1525 | F-2 |
| TRANSISTOR | |
| Q1505 | B-4 |
| Q1506 | B-4 |
| Q1511 | D-4 |
| Q1512 | E-4 |
| Q1513 | E-4 |


TH-58PY700AZ/M/MR, PZ700A
JG-BOARD TNPA4225AF

TH-58PY700AZ/M/MR, PZ700A
JG-BOARD TNPA4225AF

A B C D E F G H I


14.8. DG-Board

DG-BOARD (FOIL SIDE)
 TXNDG1HGTA (700A)
 TXNDG1HGTP (700AZ)
 TXNDG1HGTM (700M)
 TXNDG1HGTX (700MR)

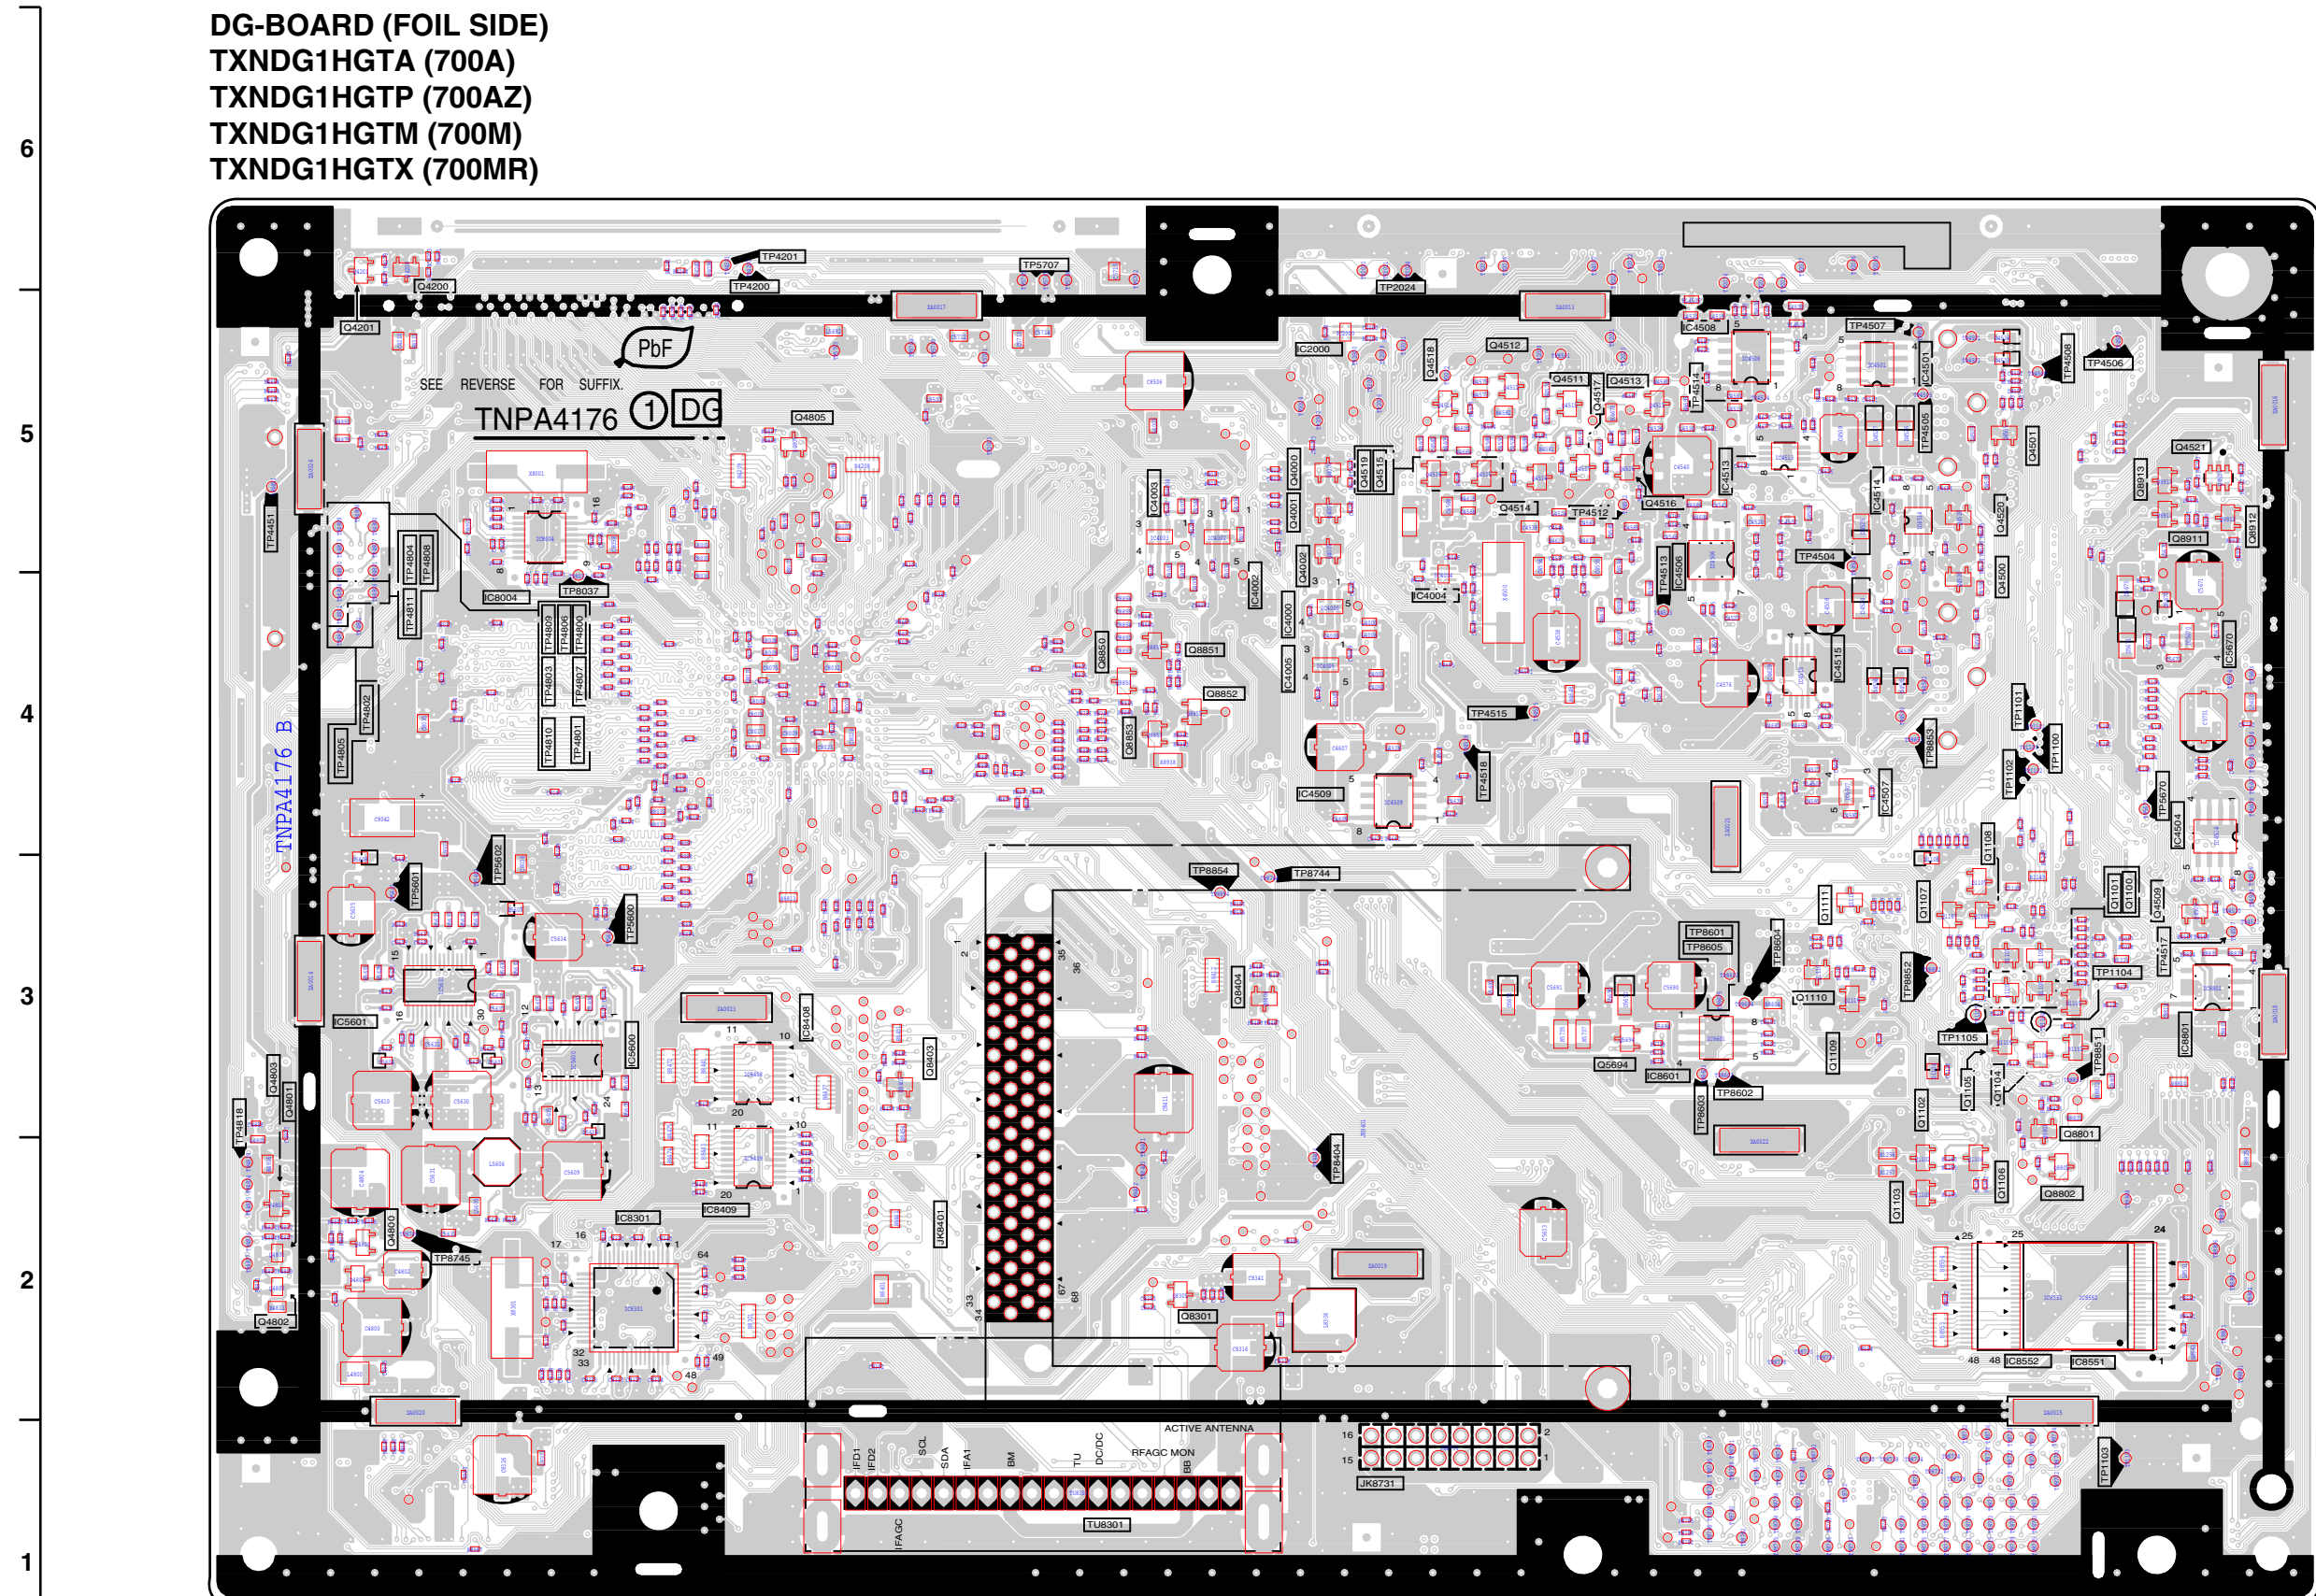

| | | | | | | | |
|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| TH-58PZ700A | TH-58PY700AZ | TH-58PY700M | TH-58PY700MR | TH-58PZ700A | TH-58PY700AZ | TH-58PY700M | TH-58PY700MR |
| DG-BOARD TXNDG1HGTA | DG-BOARD TXNDG1HGTP | DG-BOARD TXNDG1HGTM | DG-BOARD TXNDG1HGTX | DG-BOARD TXNDG1HGTA | DG-BOARD TXNDG1HGTP | DG-BOARD TXNDG1HGTM | DG-BOARD TXNDG1HGTX |

A B C D E F G H I

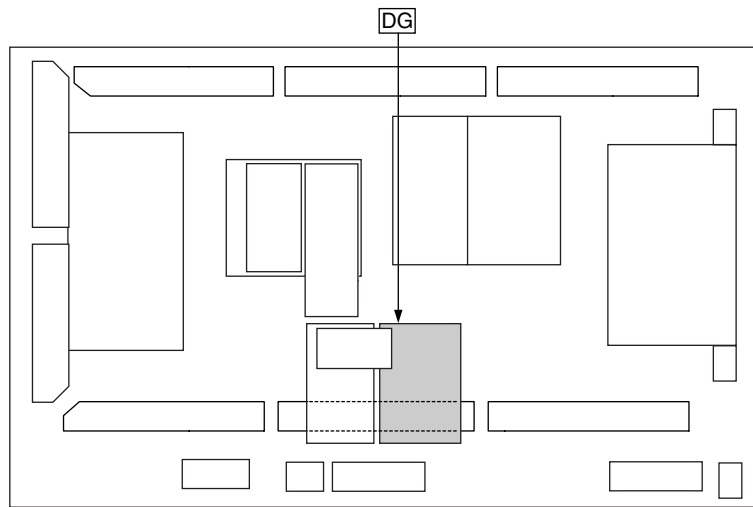

Parts Location


| DG-BOARD (FOIL SIDE) | | | | | |
|----------------------|-----|------------|-----|--------|-----|
| IC | | TRANSISTOR | | TP | |
| IC2000 | E-5 | Q1100 | H-3 | TP1100 | H-4 |
| IC4000 | E-4 | Q1101 | H-3 | TP1101 | H-4 |
| IC4002 | E-4 | Q1102 | G-3 | TP1102 | G-4 |
| IC4003 | D-5 | Q1103 | G-2 | TP1103 | H-1 |
| IC4004 | E-4 | Q1104 | G-3 | TP1104 | H-3 |
| IC4005 | E-4 | Q1105 | G-3 | TP1105 | G-3 |
| IC4501 | G-5 | Q1106 | G-2 | TP2024 | E-6 |
| IC4504 | H-4 | Q1107 | G-3 | TP4200 | C-6 |
| IC4506 | F-4 | Q1108 | G-3 | TP4201 | C-6 |
| IC4507 | G-4 | Q1109 | G-3 | TP4451 | A-5 |
| IC4508 | F-5 | Q1110 | G-3 | TP4504 | G-5 |
| IC4509 | E-4 | Q1111 | G-3 | TP4505 | G-5 |
| IC4513 | F-5 | Q4000 | E-5 | TP4506 | H-5 |
| IC4514 | G-5 | Q4001 | E-5 | TP4507 | G-5 |
| IC4515 | G-4 | Q4002 | E-4 | TP4508 | H-5 |
| IC5600 | C-3 | Q4200 | B-6 | TP4512 | F-5 |
| IC5601 | B-3 | Q4201 | B-5 | TP4513 | F-4 |
| IC5670 | H-4 | Q4500 | G-4 | TP4514 | F-5 |
| IC8004 | B-4 | Q4501 | H-5 | TP4515 | F-4 |
| IC8301 | C-2 | Q4509 | H-3 | TP4517 | H-3 |
| IC8408 | C-3 | Q4511 | F-5 | TP4518 | F-4 |
| IC8409 | C-2 | Q4512 | F-5 | TP4800 | B-4 |
| IC8601 | F-3 | Q4513 | F-5 | TP4801 | B-4 |
| IC8801 | H-3 | Q4514 | F-5 | TP4802 | B-4 |
| IC8851 | H-2 | Q4515 | E-5 | TP4803 | B-4 |
| IC8852 | H-2 | Q4516 | F-5 | TP4804 | B-5 |
| | | Q4517 | F-5 | TP4805 | B-4 |
| | | Q4518 | E-5 | TP4806 | B-4 |
| | | Q4519 | E-5 | TP4807 | B-4 |
| | | Q4520 | G-5 | TP4808 | B-5 |
| | | Q4521 | H-5 | TP4809 | B-4 |
| | | Q4800 | B-2 | TP4810 | B-4 |
| | | Q4801 | A-3 | TP4811 | B-4 |
| | | Q4802 | A-2 | TP4818 | A-2 |
| | | Q4803 | A-3 | TP5600 | C-3 |
| | | Q4805 | C-5 | TP5601 | B-3 |
| | | Q5694 | F-3 | TP5602 | B-3 |
| | | Q8301 | E-2 | TP5670 | H-4 |
| | | Q8403 | D-3 | TP5707 | D-6 |
| | | Q8404 | E-3 | TP8037 | B-4 |
| | | Q8801 | H-3 | TP8404 | E-2 |
| | | Q8802 | H-2 | TP8601 | F-3 |
| | | Q8850 | D-4 | TP8602 | F-3 |
| | | Q8851 | E-4 | TP8603 | F-3 |
| | | Q8852 | E-4 | TP8604 | G-3 |
| | | Q8853 | D-4 | TP8605 | F-3 |
| | | Q8911 | H-5 | TP8744 | E-3 |
| | | Q8912 | H-5 | TP8745 | B-2 |
| | | Q8913 | H-5 | TP8851 | H-3 |
| | | | | TP8852 | G-3 |
| | | | | TP8853 | G-4 |
| | | | | TP8854 | E-3 |

Parts Location

| DG-BOARD (COMPONENT SIDE) | | | |
|---------------------------|-----|------------|-----|
| IC | | TRANSISTOR | |
| IC1100 | B-3 | Q2000 | B-3 |
| IC1101 | B-4 | Q2001 | B-3 |
| IC4001 | E-4 | Q4502 | B-5 |
| IC4500 | C-5 | Q4503 | B-4 |
| IC4503 | C-5 | Q4504 | B-6 |
| IC4510 | C-4 | Q4505 | B-5 |
| IC4800 | A-3 | Q5600 | G-3 |
| IC5660 | H-3 | Q5601 | H-3 |
| IC5671 | B-4 | Q5602 | H-3 |
| IC5672 | D-3 | Q5603 | H-3 |
| IC8001 | F-4 | Q5604 | H-3 |
| IC8002 | G-4 | Q5690 | C-3 |
| IC8003 | G-4 | Q5691 | C-3 |
| IC8302 | H-2 | Q5692 | C-3 |
| IC8401 | E-3 | Q5693 | D-3 |
| IC8402 | F-3 | Q8401 | E-2 |
| IC8403 | E-2 | Q8402 | E-2 |
| IC8404 | F-3 | Q8501 | F-5 |
| IC8405 | F-2 | | |
| IC8406 | E-3 | | |
| IC8407 | E-3 | | |
| IC8553 | B-2 | | |
| IC8621 | C-2 | | |
| IC8622 | C-2 | | |
| IC8654 | C-2 | | |

DG-BOARD (COMPONENT SIDE)
 TXNDG1HGTA (700A)
 TXNDG1HGTP (700AZ)
 TXNDG1HGTM (700M)
 TXNDG1HGTX (700MR)

6
5
4
3
2
1

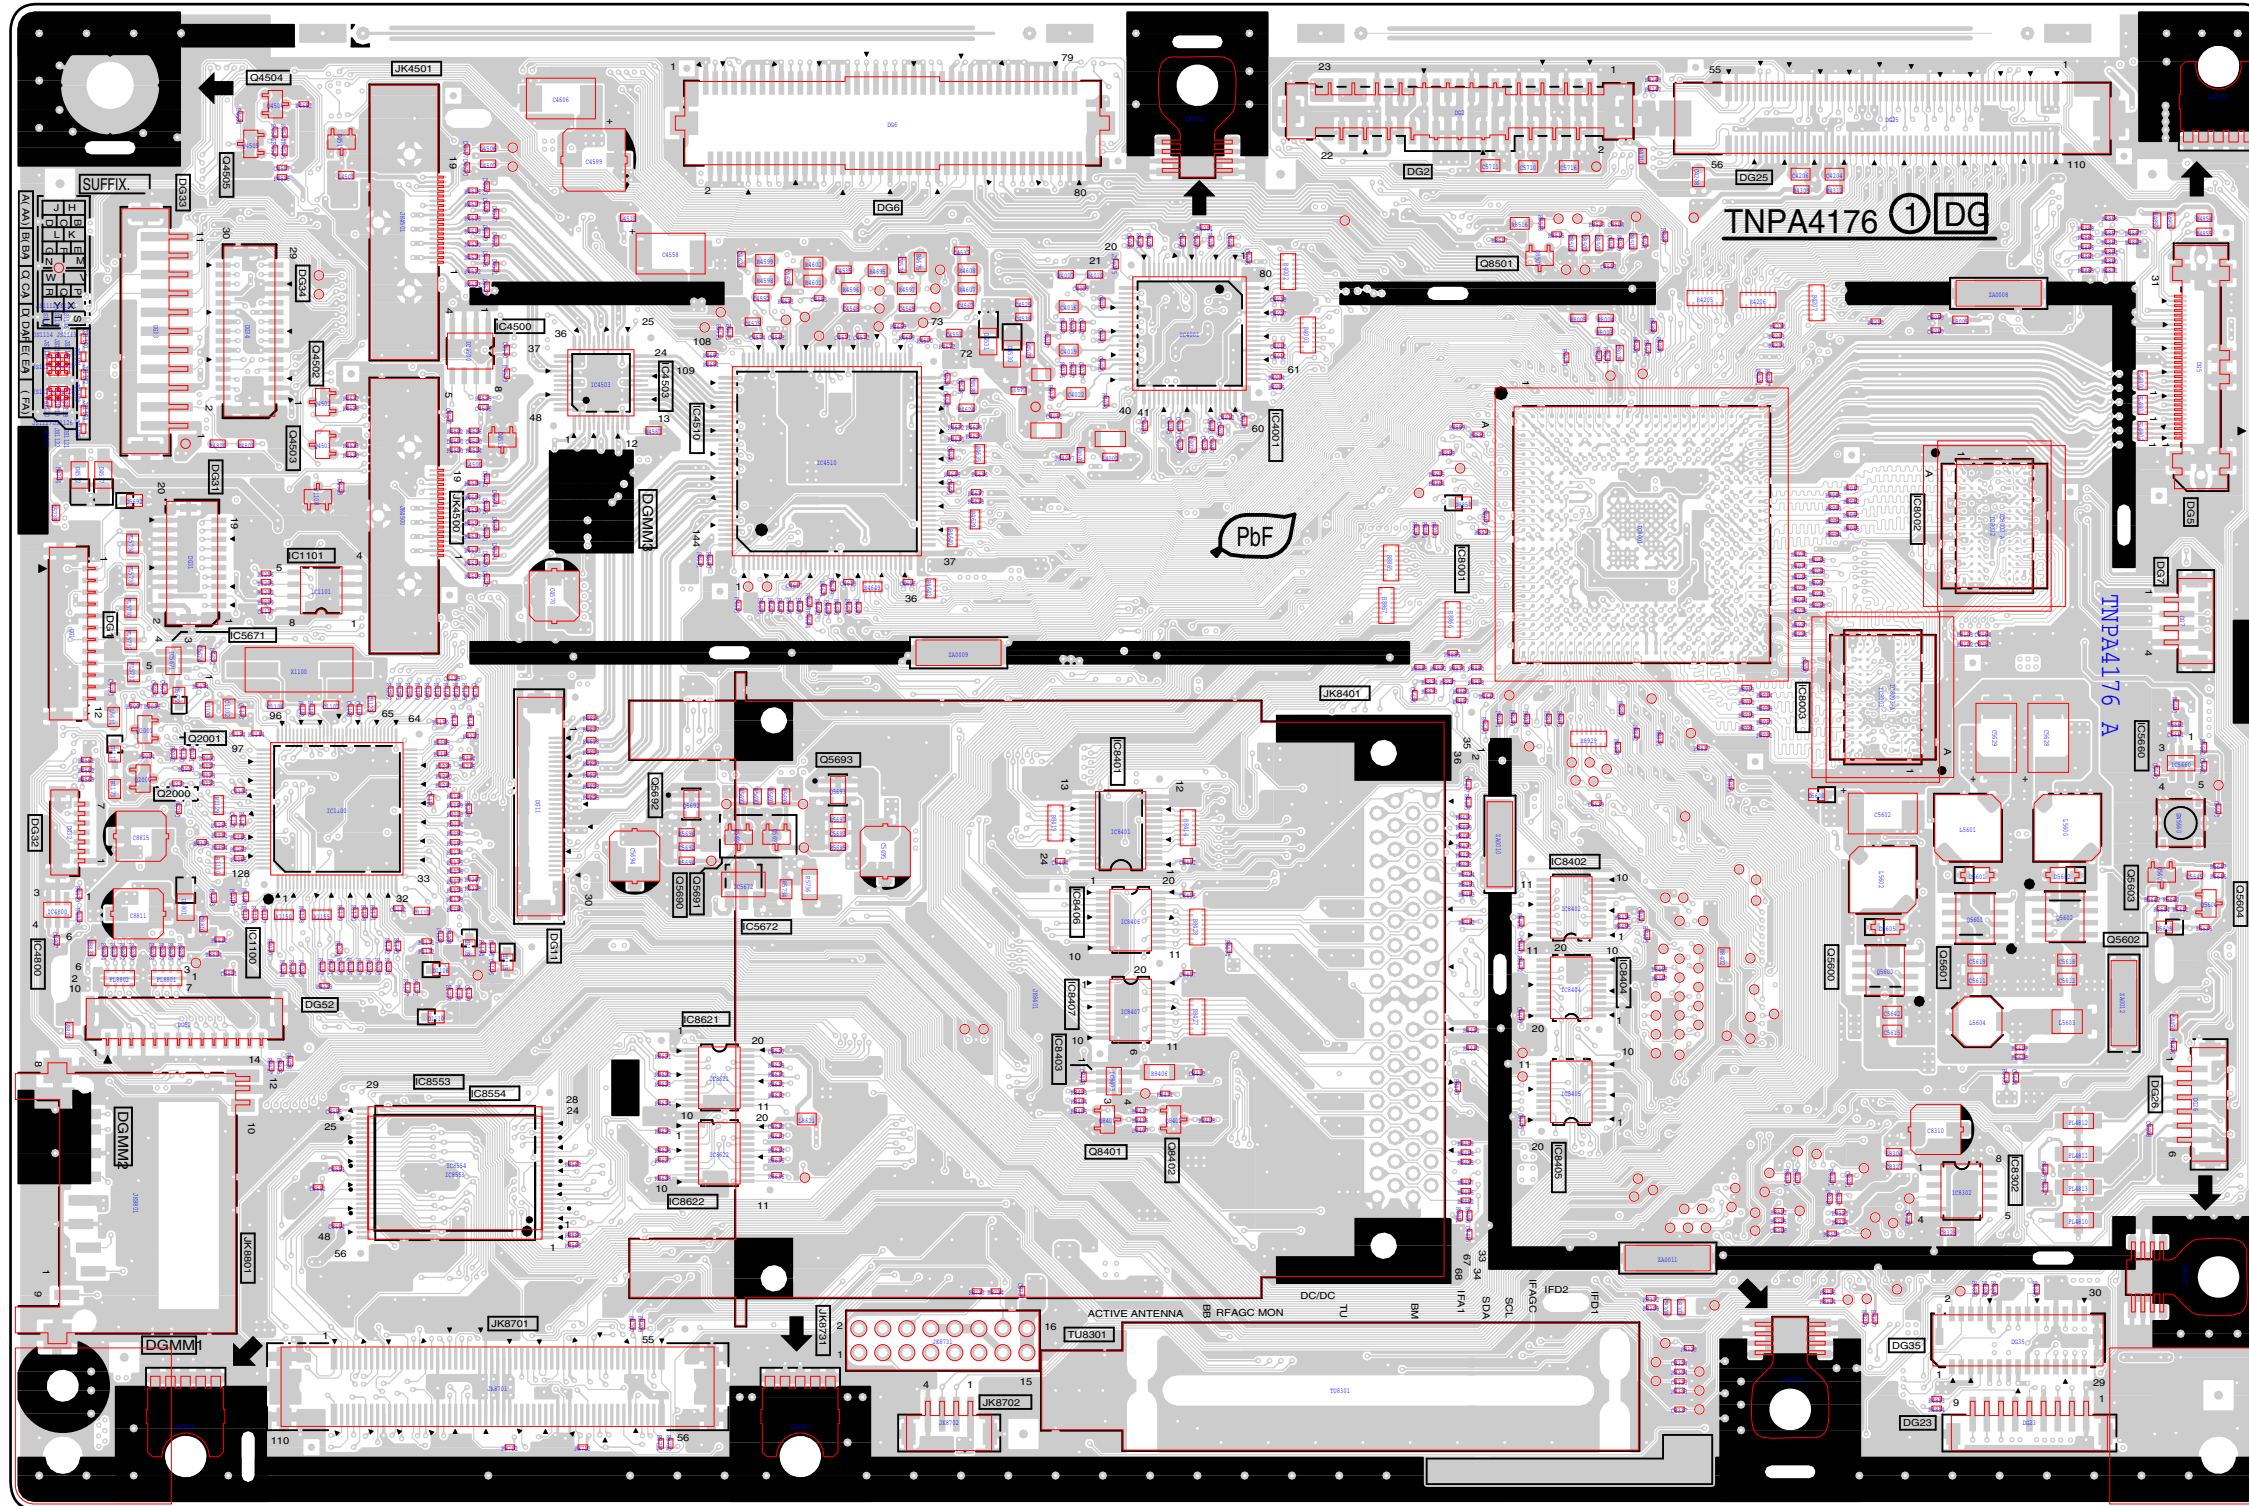

| | | | | | | | |
|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| TH-58PZ700A | TH-58PY700AZ | TH-58PY700M | TH-58PY700MR | TH-58PZ700A | TH-58PY700AZ | TH-58PY700M | TH-58PY700MR |
| DG-BOARD TXNDG1HGTA | DG-BOARD TXNDG1HGTP | DG-BOARD TXNDG1HGTM | DG-BOARD TXNDG1HGTX | DG-BOARD TXNDG1HGTA | DG-BOARD TXNDG1HGTP | DG-BOARD TXNDG1HGTM | DG-BOARD TXNDG1HGTX |

A B C D E F G H I


14.9. DH-Board

Parts Location


| DH-BOARD (FOIL SIDE) | | | | | |
|----------------------|-----|--------|-----|-----|--|
| IC | | TP | | | |
| IC5001 | C-2 | TP5000 | C-1 | | |
| IC5002 | B-2 | TP5001 | C-1 | | |
| IC5004 | C-2 | TP5002 | C-1 | | |
| IC5005 | D-2 | TP5003 | B-1 | | |
| IC5006 | A-2 | TP5004 | D-2 | | |
| IC5010 | C-3 | TP5027 | A-2 | | |
| IC5011 | B-3 | TP5028 | A-2 | | |
| IC5012 | B-2 | TP5851 | D-3 | | |
| IC5013 | C-2 | TP5852 | D-3 | | |
| IC5900 | D-1 | TP5853 | D-3 | | |
| IC5901 | D-3 | TP5900 | D-1 | | |
| TRANSISTOR | | TP5901 | D-3 | | |
| | | TP5902 | D-3 | | |
| | | TP5903 | D-1 | | |
| | | TP5904 | A-3 | | |
| | | TP5905 | A-3 | | |
| | | TP5906 | B-3 | | |
| | | TP5907 | B-2 | | |
| | | TP5908 | A-3 | | |
| | | TP5909 | C-2 | | |
| | | Q5002 | | C-2 | |
| | | | | | |

Parts Location


| DH-BOARD (COMPONENT SIDE) | | | | | |
|---------------------------|-----|------------|-----|--------|-----|
| IC | | TRANSISTOR | | TP | |
| IC5000 | G-1 | Q5000 | H-3 | TP5910 | F-1 |
| IC5003 | G-3 | Q5001 | H-3 | TP5911 | E-3 |
| IC5007 | F-1 | Q5900 | E-1 | TP5912 | F-3 |
| IC5008 | H-3 | Q5901 | F-3 | TP5913 | E-2 |
| IC5009 | H-3 | Q5902 | E-3 | TP5914 | H-3 |
| IC5014 | G-2 | | | TP5916 | H-3 |
| IC5015 | H-3 | | | | |
| IC5100 | G-2 | | | | |
| IC5102 | H-1 | | | | |
| IC5103 | F-1 | | | | |
| IC5104 | E-2 | | | | |
| IC5105 | G-3 | | | | |
| IC5851 | F-3 | | | | |

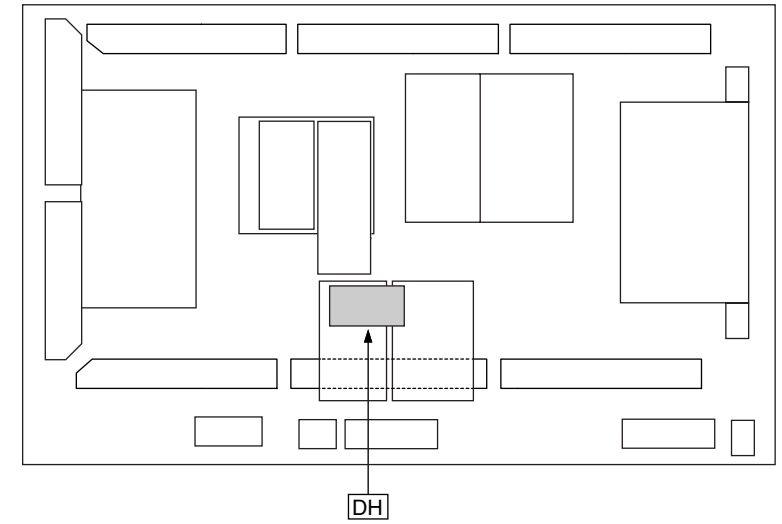

DH-BOARD (FOIL SIDE)
TNPA4458AD

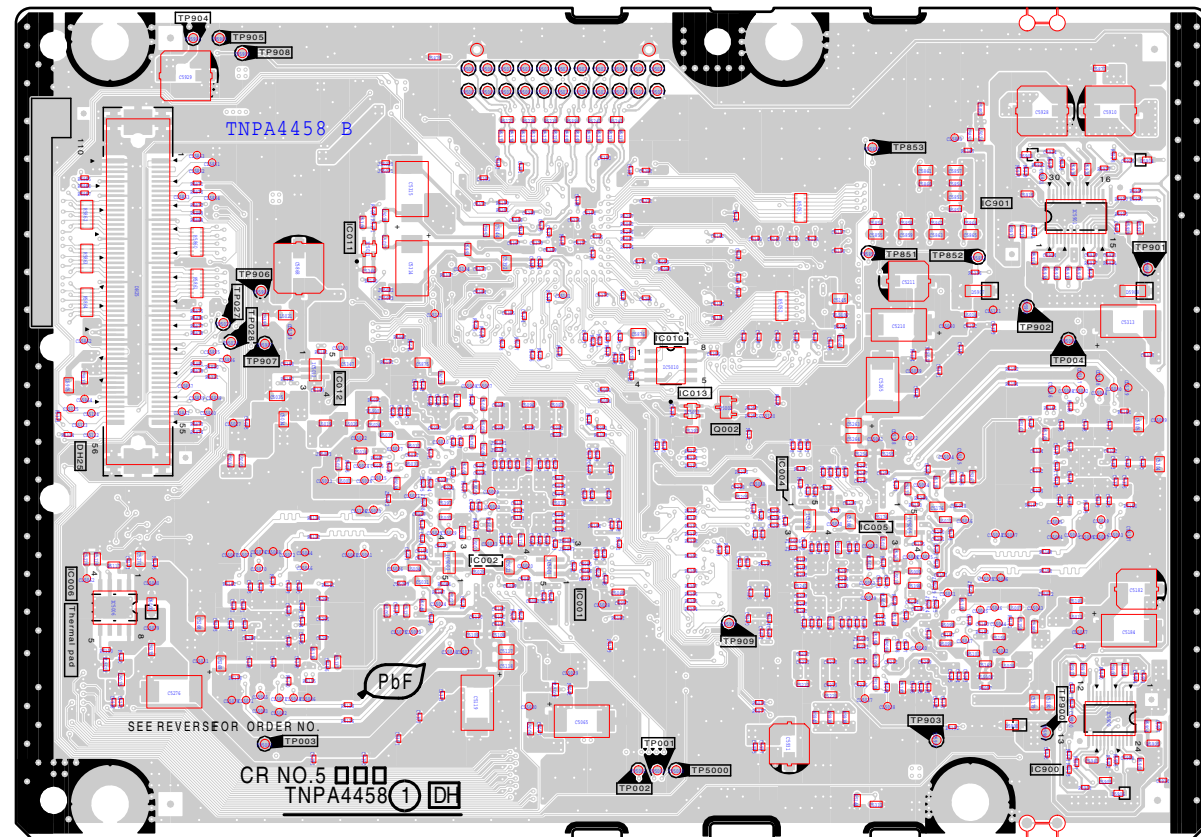

DH-BOARD (COMPONENT SIDE)
TNPA4458AD


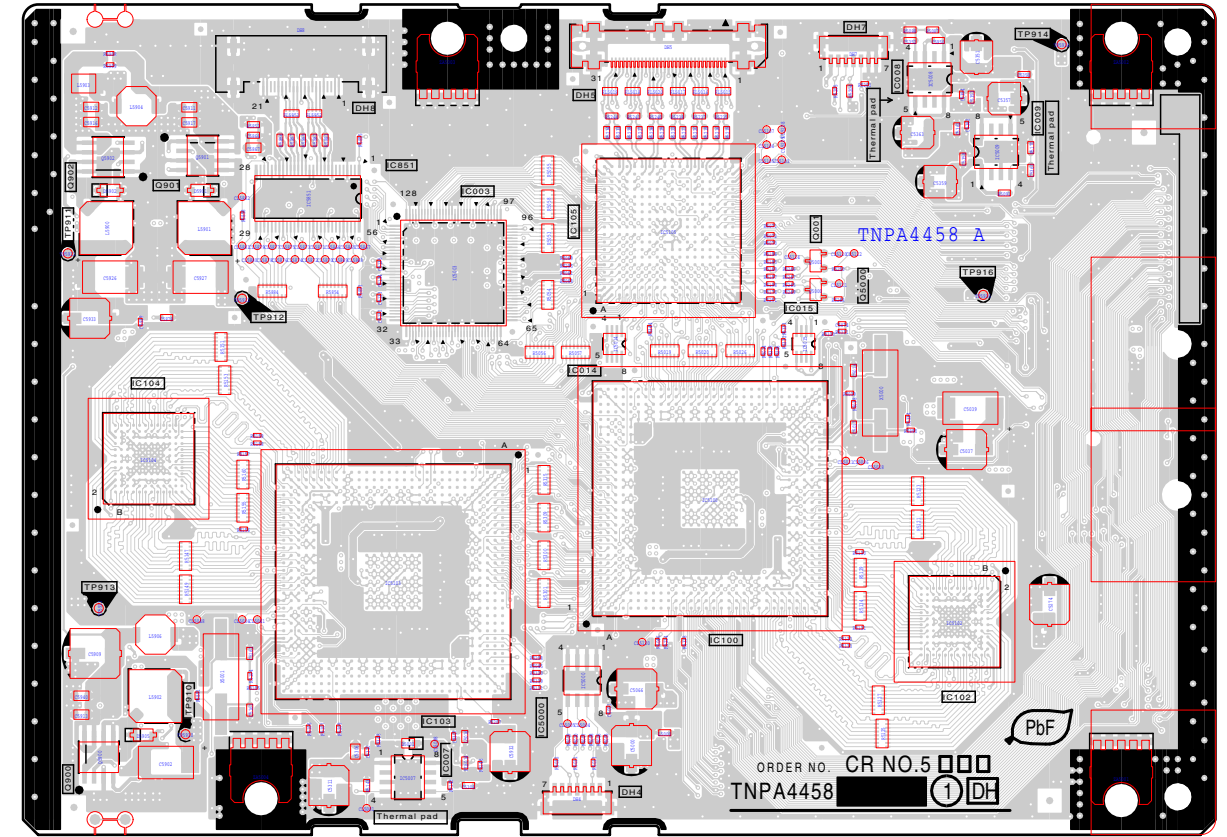


TH-58PY700AZ/M/MR, PZ700A
DH-BOARD TNPA4458AD

TH-58PY700AZ/M/MR, PZ700A
DH-BOARD TNPA4458AD

A B C D E F G H I

14.10. D-Board

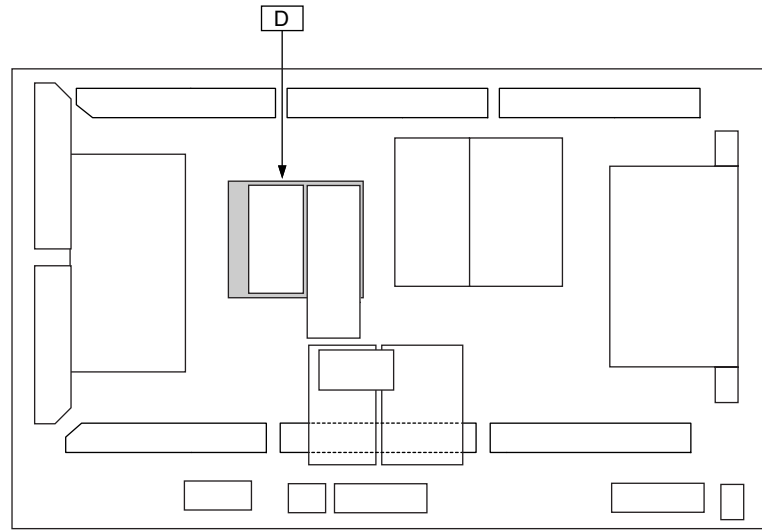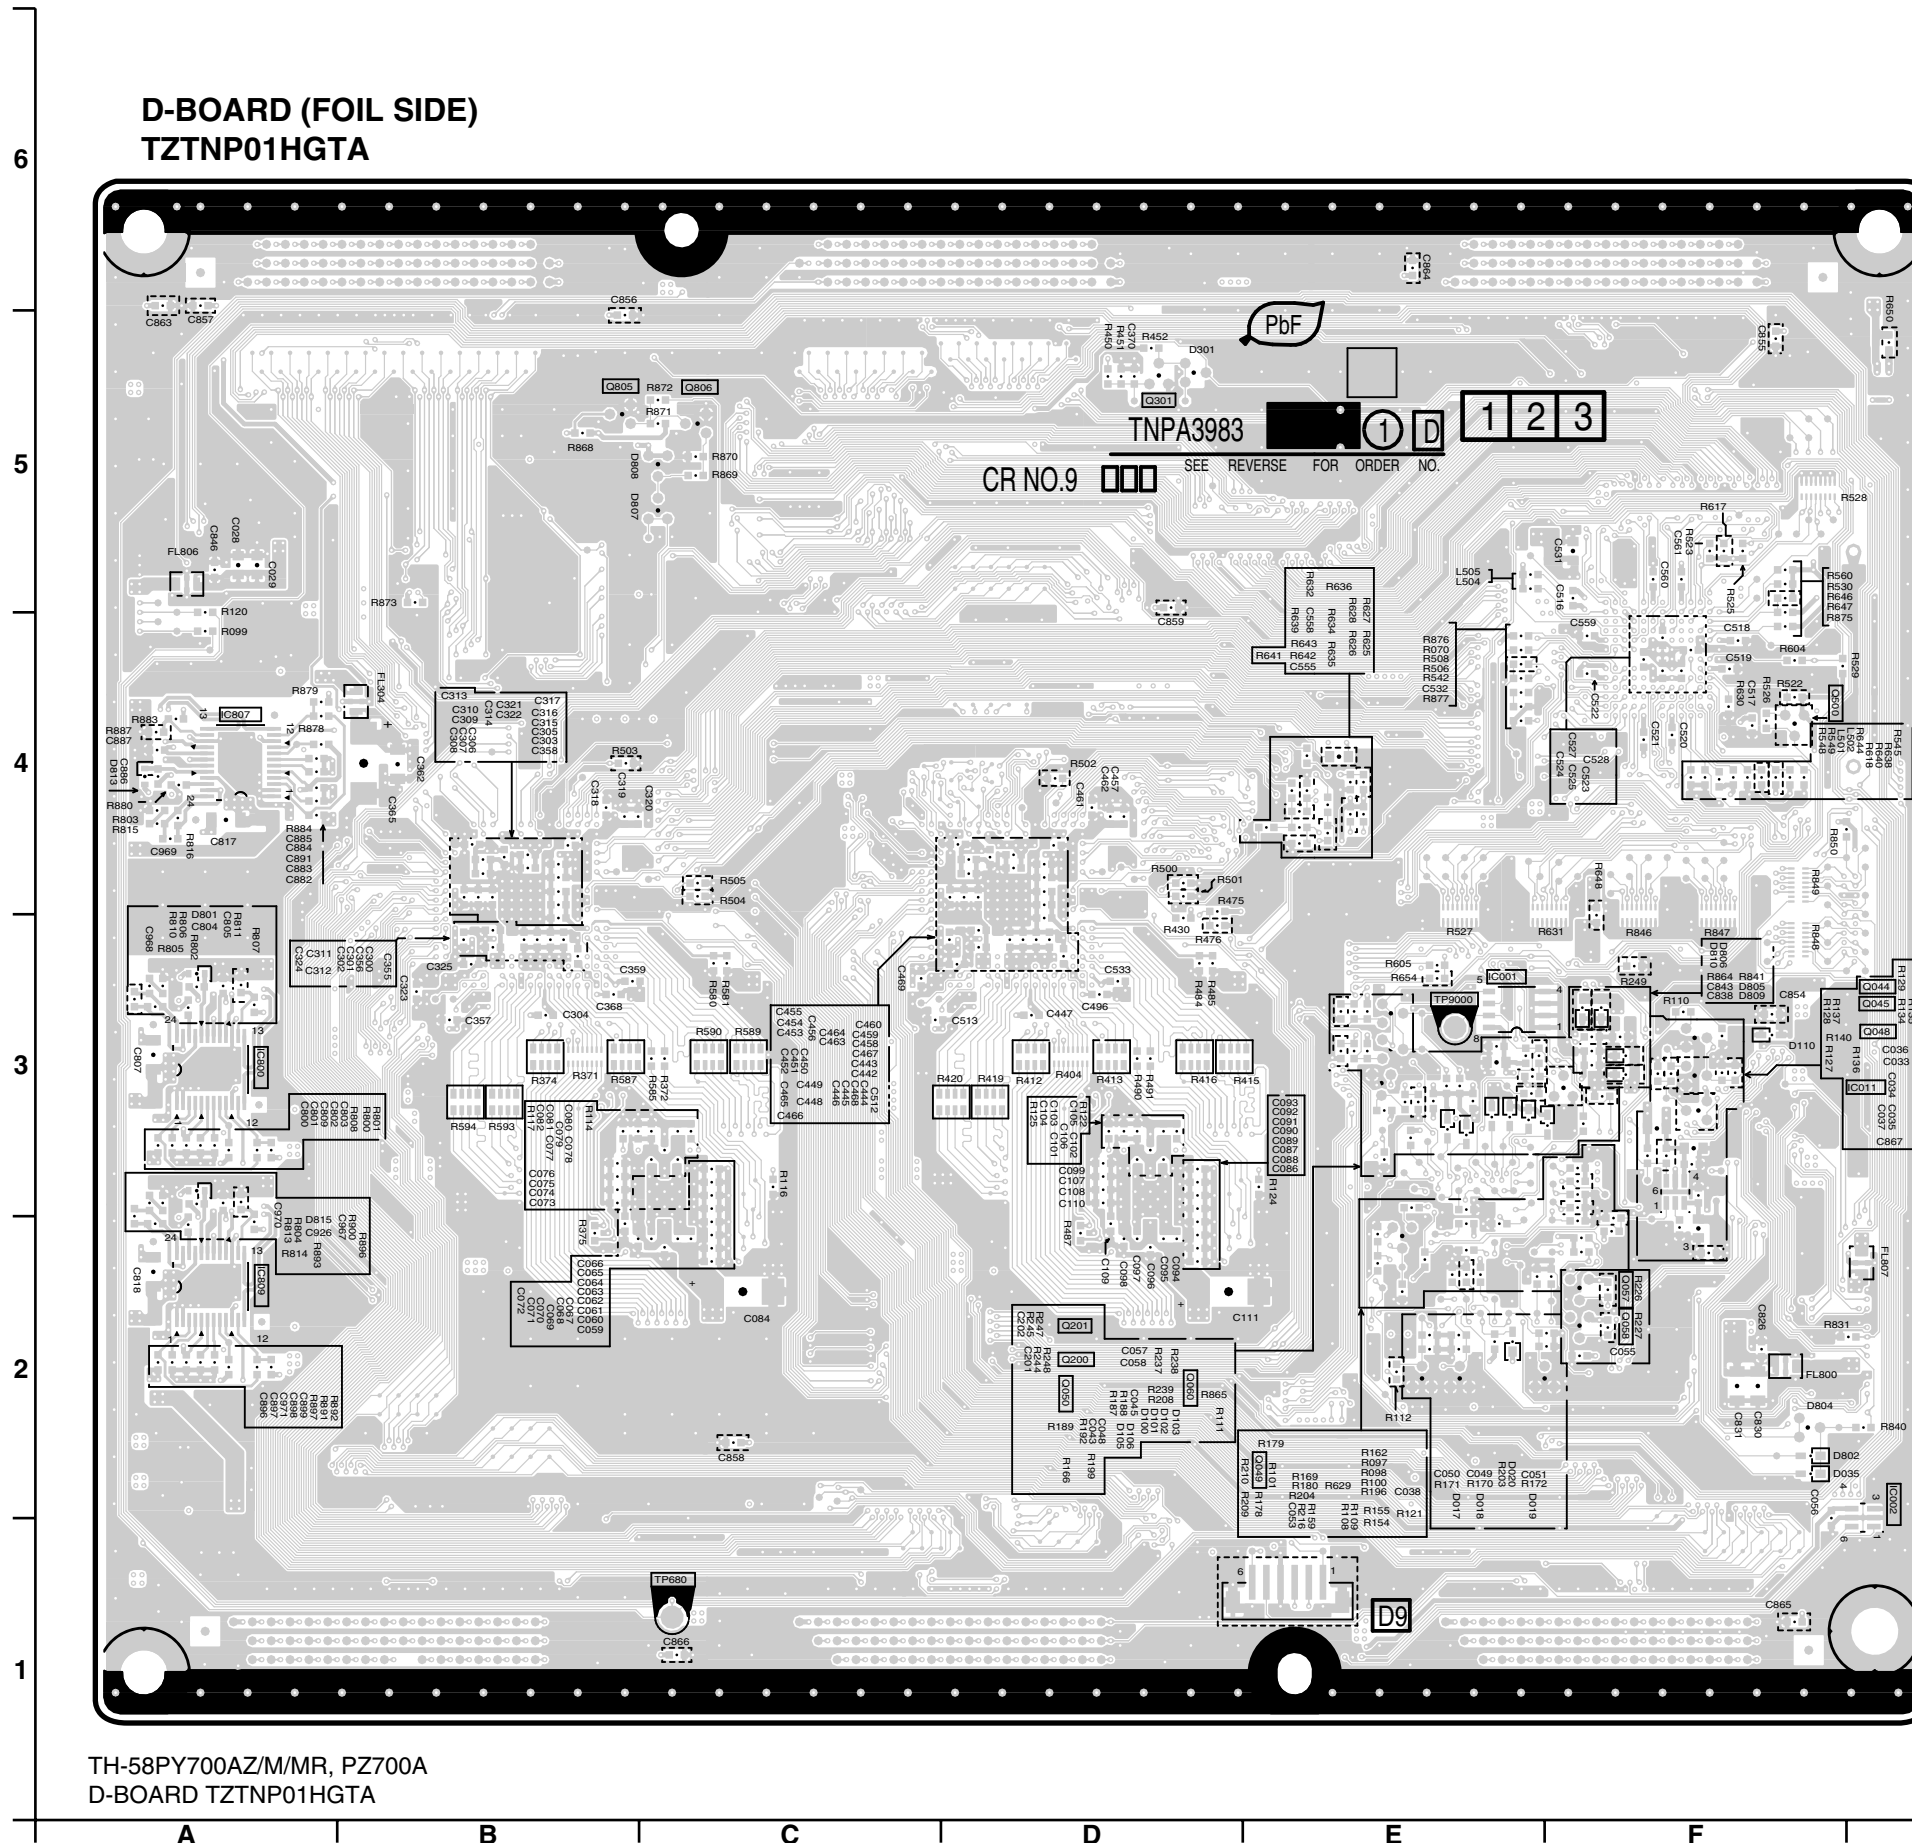

Parts Location



| D-BOARD (COMPONENT SIDE) | | | |
|--------------------------|-----|------------|-----|
| IC | | TRANSISTOR | |
| IC9001 | E-3 | Q9044 | G-3 |
| IC9002 | G-2 | Q9045 | G-3 |
| IC9011 | G-3 | Q9048 | G-3 |
| IC9800 | A-3 | Q9049 | E-2 |
| IC9807 | A-4 | Q9050 | D-2 |
| IC9809 | A-2 | Q9057 | F-2 |
| | | Q9058 | F-2 |
| | | Q9060 | D-2 |
| | | Q9200 | D-2 |
| TP9000 | E-3 | Q9201 | D-2 |
| TP9680 | C-1 | Q9301 | D-5 |
| | | Q9500 | F-4 |
| | | Q9805 | B-5 |
| | | Q9806 | C-5 |

TH-58PY700AZ/M/MR, PZ700A
D-BOARD TZNTP01HGTA

TH-58PY700AZ/M/MR, PZ700A
D-BOARD TZNTP01HGTA

**D-BOARD (COMPONENT SIDE)
TZTNP01HGTA**

6
5
4
3
2
1

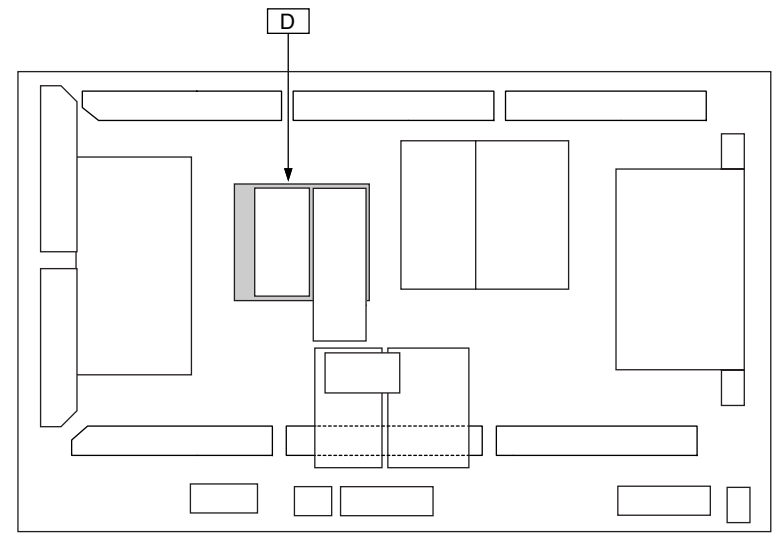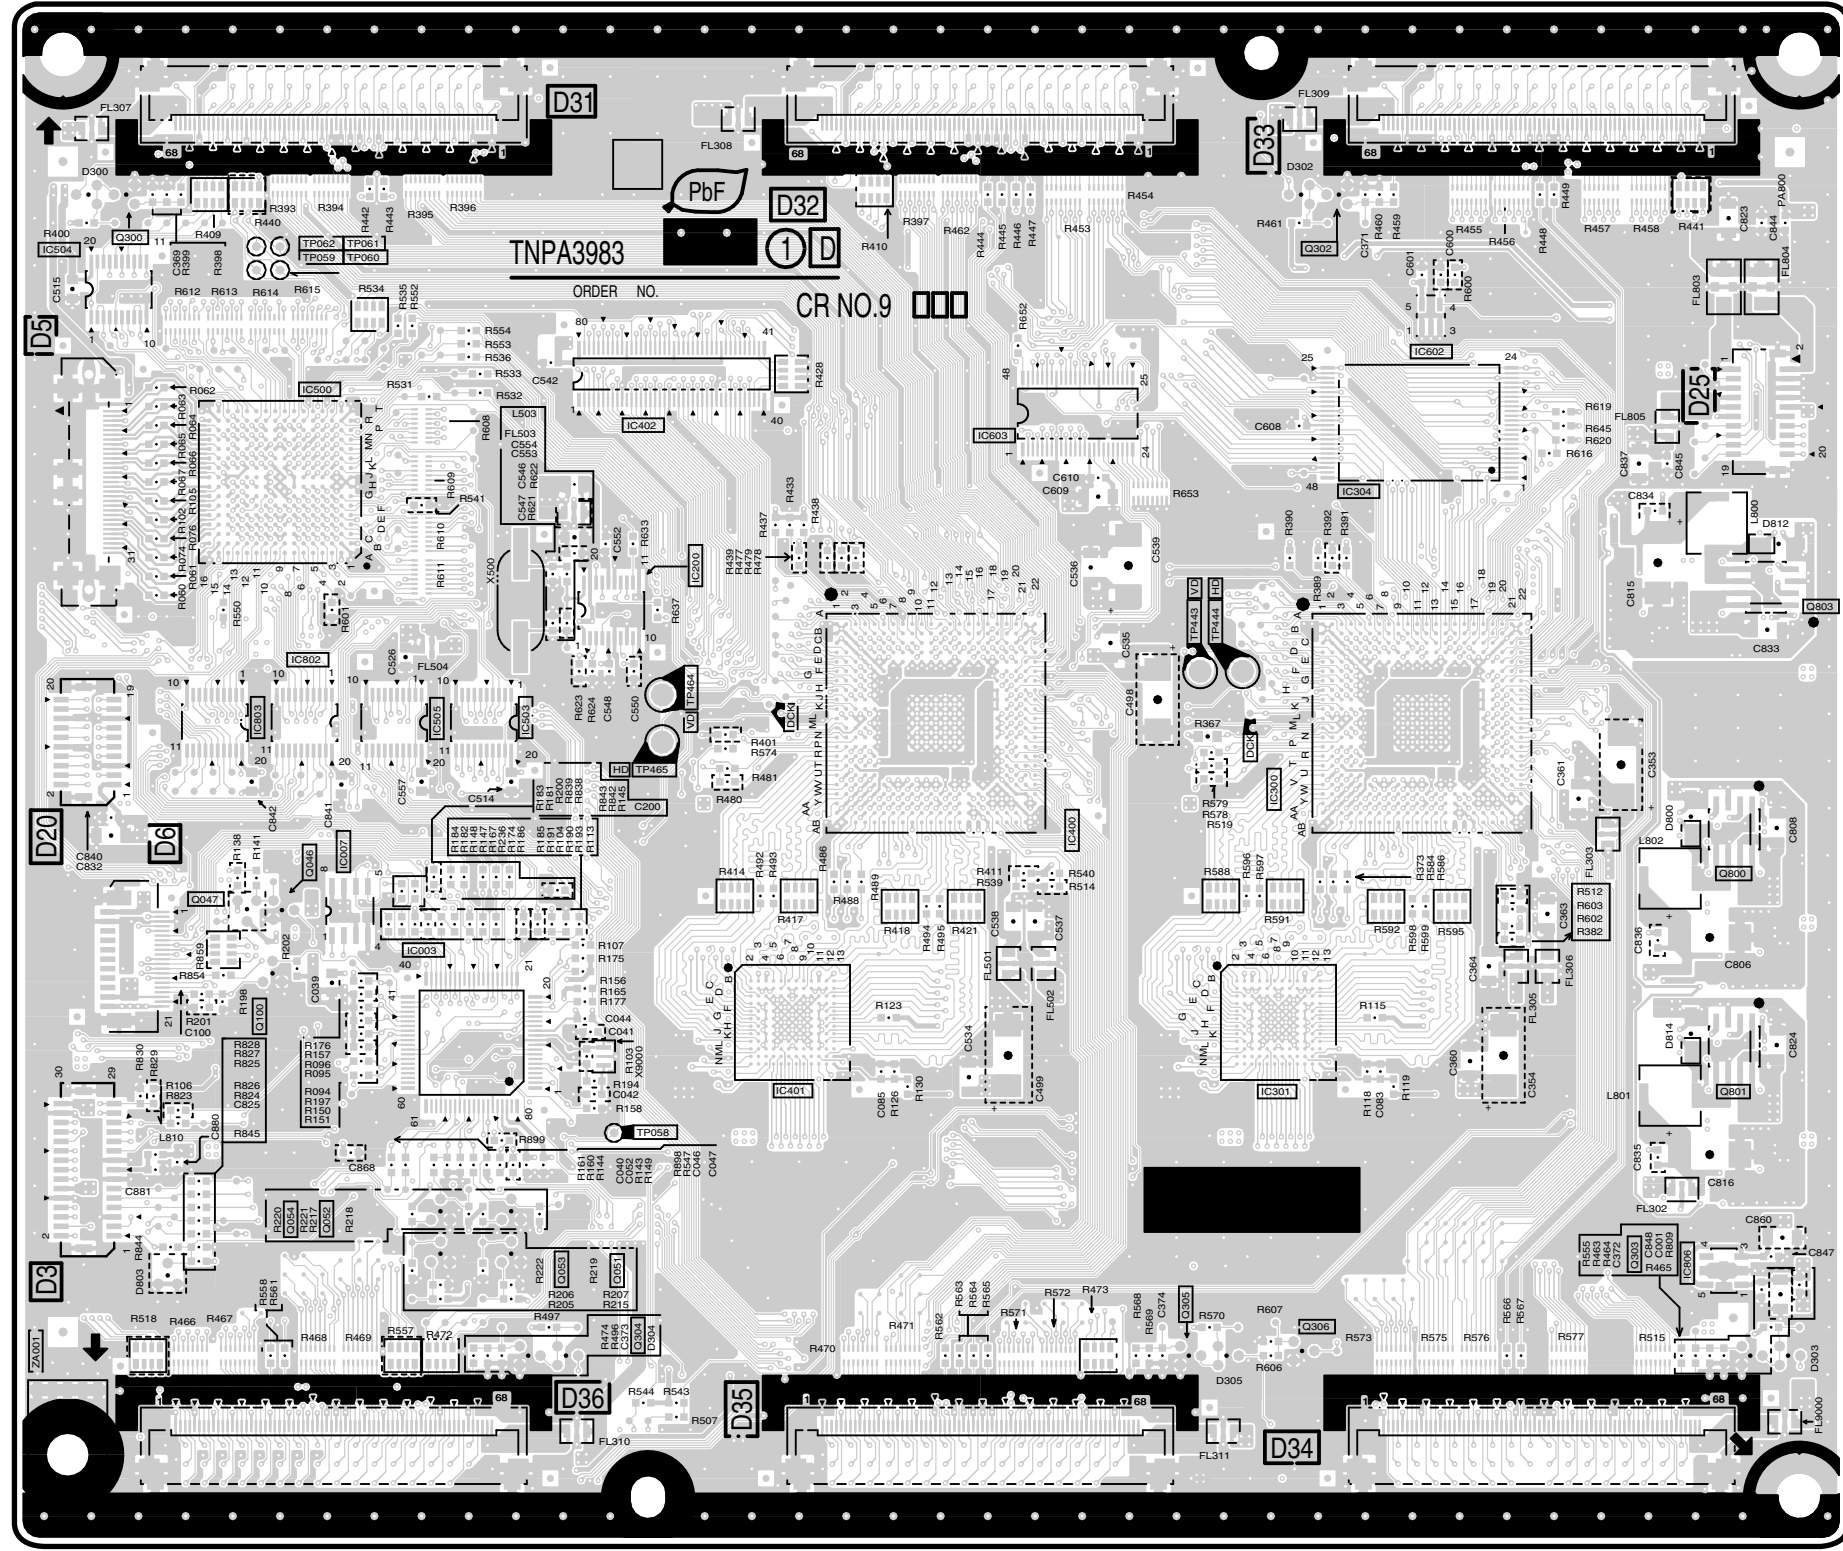

Parts Location


| D-BOARD (COMPONENT SIDE) | | | |
|--------------------------|------------|--------|-----|
| IC | TRANSISTOR | | |
| IC9003 | B-3 | Q9046 | B-3 |
| IC9007 | B-3 | Q9047 | A-3 |
| IC9200 | C-4 | Q9051 | C-2 |
| IC9300 | E-3 | Q9052 | B-2 |
| IC9301 | E-2 | Q9053 | C-2 |
| IC9304 | E-4 | Q9054 | B-2 |
| IC9400 | D-3 | Q9100 | B-3 |
| IC9401 | C-2 | Q9300 | A-5 |
| IC9402 | C-5 | Q9302 | E-5 |
| IC9500 | B-5 | Q9303 | F-2 |
| IC9503 | B-4 | Q9304 | C-1 |
| IC9504 | A-1 | Q9305 | E-2 |
| IC9505 | B-4 | Q9306 | E-2 |
| IC9602 | E-5 | Q9800 | F-3 |
| IC9603 | D-5 | Q9801 | F-2 |
| IC9802 | B-4 | Q9803 | G-4 |
| IC9803 | A-4 | | |
| IC9806 | F-2 | | |
| | | TP | |
| | | TP9058 | C-2 |
| | | TP9059 | B-5 |
| | | TP9060 | B-5 |
| | | TP9061 | B-5 |
| | | TP9062 | B-5 |
| | | TP9443 | E-4 |
| | | TP9444 | E-4 |
| | | TP9464 | C-4 |
| | | TP9465 | C-4 |

TH-58PY700AZ/M/MR, PZ700A
D-BOARD TZTNP01HGTA

TH-58PY700AZ/M/MR, PZ700A
D-BOARD TZTNP01HGTA

A B C D E F G H I


14.11. C1-Board

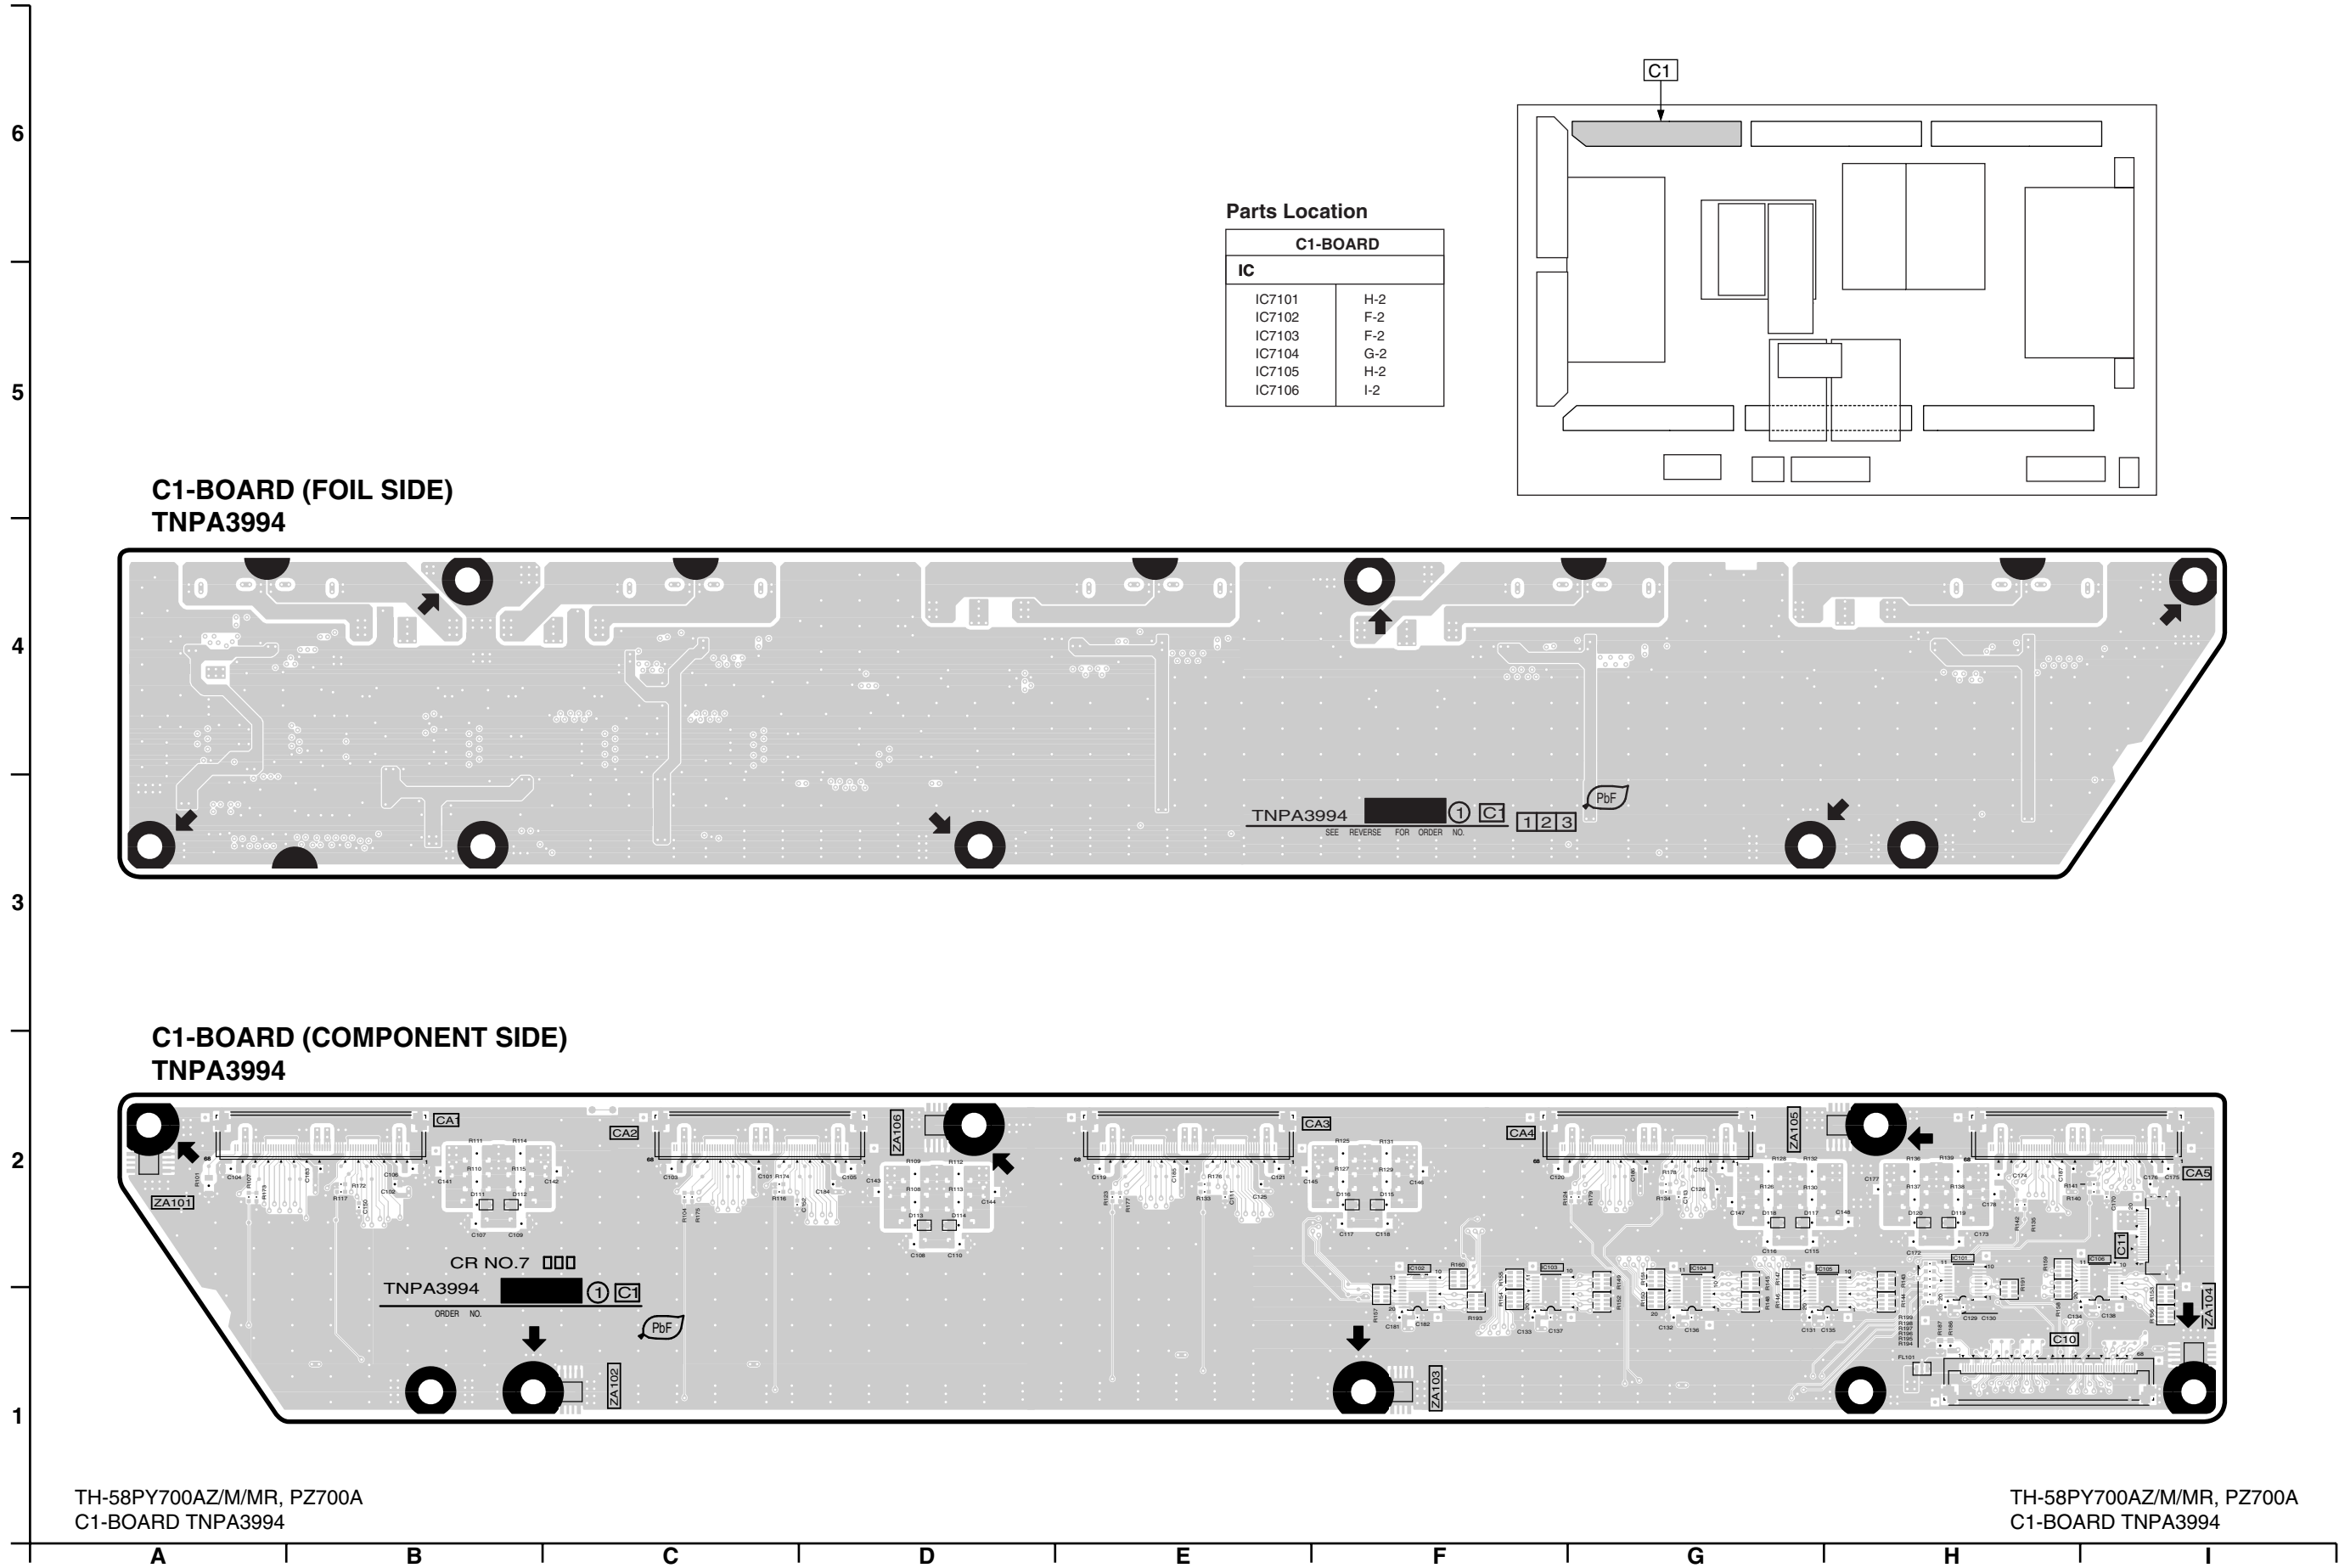

TH-58PY700AZ/M/MR, PZ700A
C1-BOARD TNPA3994

TH-58PY700AZ/M/MR, PZ700A
C1-BOARD TNPA3994

14.12. C2-Board

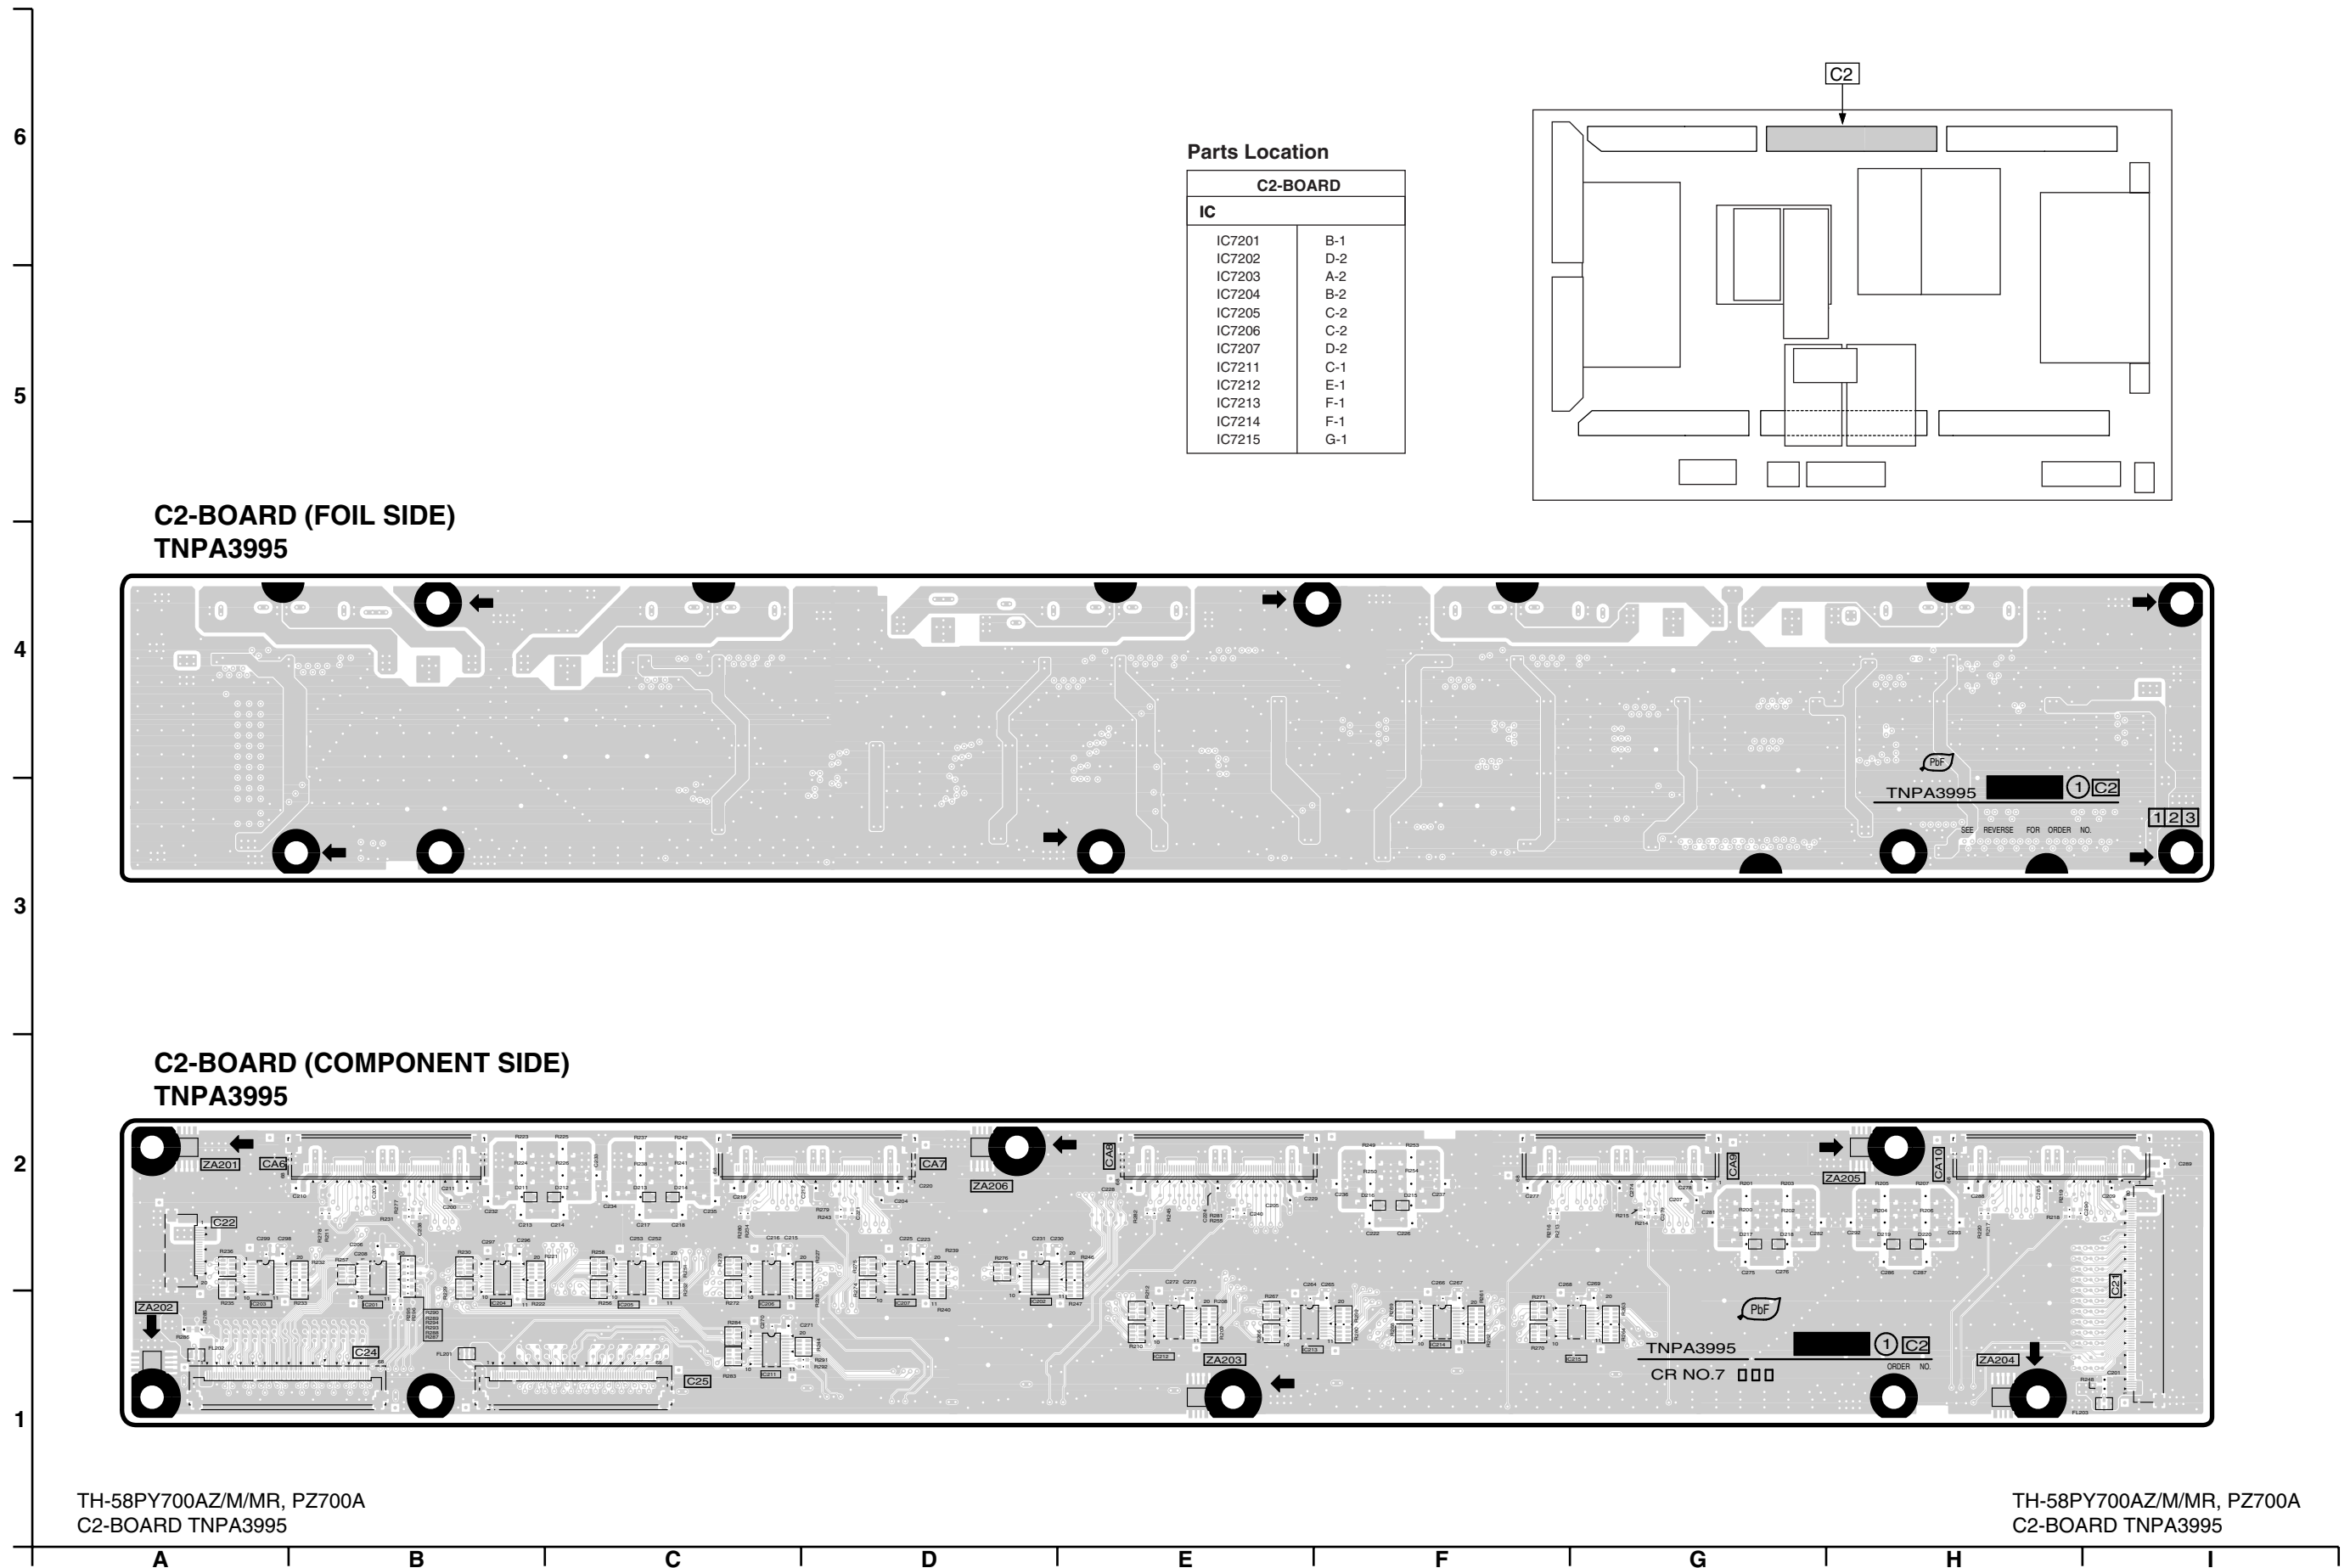


14.13. C3-Board


6
5
4
3
2
1

Parts Location


| C3-BOARD | |
|----------|-----|
| IC | |
| IC7301 | B-1 |
| IC7302 | D-1 |
| IC7303 | B-2 |
| IC7304 | C-1 |
| IC7305 | C-1 |
| IC7306 | D-1 |

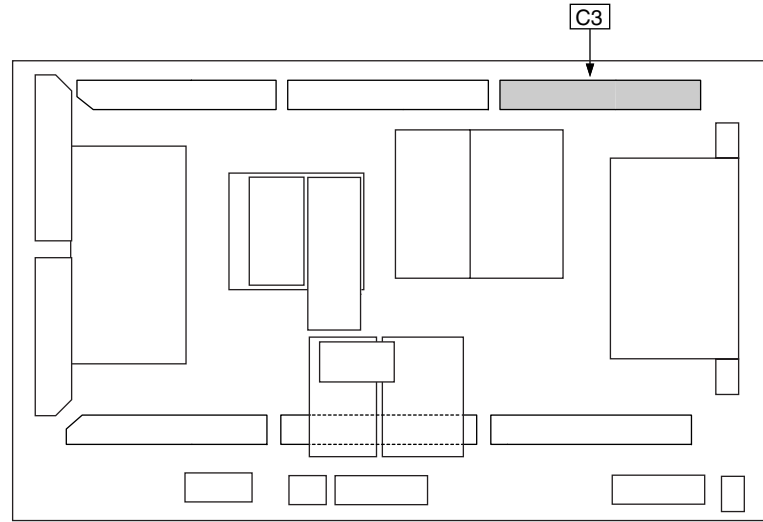

**C3-BOARD (FOIL SIDE)
TNPA3996**

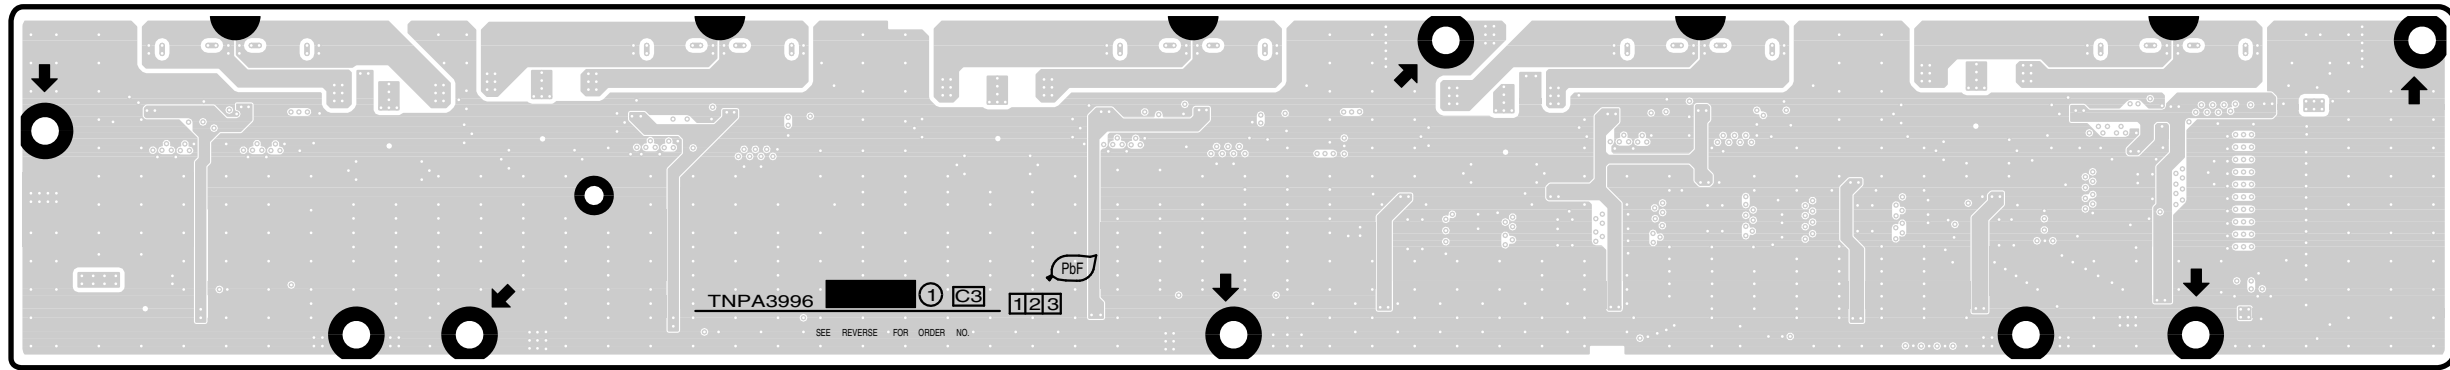

**C3-BOARD (COMPONENT SIDE)
TNPA3996**

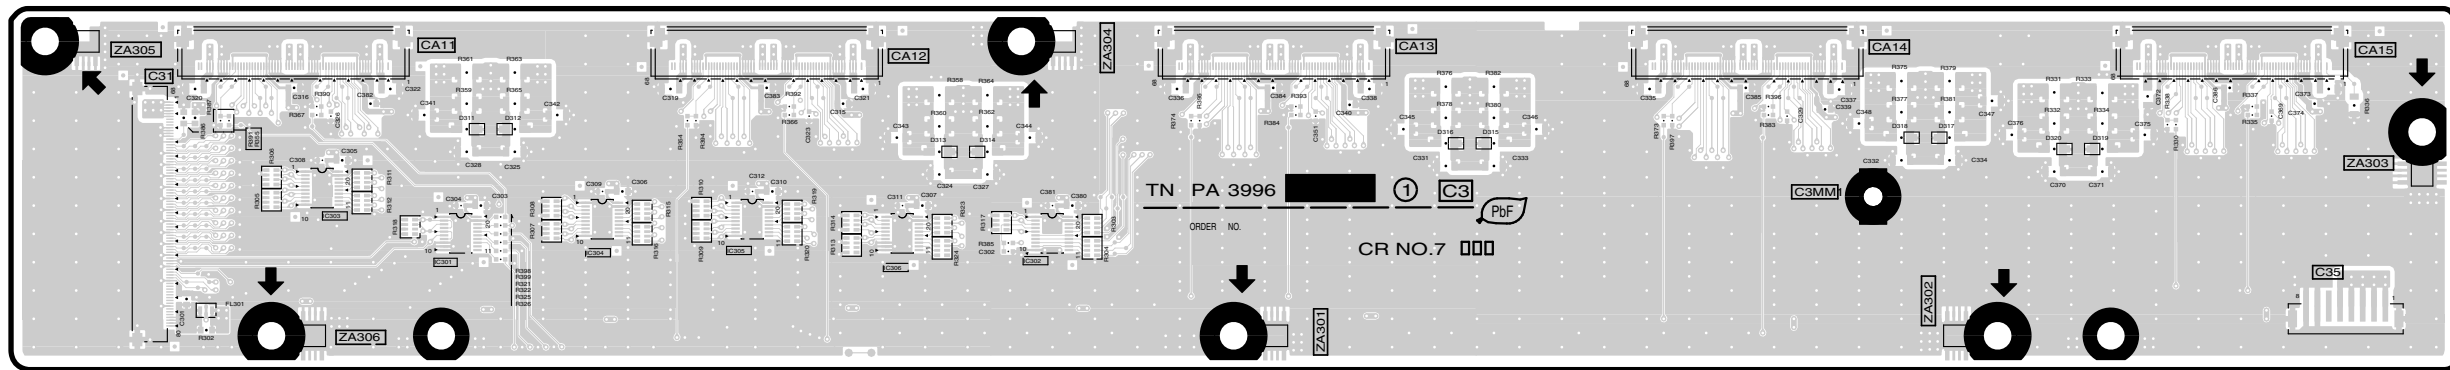


TH-58PY700AZ/M/MR, PZ700A
C3-BOARD TNPA3996

TH-58PY700AZ/M/MR, PZ700A
C3-BOARD TNPA3996

A B C D E F G H I

14.14. C4-Board

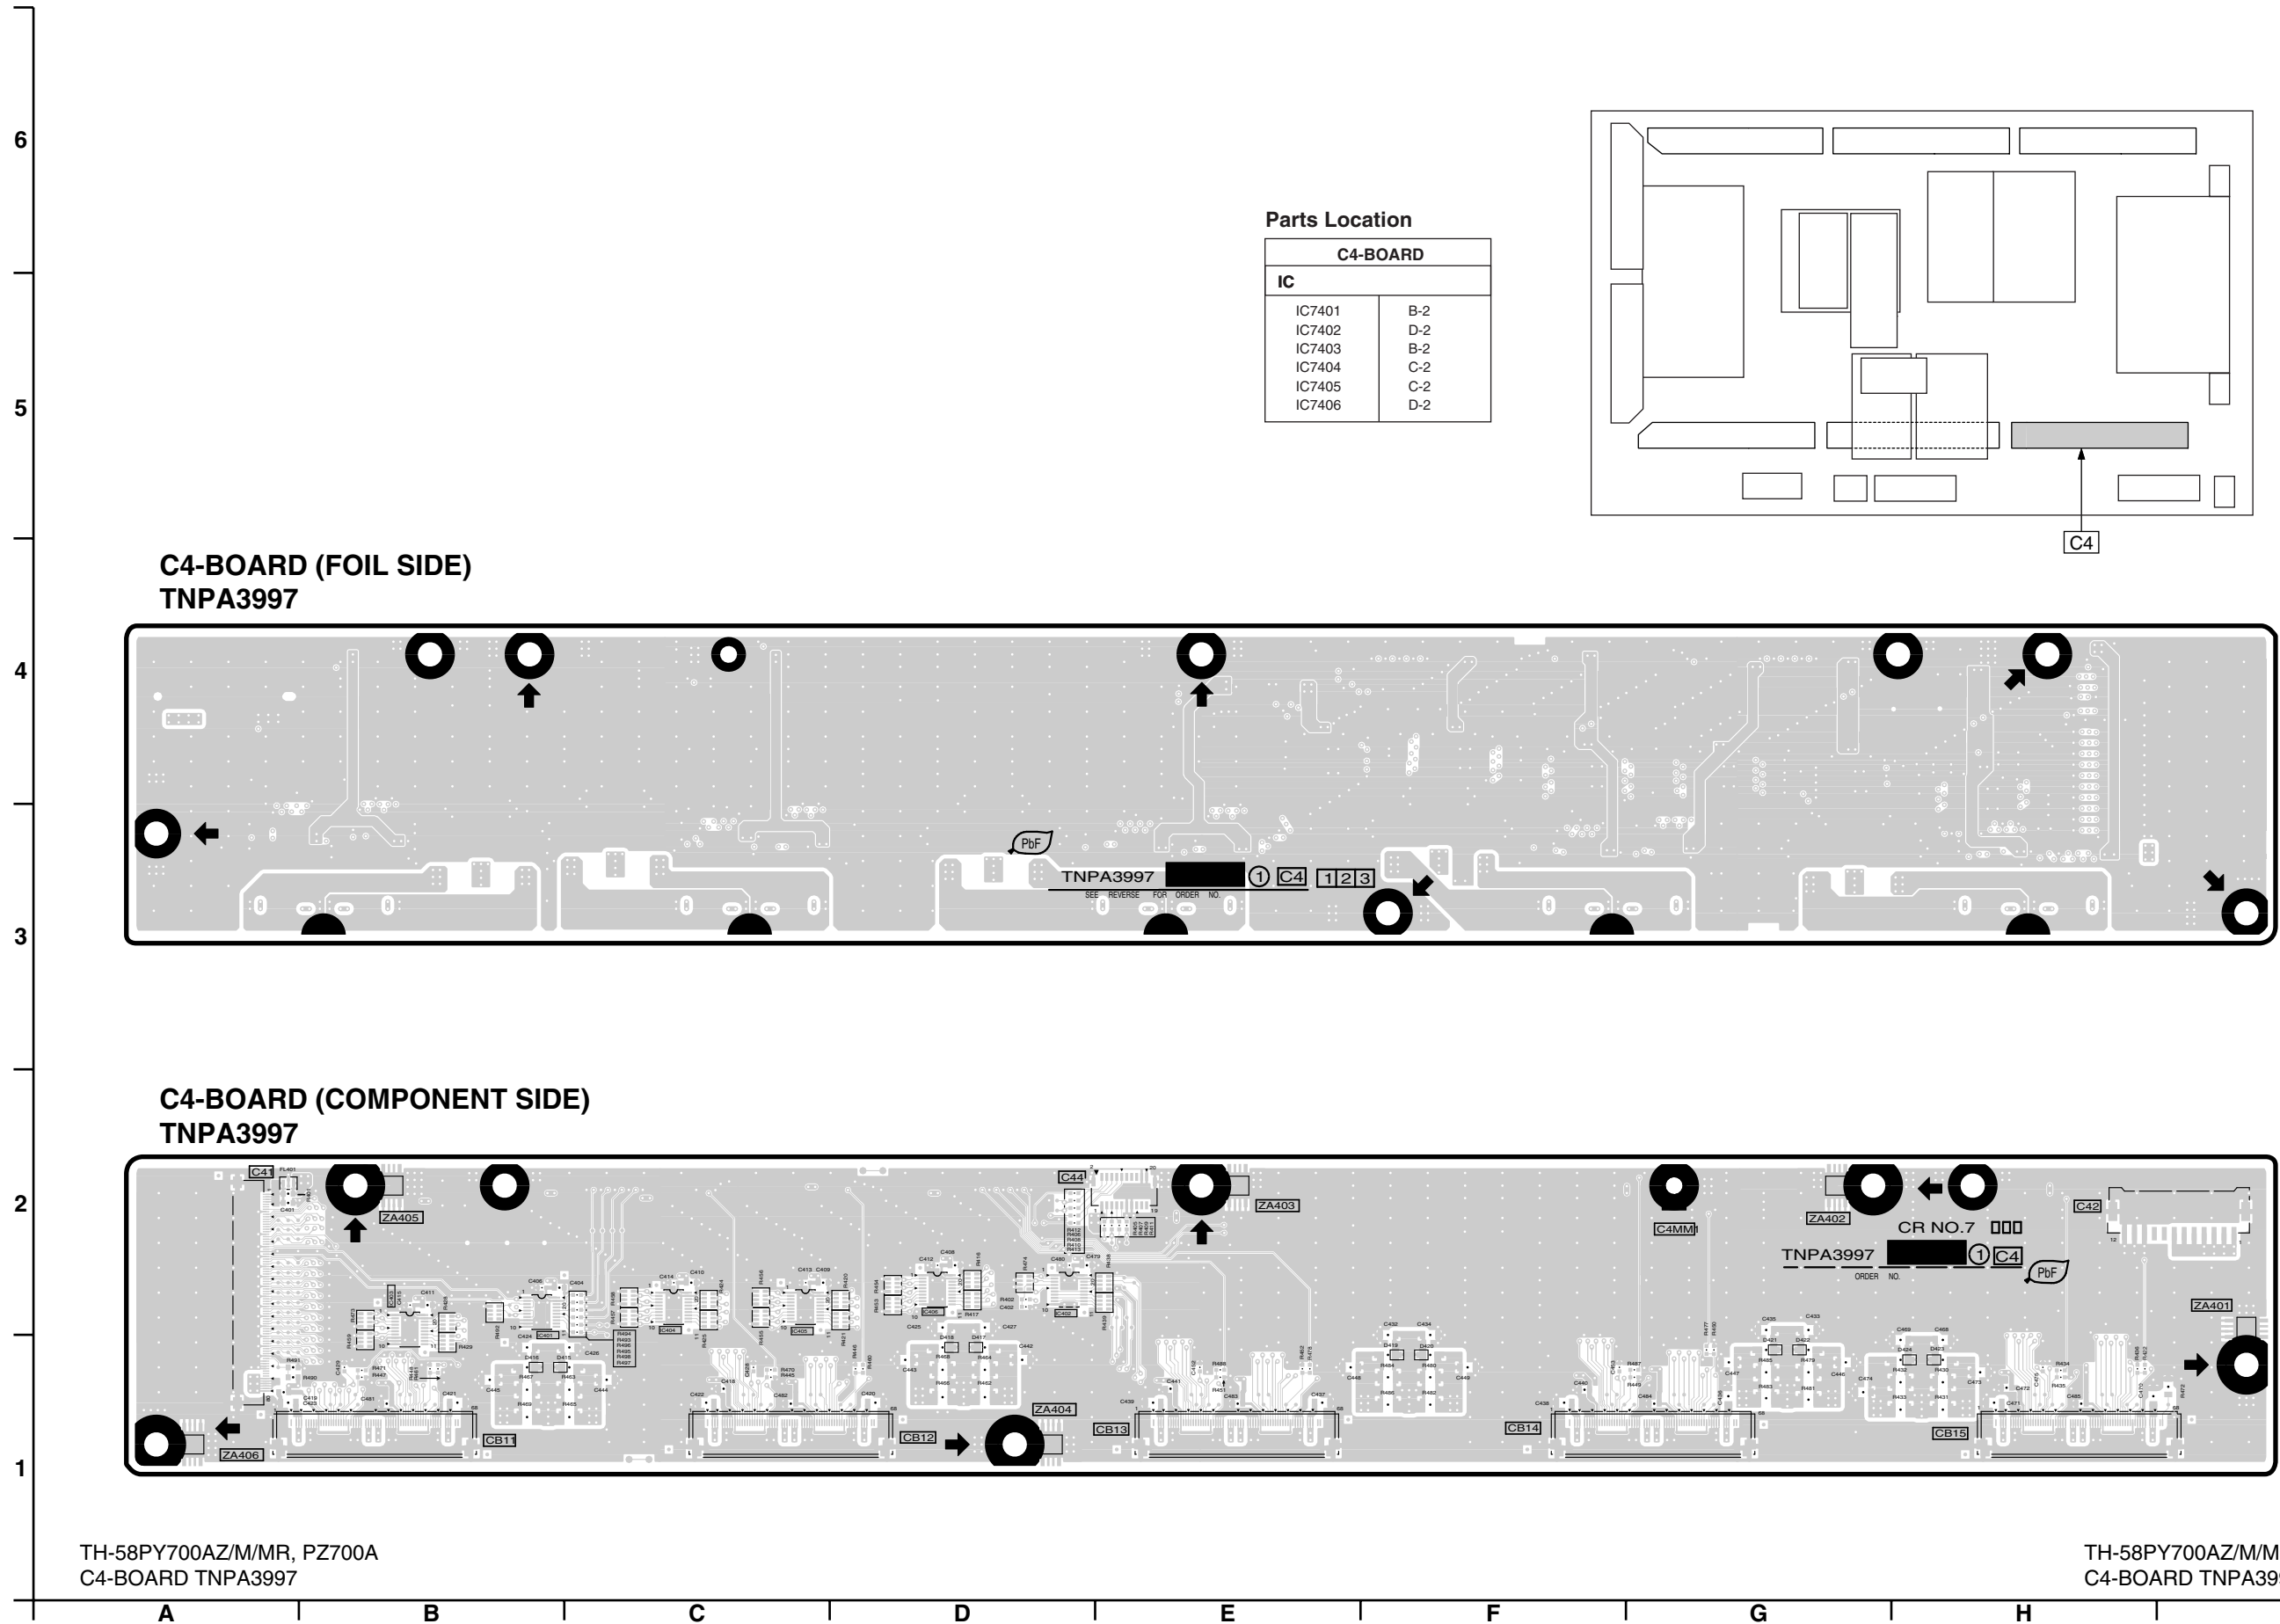


14.15. C5-Board


6
5
4
3
2
1

Parts Location


| C5-BOARD | |
|----------|-----|
| IC | |
| IC7501 | B-2 |
| IC7502 | D-2 |
| IC7503 | A-2 |
| IC7504 | B-2 |
| IC7505 | C-2 |
| IC7506 | C-2 |
| IC7507 | D-2 |
| IC7511 | C-2 |
| IC7512 | E-2 |
| IC7513 | E-2 |
| IC7514 | F-2 |
| IC7515 | F-2 |
| IC7516 | G-2 |

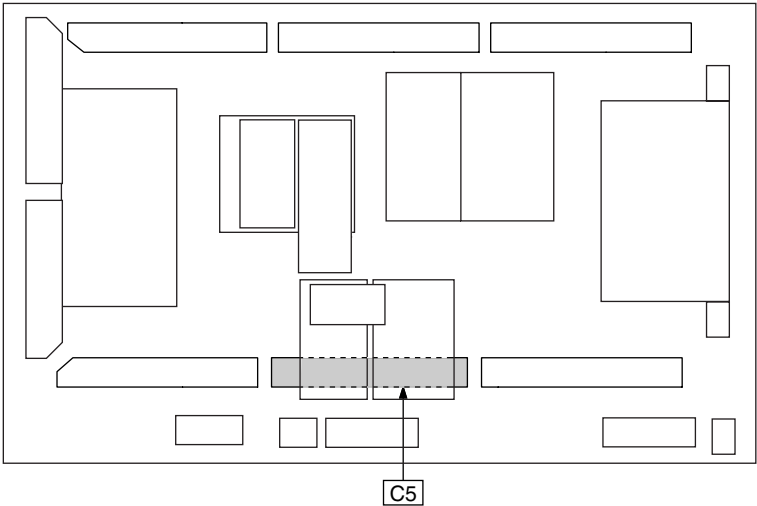

**C5-BOARD (FOIL SIDE)
TNPA3998**

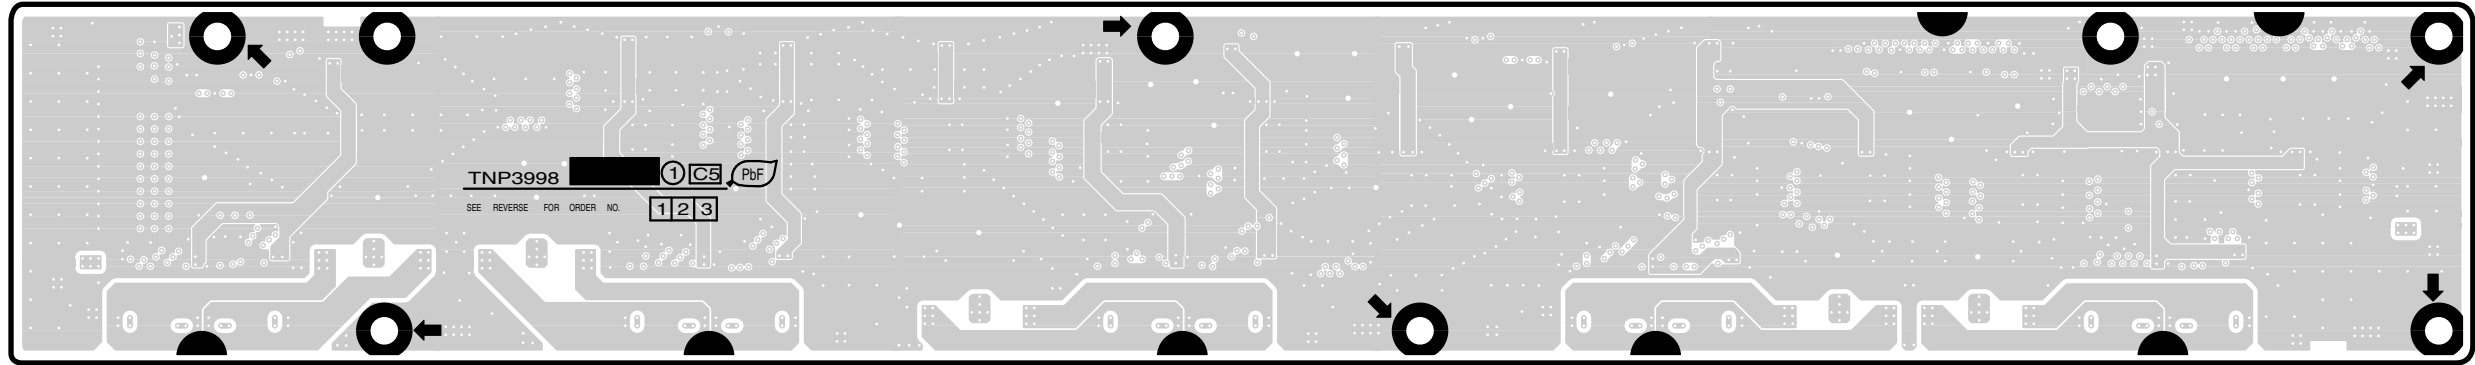

**C5-BOARD (COMPONENT SIDE)
TNPA3998**

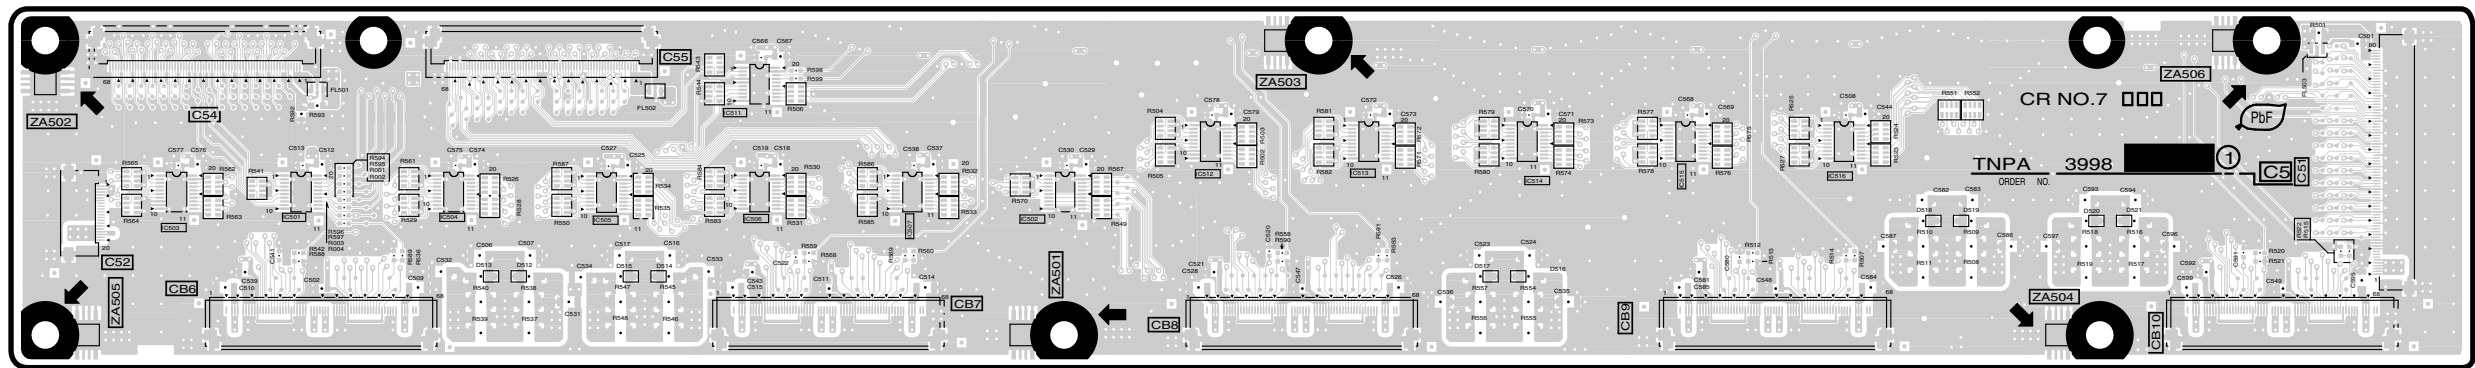


TH-58PY700AZ/M/MR, PZ700A
C5-BOARD TNPA3998


TH-58PY700AZ/M/MR, PZ700A
C5-BOARD TNPA3998

A B C D E F G H I

14.16. C6-Board

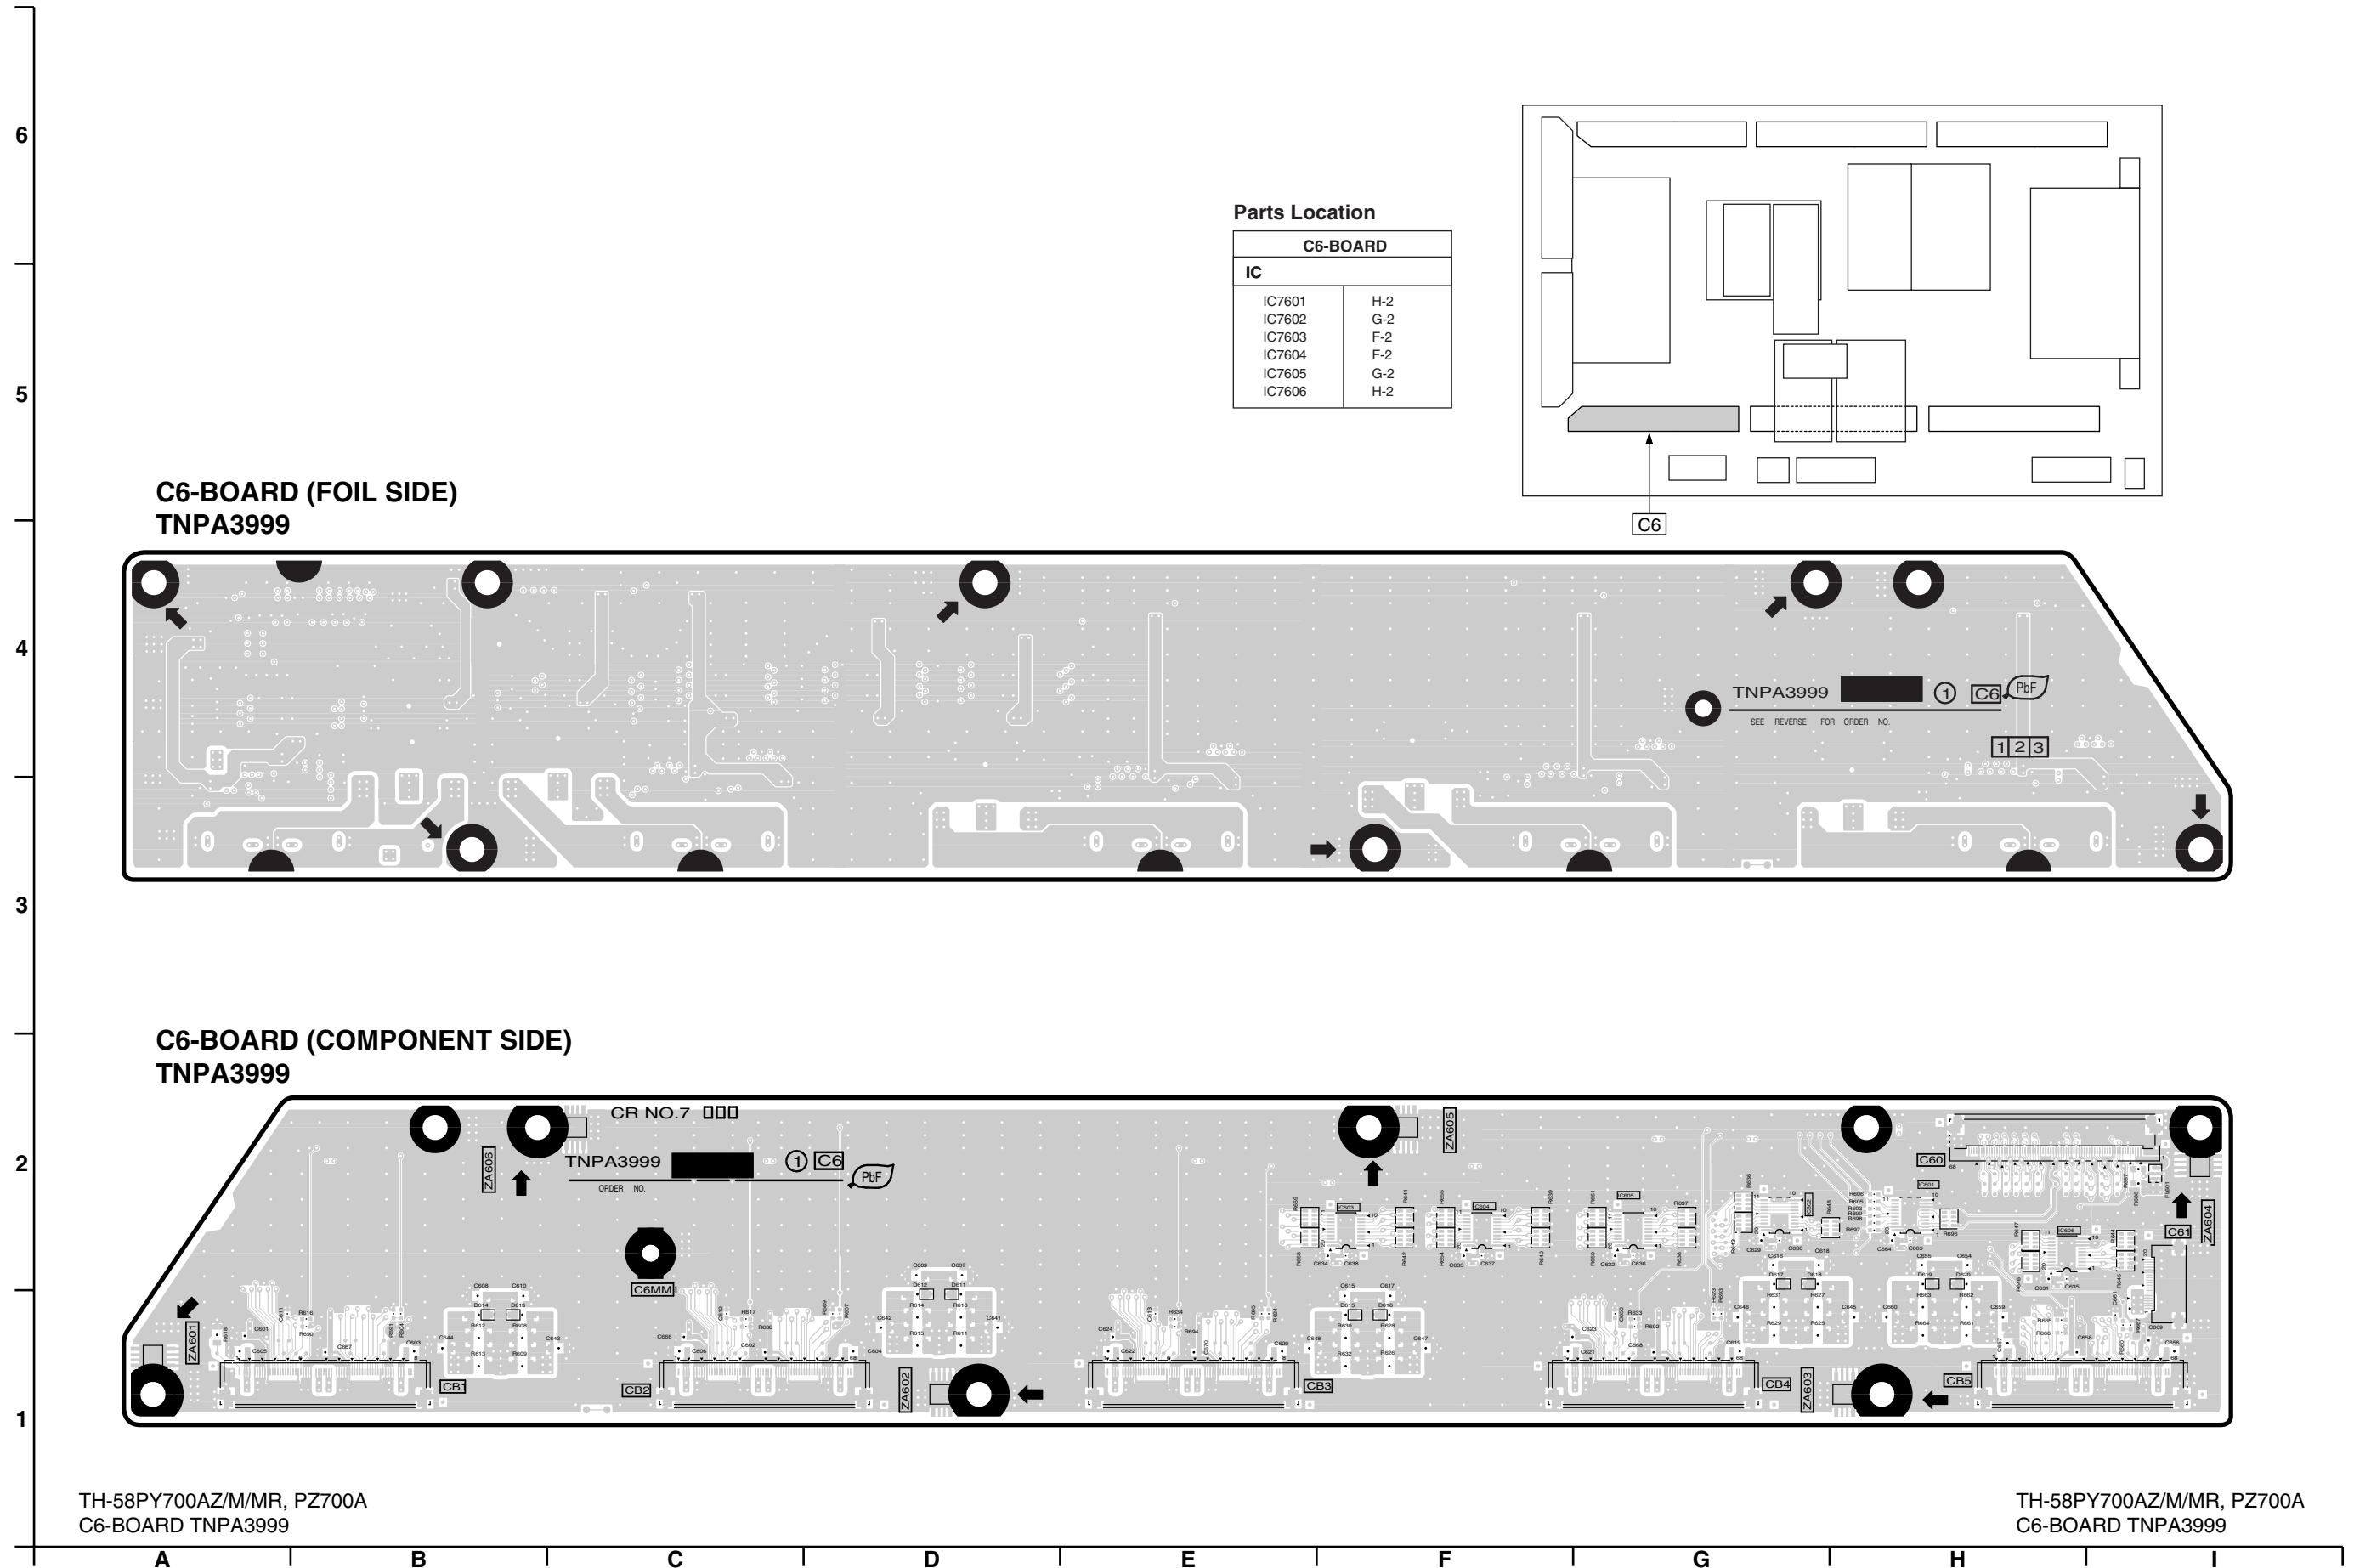


14.17. SC-Board

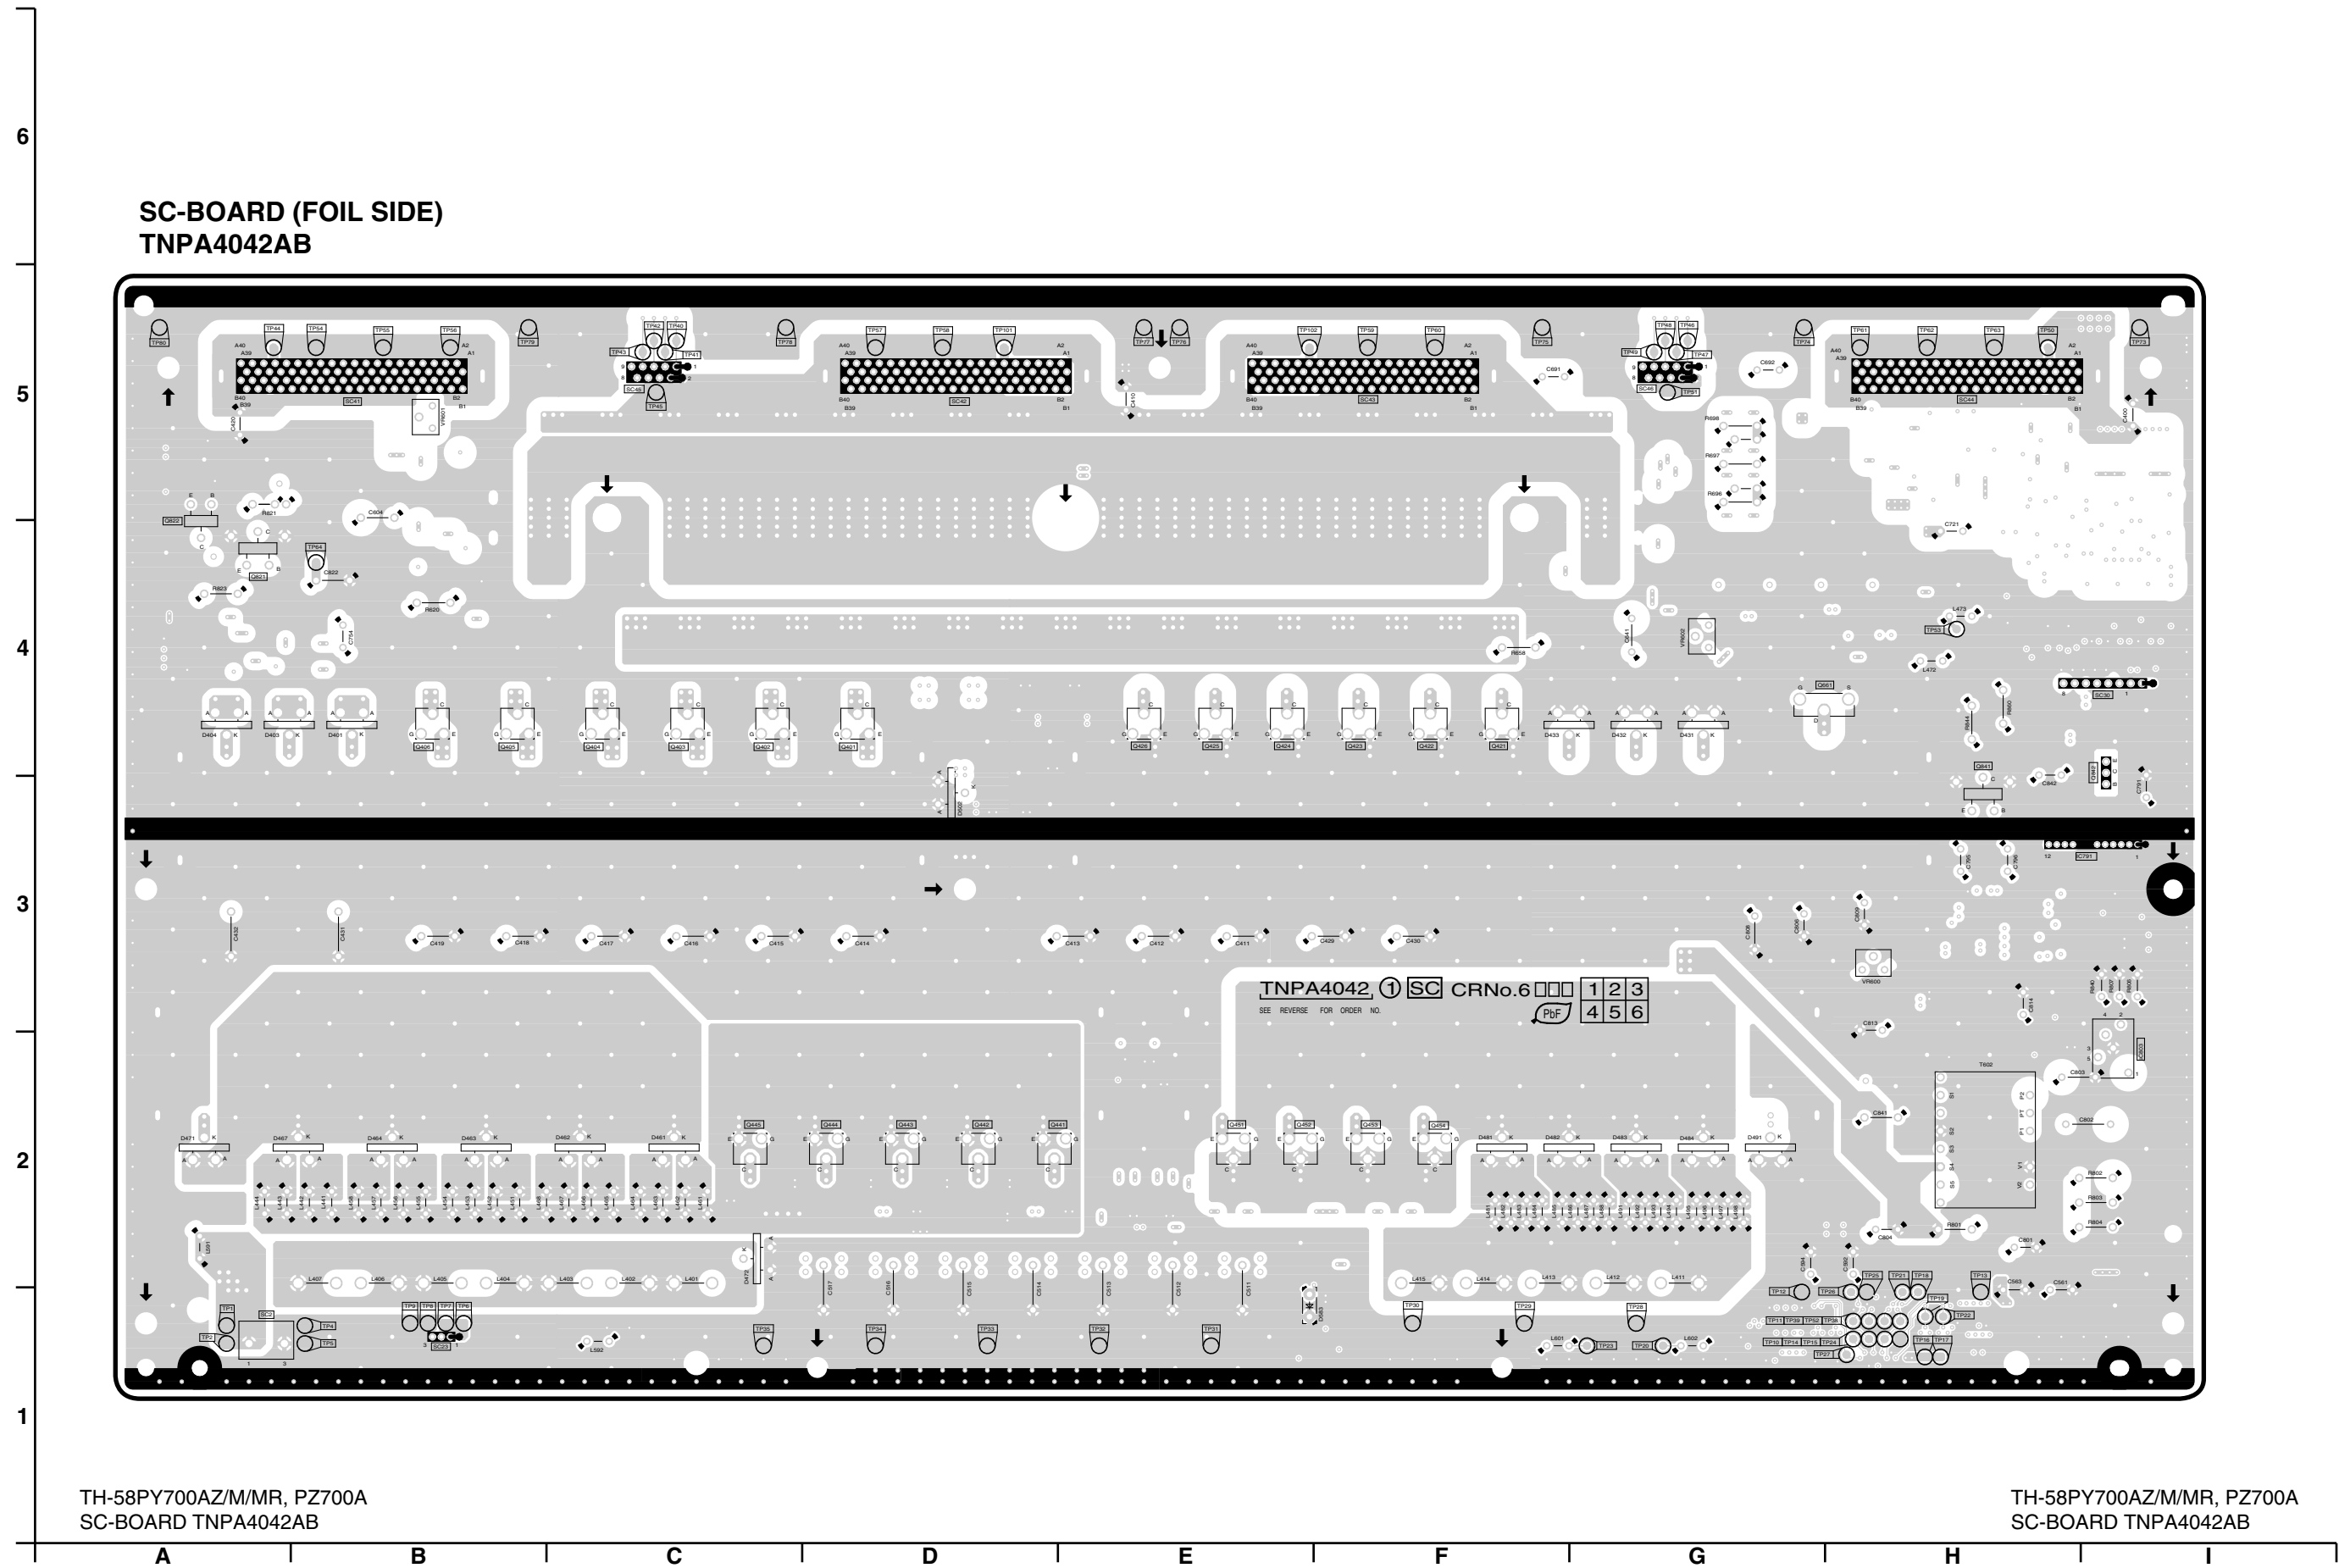

TH-58PY700AZ/M/MR, PZ700A
SC-BOARD TNPA4042AB

TH-58PY700AZ/M/MR, PZ700A
SC-BOARD TNPA4042AB

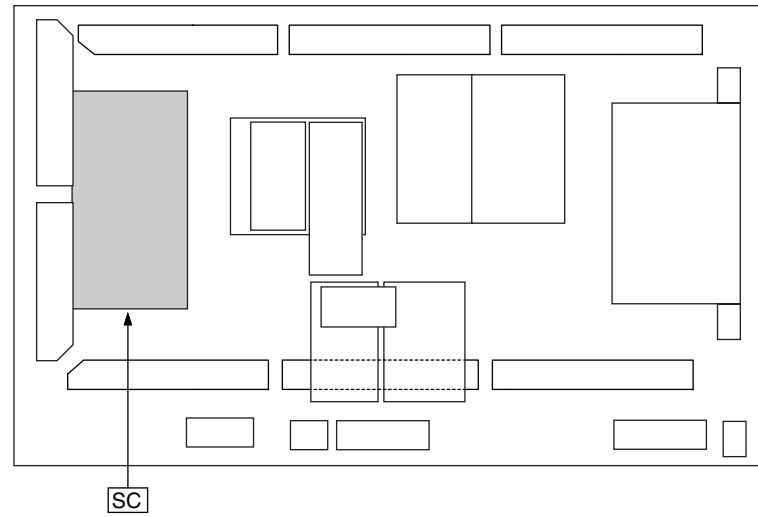

Parts Location

| SC-BOARD (FOIL SIDE) | | | | | |
|----------------------|-----|------|-----|---------------|-----|
| TRANSISTOR | | TP | | TP41 | C-5 |
| IC6791 | H-3 | TP1 | A-1 | TP42 | C-5 |
| IC6803 | I-2 | TP2 | A-1 | TP43 | C-5 |
| TRANSISTOR | | TP4 | B-1 | TP44 | A-5 |
| Q6401 | D-4 | TP5 | B-1 | TP45 | C-5 |
| Q6402 | C-4 | TP6 | B-1 | TP46 | G-5 |
| Q6403 | C-4 | TP7 | B-1 | TP47 | G-5 |
| Q6404 | C-4 | TP8 | B-1 | TP48 | G-5 |
| Q6405 | B-4 | TP9 | B-1 | TP49 | G-5 |
| Q6406 | B-4 | TP10 | G-1 | TP50 | H-5 |
| Q6421 | F-4 | TP11 | G-1 | TP51 | G-5 |
| Q6422 | F-4 | TP12 | G-1 | TP52 | G-1 |
| Q6423 | F-4 | TP13 | H-2 | TP53 | H-4 |
| Q6424 | E-4 | TP14 | G-1 | TP54 | B-5 |
| Q6425 | E-4 | TP15 | G-1 | TP55 | B-5 |
| Q6426 | E-4 | TP16 | H-1 | TP56 | B-5 |
| Q6441 | D-2 | TP17 | H-1 | TP57 | D-5 |
| Q6442 | D-2 | TP18 | H-2 | TP58 | D-5 |
| Q6443 | D-2 | TP19 | H-1 | TP59 | F-5 |
| Q6444 | D-2 | TP20 | G-1 | TP60 | F-5 |
| Q6445 | C-2 | TP21 | H-2 | TP61 | H-5 |
| Q6451 | E-2 | TP22 | H-1 | TP62 | H-5 |
| Q6452 | E-2 | TP23 | G-1 | TP63 | H-5 |
| Q6453 | F-2 | TP24 | G-1 | TP64 | B-5 |
| Q6454 | F-2 | TP25 | H-2 | TP73 | I-5 |
| Q6641 | H-3 | TP26 | H-1 | TP74 | G-5 |
| Q6651 | G-4 | TP27 | G-1 | TP75 | F-5 |
| Q6821 | A-4 | TP28 | G-1 | TP76 | E-5 |
| Q6822 | A-4 | TP29 | F-1 | TP77 | E-5 |
| | | | | TP78 | C-5 |
| | | | | TP79 | B-5 |
| | | | | TP80 | A-5 |
| | | | | TP100 | D-5 |
| | | | | TP102 | E-5 |
| | | | | VOLUME | |
| | | | | VR6600 | H-3 |
| | | | | VR6601 | B-5 |
| | | | | VR6602 | G-4 |
| | | TP31 | E-1 | | |
| | | TP32 | E-1 | | |
| | | TP33 | D-1 | | |
| | | TP34 | D-1 | | |
| | | TP35 | C-1 | | |
| | | TP38 | G-1 | | |
| | | TP39 | G-1 | | |
| | | TP40 | C-5 | | |


TH-58PY700AZ/M/MR, PZ700A
SC-BOARD PARTS LOCATION

Parts Location

| SC-BOARD (COMPONENT SIDE) | | | | | | | | | |
|---------------------------|-----|-------------------|-----|-------|-----|-------|-----|---------------|-----|
| IC | | PHOTO COUPLER | | Q6516 | E-4 | Q6651 | F-5 | TP | |
| IIC6471 | A-3 | PC6480 | B-4 | Q6517 | E-4 | Q6652 | F-5 | TP15V | G-1 |
| IC6472 | A-4 | PC6610 | A-4 | Q6518 | E-4 | Q6653 | F-5 | TPSC1 | C-5 |
| IC6501 | E-4 | PC6701 | A-4 | Q6519 | E-4 | Q6654 | G-5 | TPSOS6 | C-1 |
| IC6521 | E-2 | PC6702 | A-4 | Q6531 | E-2 | Q6655 | G-5 | TPSOS7 | C-1 |
| IC6561 | B-1 | PC6703 | A-4 | Q6532 | E-2 | Q6656 | G-5 | TPVAD | B-4 |
| IC6562 | B-1 | PC6704 | I-4 | Q6533 | F-2 | Q6657 | G-5 | TPVSCN | B-4 |
| IC6581 | D-1 | PC6705 | A-3 | Q6534 | F-2 | Q6661 | B-4 | TPVSET | H-4 |
| IC6601 | H-4 | PC6760 | I-4 | Q6551 | E-2 | Q6662 | B-4 | TPVSET2 | B-4 |
| IC6602 | A-3 | PC6801 | B-2 | Q6552 | E-2 | Q6663 | B-4 | TPVSUS | I-2 |
| IC6610 | A-3 | PC6861 | B-4 | Q6553 | D-2 | Q6671 | B-4 | VOLUME | |
| IC6671 | B-4 | PC6871 | A-3 | Q6554 | D-2 | Q6672 | B-4 | VR6600 | B-3 |
| IC6681 | B-5 | TRANSISTOR | | Q6581 | D-1 | Q6673 | B-4 | VR6601 | H-5 |
| IC6682 | A-3 | Q6401 | F-4 | Q6601 | H-5 | Q6674 | C-4 | VR6602 | C-4 |
| IC6721 | A-5 | Q6402 | F-4 | Q6602 | H-5 | Q6679 | B-4 | | |
| IC6722 | A-5 | Q6403 | G-4 | Q6621 | G-4 | Q6680 | B-4 | | |
| IC6724 | A-5 | Q6404 | G-4 | Q6622 | G-4 | Q6681 | B-5 | | |
| IC6725 | A-5 | Q6405 | G-4 | Q6623 | F-4 | Q6682 | B-5 | | |
| IC6751 | H-4 | Q6406 | H-4 | Q6624 | F-4 | Q6691 | B-5 | | |
| IC6752 | H-4 | Q6421 | D-4 | Q6625 | F-4 | Q6742 | A-5 | | |
| IC6753 | H-4 | Q6422 | D-4 | Q6626 | F-4 | Q6743 | B-5 | | |
| IC6771 | B-3 | Q6423 | D-4 | Q6627 | F-4 | Q6744 | A-5 | | |
| IC6772 | C-4 | Q6424 | D-4 | Q6628 | E-4 | Q6762 | H-4 | | |
| IC6773 | A-3 | Q6425 | D-4 | Q6629 | E-4 | Q6781 | C-5 | | |
| IC6774 | A-3 | Q6426 | E-4 | Q6634 | E-4 | Q6782 | C-5 | | |
| IC6791 | A-3 | Q6425 | E-4 | Q6635 | E-4 | Q6783 | E-5 | | |
| IC6801 | B-3 | Q6426 | E-4 | Q6636 | E-4 | Q6784 | E-5 | | |
| IC6802 | B-4 | Q6441 | E-2 | Q6640 | C-5 | Q6791 | B-3 | | |
| IC6803 | A-2 | Q6442 | F-2 | Q6641 | C-5 | Q6803 | B-2 | | |
| IC6821 | I-5 | Q6443 | F-2 | Q6642 | D-5 | Q6821 | H-5 | | |
| IC6841 | A-4 | Q6444 | F-2 | Q6643 | D-5 | Q6822 | I-5 | | |
| IC6861 | B-5 | Q6445 | G-2 | Q6644 | D-5 | Q6824 | I-6 | | |
| IC6871 | A-3 | Q6451 | E-2 | Q6645 | D-5 | Q6841 | B-3 | | |
| | | Q6452 | D-2 | Q6646 | E-5 | Q6842 | A-3 | | |
| | | Q6453 | D-2 | Q6647 | E-5 | | | | |
| | | Q6454 | D-2 | Q6648 | E-5 | | | | |
| | | Q6511 | F-4 | Q6649 | E-5 | | | | |
| | | Q6512 | F-4 | Q6650 | F-5 | | | | |
| | | Q6513 | F-4 | | | | | | |
| | | Q6514 | F-4 | | | | | | |

TH-58PY700AZ/M/MR, PZ700A
SC-BOARD PARTS LOCATION

SC-BEARD (COMPONENT SIDE)
TNPA4042AB

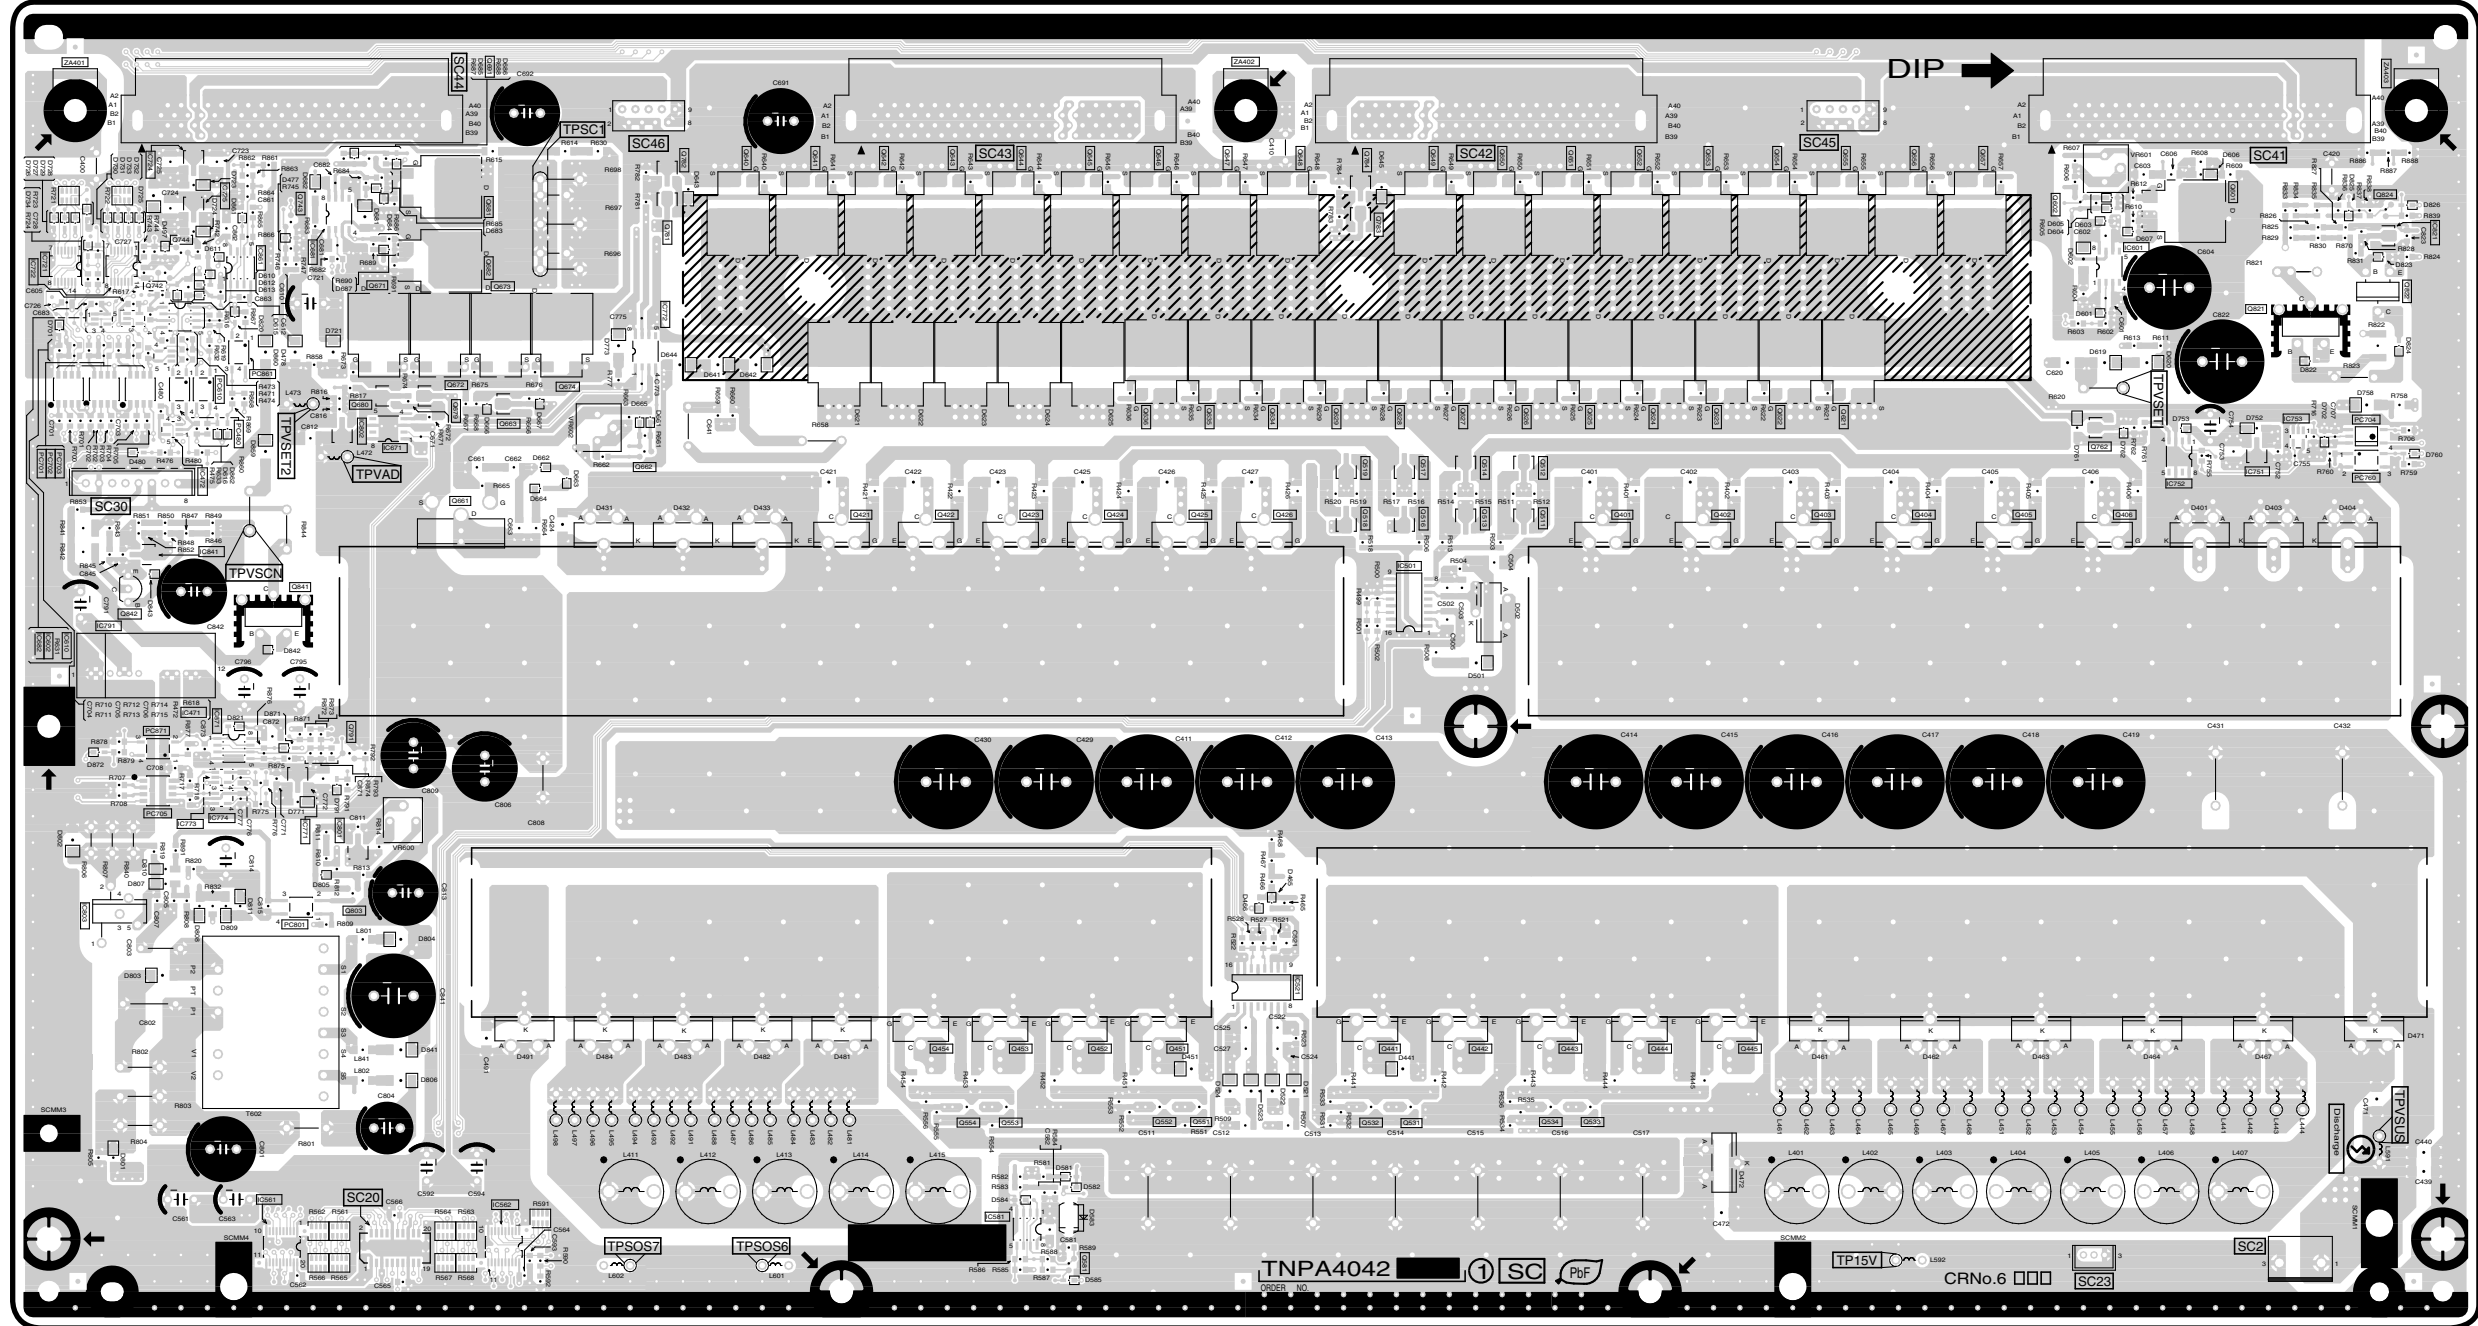

TH-58PY700AZ/M/MR, PZ700A
SC-BEARD TNPA4042AB


TH-58PY700AZ/M/MR, PZ700A
SC-BEARD TNPA4042AB

14.18. SU-Board


6
5
4
3
2
1
A B C D E F G H I

Parts Location


| SU-BOARD | |
|-----------|-----|
| IC | |
| IC6901 | H-2 |
| IC6902 | G-2 |
| IC6903 | G-2 |
| IC6904 | F-2 |
| IC6905 | E-2 |
| IC6906 | D-2 |
| IC6907 | C-2 |
| IC6908 | B-2 |
| IC6909 | A-2 |
| IC6919 | C-2 |
| TP | |
| TPSU1 | H-2 |
| TPSU2 | H-2 |
| TPSU3 | E-1 |
| TPSU4 | E-1 |
| TPSU5 | A-2 |
| TPSU6 | A-2 |

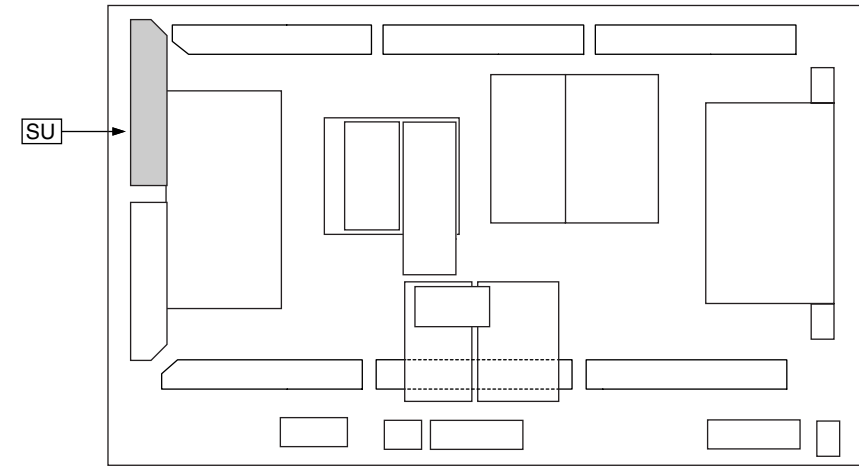

SU-BOARD (FOIL SIDE)
TNPA4000AB

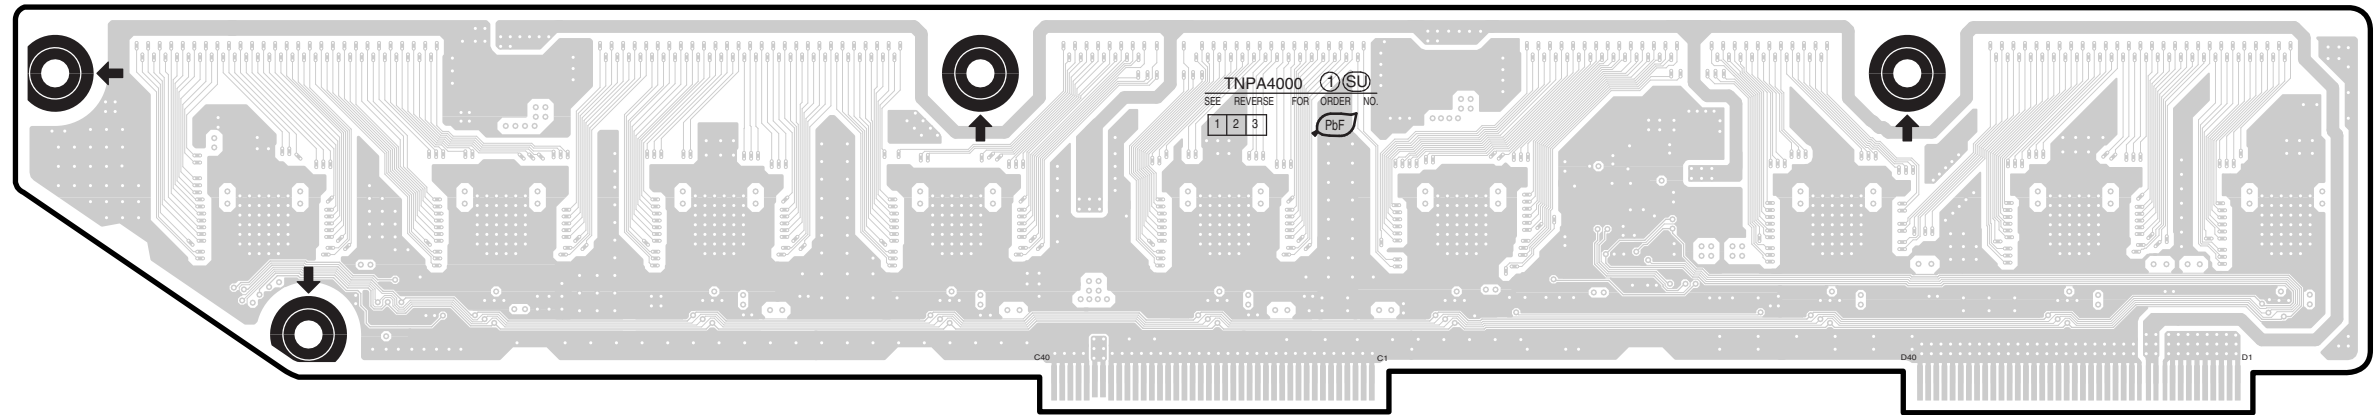

SU-BOARD (COMPONENT SIDE)
TNPA4000AB

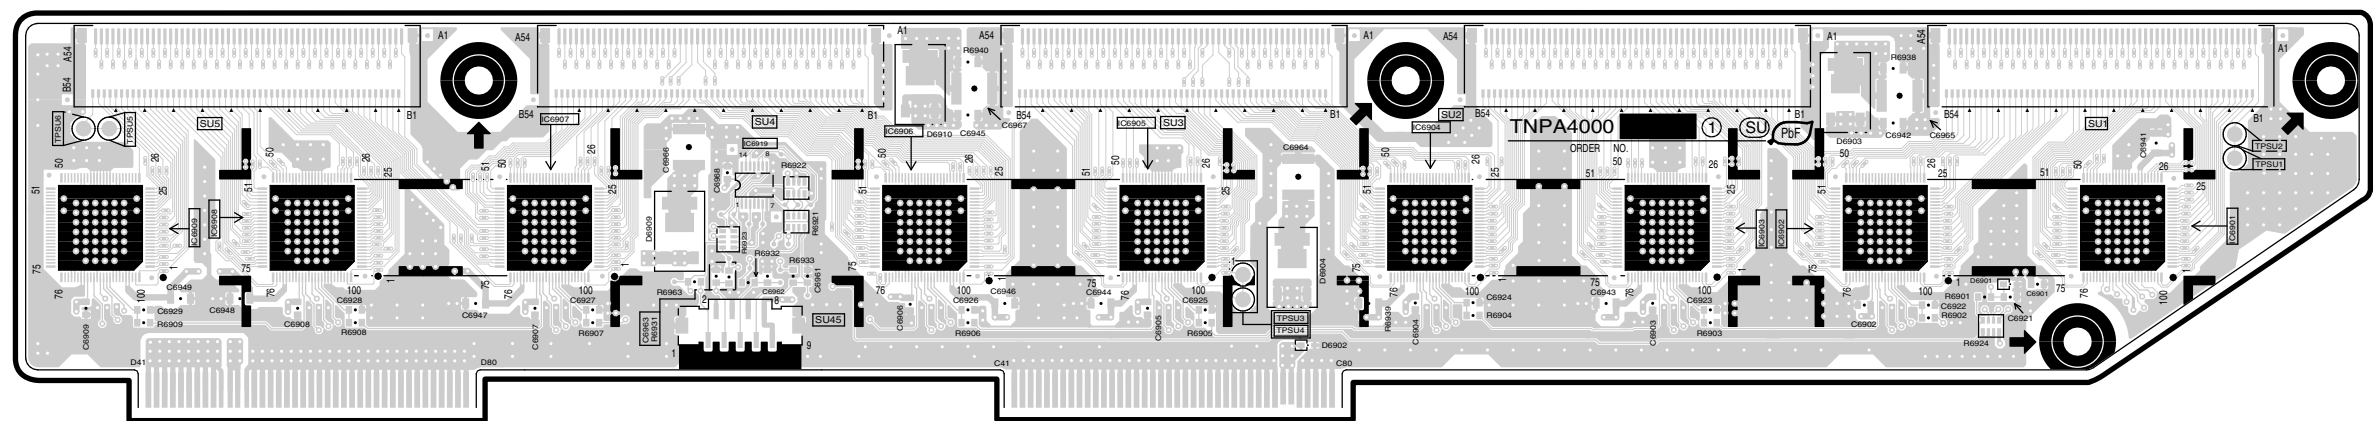

TH-58PY700AZ/M/MR, PZ700A
SU-BOARD TNPA4000AB


TH-58PY700AZ/M/MR, PZ700A
SU-BOARD TNPA4000AB

14.19. SD-Board


6
5
4
3
2
1

Parts Location


| SD-BOARD | |
|-----------|-----|
| IC | |
| IC6910 | H-2 |
| IC6911 | H-2 |
| IC6912 | G-2 |
| IC6913 | F-2 |
| IC6914 | E-2 |
| IC6915 | D-2 |
| IC6916 | C-2 |
| IC6917 | C-2 |
| IC6918 | B-2 |
| IC6920 | F-2 |
| TP | |
| TPSD1 | I-2 |
| TPSD2 | I-2 |
| TPSD3 | E-1 |
| TPSD4 | E-1 |
| TPSD5 | A-2 |
| TPSD6 | A-2 |

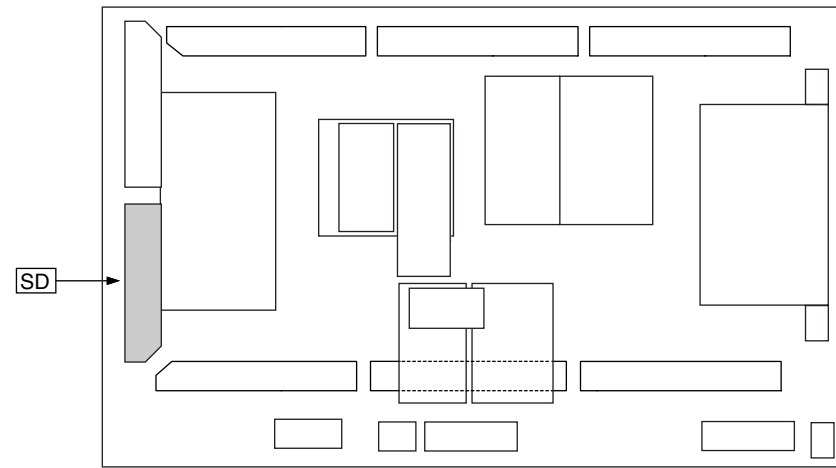

**SD-BOARD (FOIL SIDE)
TNPA4001AB**

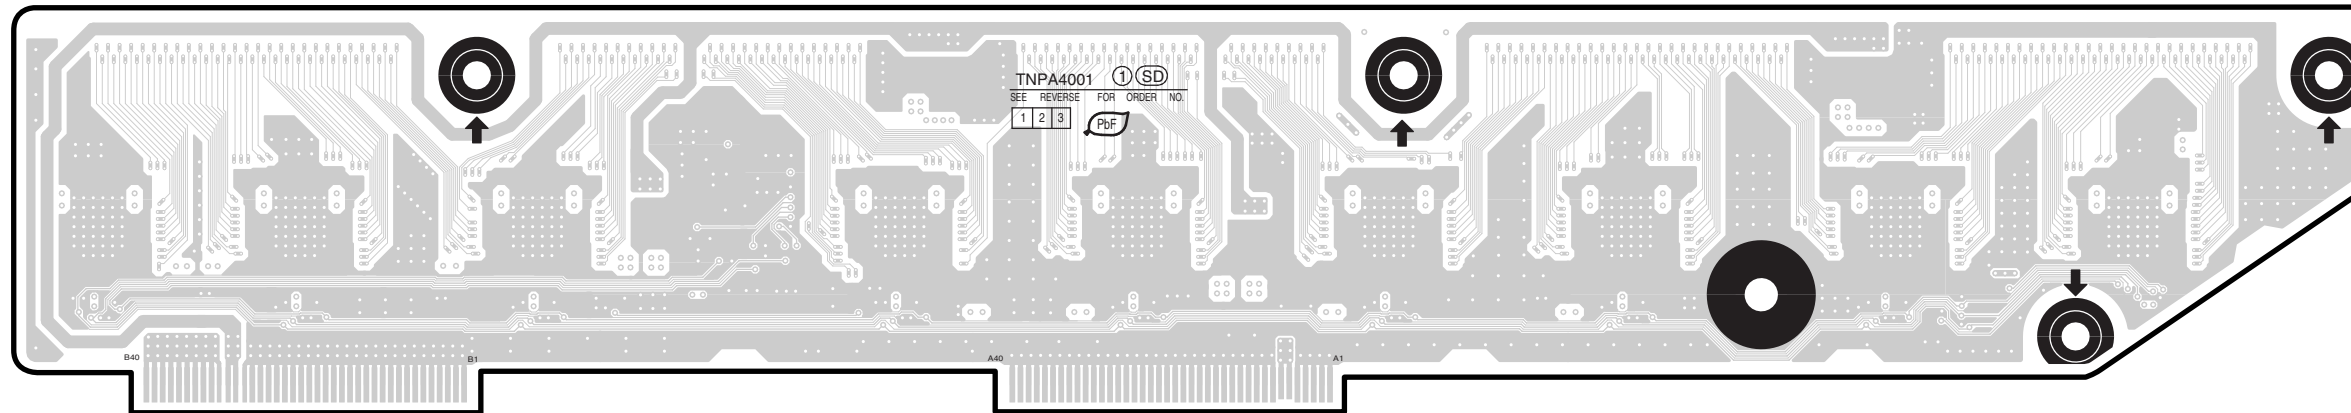

**SD-BOARD (COMPONENT SIDE)
TNPA4001AB**

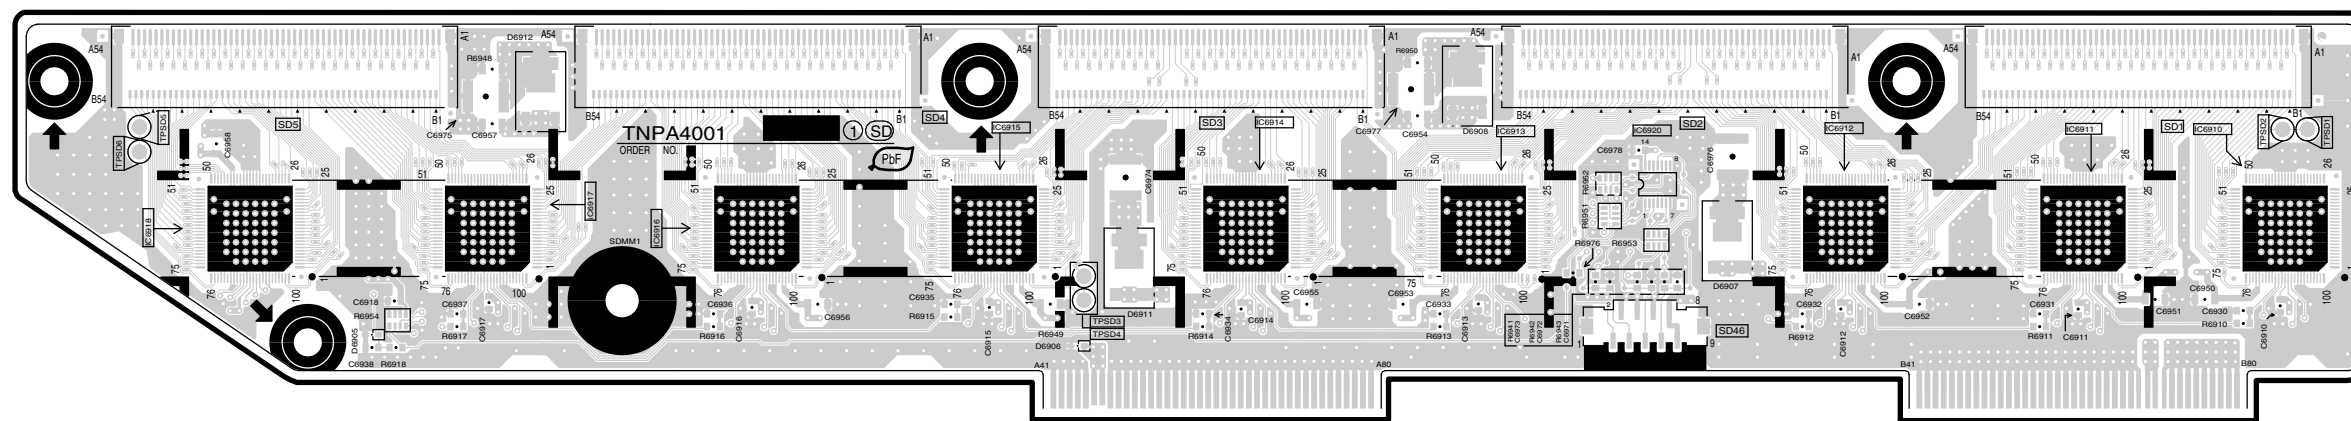



TH-58PY700AZ/M/MR, PZ700A
SD-BOARD TNPA4001AB

TH-58PY700AZ/M/MR, PZ700A
SD-BOARD TNPA4001AB

A B C D E F G H I

14.20. SS-Board

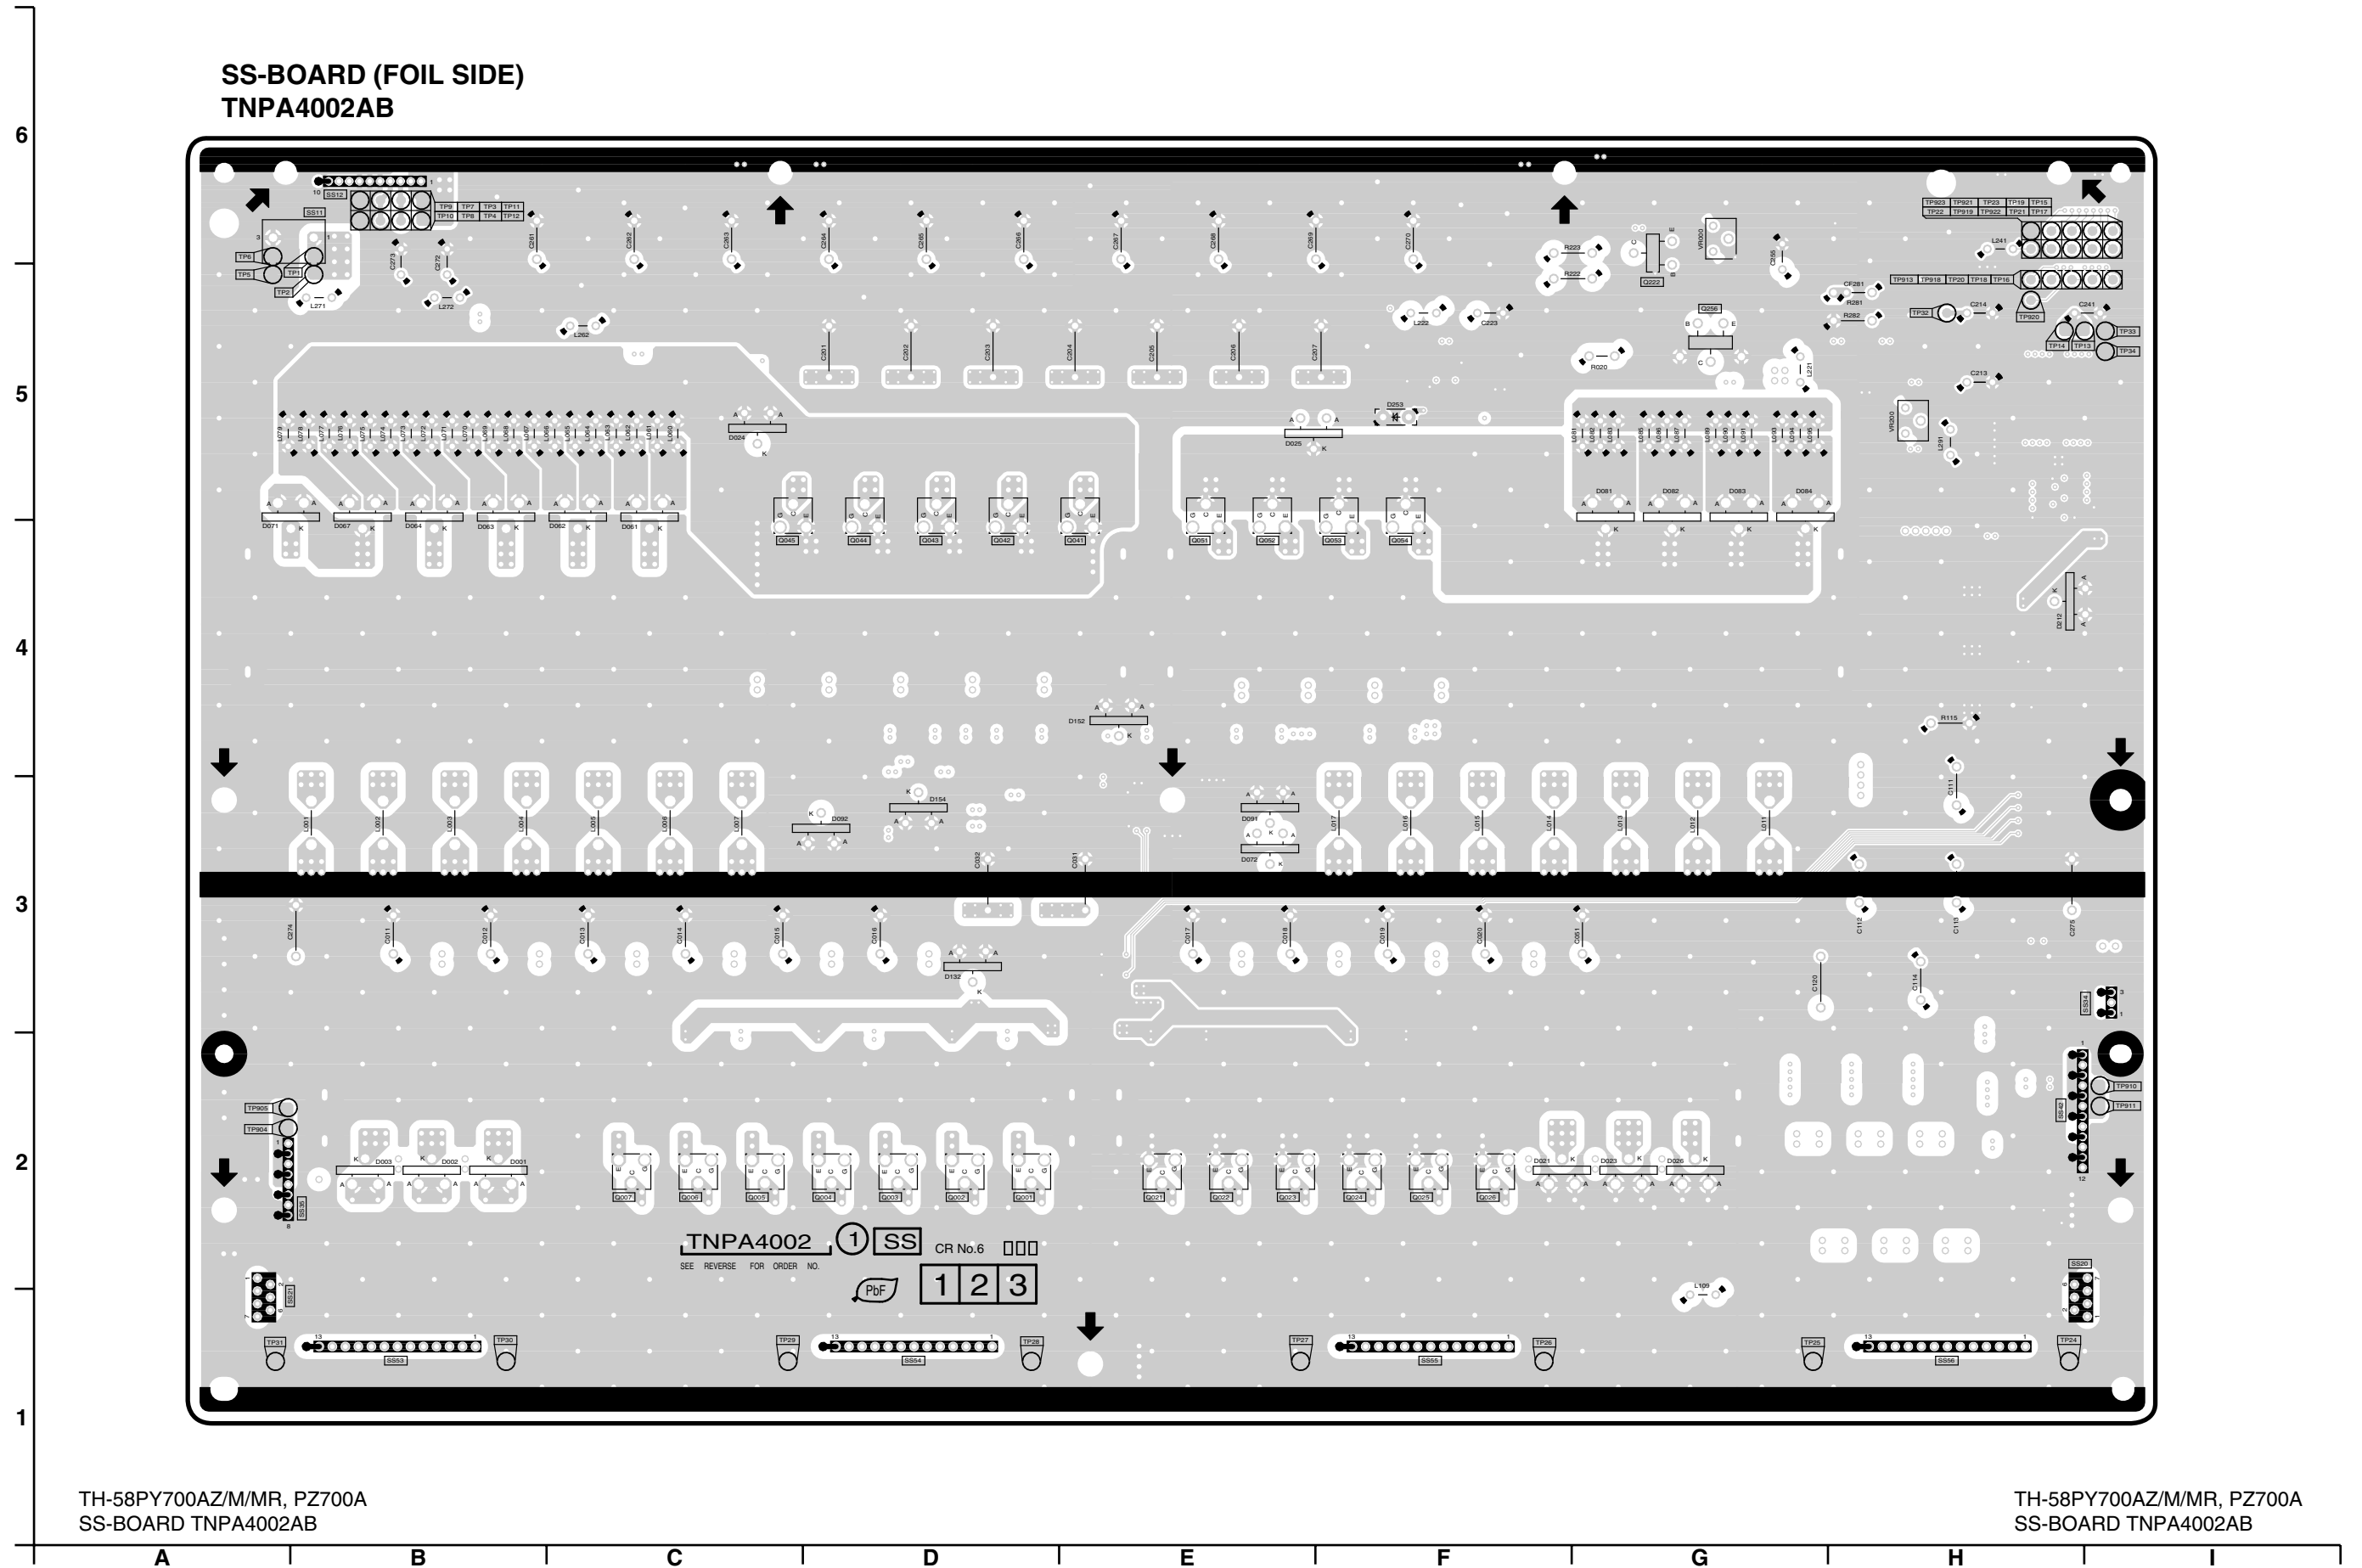

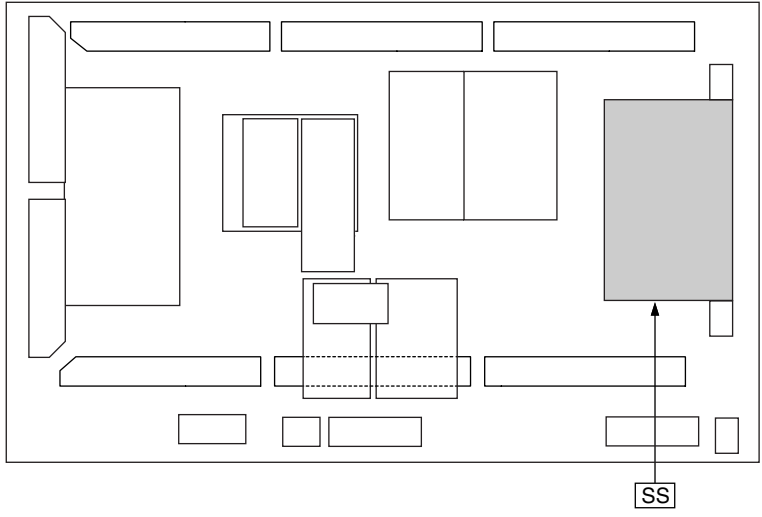


Parts Location

| SS-BOARD (FOIL SIDE) | | | | | |
|----------------------|-----|------|-----|---------------|-----|
| TRANSISTOR | | TP | | | |
| Q6001 | D-2 | TP1 | B-5 | TP6904 | A-2 |
| Q6002 | D-2 | TP2 | B-5 | TP6905 | A-2 |
| Q6003 | D-2 | TP3 | B-6 | TP6910 | I-2 |
| Q6004 | D-2 | TP4 | B-6 | TP6911 | I-2 |
| Q6005 | C-2 | TP5 | A-5 | TP6913 | H-6 |
| Q6006 | C-2 | TP6 | A-6 | TP6918 | H-6 |
| Q6007 | C-2 | TP7 | B-6 | TP6919 | H-6 |
| Q6021 | E-2 | TP8 | B-6 | TP6920 | H-5 |
| Q6022 | E-2 | TP9 | B-6 | TP6921 | H-6 |
| Q6023 | E-2 | TP10 | B-6 | TP6922 | H-6 |
| Q6024 | F-2 | TP11 | B-6 | TP6923 | H-6 |
| Q6025 | F-2 | TP12 | B-6 | | |
| Q6026 | F-2 | TP13 | H-5 | VOLUME | |
| Q6041 | E-4 | TP14 | H-5 | VR6000 | G-6 |
| Q6042 | D-4 | TP15 | H-6 | VR6200 | H-5 |
| Q6043 | D-4 | TP16 | H-6 | | |
| Q6044 | D-4 | TP17 | H-6 | | |
| Q6045 | C-4 | TP18 | H-6 | | |
| Q6051 | E-4 | TP19 | H-6 | | |
| Q6052 | E-4 | TP20 | H-6 | | |
| Q6053 | F-4 | TP21 | H-6 | | |
| Q6054 | F-4 | TP22 | H-6 | | |
| Q6222 | G-6 | TP23 | H-6 | | |
| Q6256 | G-5 | TP24 | H-1 | | |
| | | TP25 | G-1 | | |
| | | TP26 | F-1 | | |
| | | TP27 | E-1 | | |
| | | TP28 | D-1 | | |
| | | TP29 | C-1 | | |
| | | TP30 | B-1 | | |
| | | TP31 | A-1 | | |
| | | TP32 | H-5 | | |
| | | TP33 | I-5 | | |
| | | TP34 | I-5 | | |

Parts Location

| SS-BOARD (COMPONENT SIDE) | | | | | | | |
|---------------------------|-----|------------|-----|-------|-----|---------------|-----|
| IC | | TRANSISTOR | | | | TP | |
| IC6131 | E-3 | Q6001 | F-2 | Q6141 | F-3 | TPSS1 | C-1 |
| IC6151 | E-4 | Q6002 | F-2 | Q6142 | F-2 | TP15V | H-5 |
| IC6191 | A-2 | Q6003 | F-2 | Q6143 | F-3 | TPSOS8 | B-6 |
| IC6211 | A-4 | Q6004 | F-2 | Q6144 | E-3 | TPVDA | G-5 |
| IC6221 | C-6 | Q6005 | G-2 | Q6147 | E-3 | TPVe | B-5 |
| IC6241 | A-5 | Q6006 | G-2 | Q6148 | D-3 | TPVe2 | B-5 |
| IC6251 | D-5 | Q6007 | G-2 | Q6149 | D-3 | TPVSUS | H-5 |
| IC6281 | B-5 | Q6021 | E-2 | Q6151 | G-3 | | |
| | | Q6022 | E-2 | Q6152 | G-3 | | |
| | | Q6023 | E-2 | Q6171 | F-4 | | |
| | | Q6024 | D-2 | Q6172 | F-4 | VOLUME | |
| | | Q6025 | D-2 | Q6173 | F-4 | VR6000 | C-6 |
| | | Q6026 | D-2 | Q6174 | F-4 | VR6200 | B-5 |
| | | Q6031 | E-4 | Q6181 | E-4 | | |
| | | Q6041 | E-5 | Q6183 | D-4 | | |
| | | Q6042 | F-5 | Q6184 | D-4 | | |
| | | Q6043 | F-5 | Q6191 | B-2 | | |
| | | Q6044 | F-5 | Q6192 | B-2 | | |
| | | Q6045 | F-5 | Q6211 | B-4 | | |
| | | Q6051 | E-5 | Q6212 | B-4 | | |
| | | Q6052 | E-5 | Q6222 | C-6 | | |
| | | Q6053 | D-5 | Q6251 | D-5 | | |
| | | Q6054 | D-5 | Q6256 | C-5 | | |
| | | Q6101 | B-1 | Q6281 | B-5 | | |
| | | Q6102 | B-2 | Q6282 | B-5 | | |
| | | Q6103 | B-1 | | | | |
| | | Q6104 | B-2 | | | | |
| | | Q6105 | B-1 | | | | |
| | | Q6106 | B-2 | | | | |
| | | Q6111 | B-5 | | | | |
| | | Q6112 | B-4 | | | | |
| | | Q6114 | B-4 | | | | |
| | | Q6115 | B-6 | | | | |
| | | Q6116 | B-4 | | | | |

SS-BOARD (COMPONENT SIDE) TNPA4002AB


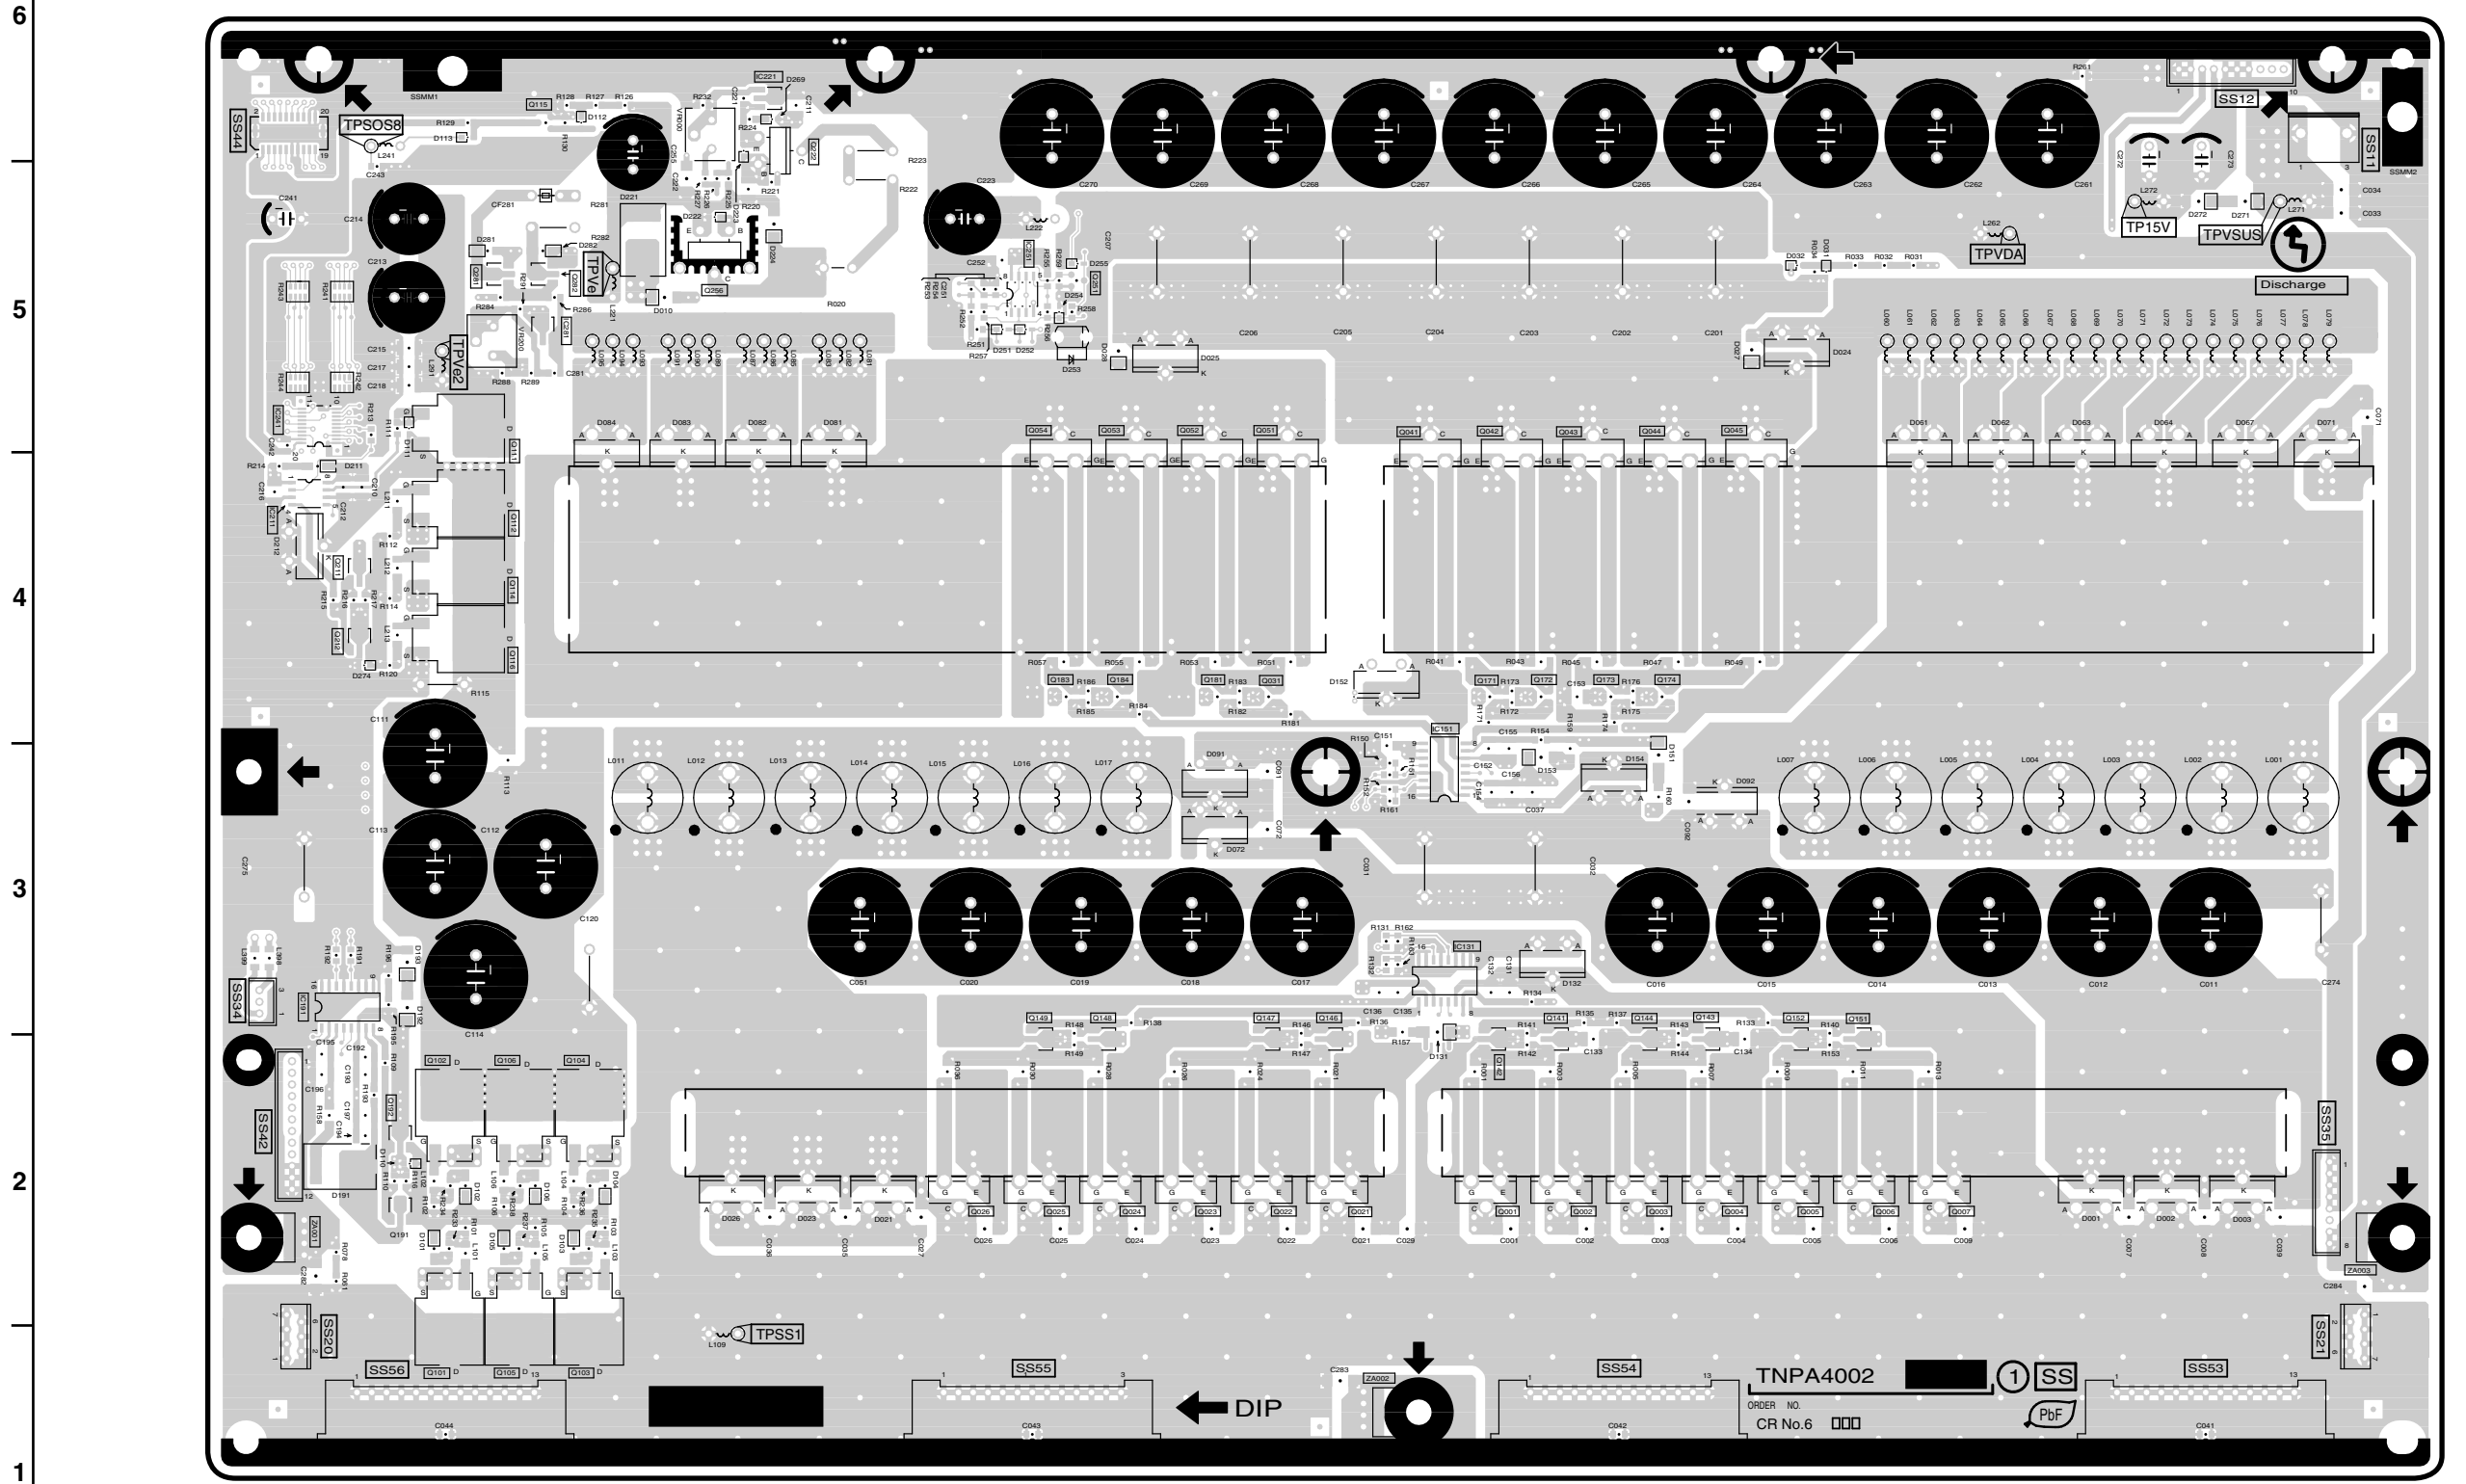


TH-58PY700AZ/M/MR, PZ700A
SS-BOARD TNPA4002AB

TH-58PY700AZ/M/MR, PZ700A
SS-BOARD TNPA4002AB


14.21. K and S-Board

6
5
4
3
2
1

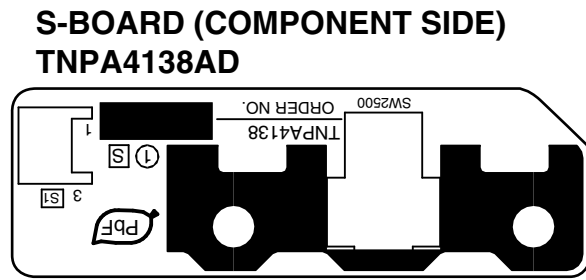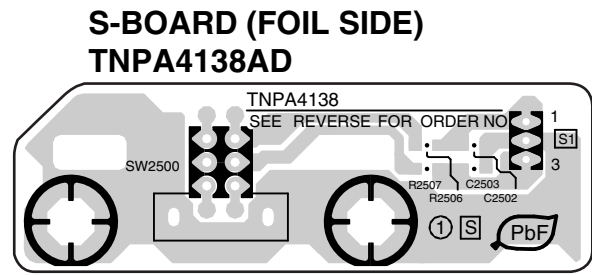


Parts Location


| K-BOARD | |
|------------|-----|
| TRANSISTOR | |
| Q2510 | B-3 |
| Q2511 | D-3 |
| Q2513 | D-3 |
| Q2518 | C-3 |
| Q2519 | B-4 |
| Q2520 | B-3 |
| Q2521 | C-4 |
| Q2522 | D-3 |

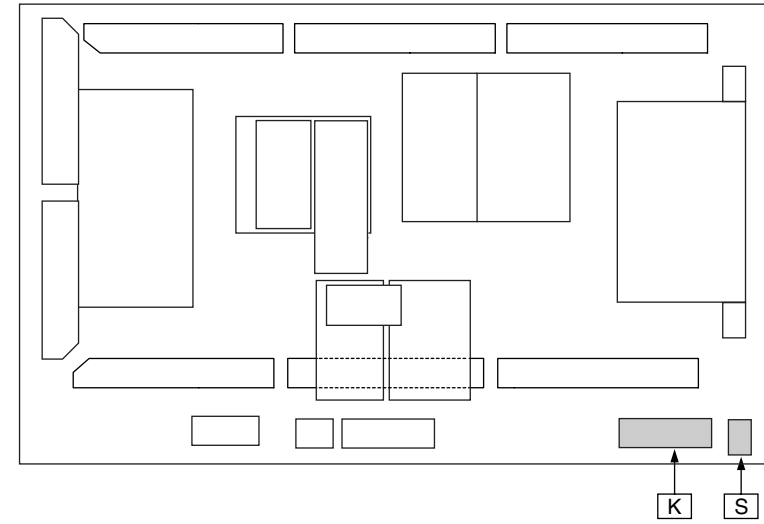

**K-BOARD (FOIL SIDE)
TNPA4137AE**

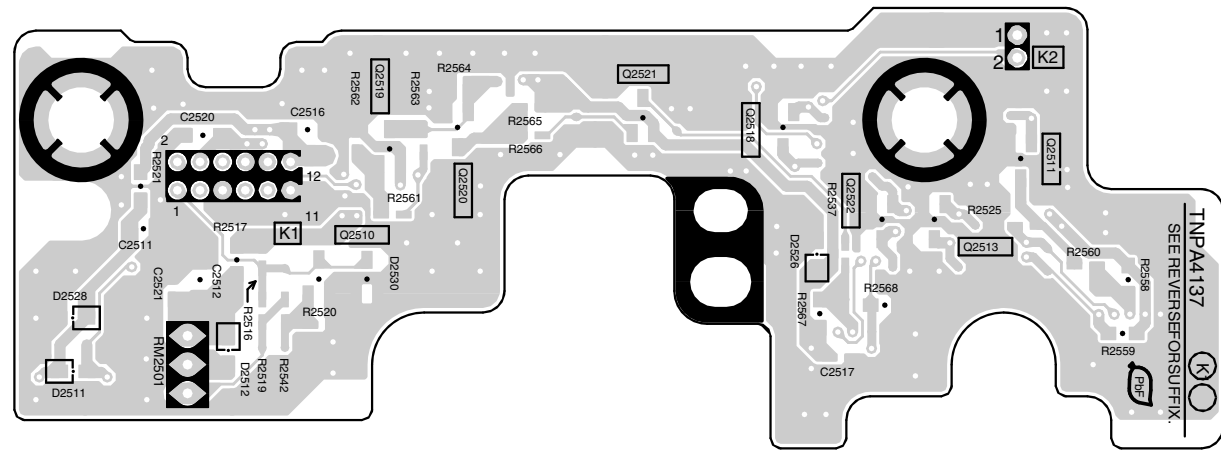

**K-BOARD (COMPONENT SIDE)
TNPA4137AE**

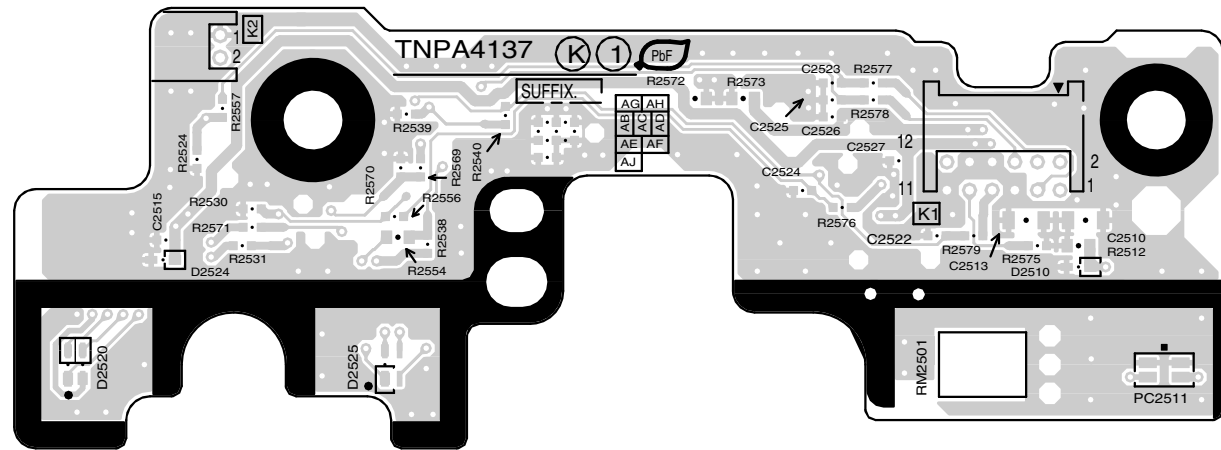

TH-58PY700AZ/M/MR, PZ700A
S-BOARD TNPA4138AD

TH-58PY700AZ/M/MR, PZ700A
K-BOARD TNPA4137AE

TH-58PY700AZ/M/MR, PZ700A
S-BOARD TNPA4138AD

TH-58PY700AZ/M/MR, PZ700A
K-BOARD TNPA4137AE

A B C D E F G H I

15 Schematic and Block Diagram

15.1. Schematic Diagram Note

Important Safety Notice

Components identified by \triangle mark have special characteristics important for safety.
When replacing any of these components, use only manufacture's specified parts.


Notes:

1. **Resistor**
Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
2. **Capacitor**
Unit of capacitance is μ F, unless otherwise noted.
3. **Coil**
Unit of inductance is H, unless otherwise noted.
4. **Test Point**
○ : Test Point position
5. **Earth Symbol**
⏏ : Chassis Earth (Cold) ⚡ : Line Earth (Hot)
6. **Voltage Measurement**
Voltage is measured by a DC voltmeter.
Conditions of the measurement are the following:
Power Source AC220-240V, 50/60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions
7. When arrow mark (↗) is found, connection is easily found from the direction of arrow.
8. Indicates the major signal flow. : Video ➡ Audio ⇔
9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.
All circuits, except the Power Circuit, are cold.
Precautions
 - a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
 - b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
 - c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
 - d. Make sure to disconnect the power plug before removing the chassis.


15.2. Main Block Diagram

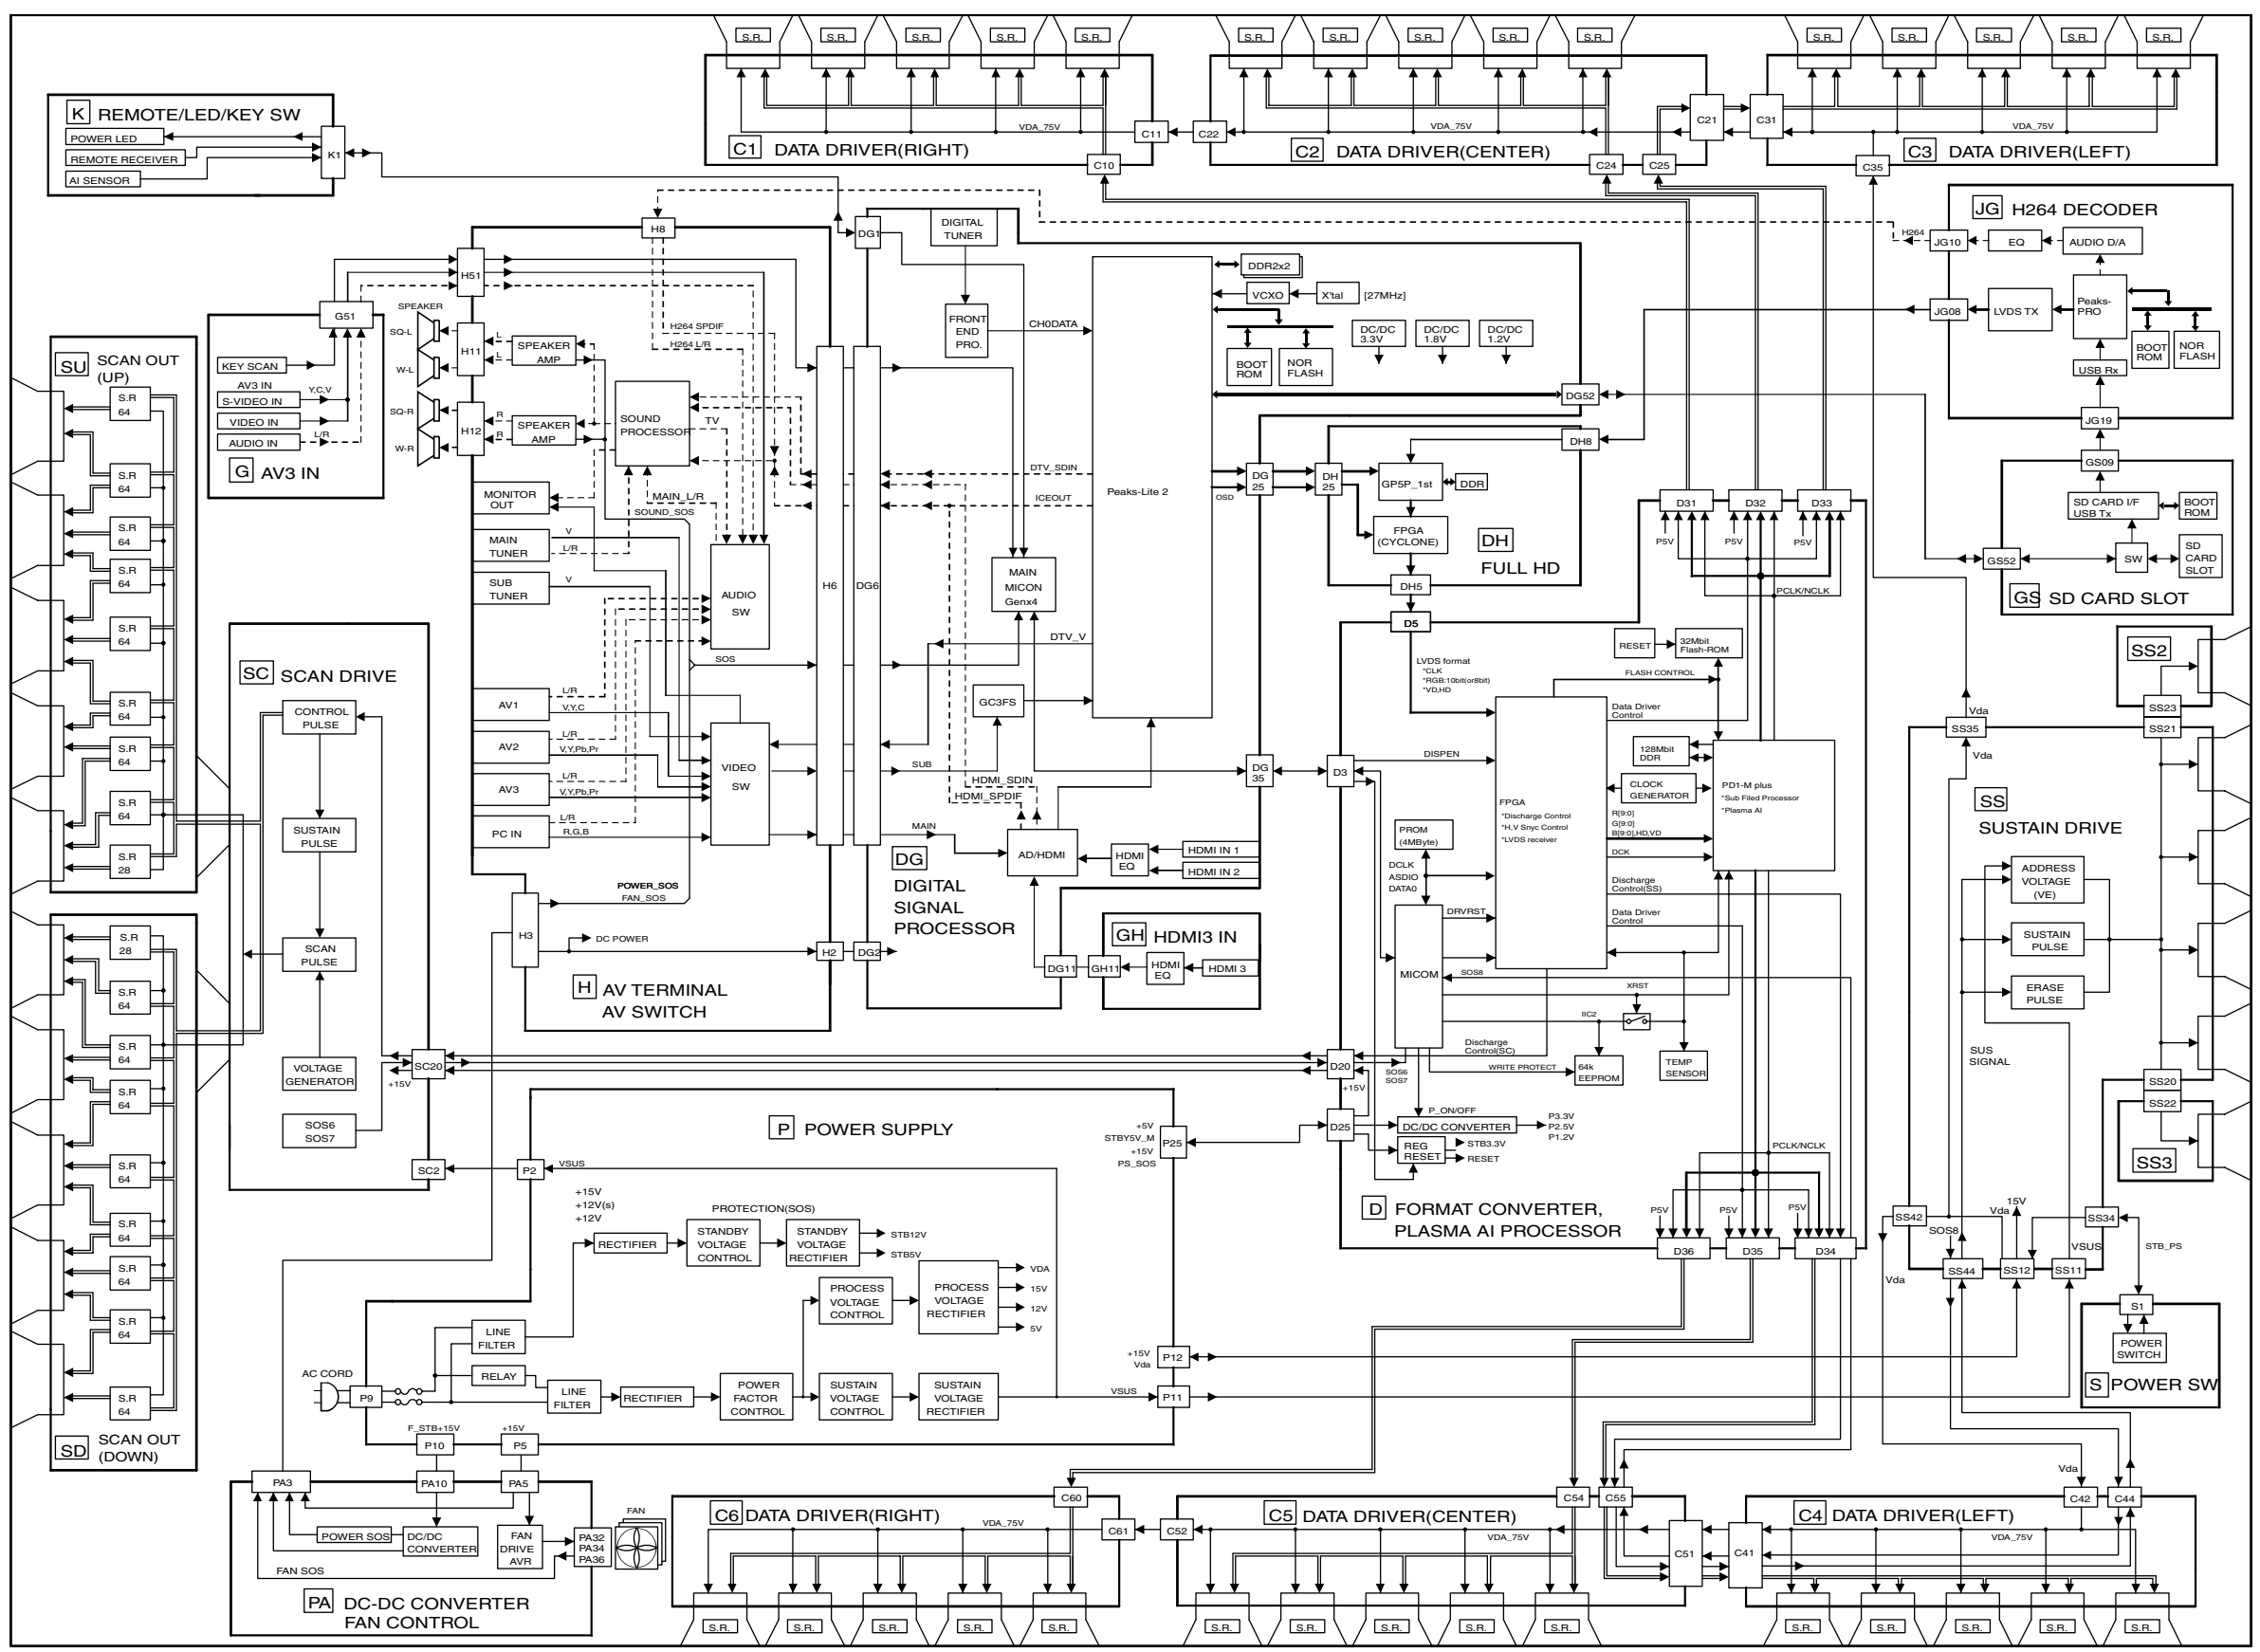


TH-58PY700AZ/M/MR, PZ700A
Main Block Diagram

TH-58PY700AZ/M/MR, PZ700A
Main Block Diagram

15.3. P-Board (1 of 2) Block Diagram

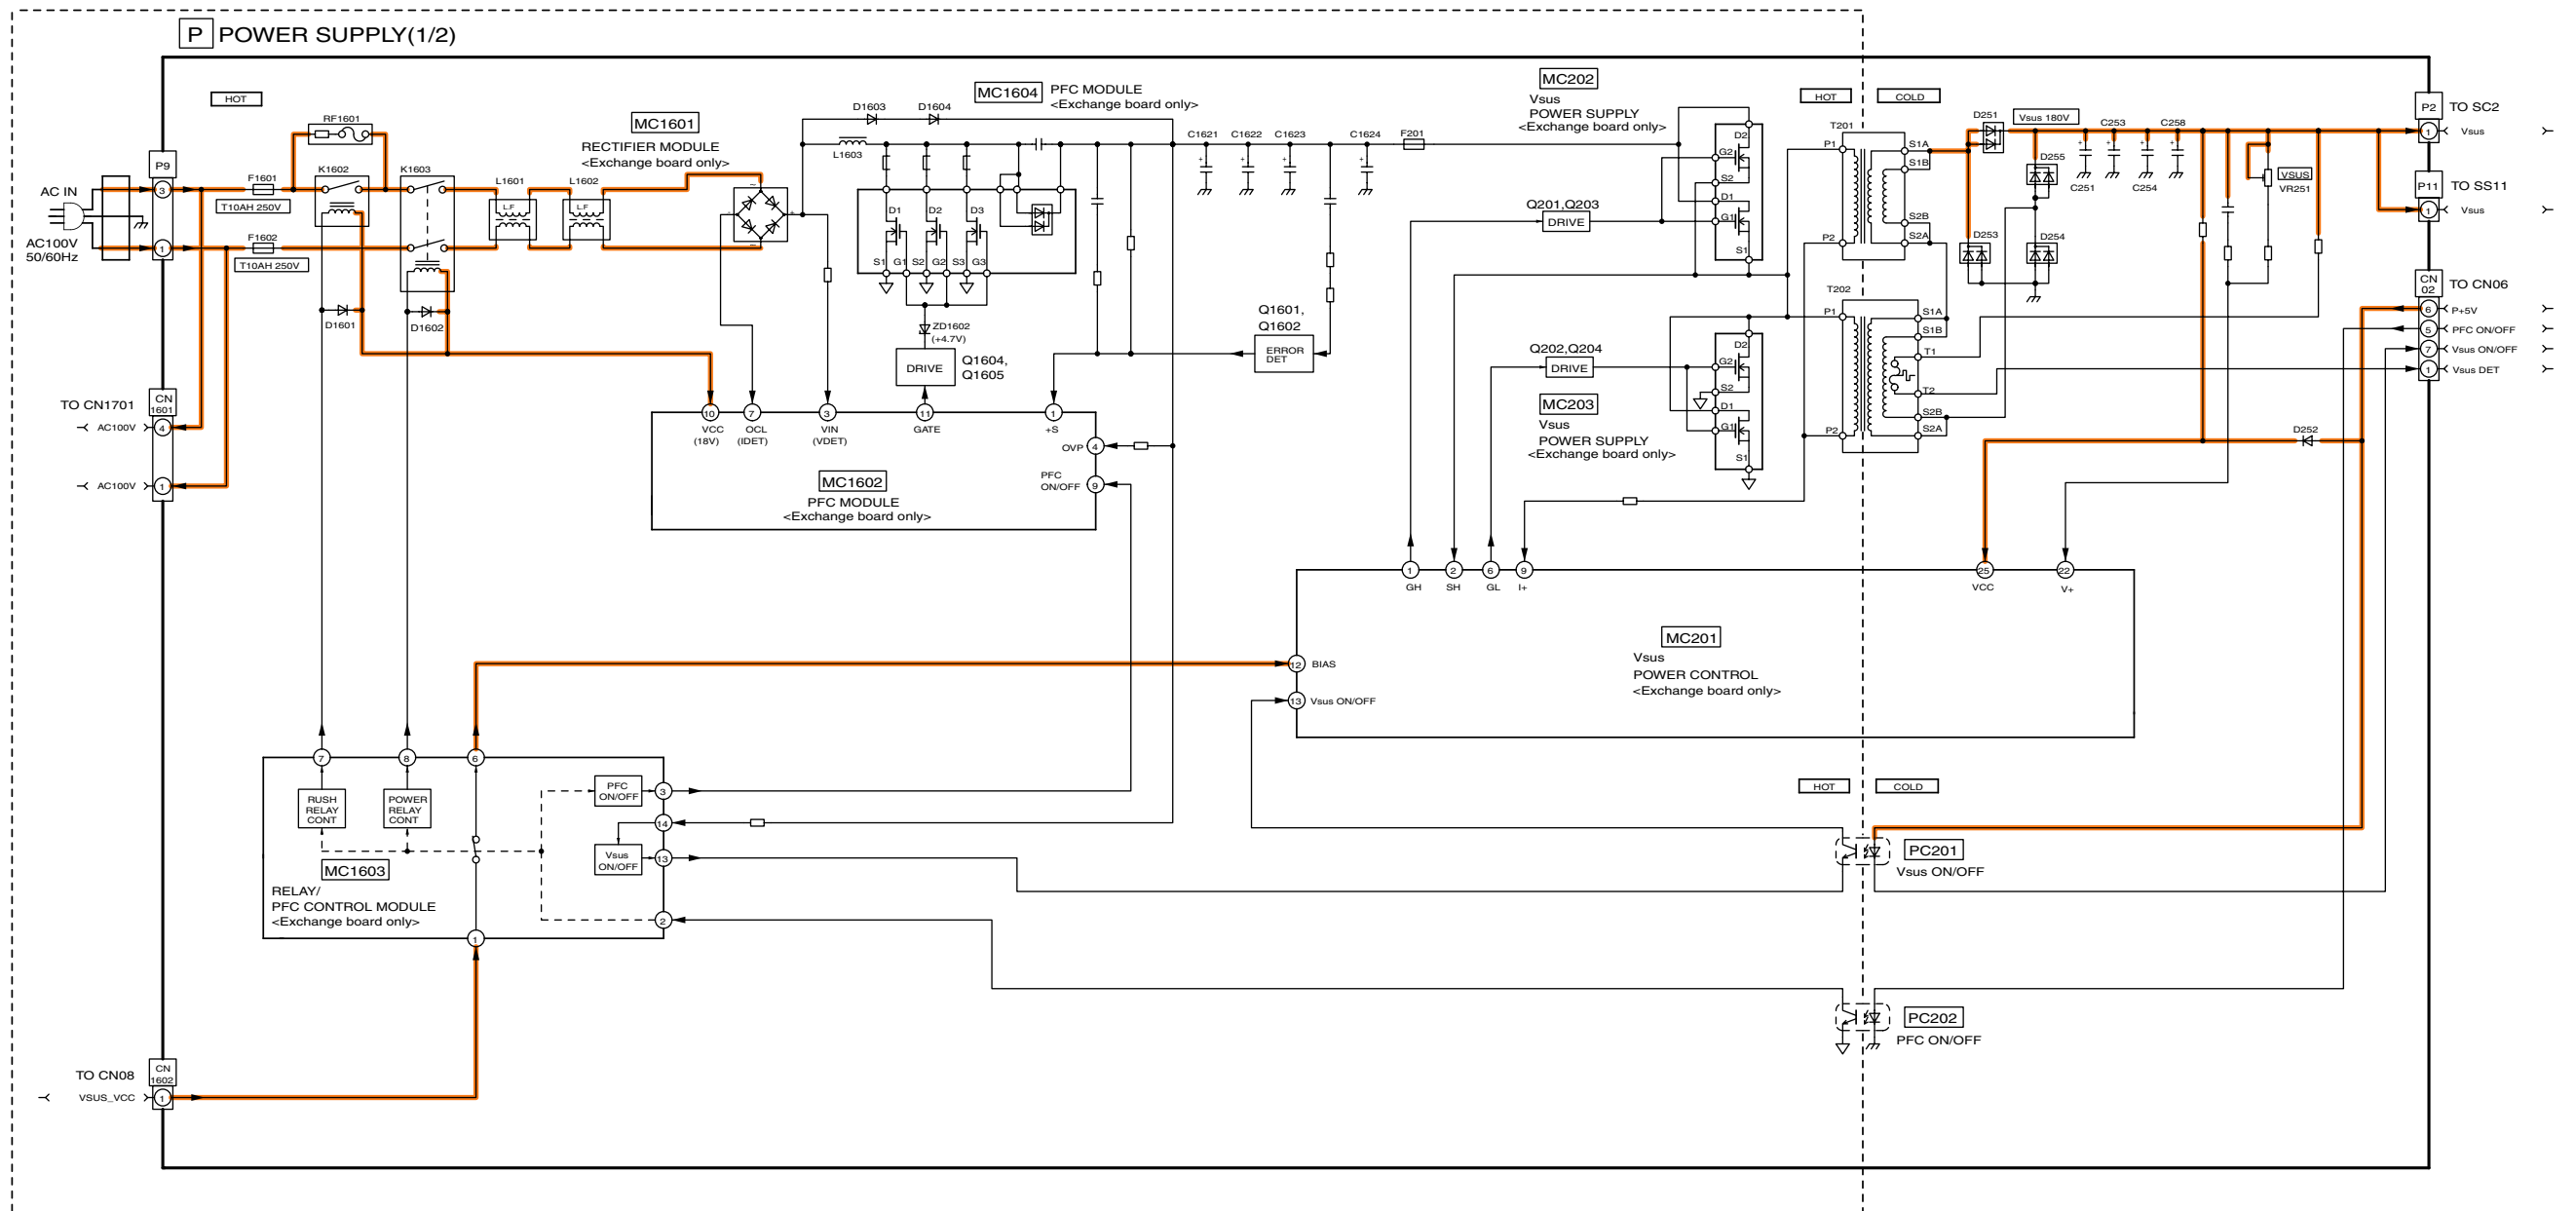


15.4. P-Board (2 of 2) Block Diagram

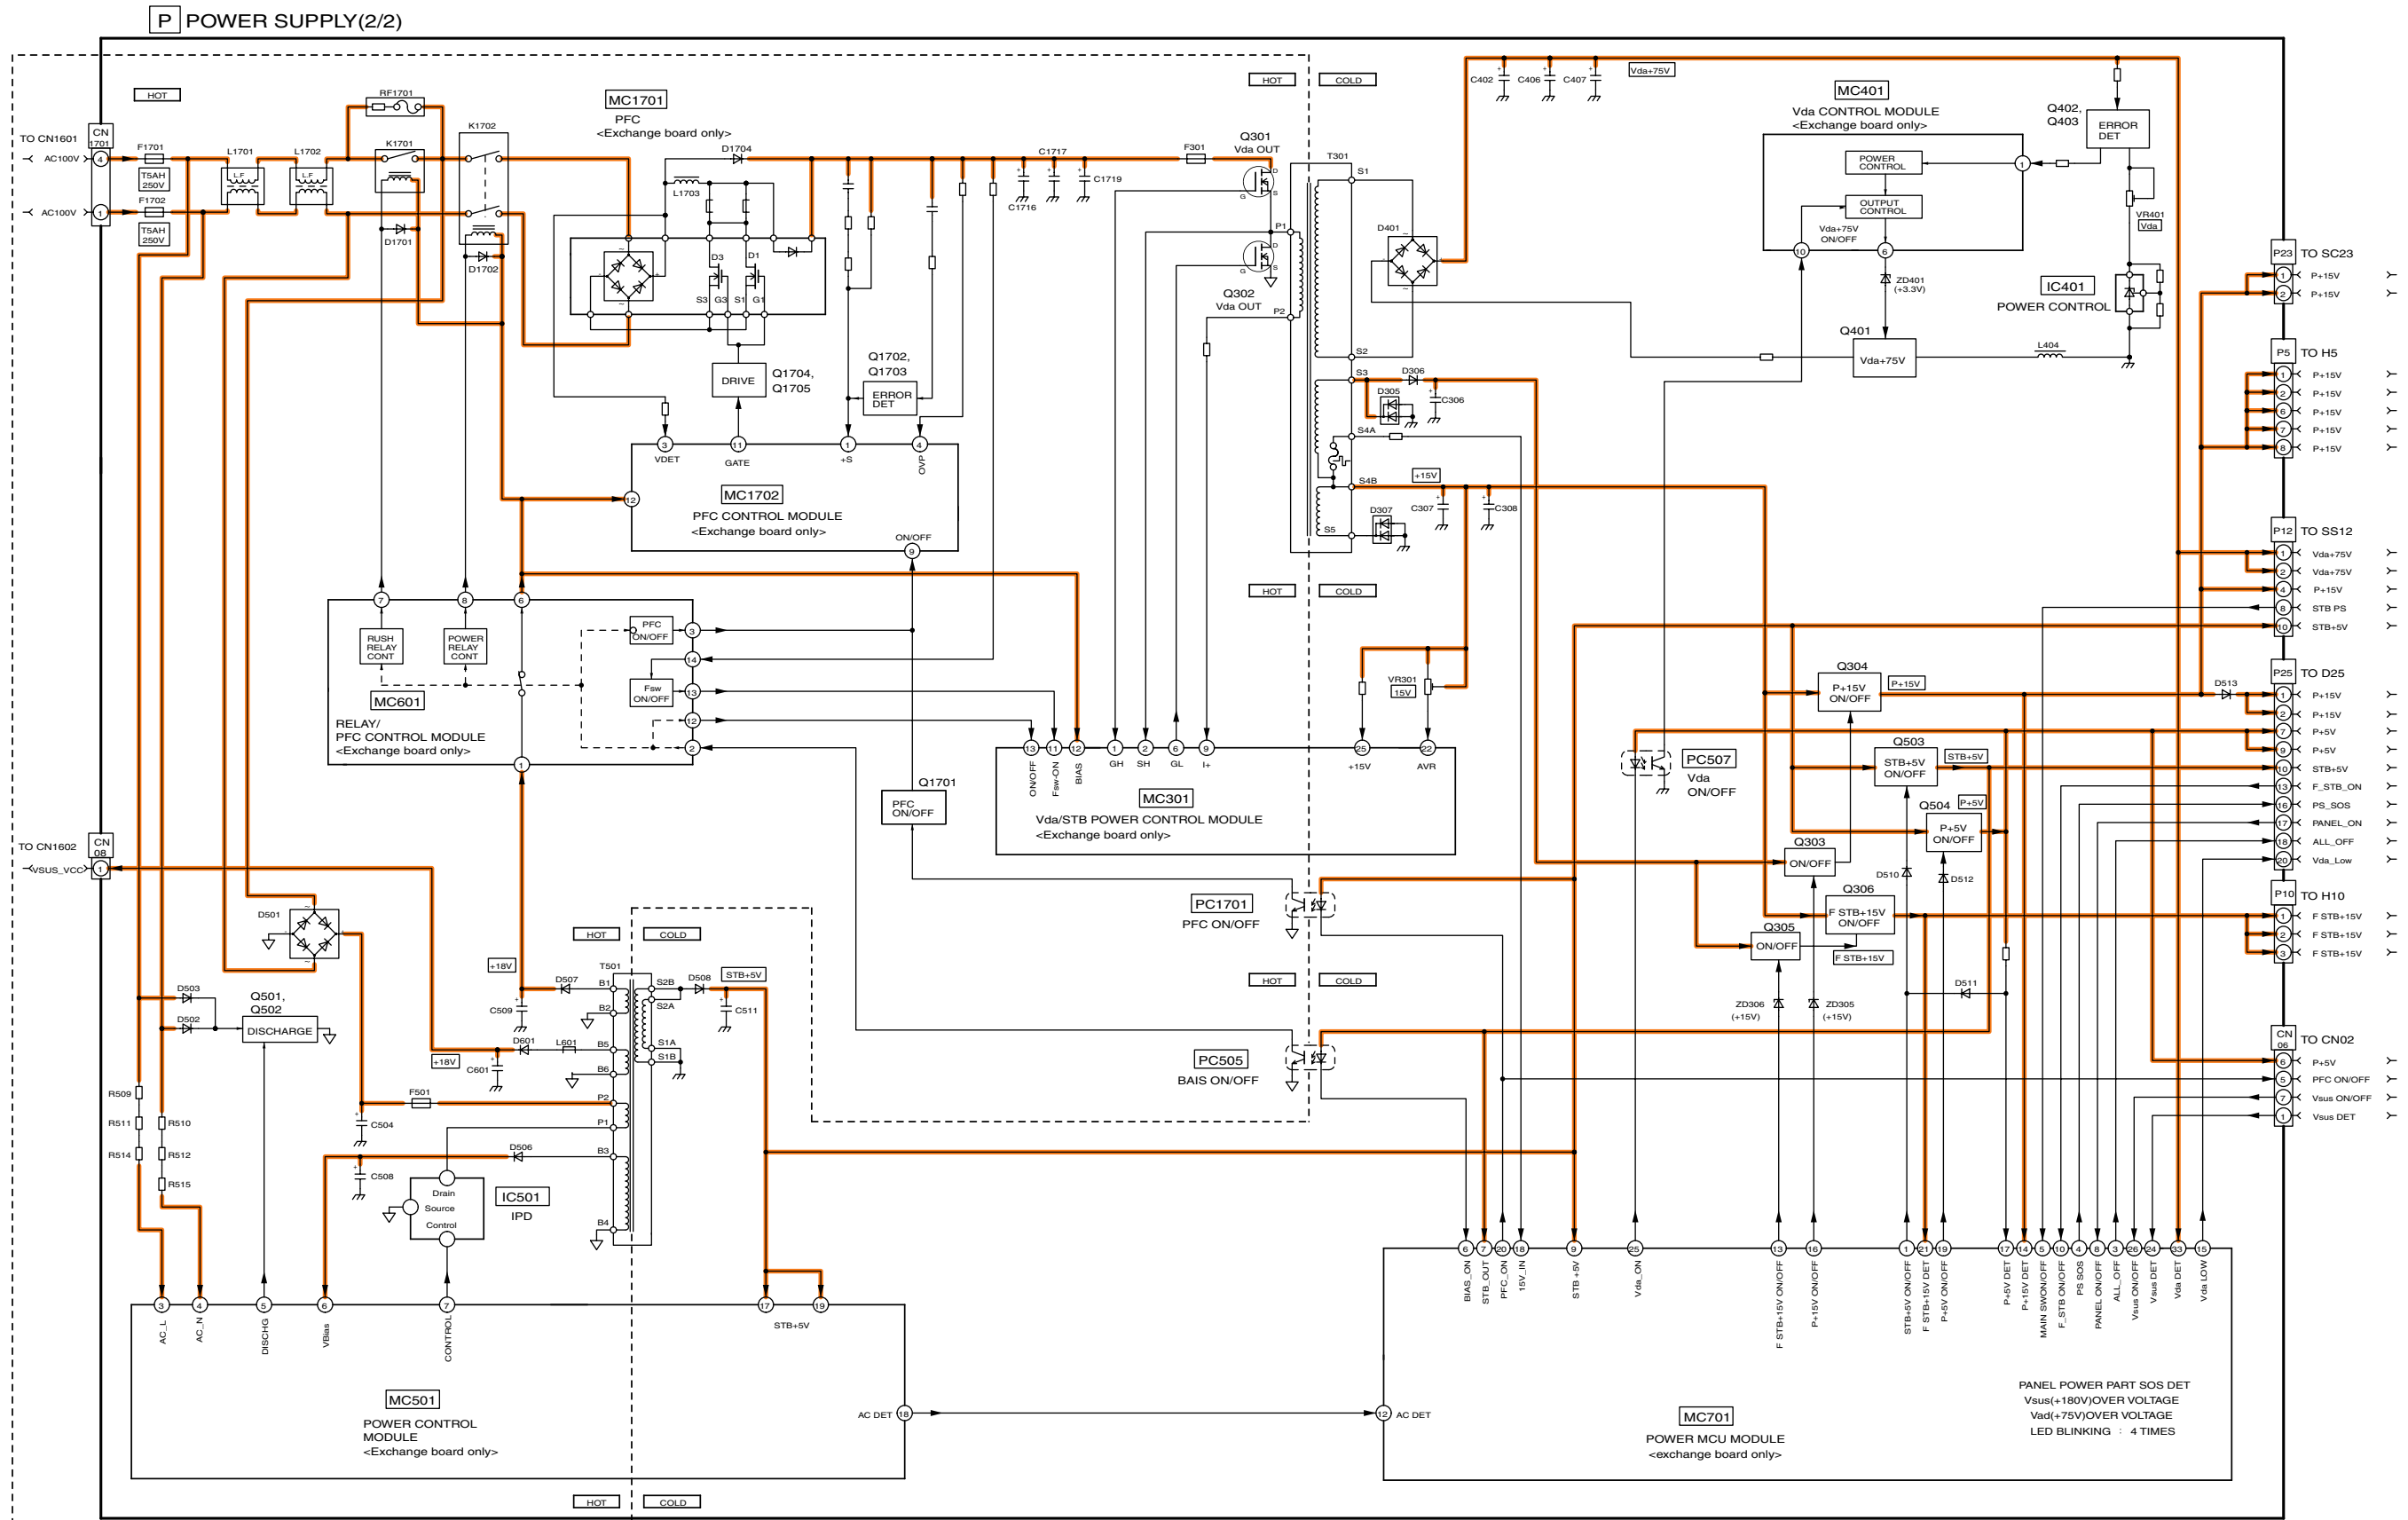

TH-58PY700AZ/M/MR, PZ700A
P-Board (2 of 2) Block Diagram


TH-58PY700AZ/M/MR, PZ700A
P-Board (2 of 2) Block Diagram

15.5. P-Board (1 of 2) Schematic Diagram

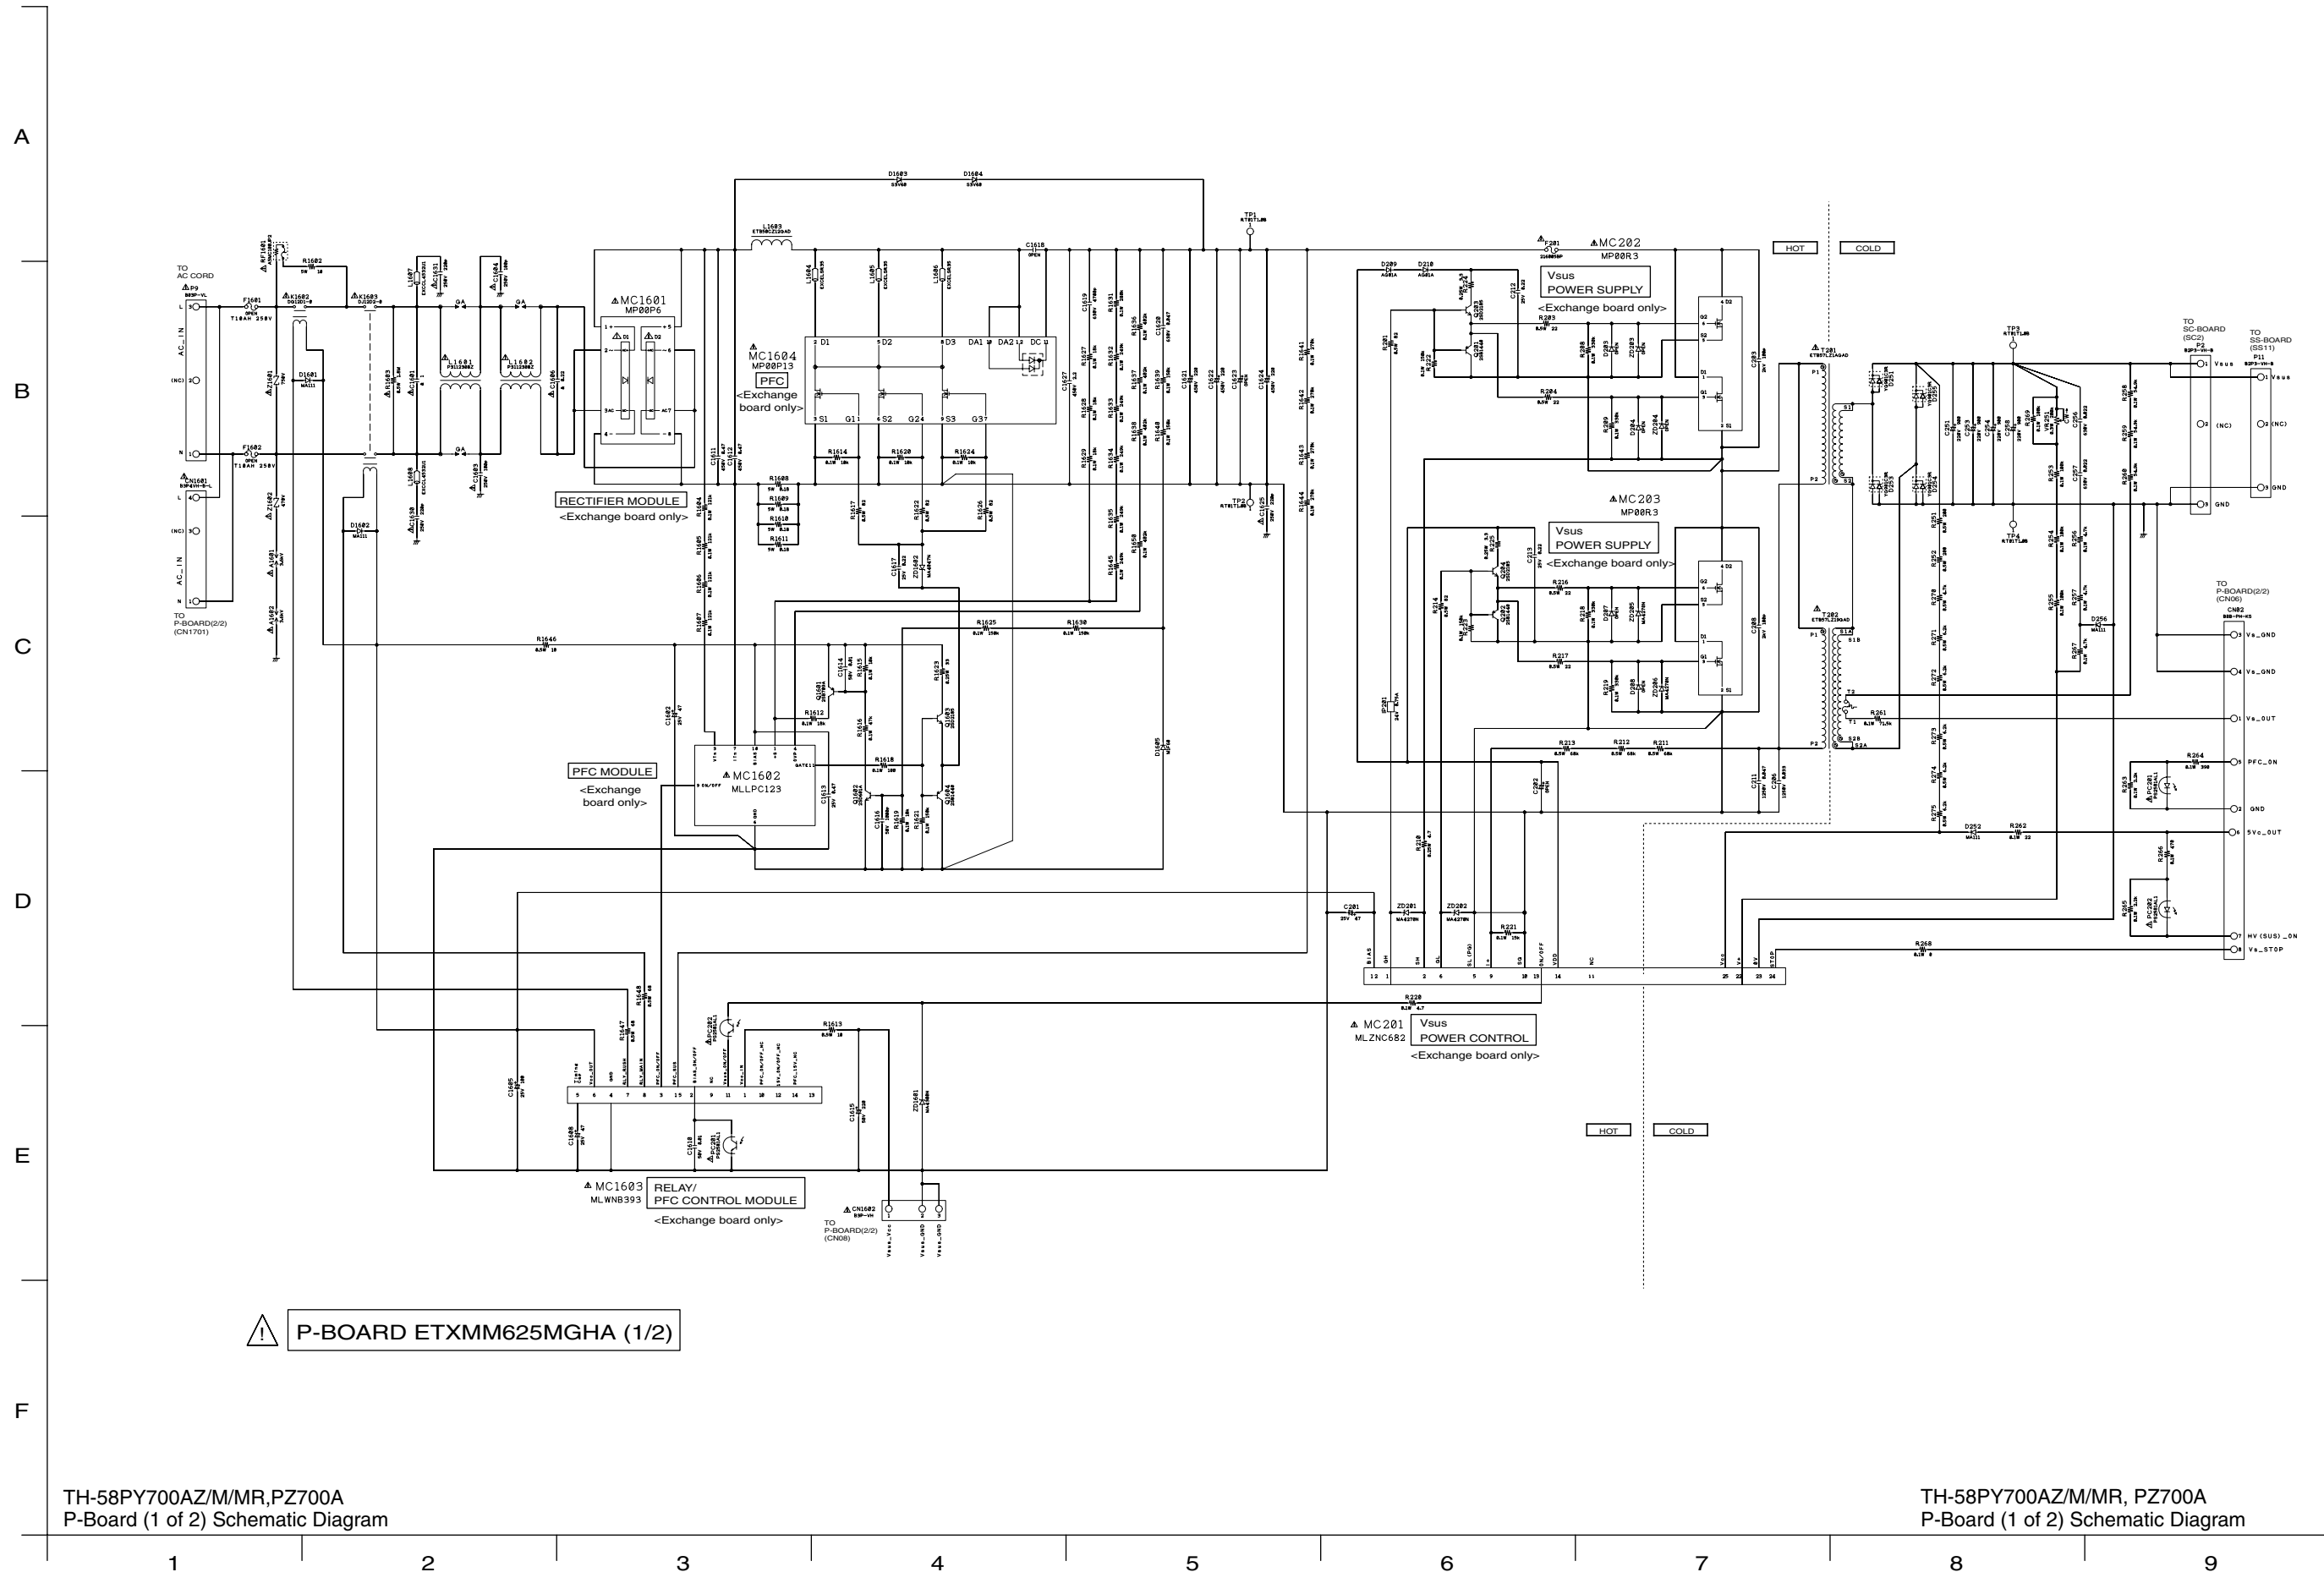

⚠ P-BOARD ETXMM625MGHA (1/2)

15.6. P-Board (2 of 2) Schematic Diagram

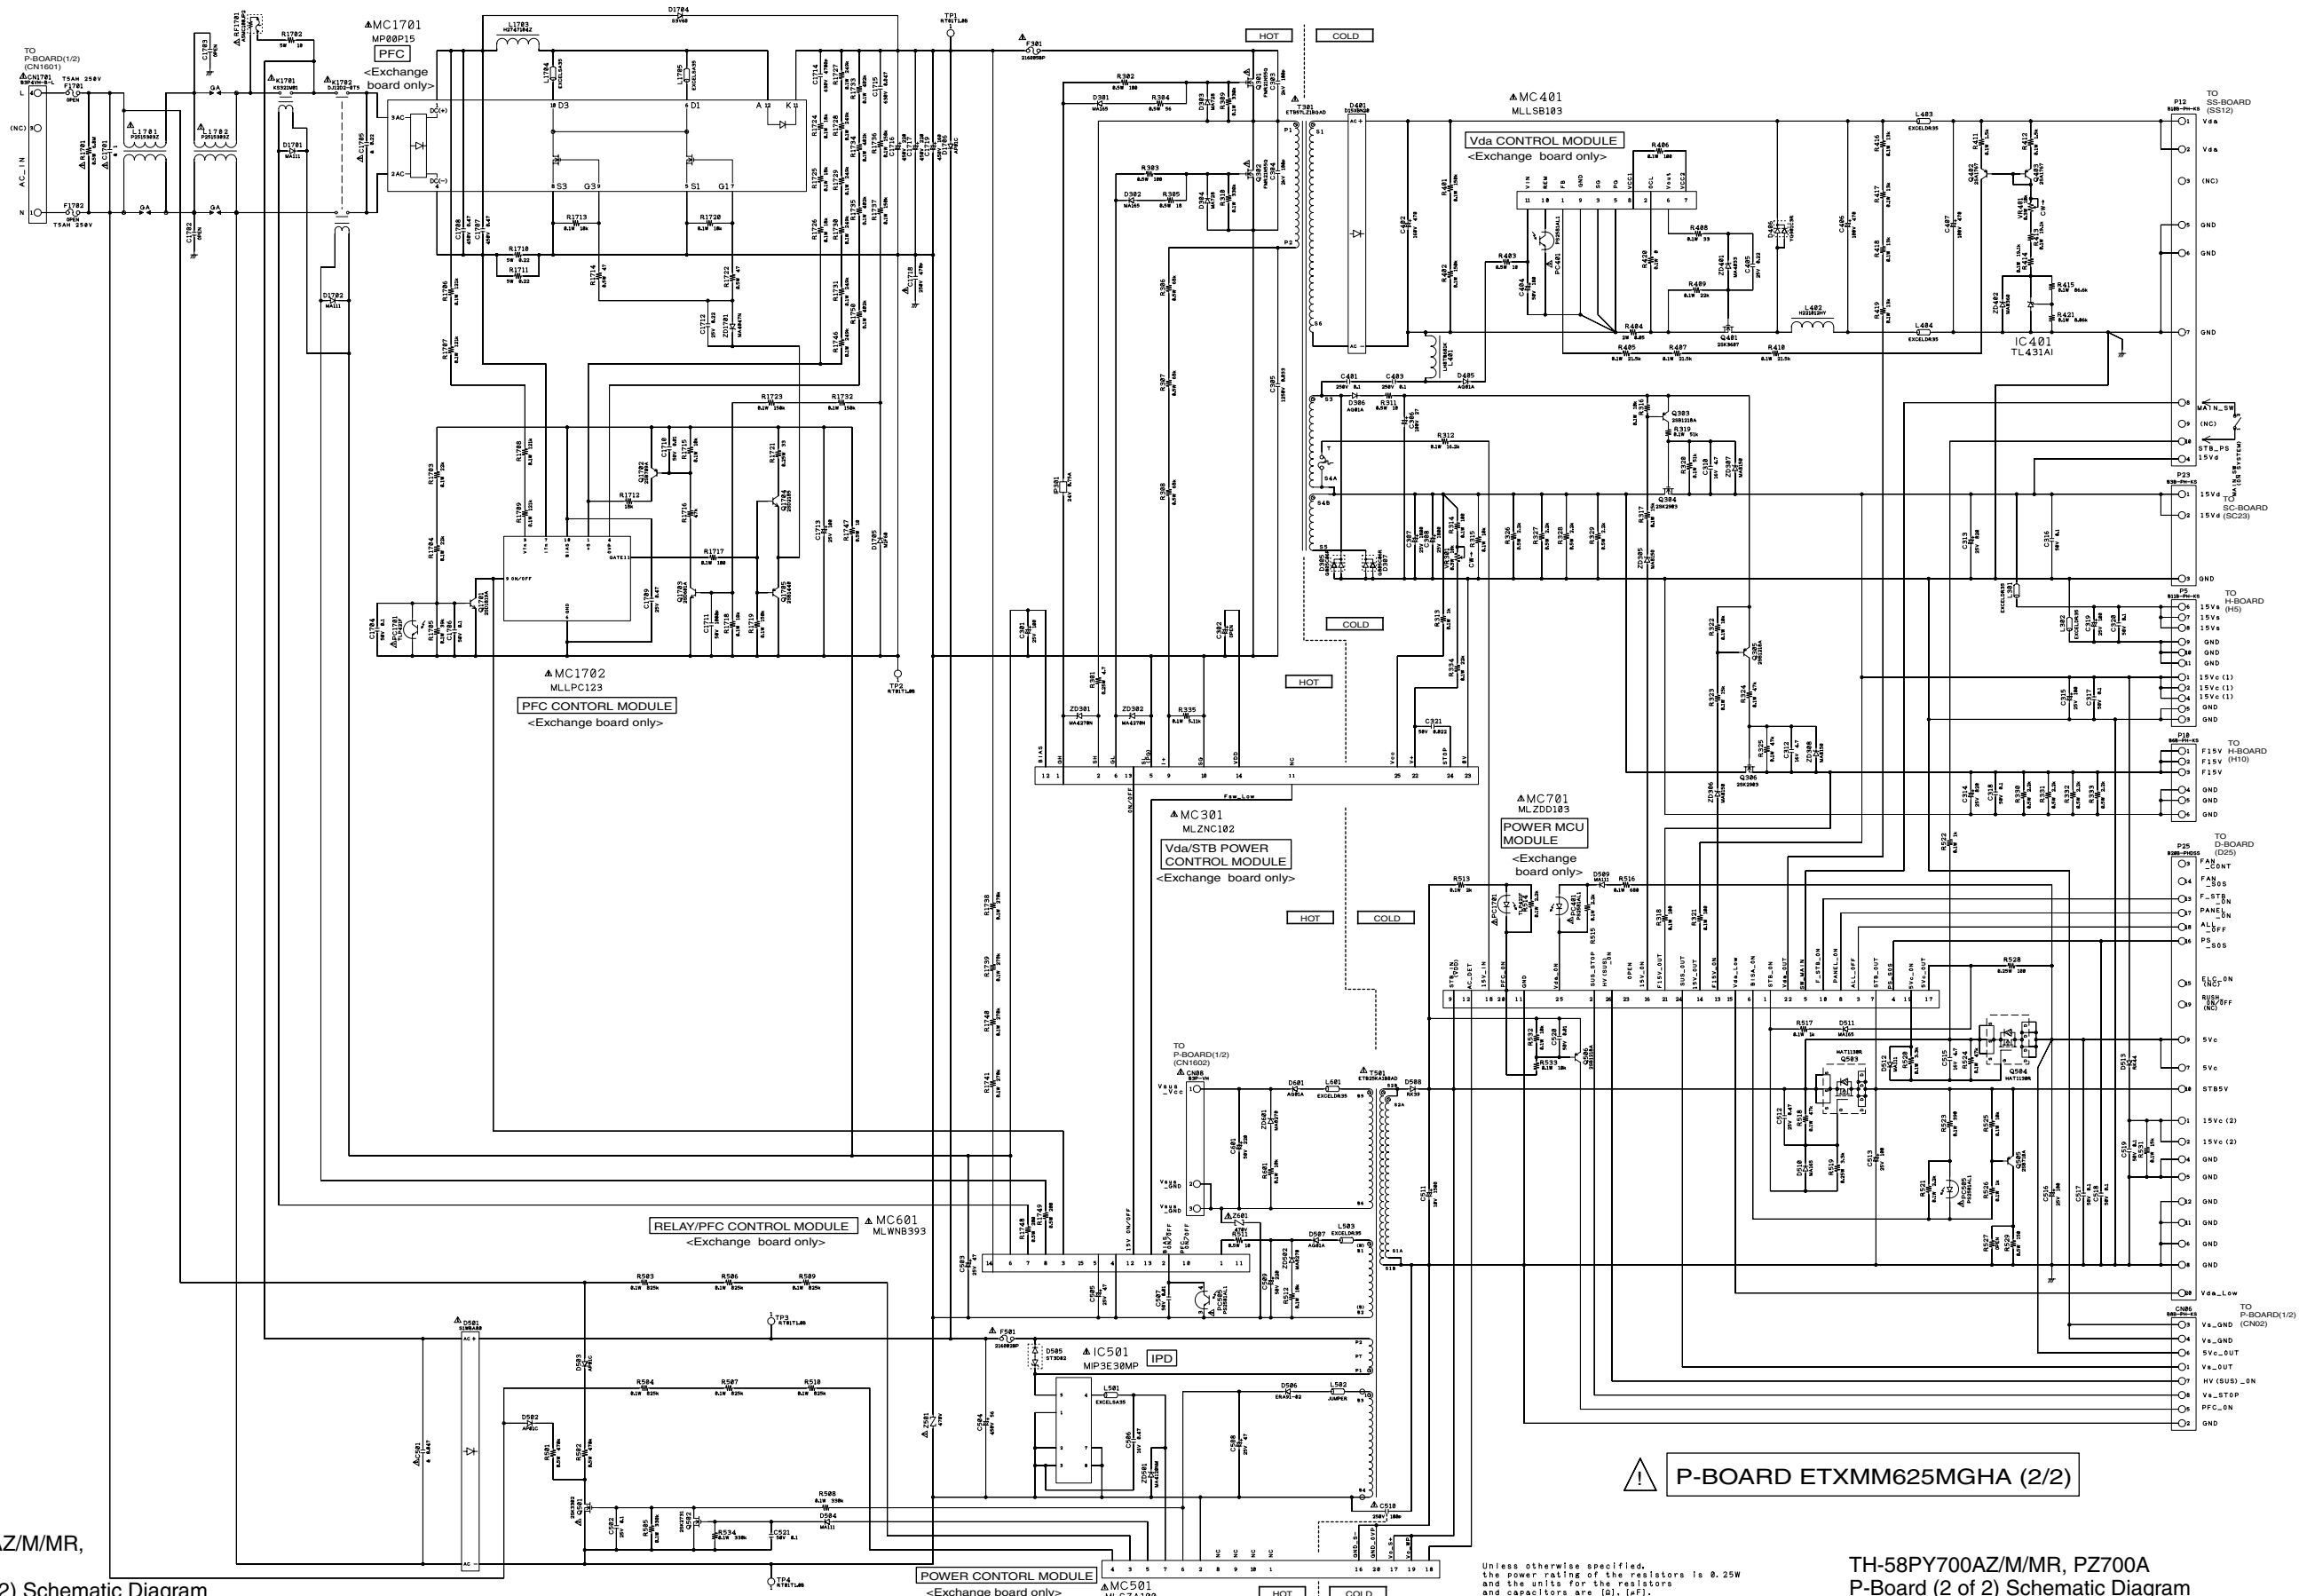


! P-BOARD ETXMM625MGHA (2/2)

TH-58PY700AZ/M/MR, PZ700A
P-Board (2 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
P-Board (2 of 2) Schematic Diagram

Unless otherwise specified, the power rating of the resistors is 0.25W and the units for the resistors and capacitors are Ω , $k\Omega$, μ F, nF, pF.


15.7. PA-Board Block Diagram

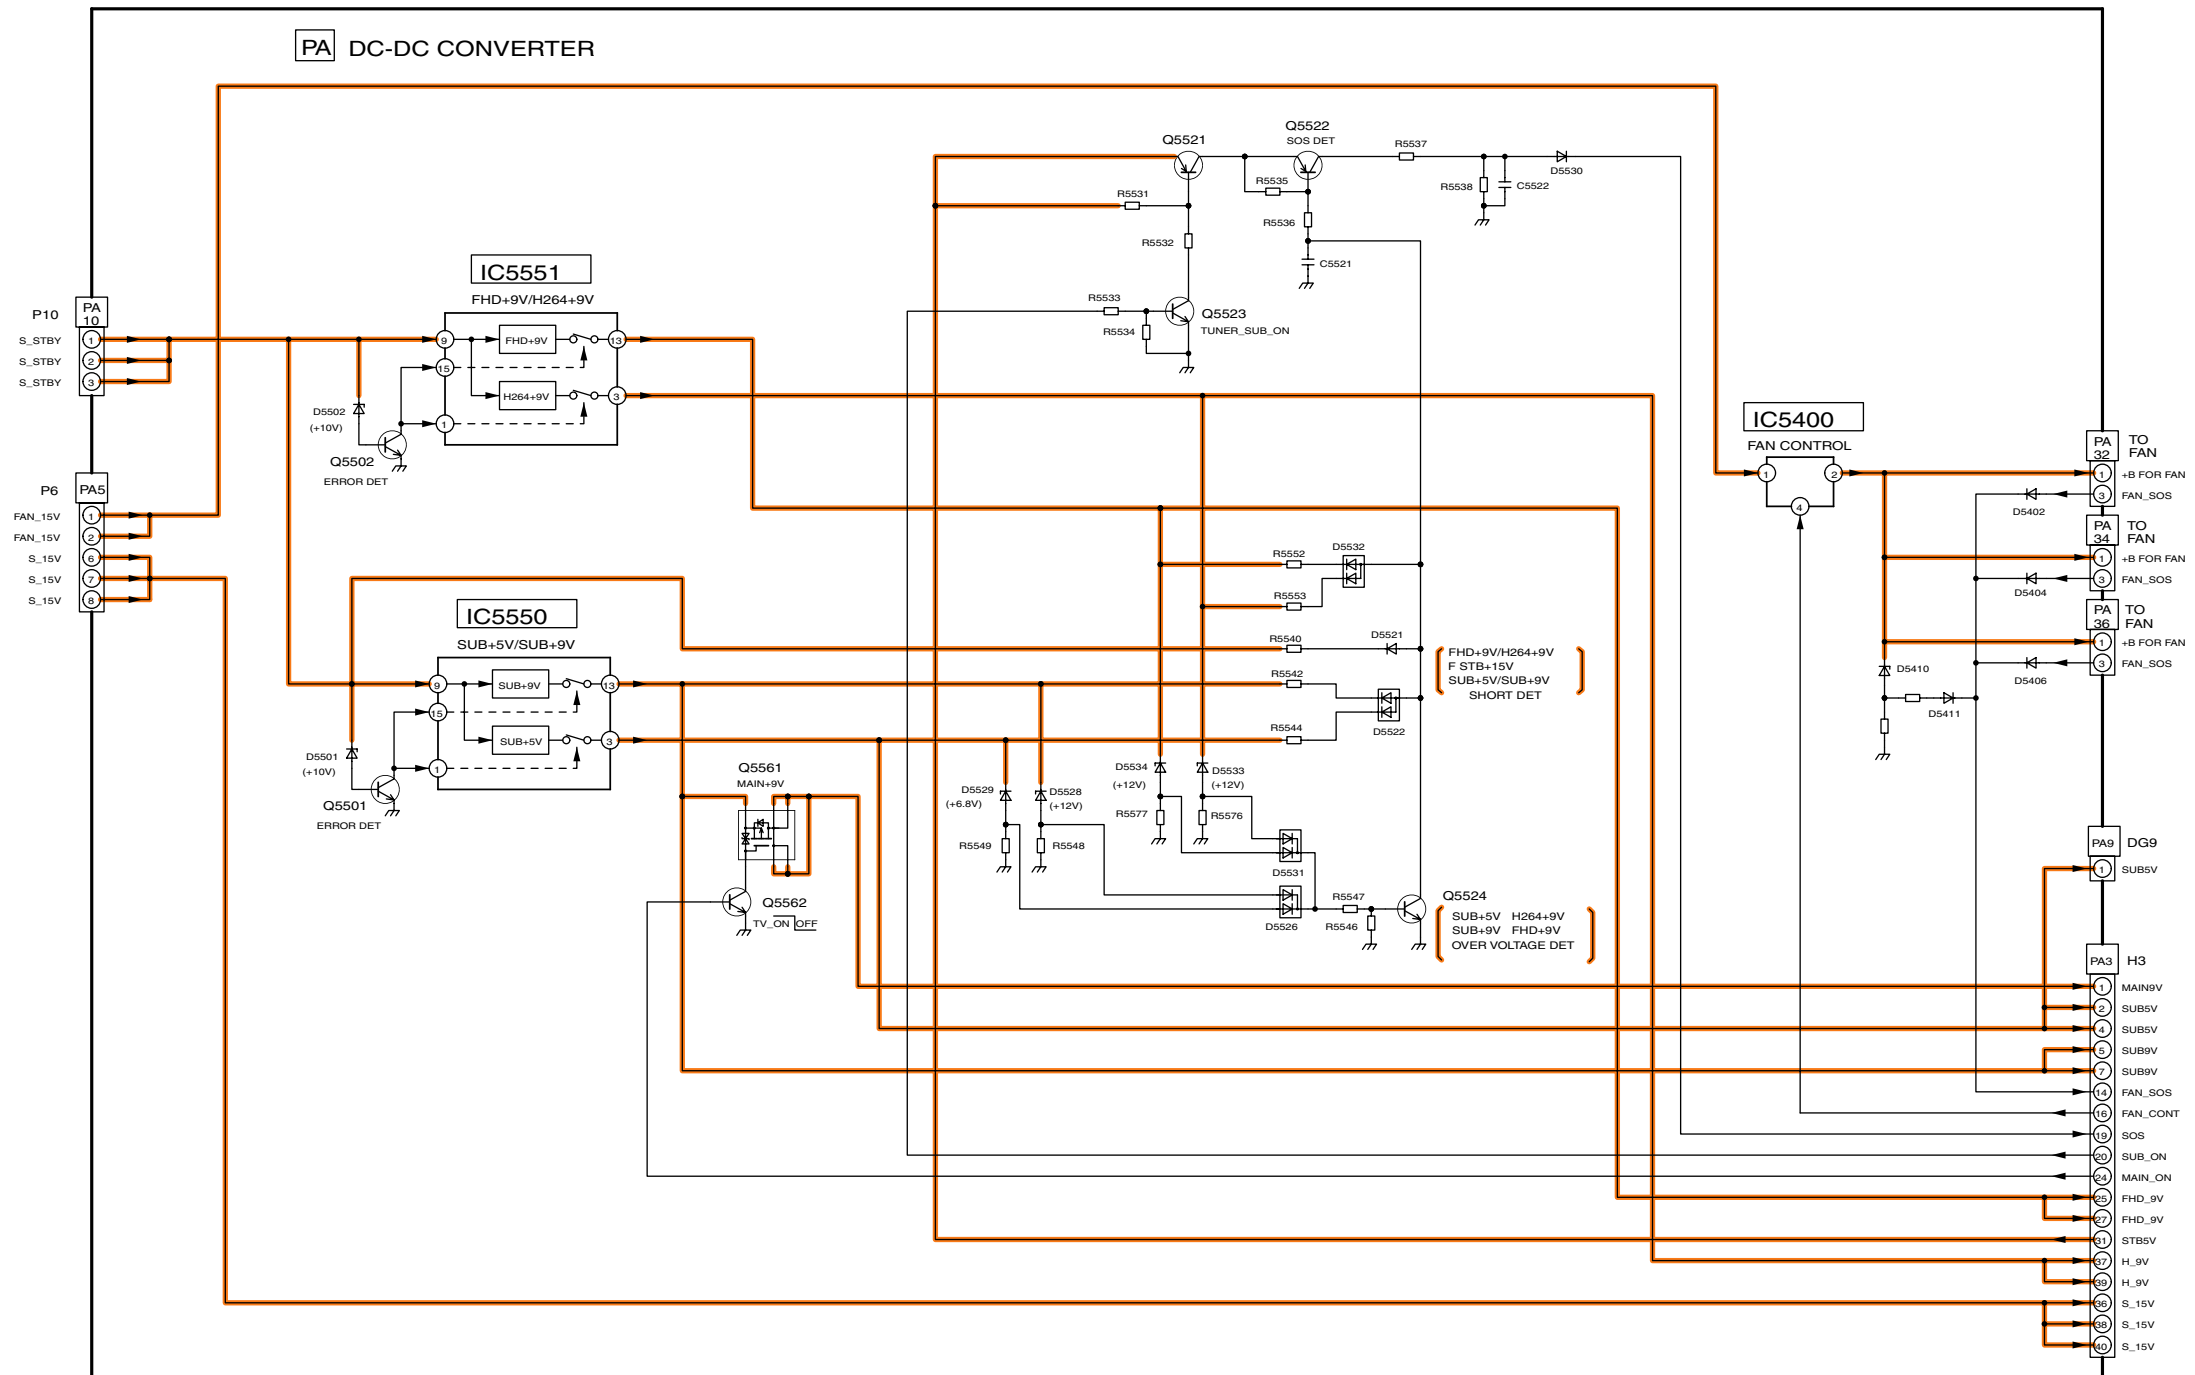

TH-58PY700AZ/M/MR, PZ700A
PA-Board Block Diagram

TH-58PY700AZ/M/MR, PZ700A
PA-Board Block Diagram


15.8. PA-Board Schematic Diagram

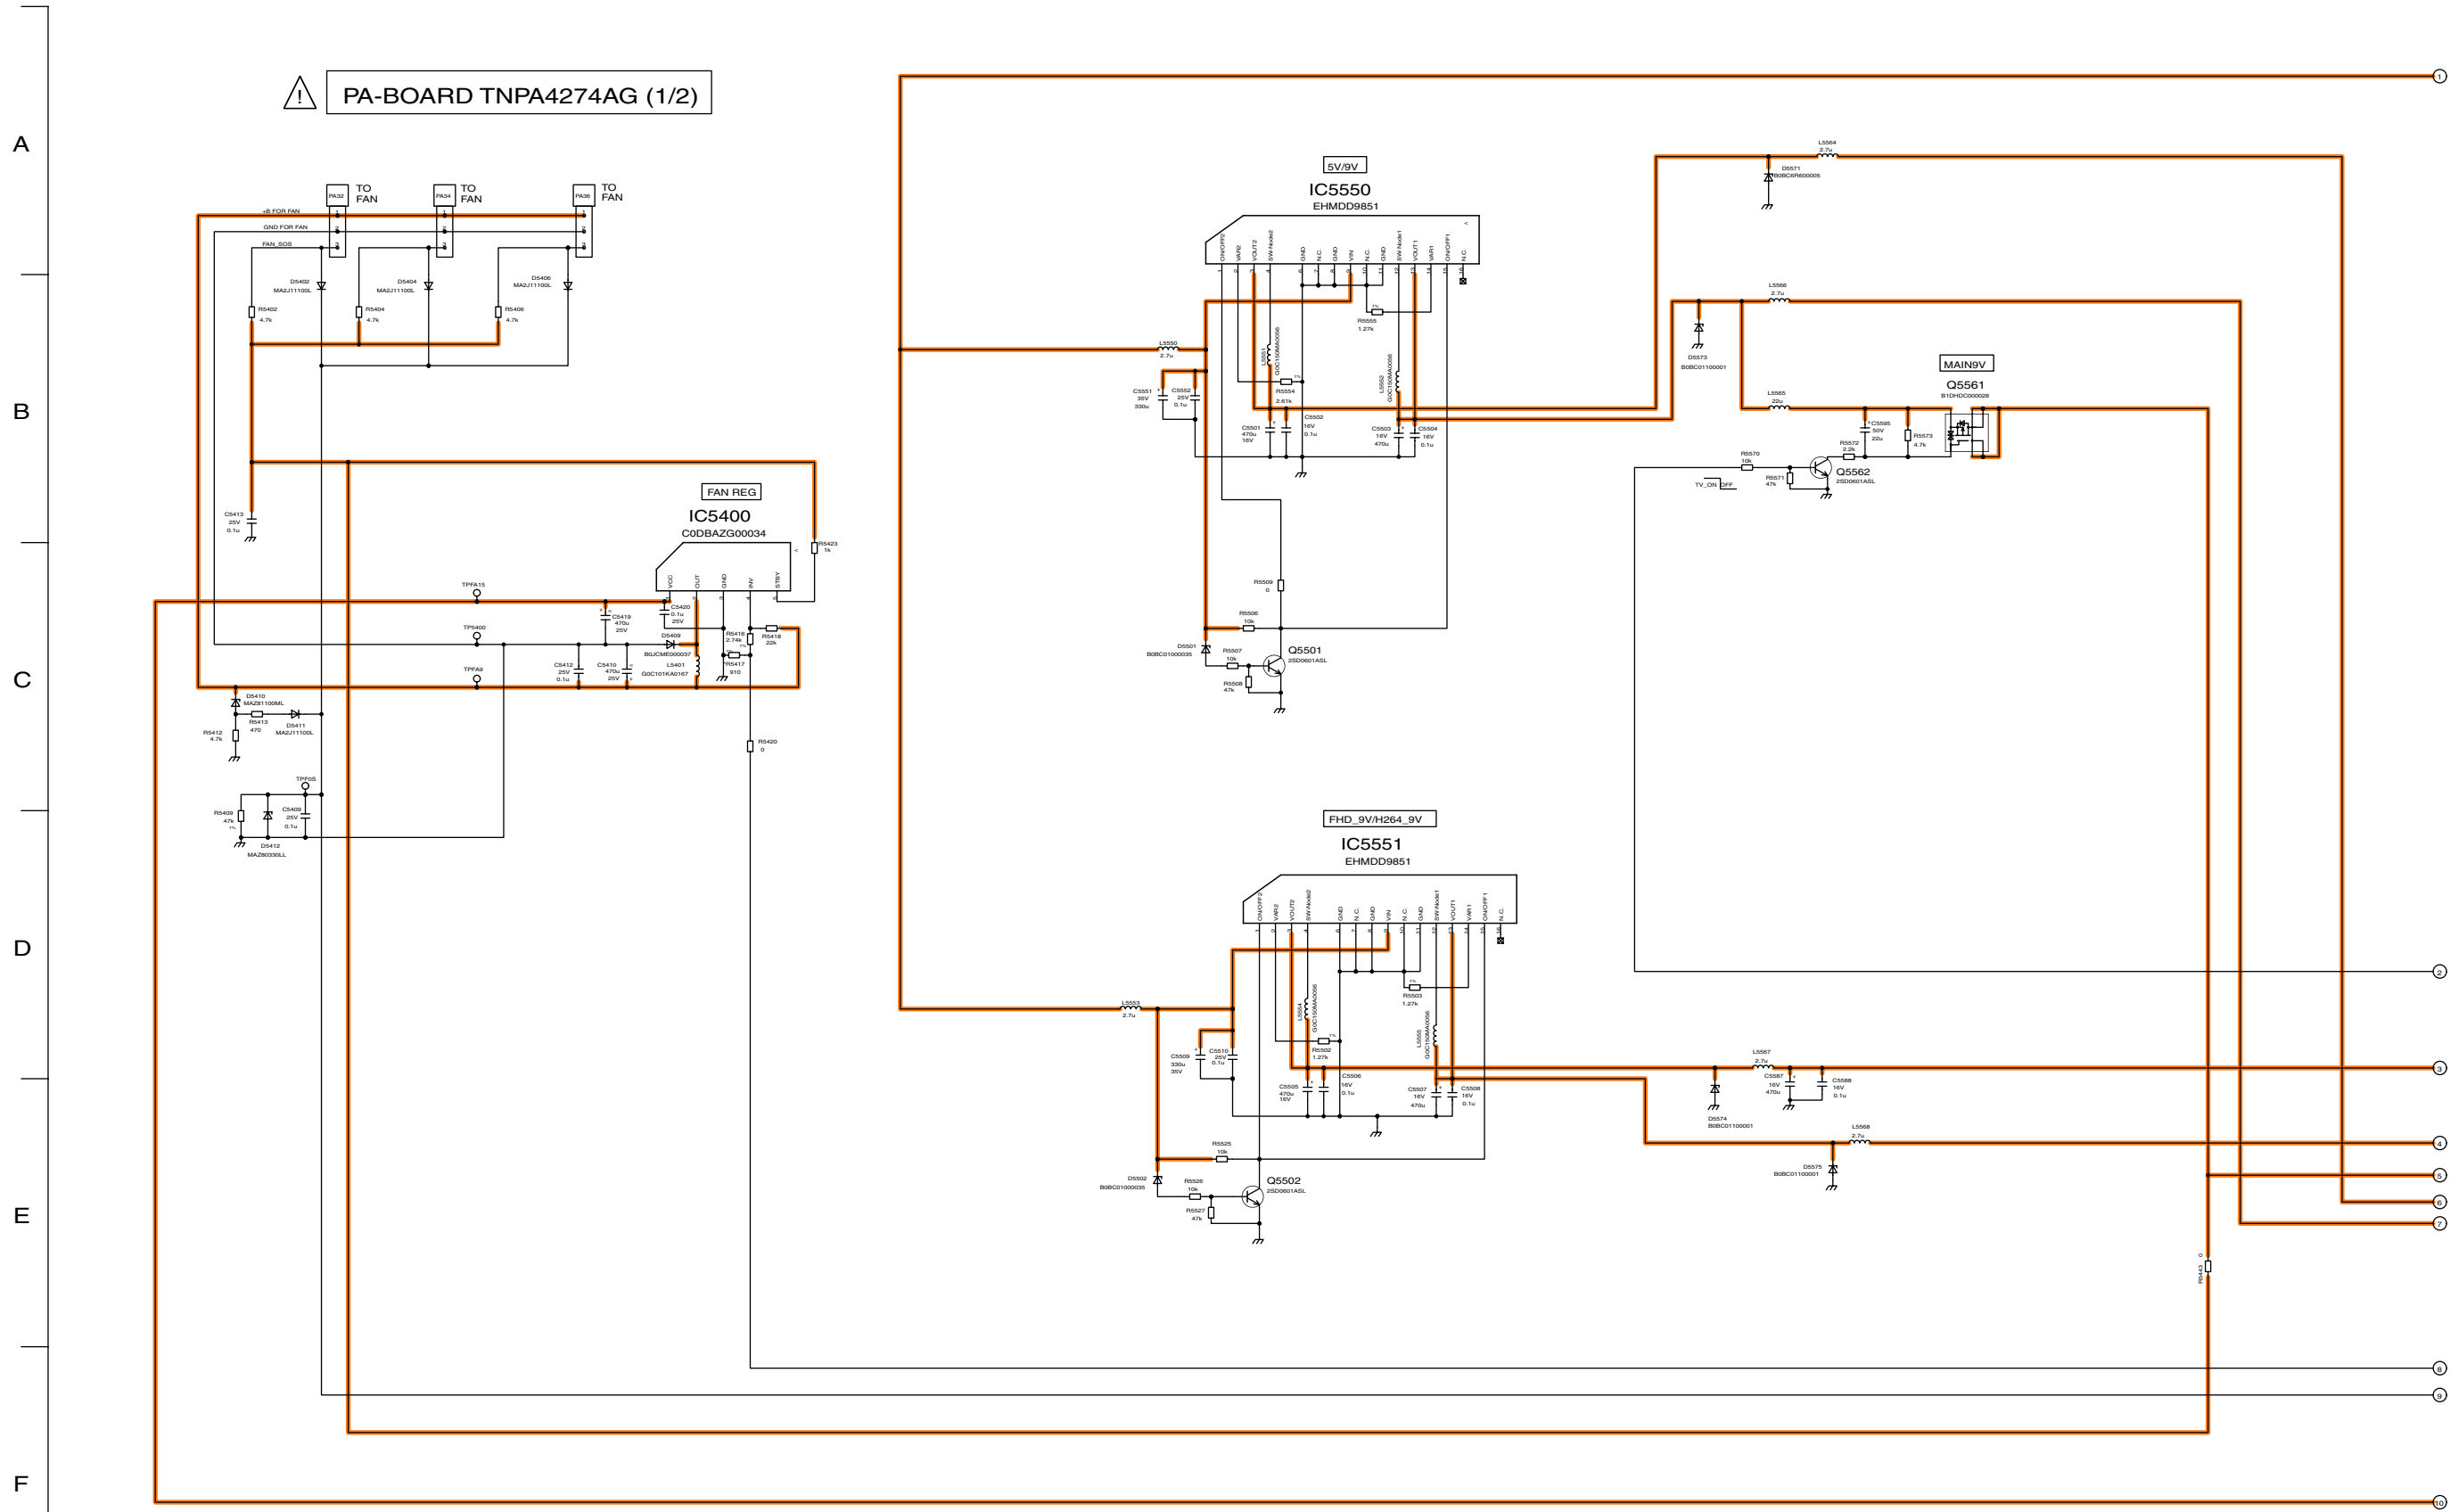

TH-58PY700AZ/M/MR, PZ700A
PA-Board (1 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
PA-Board (1 of 2) Schematic Diagram

PA-BOARD TNPA4274AG (2/2)

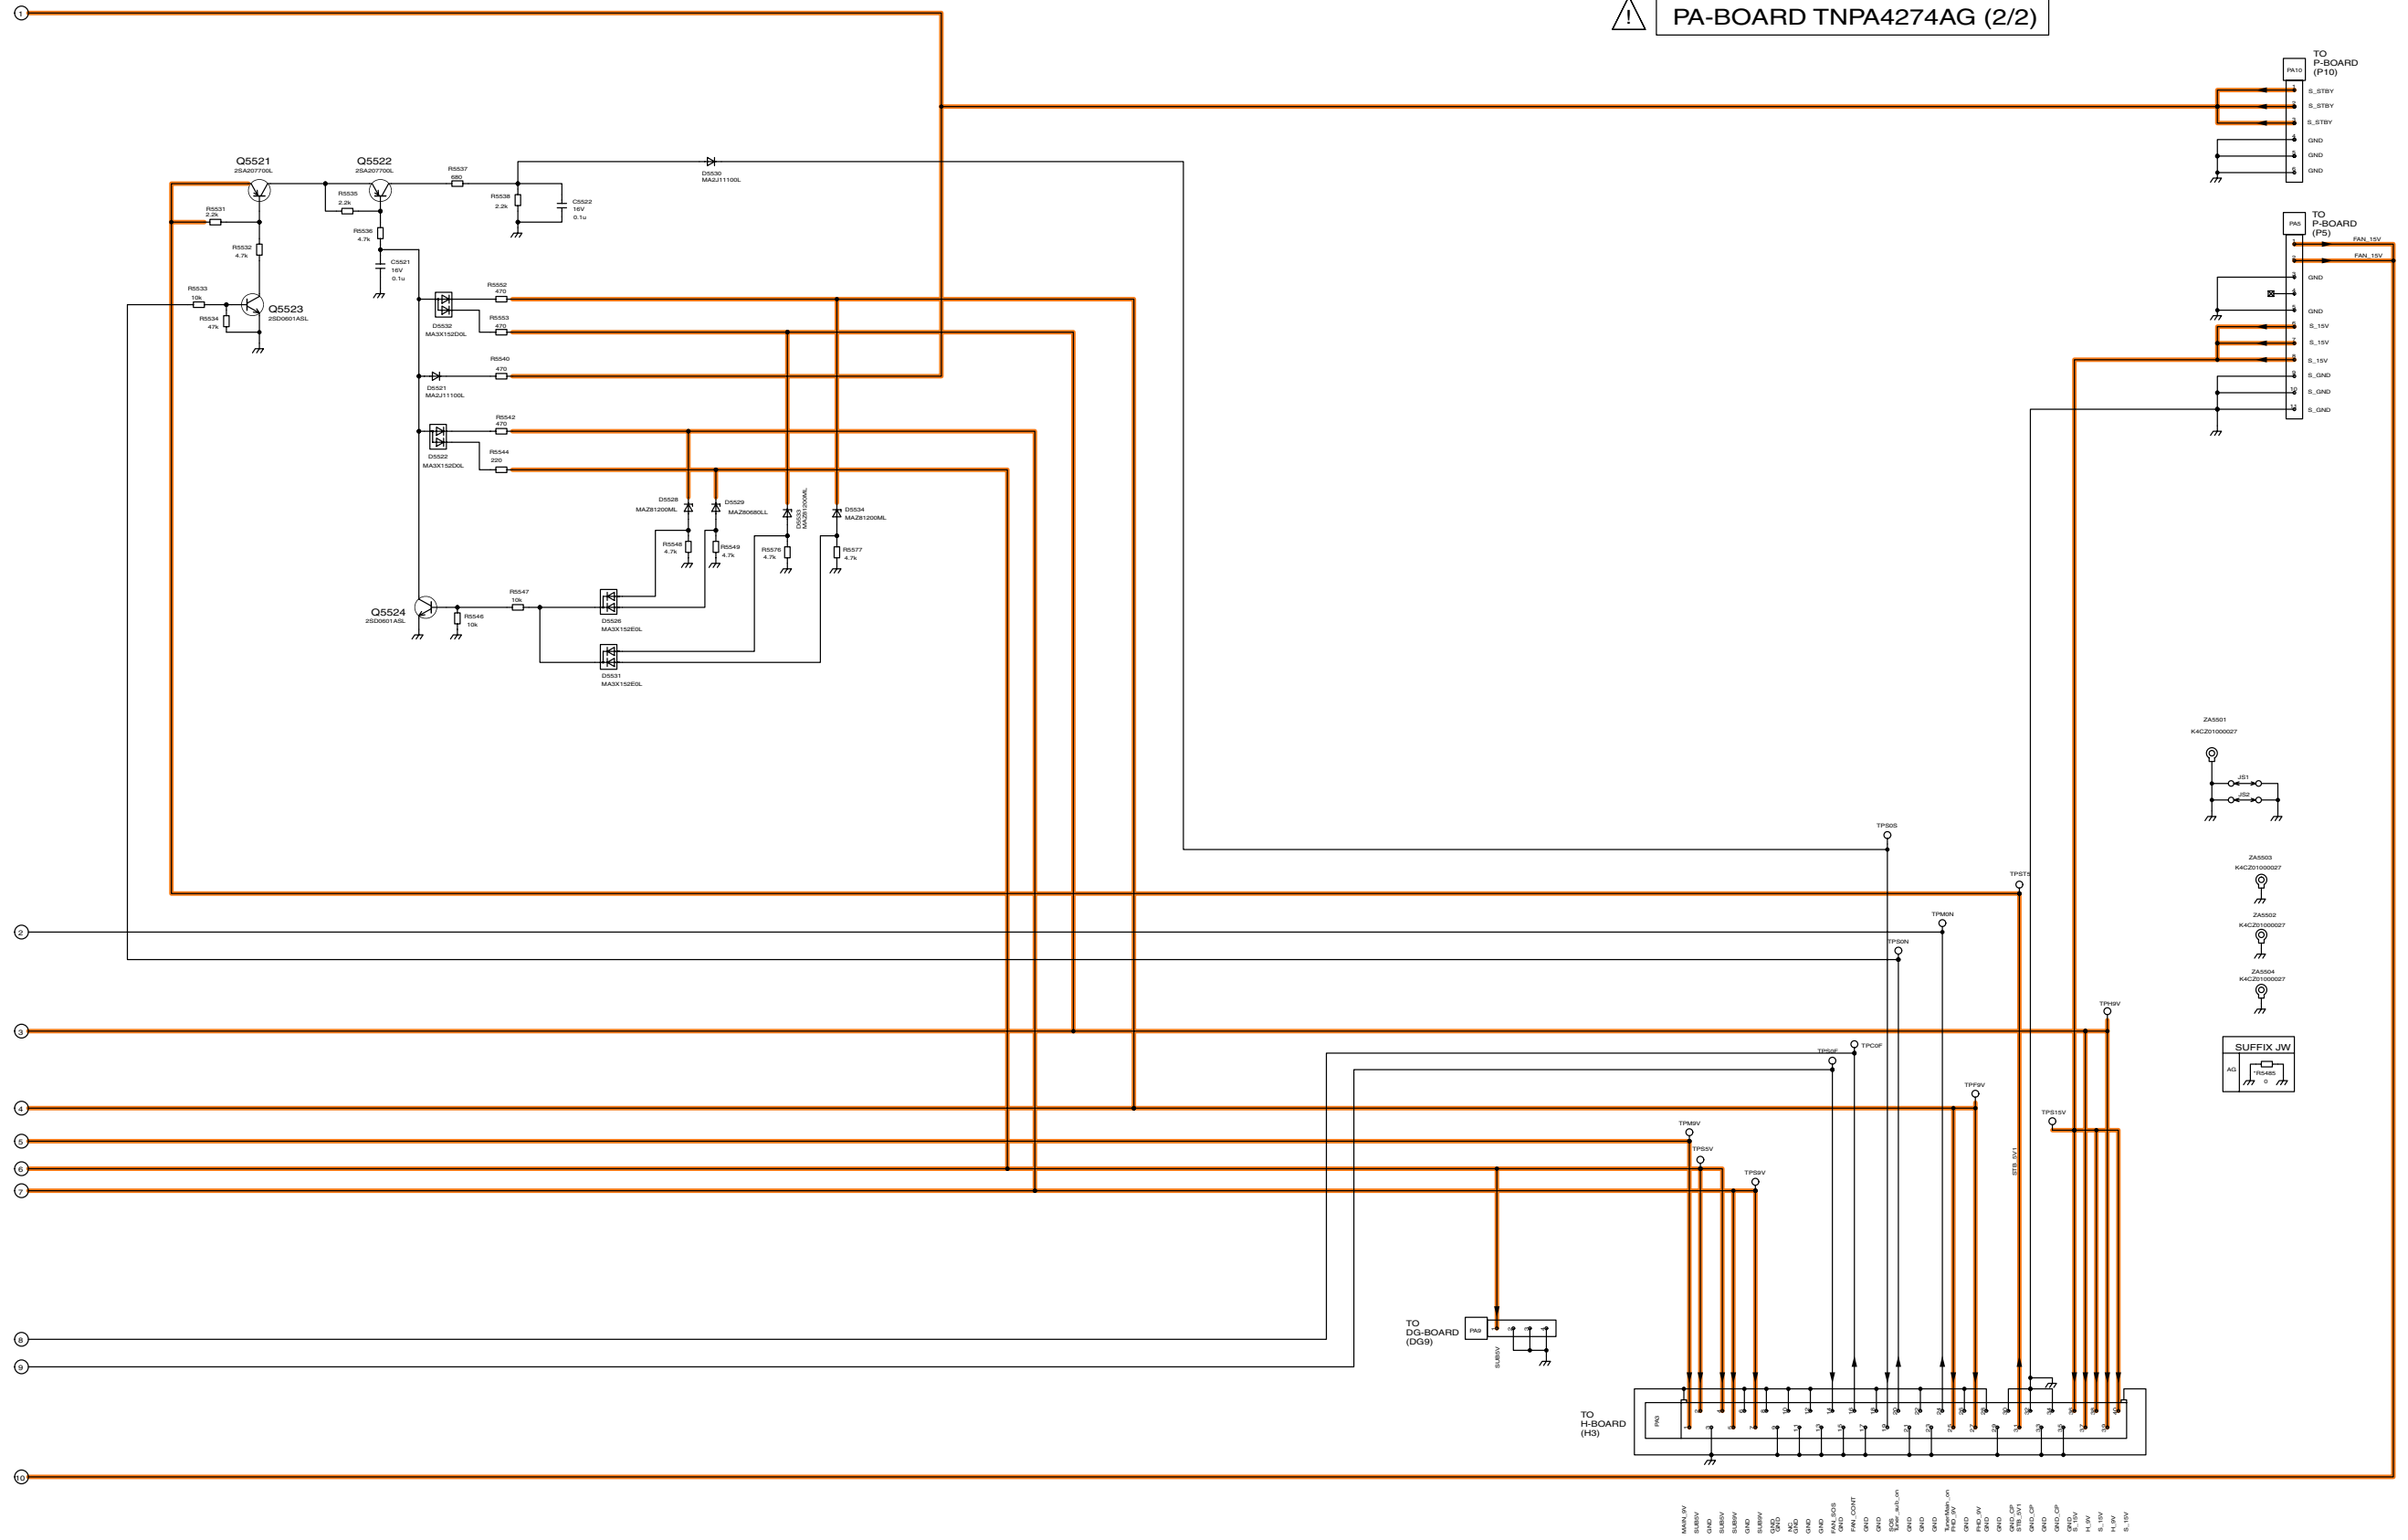

TH-58PY700AZ/M/MR, PZ700A
PA-Board (2 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
PA-Board (2 of 2) Schematic Diagram

10

11

12

13

14

15




16

17

18

15.9. G, and S-Board Schematic Diagram

A
B
C
D
E
F

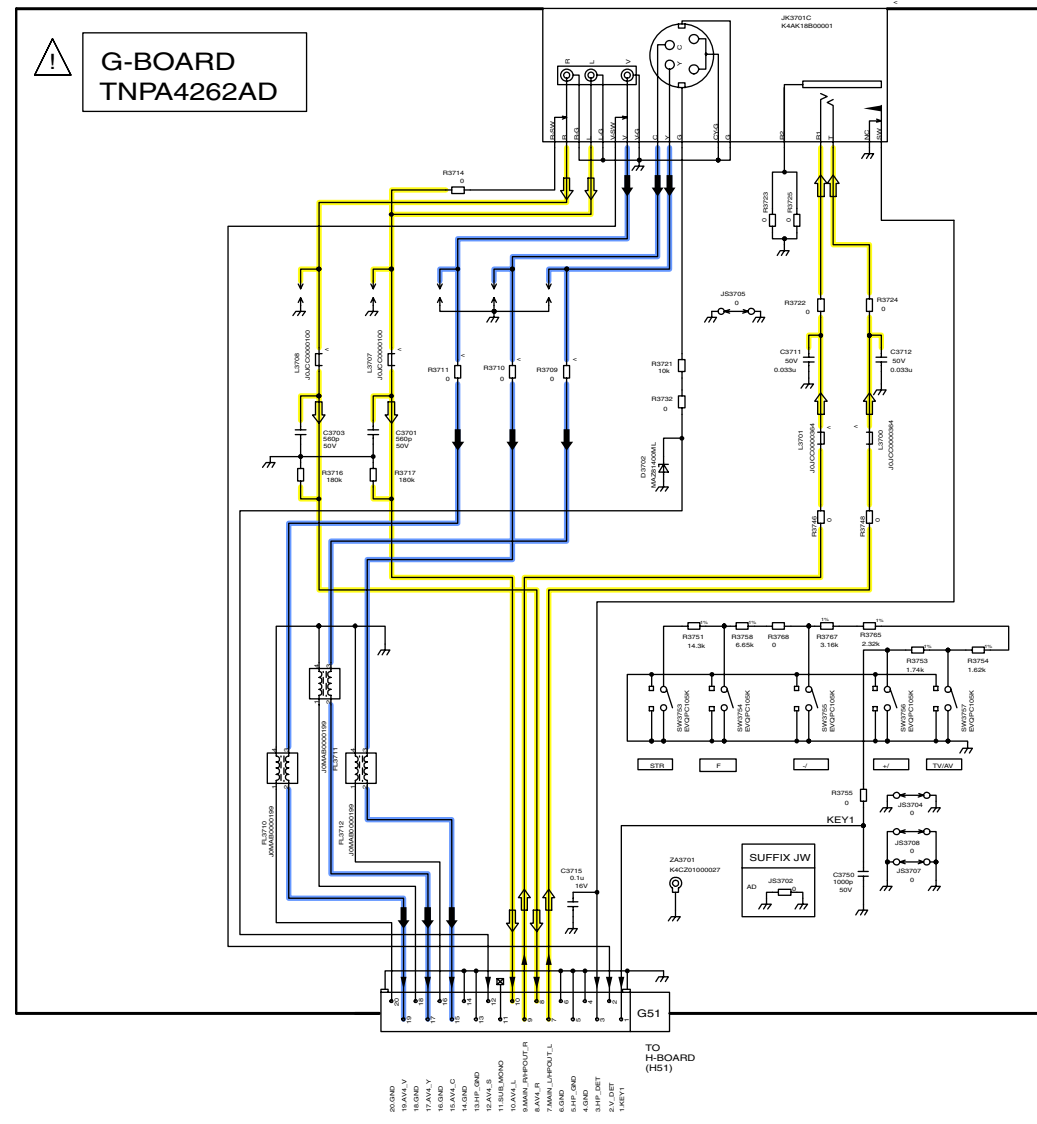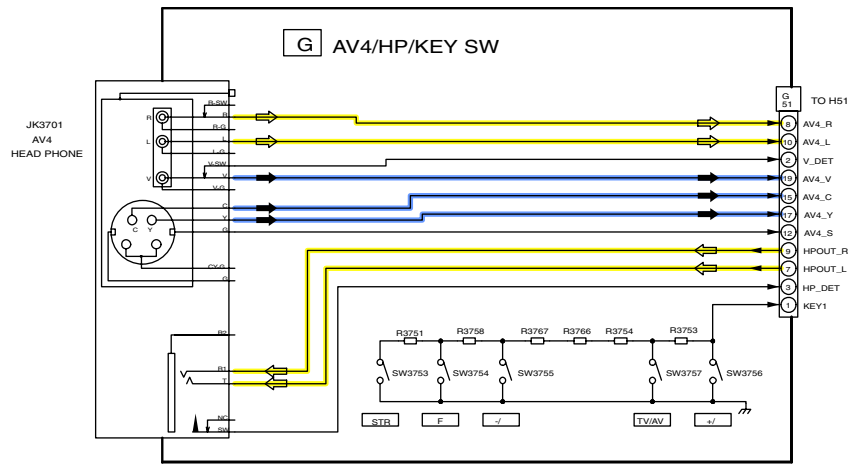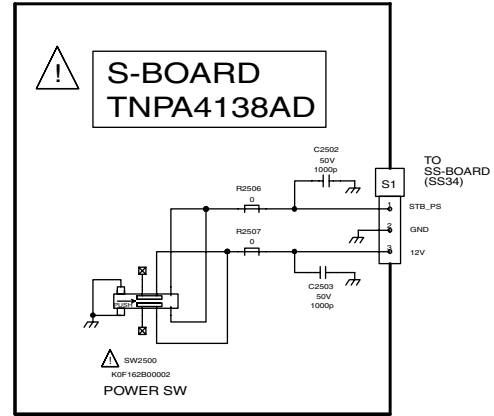

TH-58PY700AZ/M/MR, PZ700A
G and S-Board Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
G and S-Board Schematic Diagram

1

2

3

4

5


6

7


8

9

15.10. H-Board (1 of 2) Block Diagram

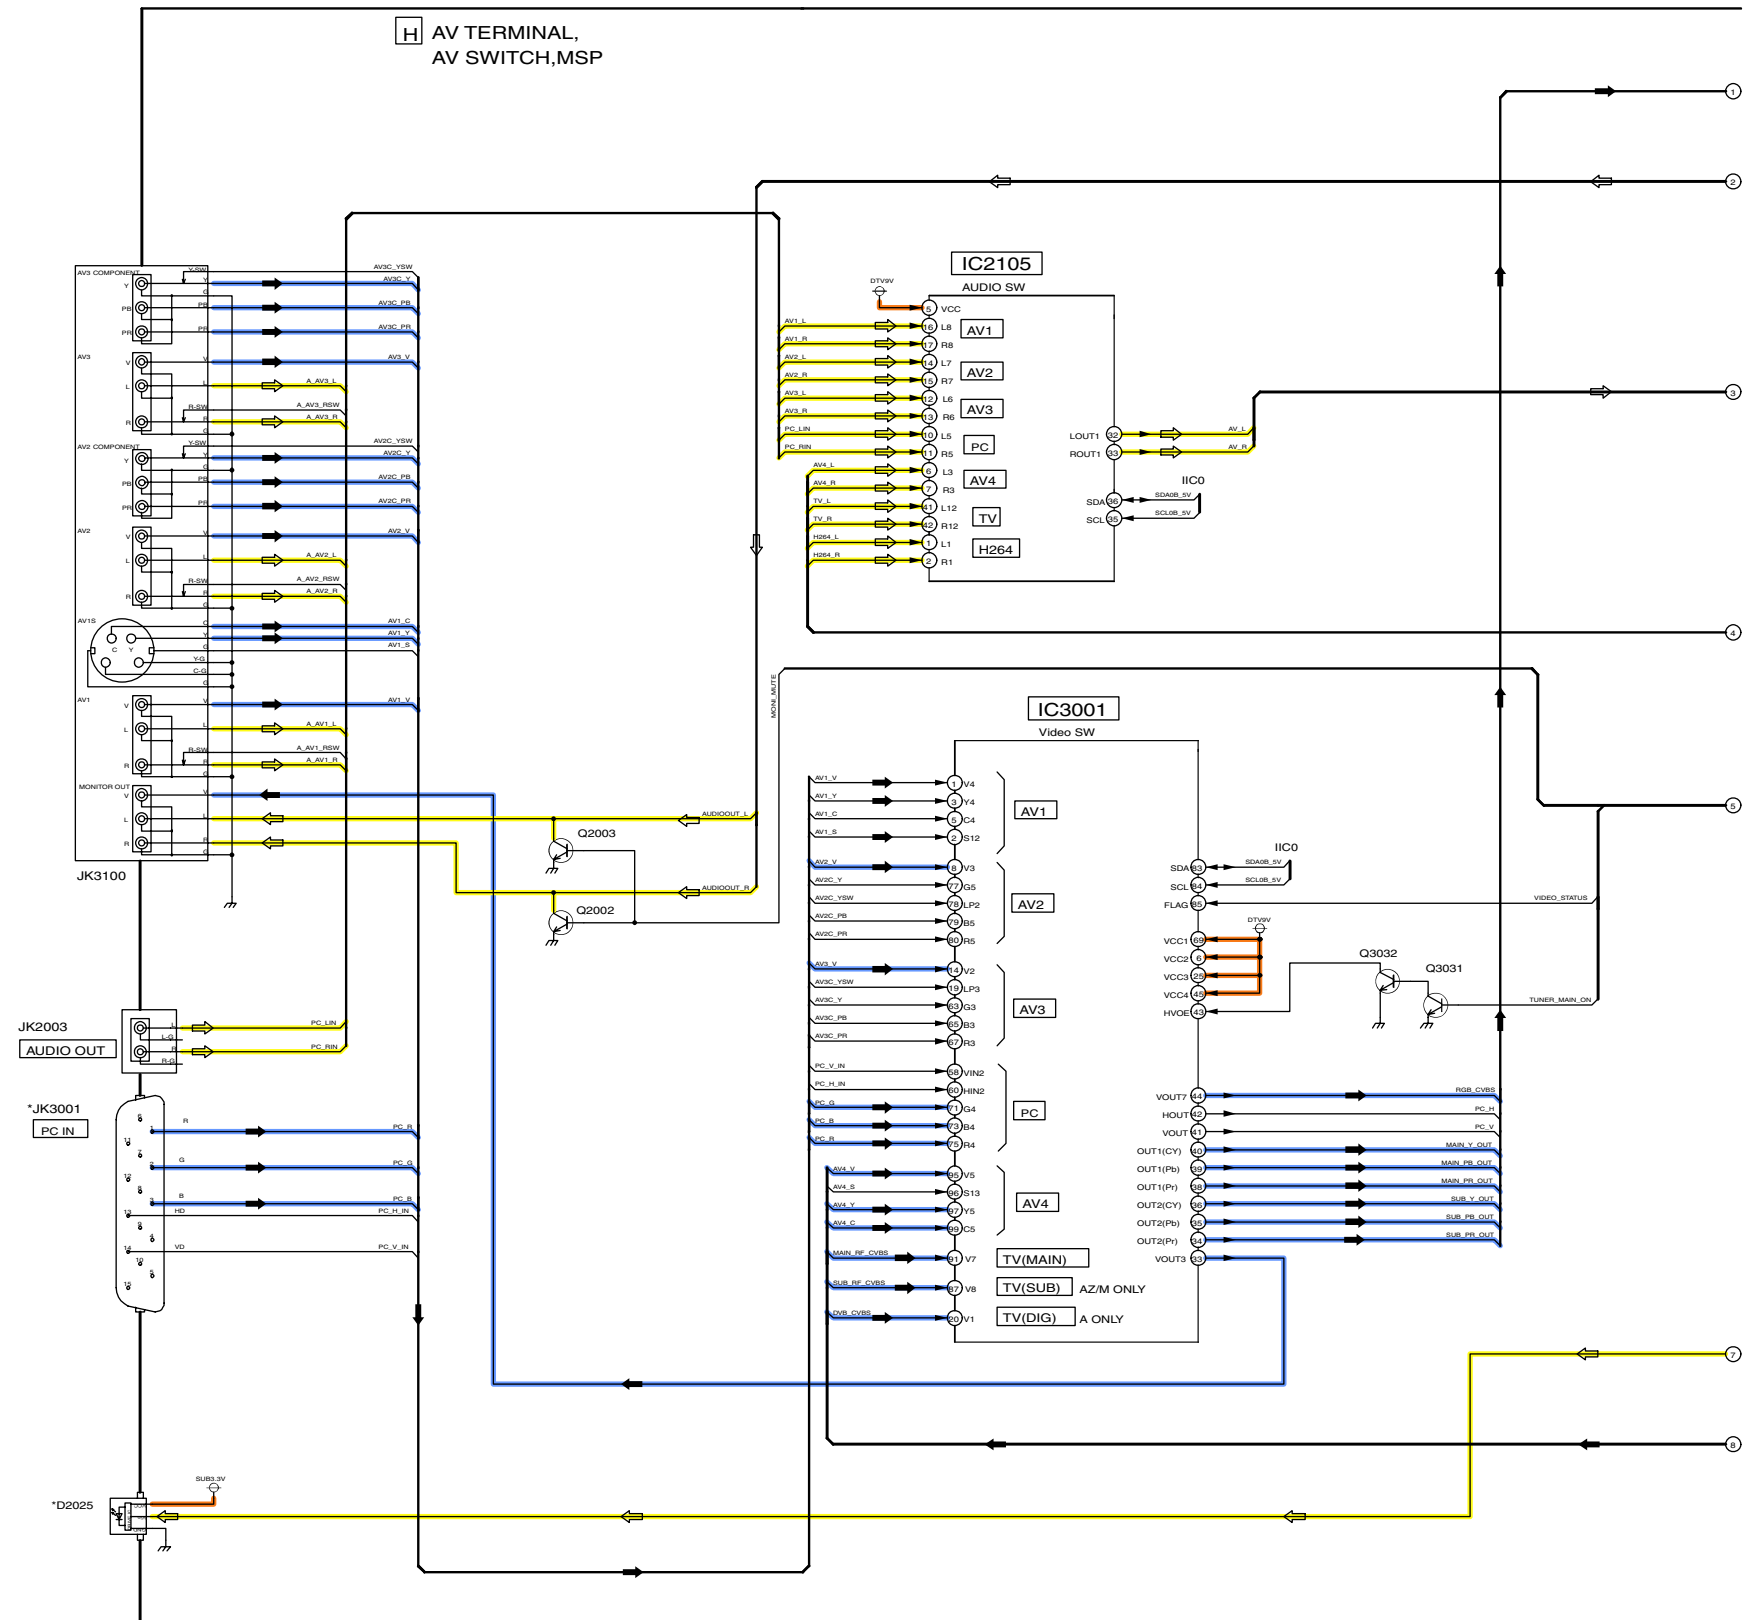

15.11. H-Board (2 of 2) Block Diagram

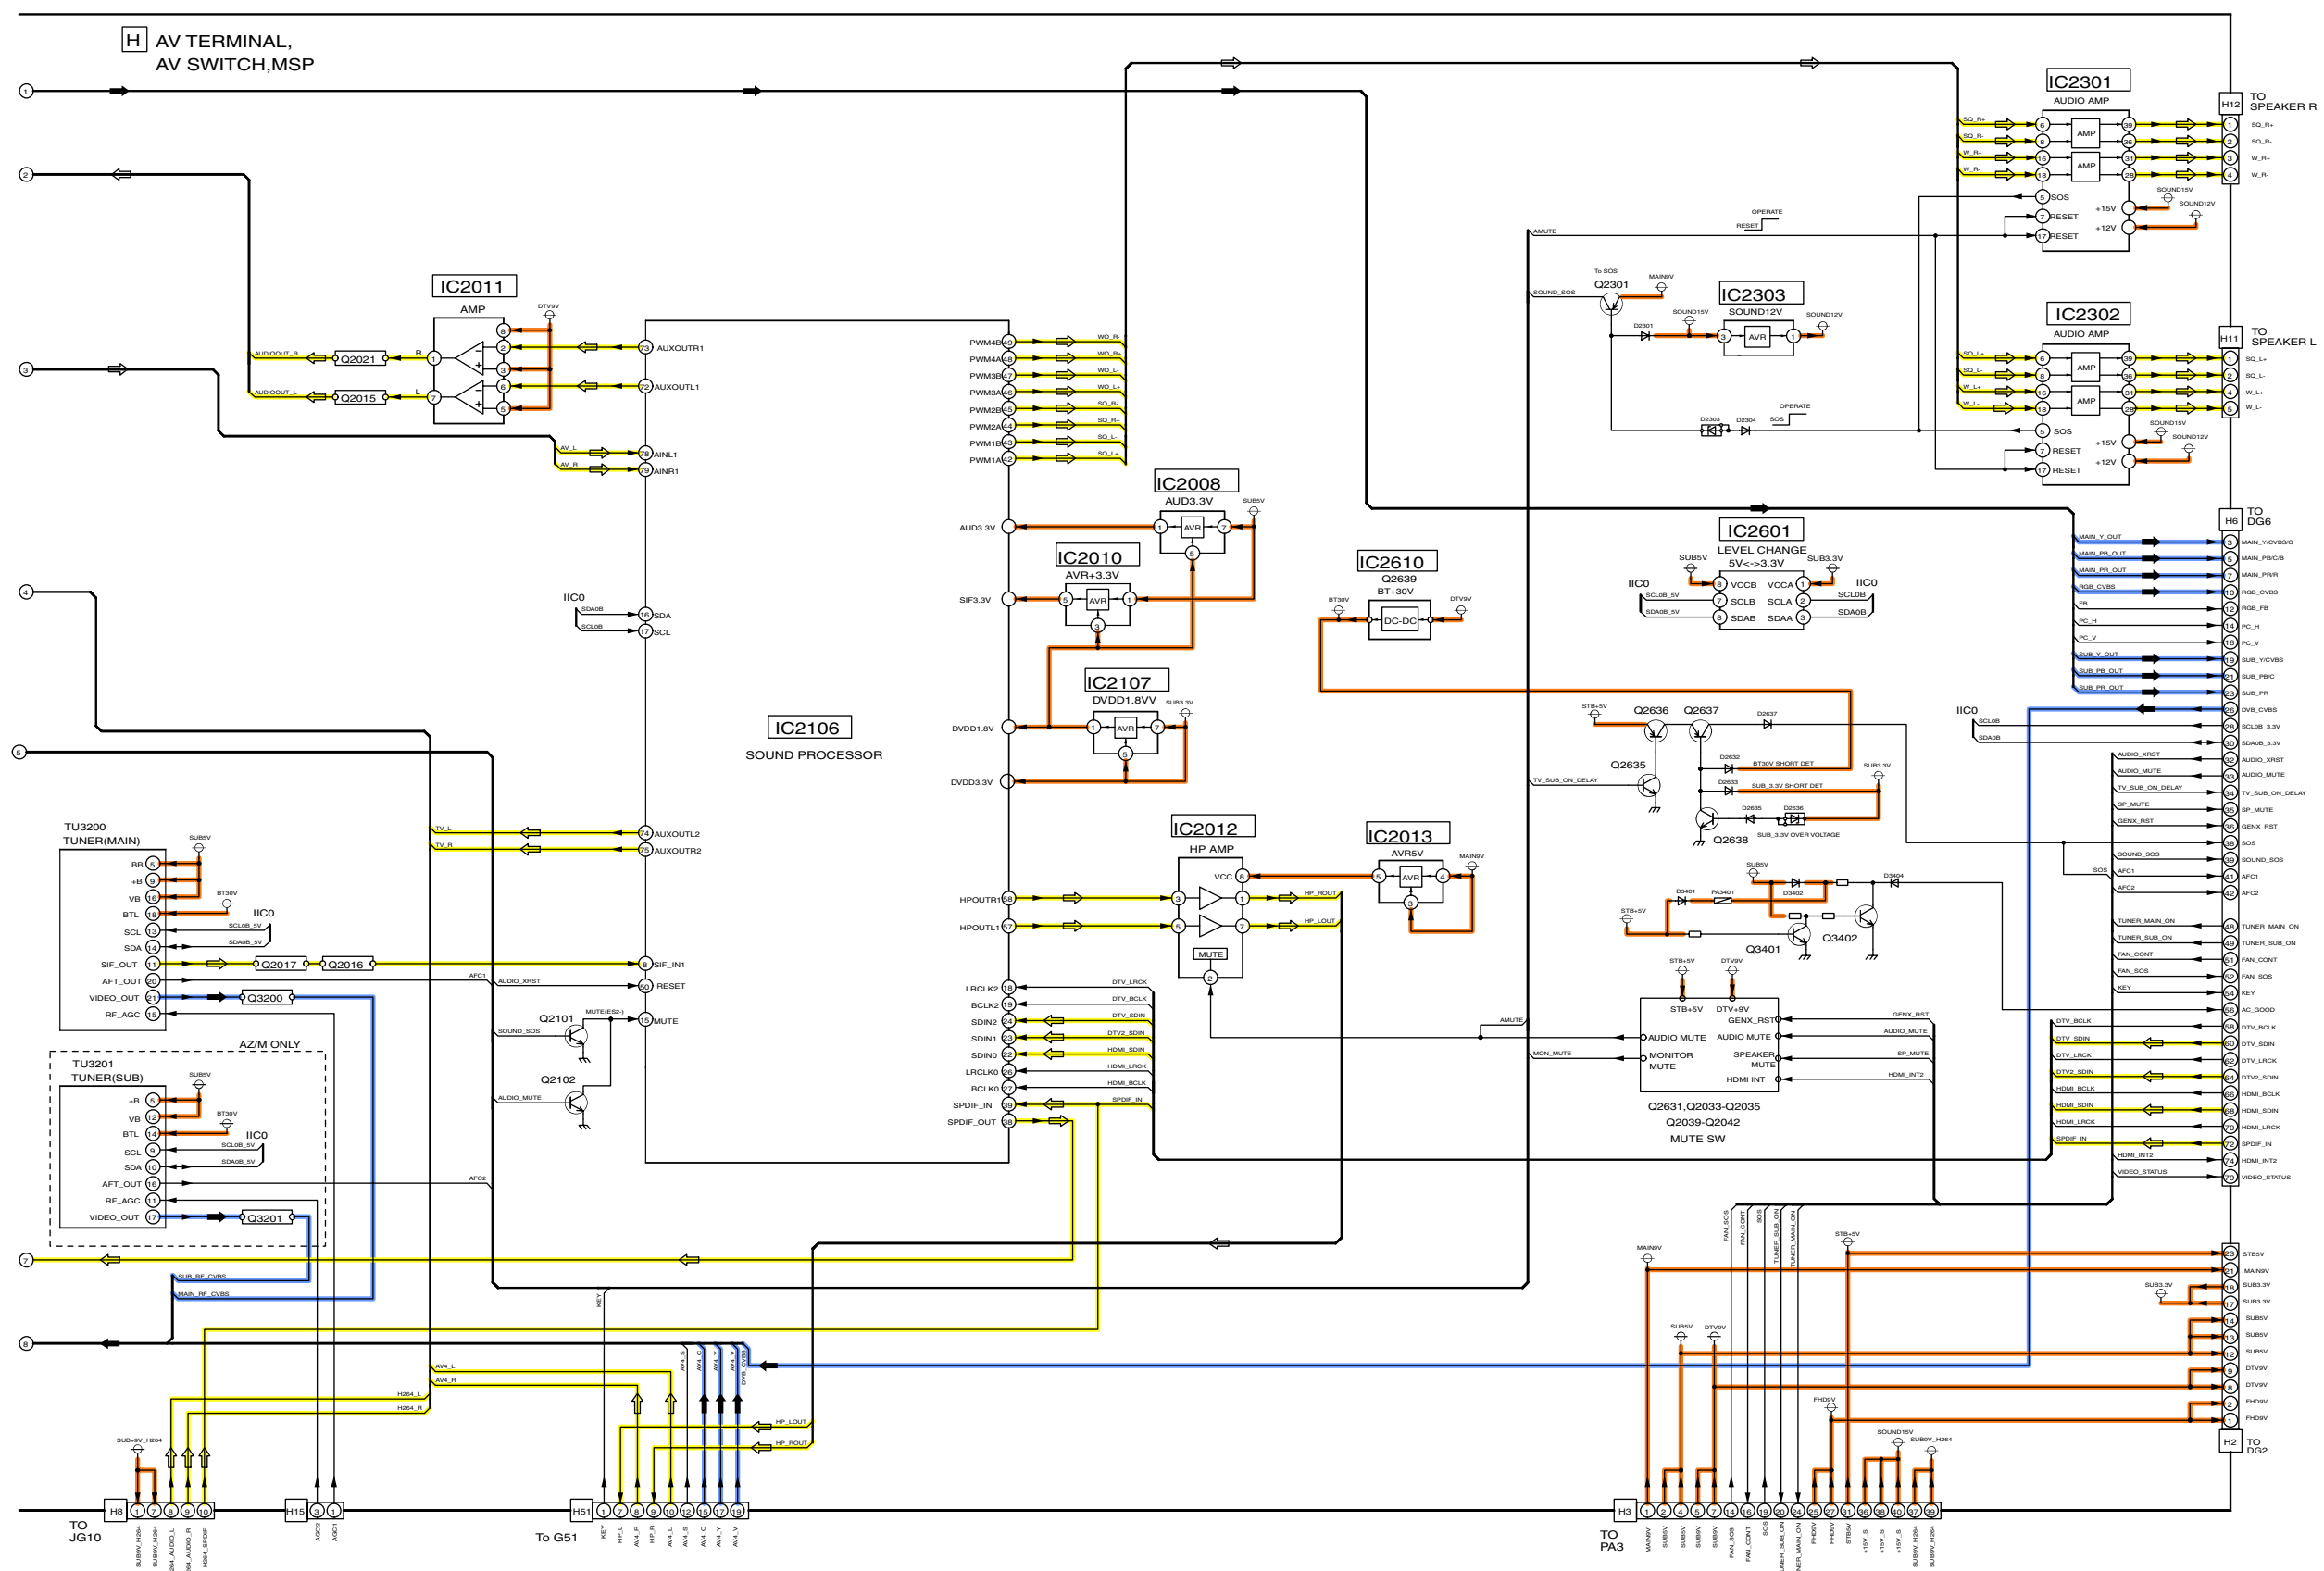


TH-58PY700AZ/M/MR, PZ700A
H-Board (2 of 2) Block Diagram

TH-58PY700AZ/M/MR, PZ700A
H-Board (2 of 2) Block Diagram

15.12. H-Board (1 of 5) Schematic Diagram

A
B
C
D
E
F

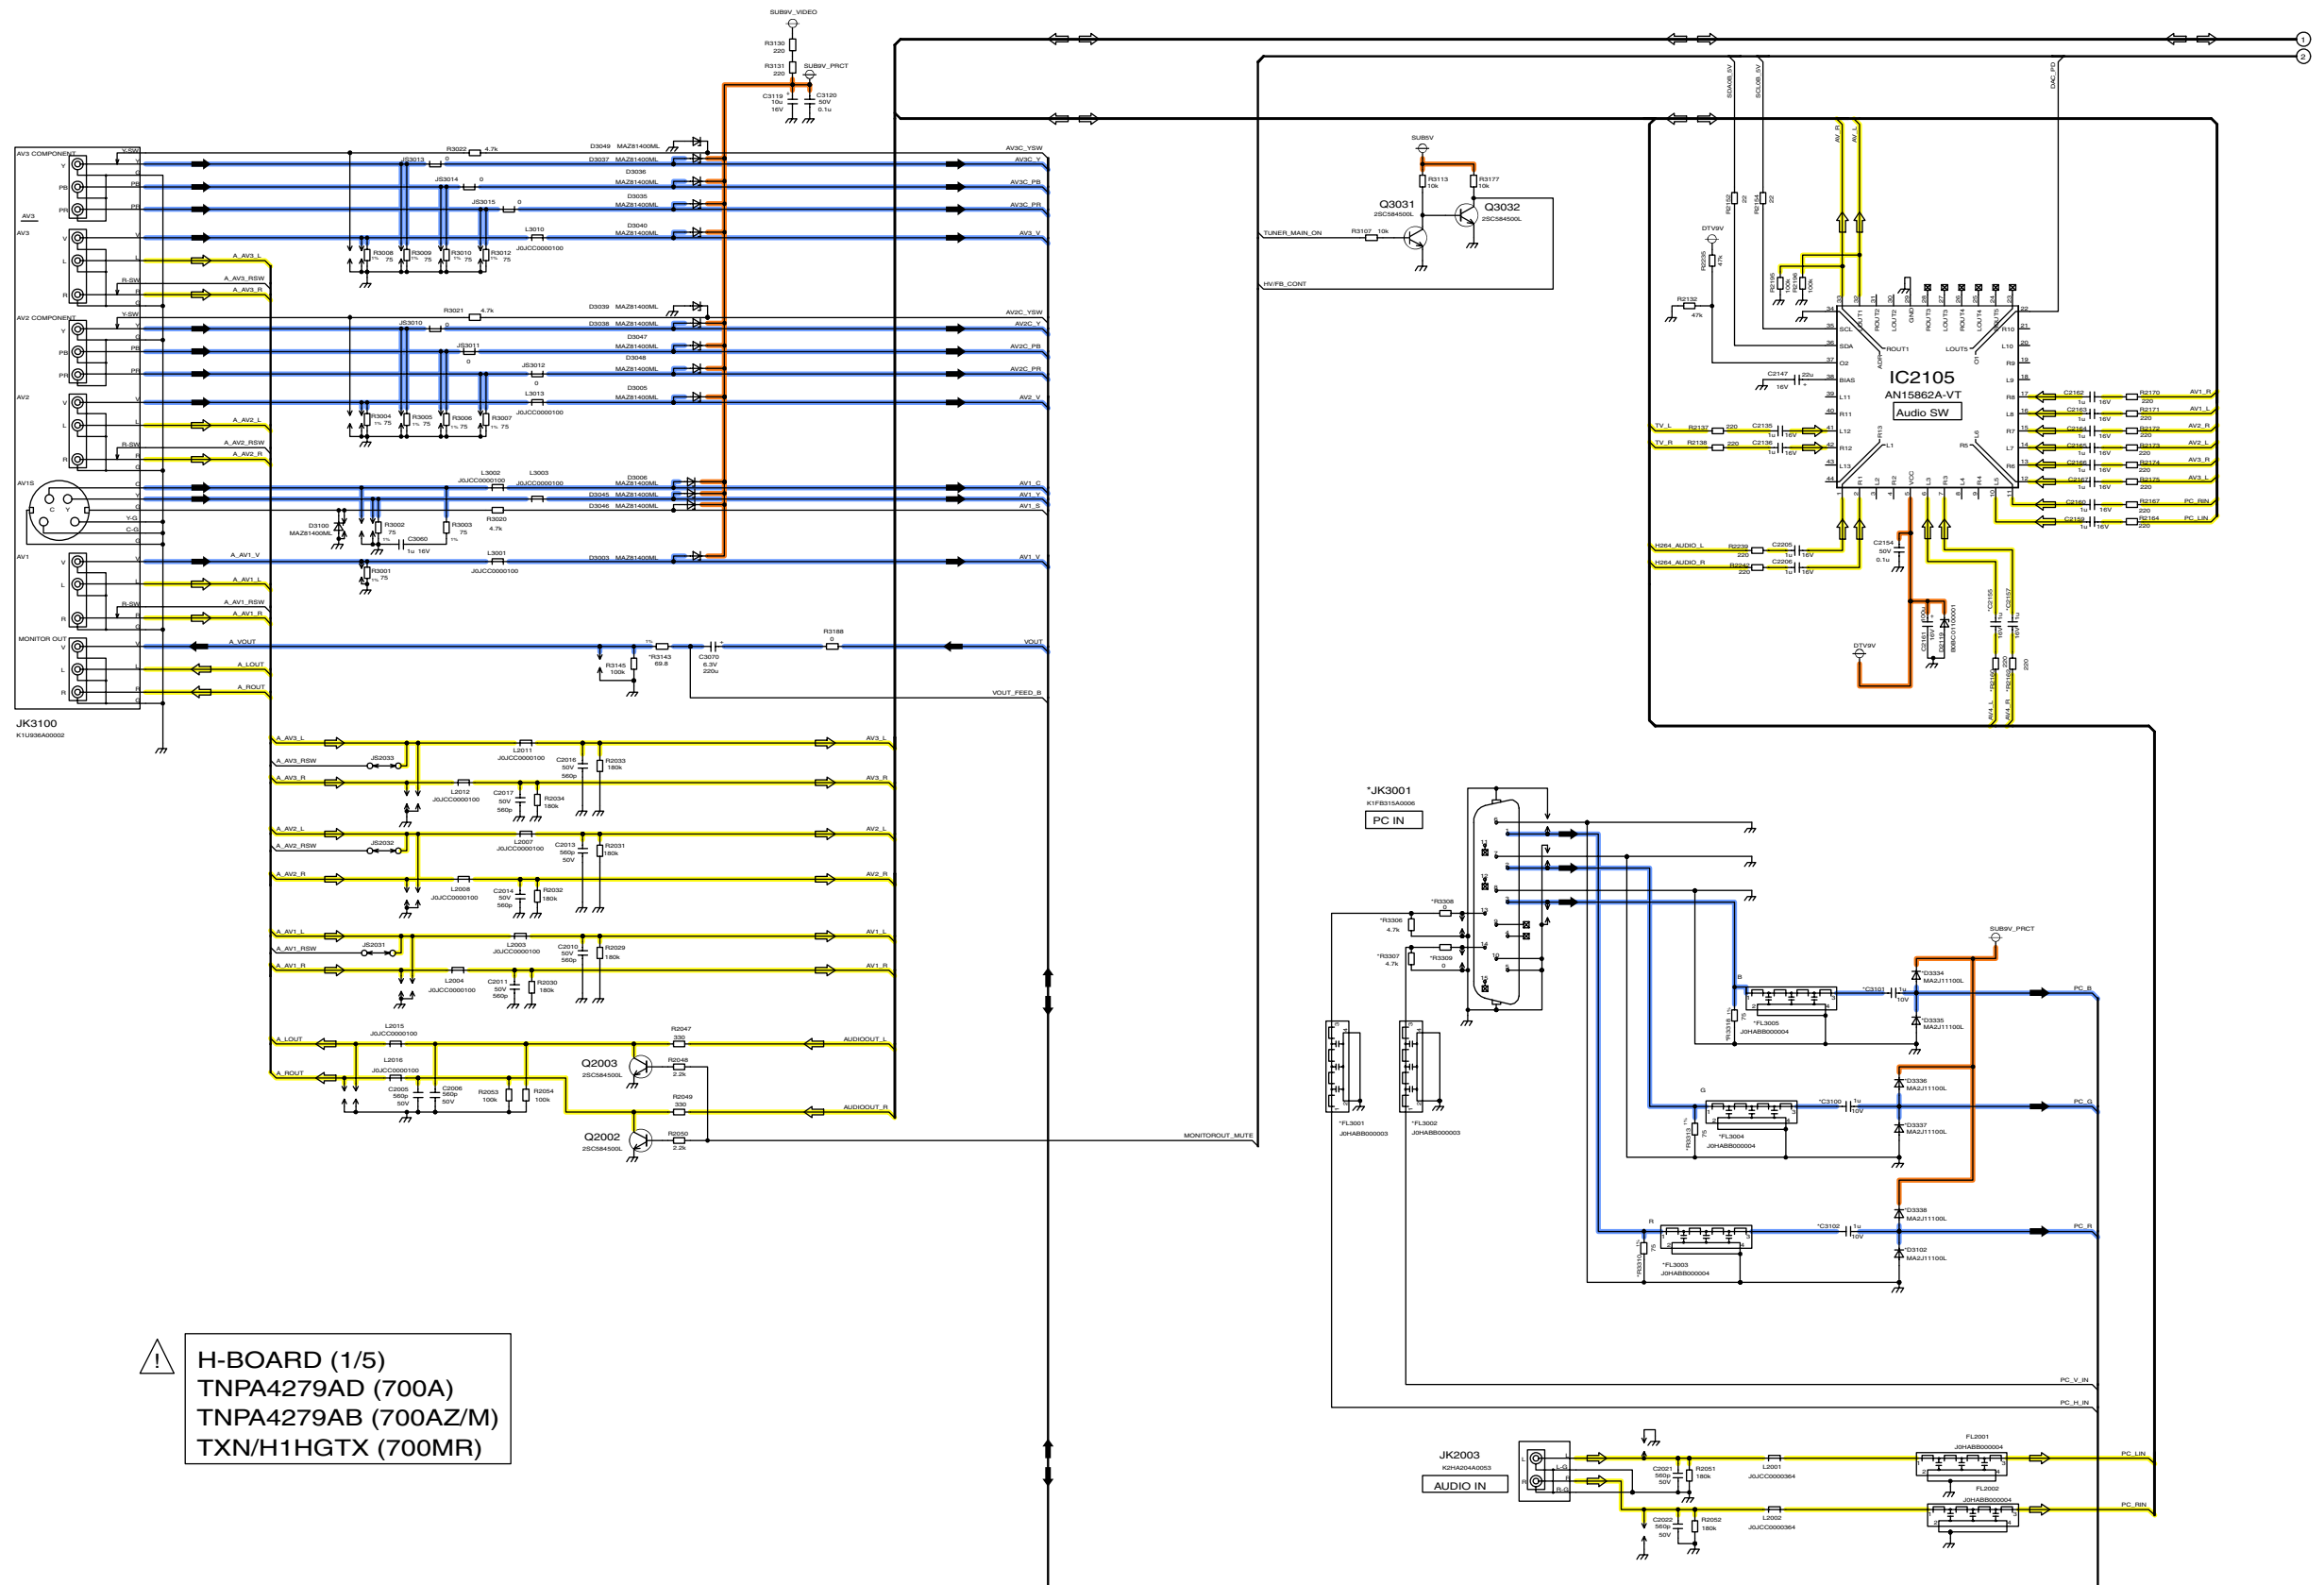


⚠ H-BOARD (1/5)
TNPA4279AD (700A)
TNPA4279AB (700AZ/M)
TXN/H1HGTX (700MR)

TH-58PY700AZ/H/M/MR, PZ700A
H-Board (1 of 5) Schematic Diagram

TH-58PY700AZ/H/M/MR, PZ700A
H-Board (1 of 5) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.13. H-Board (2 of 5) Schematic Diagram

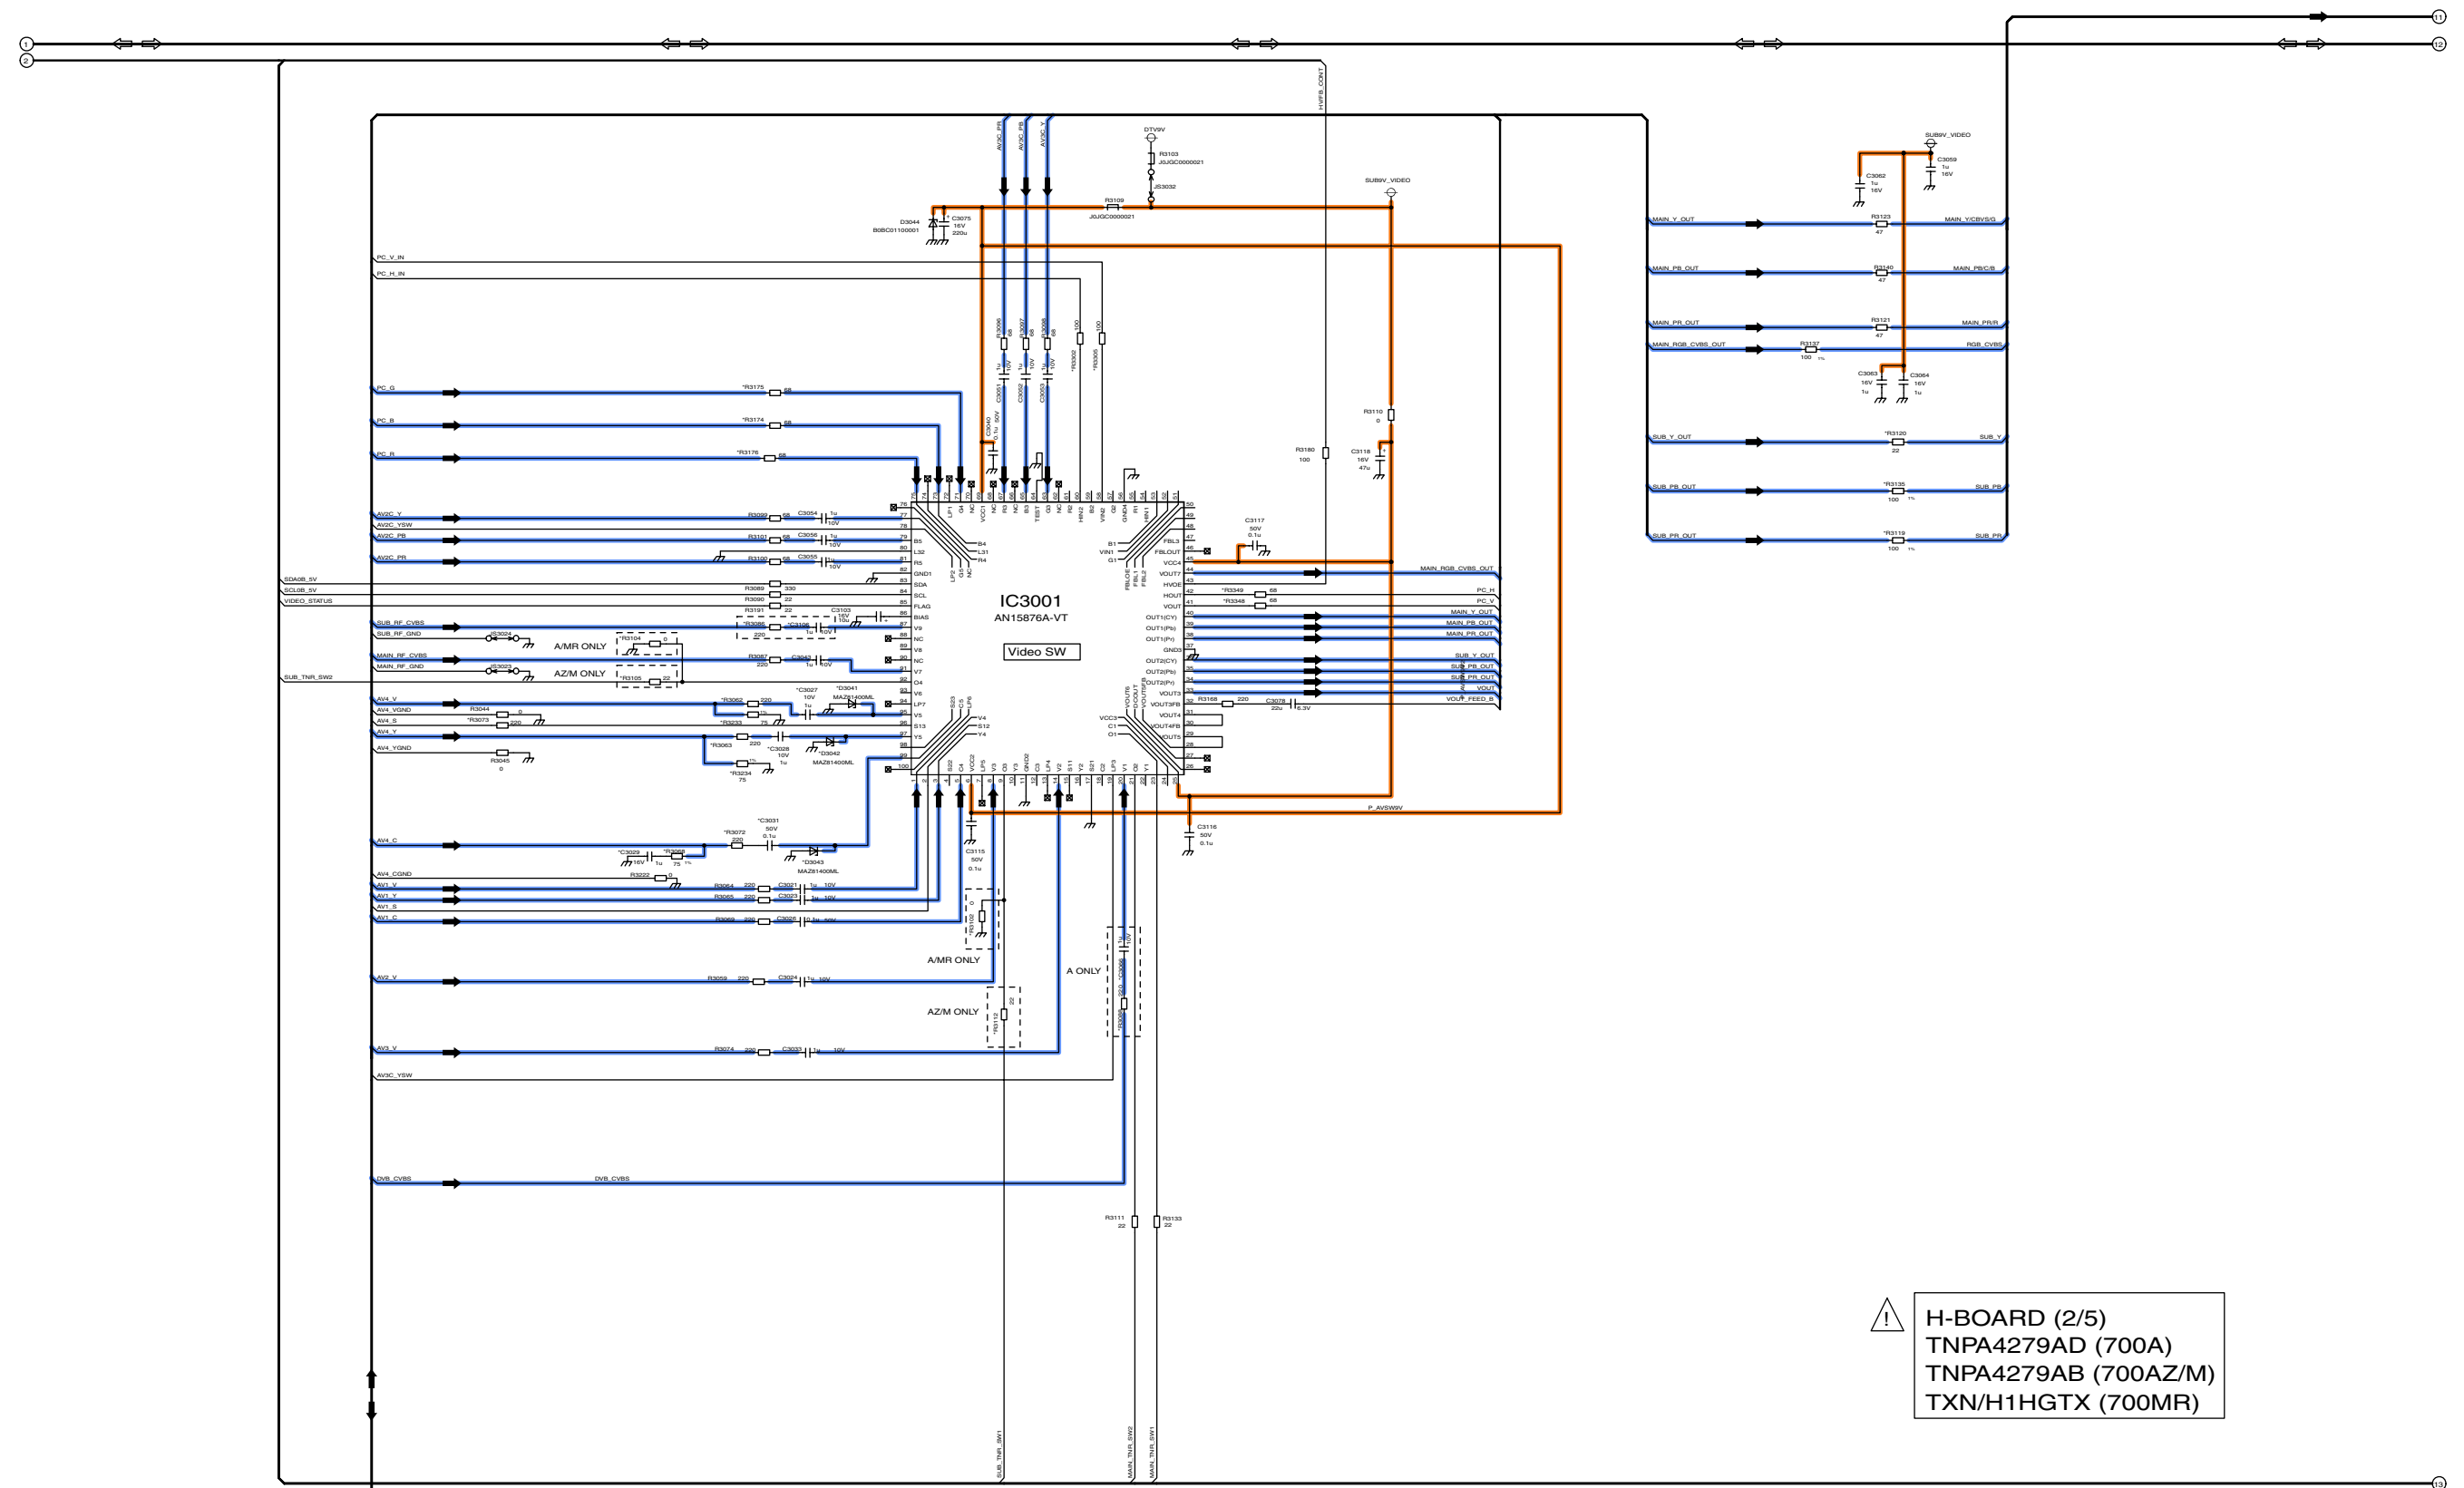


! H-BOARD (2/5)
 TNPA4279AD (700A)
 TNPA4279AB (700AZ/M)
 TXN/H1HGTX (700MR)

TH-58PY700AZ/M/MR, PZ700A
 H-Board (2 of 5) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
 H-Board (2 of 5) Schematic Diagram

15.14. H-Board (3 of 5) Schematic Diagram

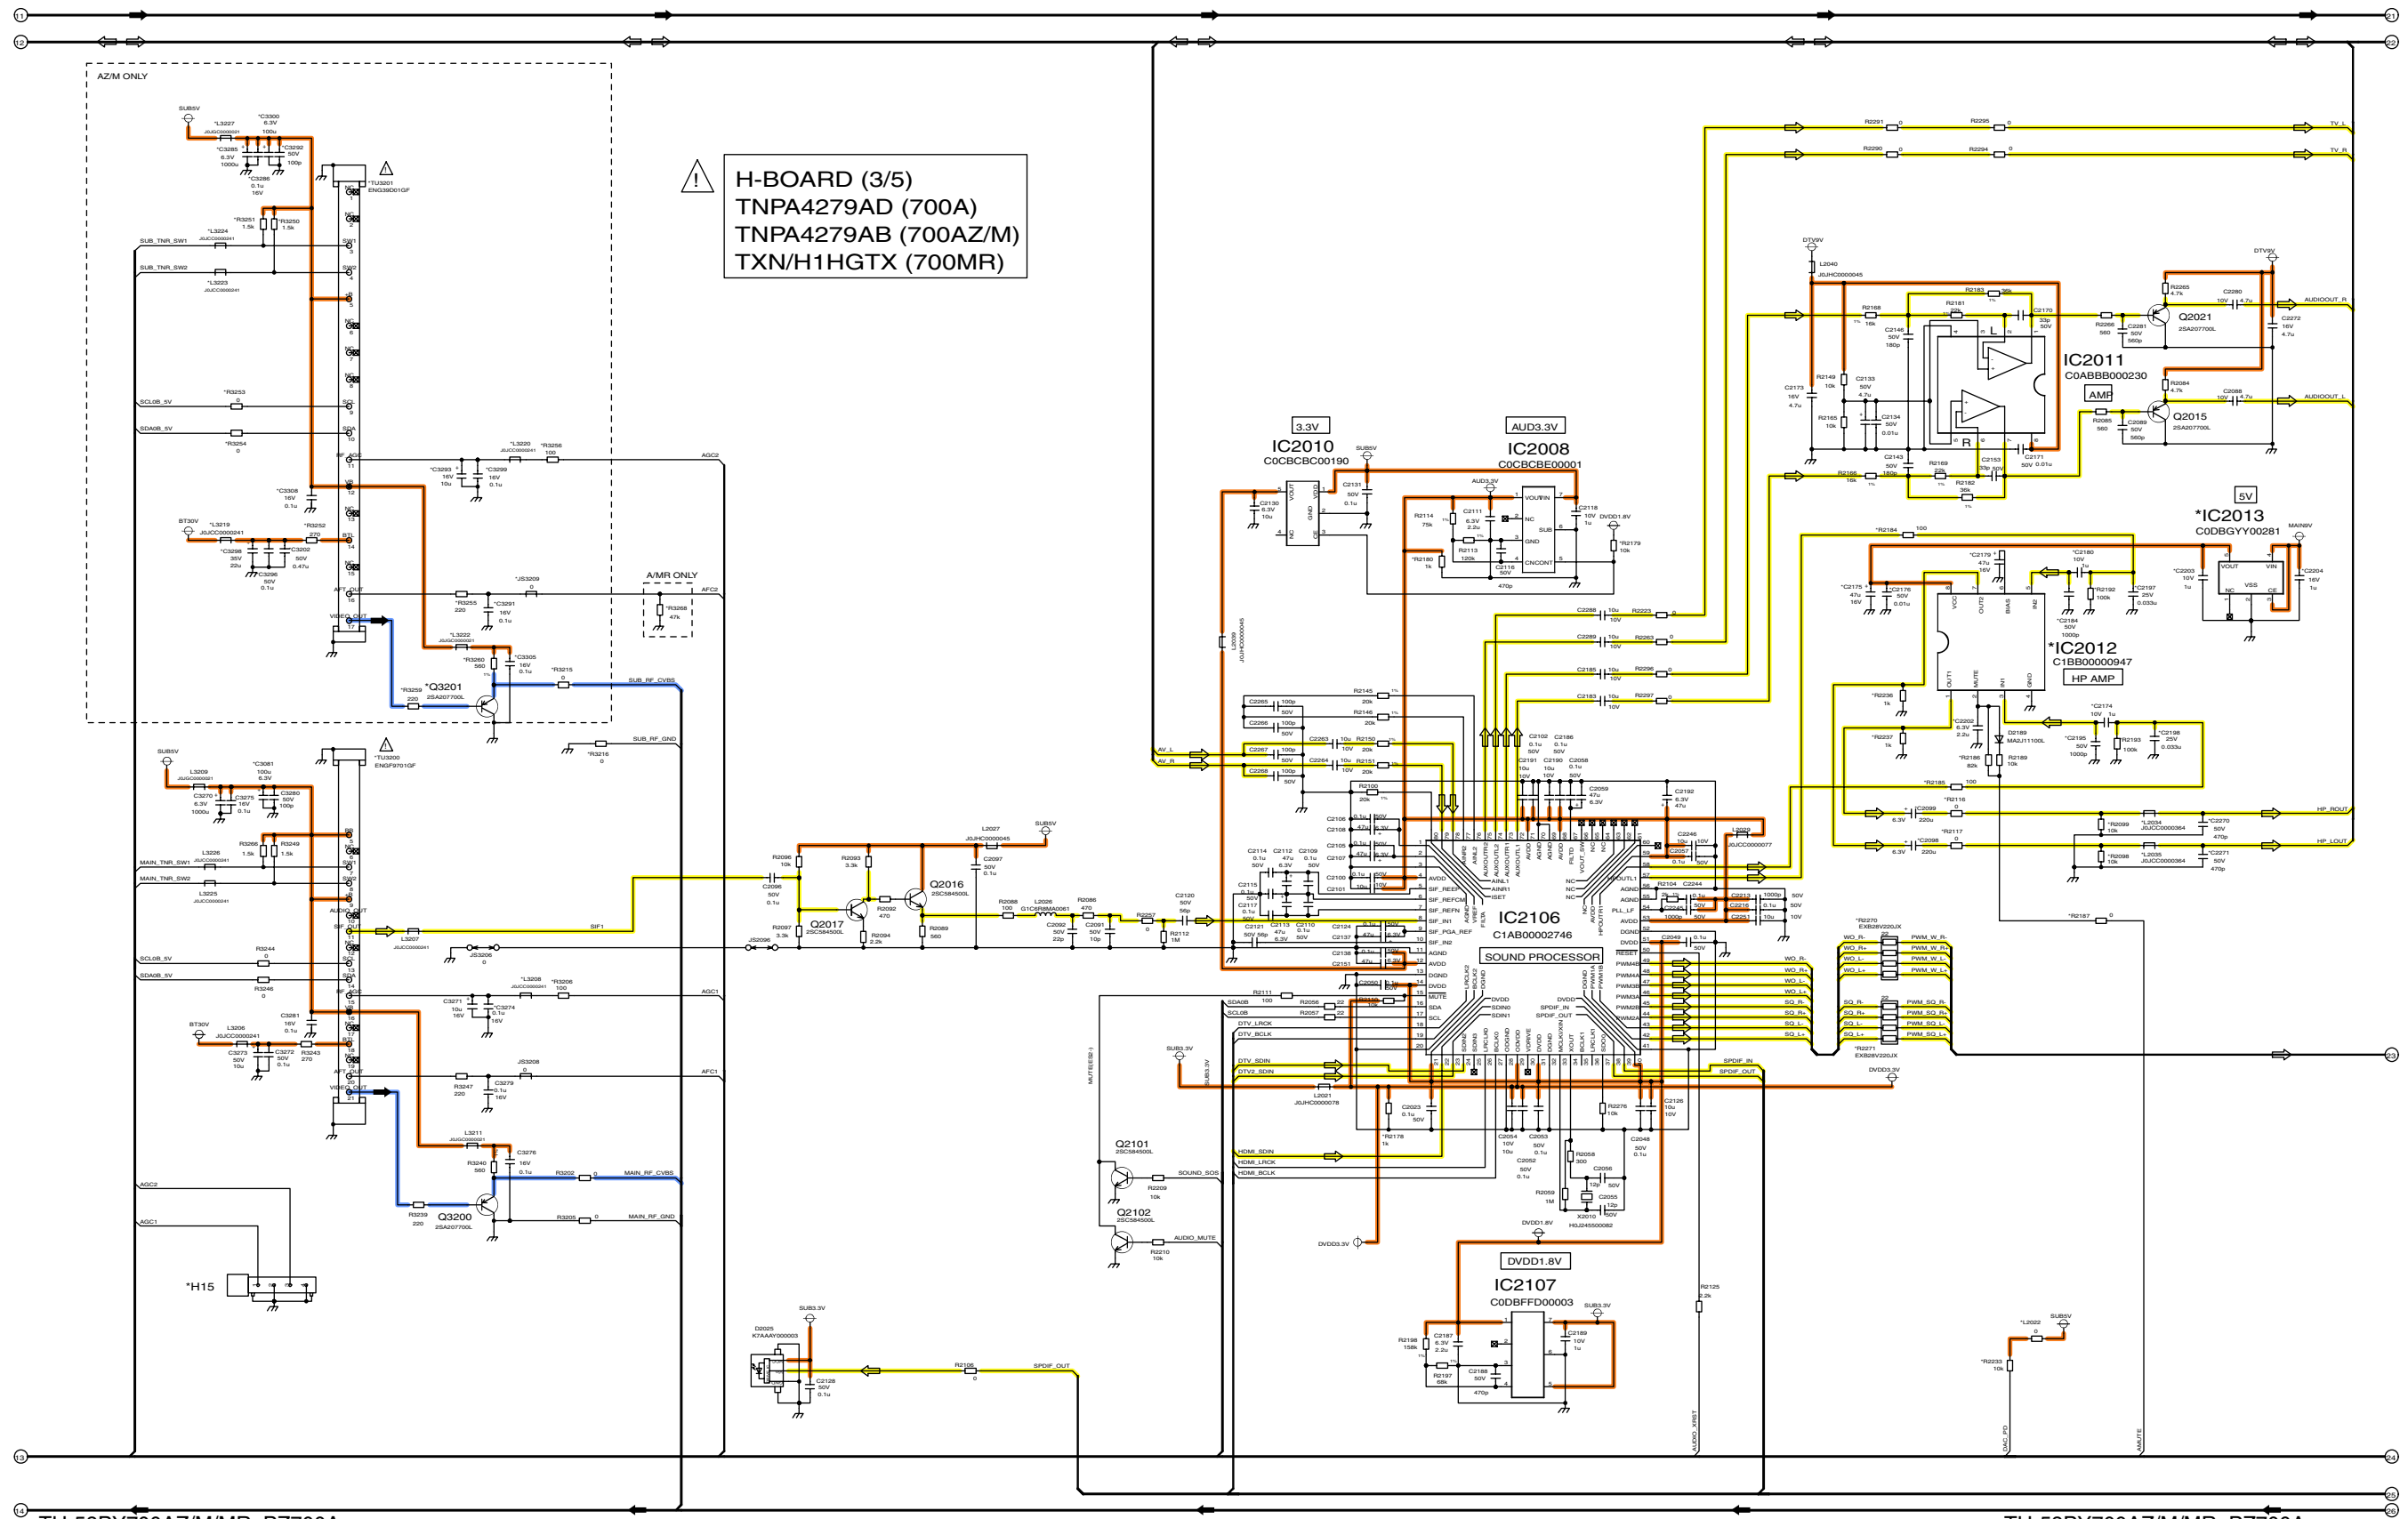

H-BOARD (3/5)
 TNPA4279AD (700A)
 TNPA4279AB (700AZ/M)
 TXN/H1HGTX (700MR)

TH-58PY700AZ/M/MR, PZ700A
 H-Board (3 of 5) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
 H-Board (3 of 5) Schematic Diagram

19

20

21

22

23


24

25

26

27

15.15. H-Board (4 of 5) Schematic Diagram

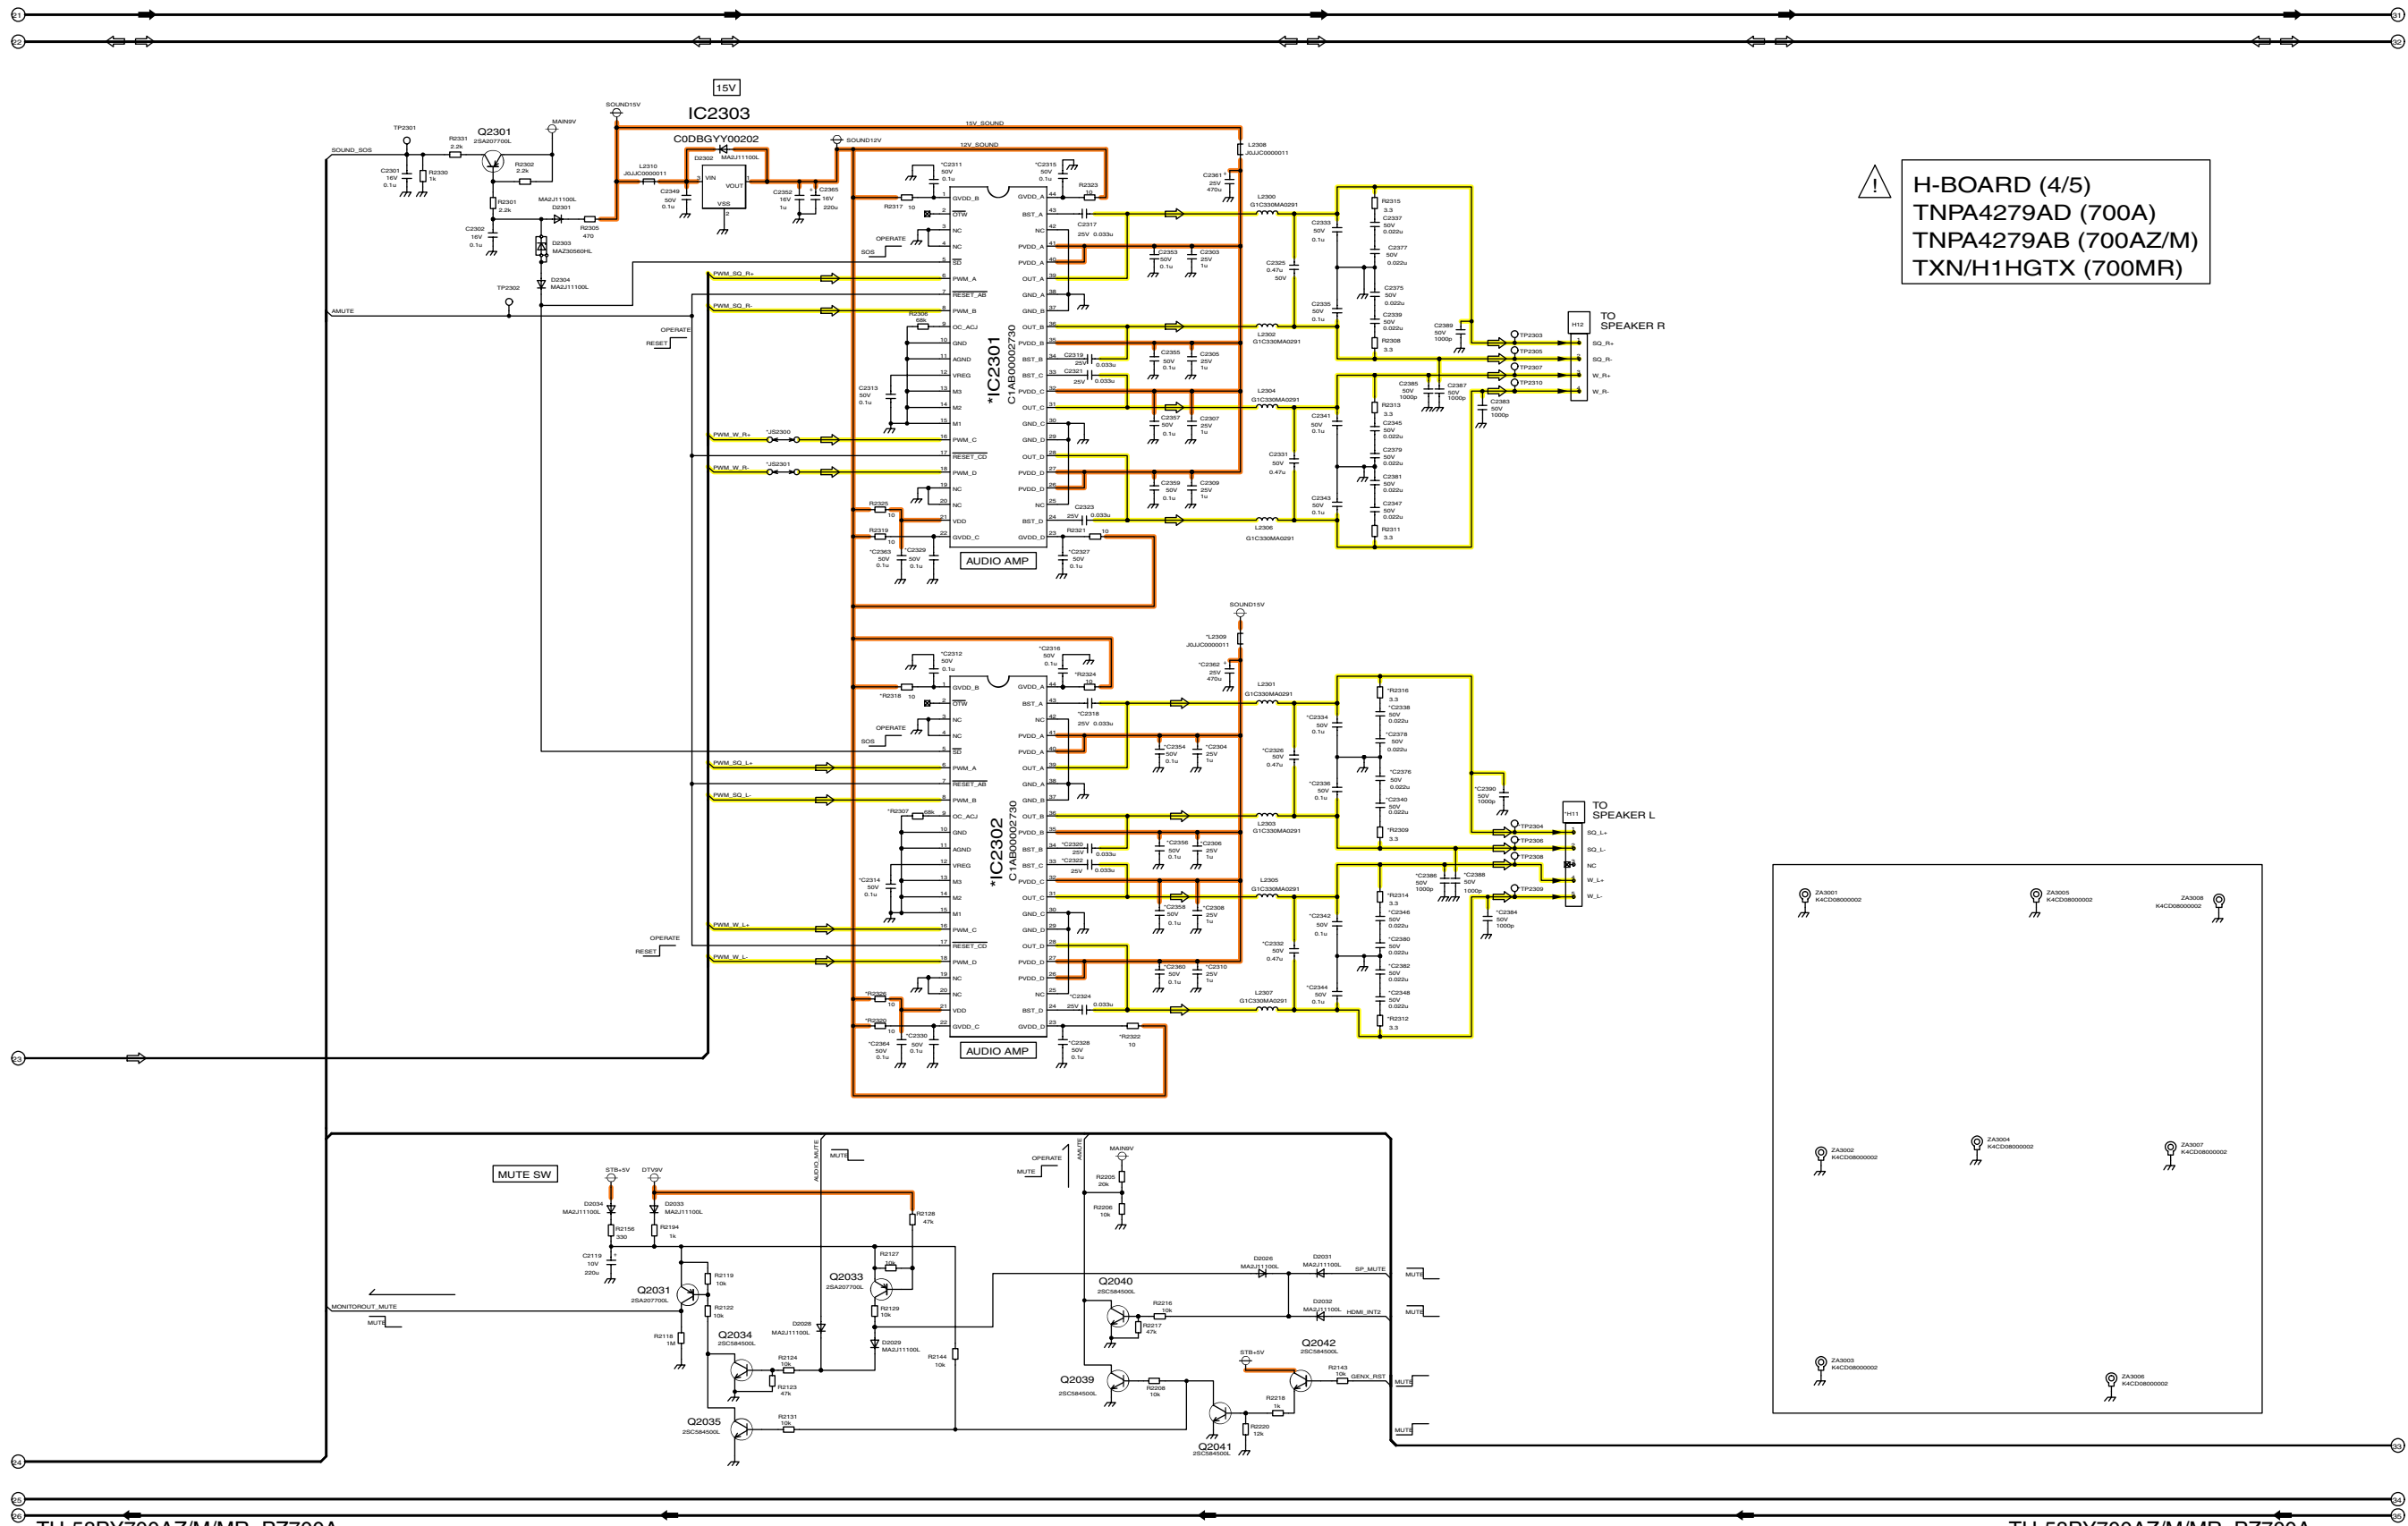


! H-BOARD (4/5)
 TNPA4279AD (700A)
 TNPA4279AB (700AZ/M)
 TXN/H1HGTX (700MR)

TH-58PY700AZ/M/MR, PZ700A
 H-Board (4 of 5) Schematic Diagram


TH-58PY700AZ/M/MR, PZ700A
 H-Board (4 of 5) Schematic Diagram

15.16. H-Board (5 of 5) Schematic Diagram

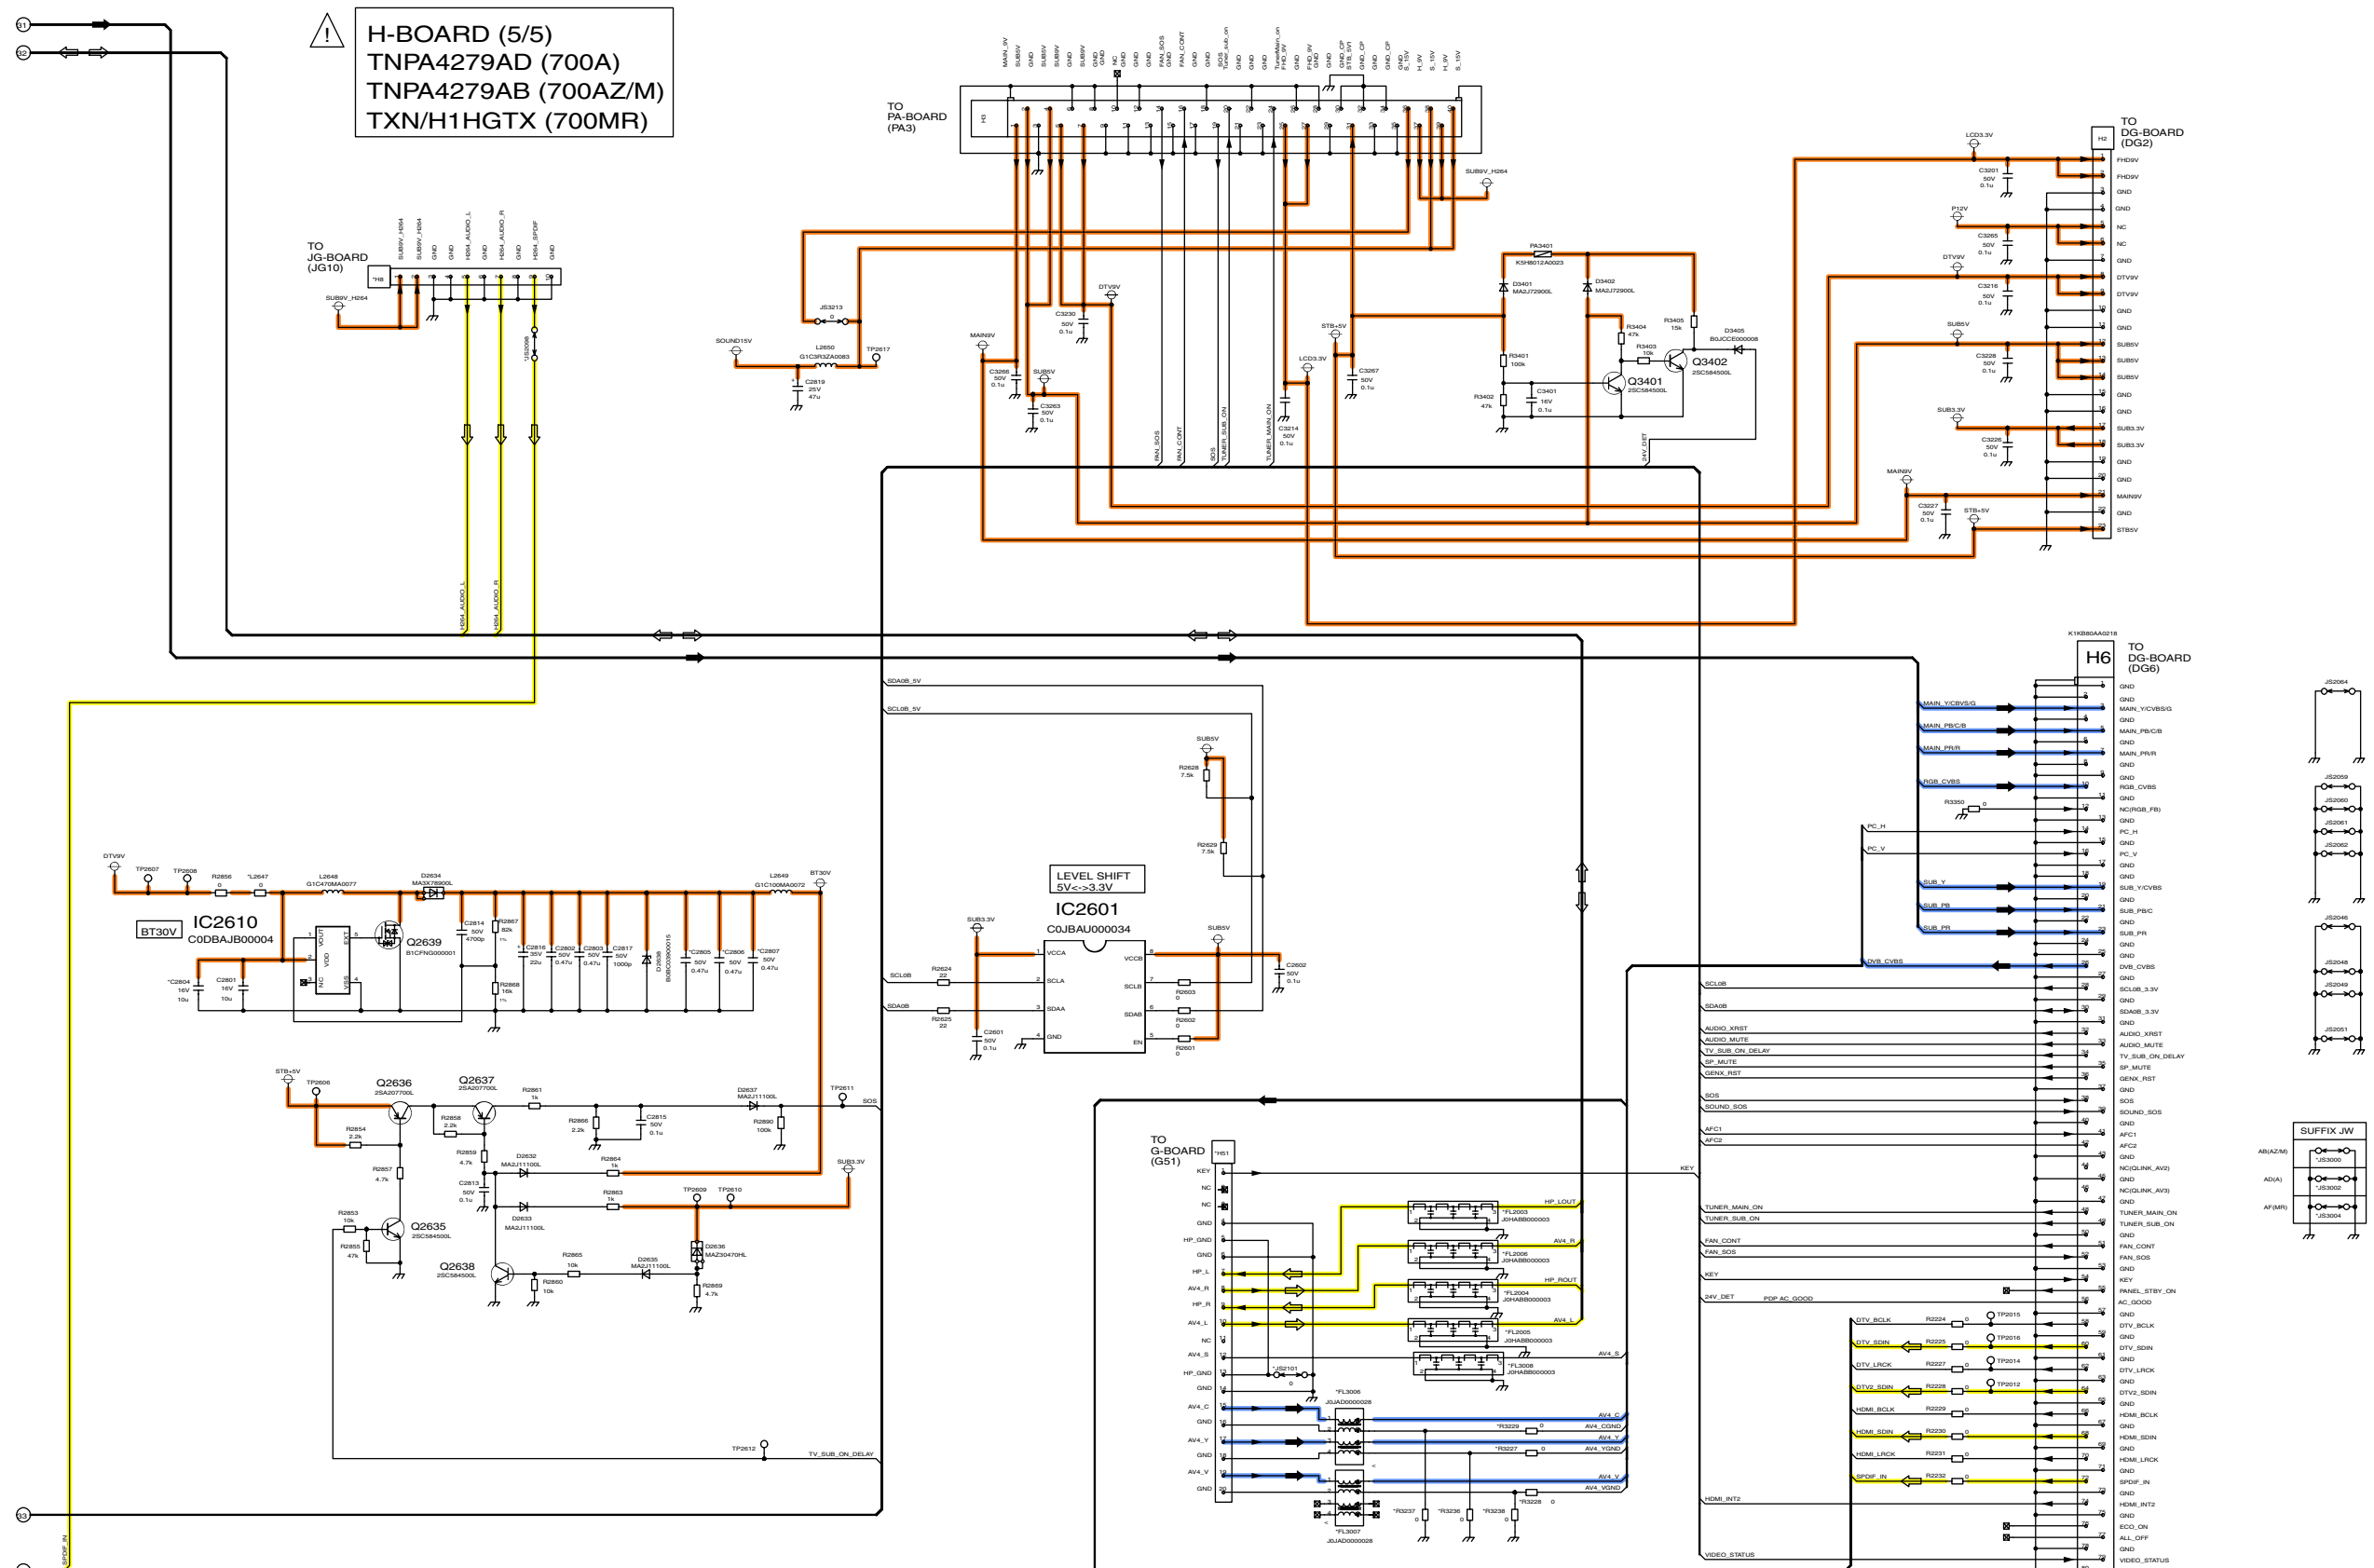


15.17. GH and K-Board Schematic Diagram

A

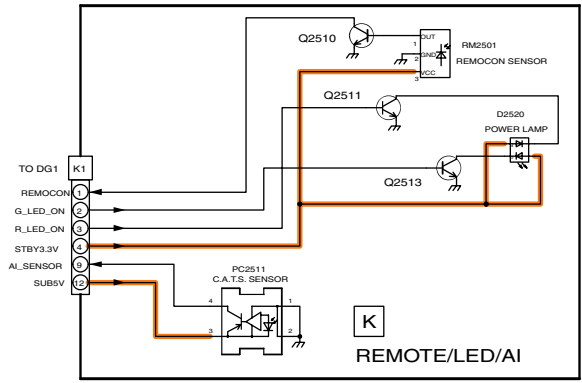


B

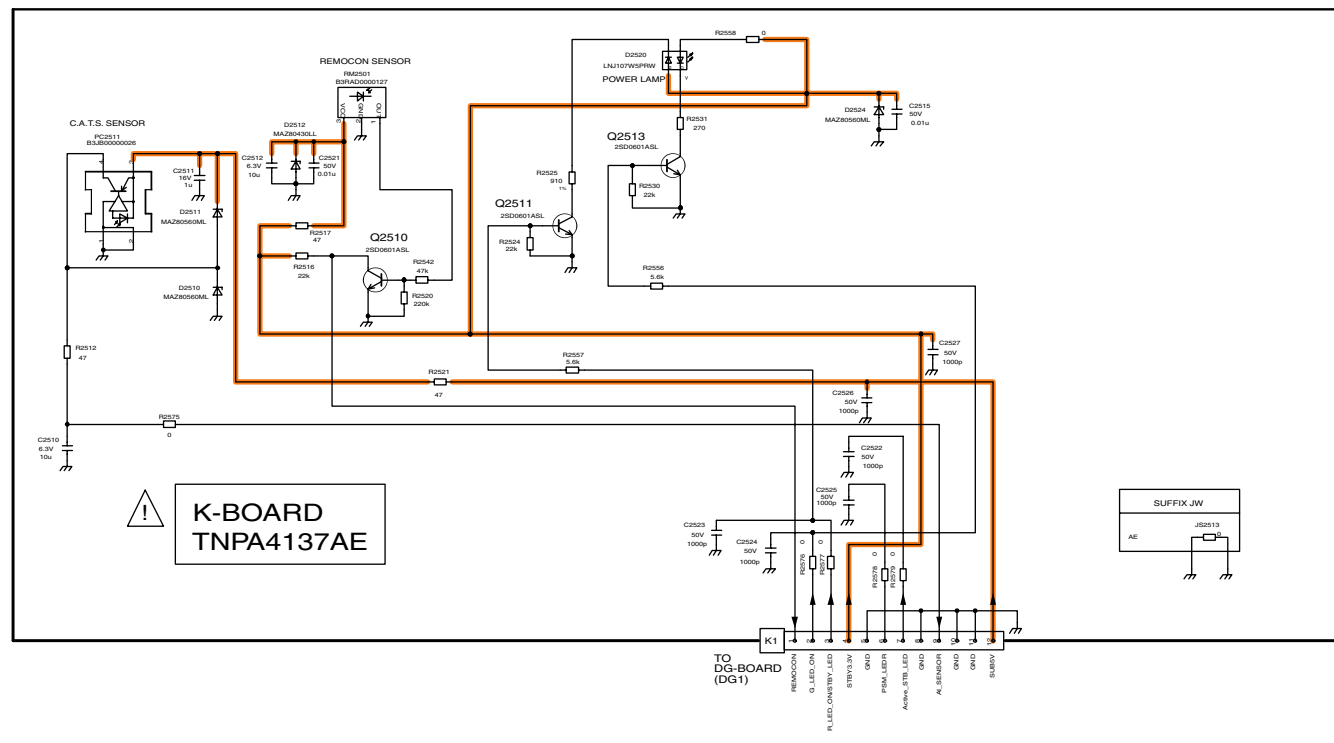


C

D

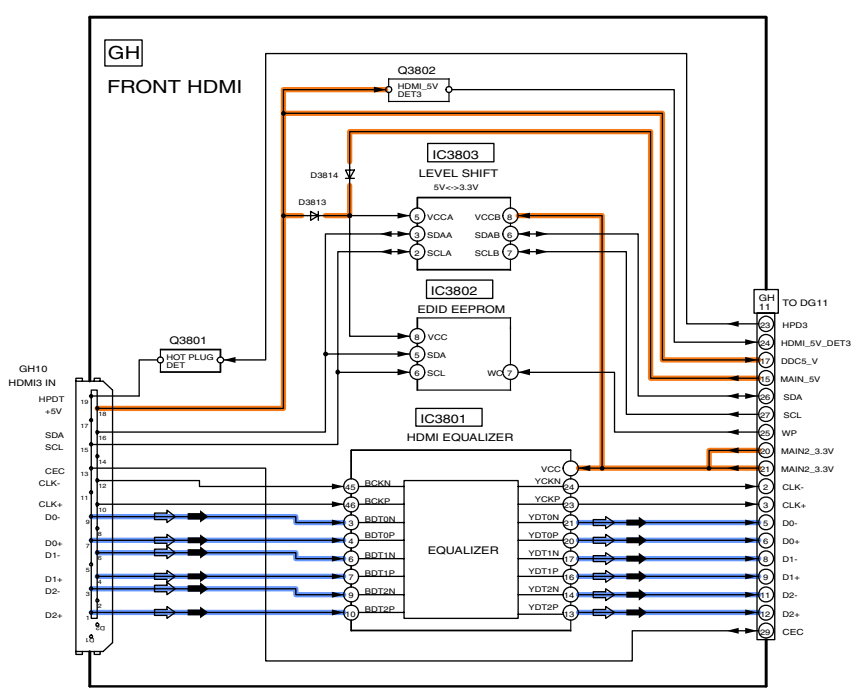

E

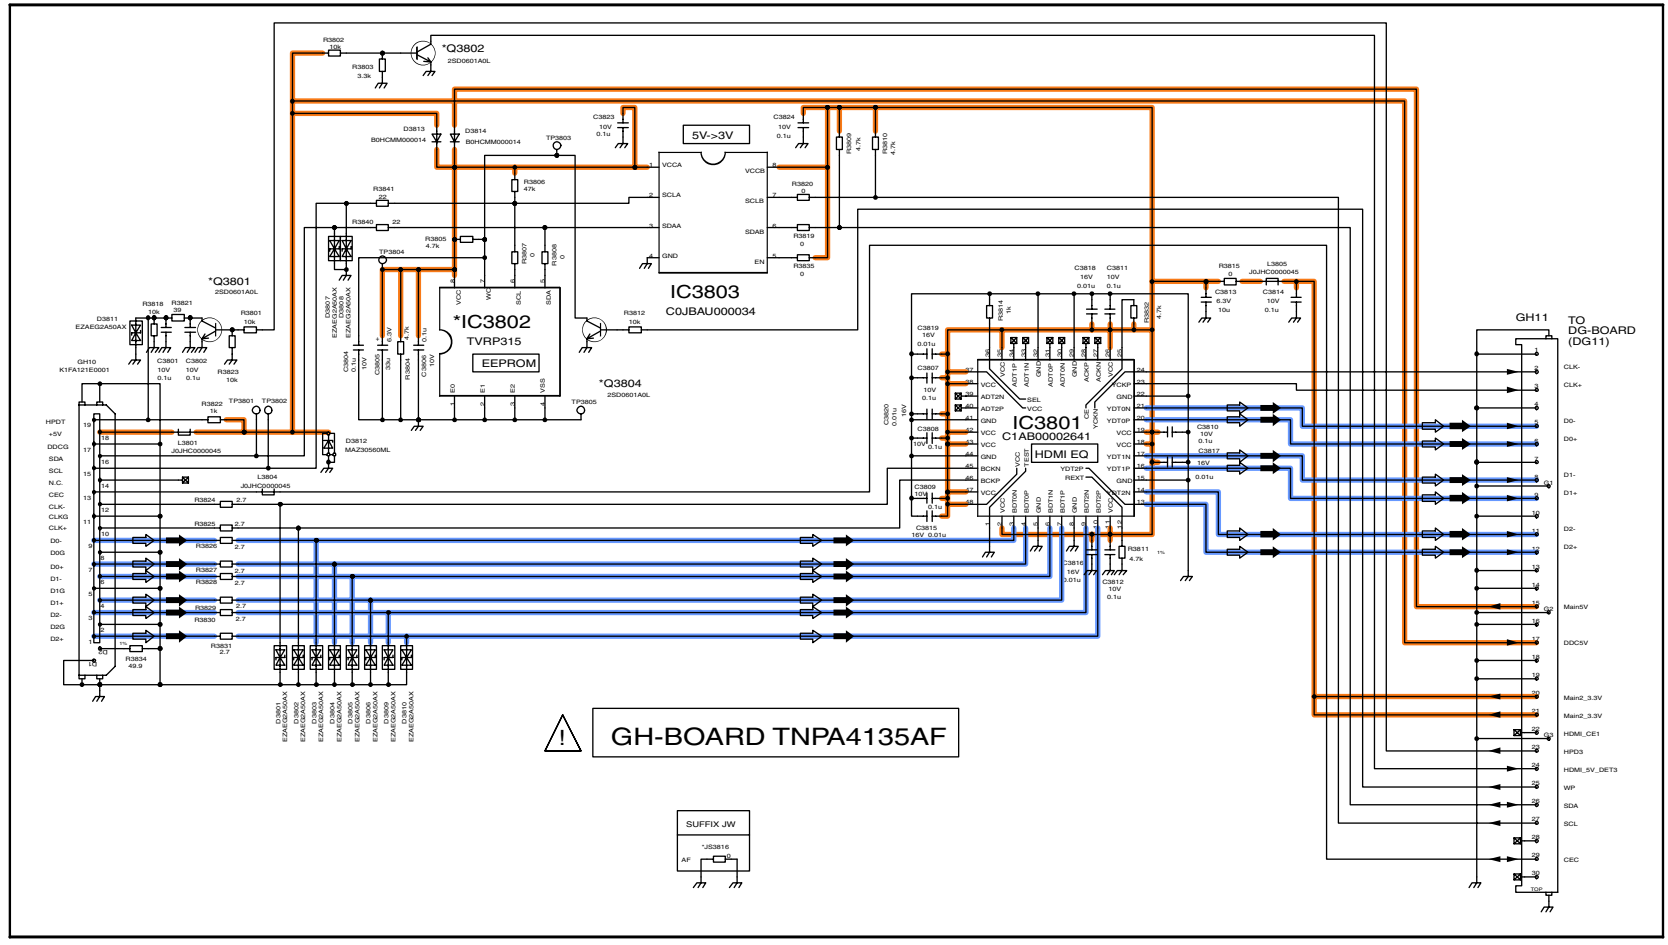


F

TH-58PY700AZ/M/MR, PZ700A
GH and K-Board Schematic Diagram


TH-58PY700AZ/M/MR, PZ700A
GH and K-Board Schematic Diagram

1 2 3 4 5 6 7 8 9

15.18. GS-Board Block Diagram

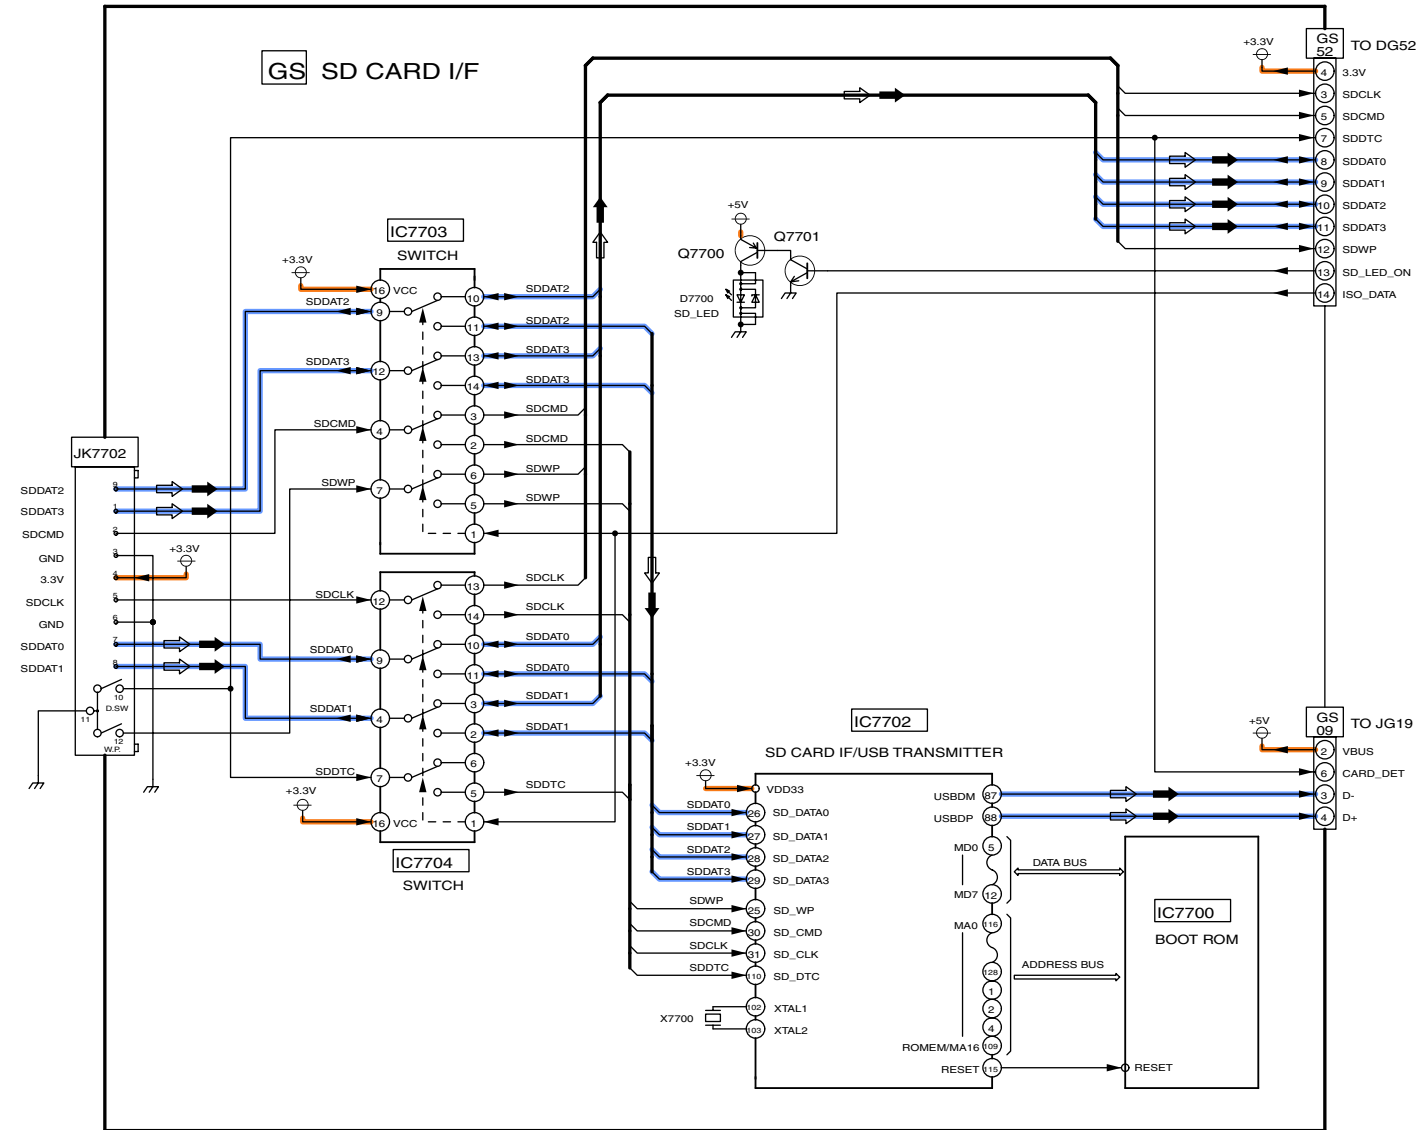

15.19. GS-Board Schematic Diagram

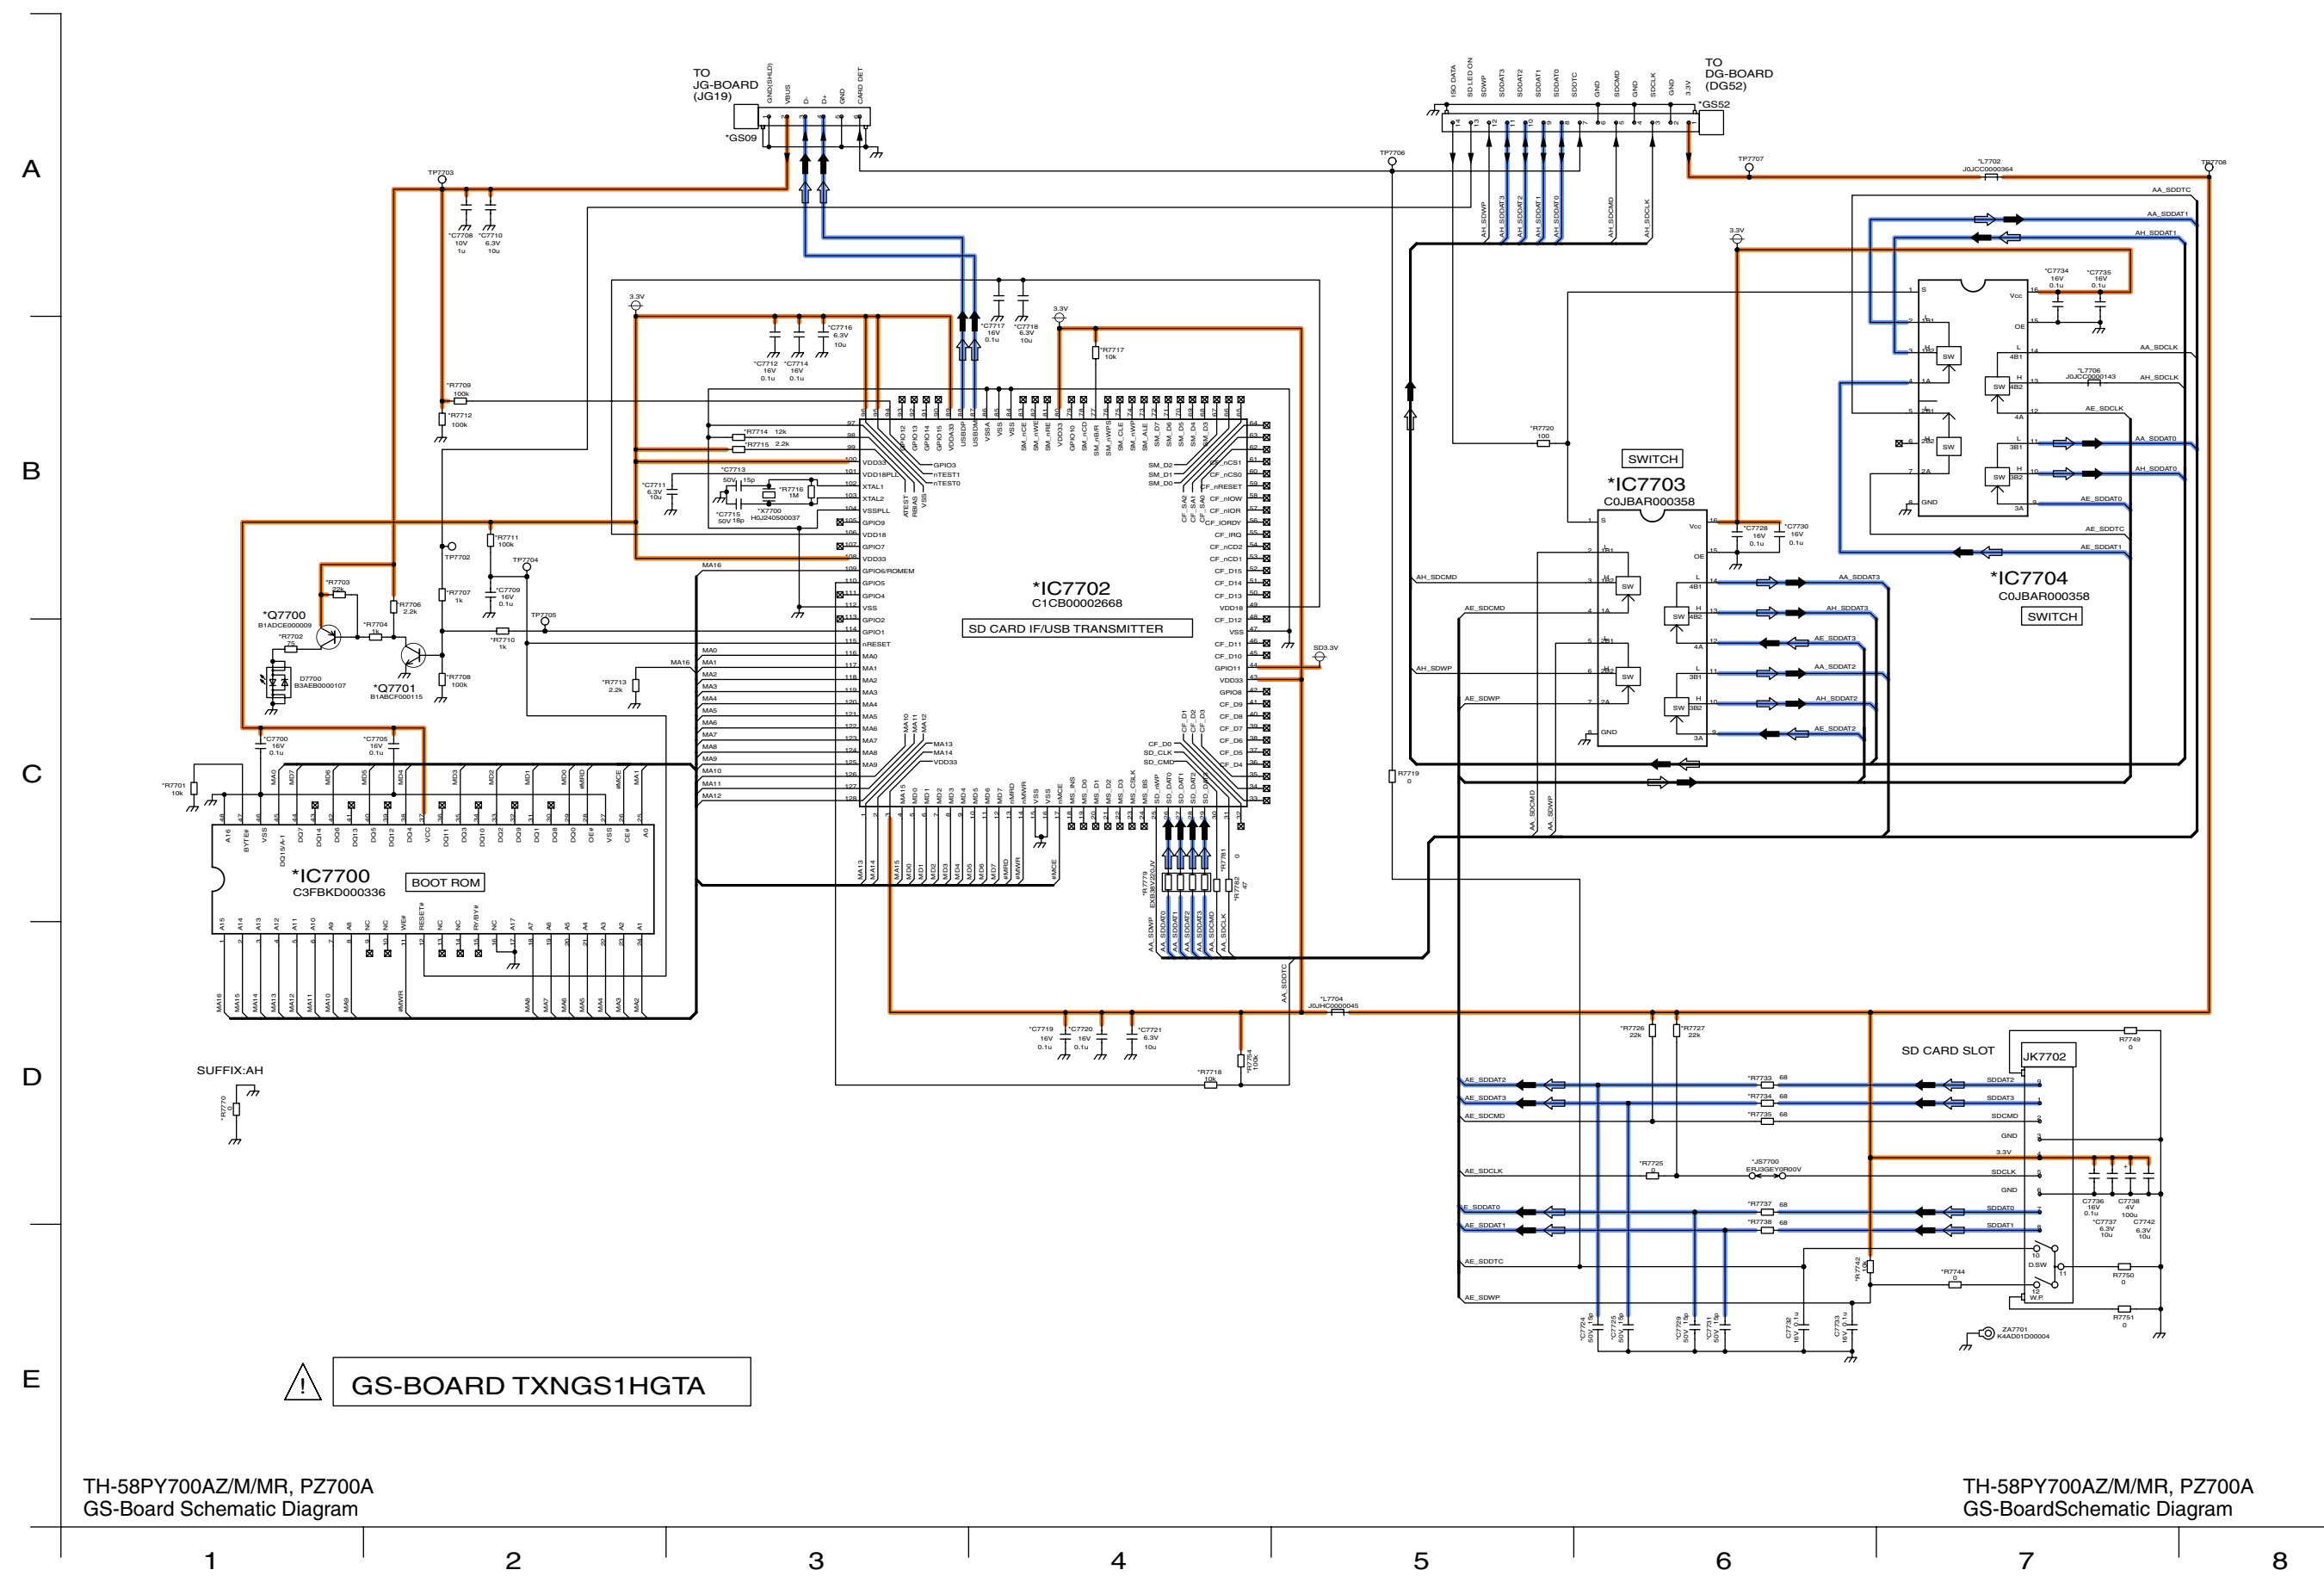


⚠ GS-BOARD TXNGS1HGTA

TH-58PY700AZ/M/MR, PZ700A
GS-Board Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
GS-Board Schematic Diagram

1 2 3 4 5 6 7 8


15.20. JG-Board Block Diagram

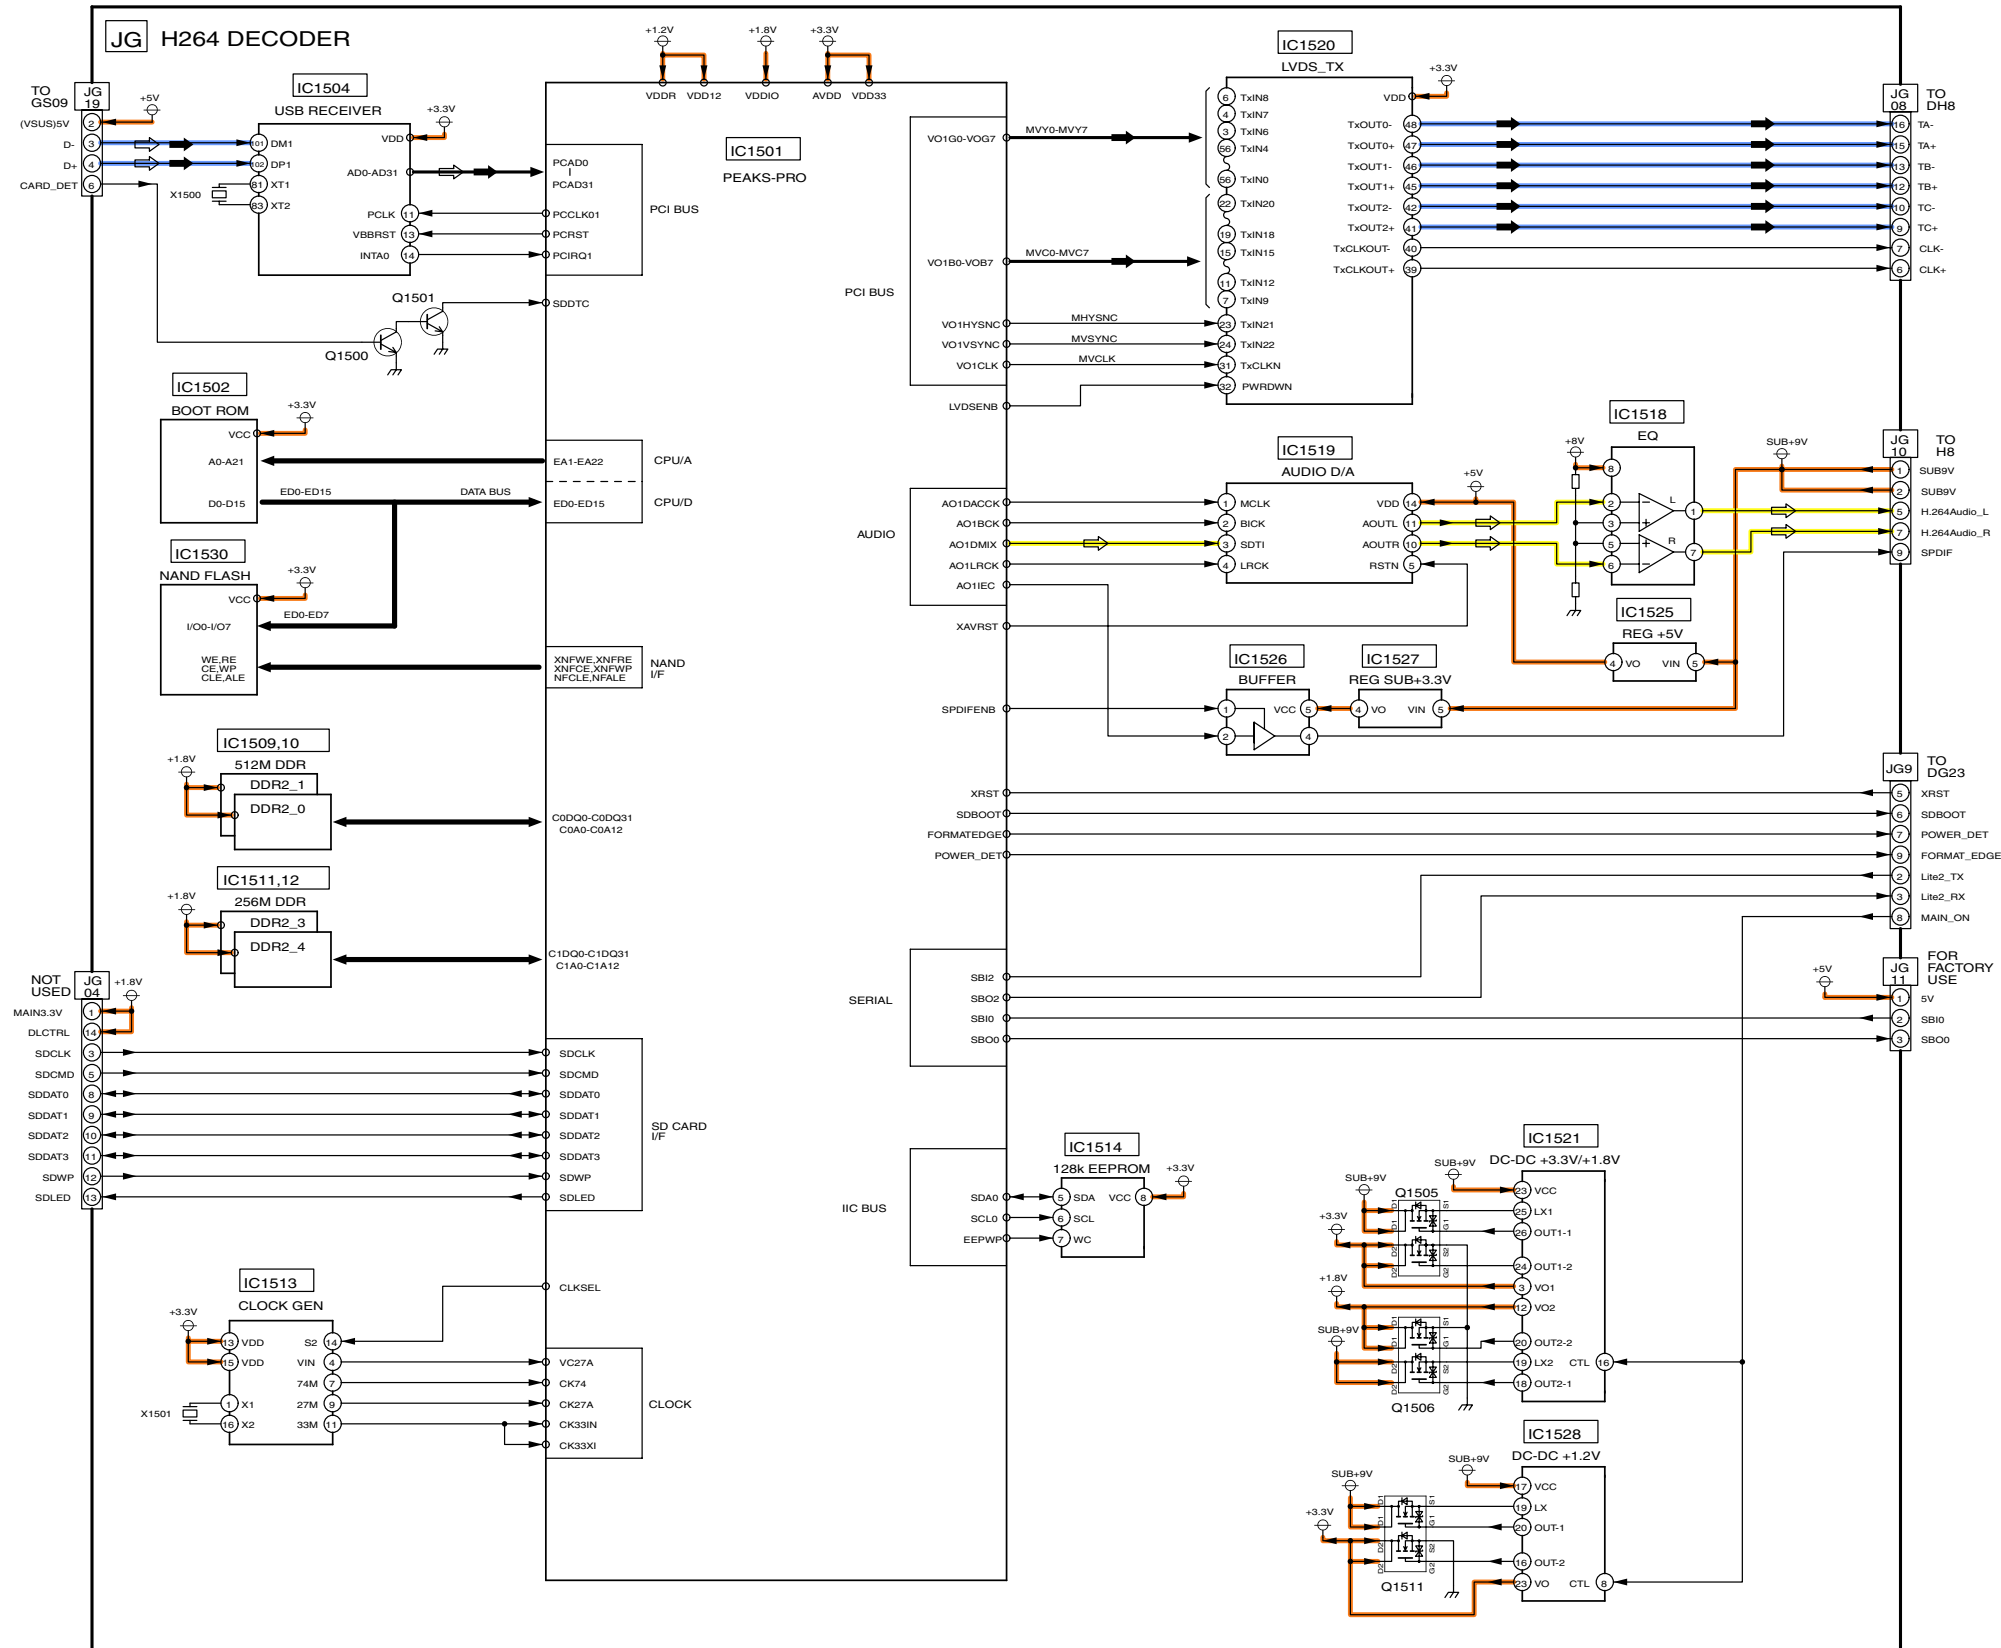

TH-58PY700AZ/M/MR, PZ700A
JG-Board Block Diagram

TH-58PY700AZ/M/MR, PZ700A
JG-Board Block Diagram


15.21. JG-Board (1 of 5) Schematic Diagram

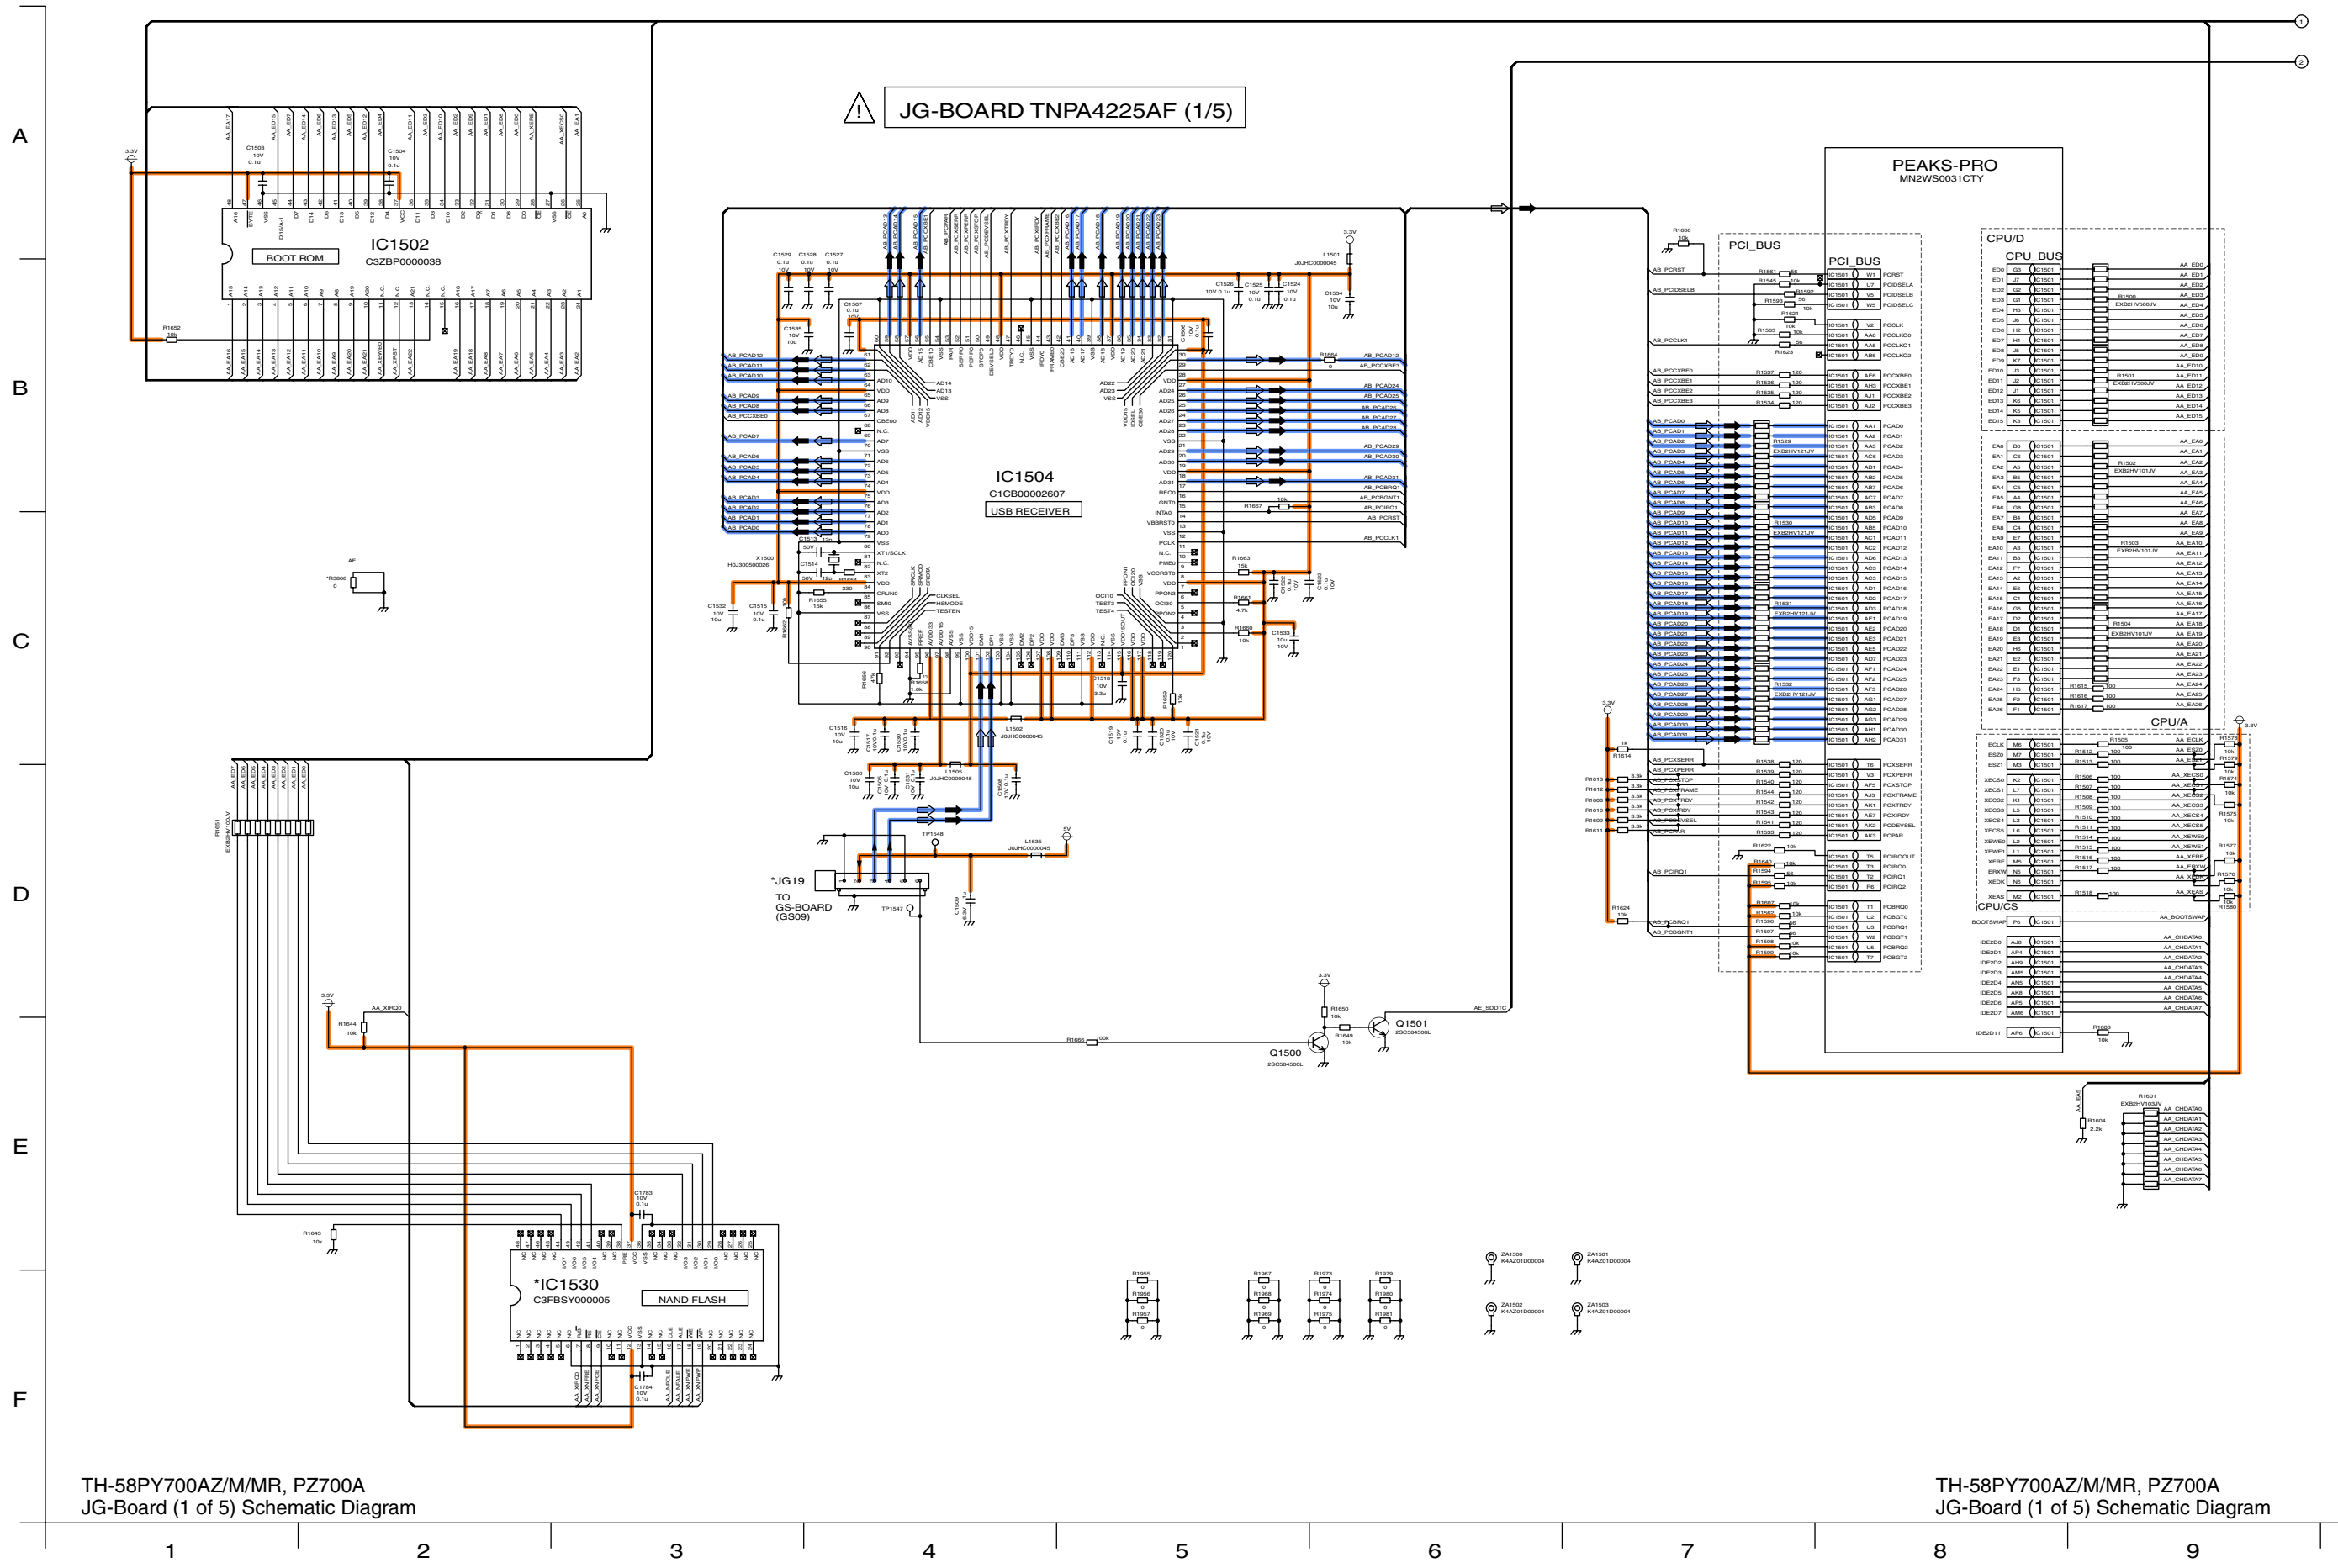

TH-58PY700AZ/M/MR, PZ700A
JG-Board (1 of 5) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
JG-Board (1 of 5) Schematic Diagram

15.22. JG-Board (2 of 5) Schematic Diagram

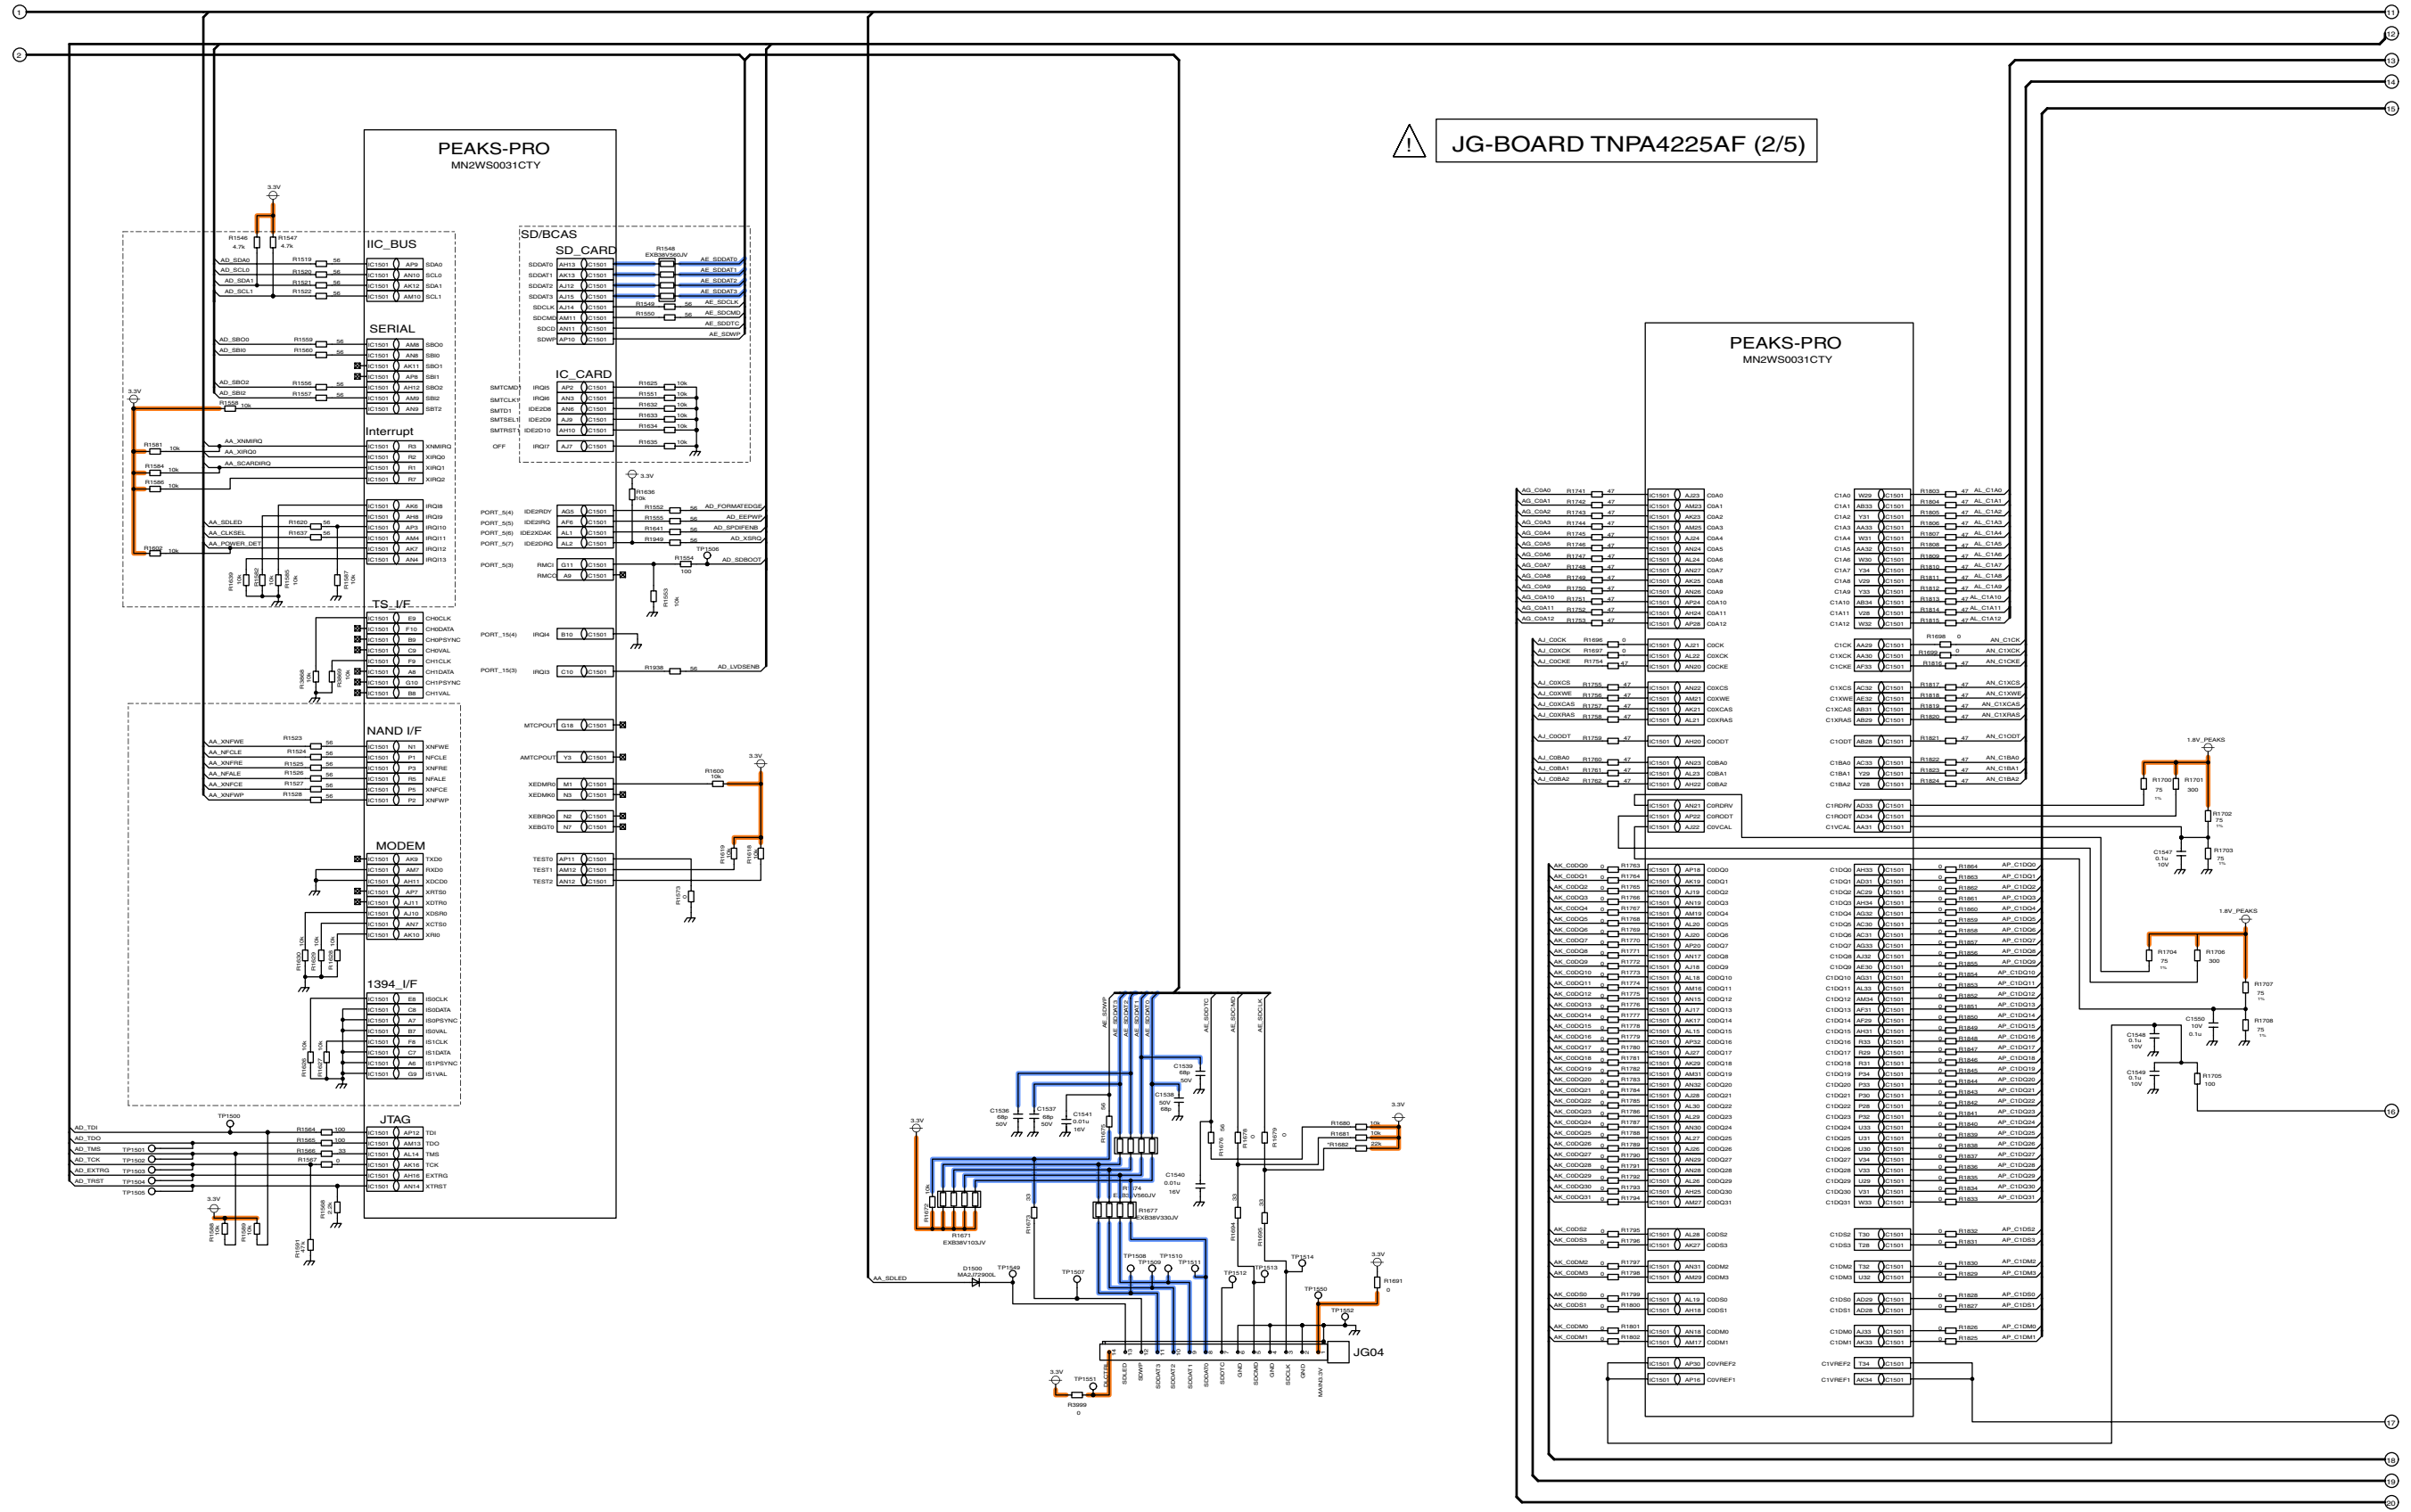

TH-58PY700AZ/M/MR, PZ700A
JG-Board (2 of 5) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
JG-Board (2 of 5) Schematic Diagram

10

11

12

13

14


15

16

17

18

15.23. JG-Board (3 of 5) Schematic Diagram

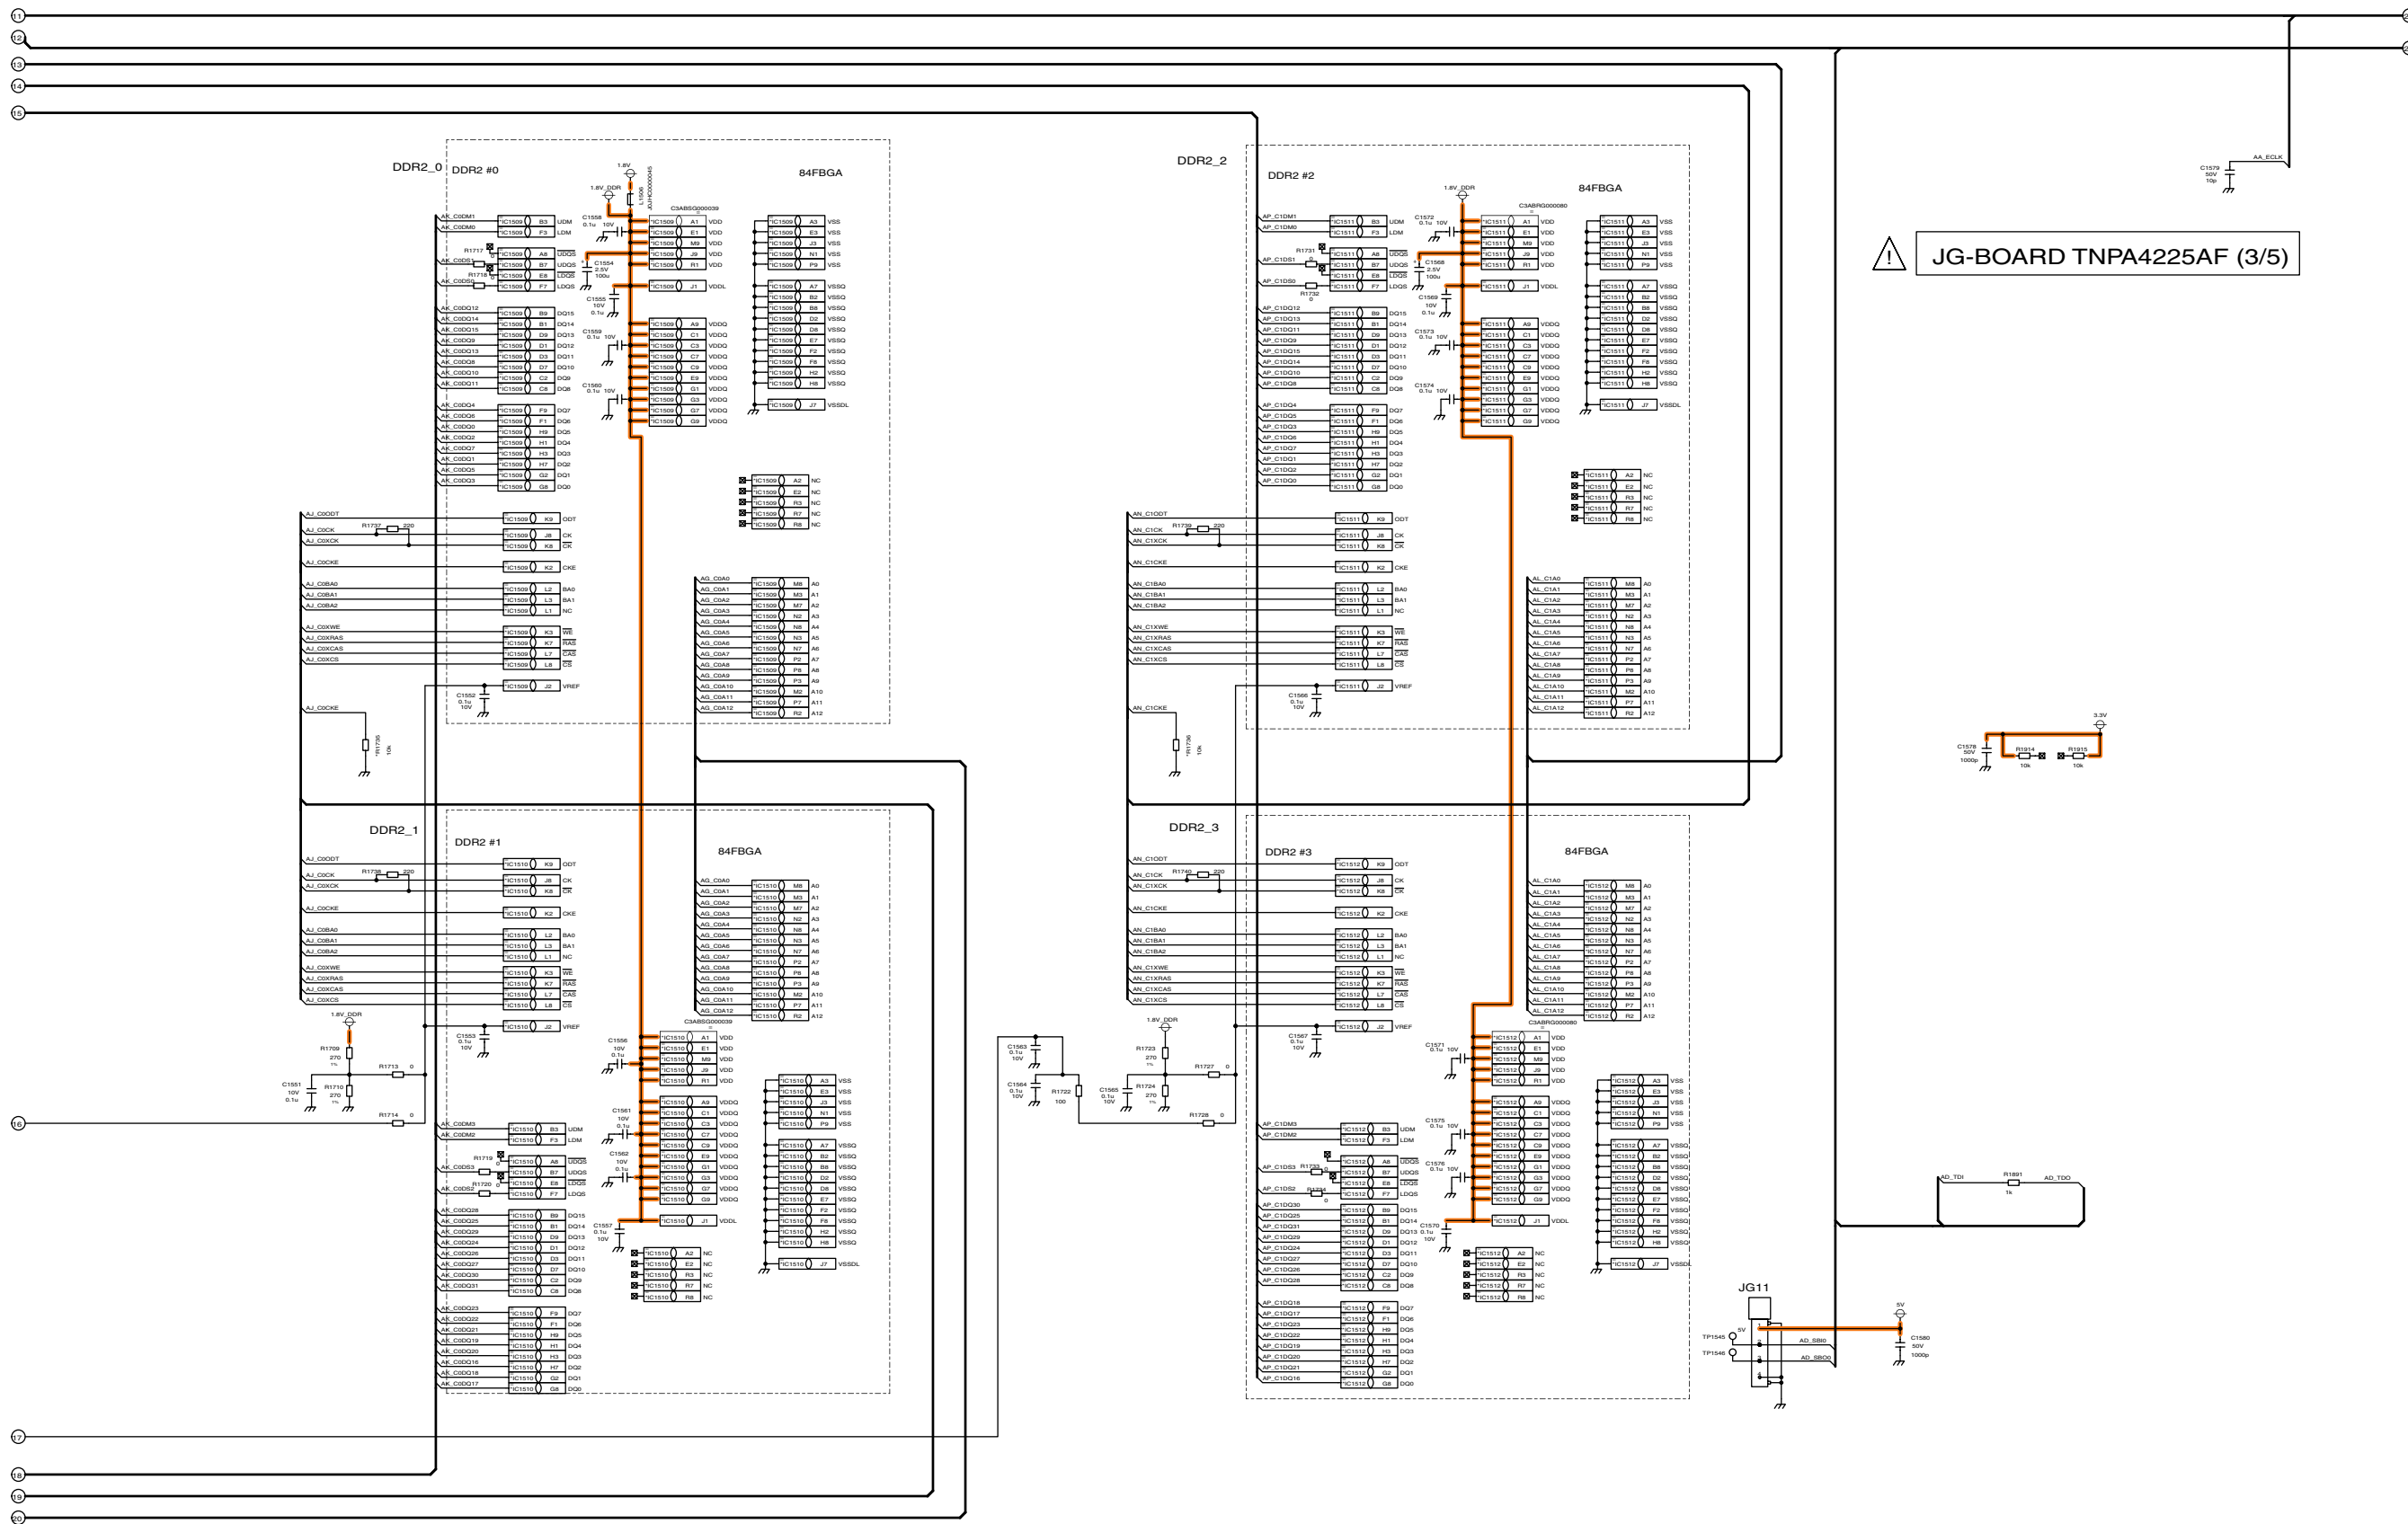

JG-BOARD TNPA4225AF (3/5)

TH-58PY700AZ/M/MR, PZ700A
JG-Board (3 of 5) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
JG-Board (3 of 5) Schematic Diagram

19

20

21

22

23


24

25

26

27


15.24. JG-Board (4 of 5) Schematic Diagram

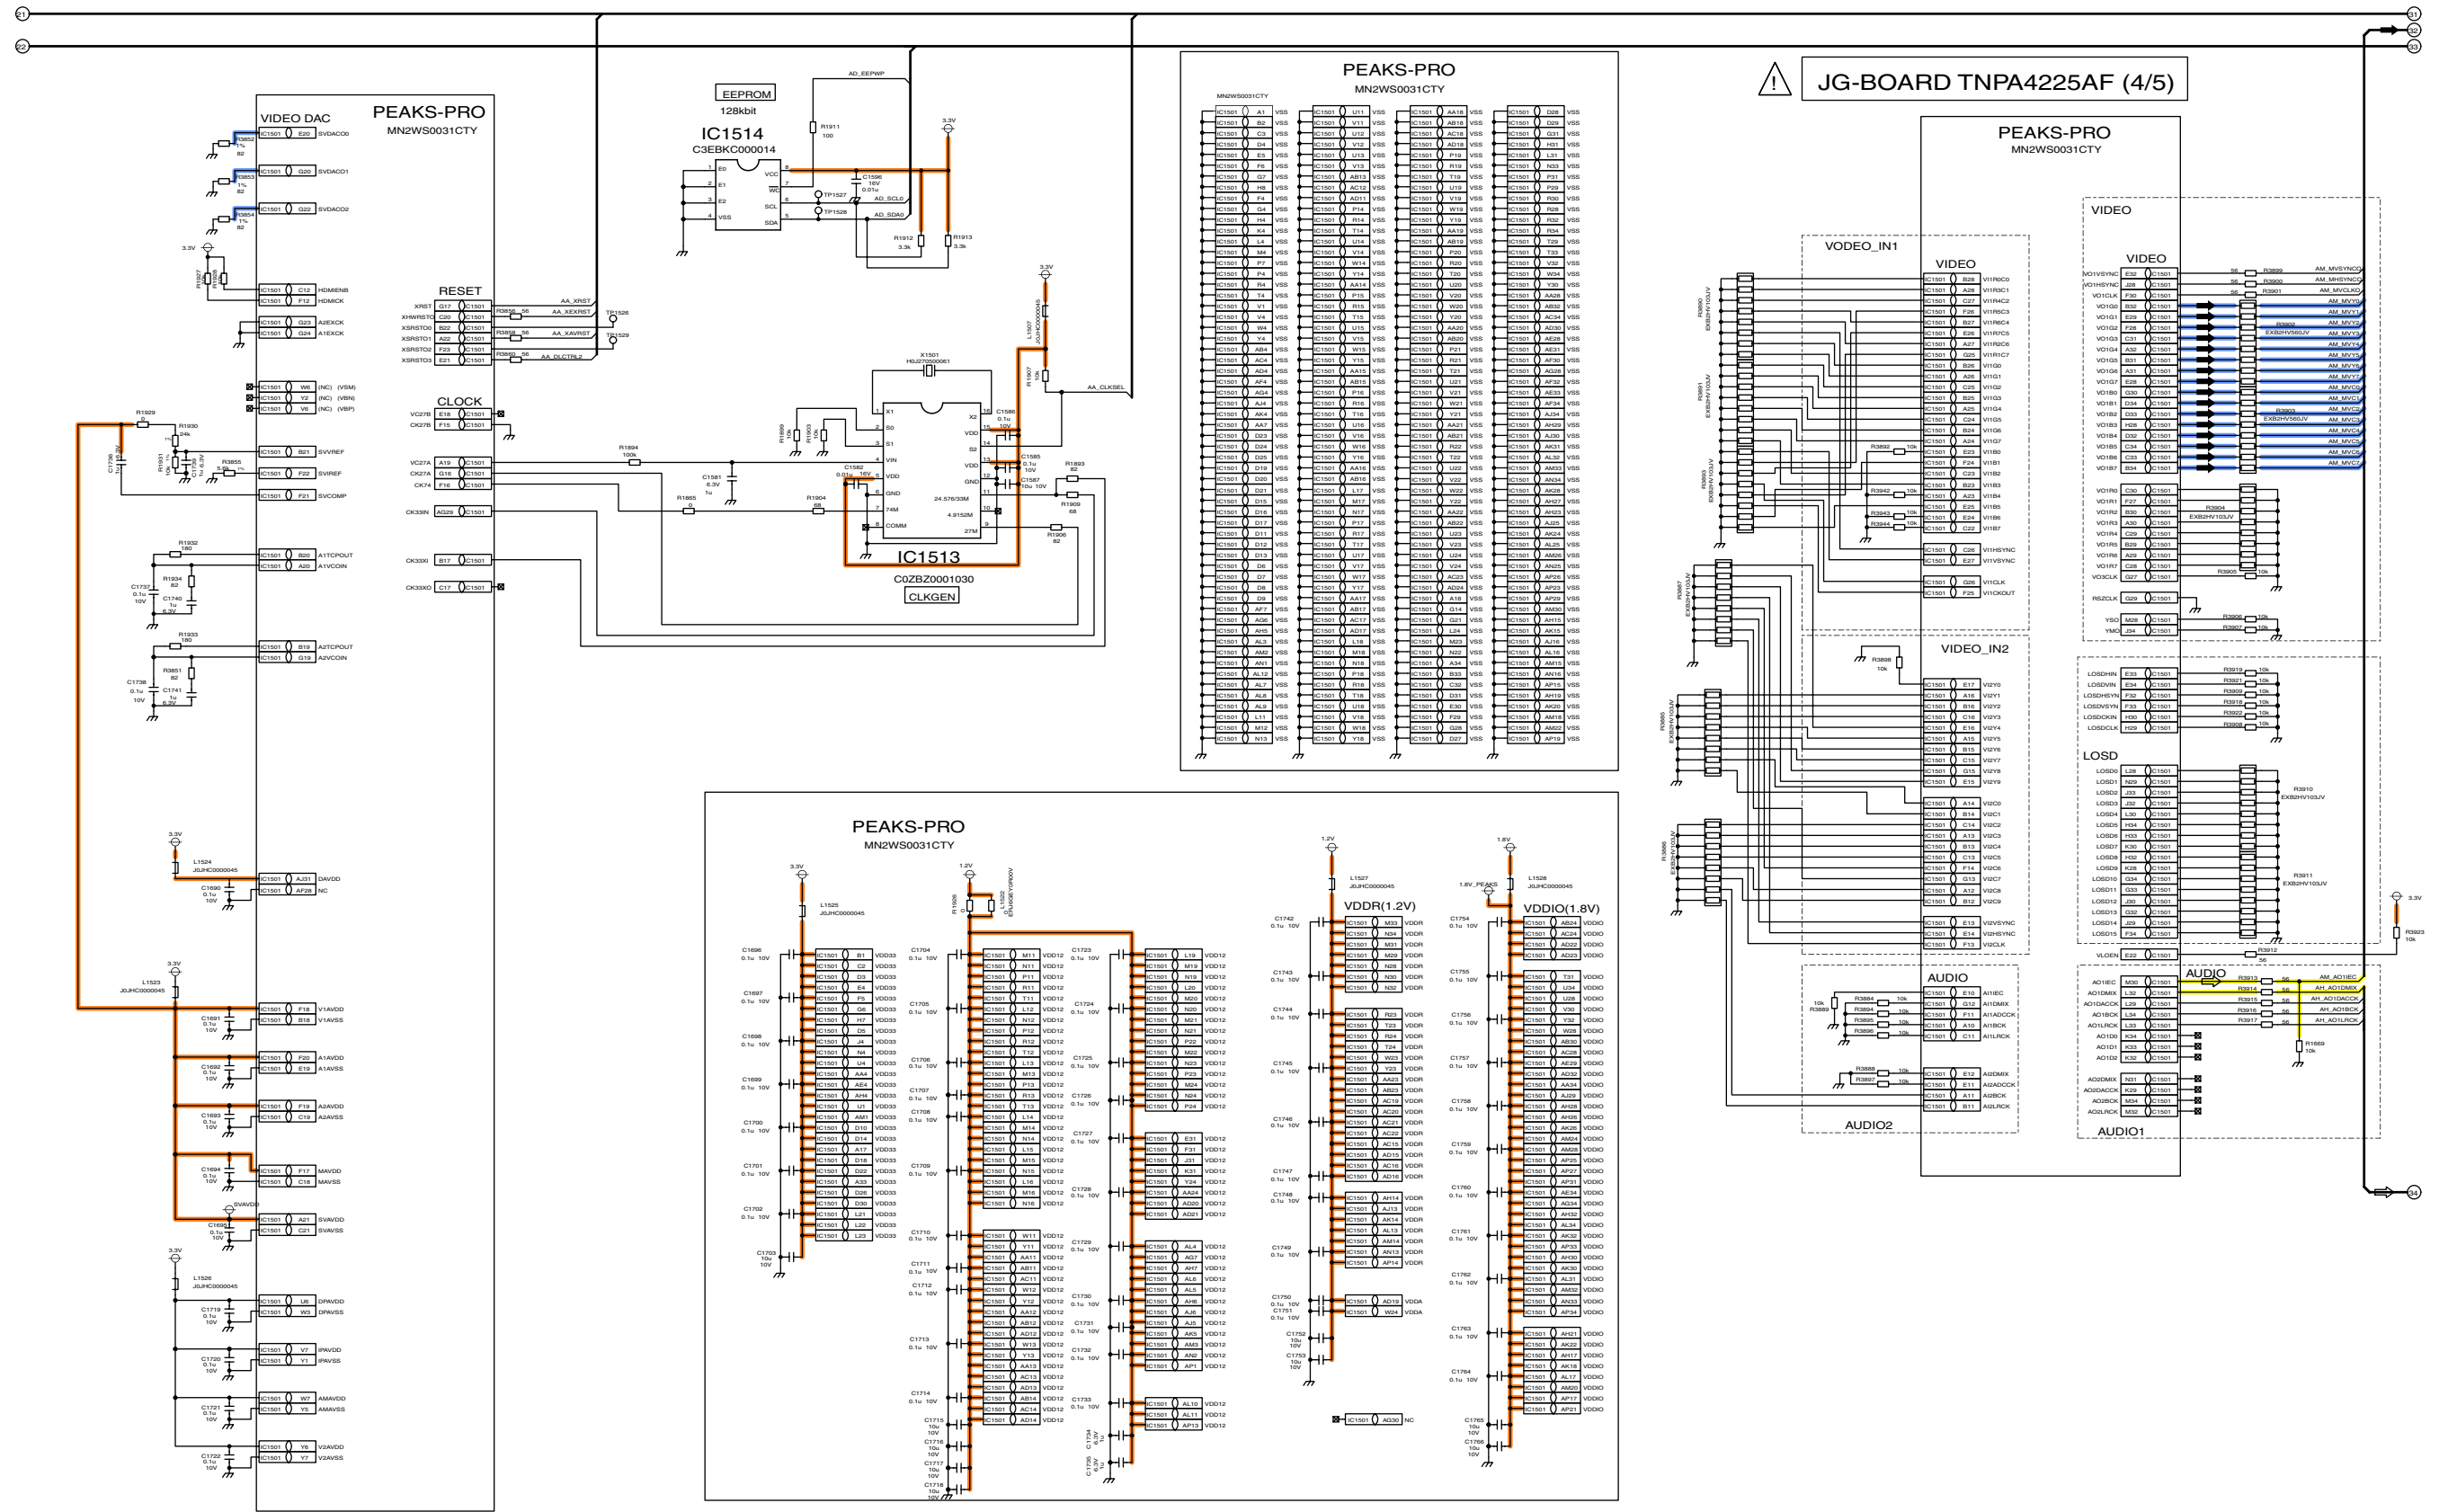

TH-58PY700AZ/M/MR, PZ700A
JG-Board (4 of 5) Schematic Diagram


TH-58PY700AZ/M/MR, PZ700A
JG-Board (4 of 5) Schematic Diagram

15.25. JG-Board (5 of 5) Schematic Diagram

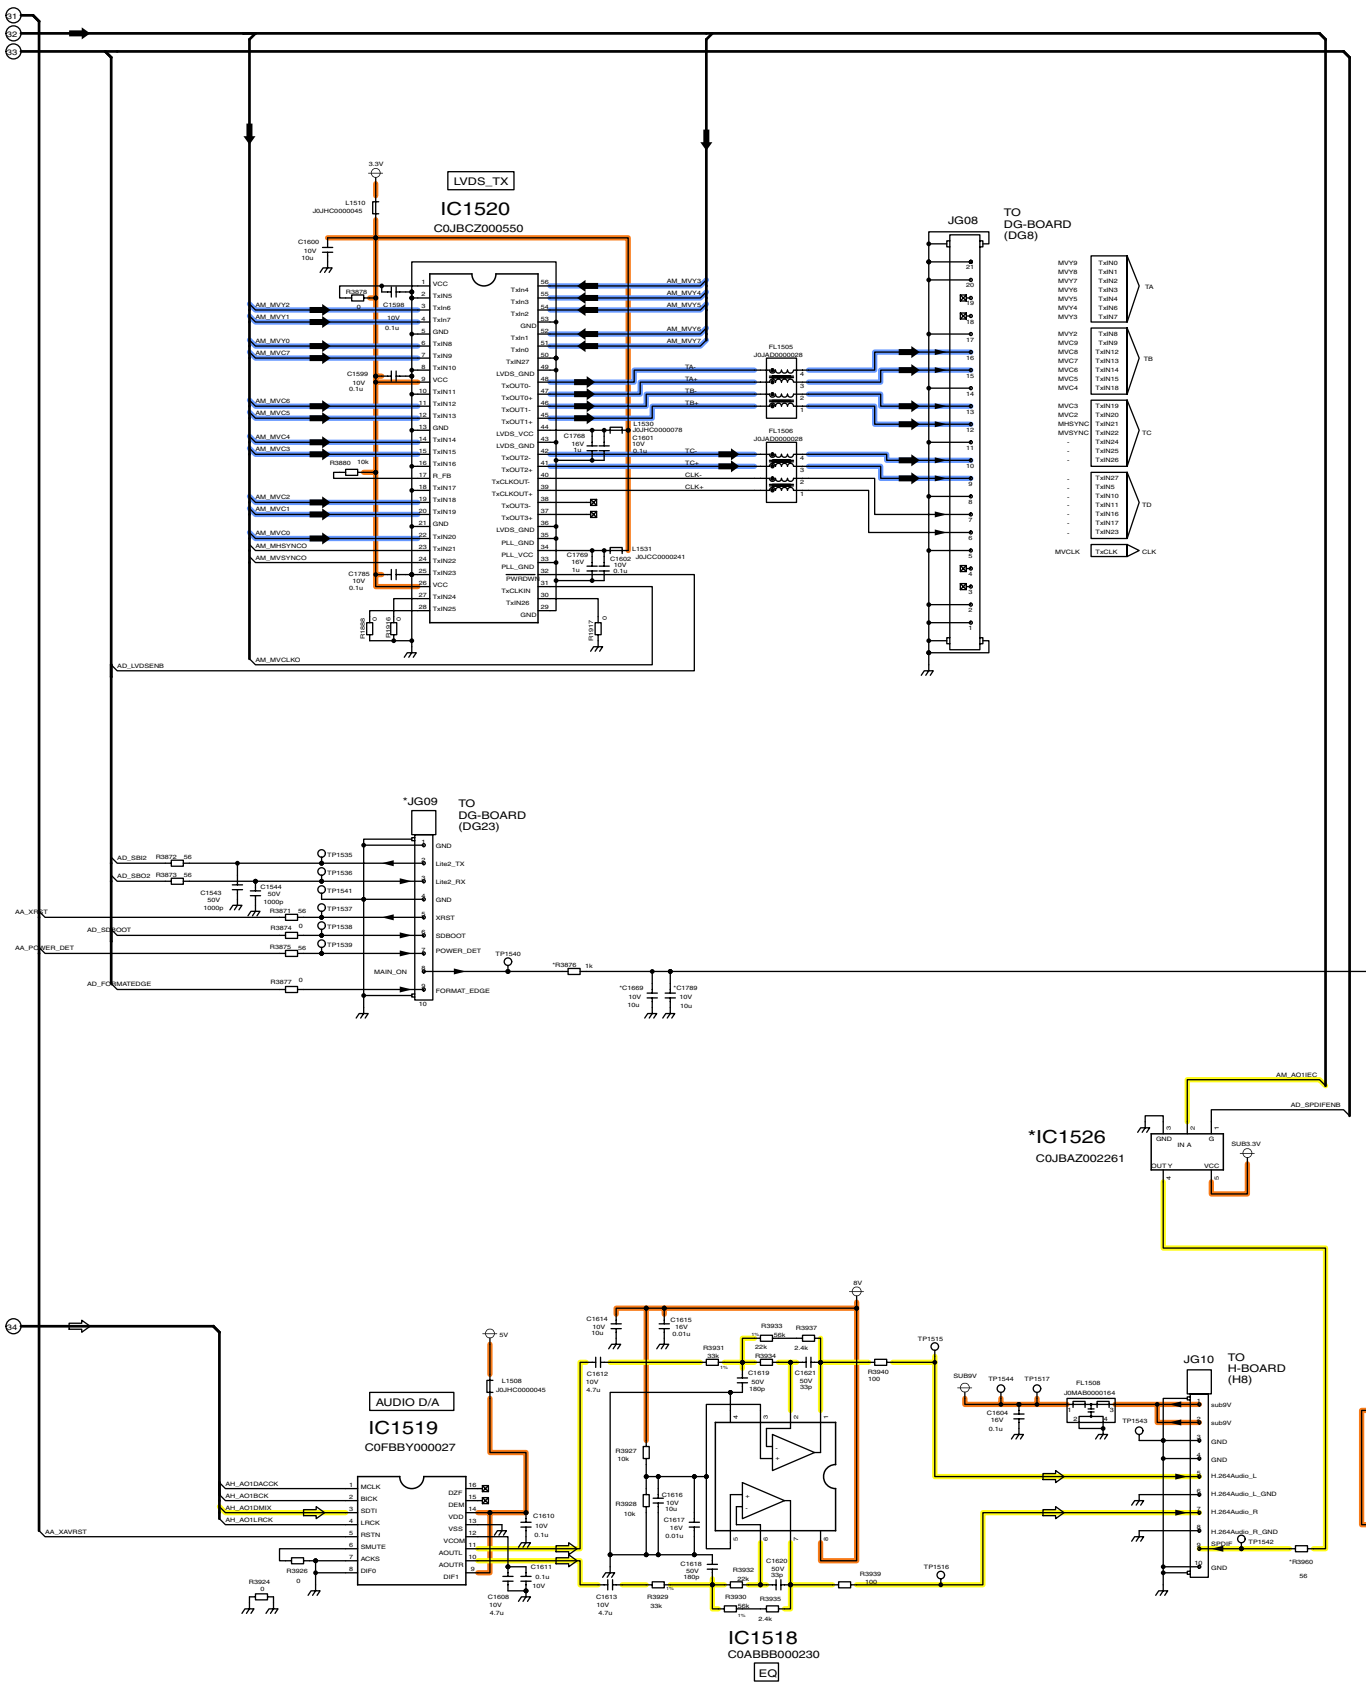


TH-58PY700AZ/M/MR, PZ700A
JG-Board (5 of 5) Schematic Diagram

JG-BOARD TNPA4225AF (5/5)

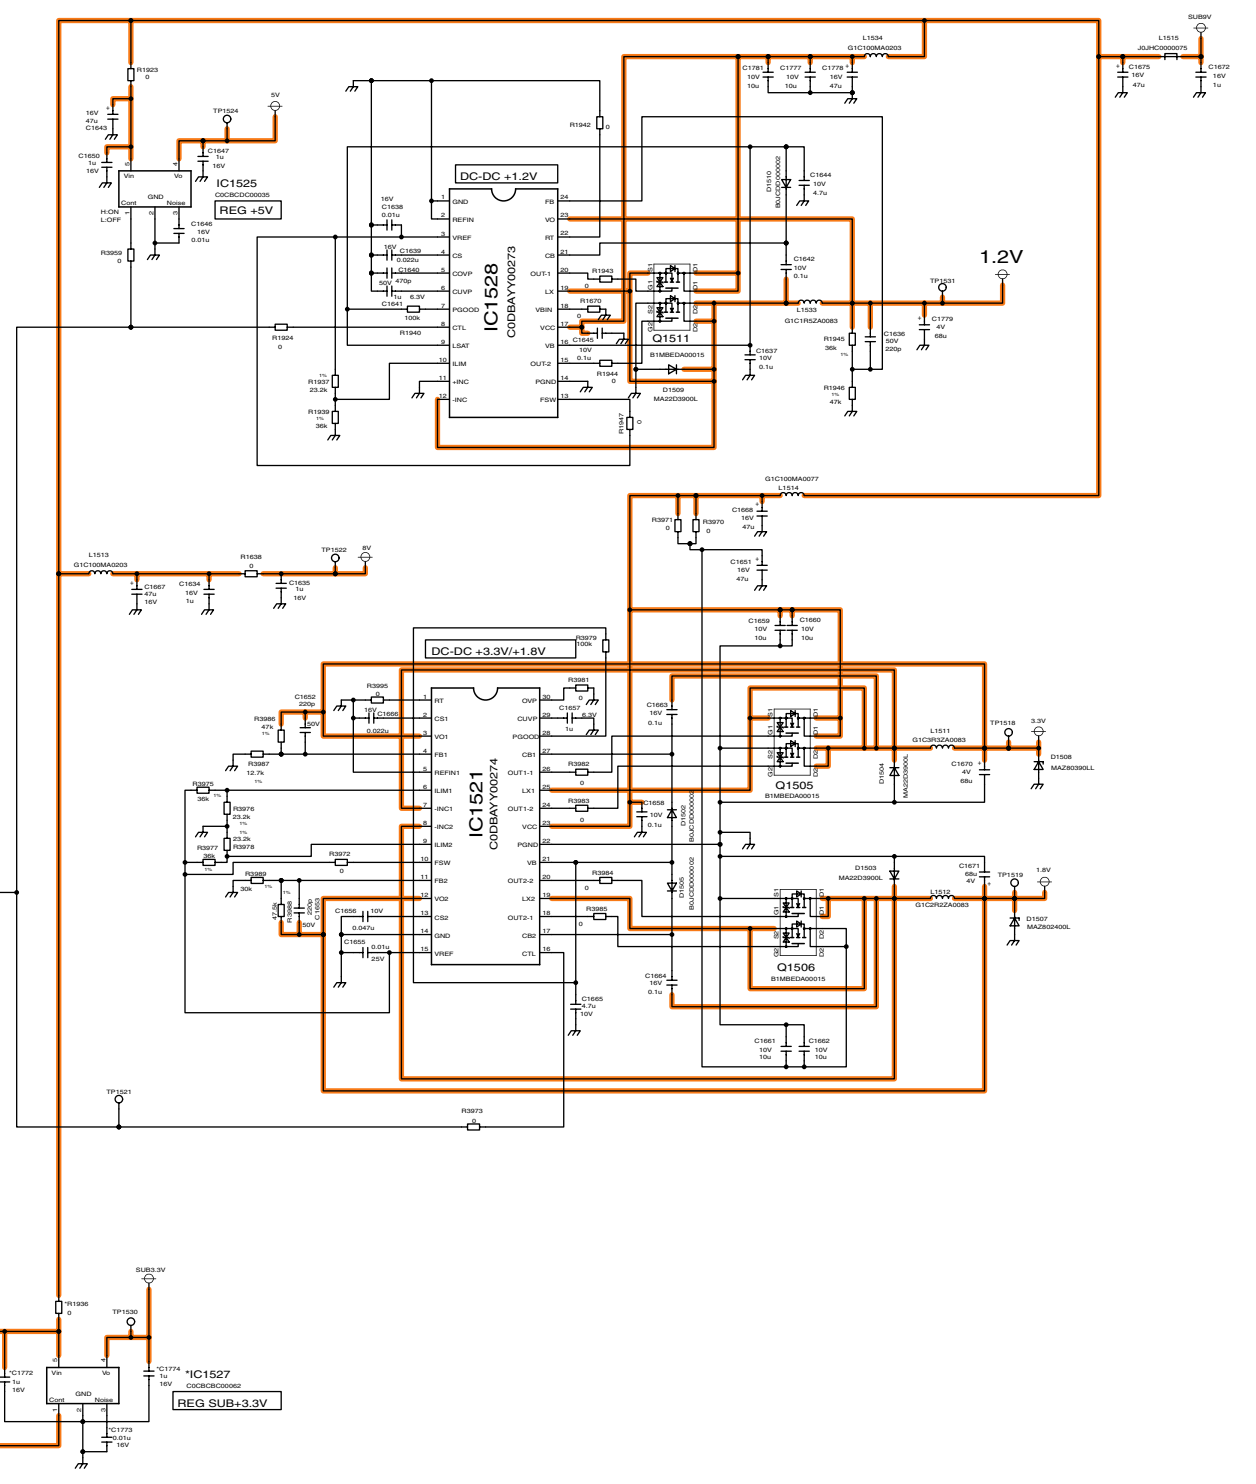

TH-58PY700AZ/M/MR, PZ700A
JG-Board (5 of 5) Schematic Diagram


15.26. DG-Board (1 of 3) Block Diagram

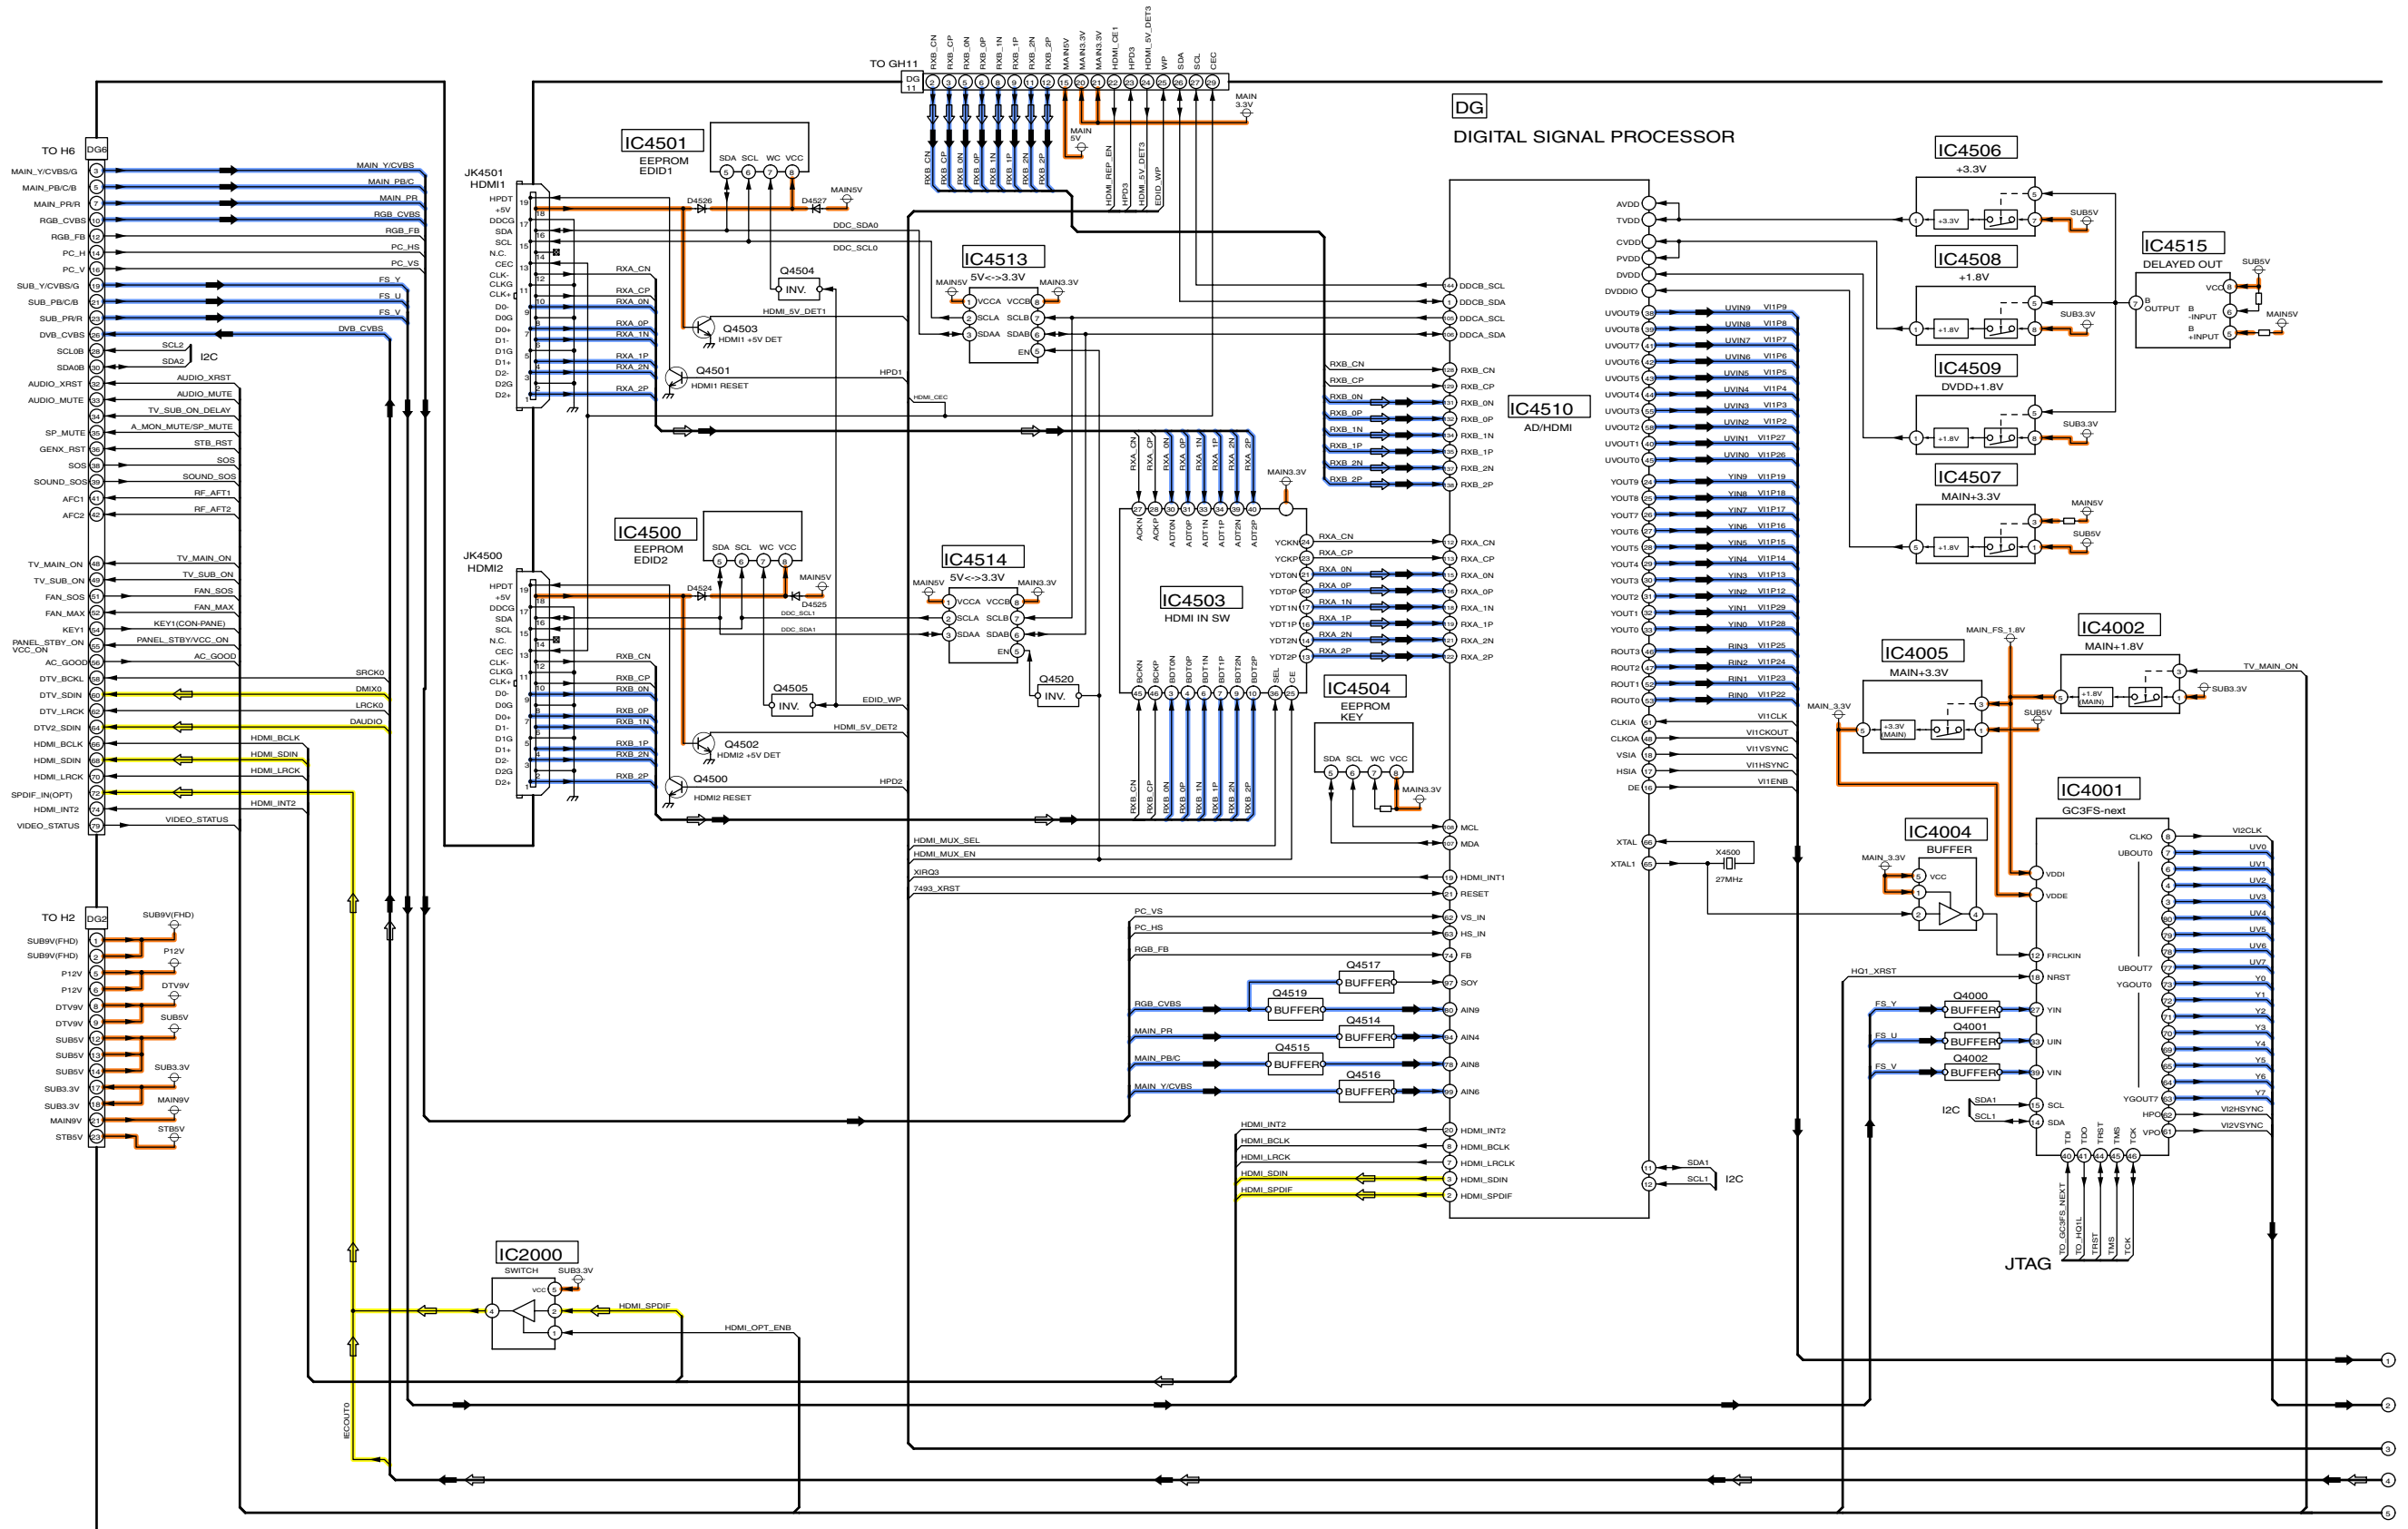

TH-58PY700AZ/M/MR, PZ700A
DG-Board (1 of 3) Block Diagram

TH-58PY700AZ/M/MR, PZ700A
DG-Board (1 of 3) Block Diagram


15.27. DG-Board (2 of 3) Block Diagram

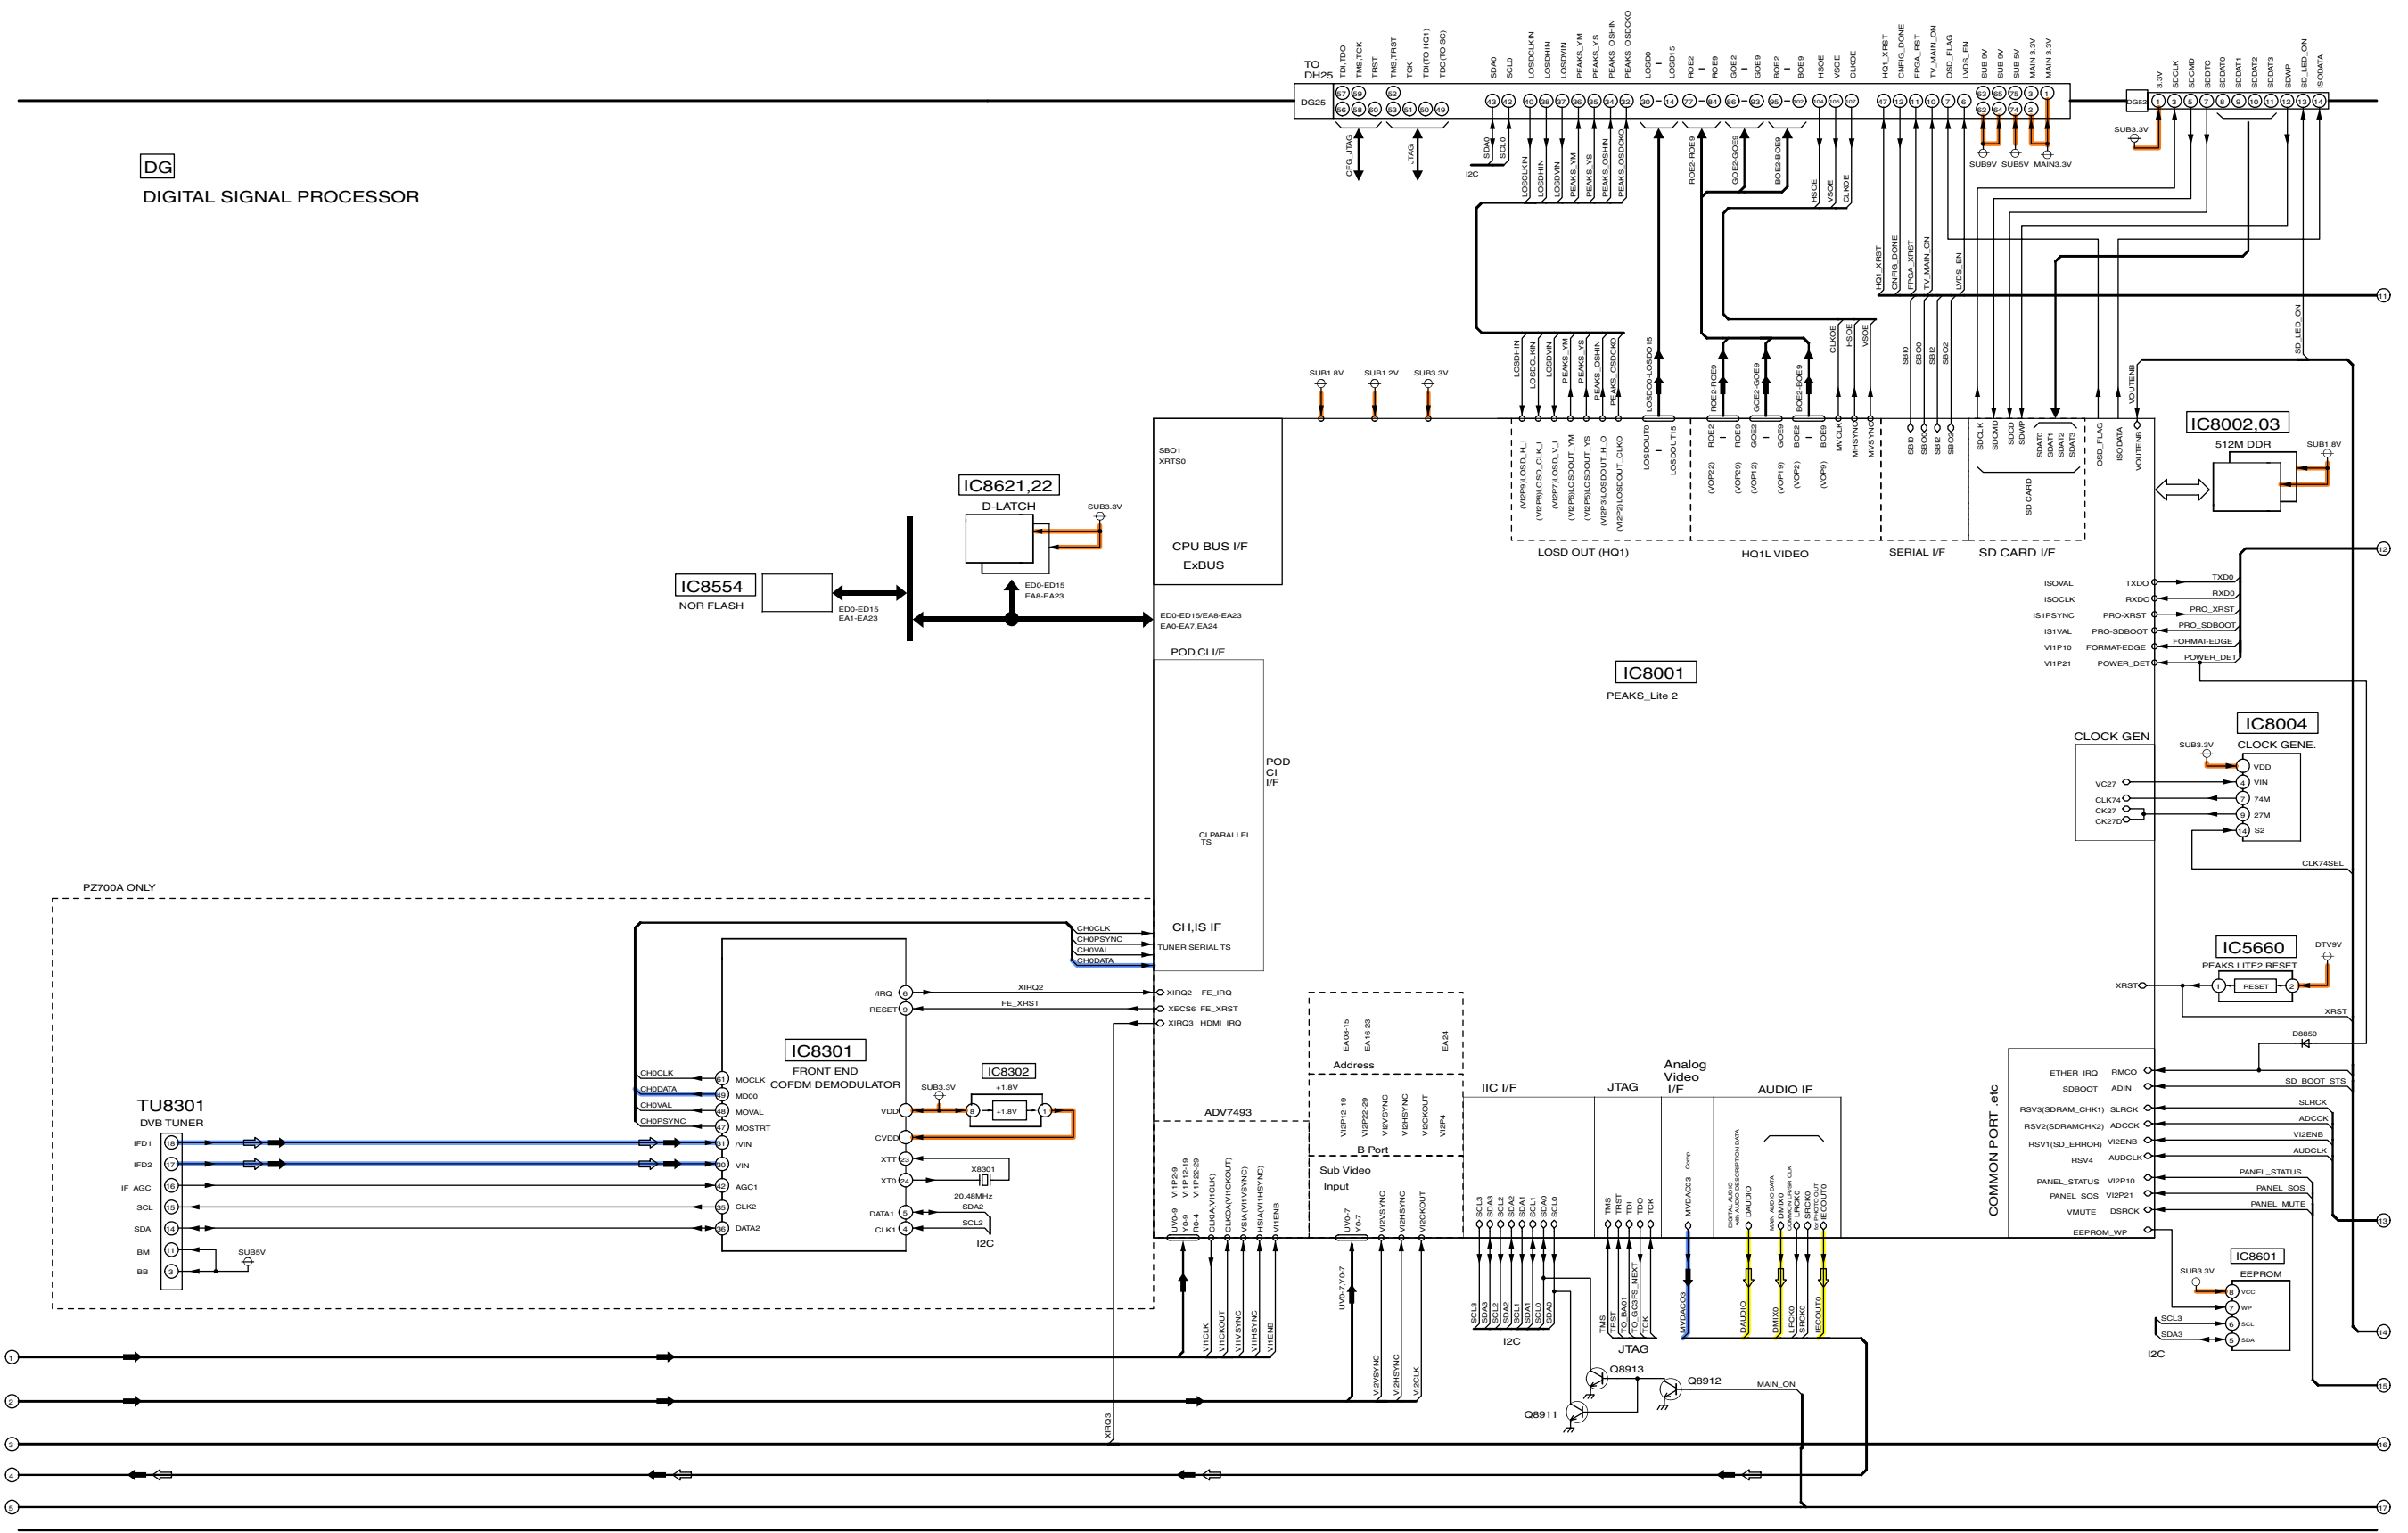

TH-58PY700AZ/M/MR, PZ700A
DG-Board (2 of 3) Block Diagram

TH-58PY700AZ/M/MR, PZ700A
DG-Board (2 of 3) Block Diagram

15.28. DG-Board (3 of 3) Block Diagram

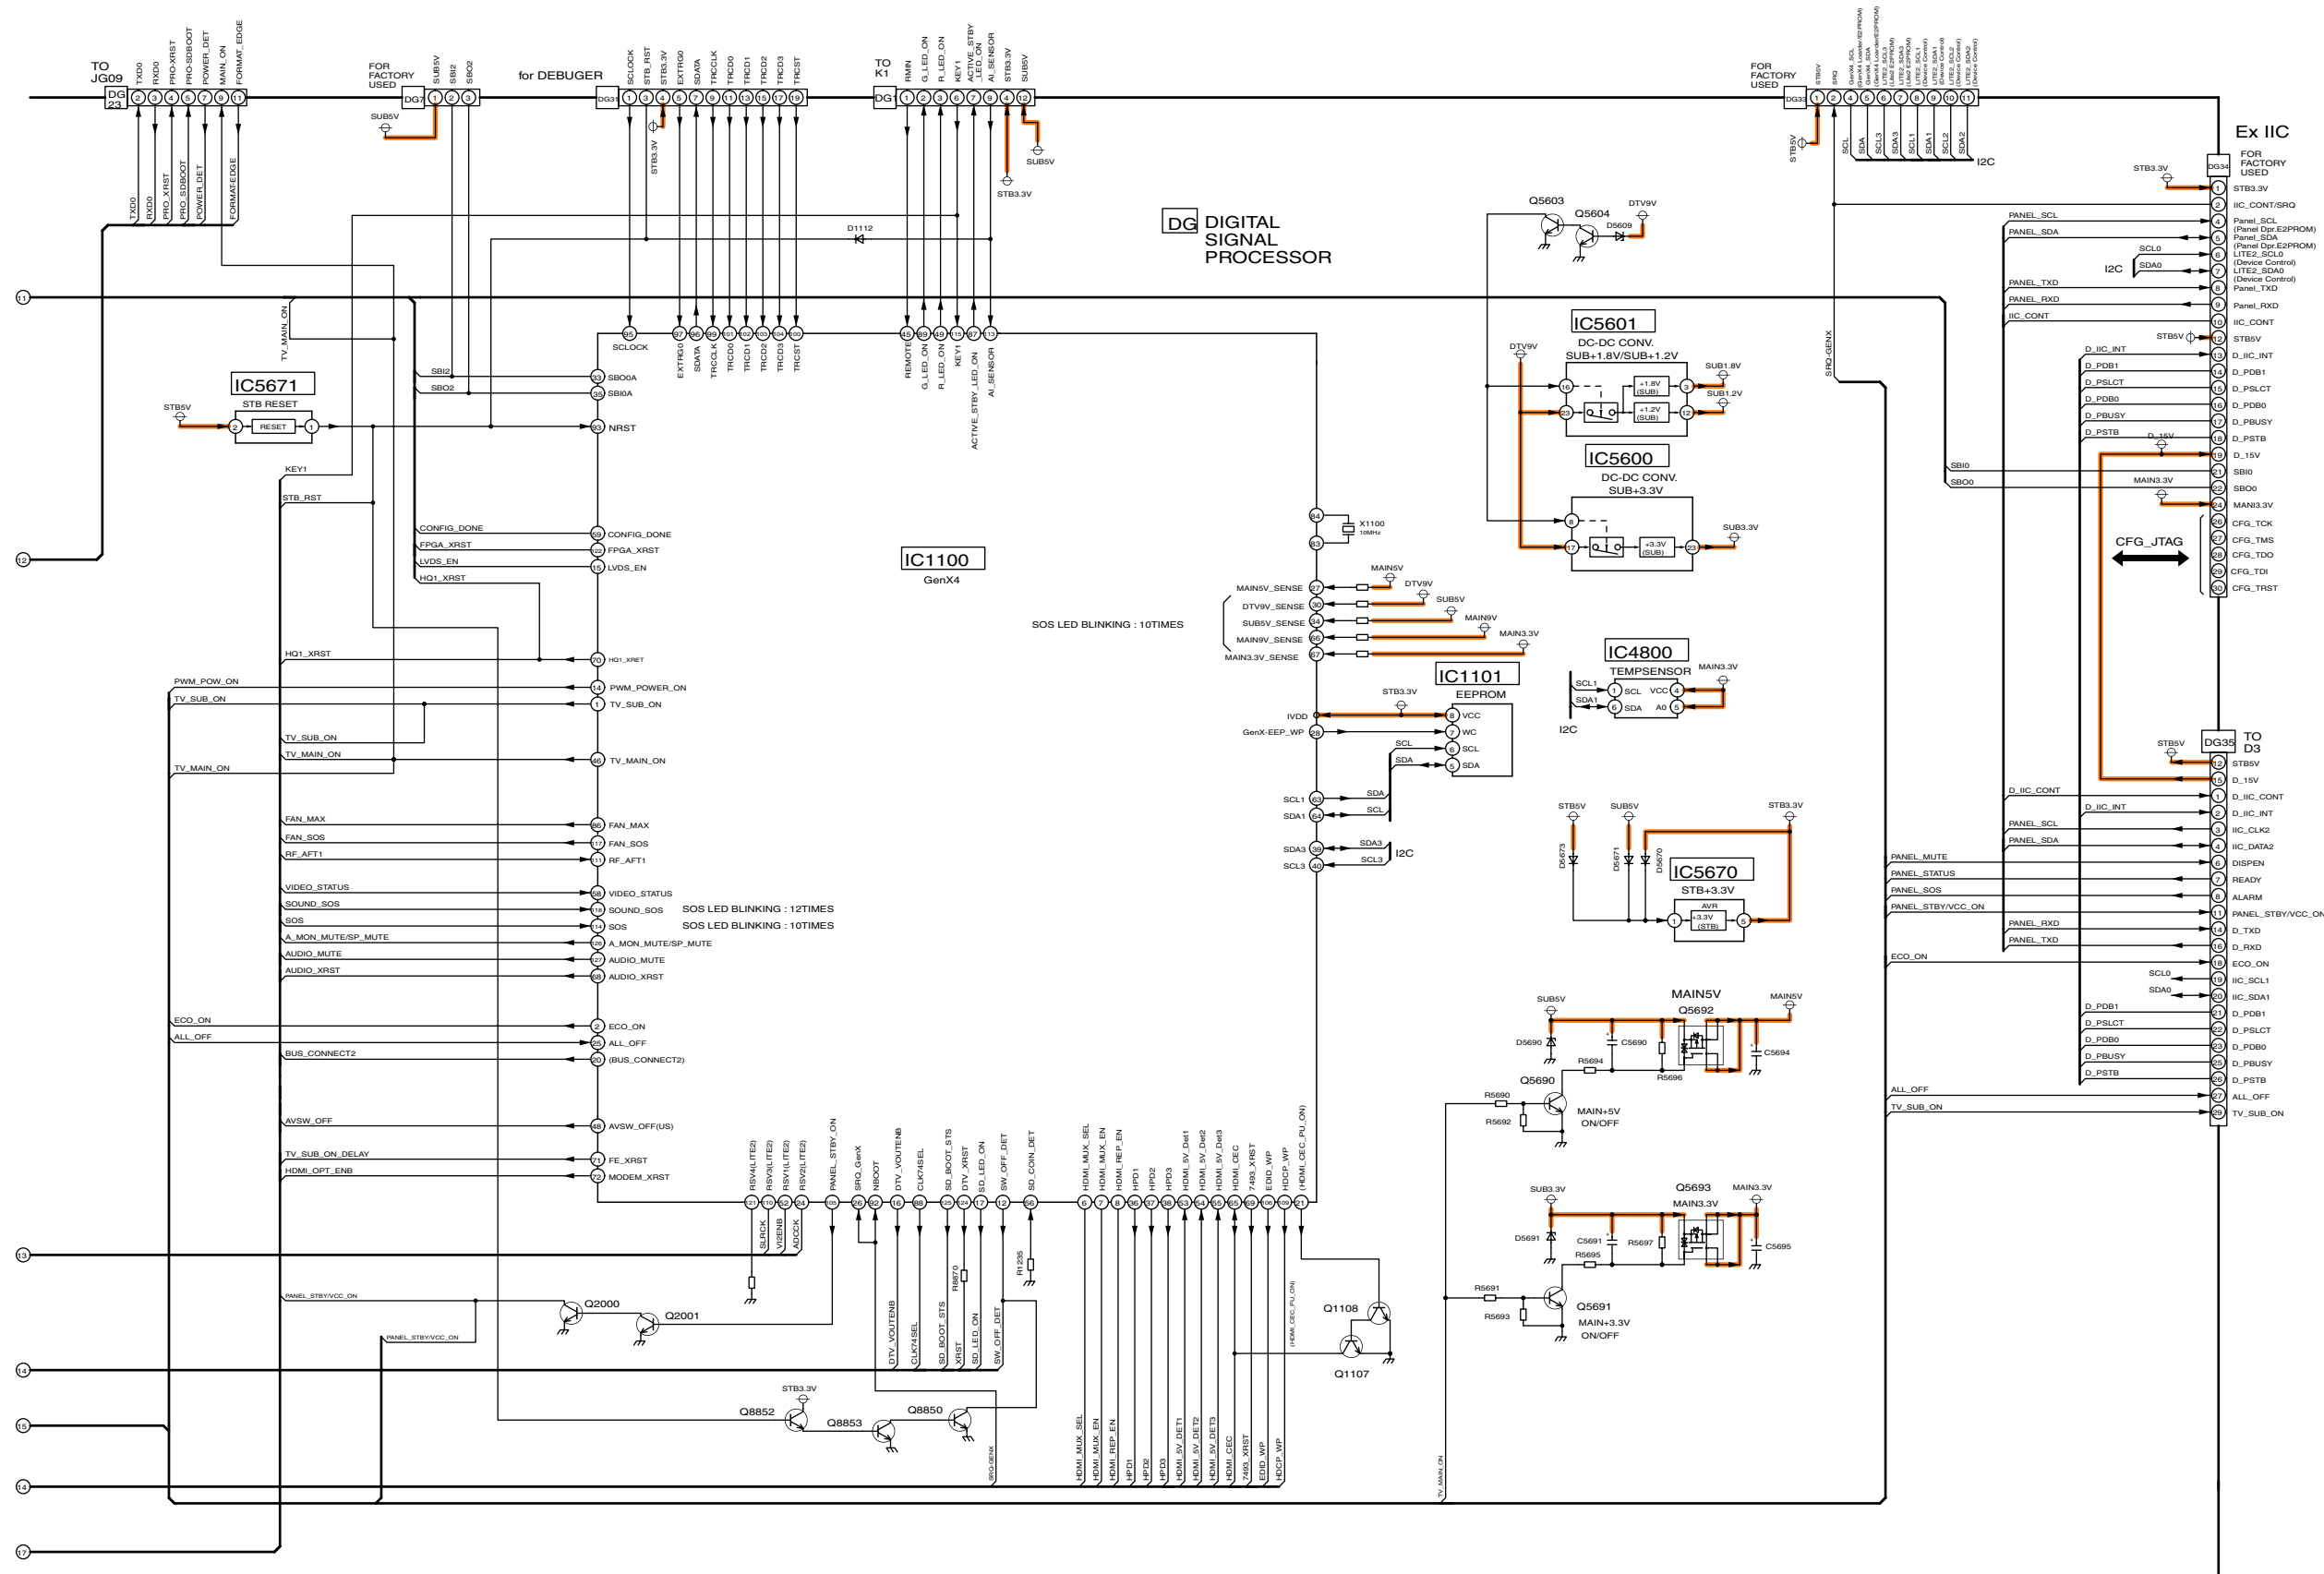

TH-58PY700AZ/M/MR, PZ700A
DG-Board (3 of 3) Block Diagram


TH-58PY700AZ/M/MR, PZ700A
DG-Board (3 of 3) Block Diagram

15.29. DG-Board (1 of 12) Schematic Diagram

DG-BOARD (1/12)
TXNDG1HGTA (700A) TXNDG1HGTM (700M)
TXNDG1HGTP (700AZ) TXNDG1HGTX (700MR)

Peaks-Lite2/DDR2
 CRNo.8000-8299


IC8001
 MN2WS039A
 Peaks Lite 2

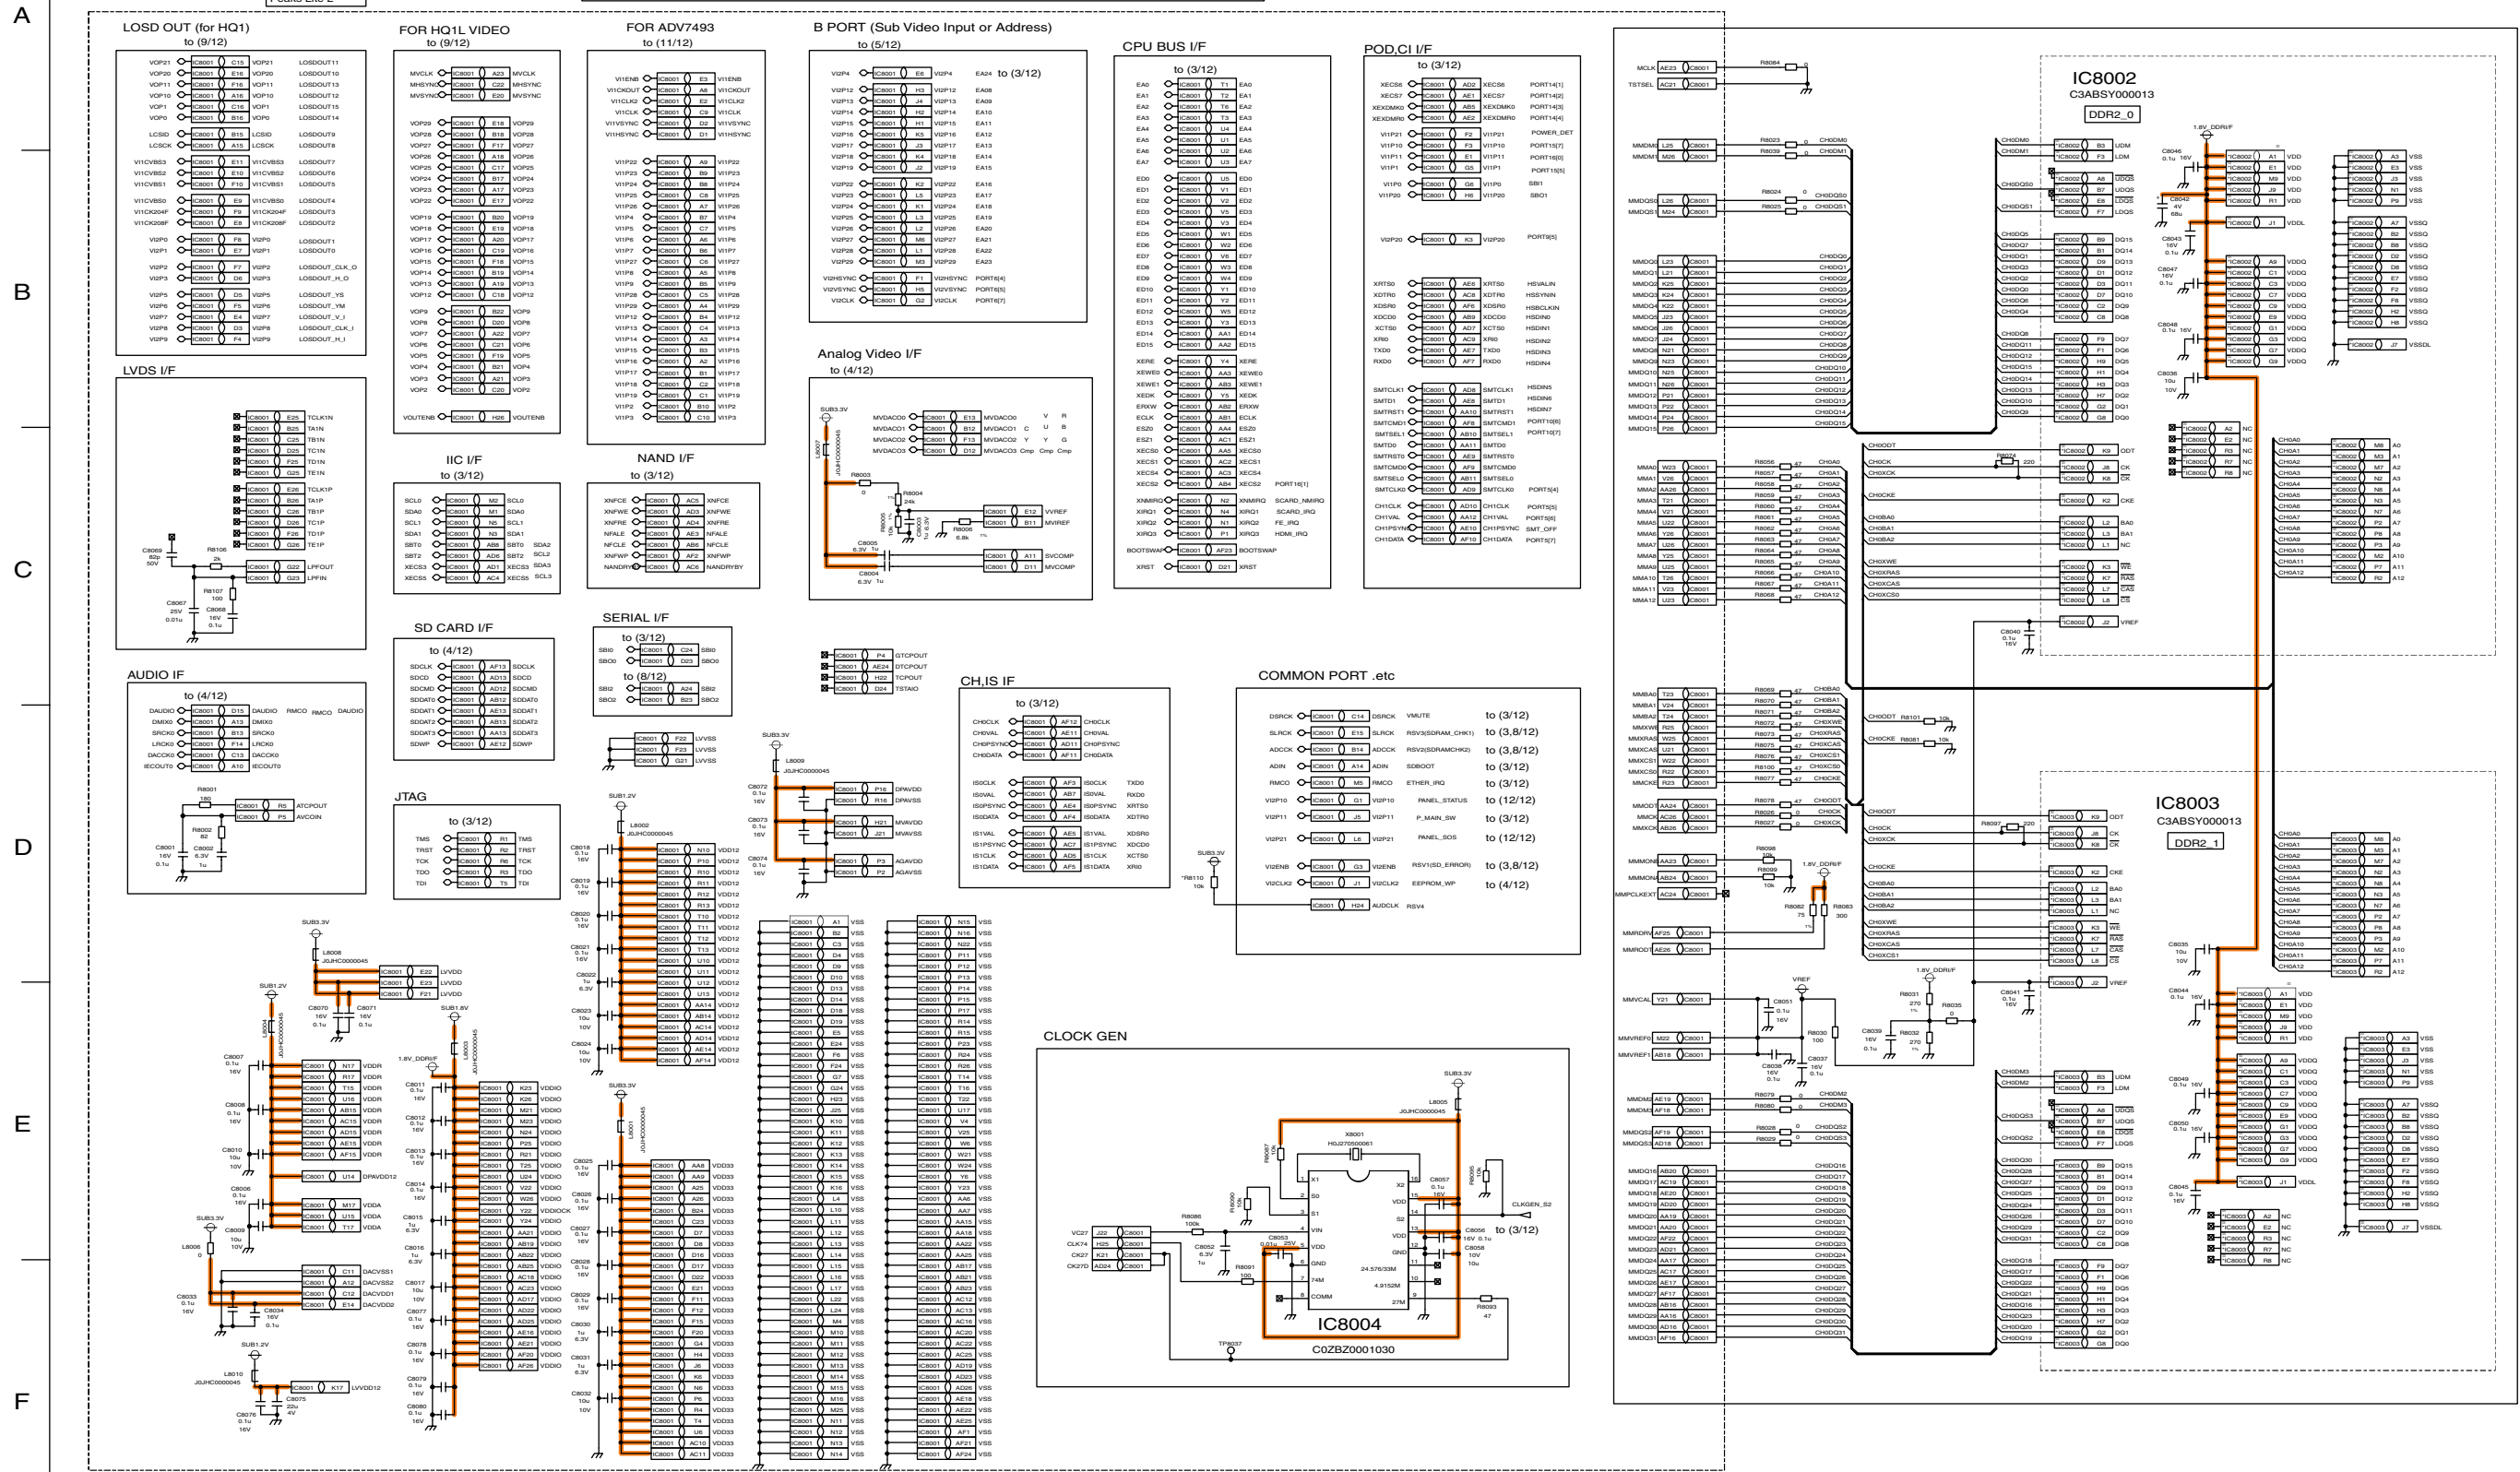

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (1 of 12) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (1 of 12) Schematic Diagram

15.30. DG-Board (2 of 12) Schematic Diagram

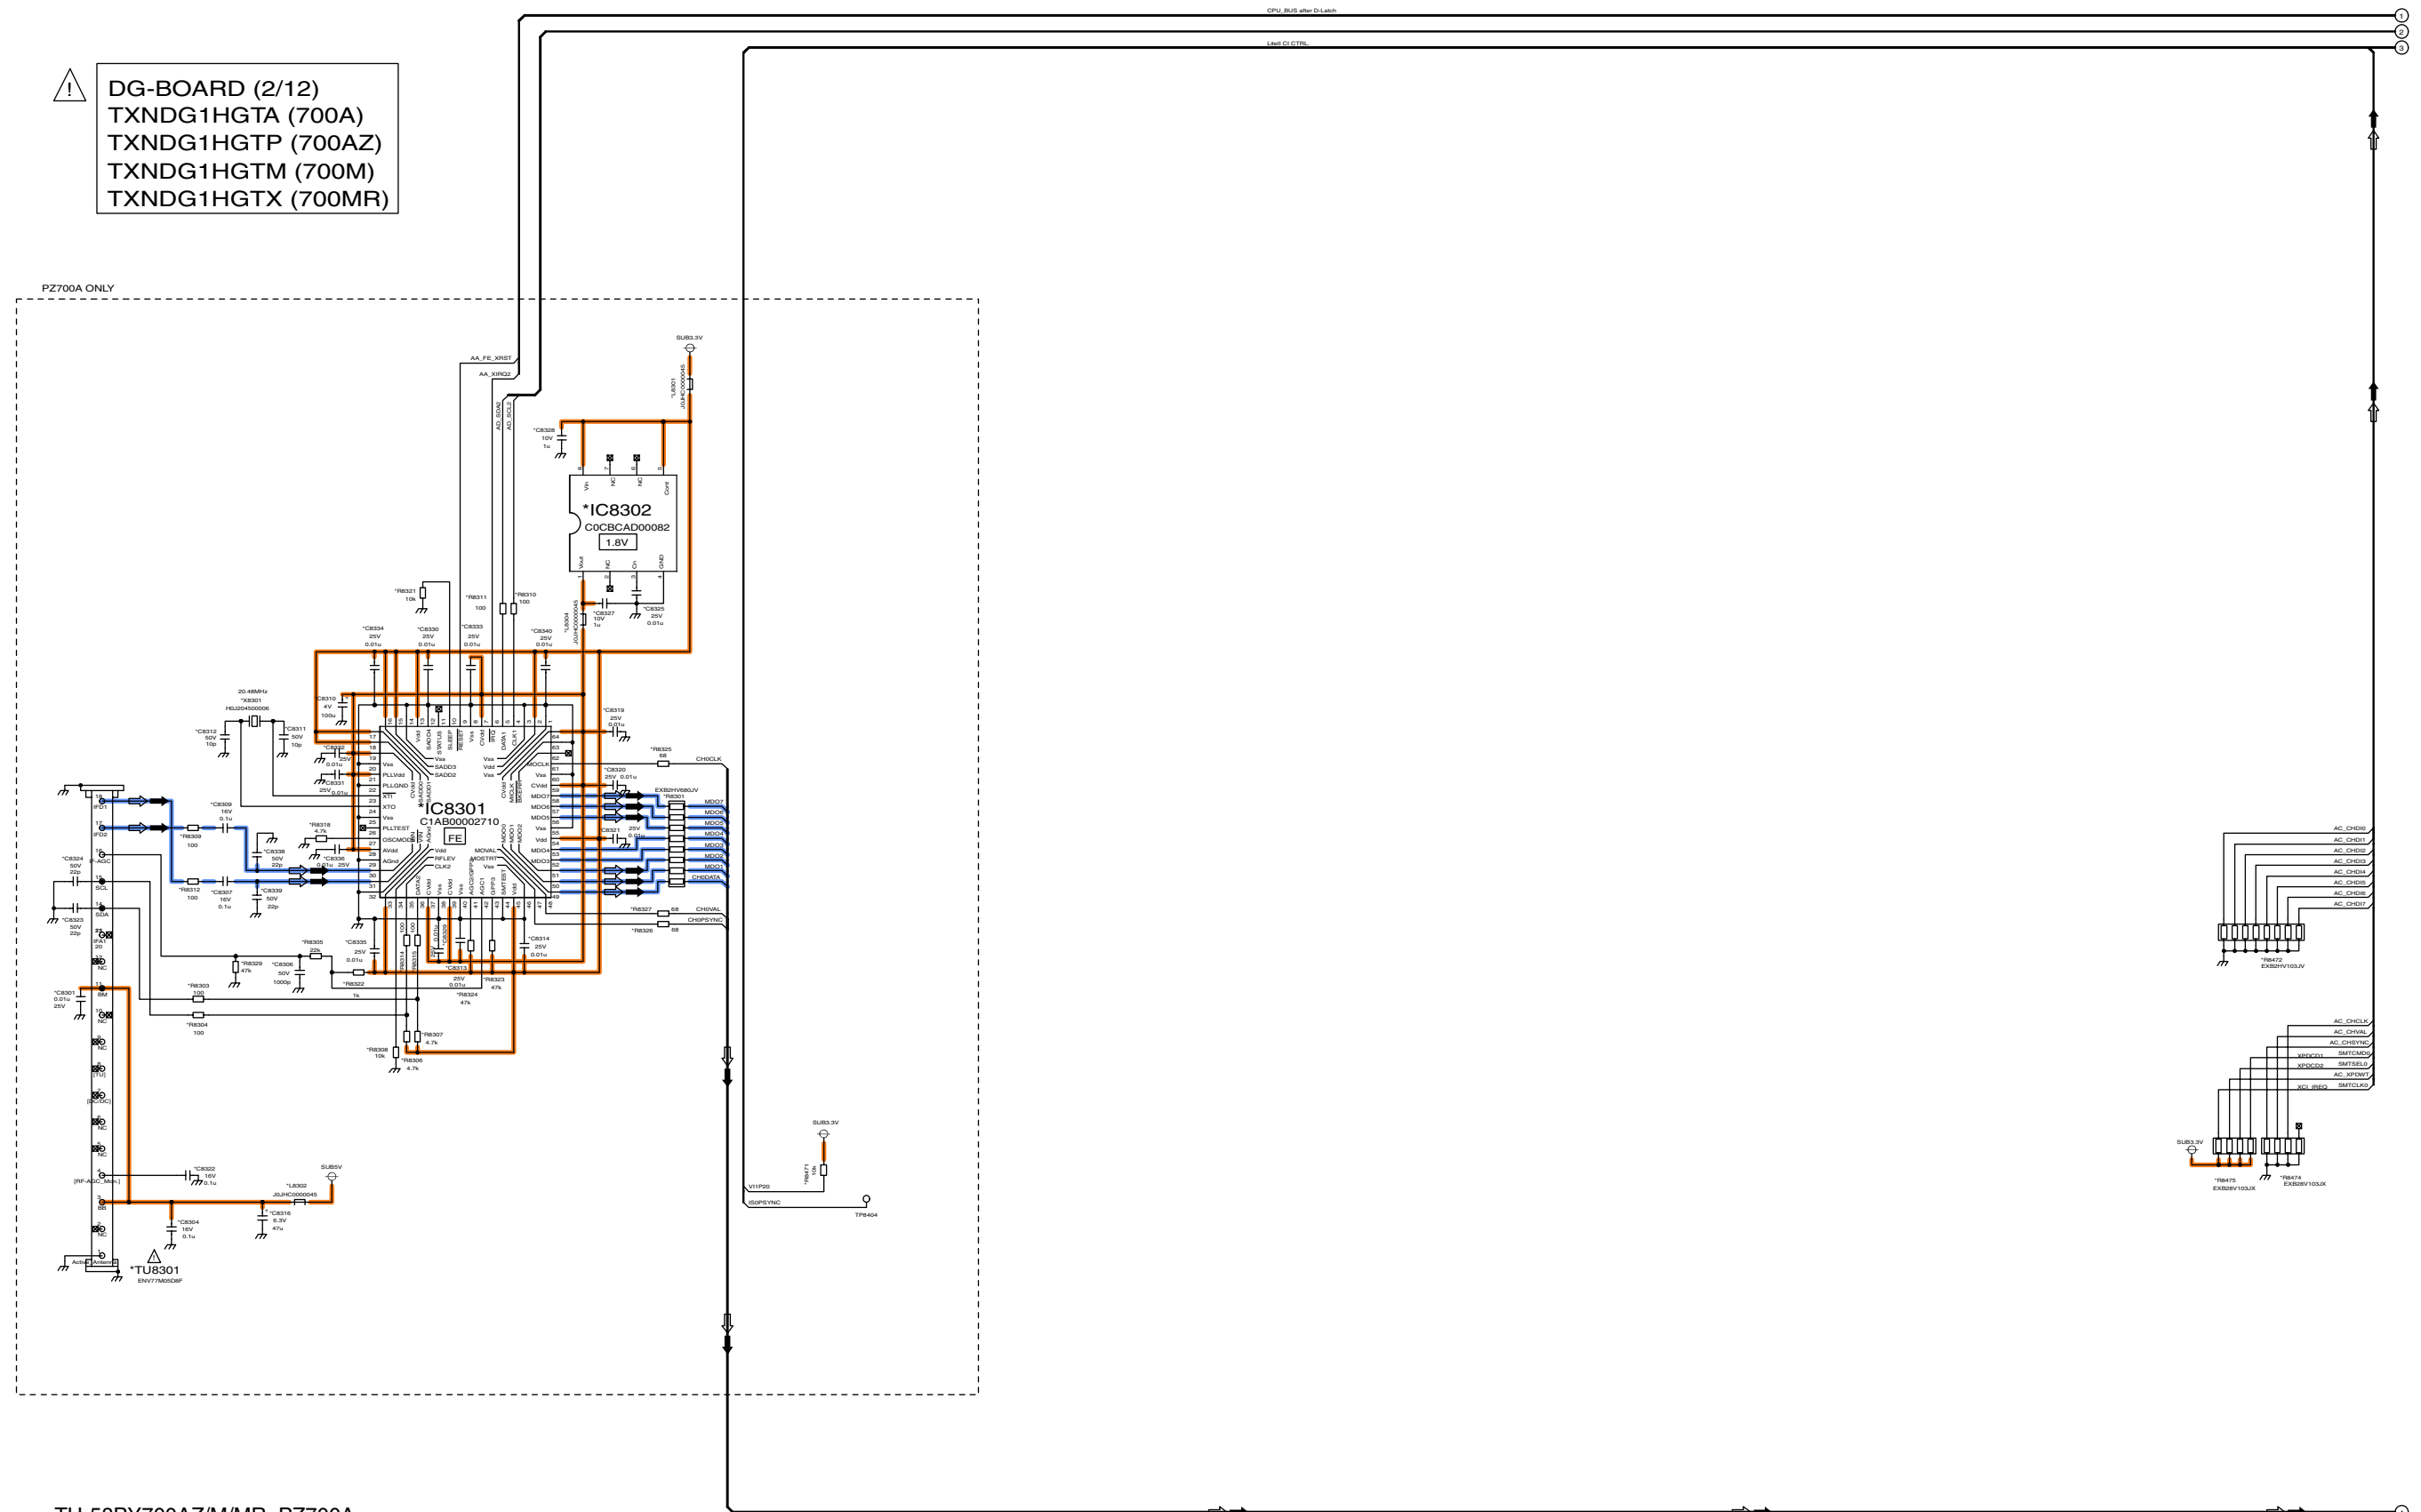

⚠ DG-BOARD (2/12)
TXNDG1HGTA (700A)
TXNDG1HGTP (700AZ)
TXNDG1HGTM (700M)
TXNDG1HGTX (700MR)

PZ700A ONLY

TH-58PY700AZ/M/MR, PZ700A
DG-Board (2 of 12) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A DG-Board (2 of 12) Schematic Diagram

10

11

12

13

14


15

16

17

18

15.31. DG-Board (3 of 12) Schematic Diagram

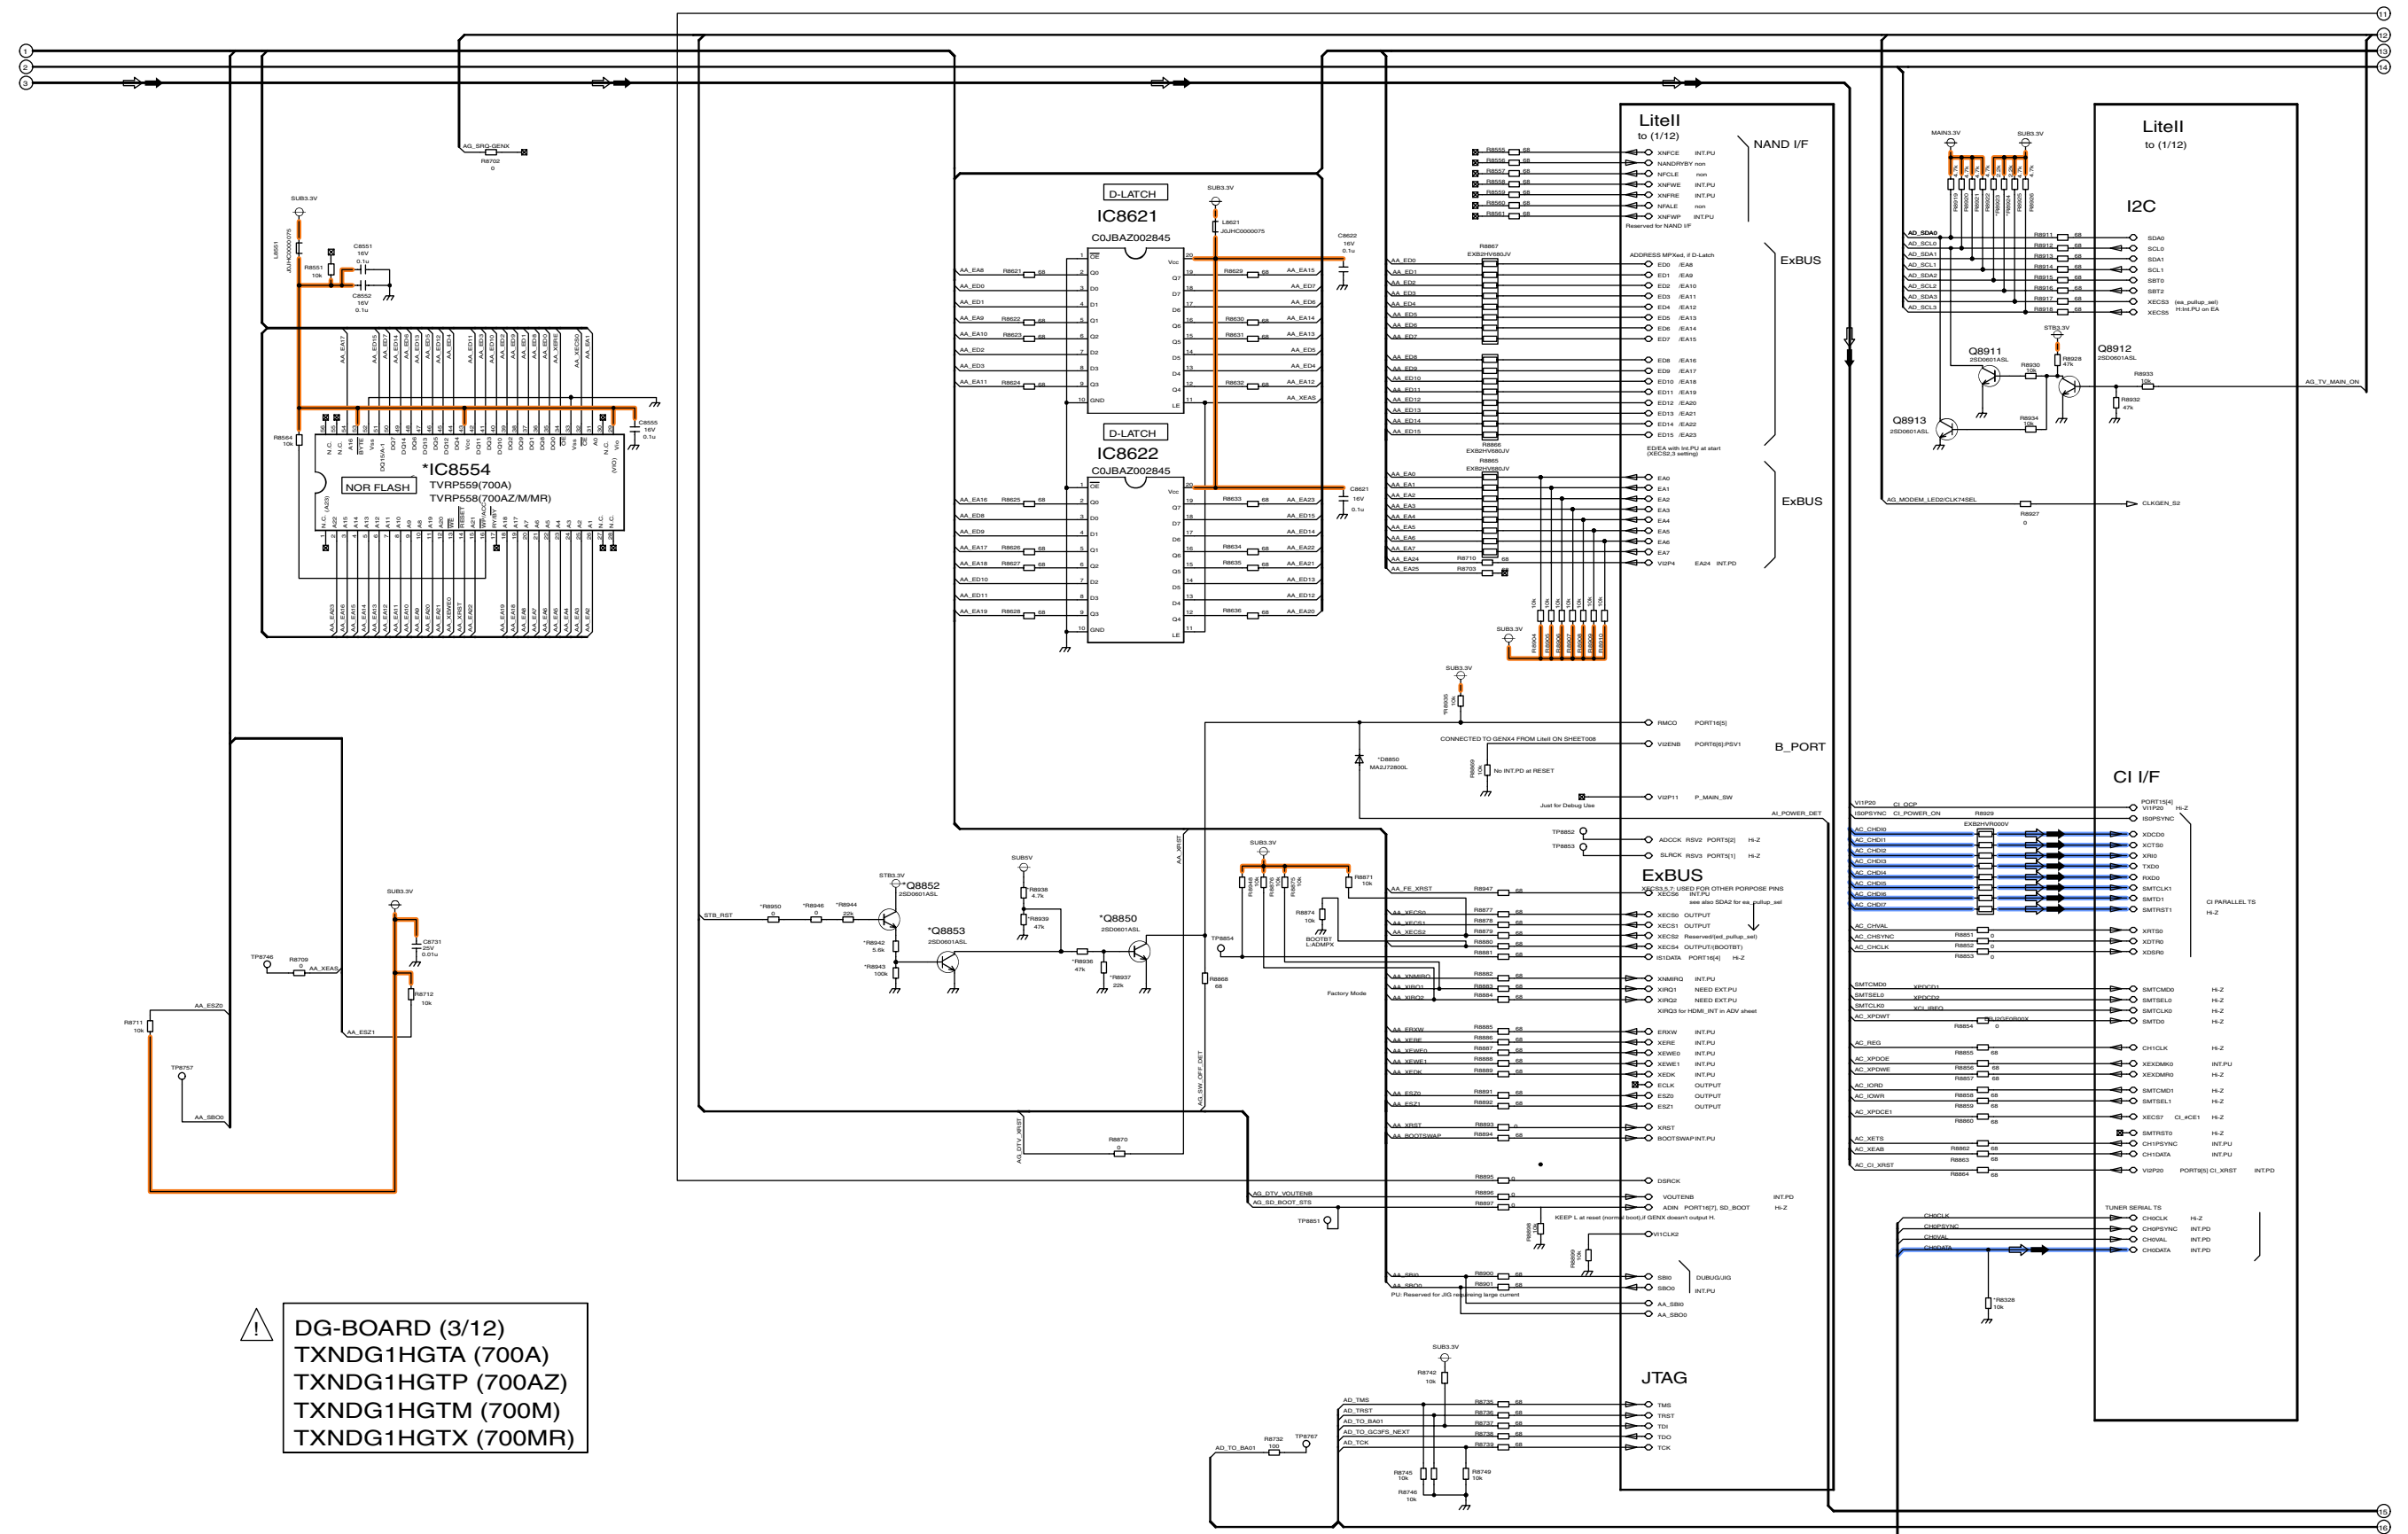

⚠️ **DG-BOARD (3/12)**
 TXNDG1HGTA (700A)
 TXNDG1HGTP (700AZ)
 TXNDG1HGTM (700M)
 TXNDG1HGTX (700MR)

TH-58PY700AZ/M/MR, PZ700A DG-Board (3 of 12) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A DG-Board (3 of 12) Schematic Diagram

19

20

21

22

23


24

25

26

27

15.32. DG-Board (4 of 12) Schematic Diagram

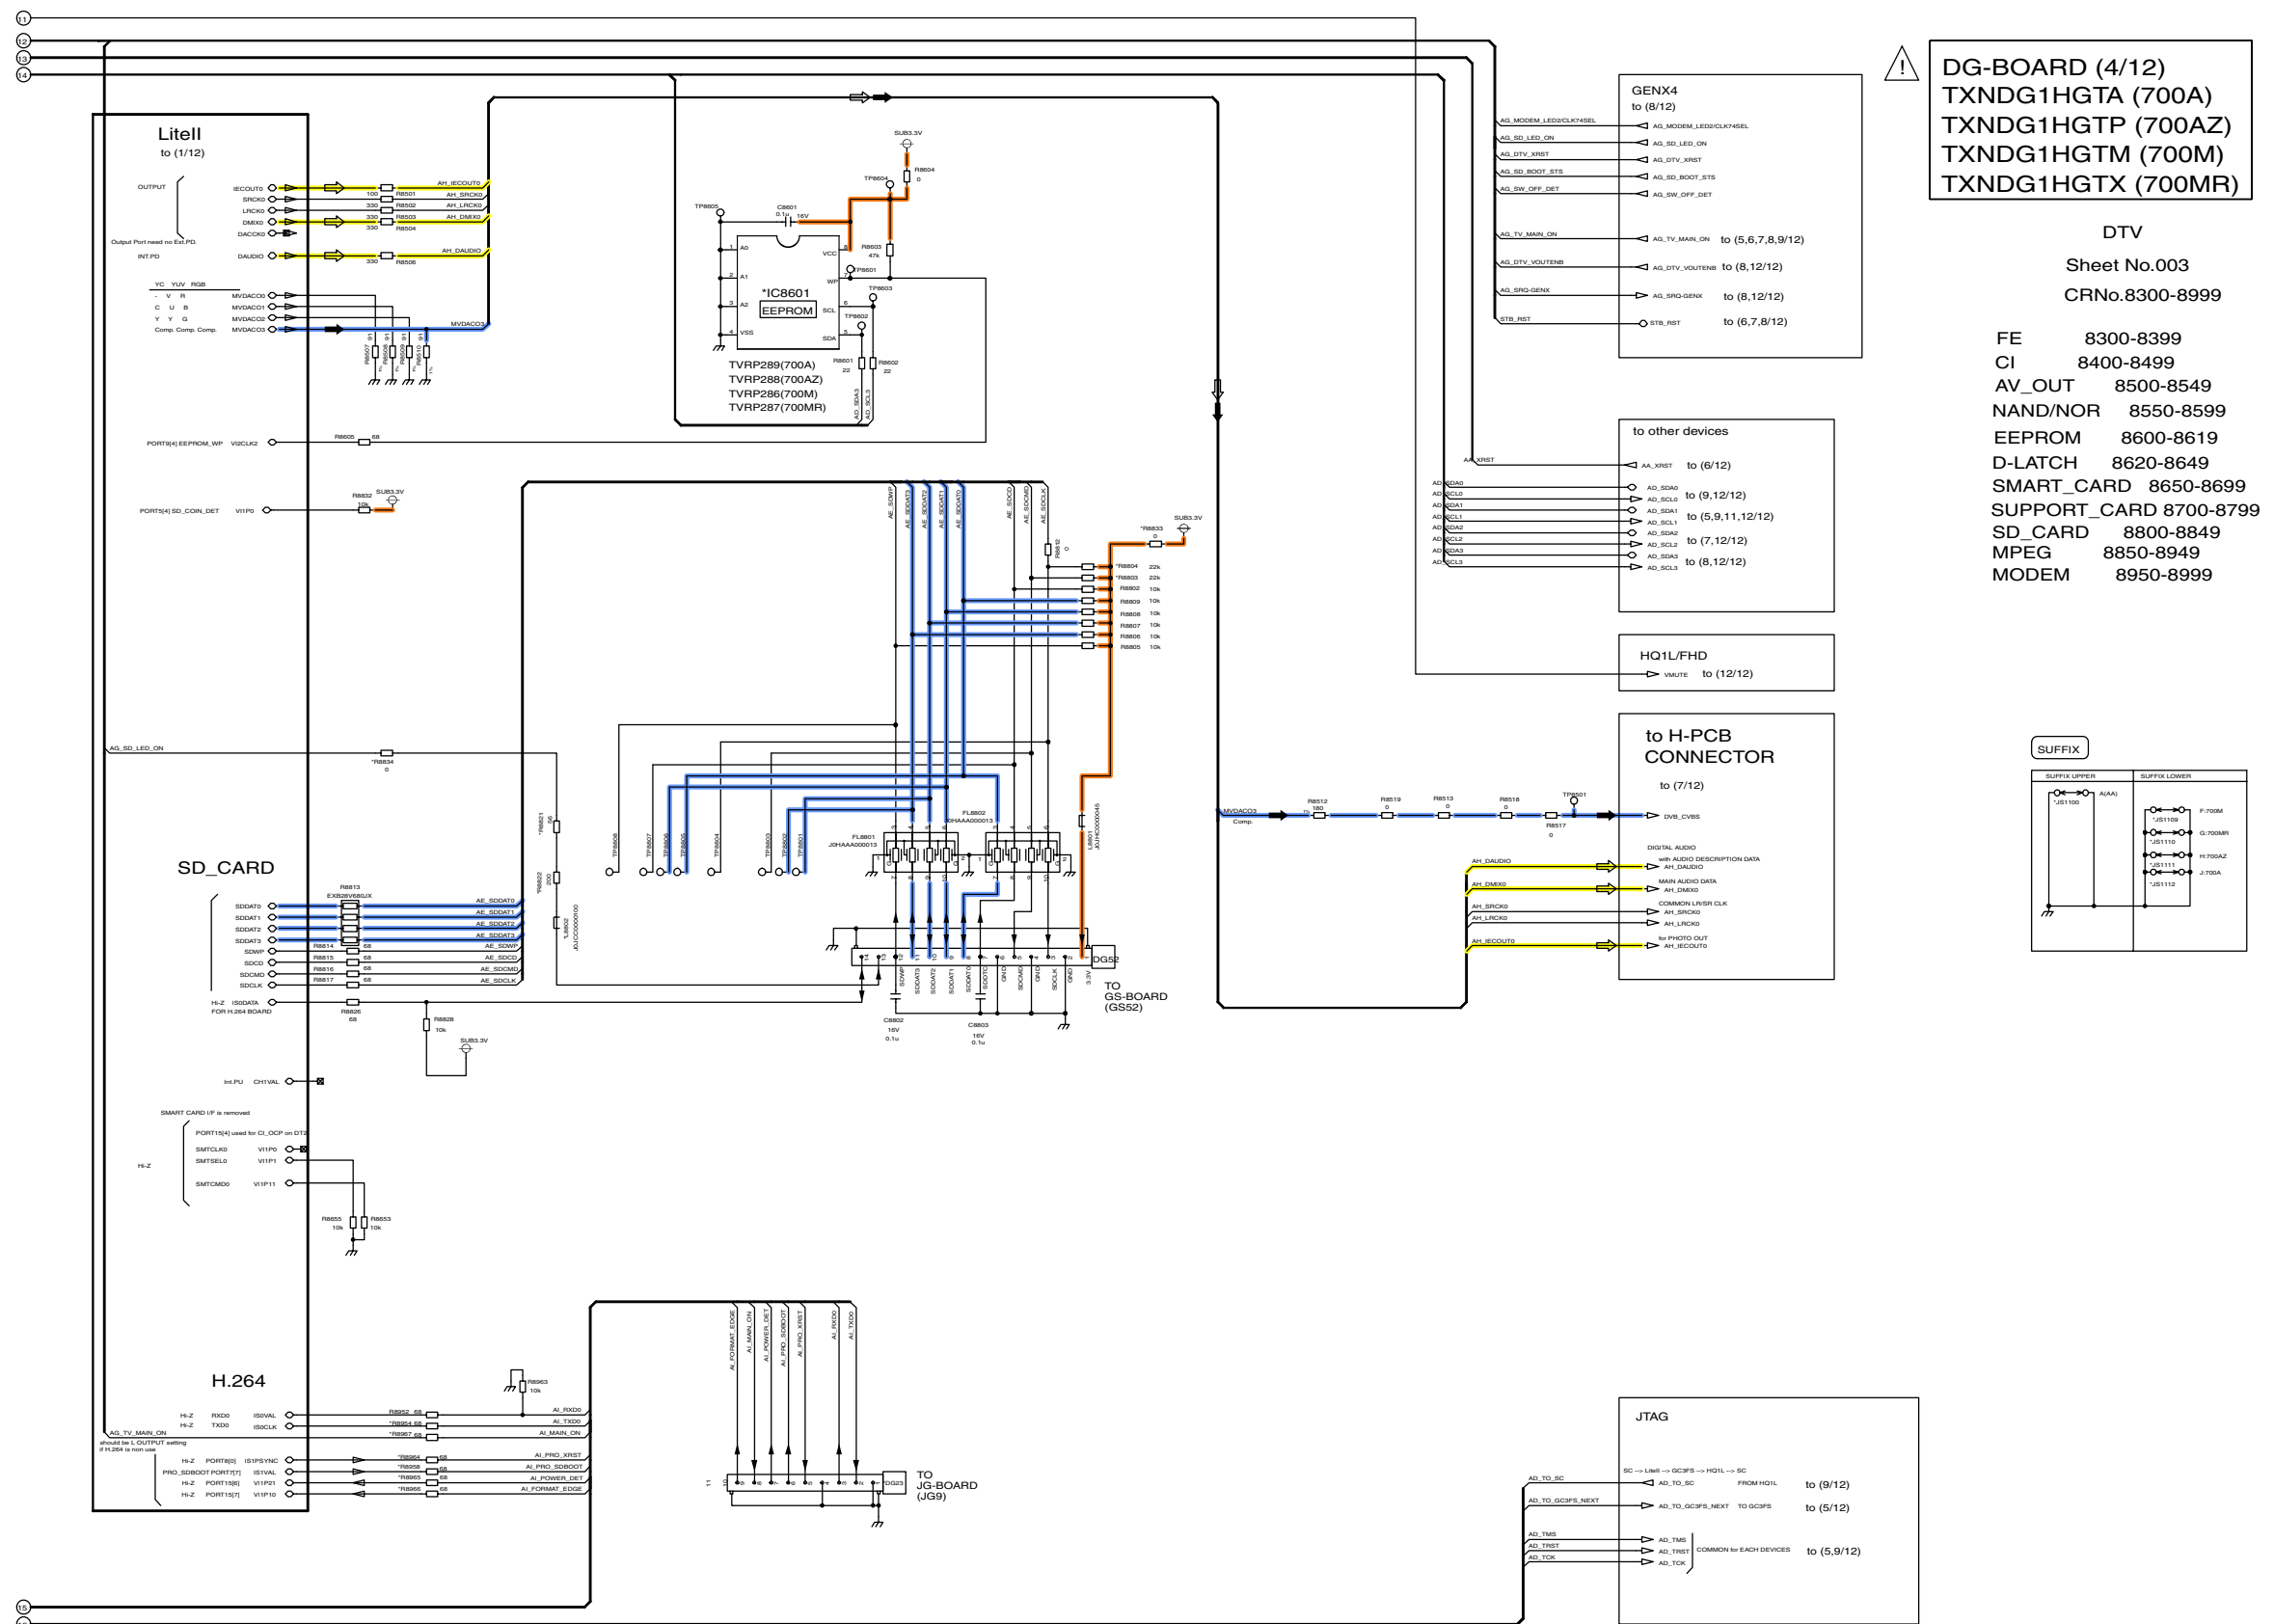


TH-58PY700AZ/M/MR, PZ700A
 DG-Board (4 of 12) Schematic Diagram





TH-58PY700AZ/M/MR, PZ700A
 DG-Board (4 of 12) Schematic Diagram

15.33. DG-Board (5 of 12) Schematic Diagram

! DG-BOARD (5/12)
 TXNDG1HGTA (700A)
 TXNDG1HGTP (700AZ)
 TXNDG1HGTM (700M)
 TXNDG1HGTX (700MR)
 GC3FS-next
 CRNo.4000-4199

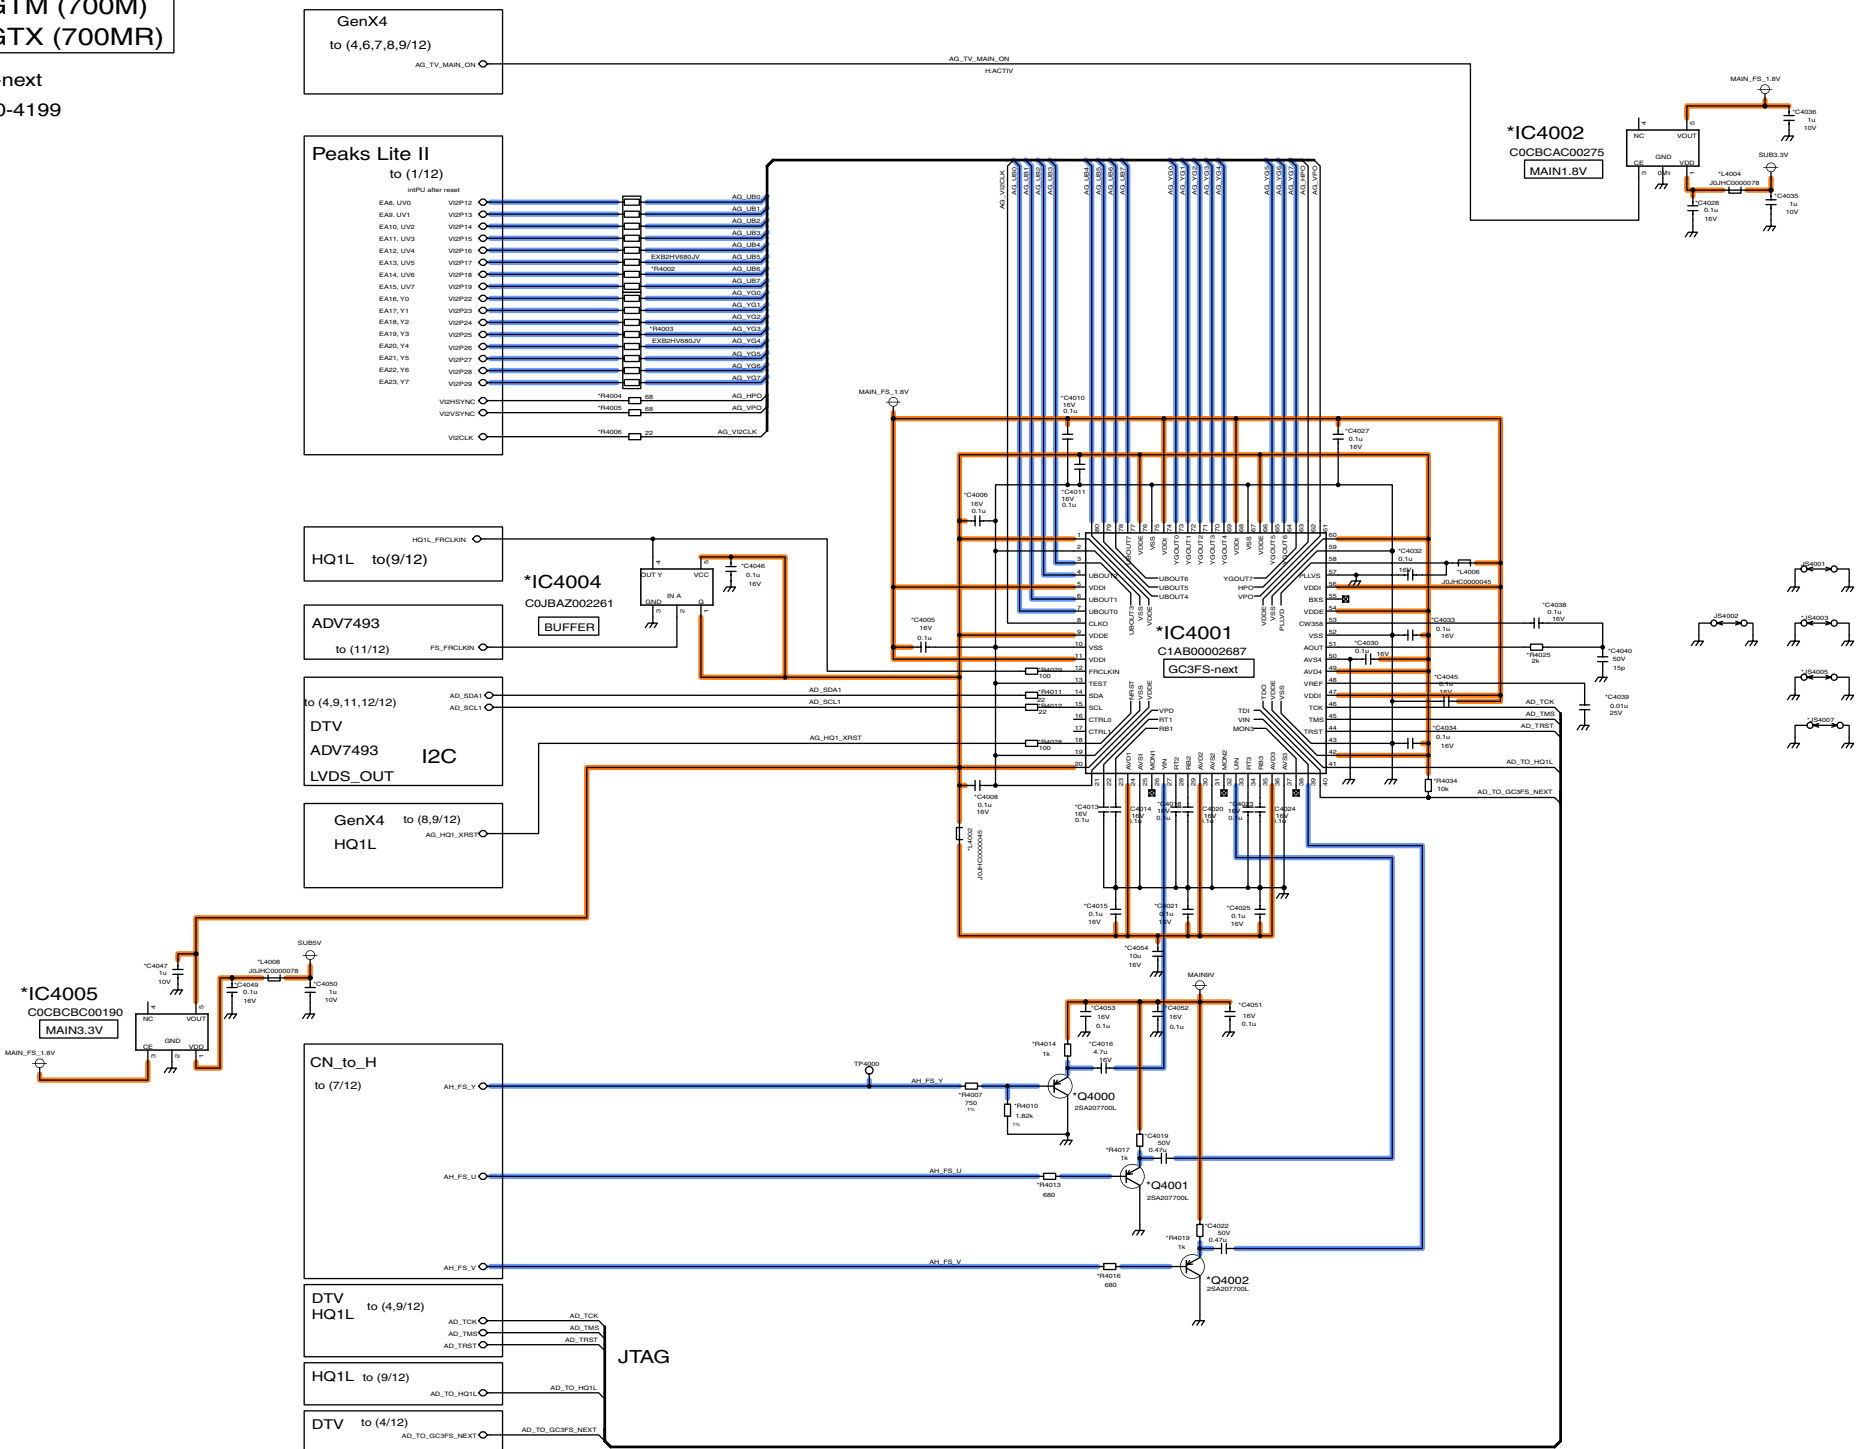




15.34. DG-Board (6 of 12) Schematic Diagram

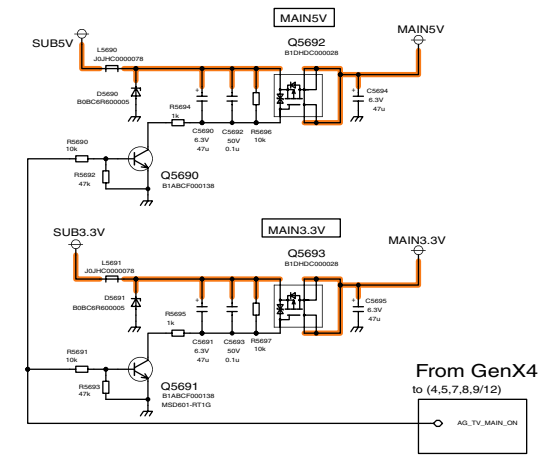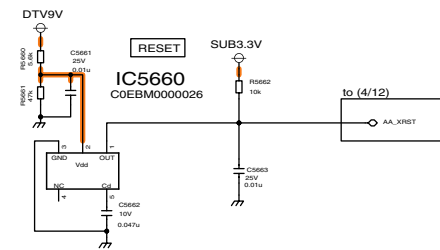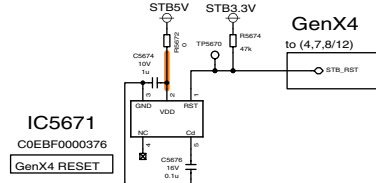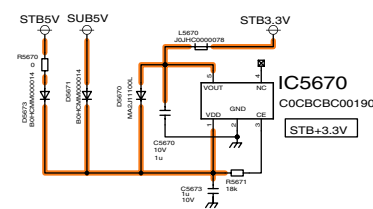

DG-BOARD (6/12)
 TXNDG1HGTA (700A)
 TXNDG1HGTP (700AZ)
 TXNDG1HGTM (700M)
 TXNDG1HGTX (700MR)

CRNo.5600-5749

Peaks-LITE2 POWER 5600-5659
 Peaks-LITE2 RST 5660-5669
 GenX4 POWER/RST 5670-5689
 MAIN5V/MAIN3.3V 5690-5709
 DG-H Connector 5710-5729
 DG-G Connector 5730-5749

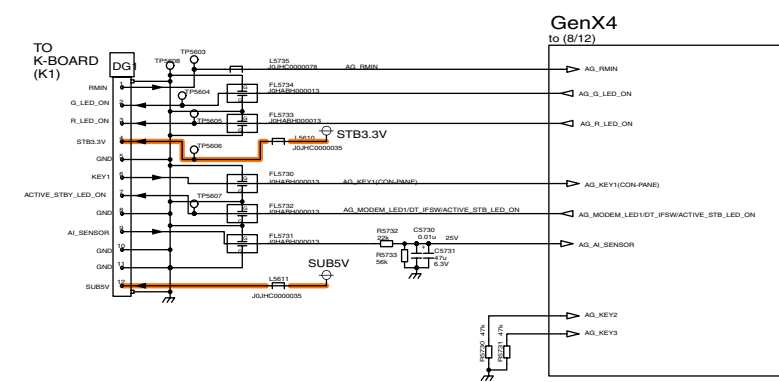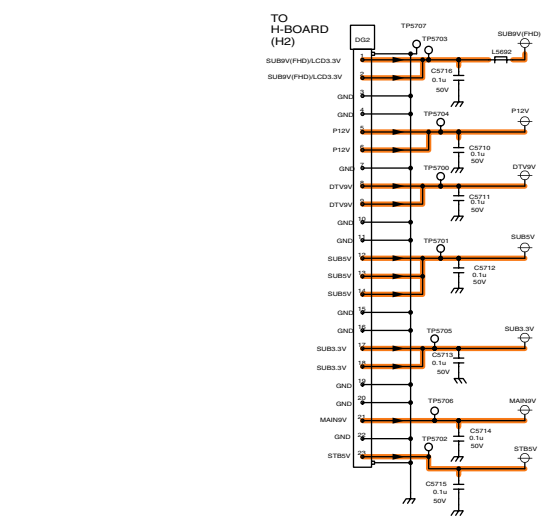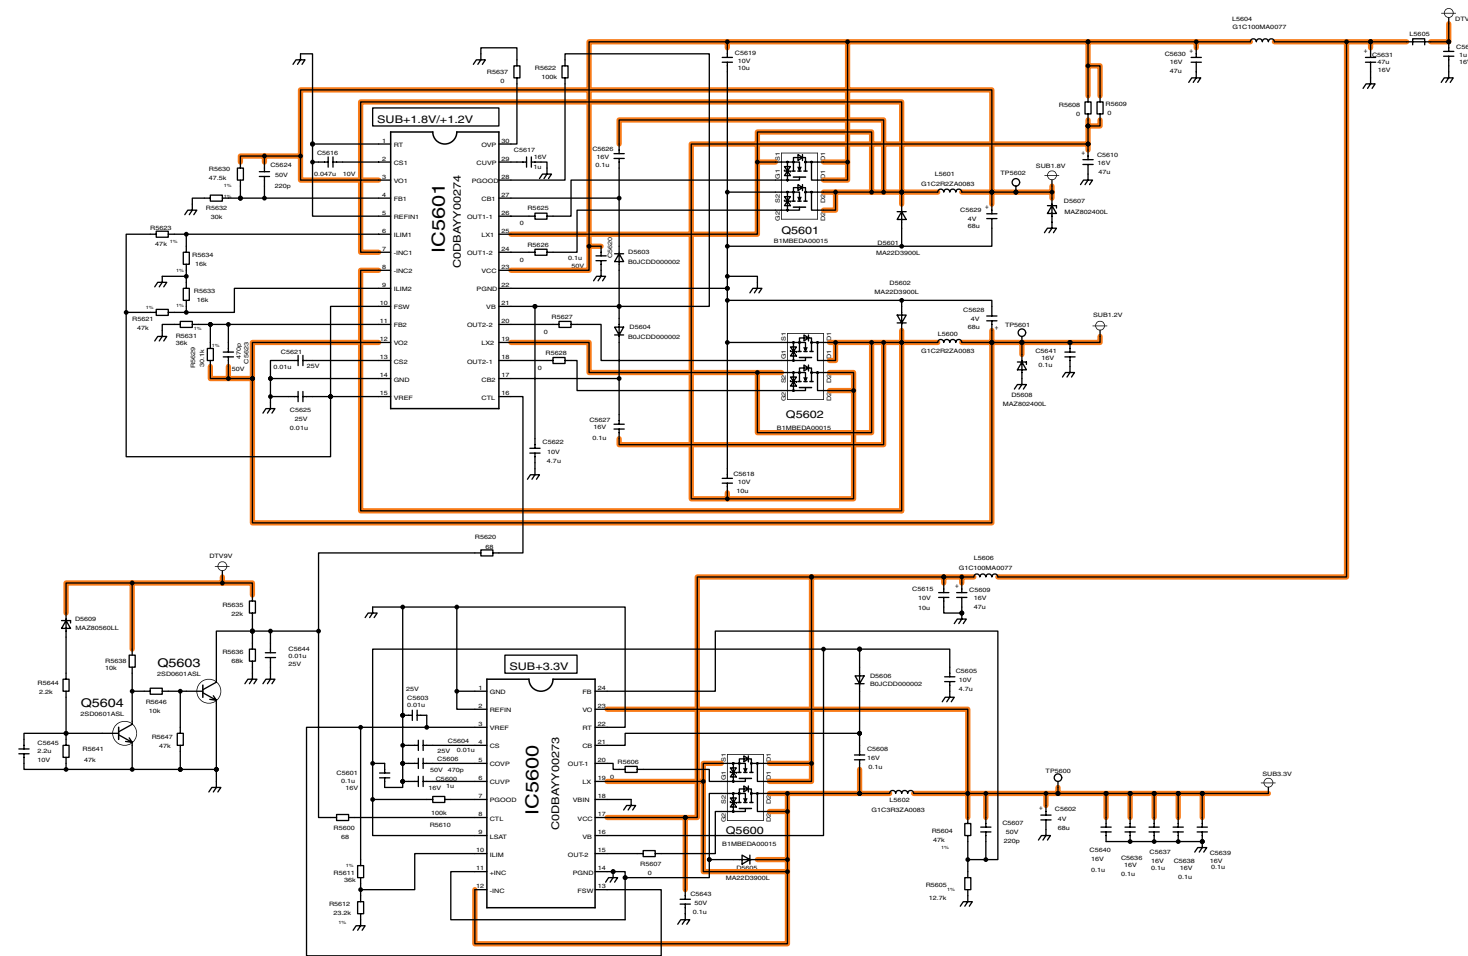


TH-58PY700AZ/M/MR, PZ700A
 DG-Board (6 of 12) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (6 of 12) Schematic Diagram

15.35. DG-Board (7 of 12) Schematic Diagram

⚠ DG-BOARD (7/12)
 TXNDG1HGTA (700A)
 TXNDG1HGTP (700AZ)
 TXNDG1HGTM (700M)
 TXNDG1HGTX (700MR)


CN to H
 CRNo.3000-3199:AVSW
 CRNo.2000-2299:Without AVSW
 CRNo.2699-2999:Without AVSW

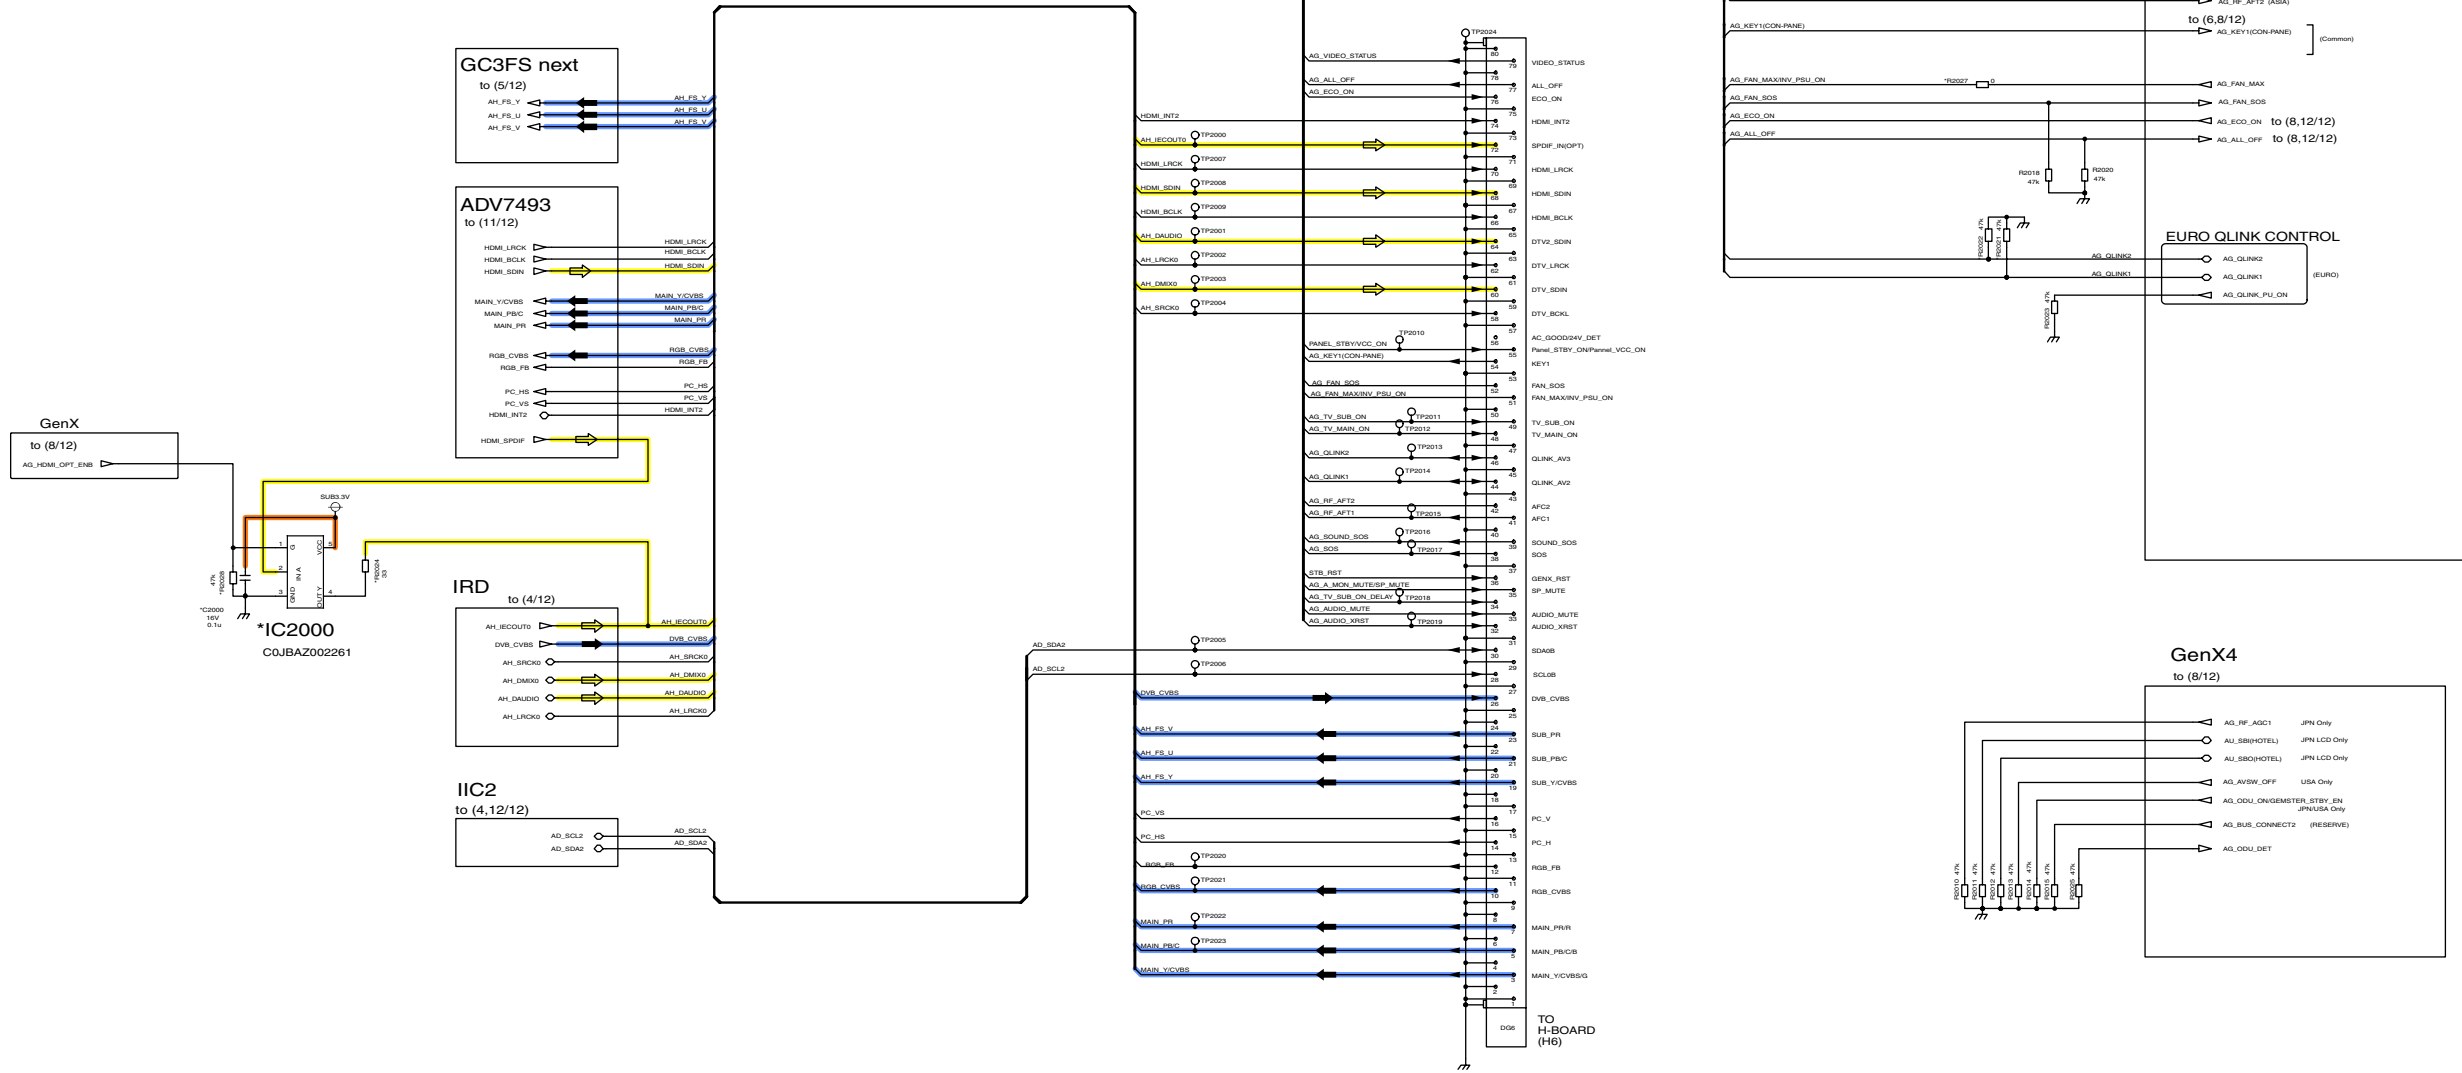

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (7 of 12) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (7 of 12) Schematic Diagram


15.36. DG-Board (8 of 12) Schematic Diagram

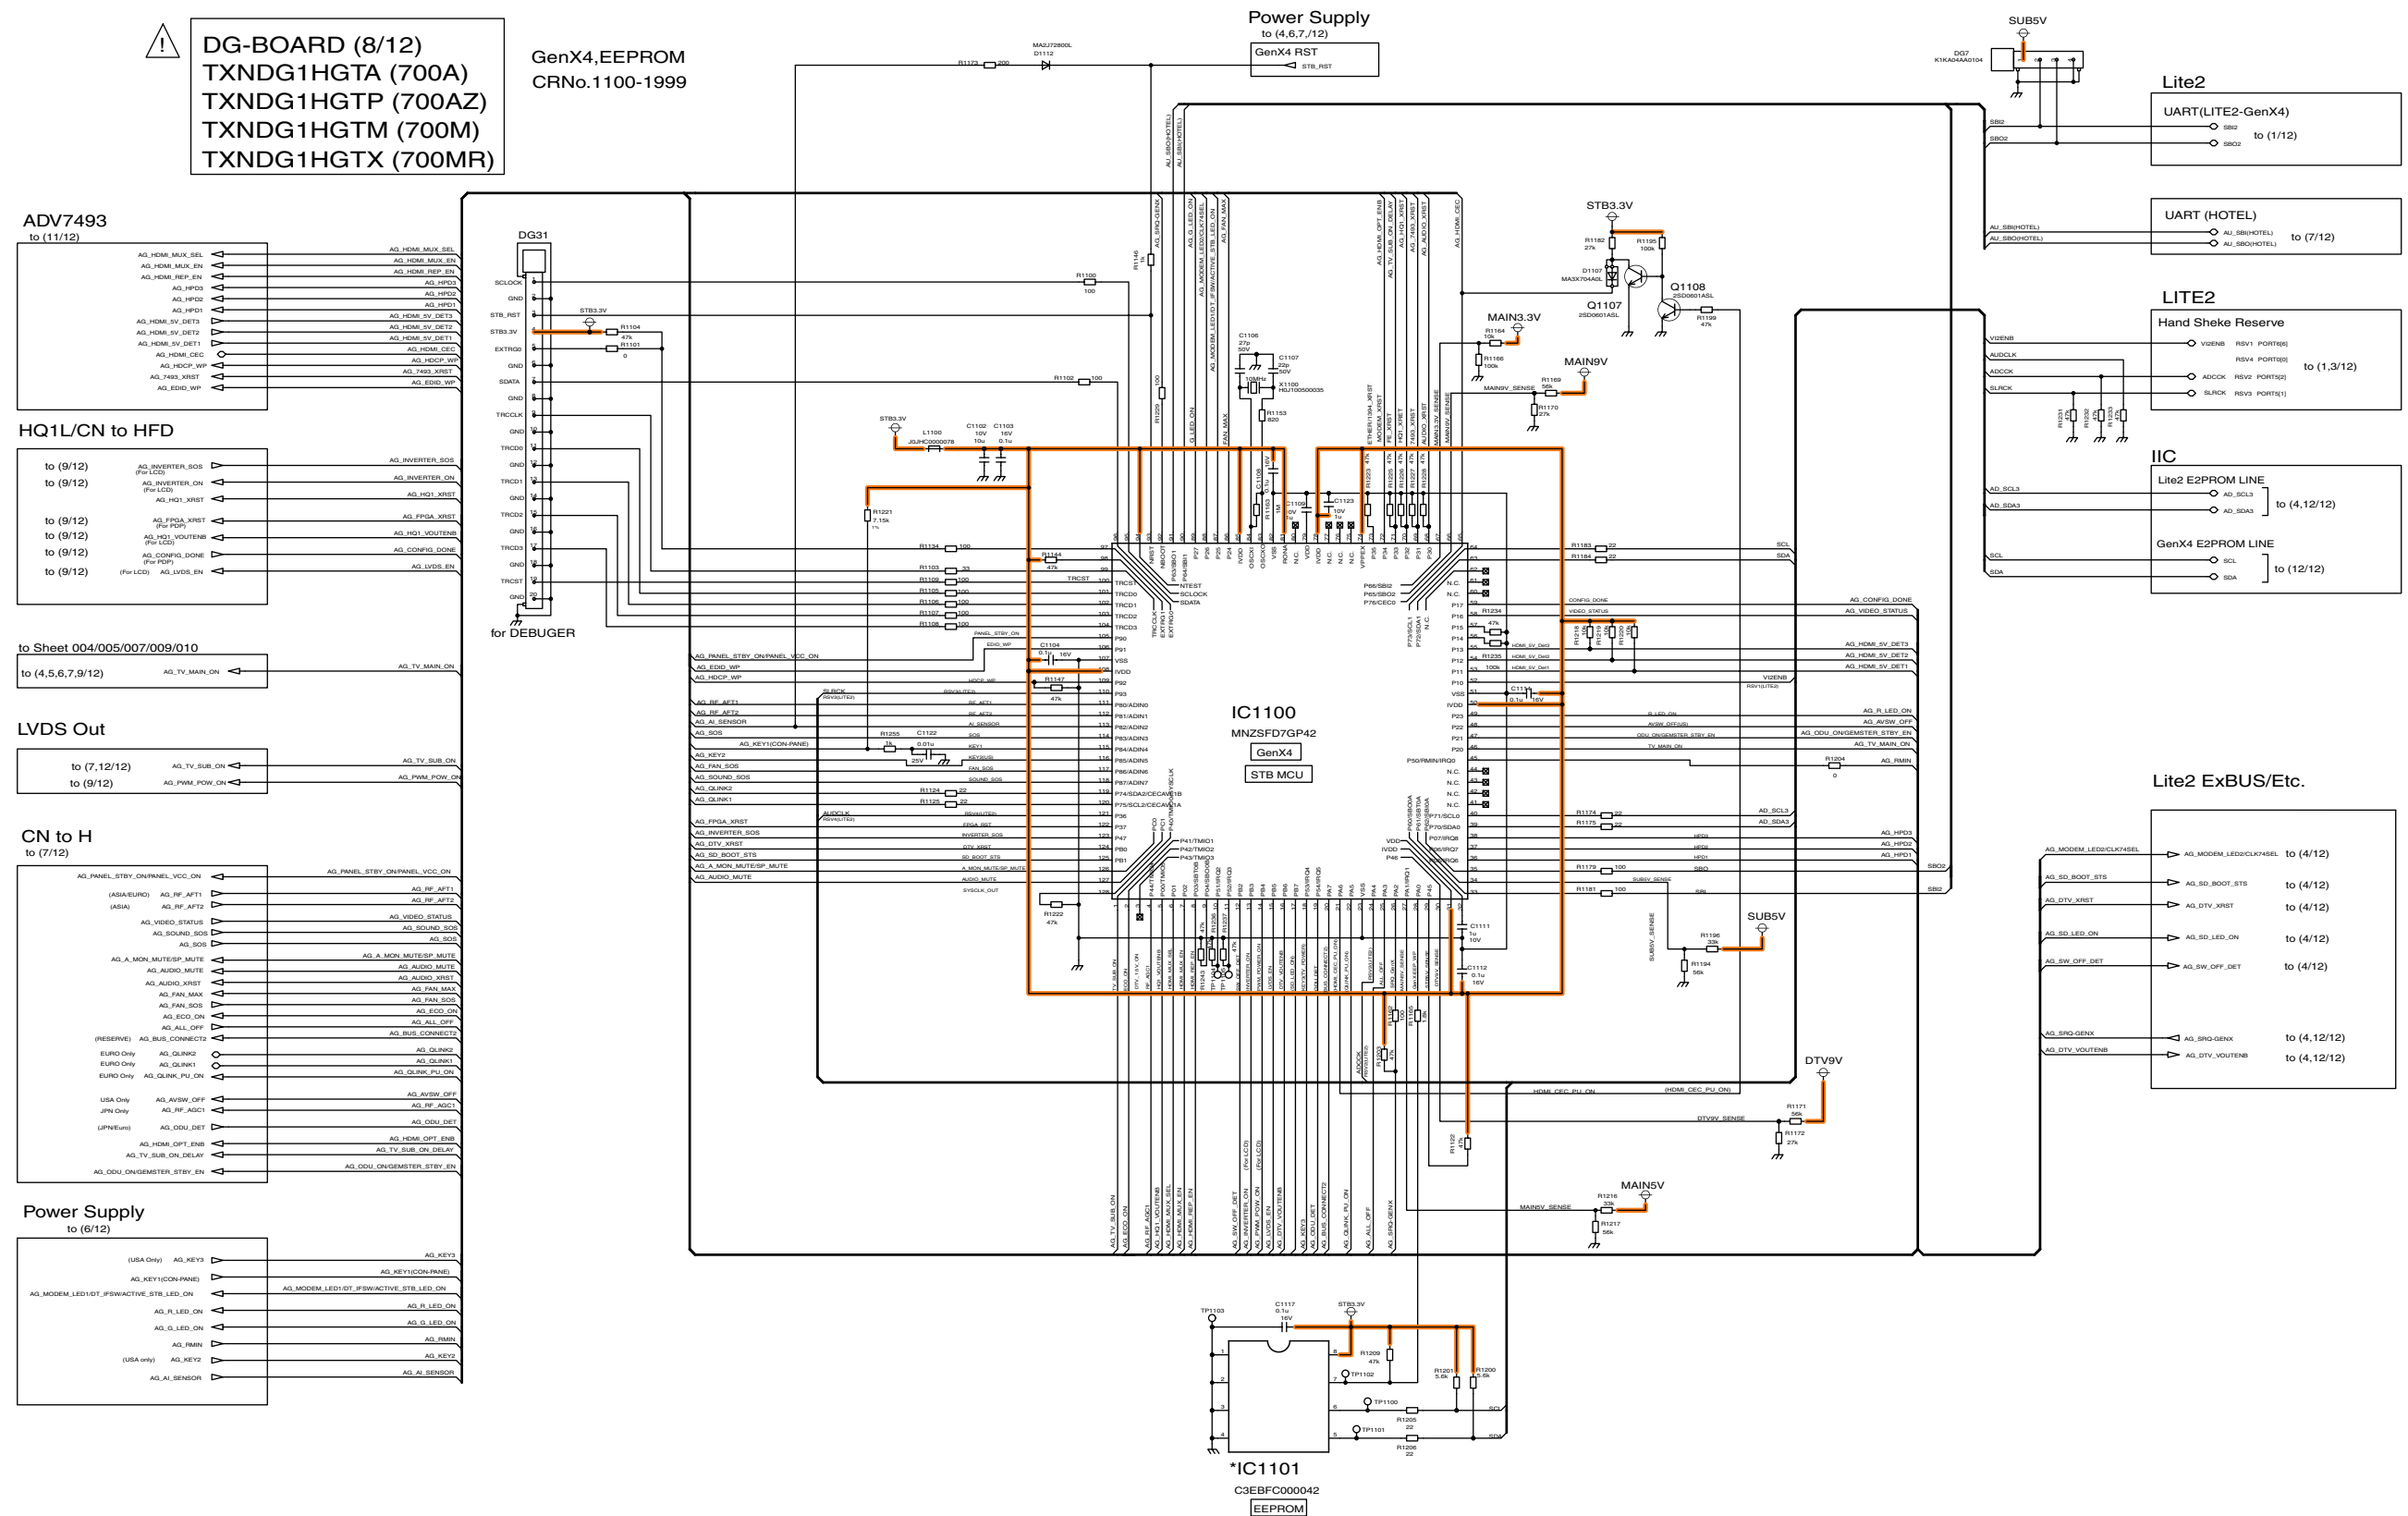

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (8 of 12) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (8 of 12) Schematic Diagram

15.37. DG-Board (9 of 12) Schematic Diagram

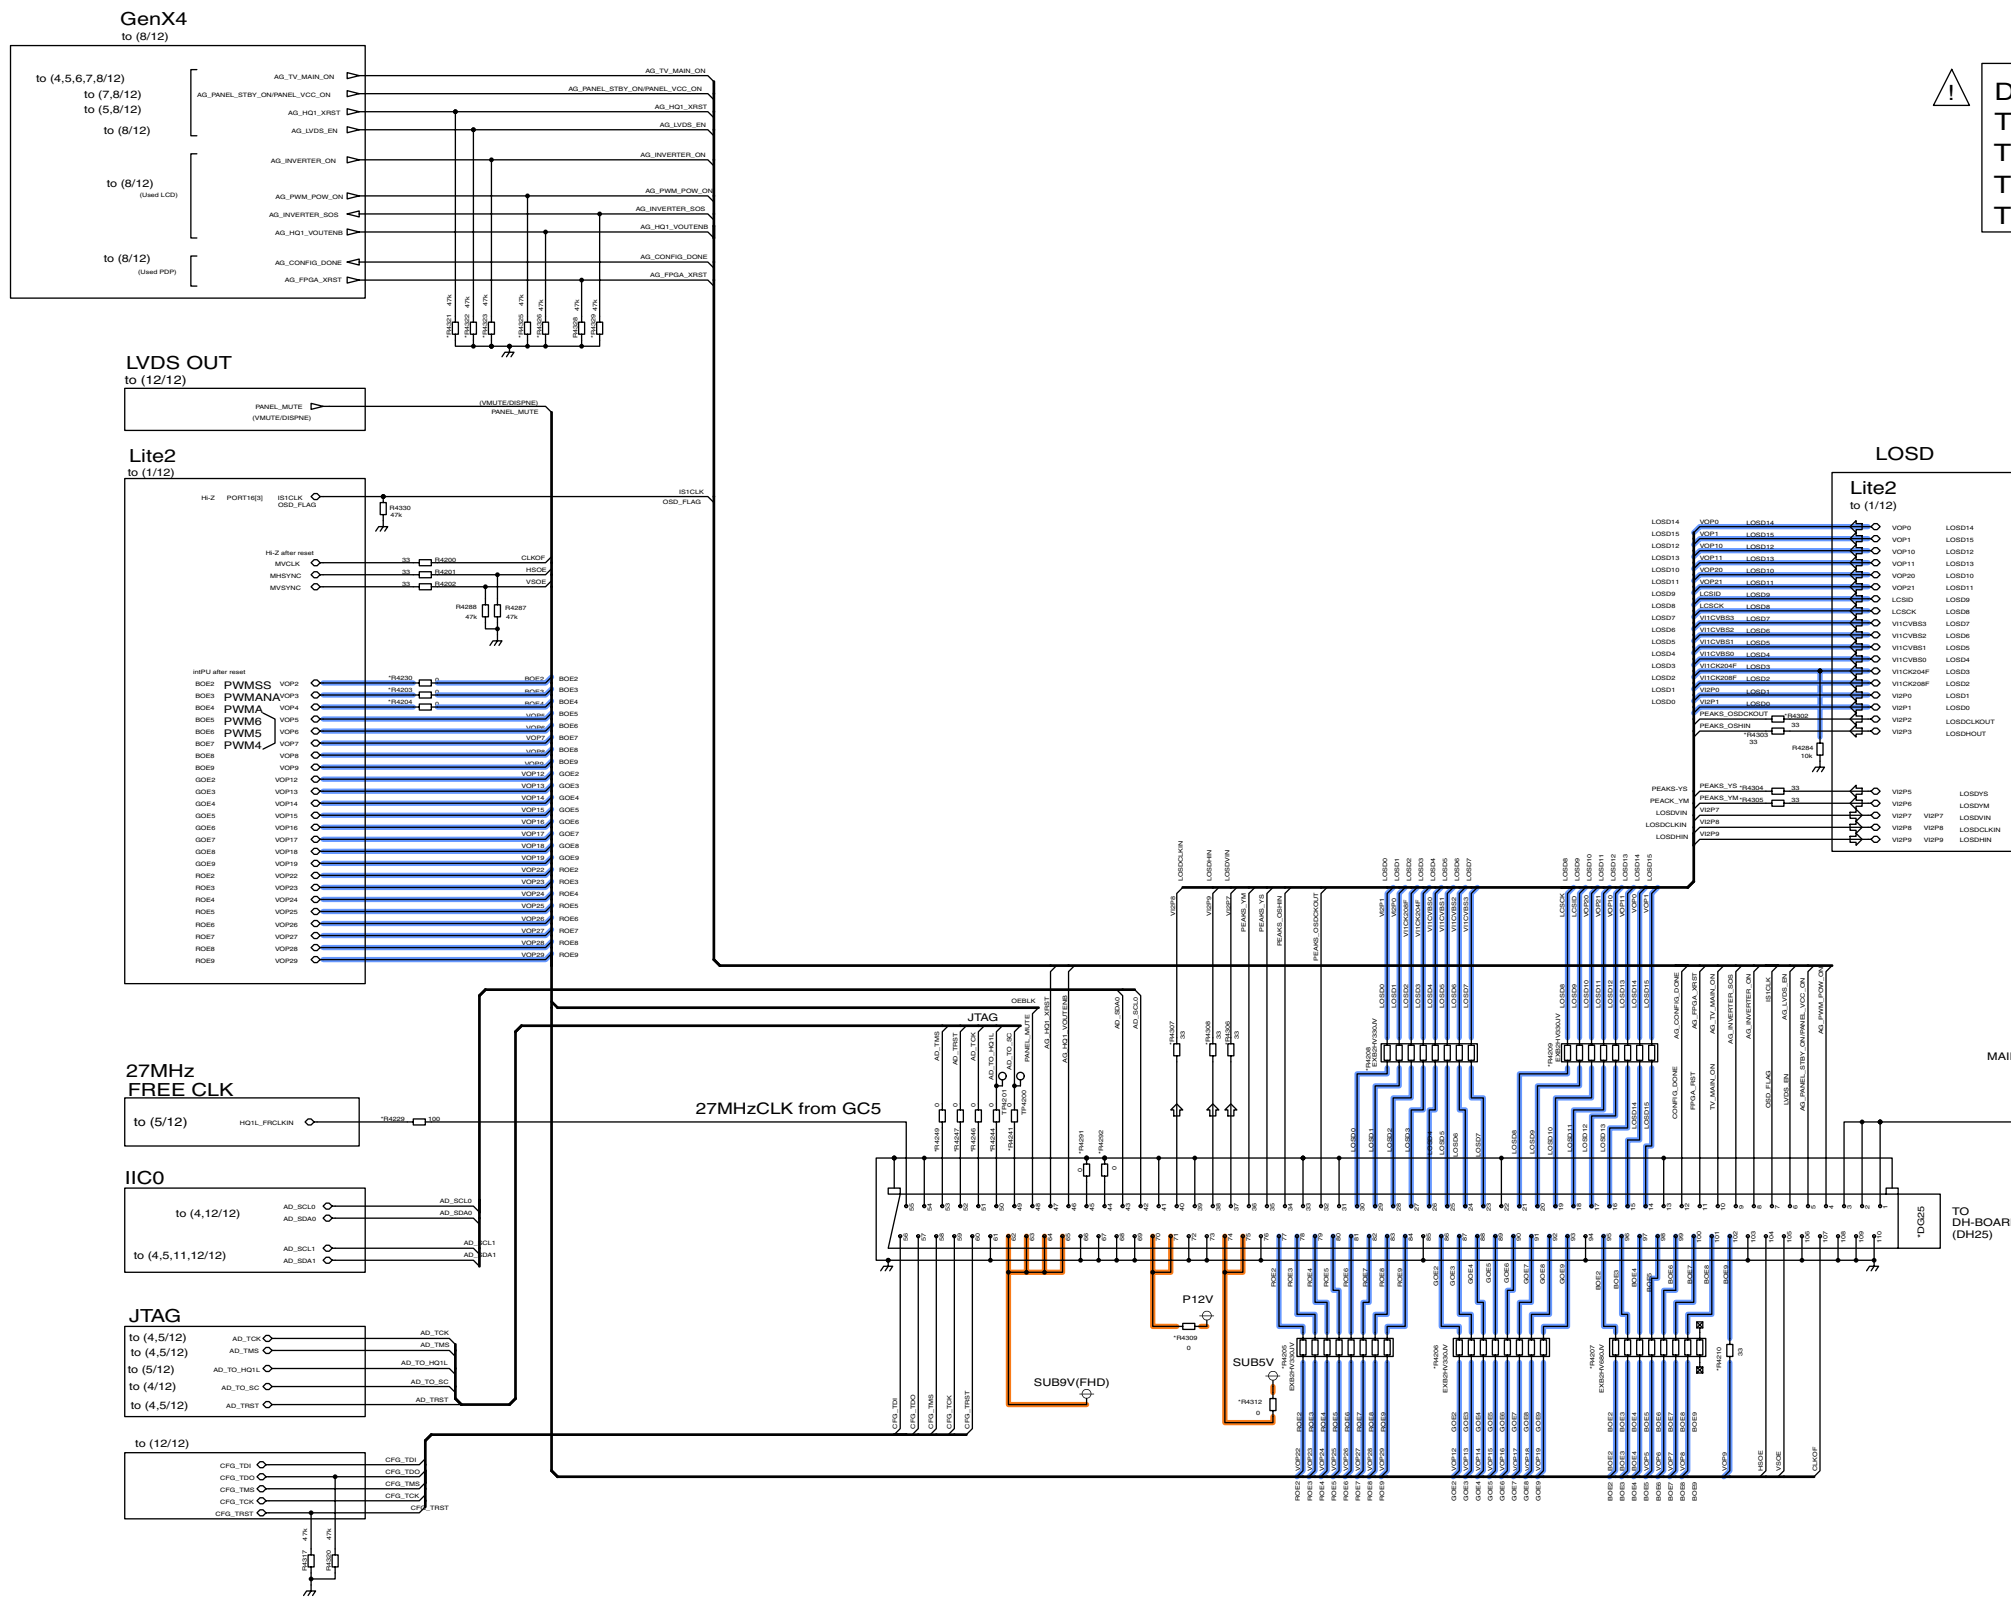


⚠ **DG-BOARD (9/12)**
TXNDG1HGTA (700A)
TXNDG1HGTP (700AZ)
TXNDG1HGTM (700M)
TXNDG1HGTX (700MR)

HQ1L/CN to FHD
 CRNo.4200-4499

TH-58PY700AZ/M/MR, PZ700A
DG-Board (9 of 12) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
DG-Board (9 of 12) Schematic Diagram


15.38. DG-Board (10 of 12) Schematic Diagram

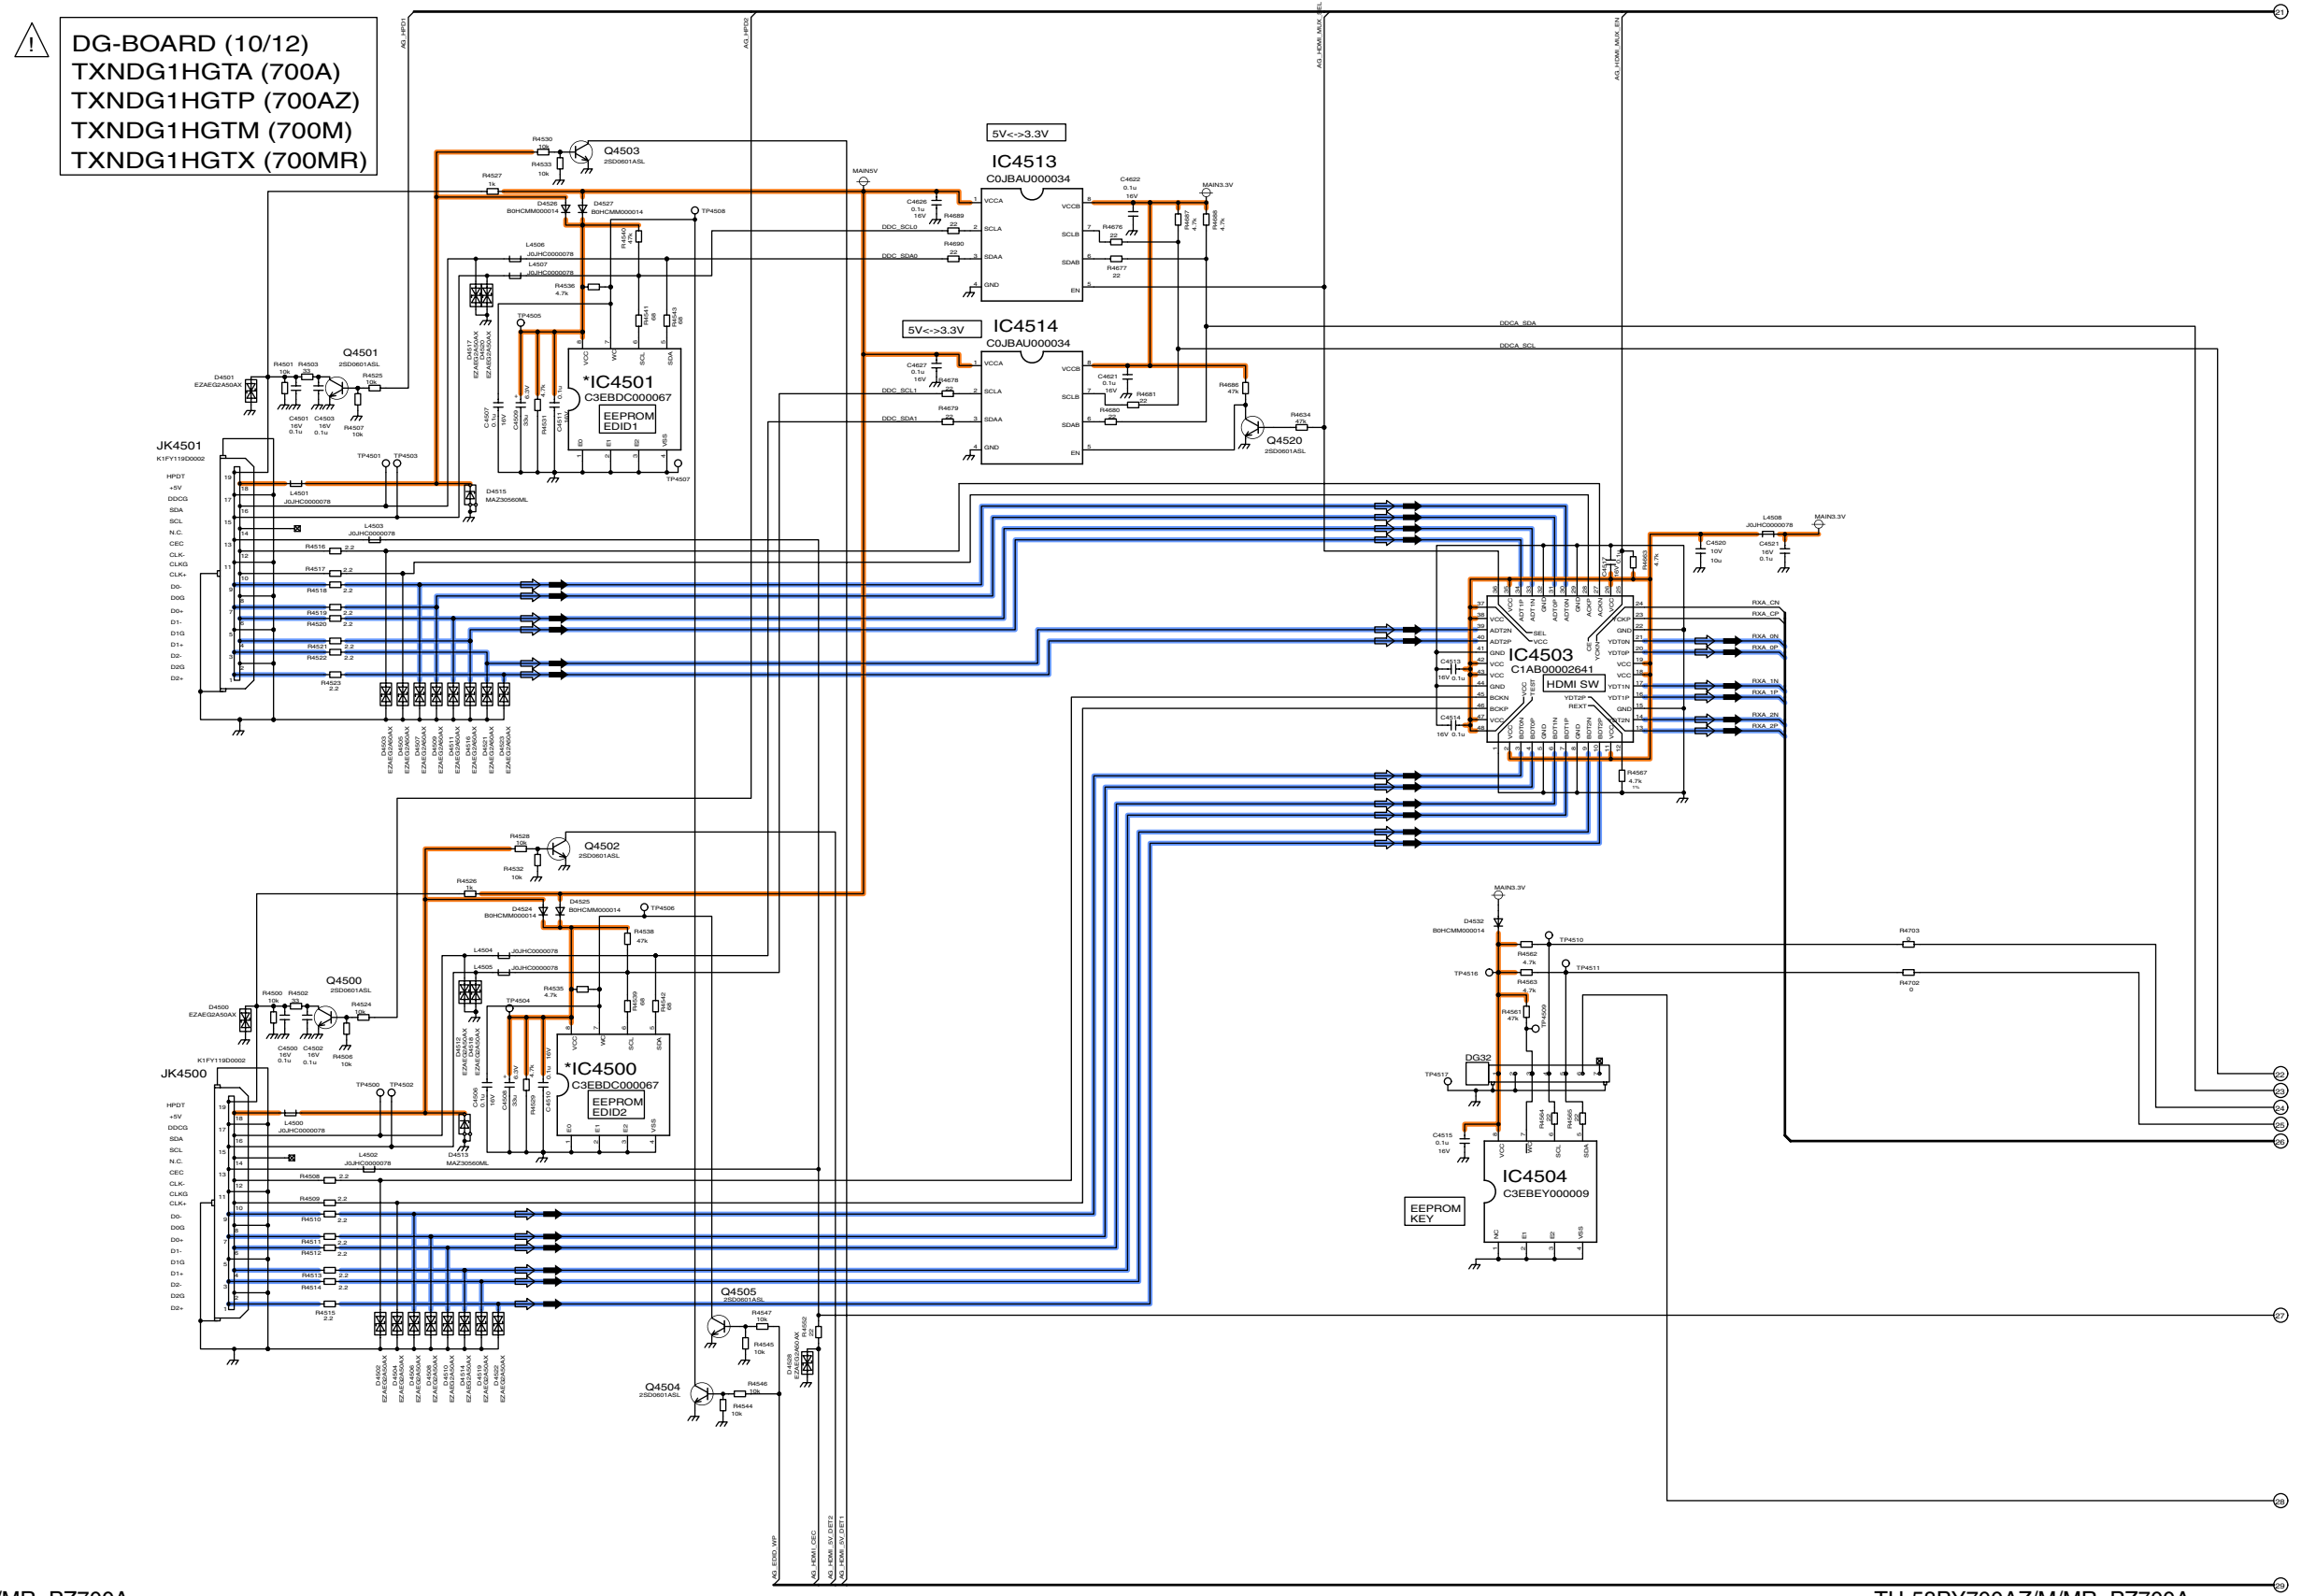

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (10 of 12) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (10 of 12) Schematic Diagram

15.39. DG-Board (11 of 12) Schematic Diagram

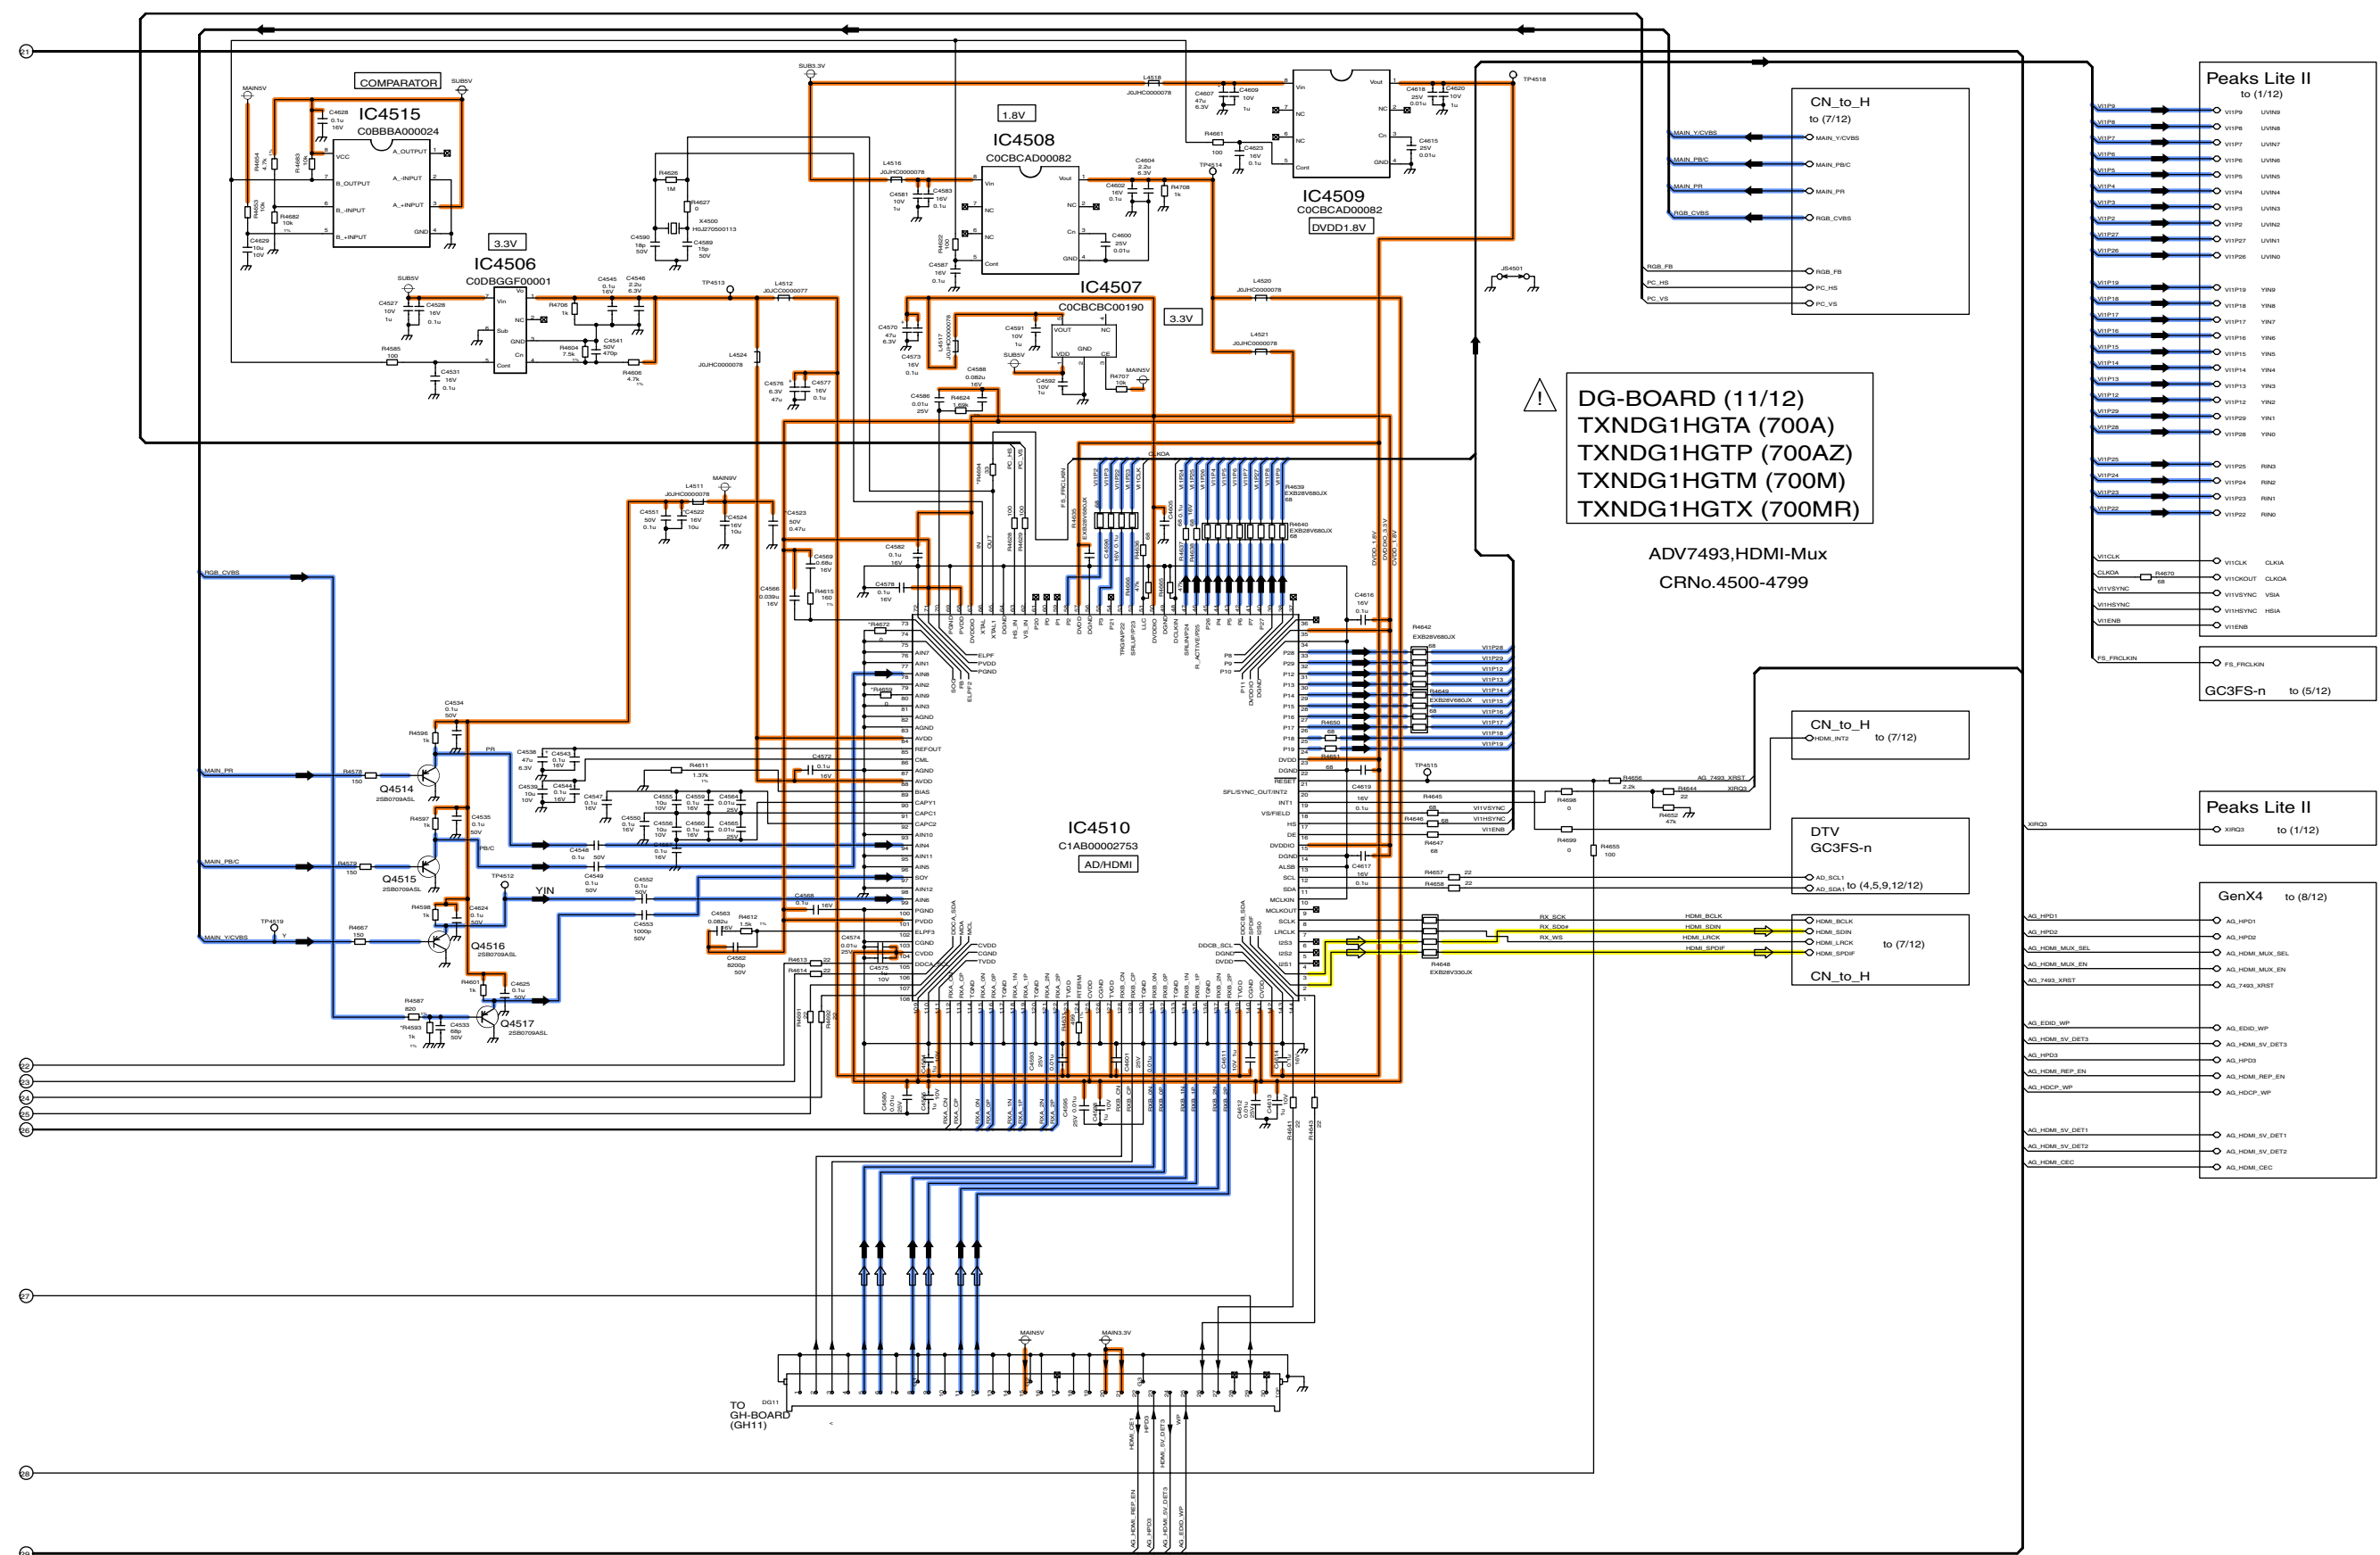

DG-BOARD (11/12)
 TXNDG1HGTA (700A)
 TXNDG1HGTP (700AZ)
 TXNDG1HGM (700M)
 TXNDG1HGTX (700MR)


ADV7493,HDMI-Mux
 CRNo.4500-4799

TH-58PY700AZ/M/MR, PZ700A
 DG-Board (11 of 12) Schematic Diagram


TH-58PY700AZ/M/MR, PZ700A
 DG-Board (11 of 12) Schematic Diagram

15.40. DG-Board (12 of 12) Schematic Diagram

⚠ DG-BOARD (12/12)
 TXNDG1HGTA (700A)
 TXNDG1HGTP (700AZ)
 TXNDG1HGTM (700M)
 TXNDG1HGTX (700MR)
 LVDS Out
 CN to ExIIC
 CRNo.4800-4999

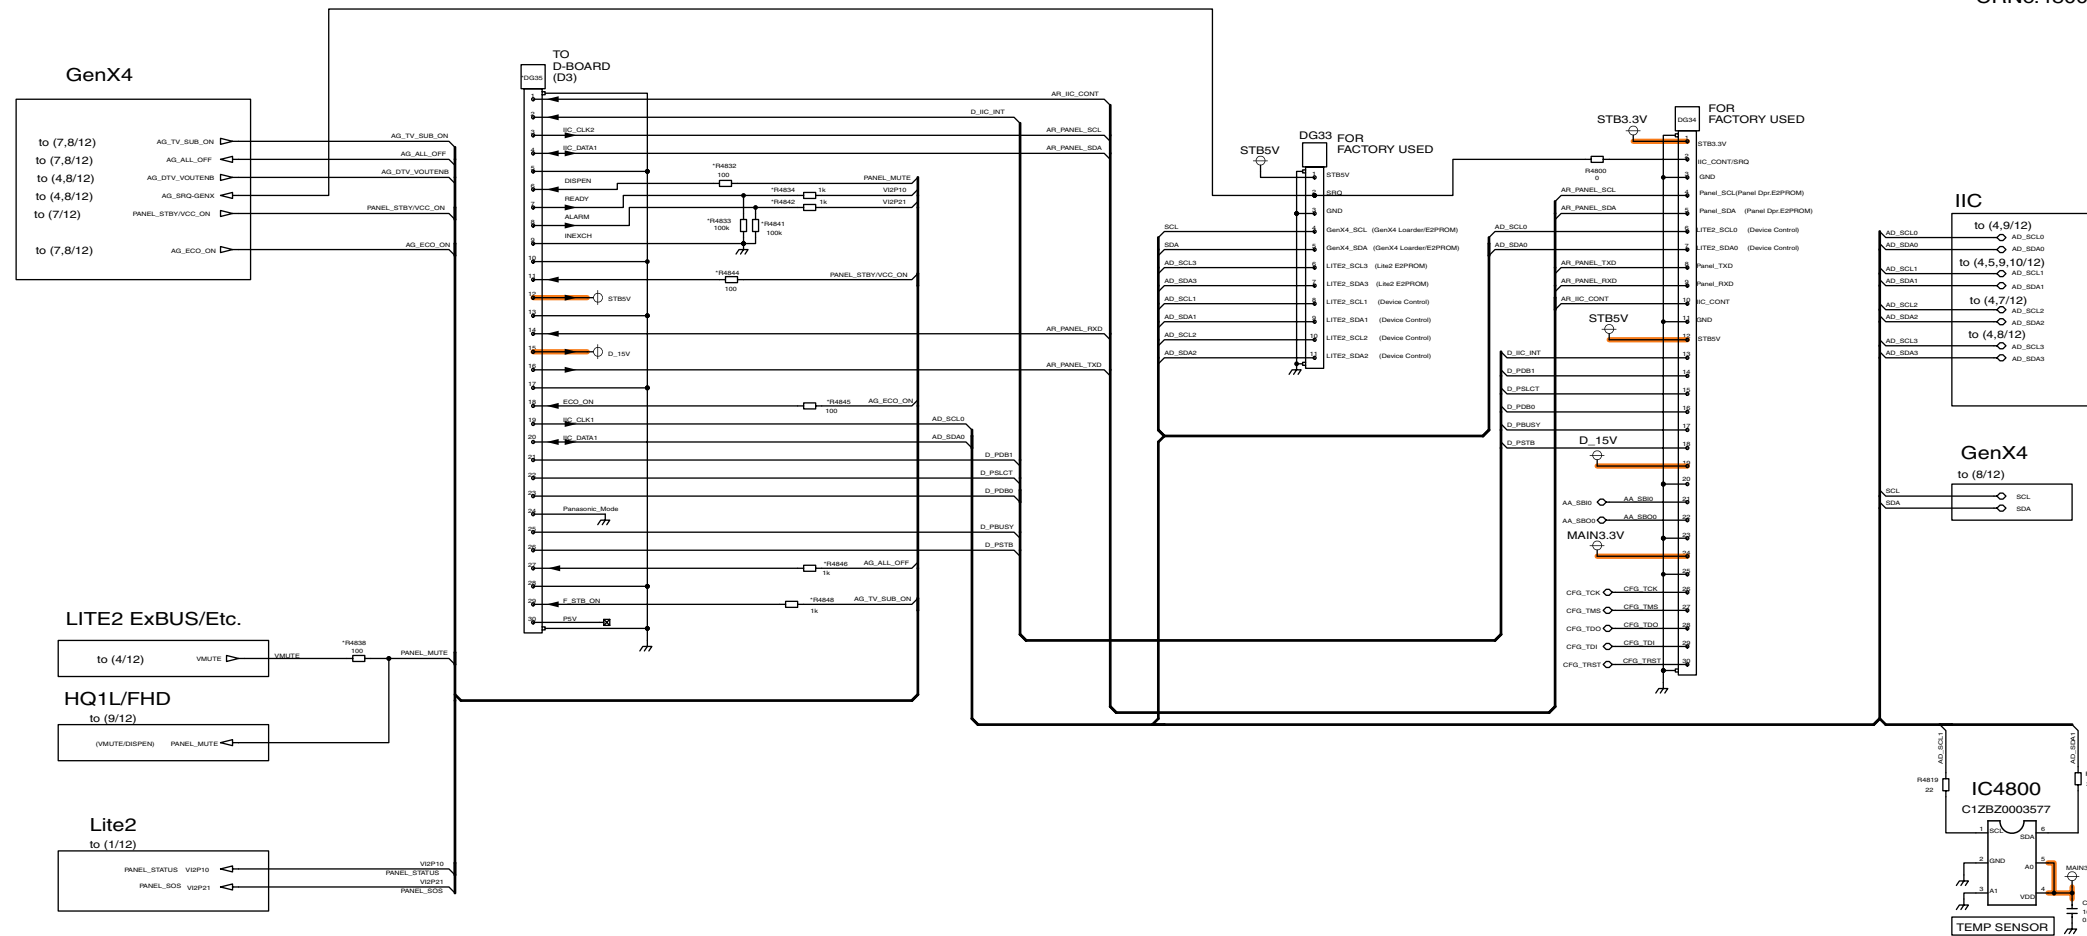

15.41. DH-Board Block Diagram

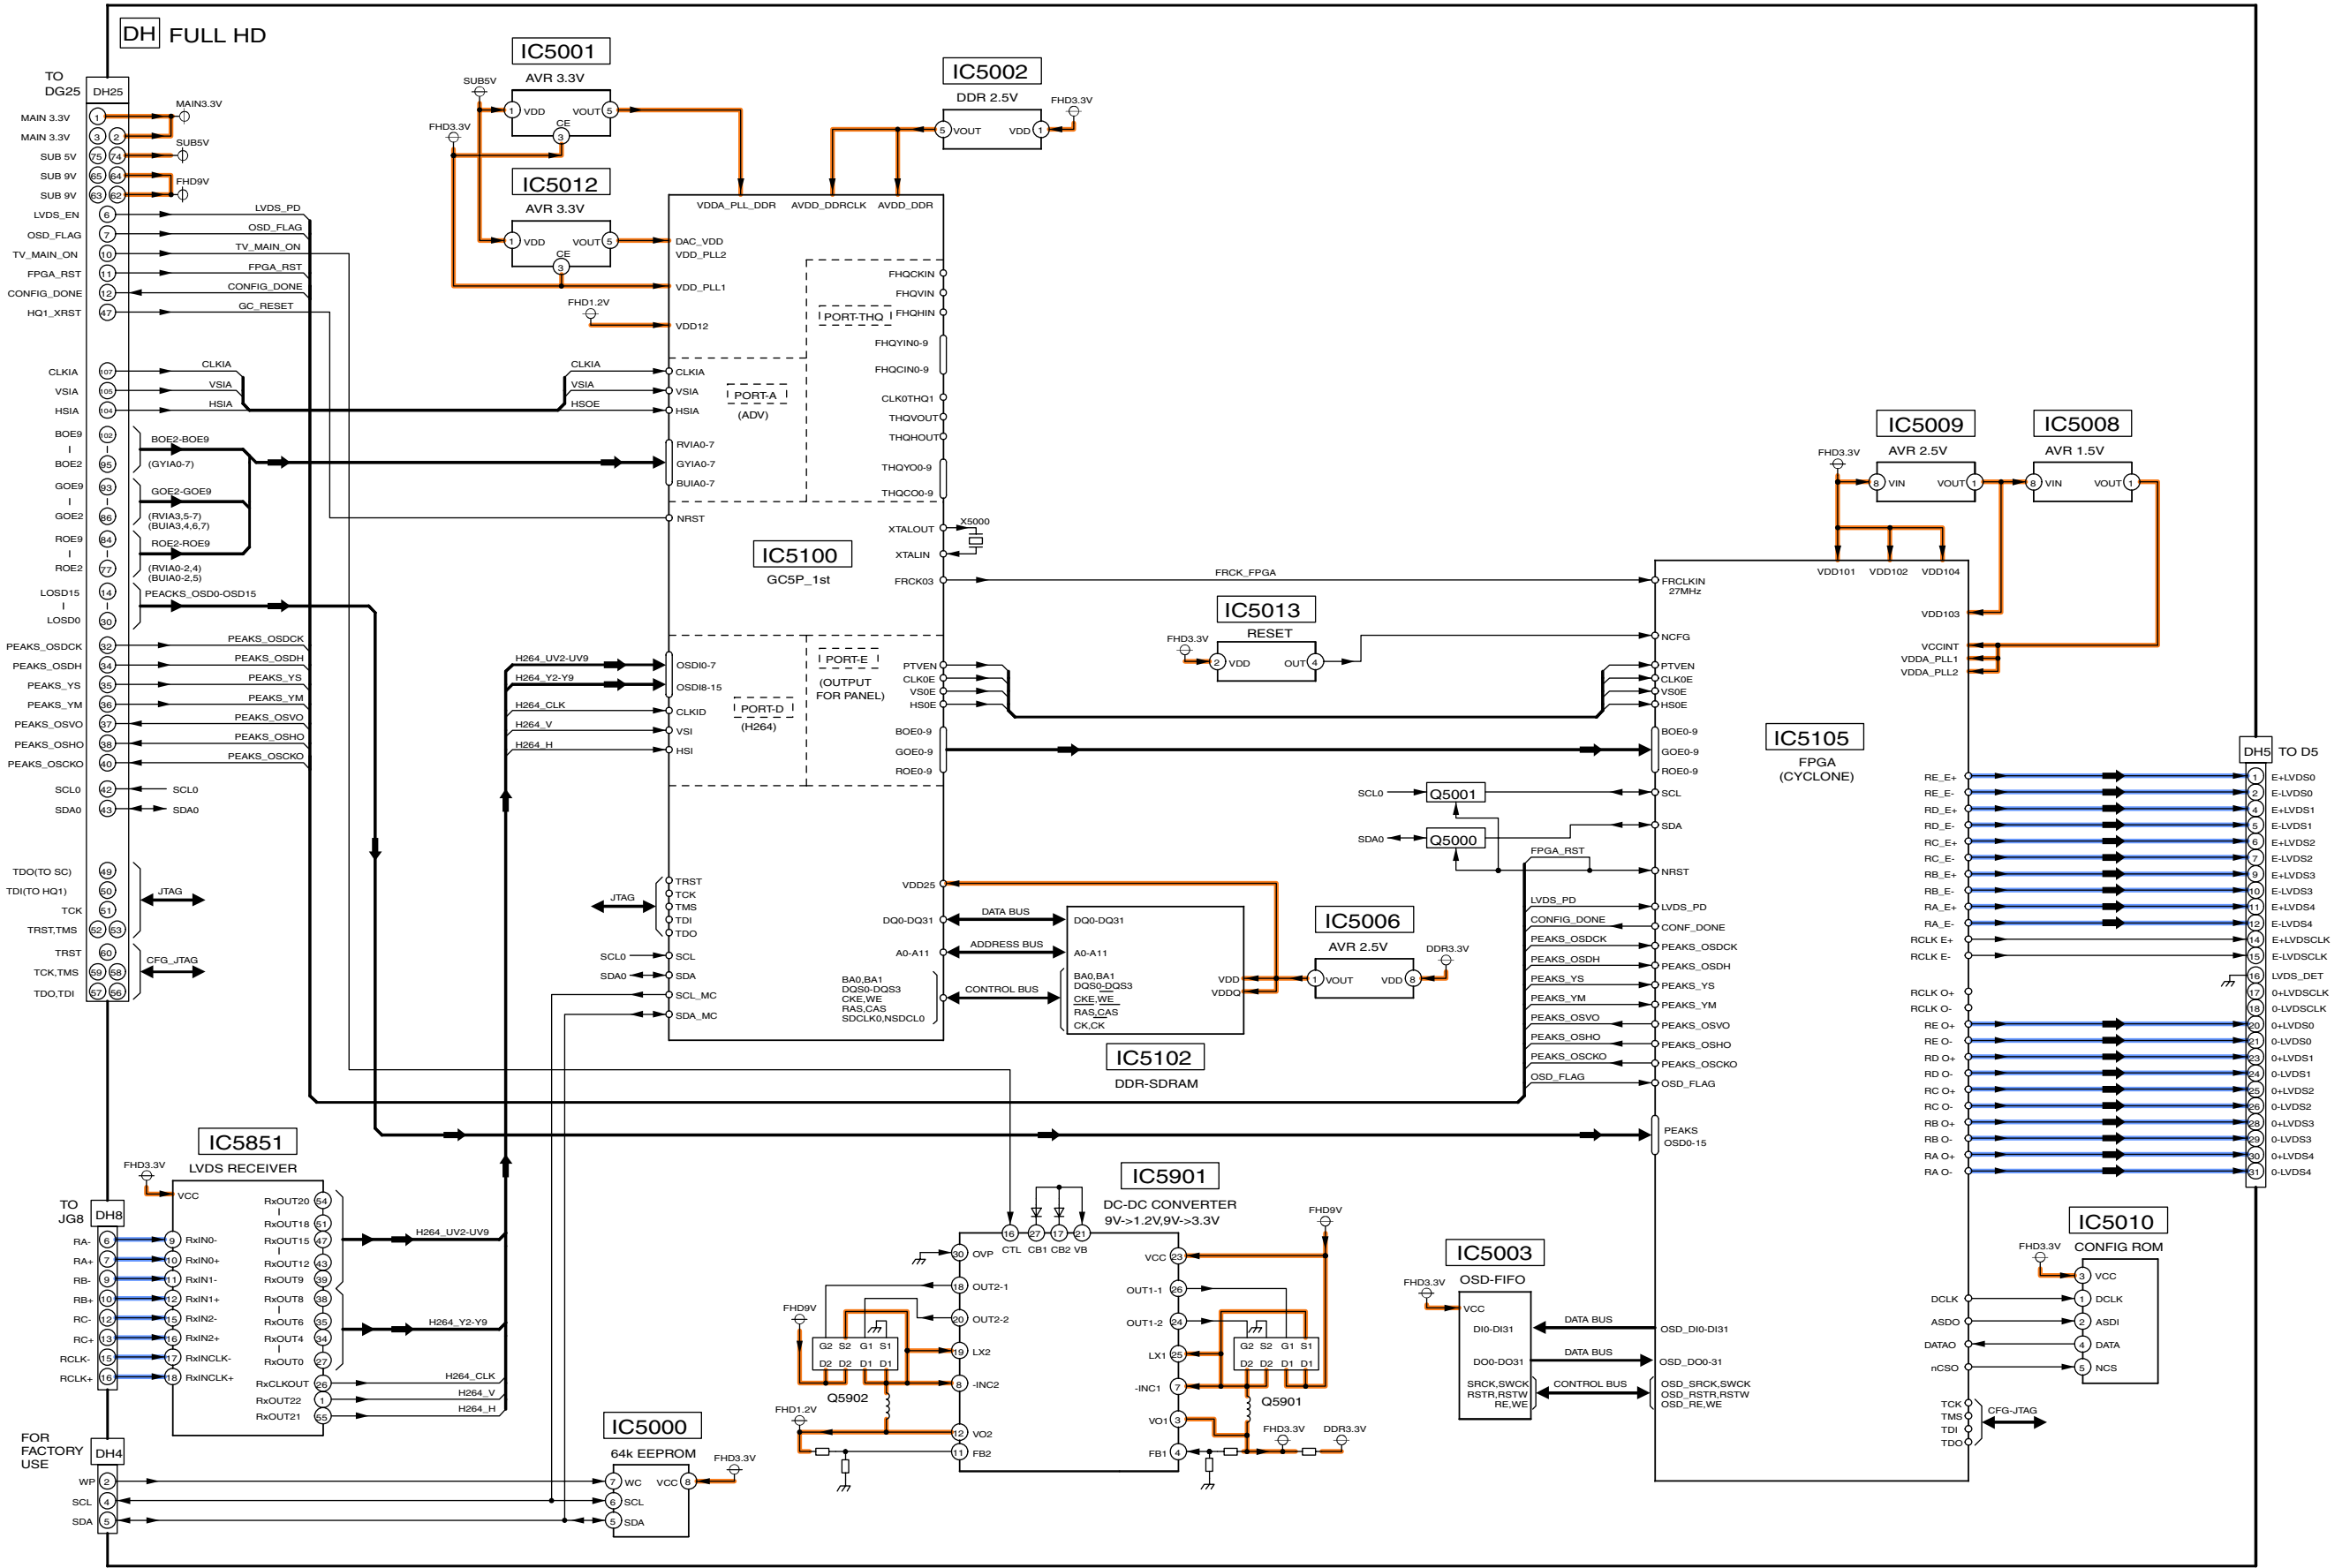


TH-58PY700AZ/M/MR, PZ700A
DH-Board Block Diagram

TH-58PY700AZ/M/MR, PZ700A
DH-Board Block Diagram

15.42. DH-Board (1 of 4) Schematic Diagram

A
B
C
D
E
F

! DH-BOARD TNPA4458AD (1/4)

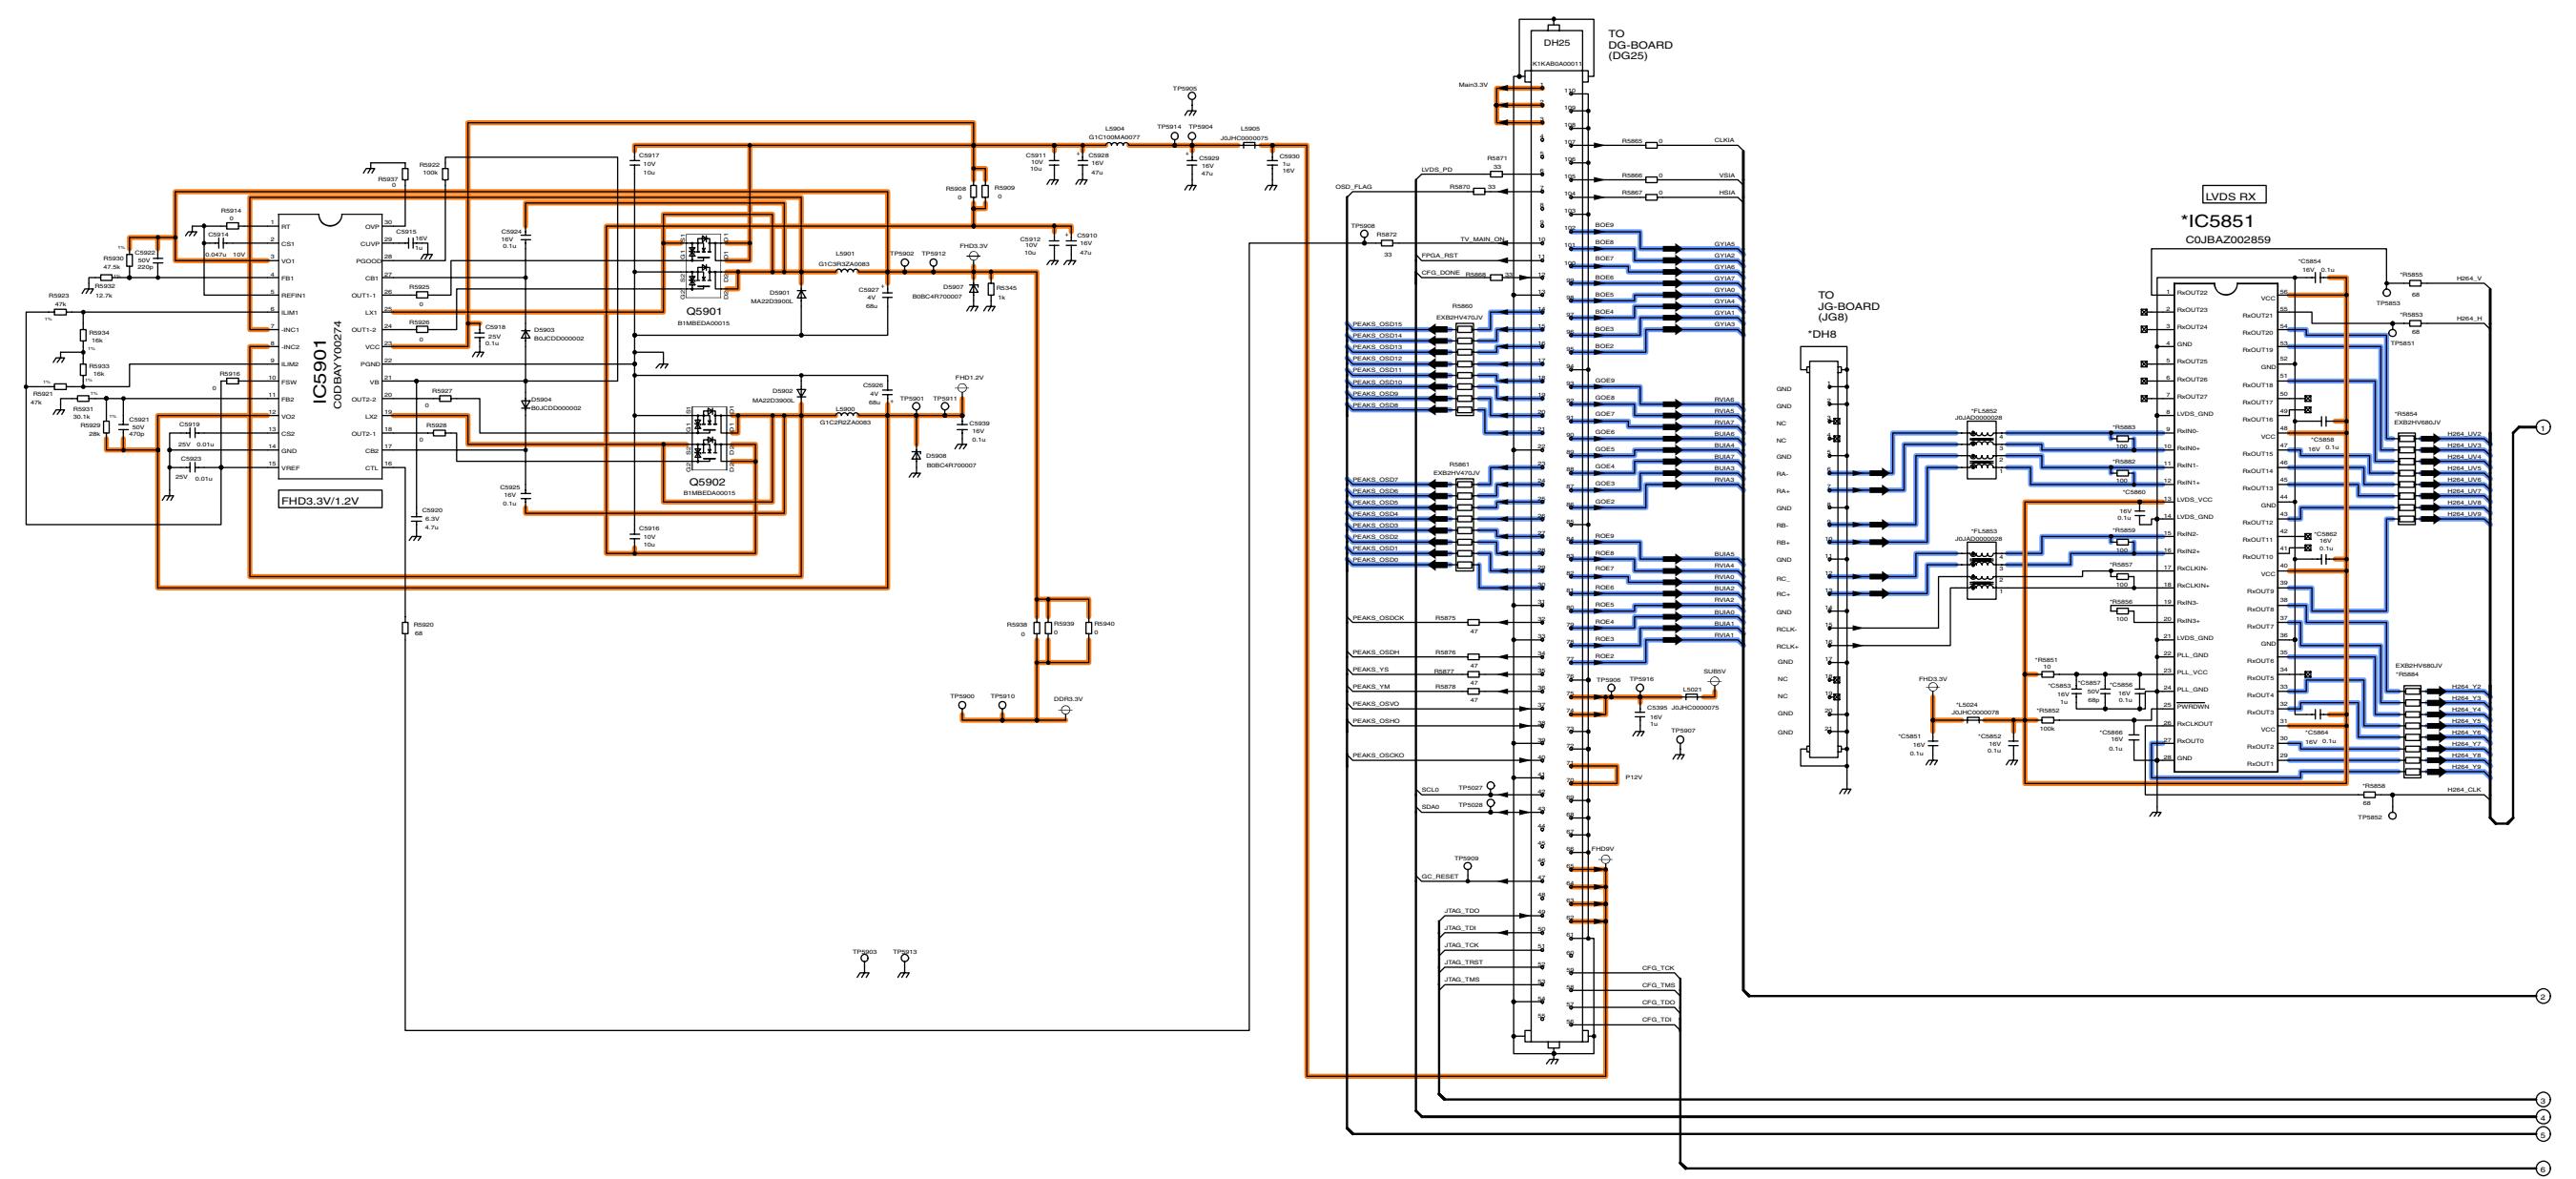


TH-58PY700AZ/M/MR, PZ700A
DH-Board (1 of 4) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
DH-Board (1 of 4) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.43. DH-Board (2 of 4) Schematic Diagram

DH-BOARD TNPA4458AD (2/4)

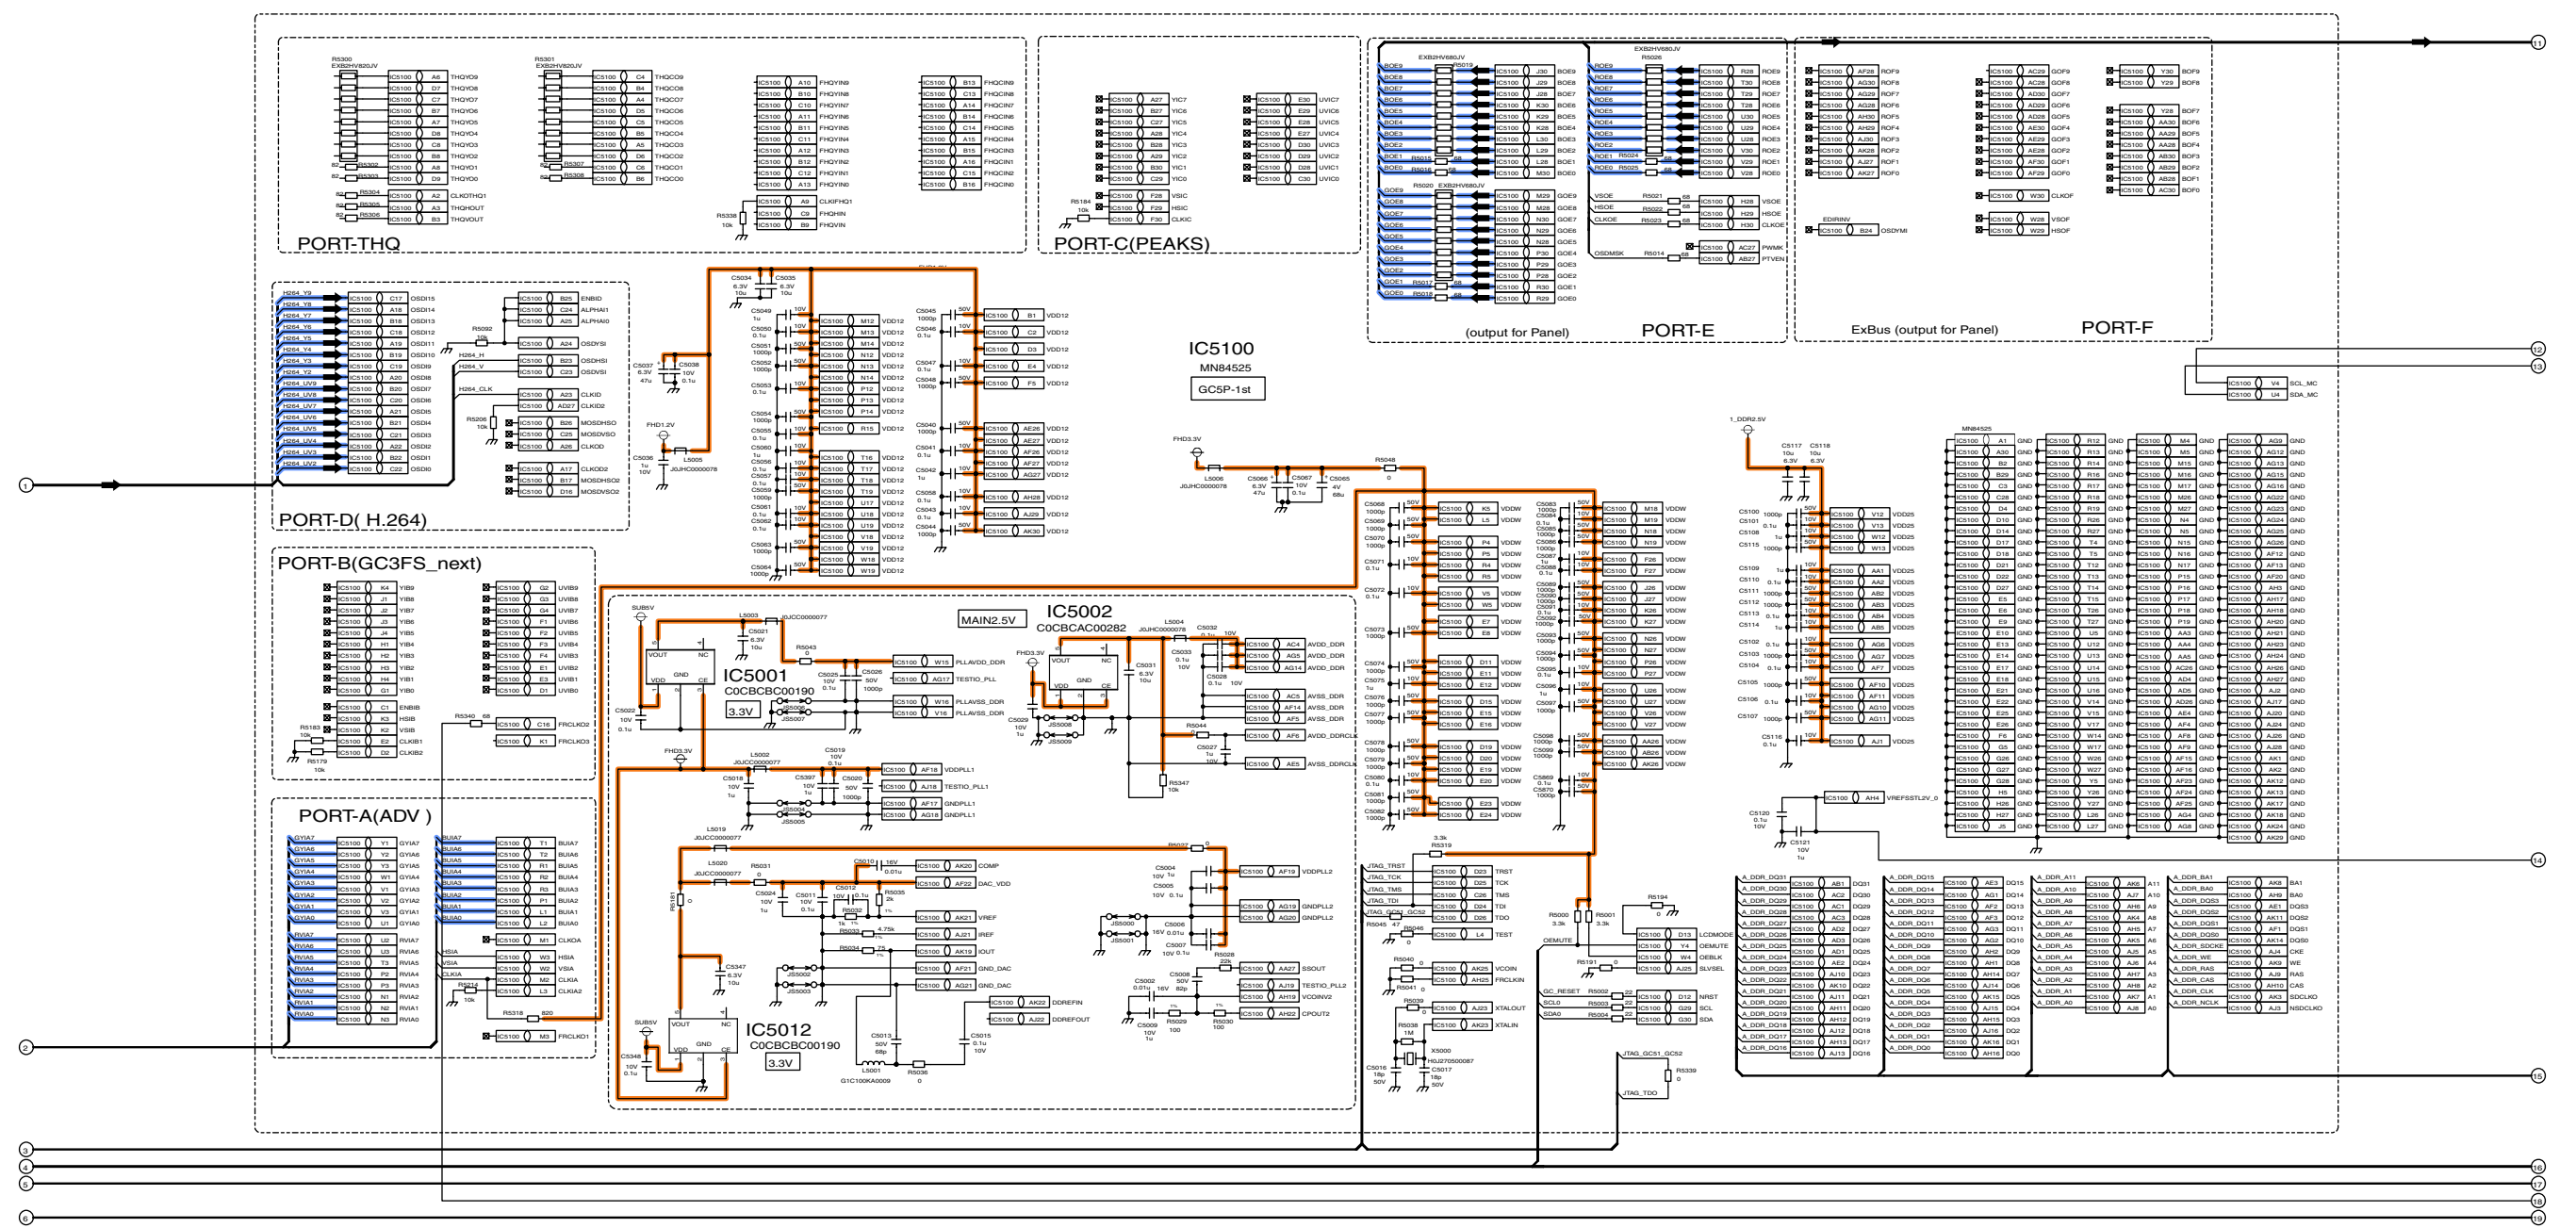


TH-58PY700AZ/M/MR, PZ700A
DH-Board (2 of 4) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
DH-Board (2 of 4) Schematic Diagram


15.44. DH-Board (3 of 4) Schematic Diagram

⚠ DH-BOARD TNPA4458AD (3/4)

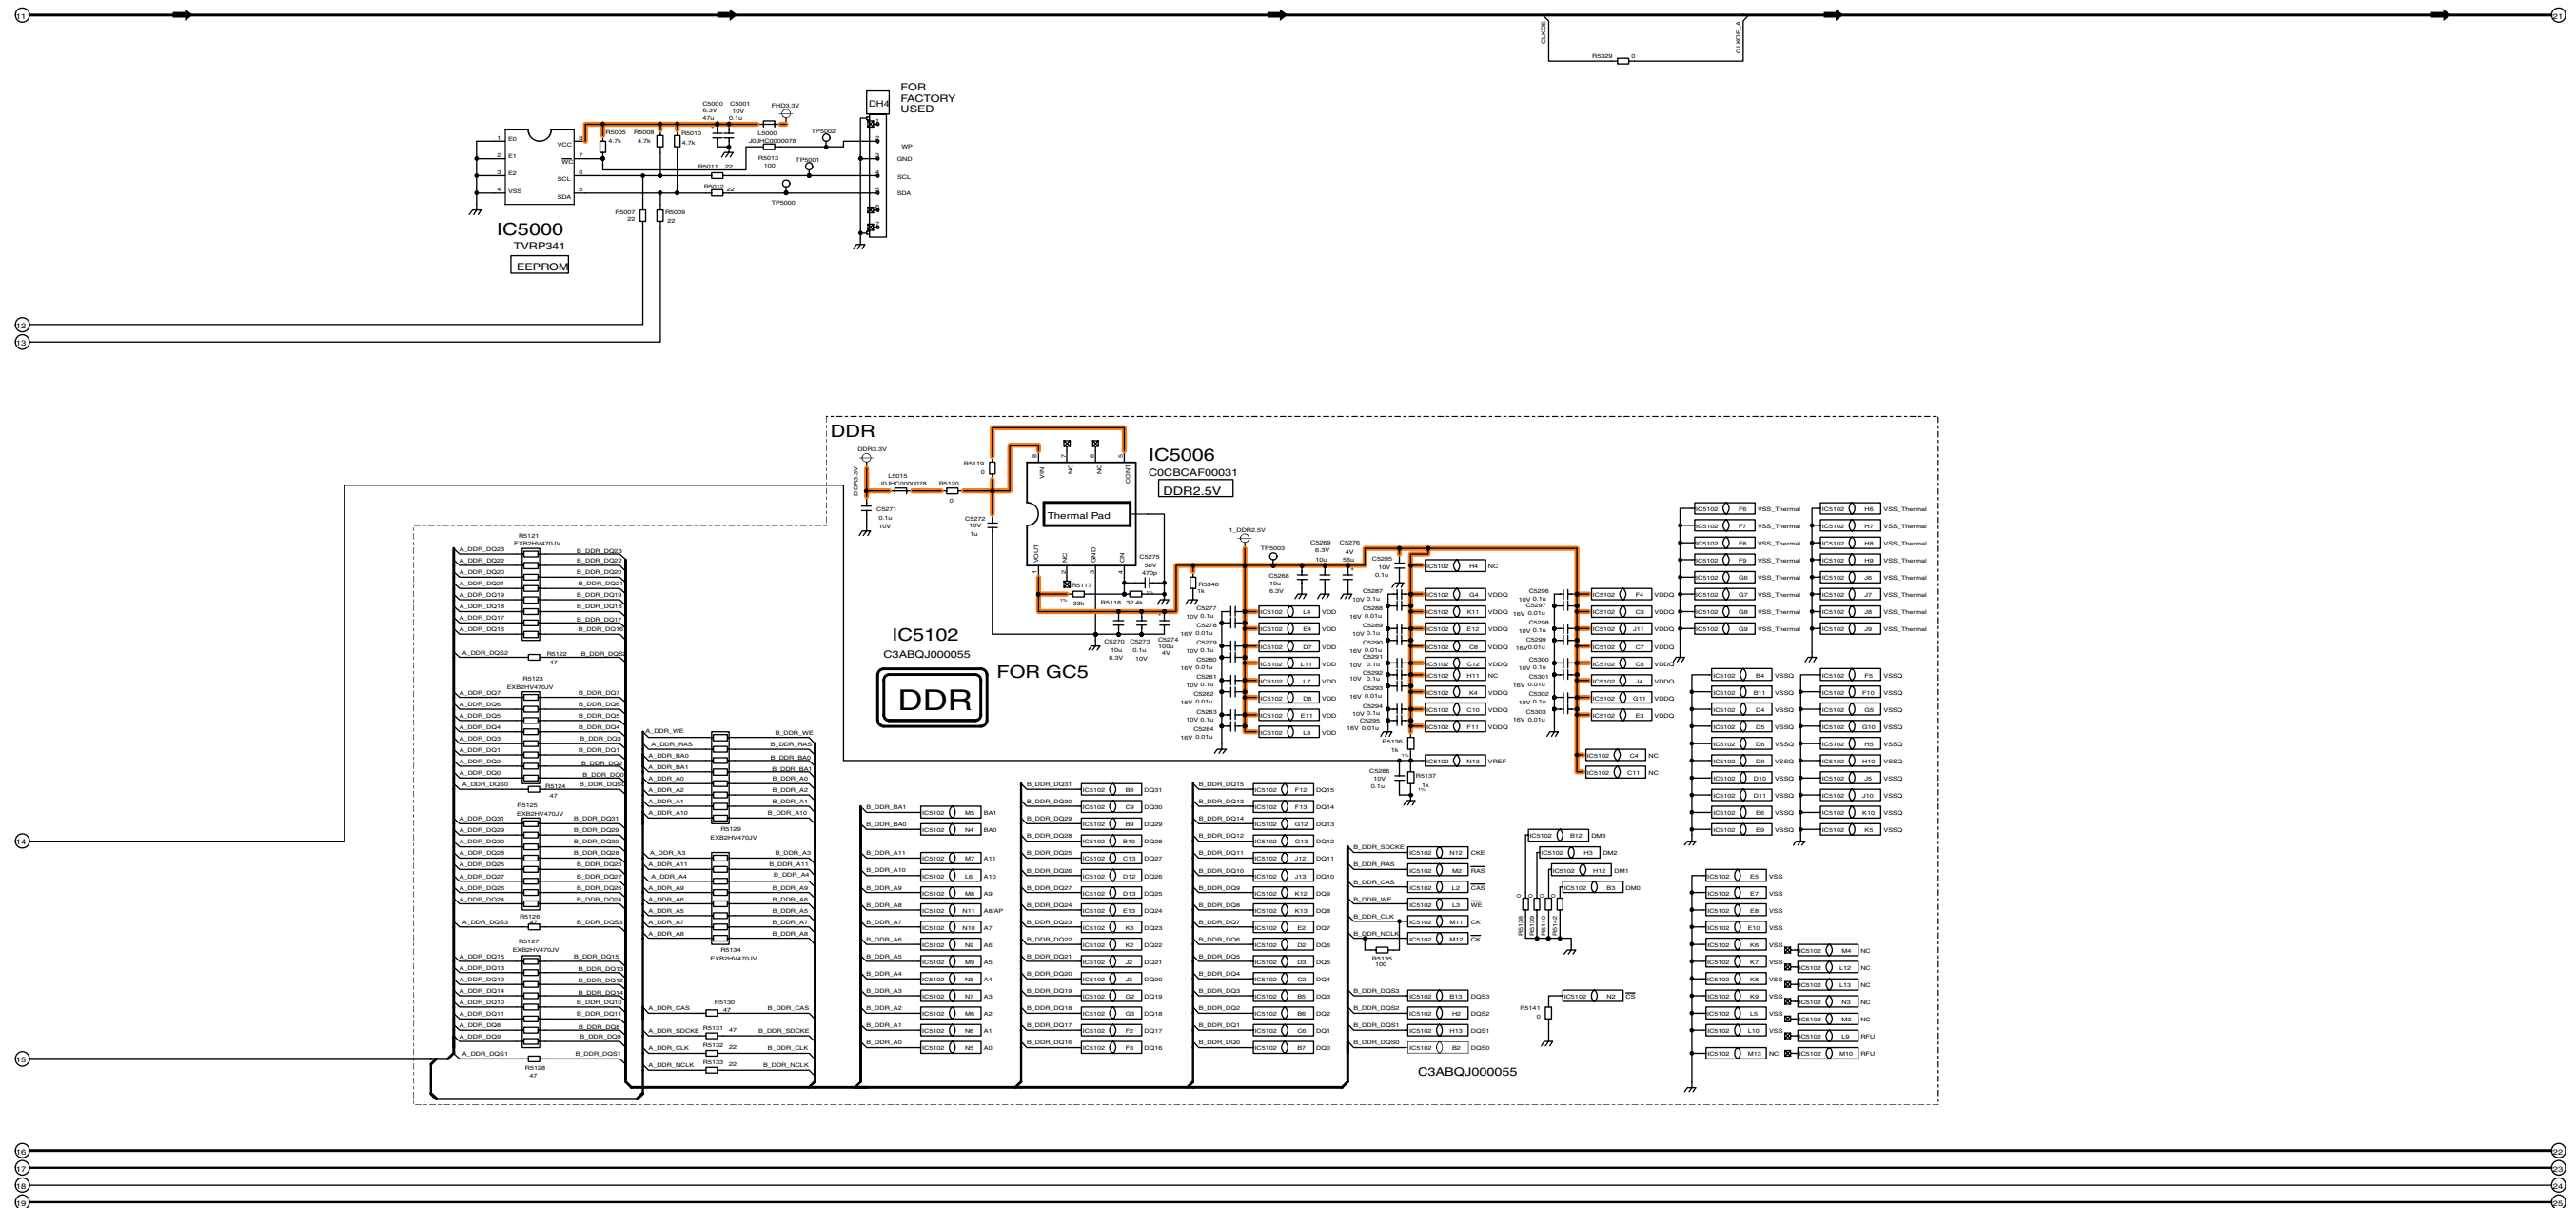

15.45. DH-Board (4 of 4) Schematic Diagram


DH-BOARD TNPA4458AD (4/4)

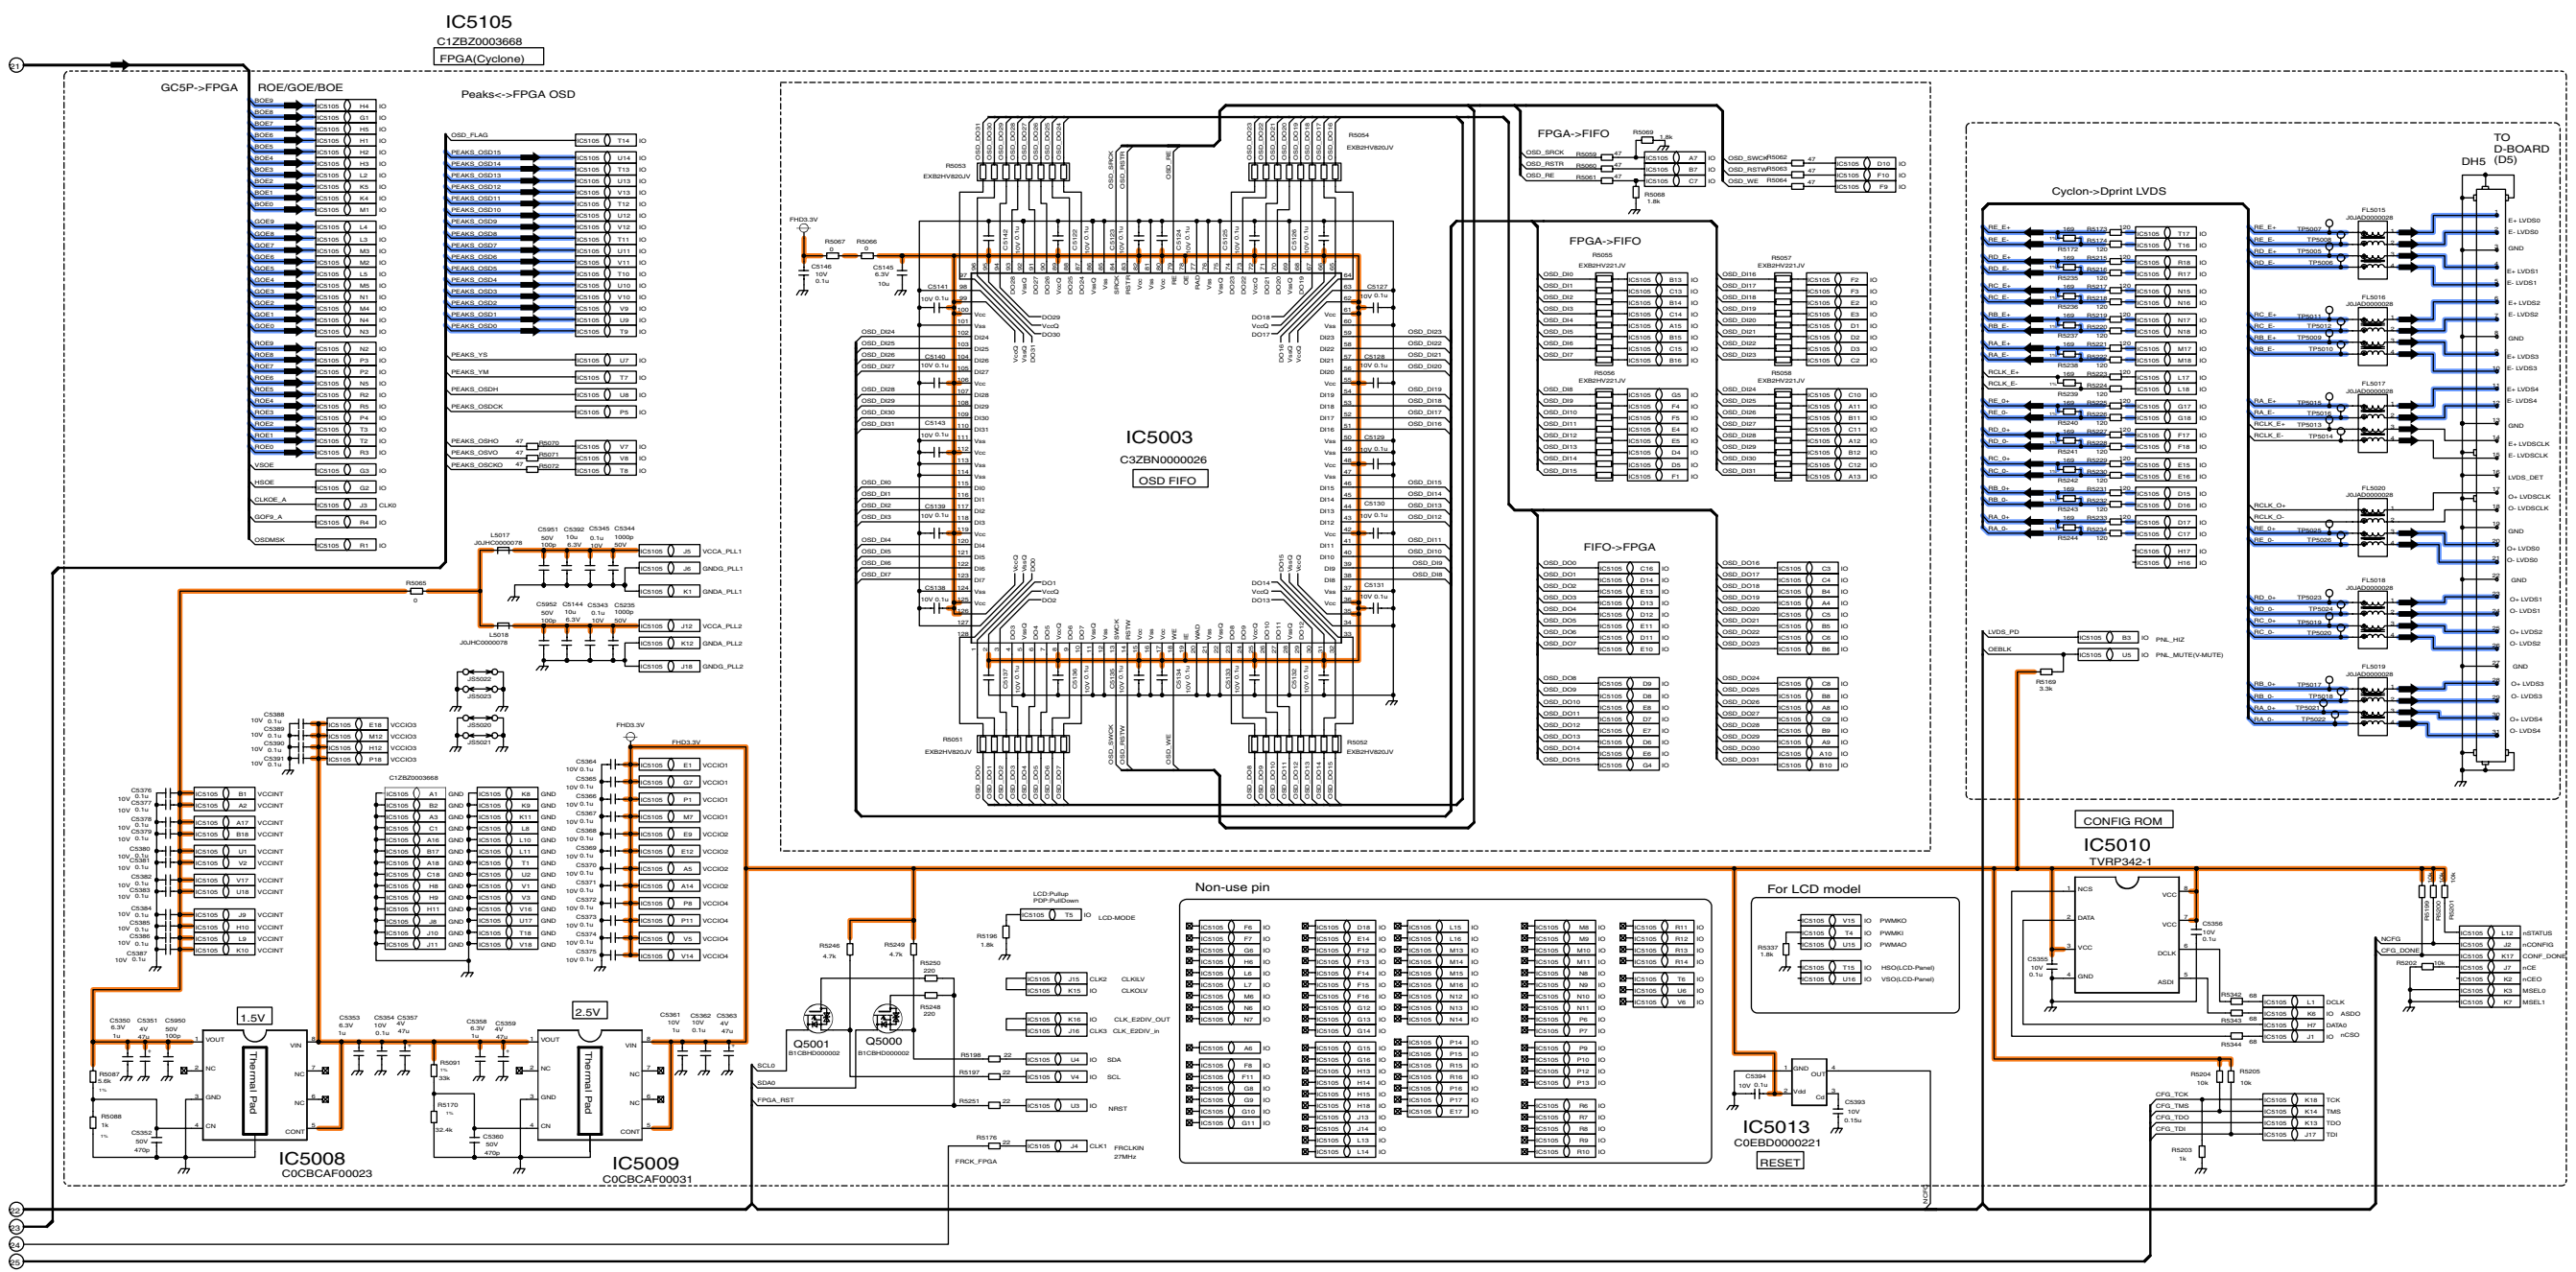

TH-58PY700AZ/M/MR, PZ700A
DH-Board (4 of 4) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
DH-Board (4 of 4) Schematic Diagram


15.46. D-Board (1 of 2) Block Diagram

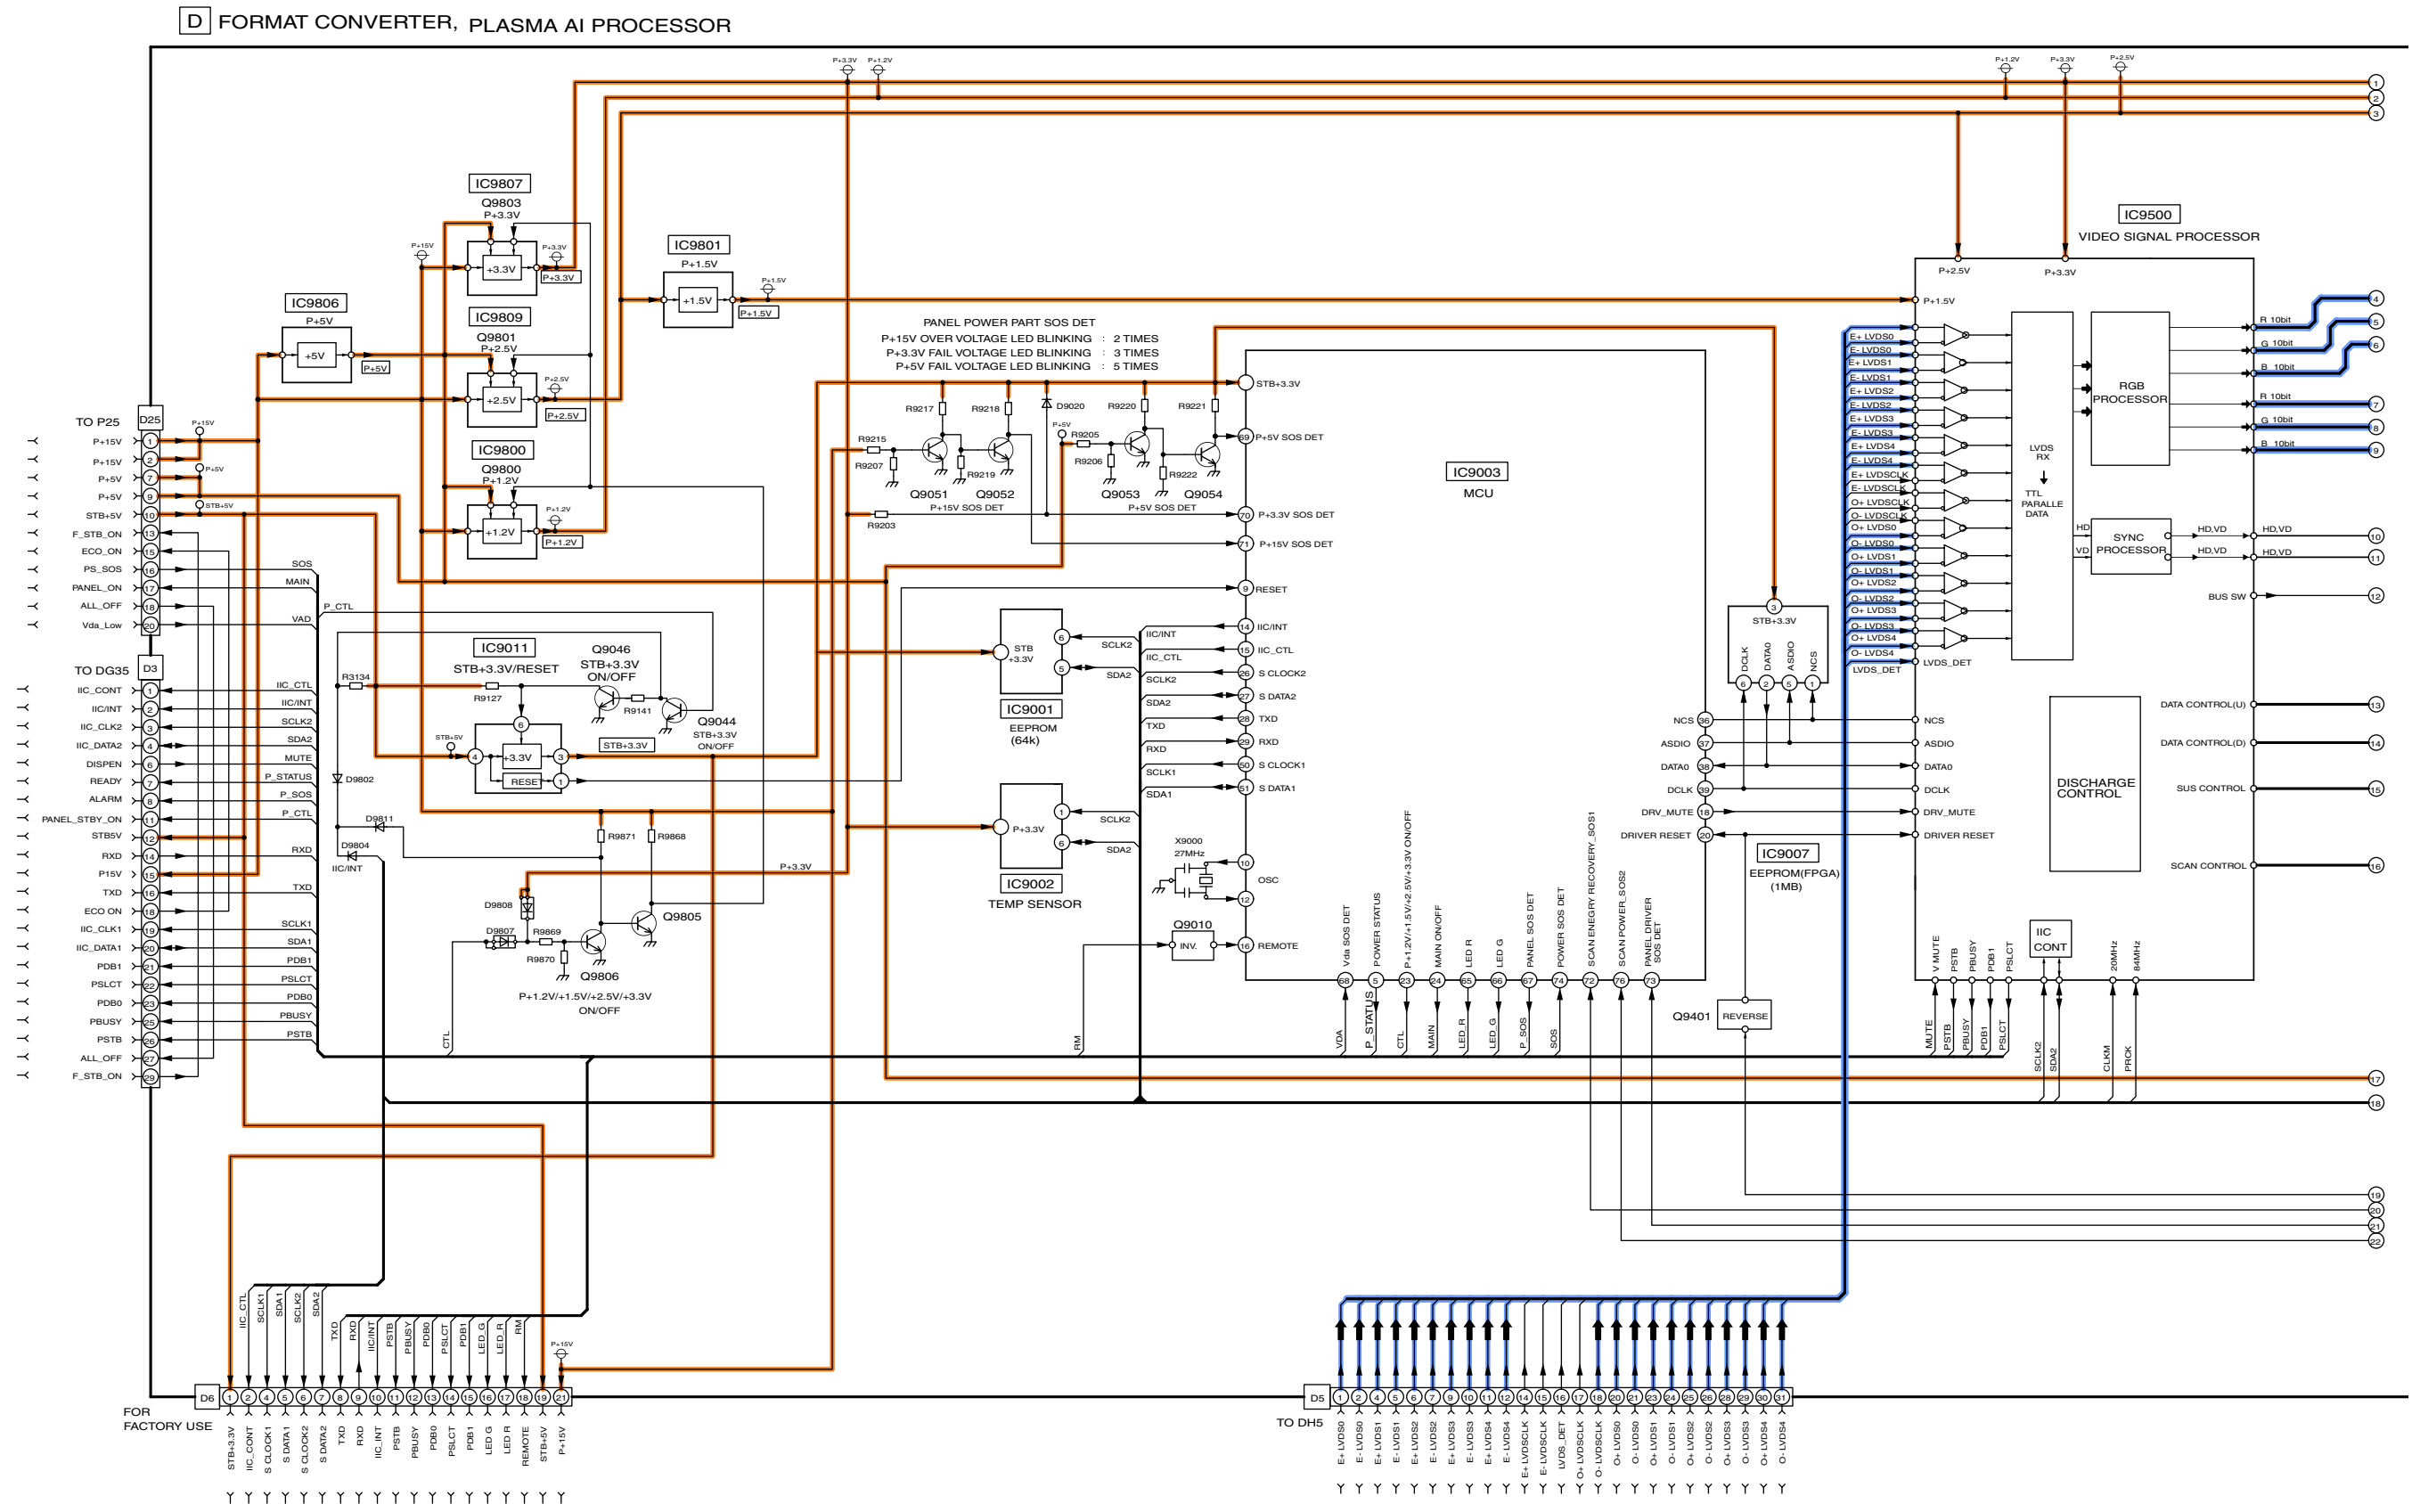

TH-58PY700AZ/M/MR, PZ700A
D-Board (1 of 2) Block Diagram

TH-58PY700AZ/M/MR, PZ700A
D-Board (1 of 2) Block Diagram

15.47. D-Board (2 of 2) Block Diagram

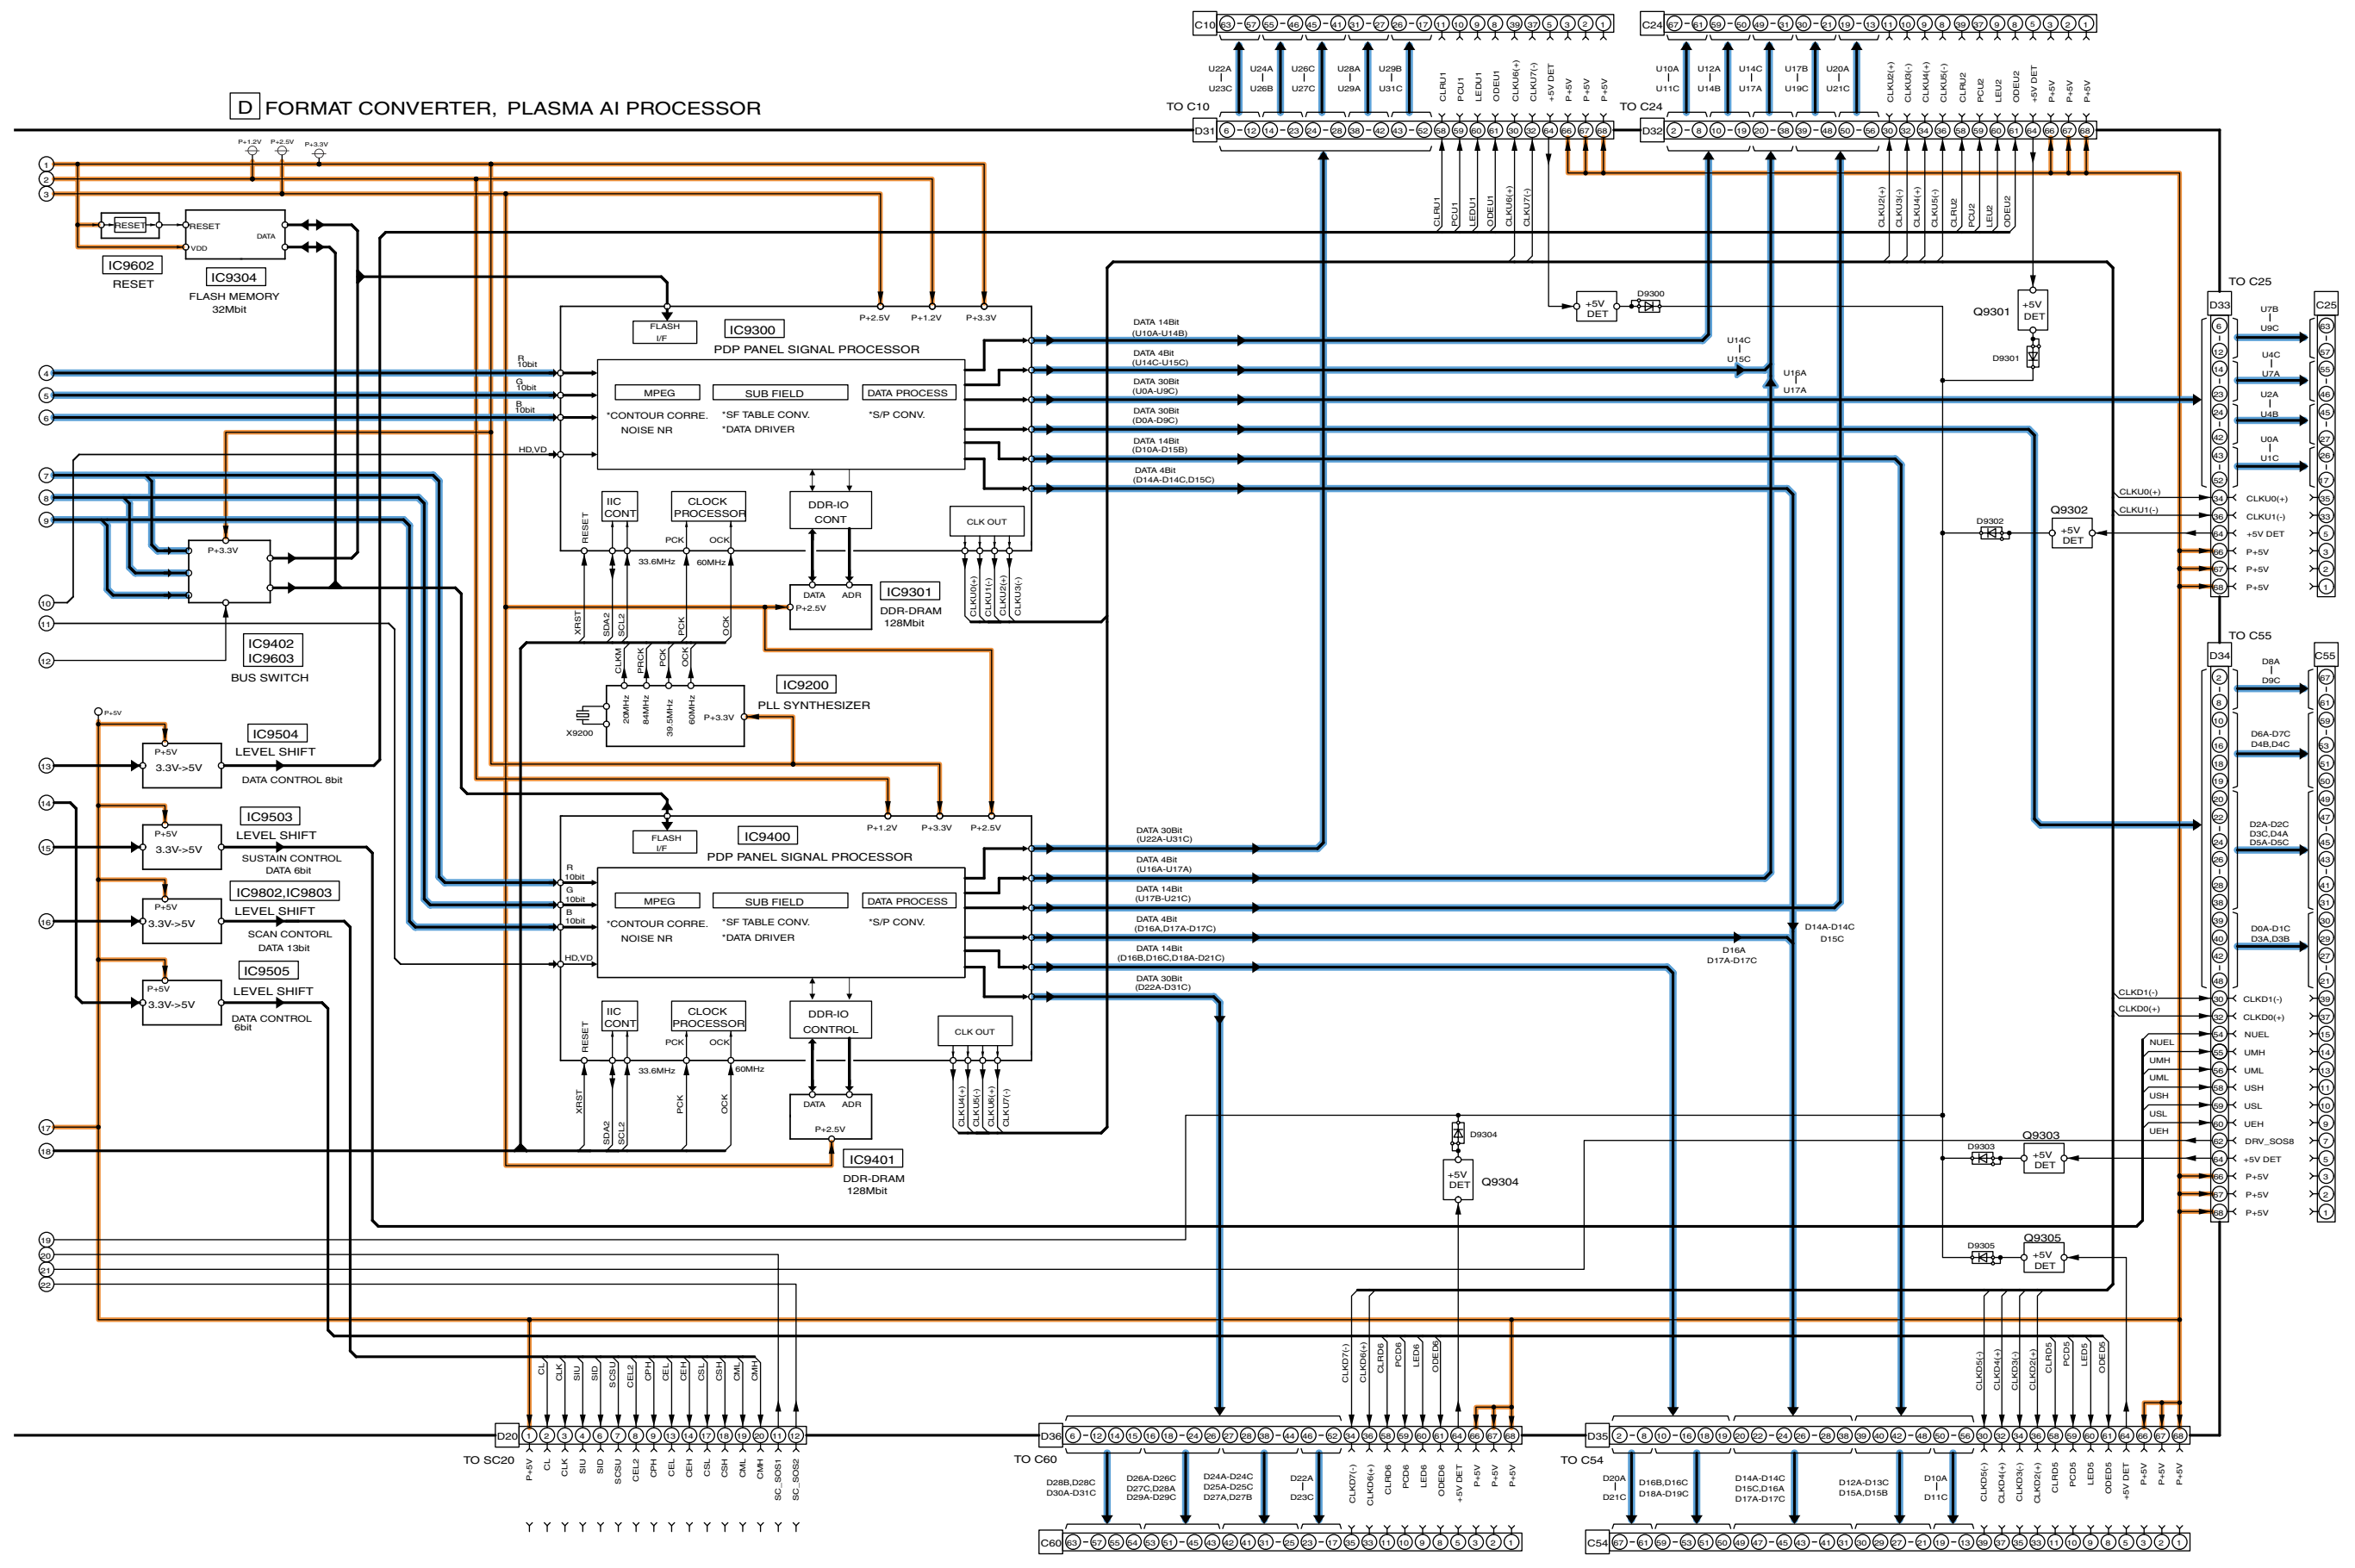


TH-58PY700AZ/M/MR, PZ700A
D-Board (2 of 2) Block Diagram

TH-58PY700AZ/M/MR, PZ700A
D-Board (1 of 2) Block Diagram

15.48. D-Board (1 of 8) Schematic Diagram

A
B
C
D
E
F

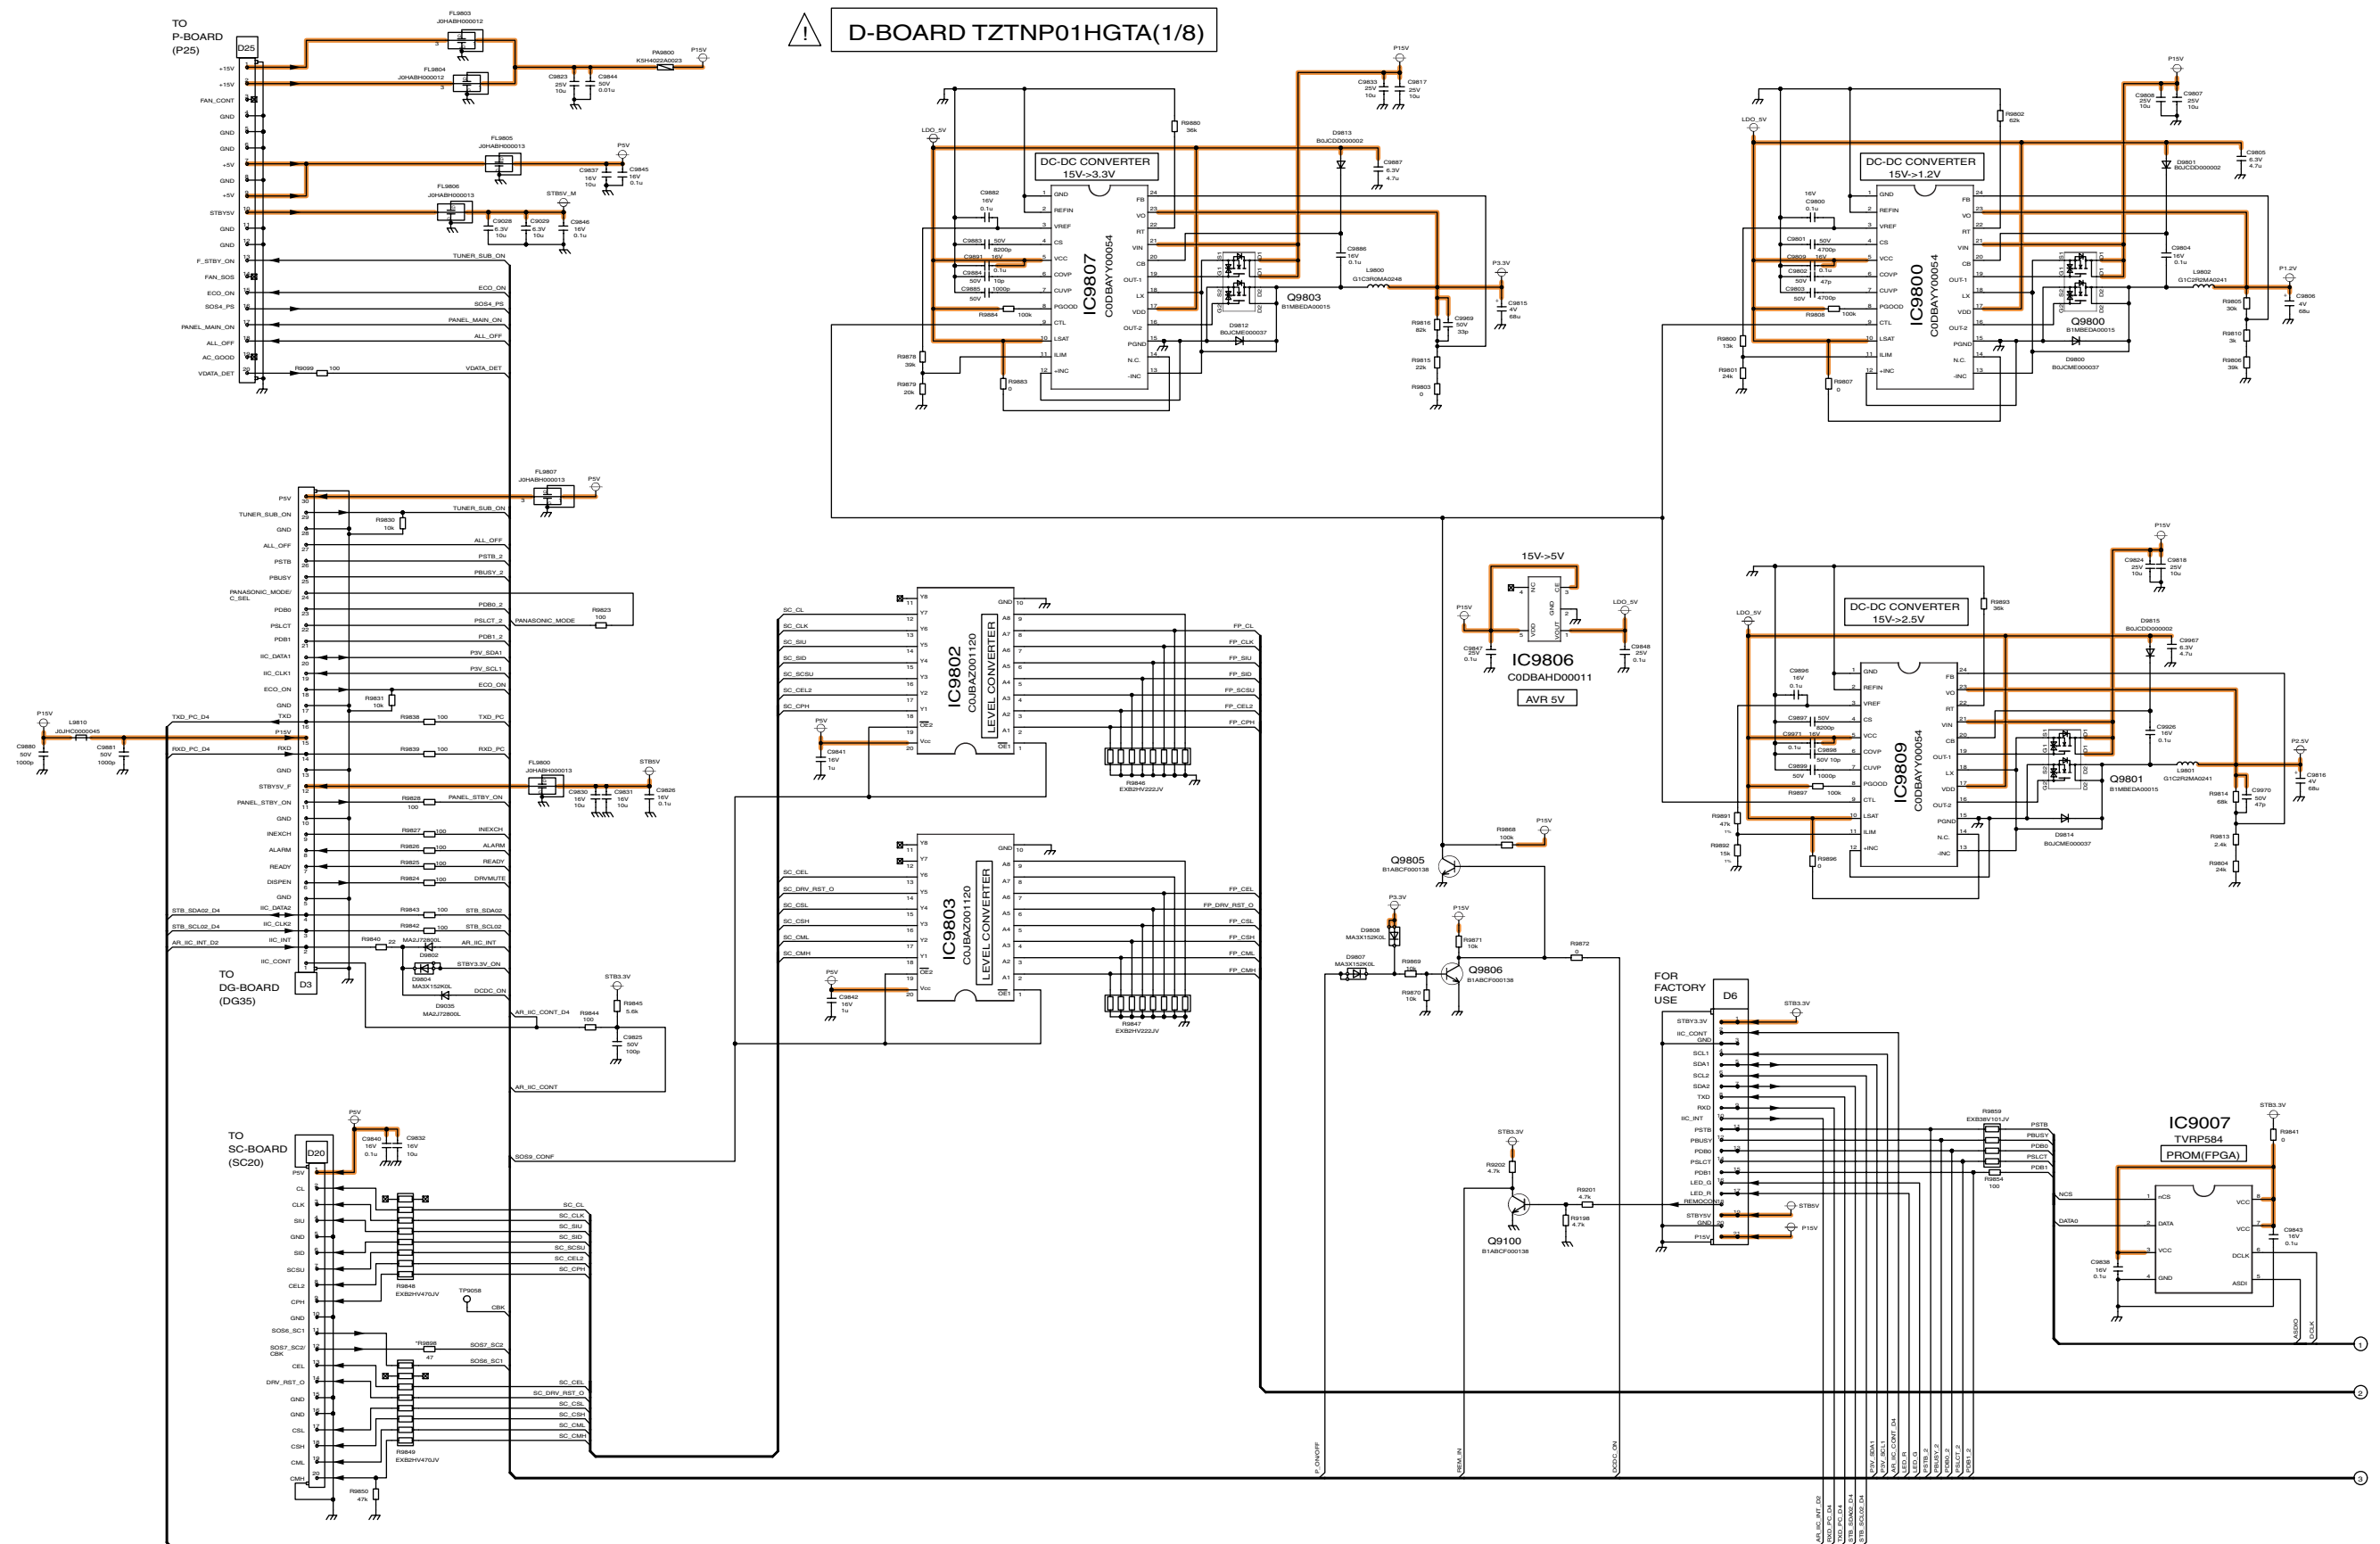


TH-58PY700AZ/M/MR, PZ700A D-Board (1 of 8) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A D-Board (1 of 8) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.49. D-Board (2 of 8) Schematic Diagram

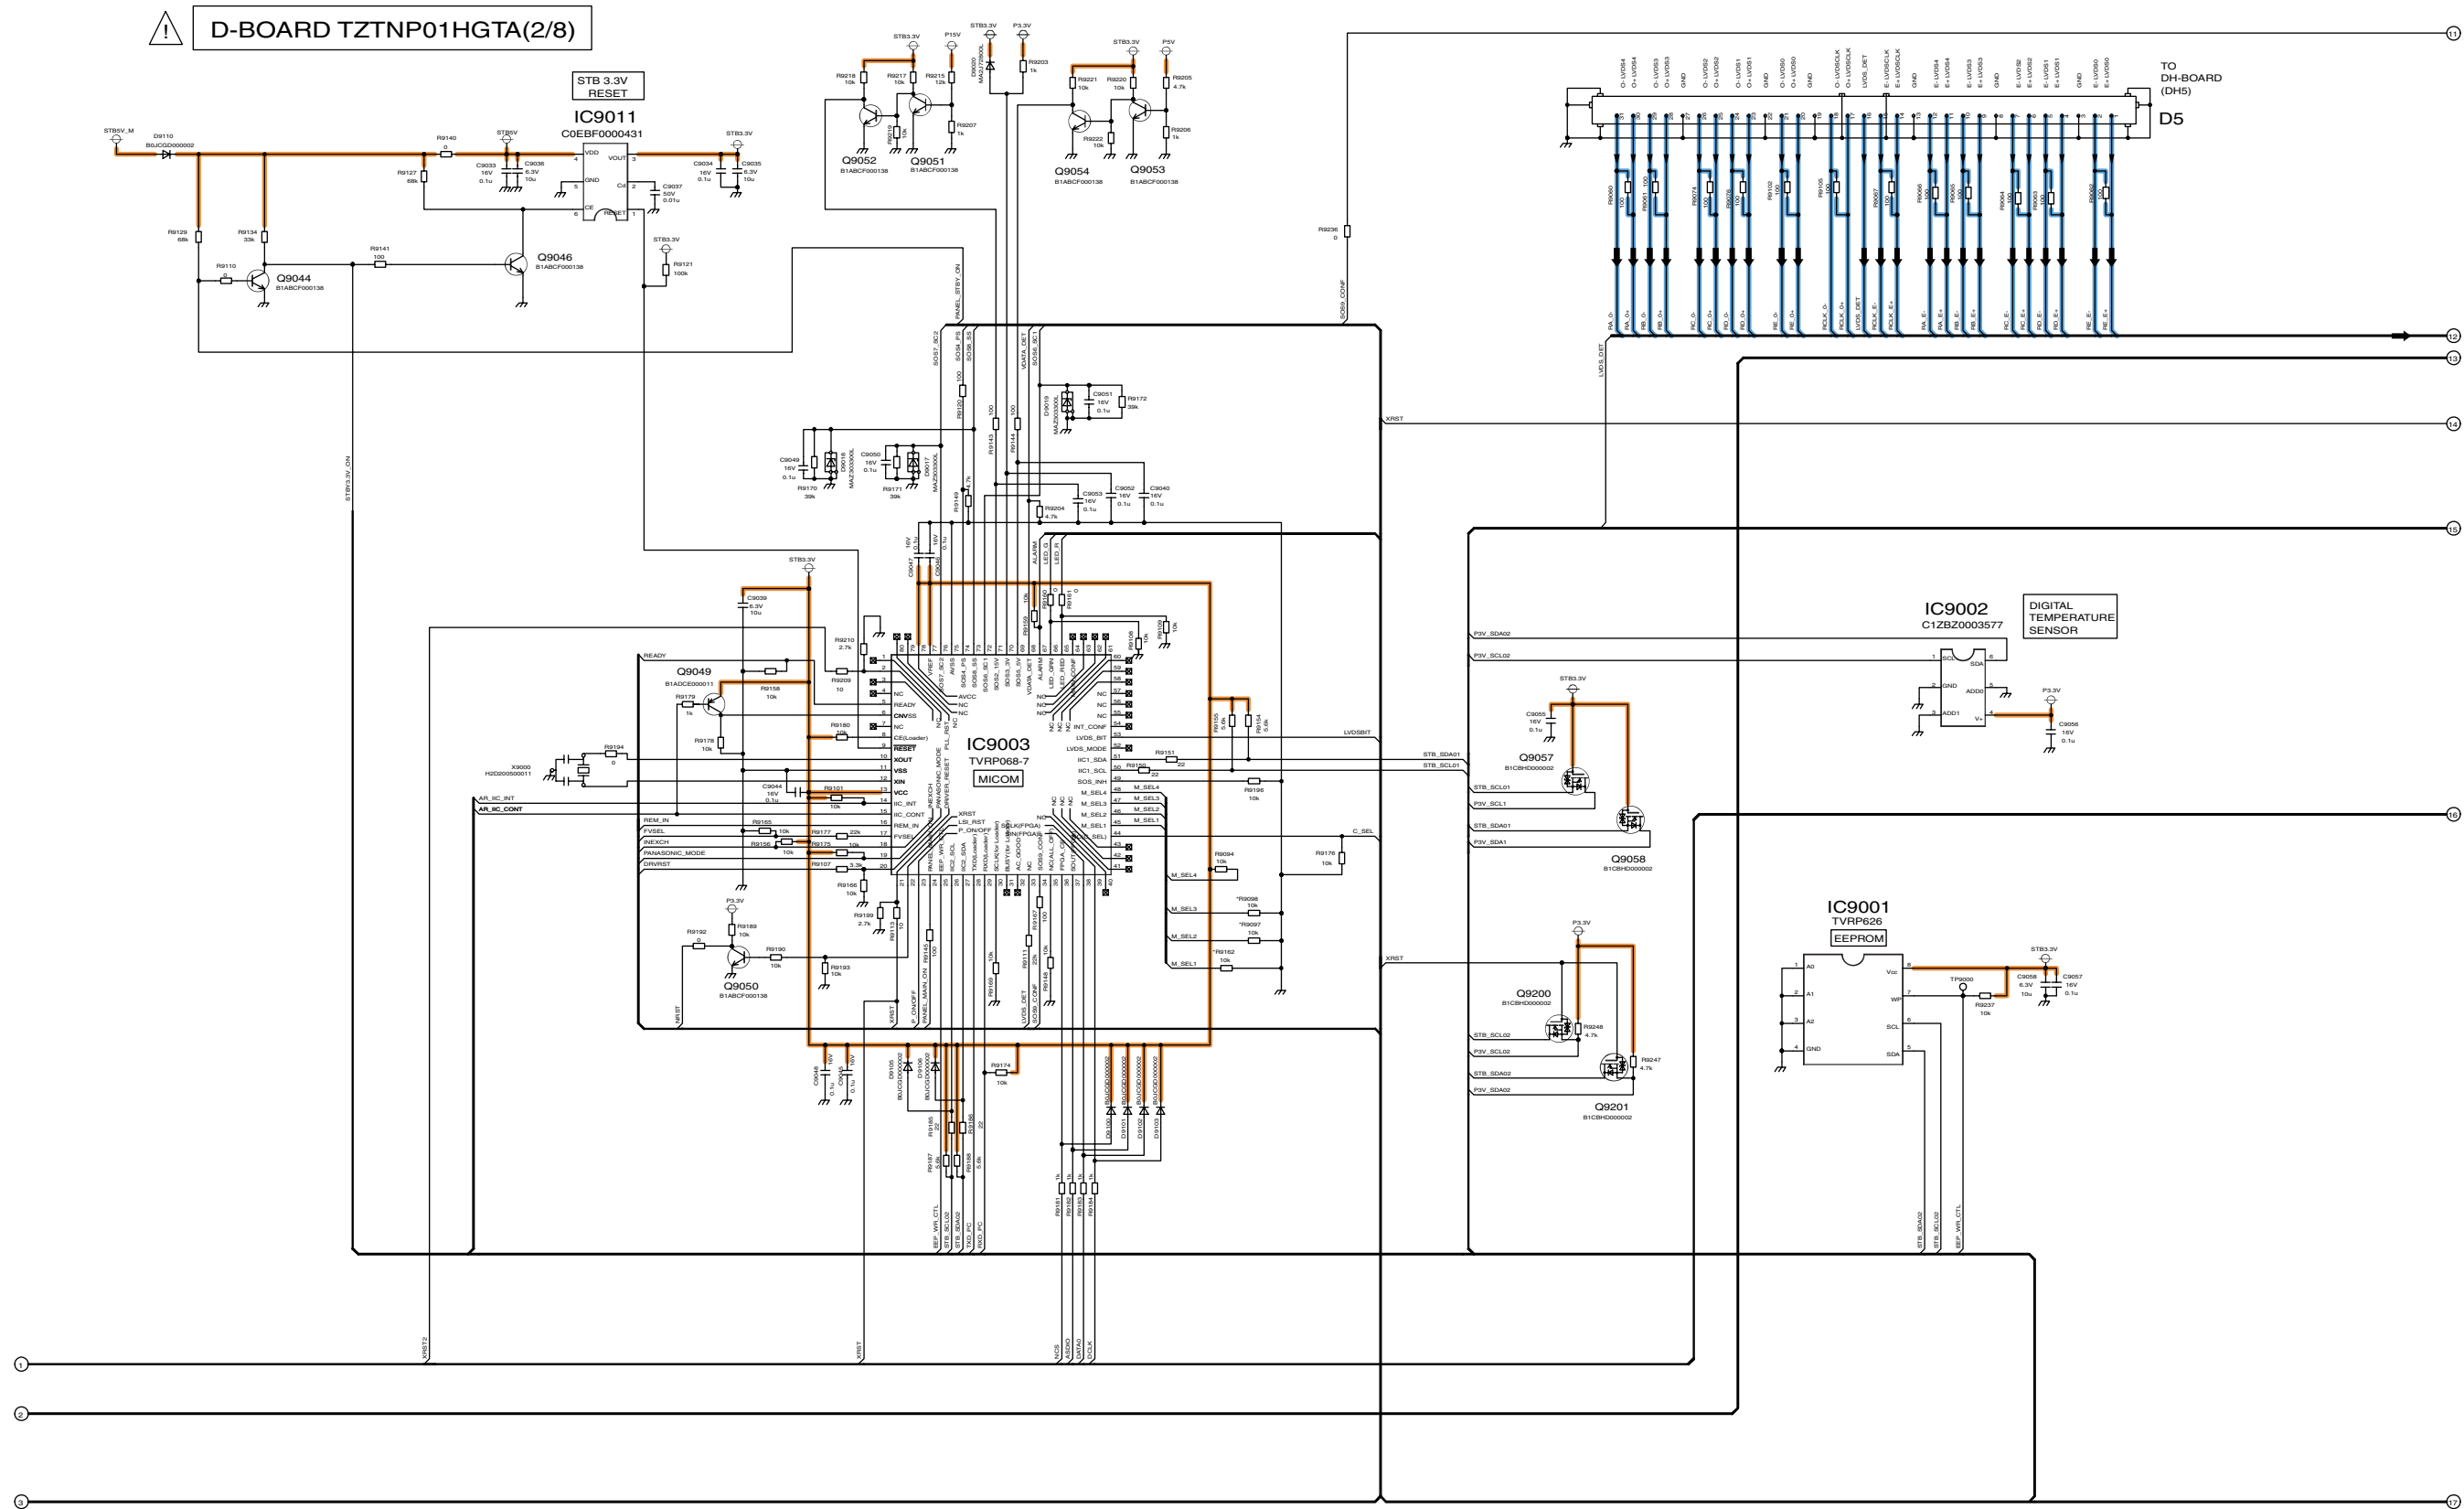

TH-58PY700AZ/M/MR, PZ700A
D-Board (2 of 8) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
D-Board (2 of 8) Schematic Diagram

10

11

12

13

14


15

16

17

18


15.50. D-Board (3 of 8) Schematic Diagram

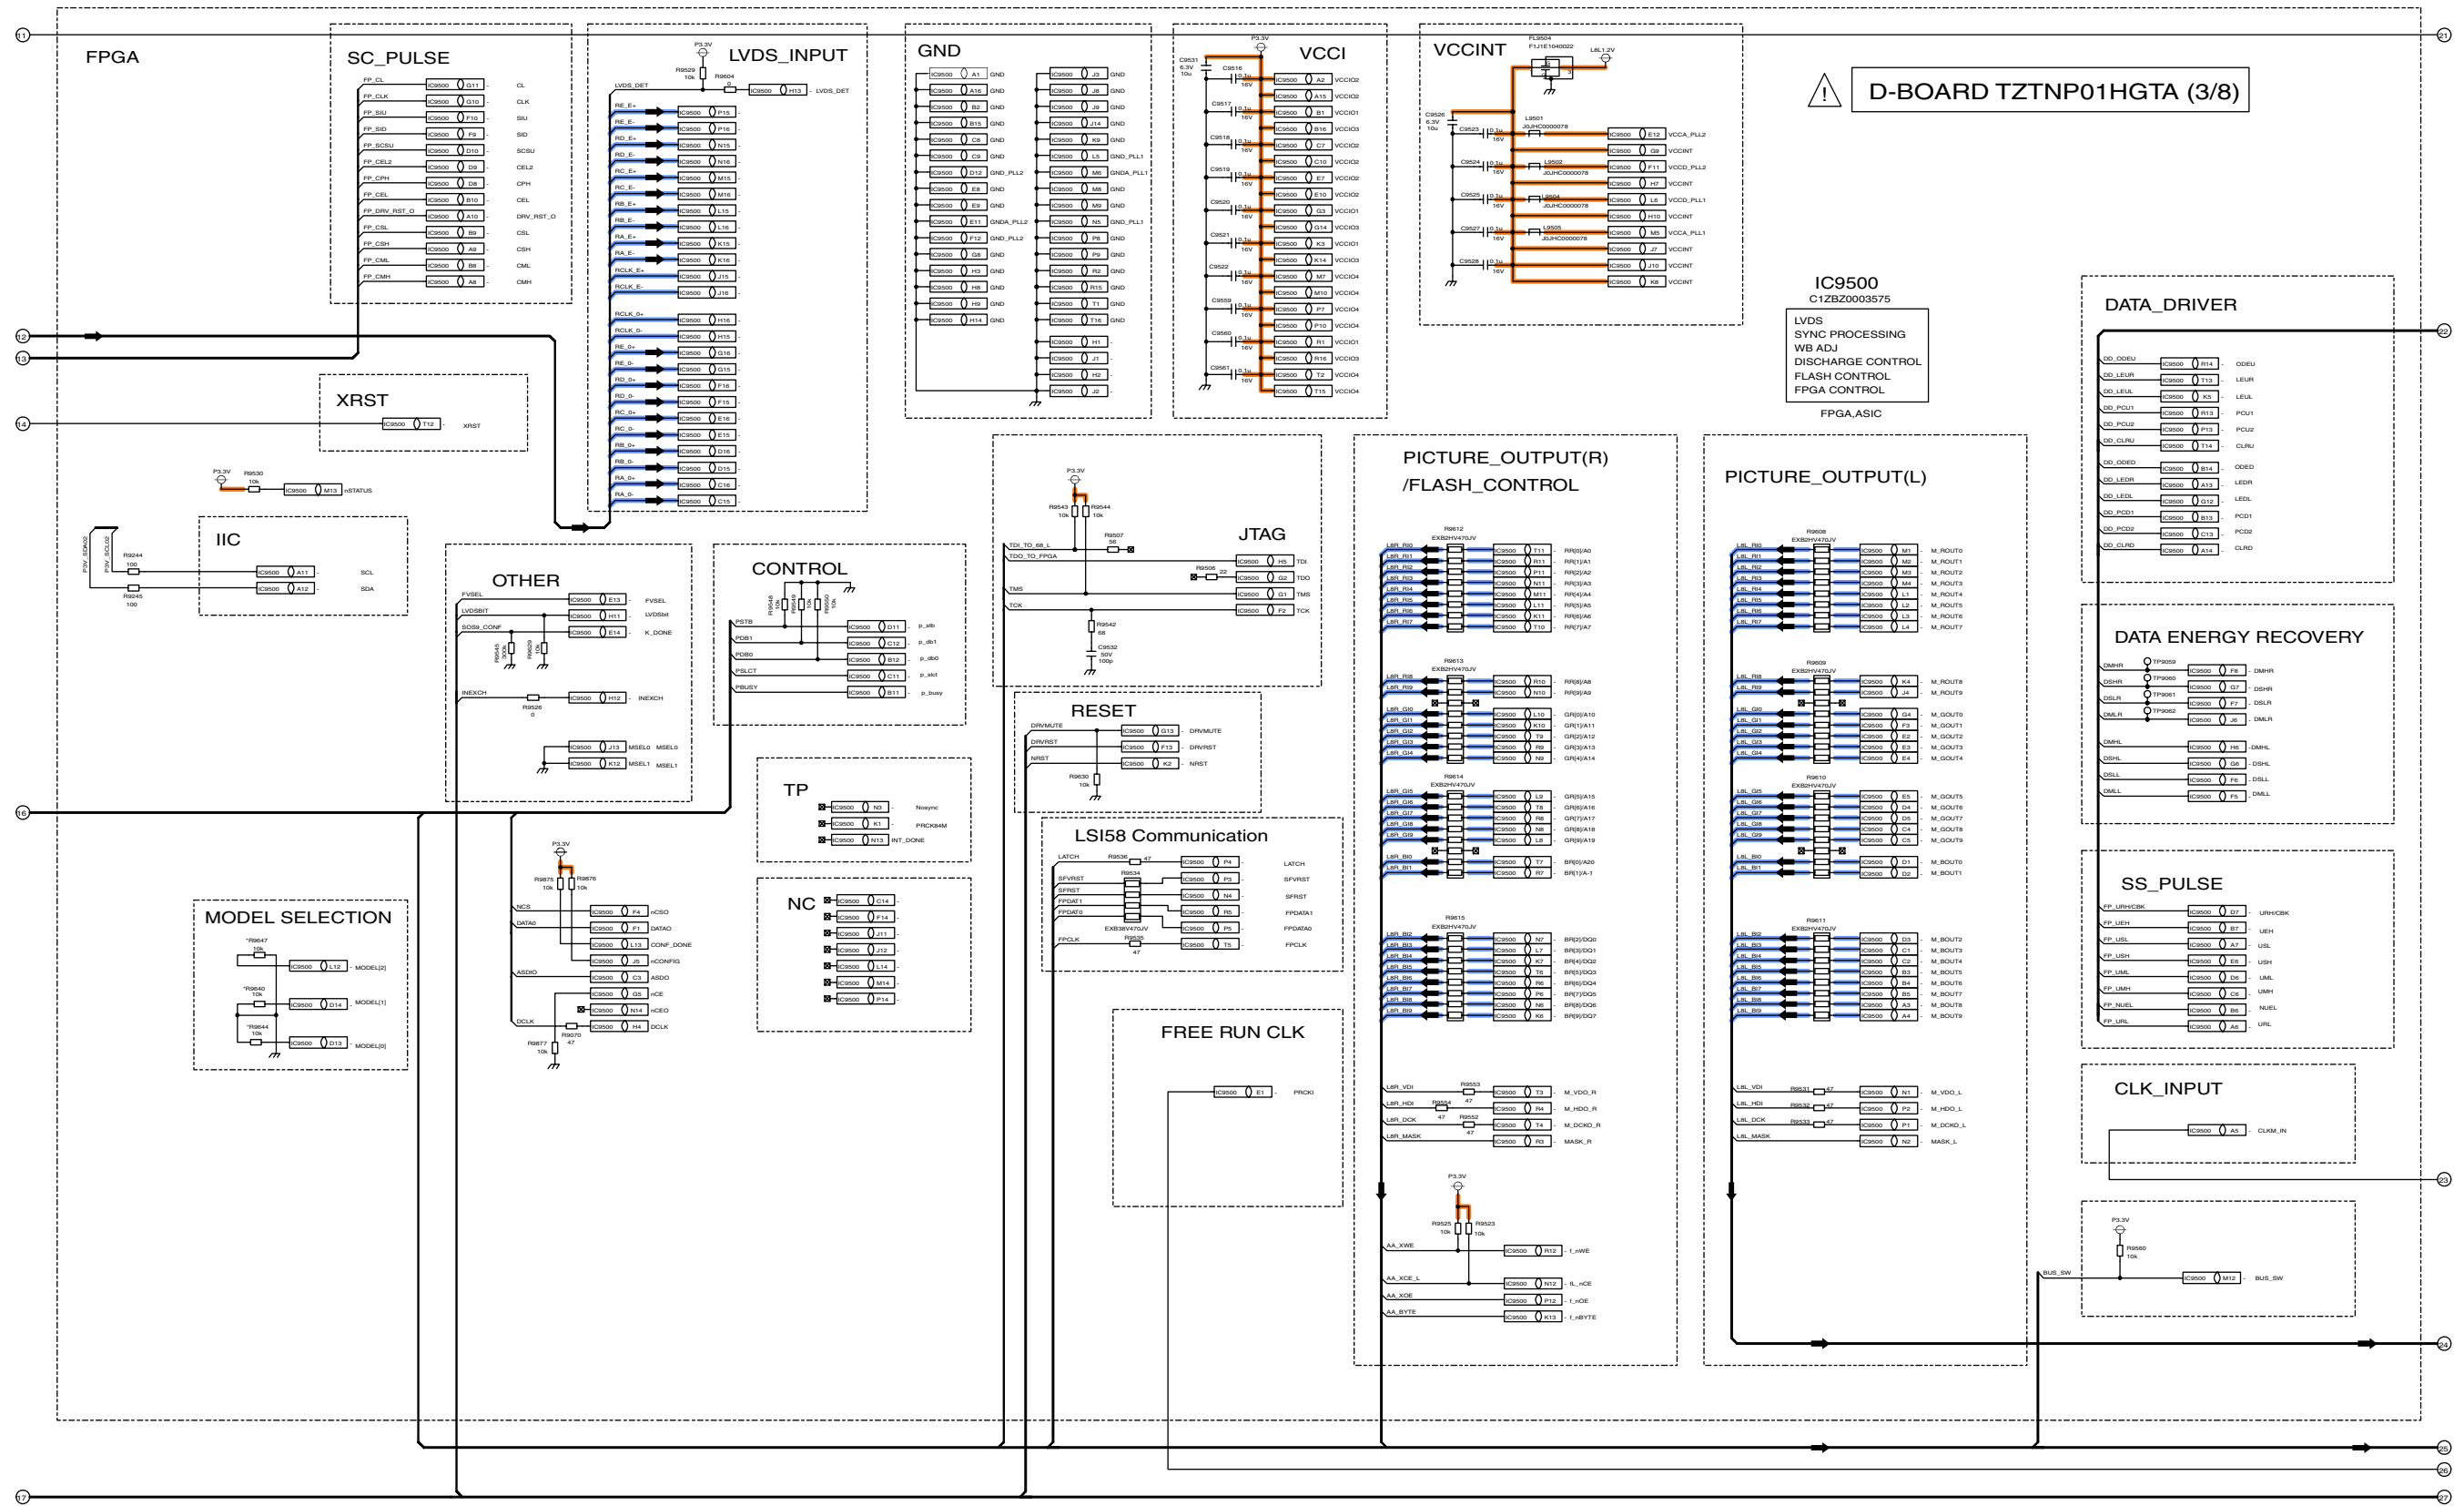

TH-58PY700AZ/M/MR, PZ700A
D-Board (3 of 8) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
D-Board (3 of 8) Schematic Diagram

15.51. D-Board (4 of 8) Schematic Diagram

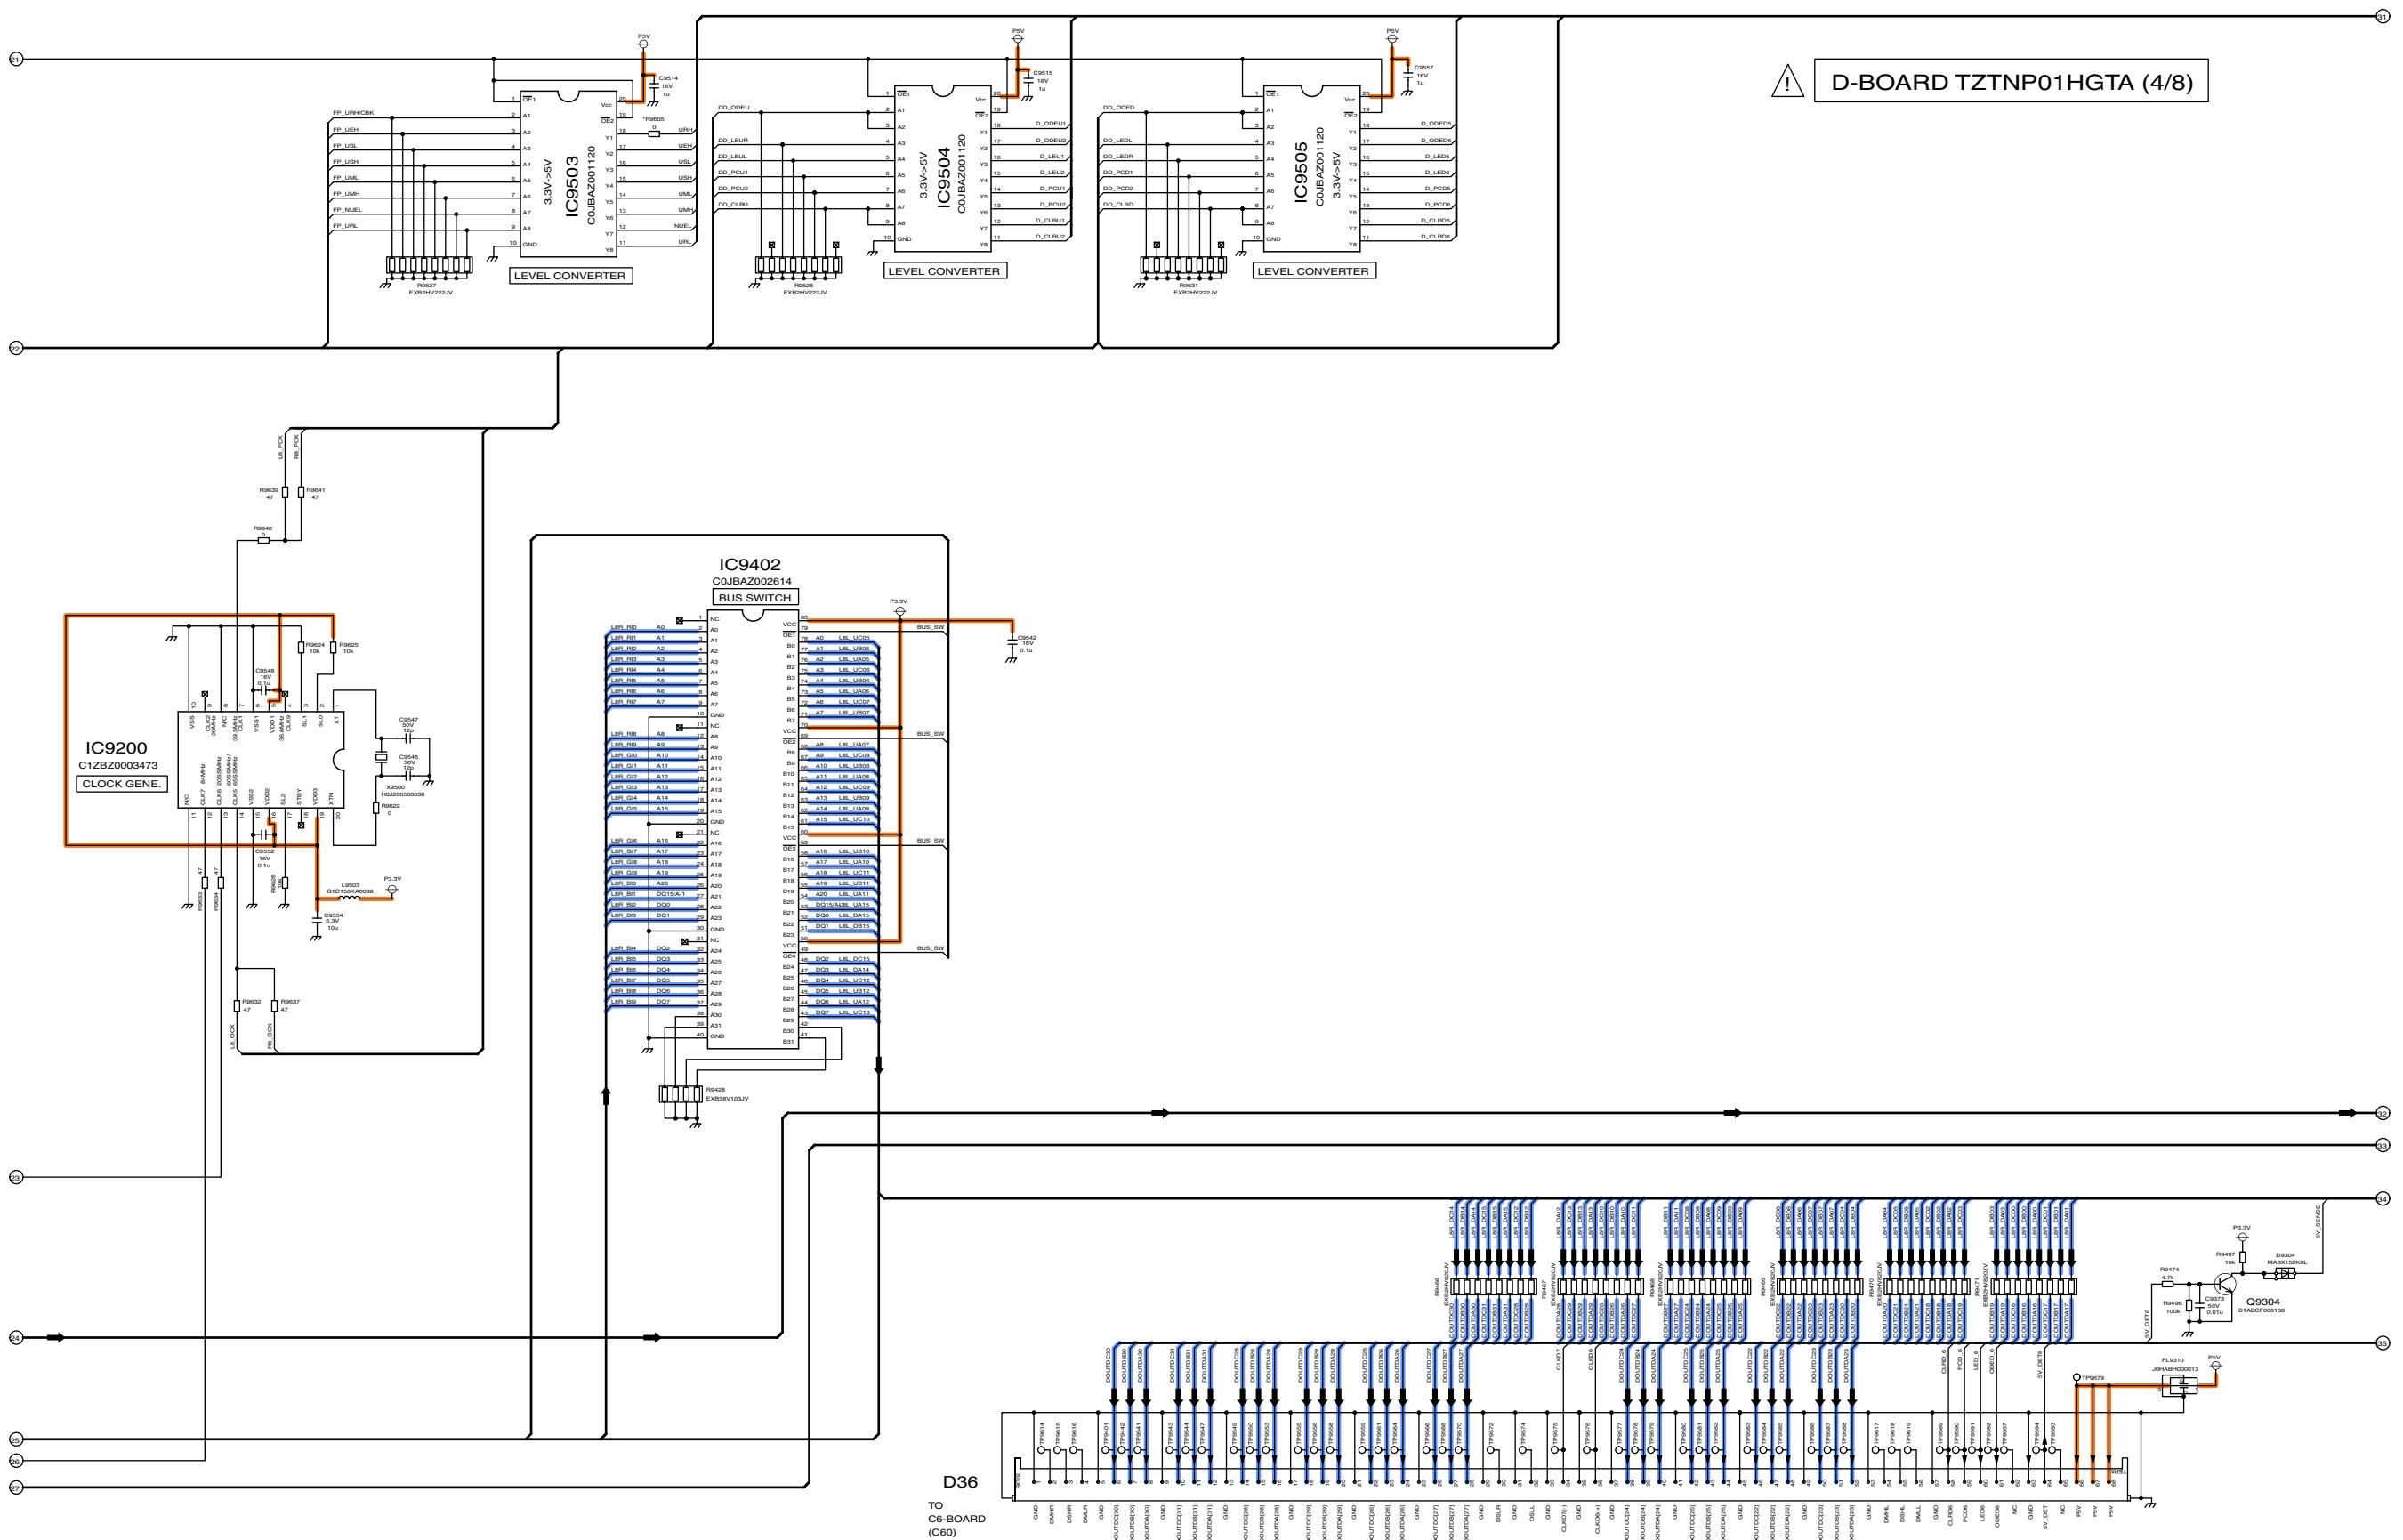

TH-58PY700AZ/M/MR, PZ700A
D-Board (4 of 8) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
D-Board (4 of 8) Schematic Diagram

28

29

30

31

32


33

34

35

36

15.52. D-Board (5 of 8) Schematic Diagram

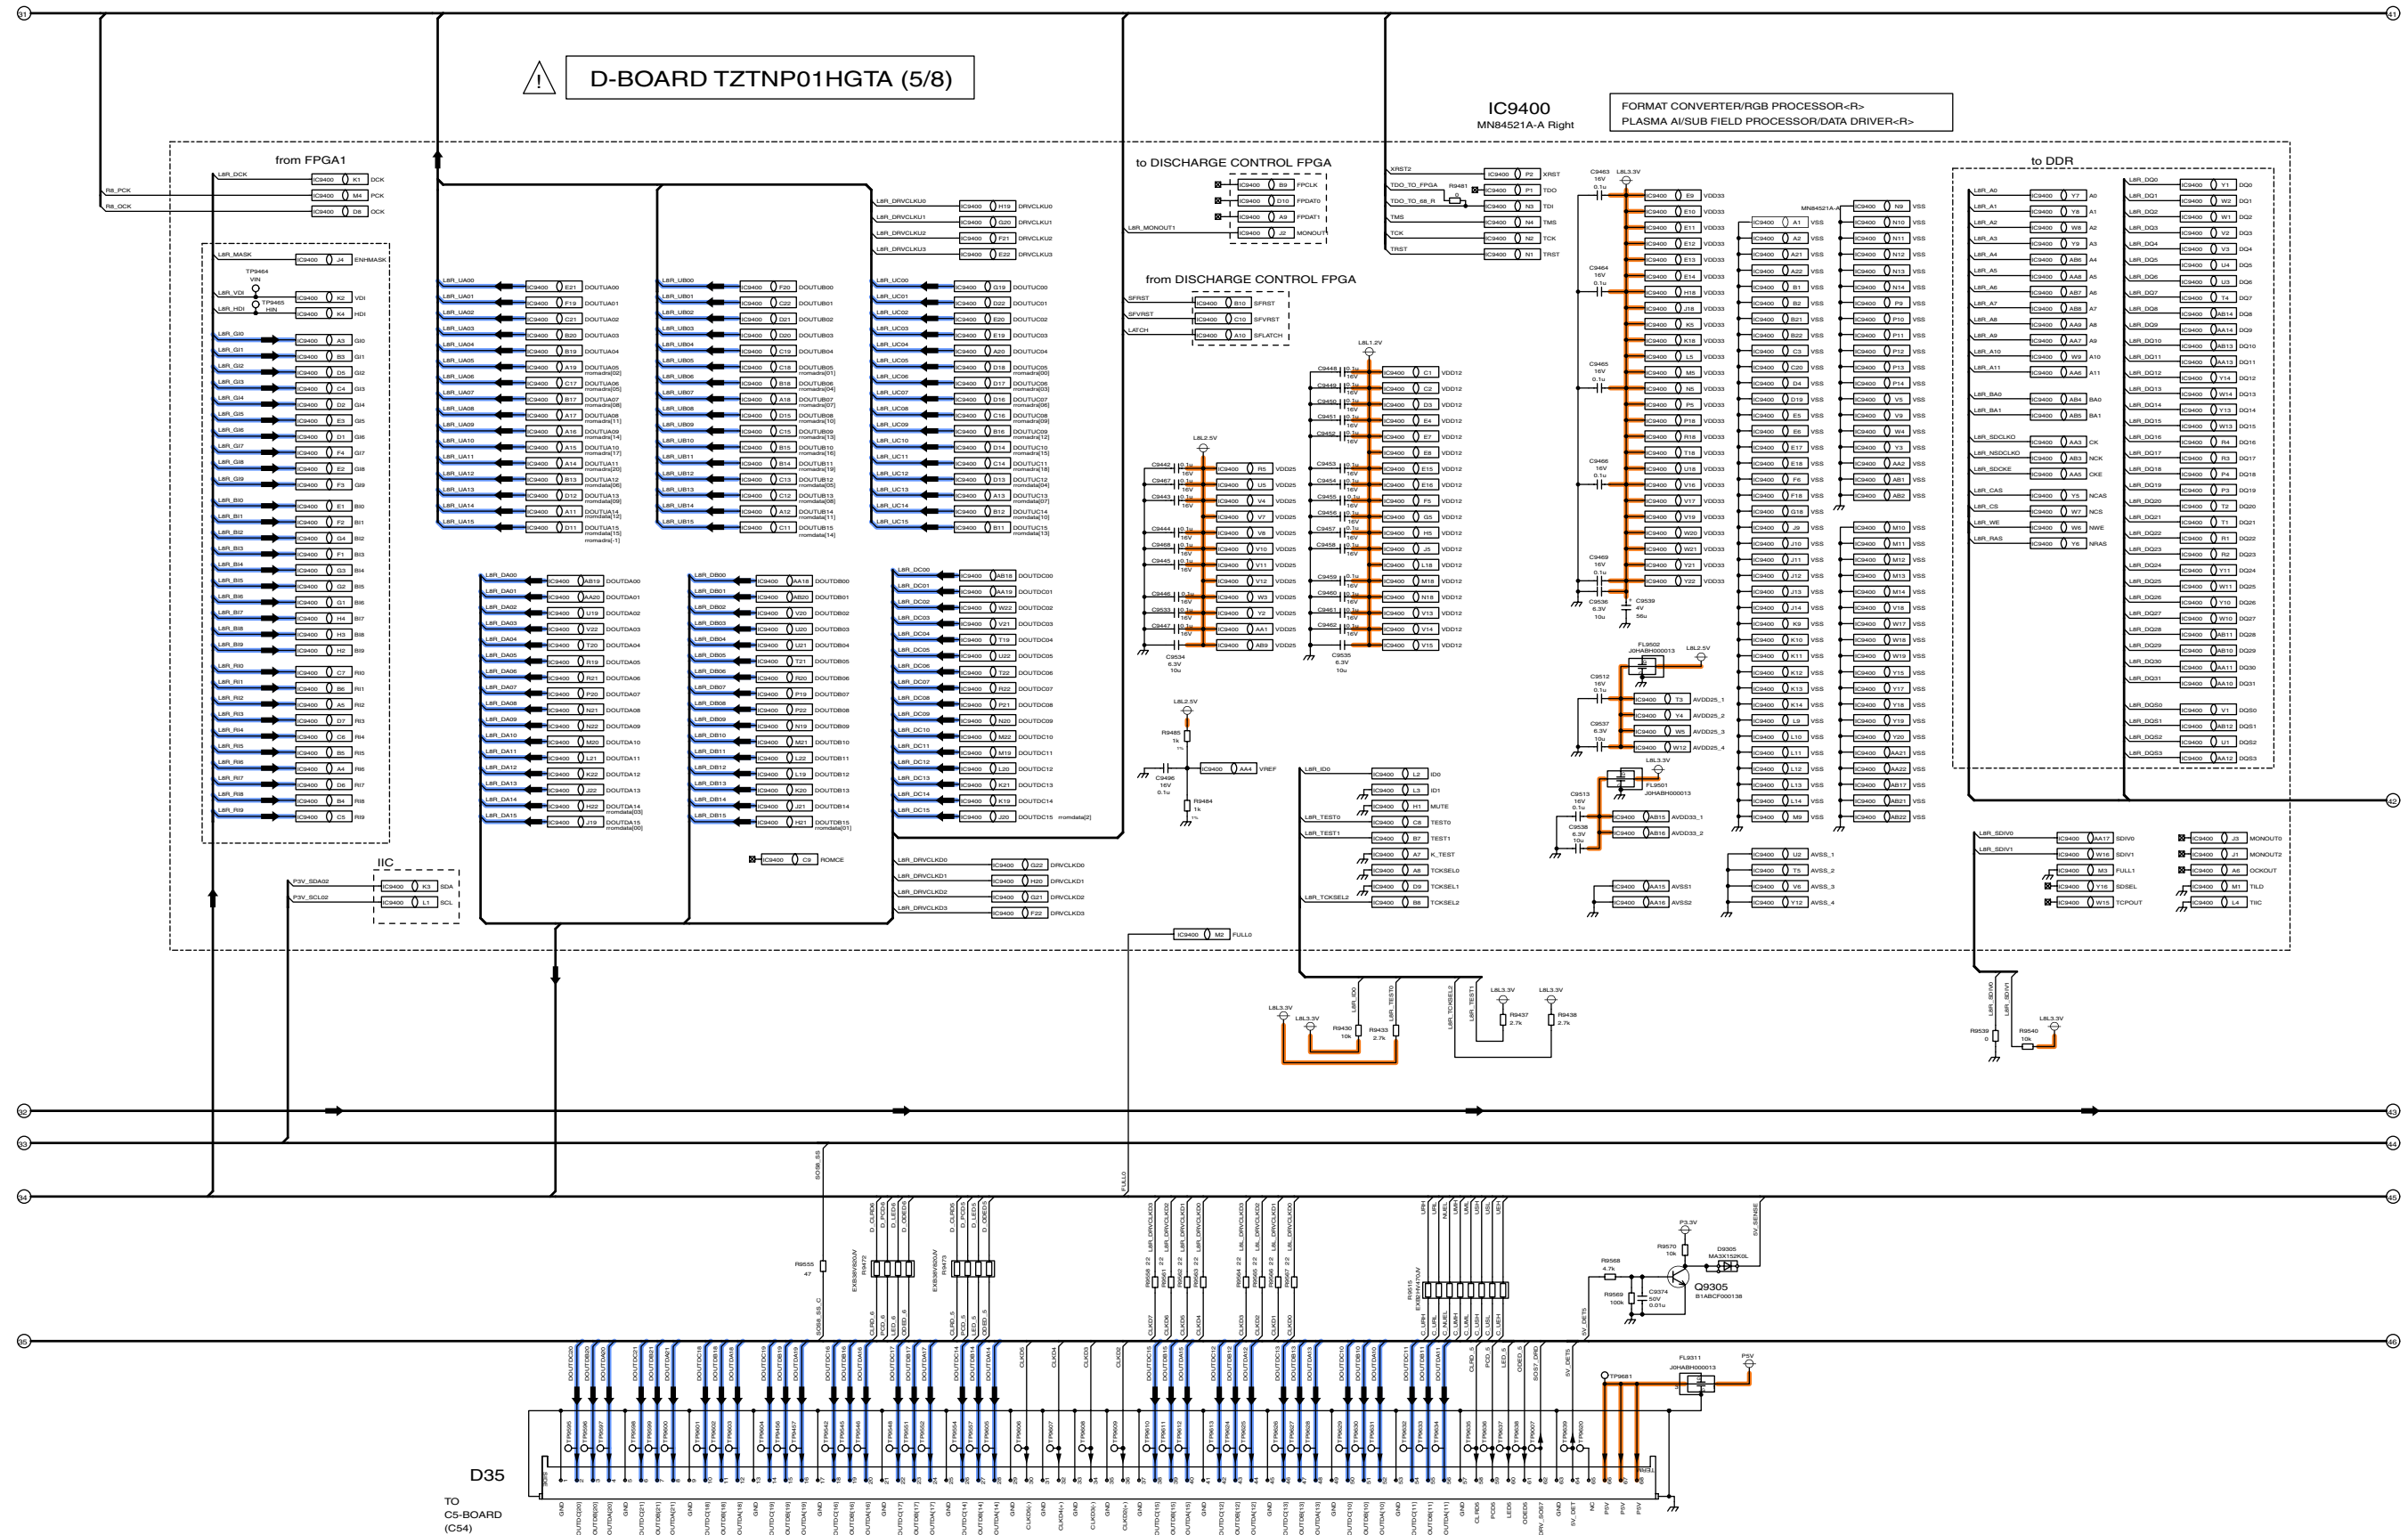

TH-58PY700AZ/M/MR, PZ700A D-Board (5 of 8) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A D-Board (5 of 8) Schematic Diagram

37

38

39

40

41


42

43

44

45

15.53. D-Board (6 of 8) Schematic Diagram

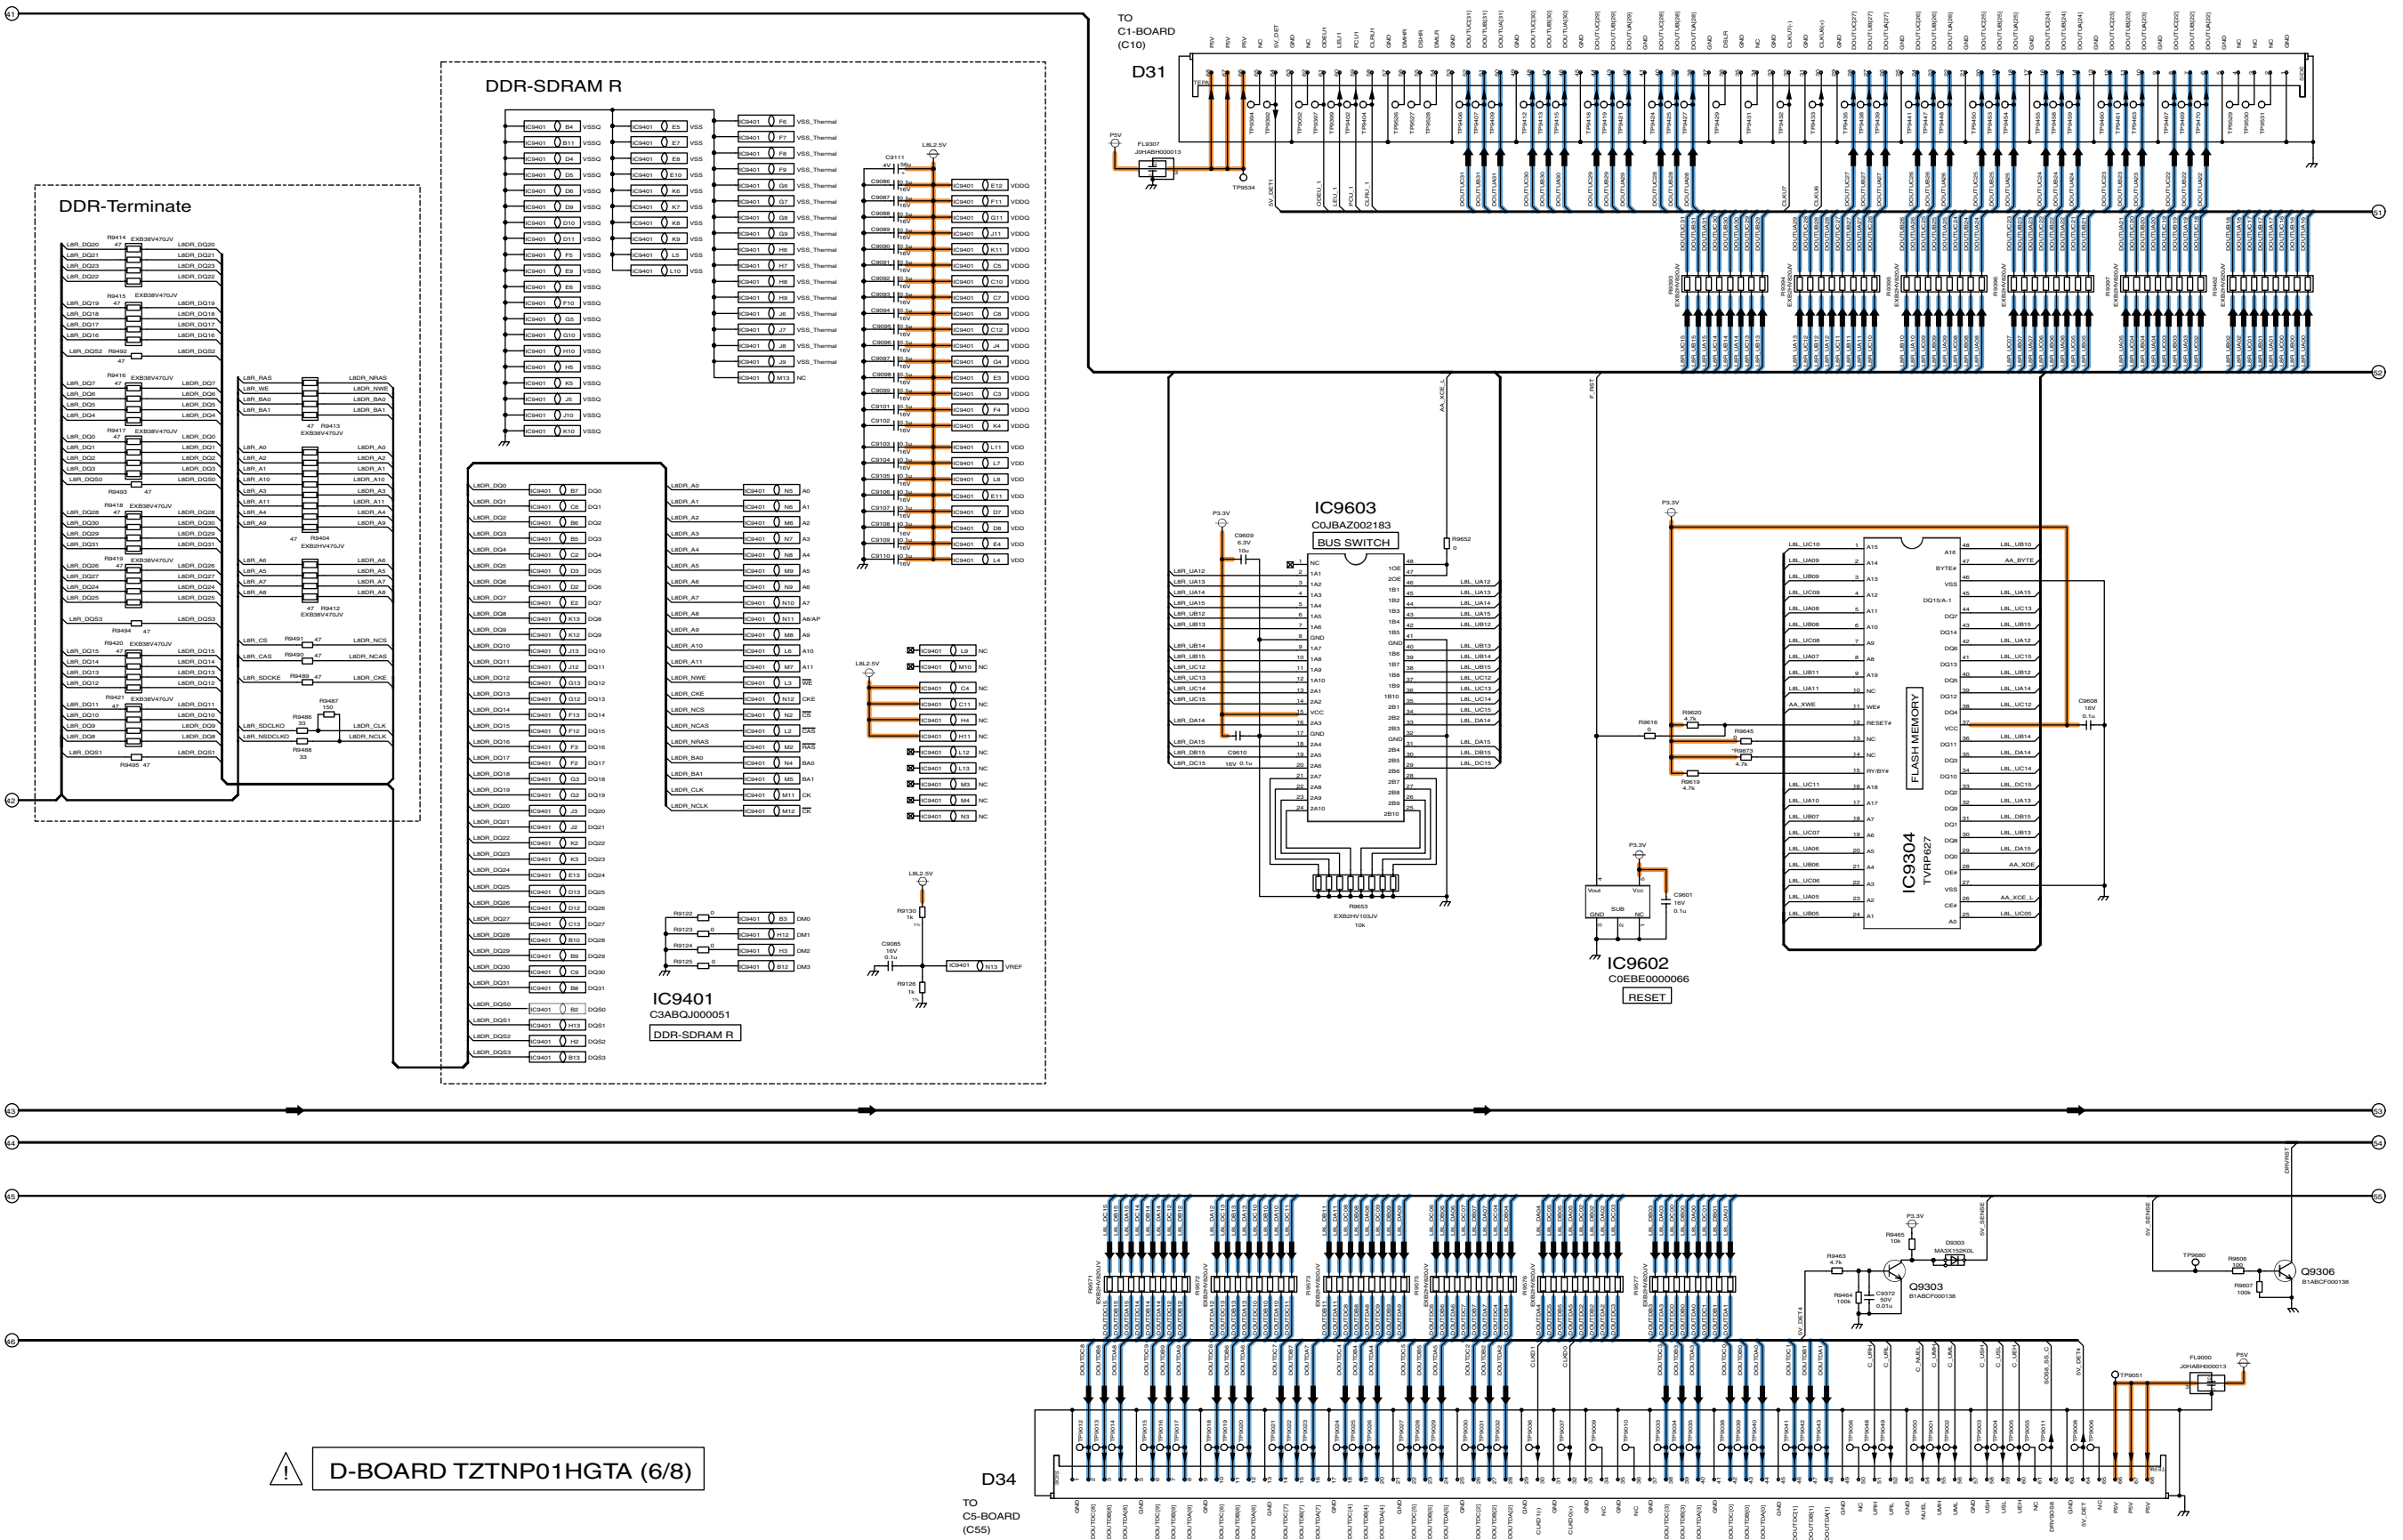


⚠ **D-BOARD TZTNP01HGTA (6/8)**

TH-58PY700AZ/M/MR, PZ700A
D-Board (6 of 8) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
D-Board (6 of 8) Schematic Diagram





15.54. D-Board (7 of 8) Schematic Diagram

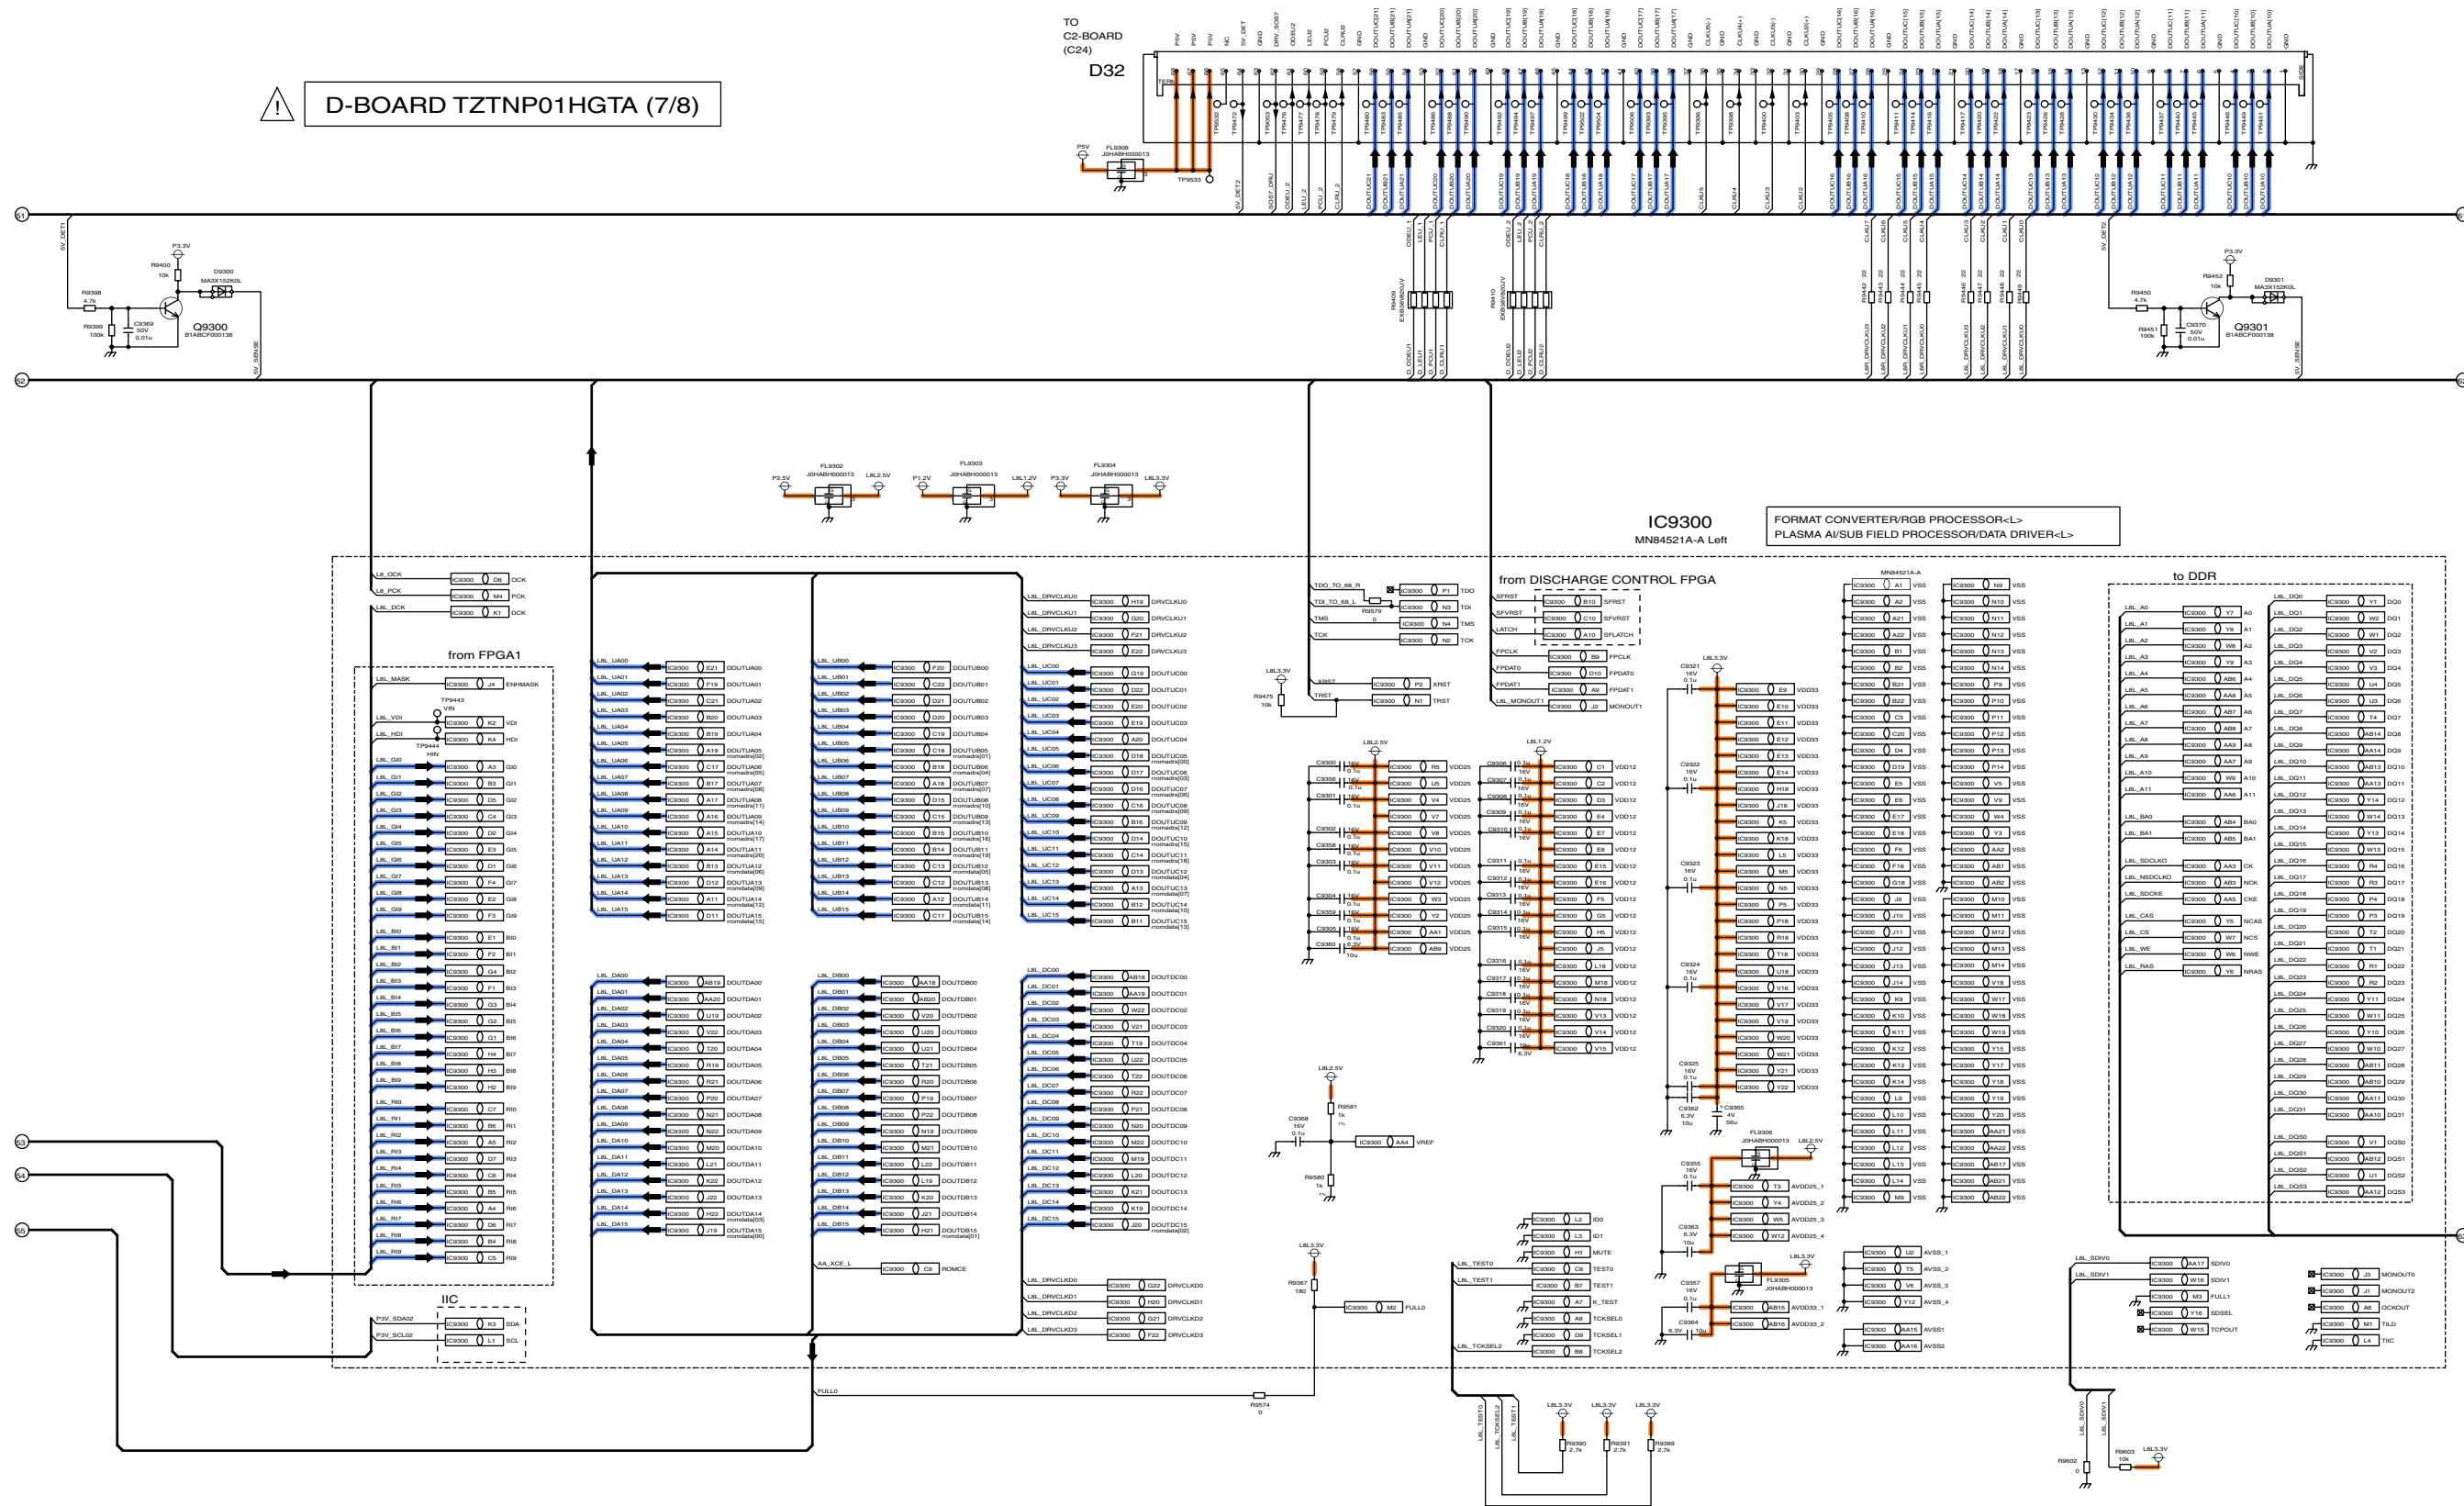

TH-58PY700AZ/M/MR, PZ700A
D-Board (7 of 8) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
D-Board (7 of 8) Schematic Diagram


15.56. C1, C2, C5 and C6 Block Diagram

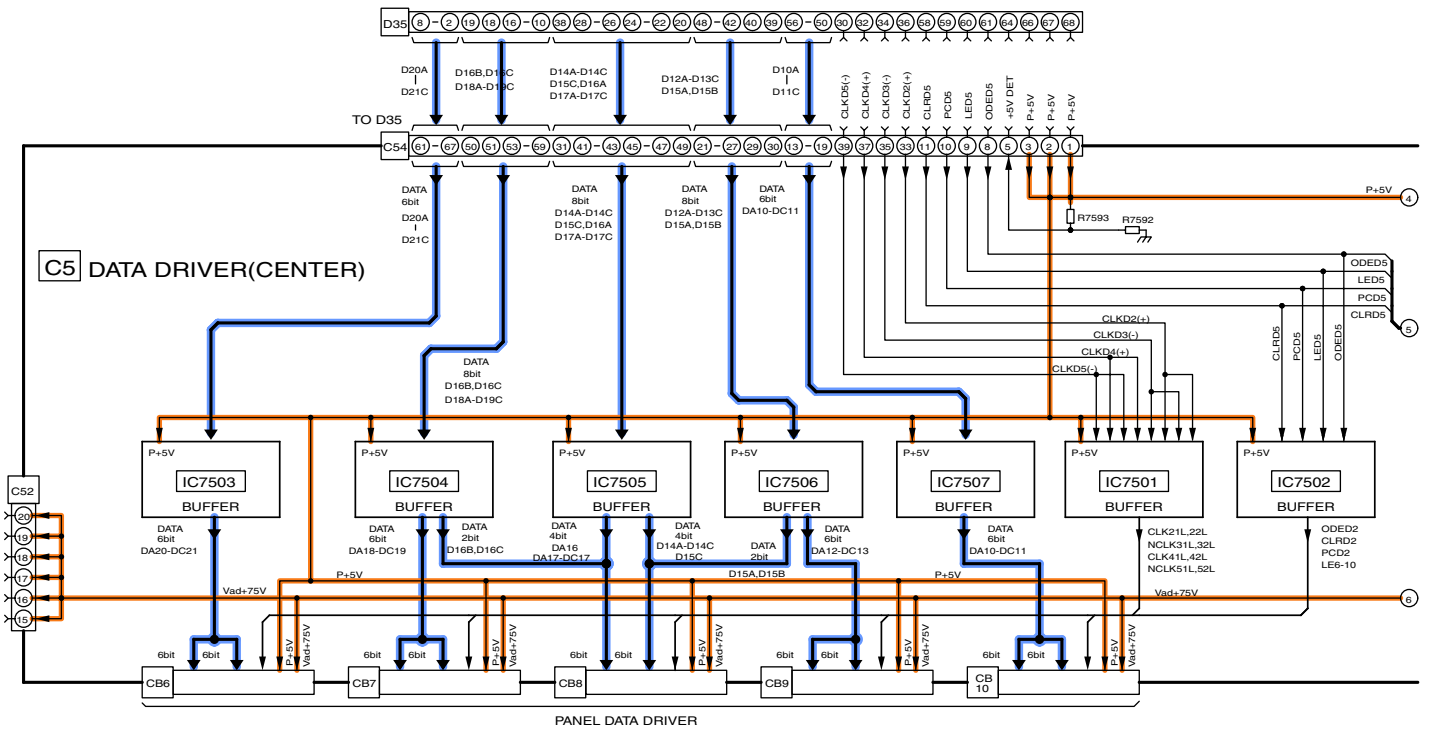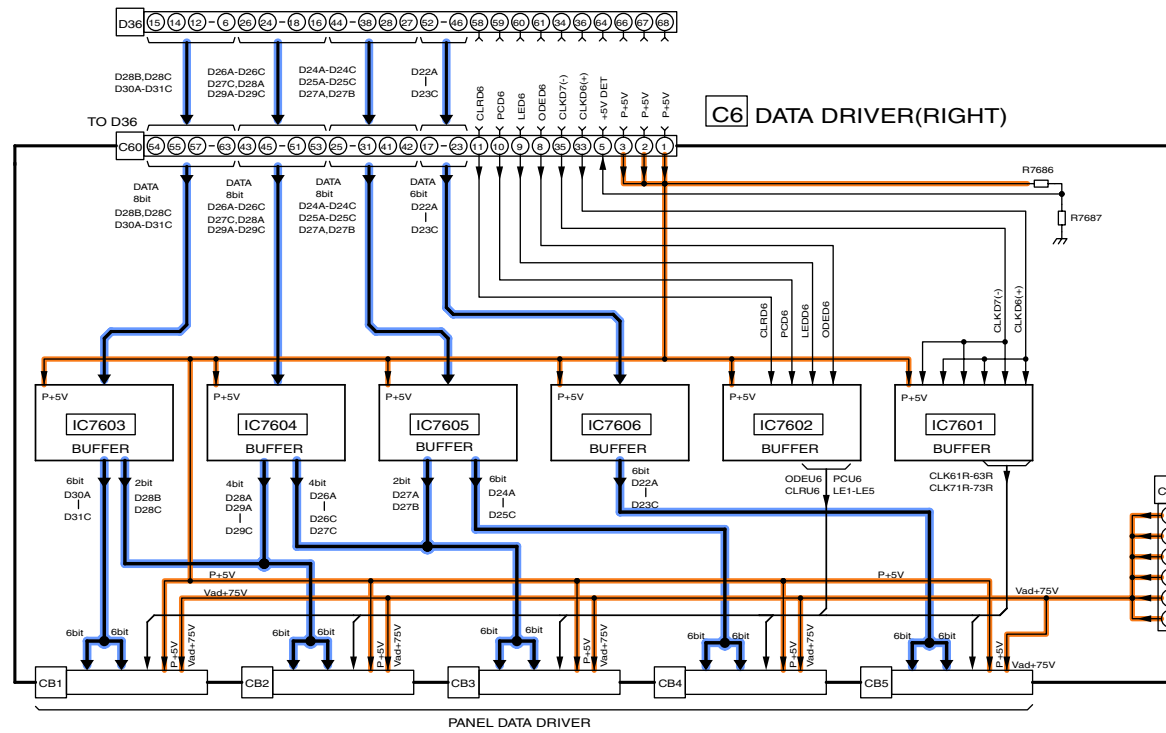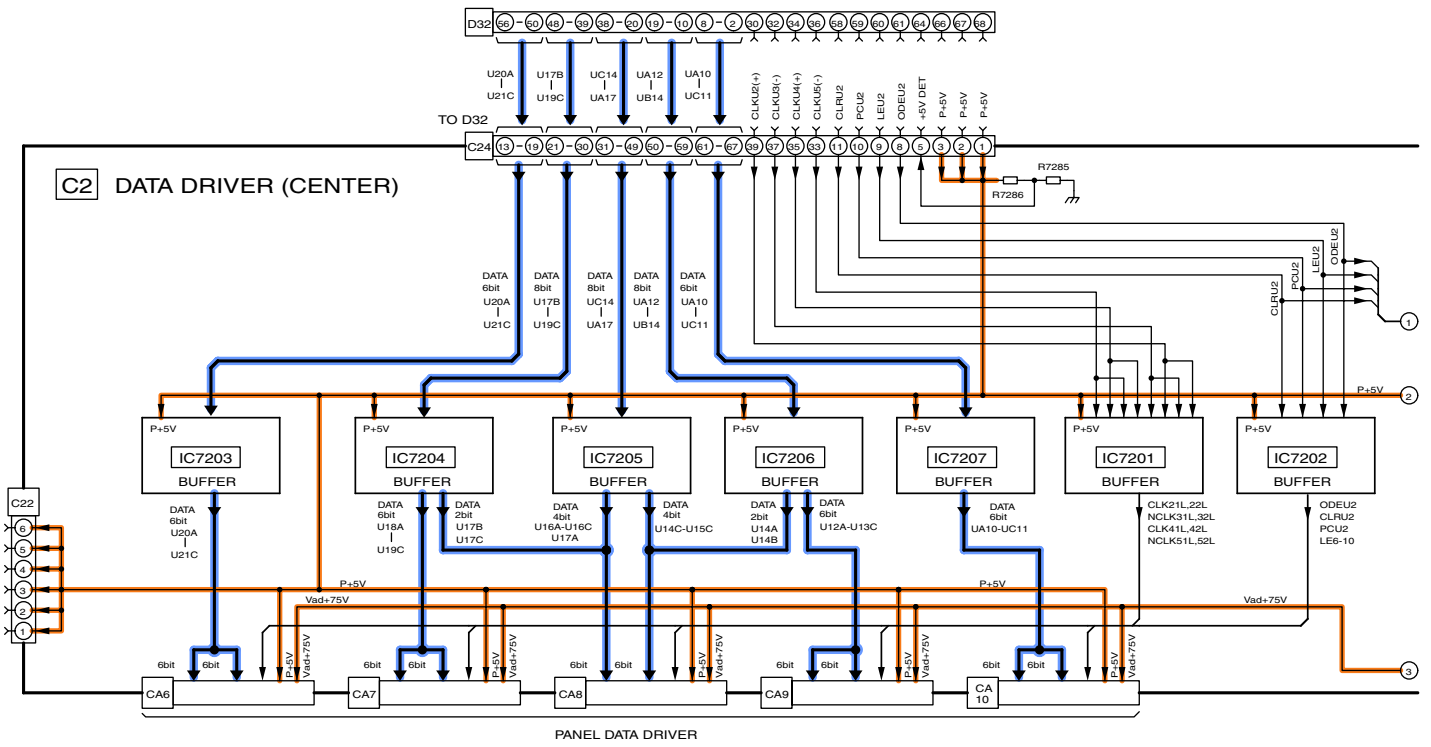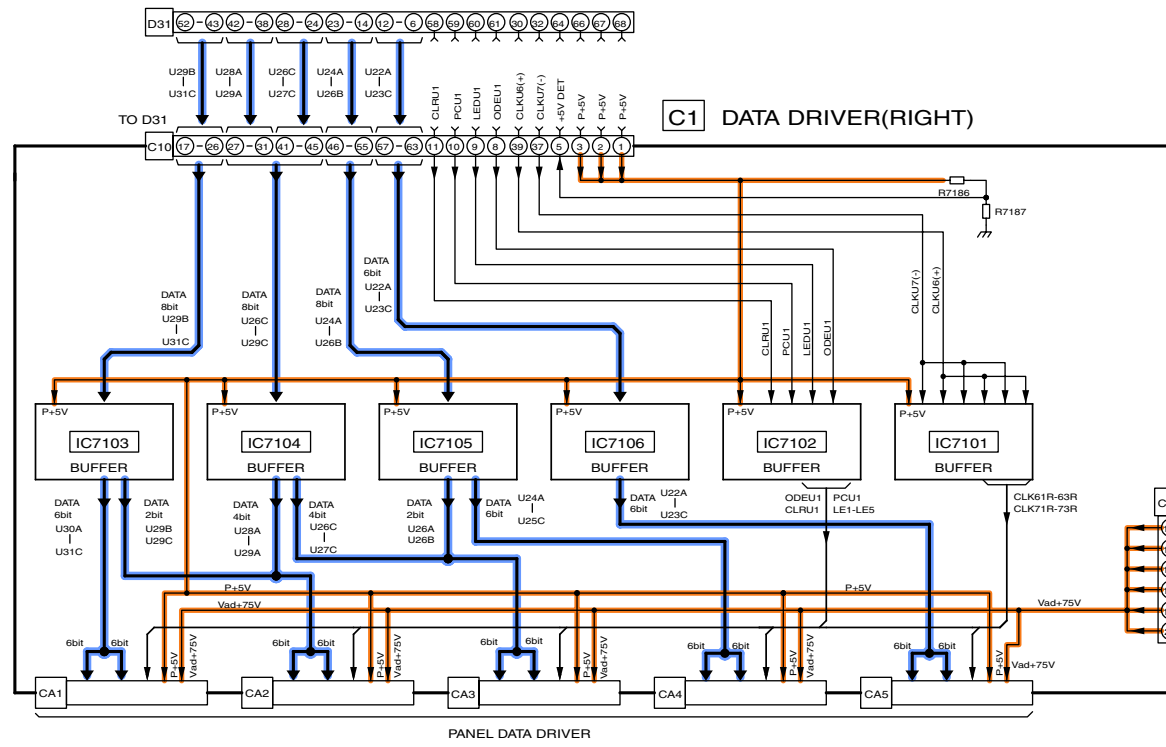

TH-58PY700AZ/M/MR, PZ700A
C1, C2, C5, and C6-Board Block Diagram

TH-58PY700AZ/M/MR, PZ700A
C1, C2, C5, and C6-Board Block Diagram


15.57. C2, C3, C4 and C5-Board Block Diagram

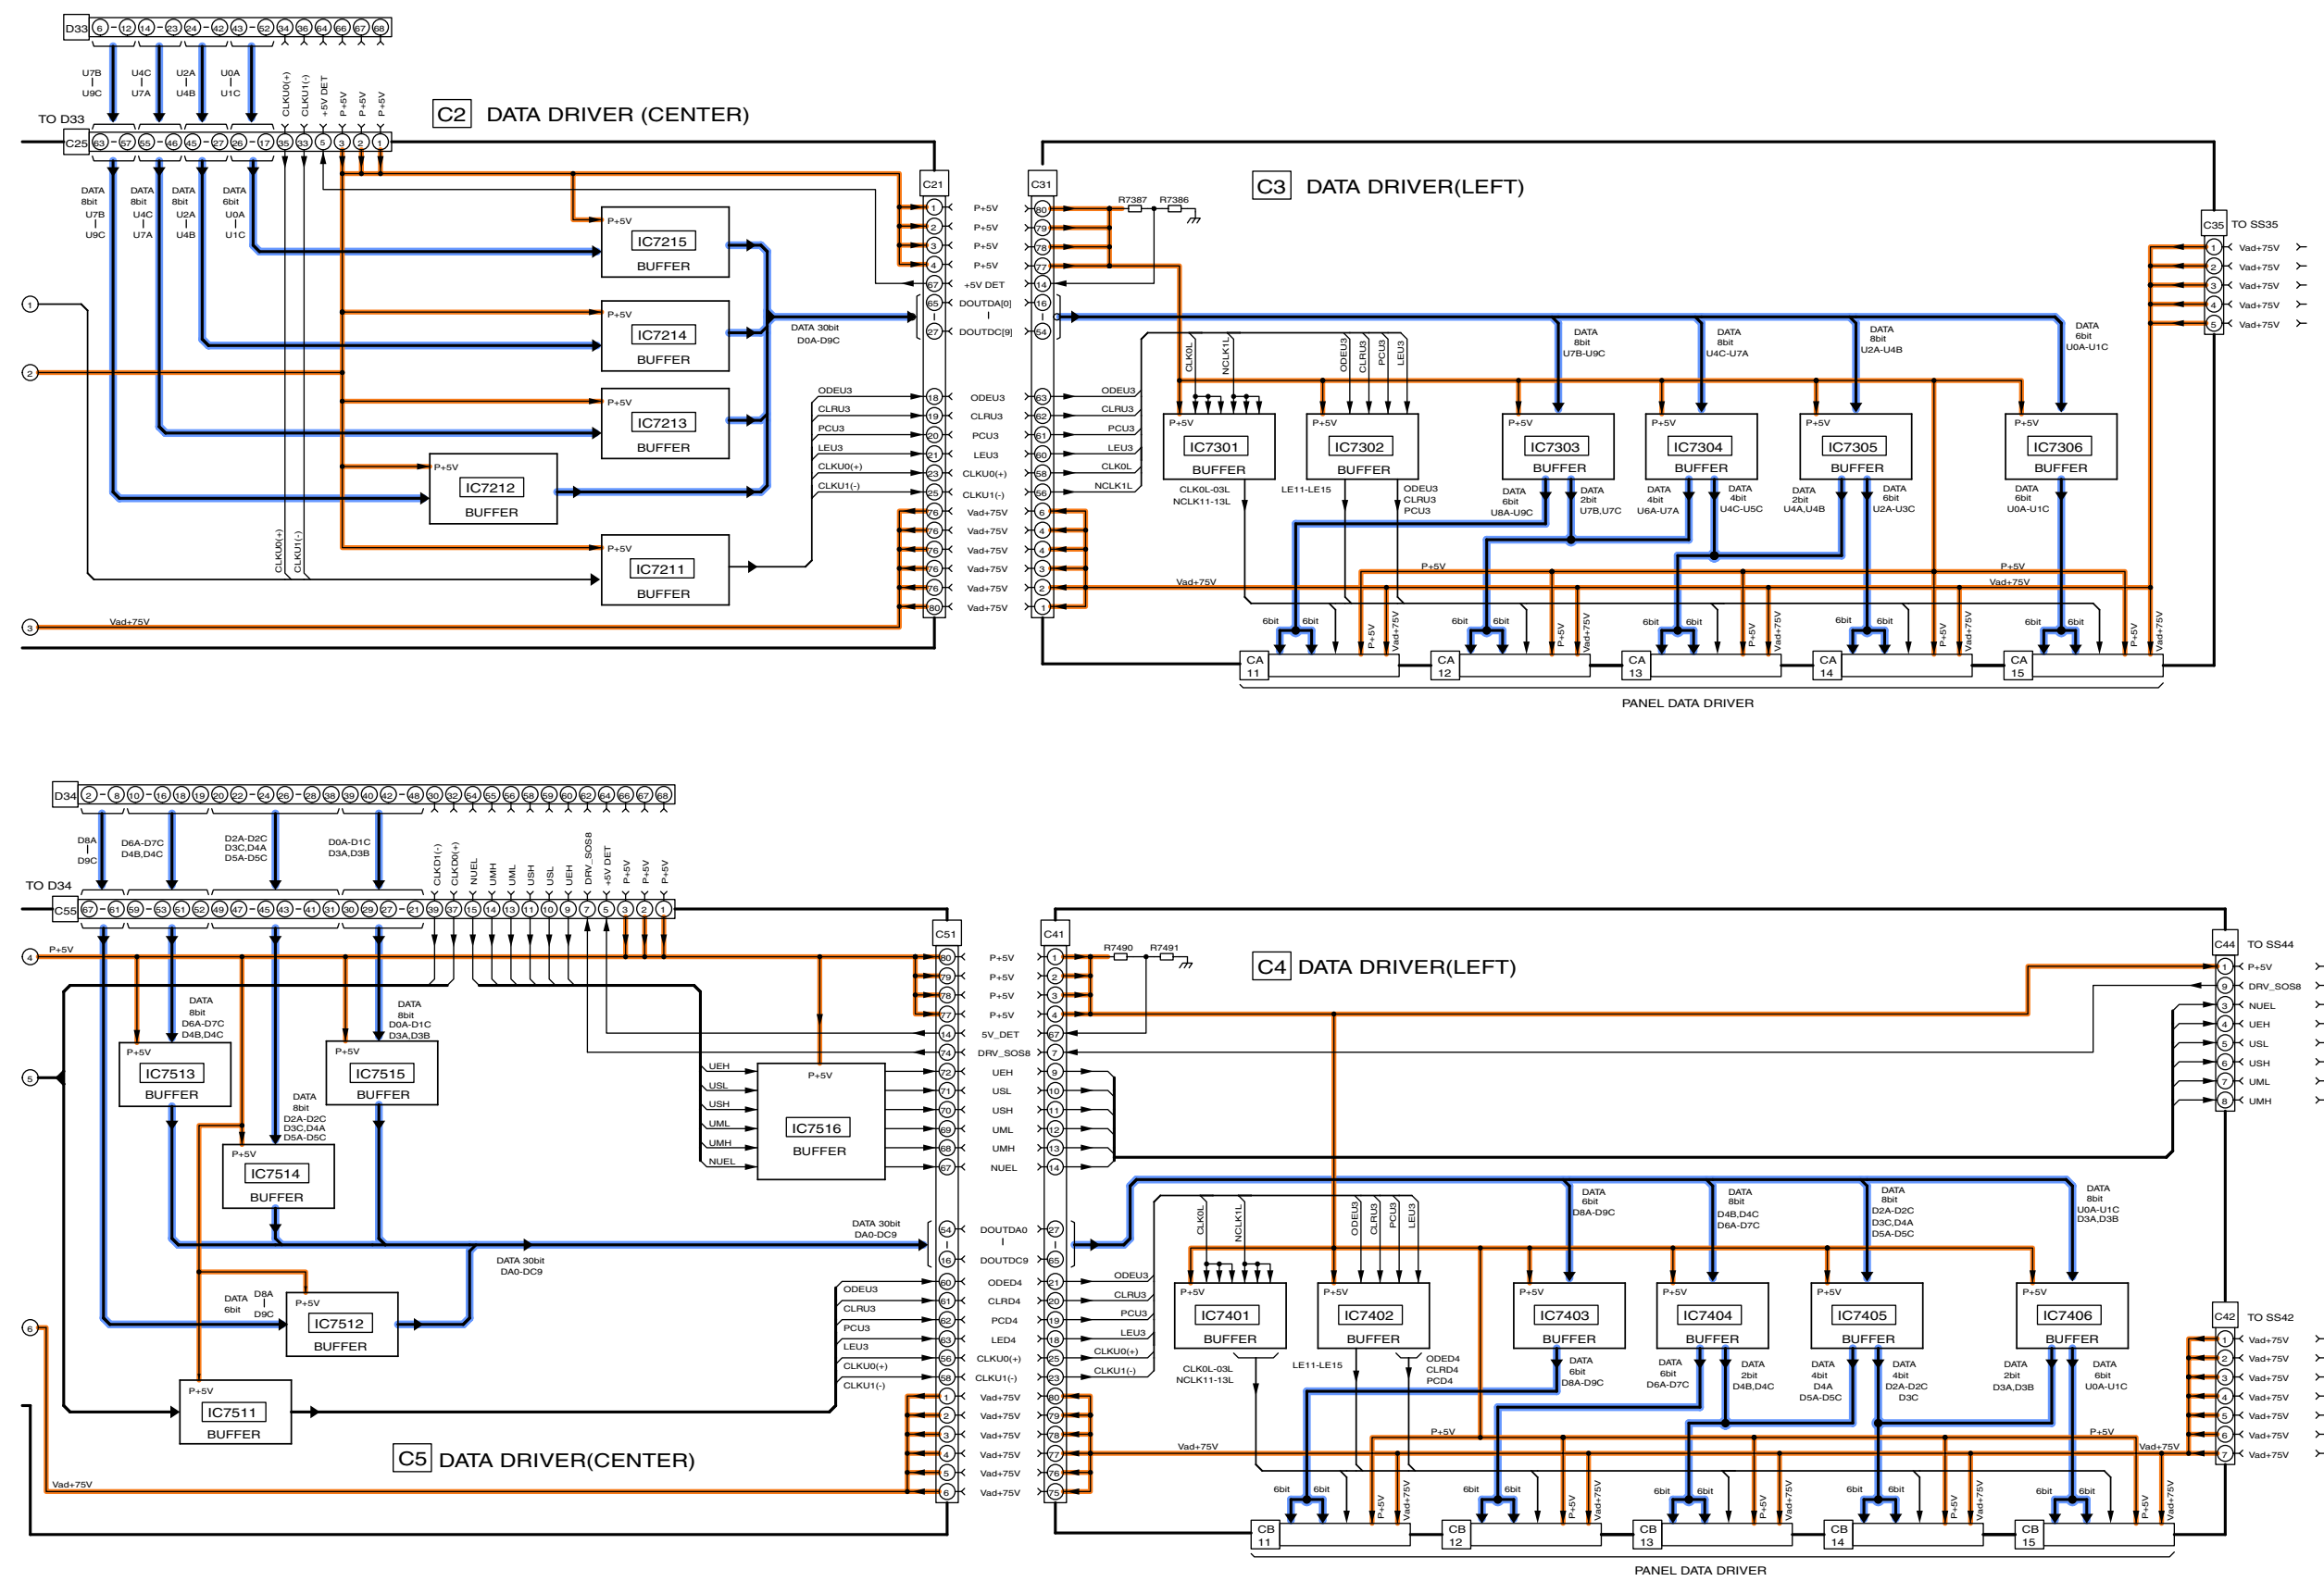

TH-58PY700AZ/M/MR, PZ700A
C2, C3, C4, and C5-Board Block Diagram

TH-58PY700AZ/M/MR, PZ700A
C2, C3, C4, and C5-Board Block Diagram


15.58. C1-Board (1 of 2) Schematic Diagram

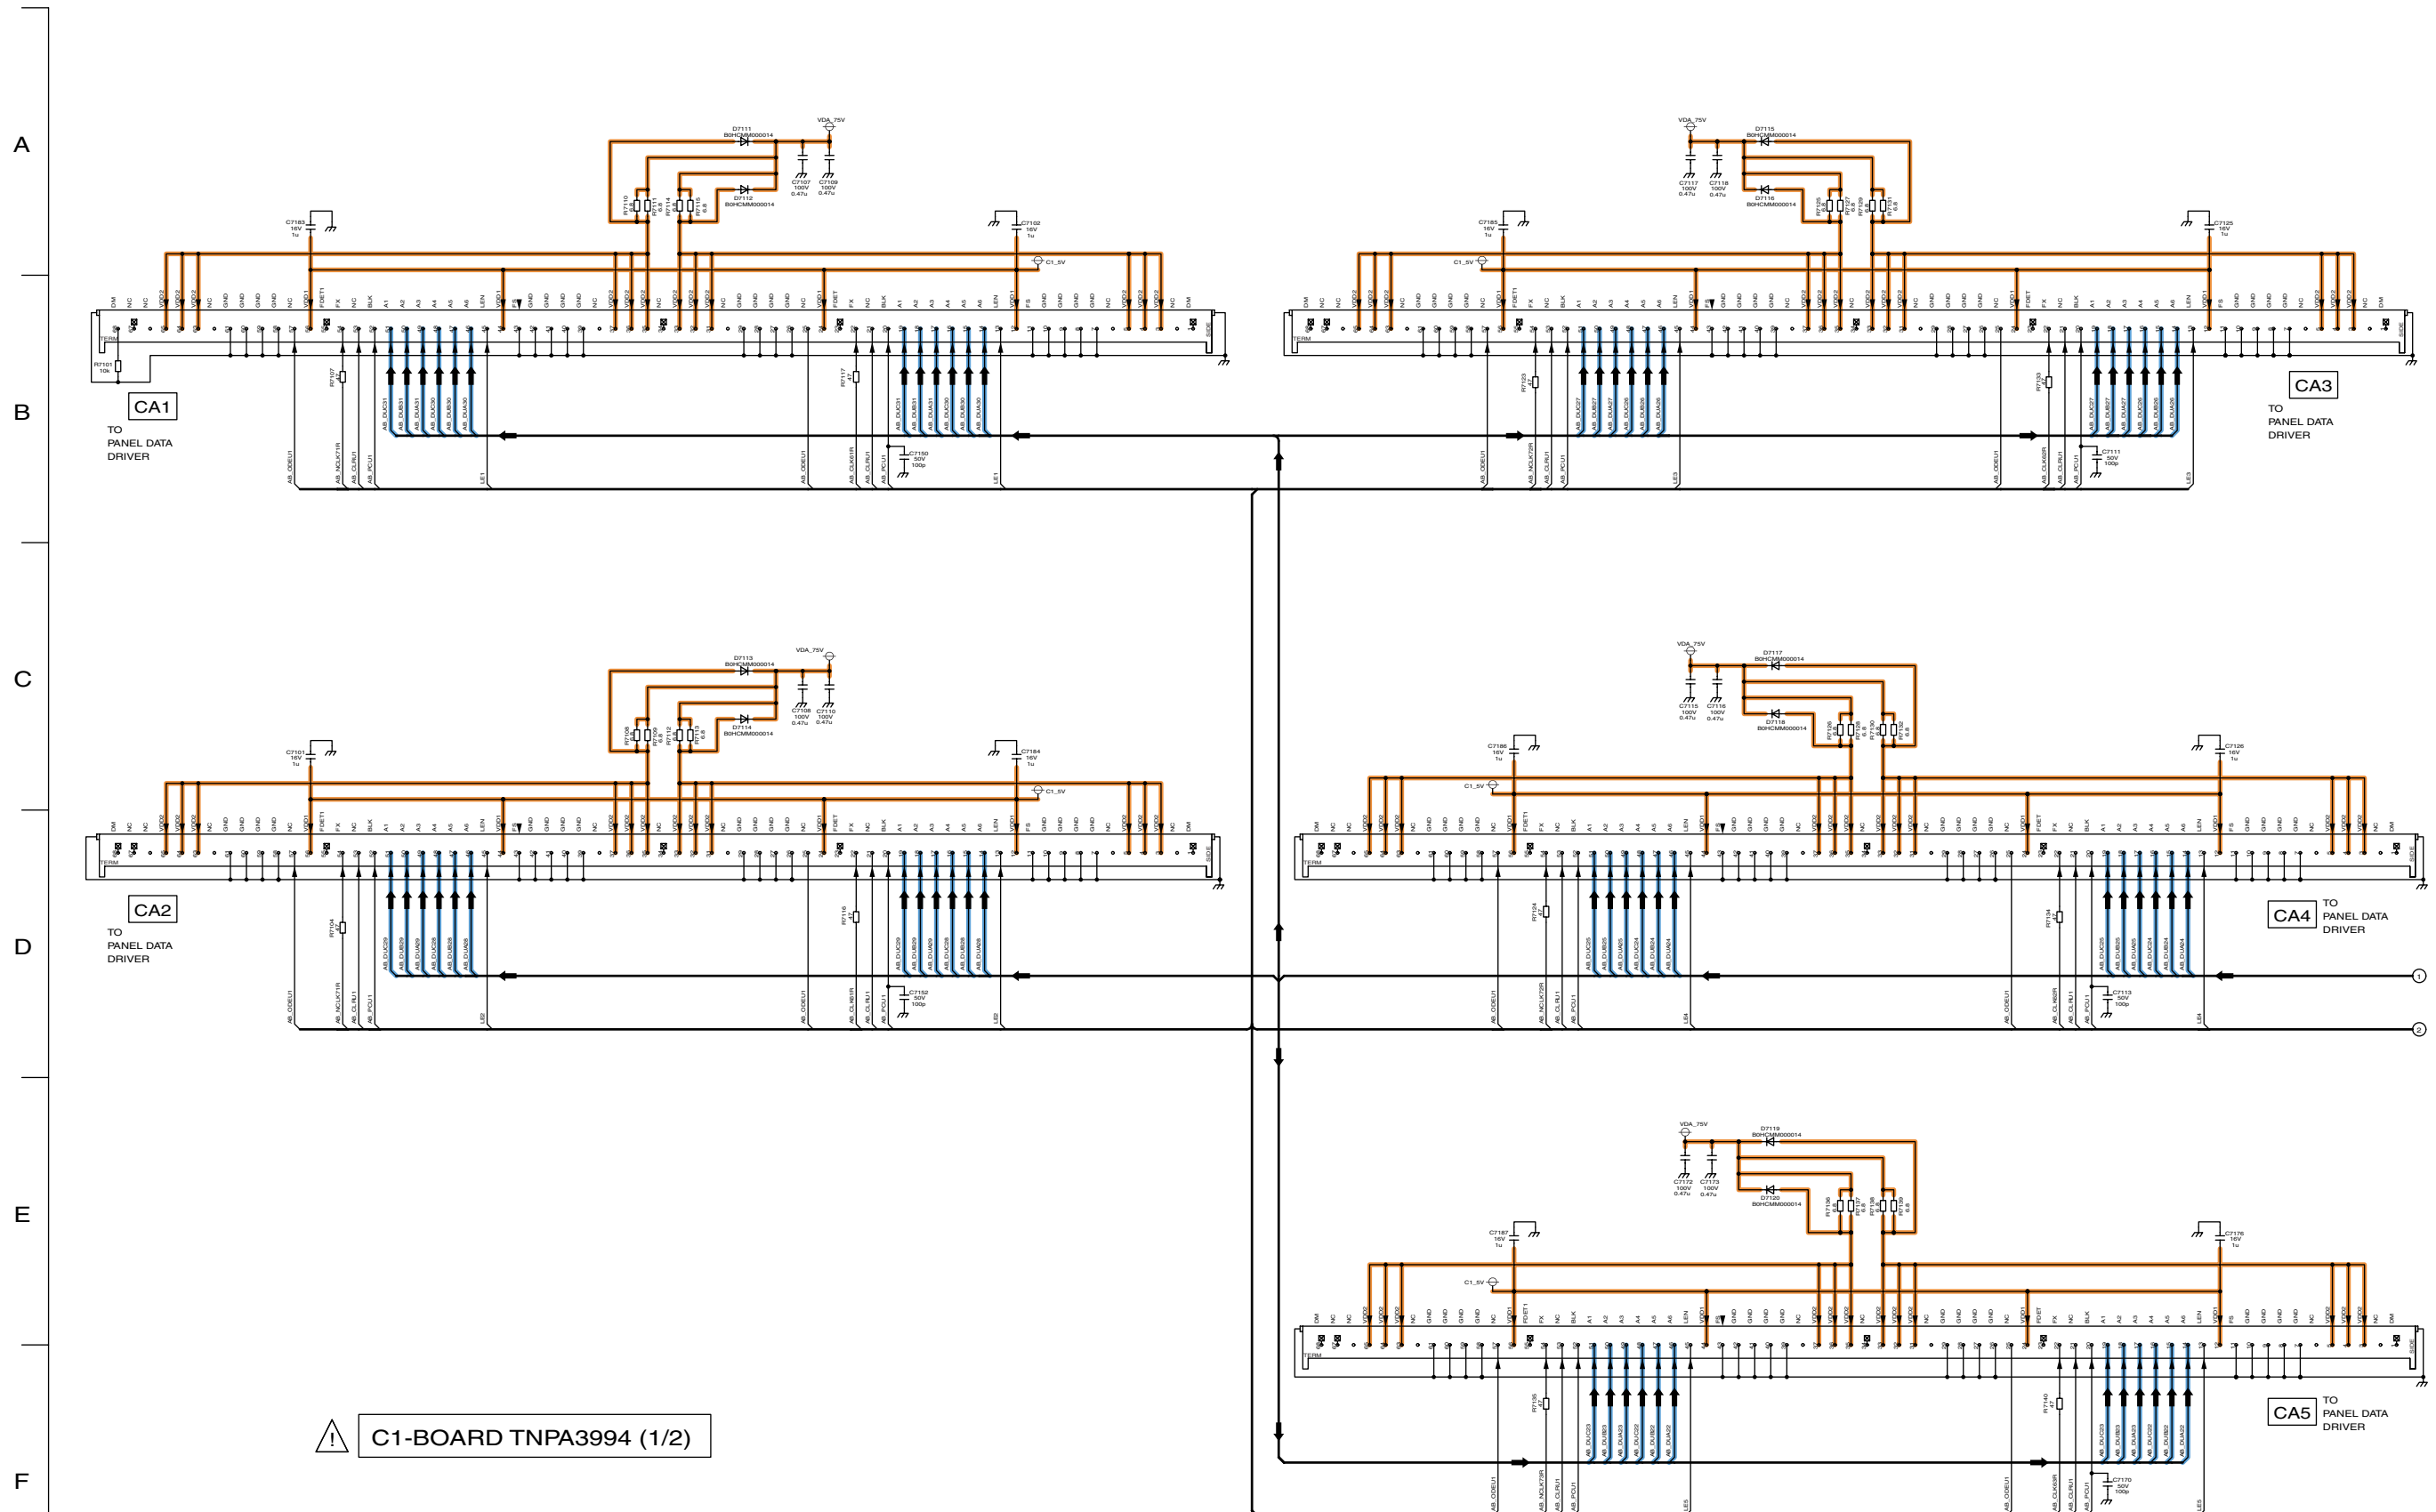



TH-58PY700AZ/M/MR, PZ700A
C1-Board (1 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C1-Board (1 of 2) Schematic Diagram

15.59. C1-Board (2 of 2) Schematic Diagram

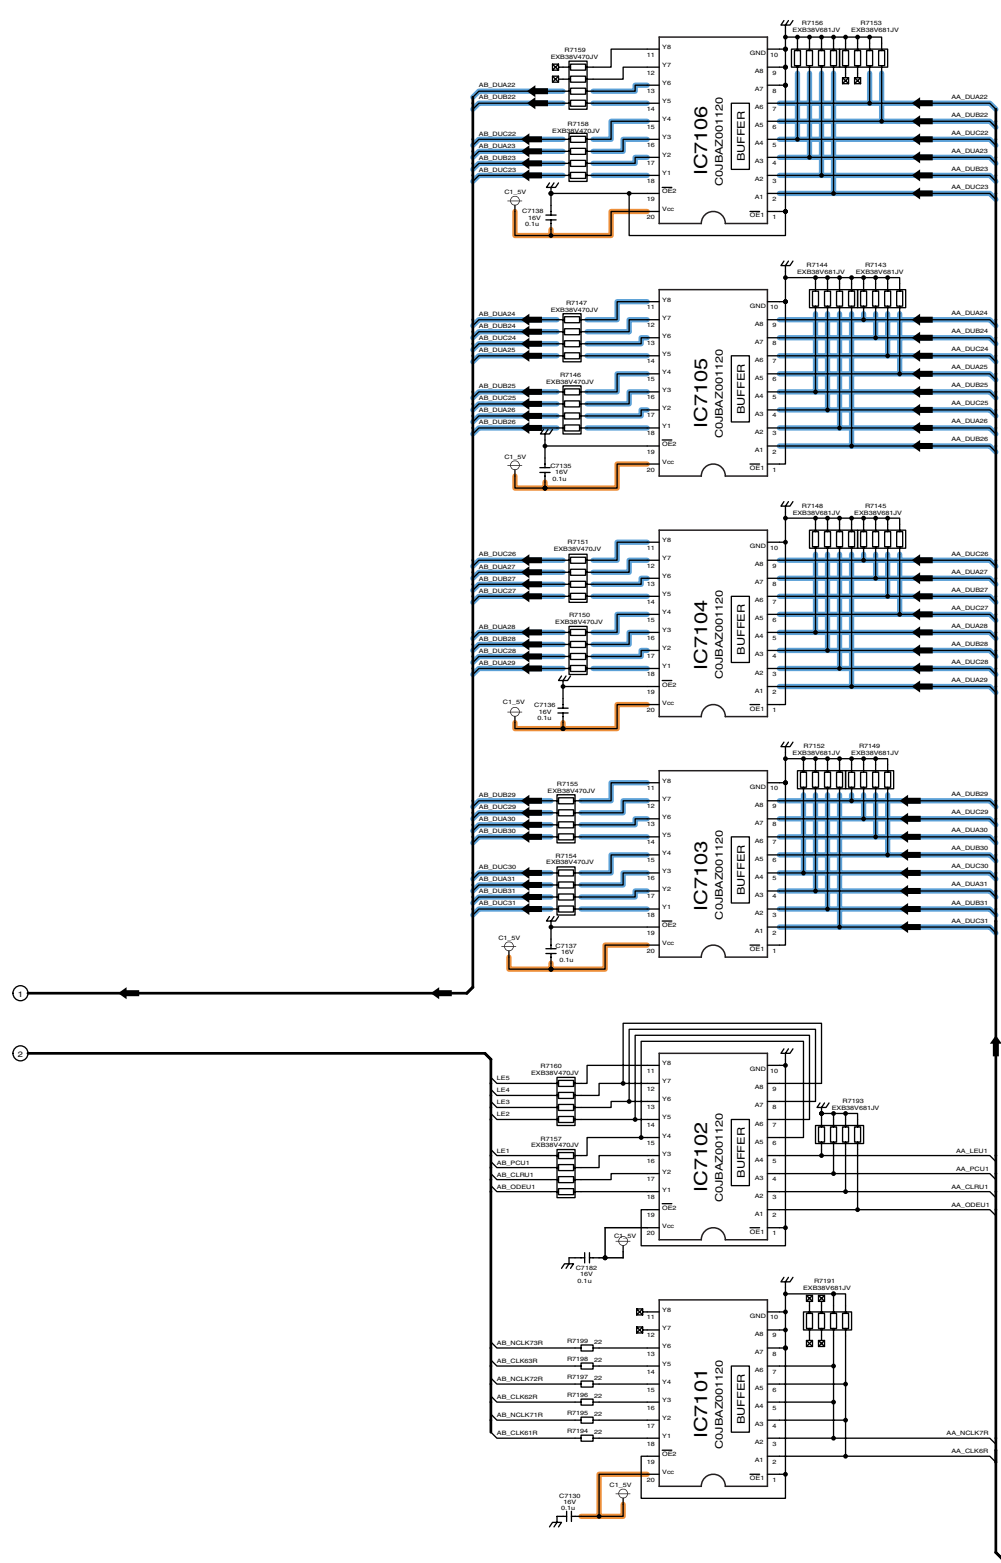

! C1-BOARD TNPA3994 (2/2)

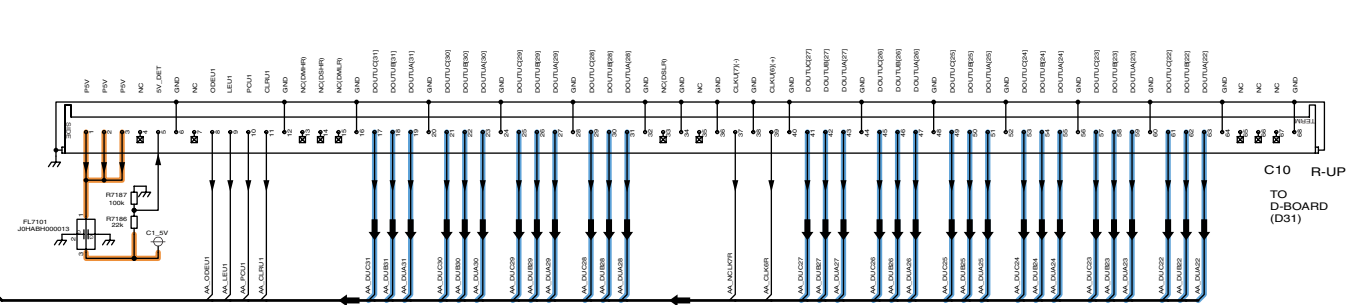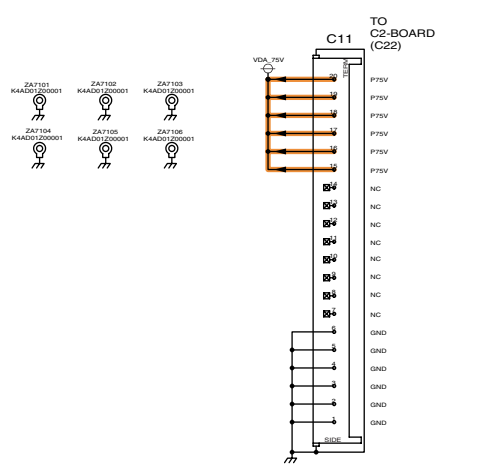

TH-58PY700AZ/M/MR, PZ700A
C1-Board (2 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C1-Board (2 of 2) Schematic Diagram

10

11

12

13

14

15

16

17


18

15.60. C2-Board (1 of 2) Schematic Diagram


A

 C2-BOARD TNPA3995 (1/2)


B

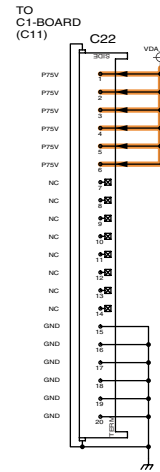


C

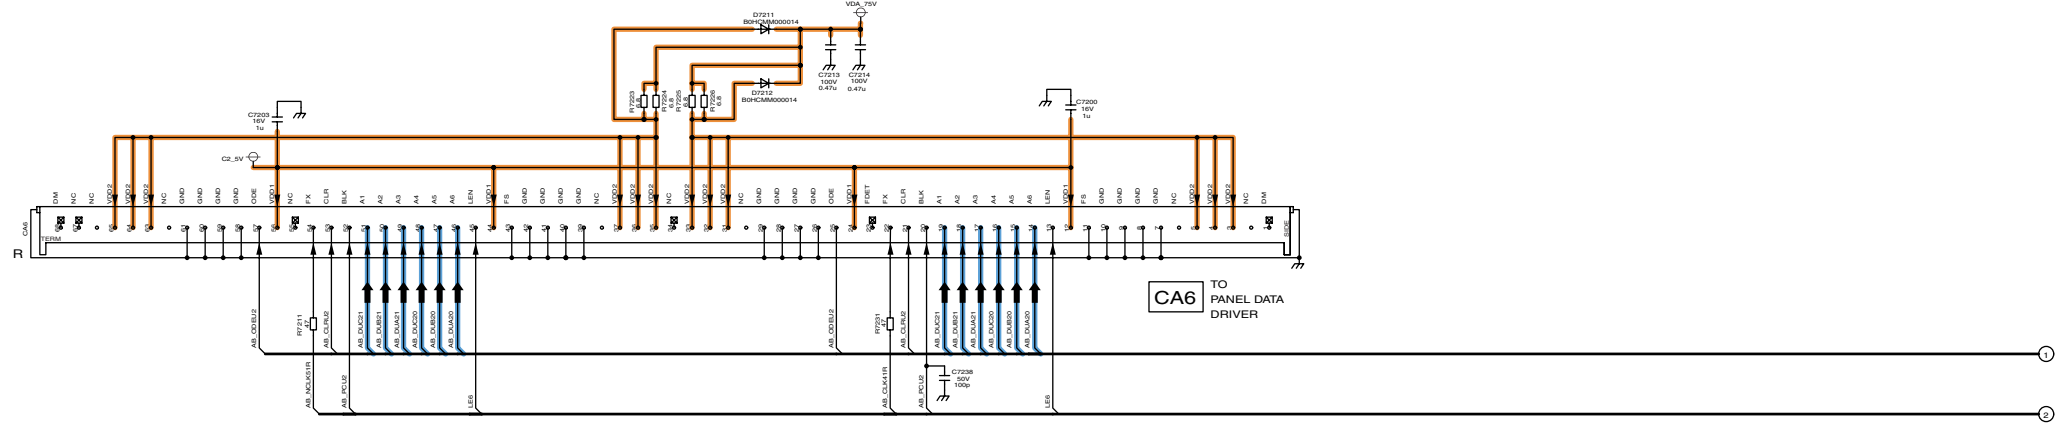


D

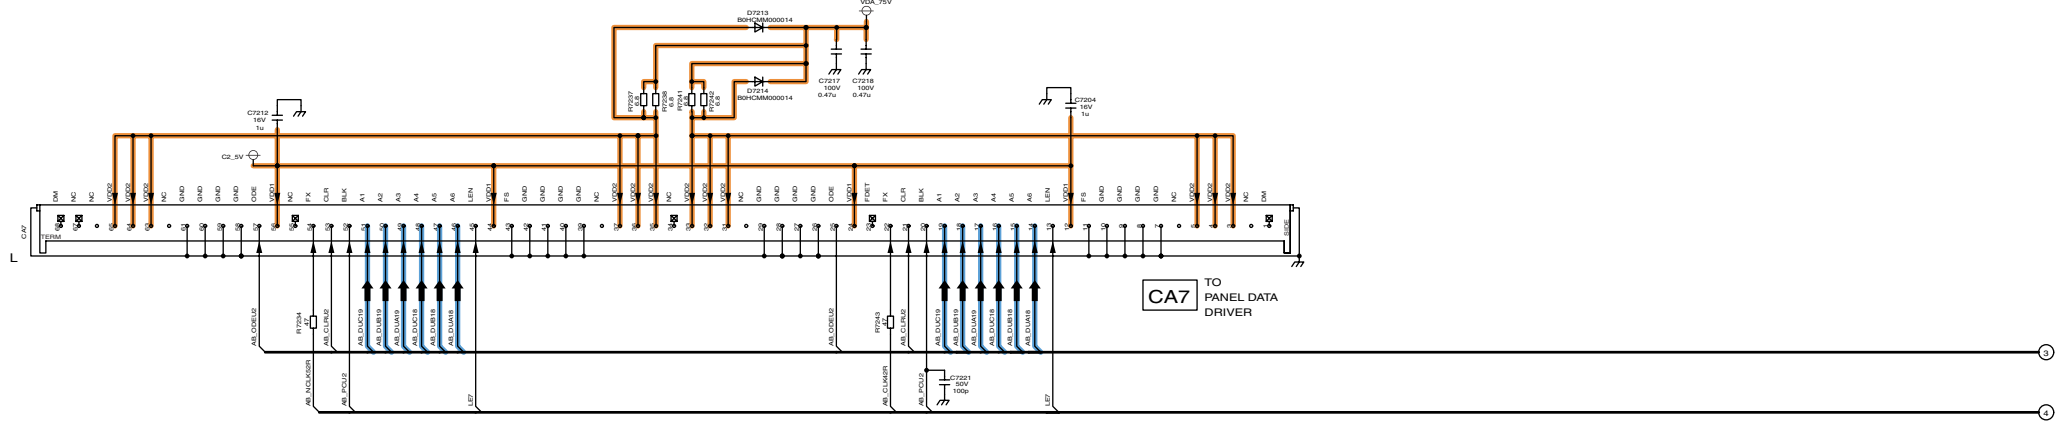

E

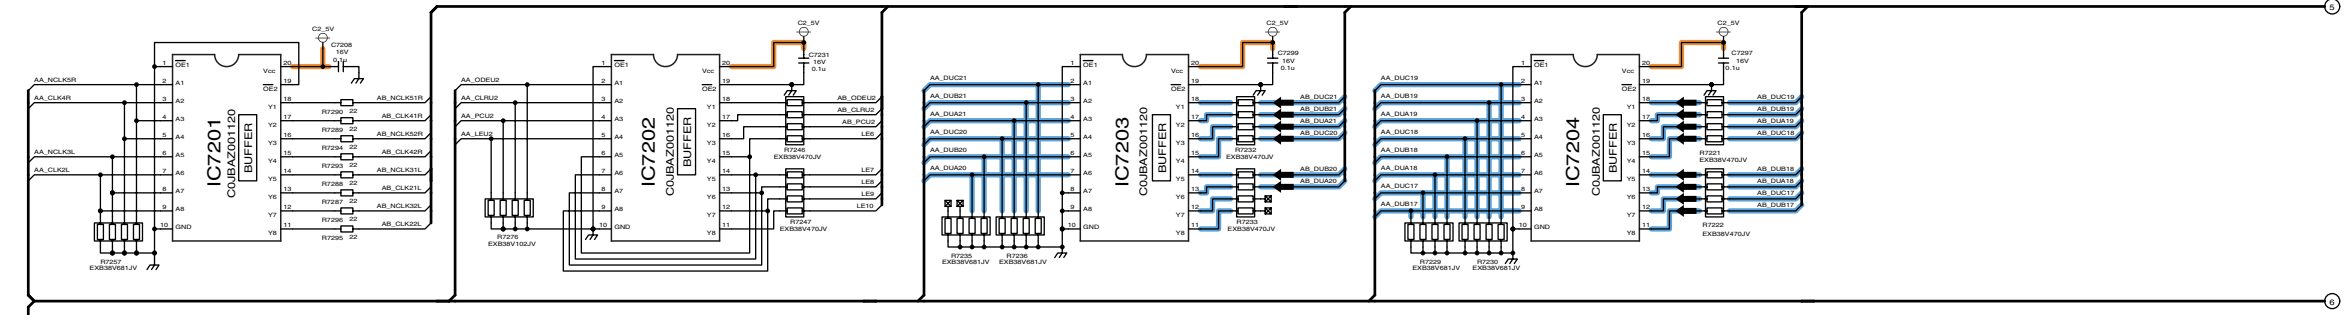

F

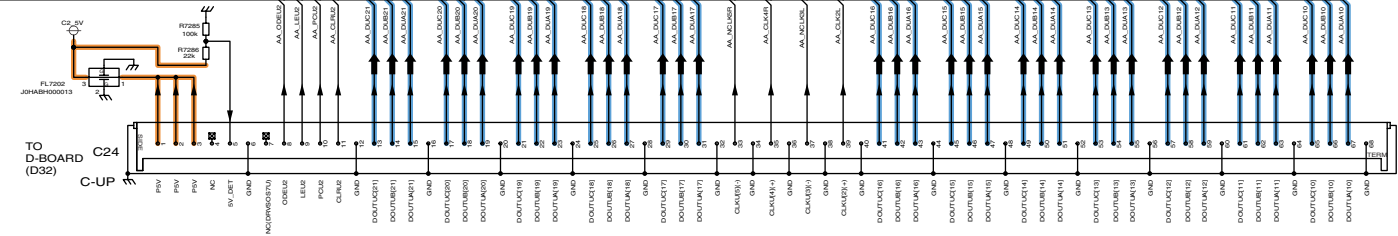


TH-58PY700AZ/M/MR, PZ700A
C2-Board (1 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C2-Board (1 of 2) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.61. C2-Board (2 of 2) Schematic Diagram

⚠ C2-BOARD TNPA3995 (2/2)

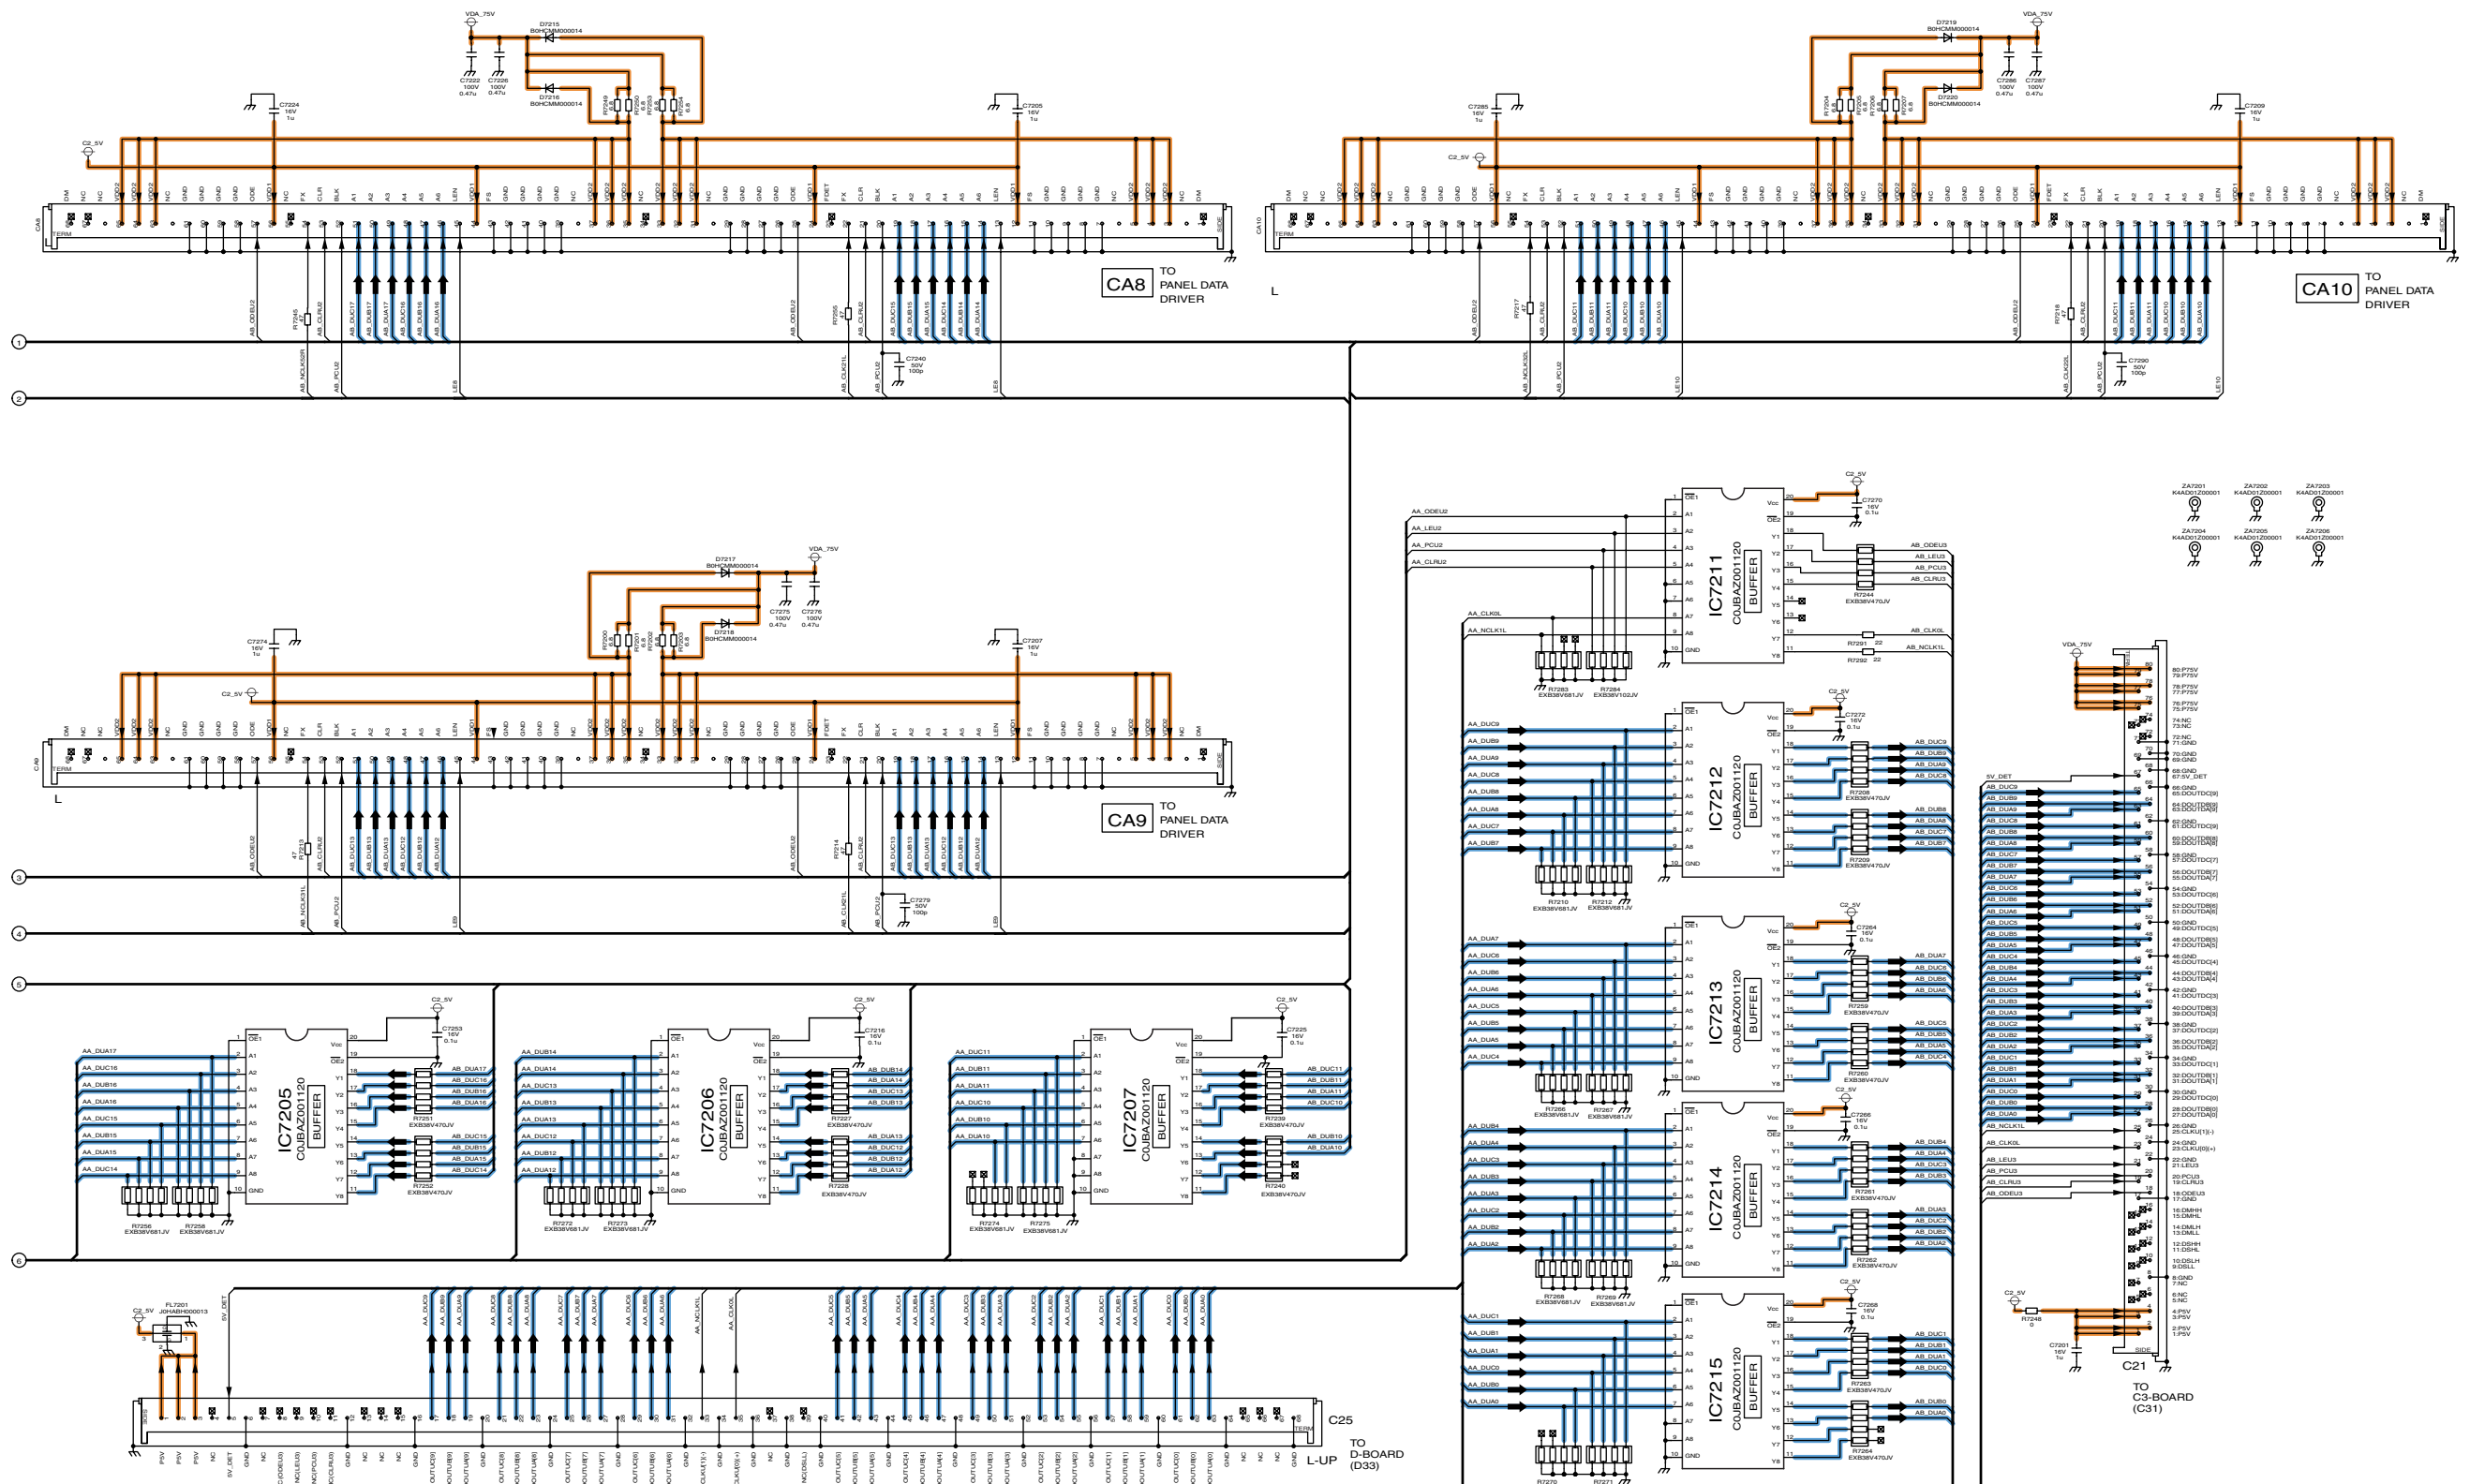


TH-58PY700AZ/M/MR, PZ700A
C2-Board (2 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C2-Board (2 of 2) Schematic Diagram

10 11 12 13 14 15 16 17 18

15.62. C3-Board (1 of 2) Schematic Diagram

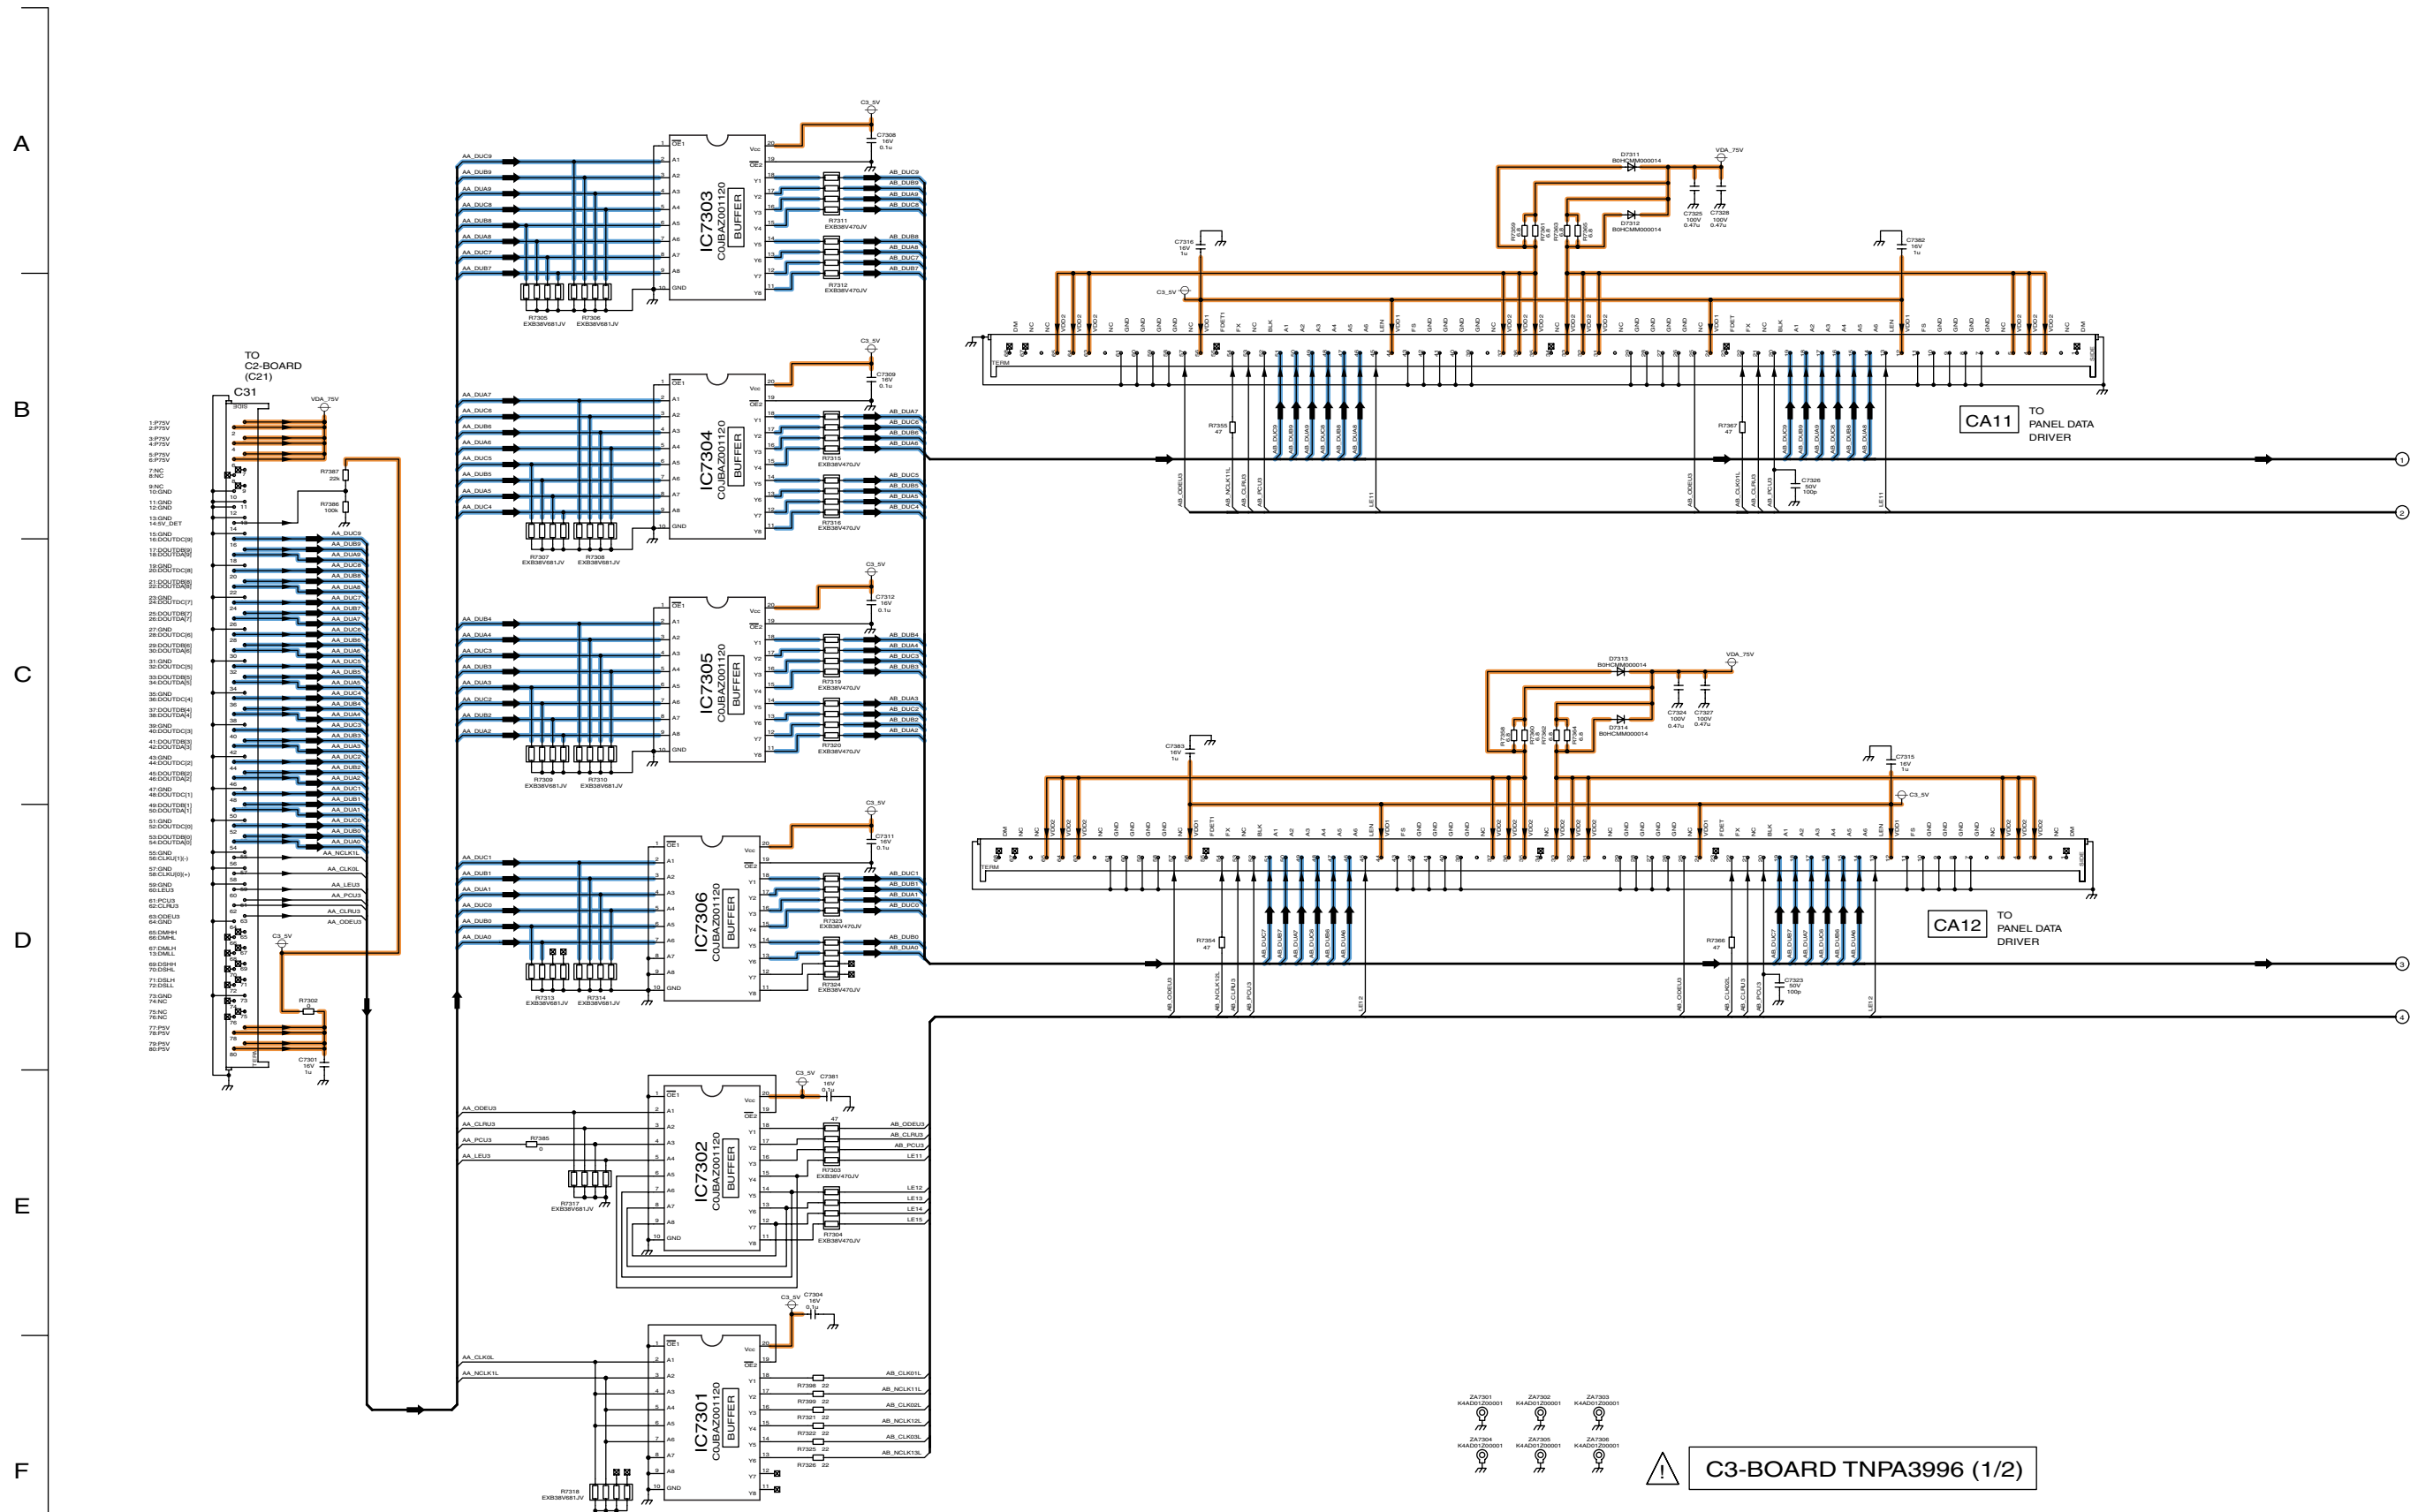



TH-58PY700AZ/M/MR, PZ700A
C3-Board (1 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C3-Board (1 of 2) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.63. C3-Board (2 of 2) Schematic Diagram

⚠ C3-BOARD TNPA3996 (2/2)

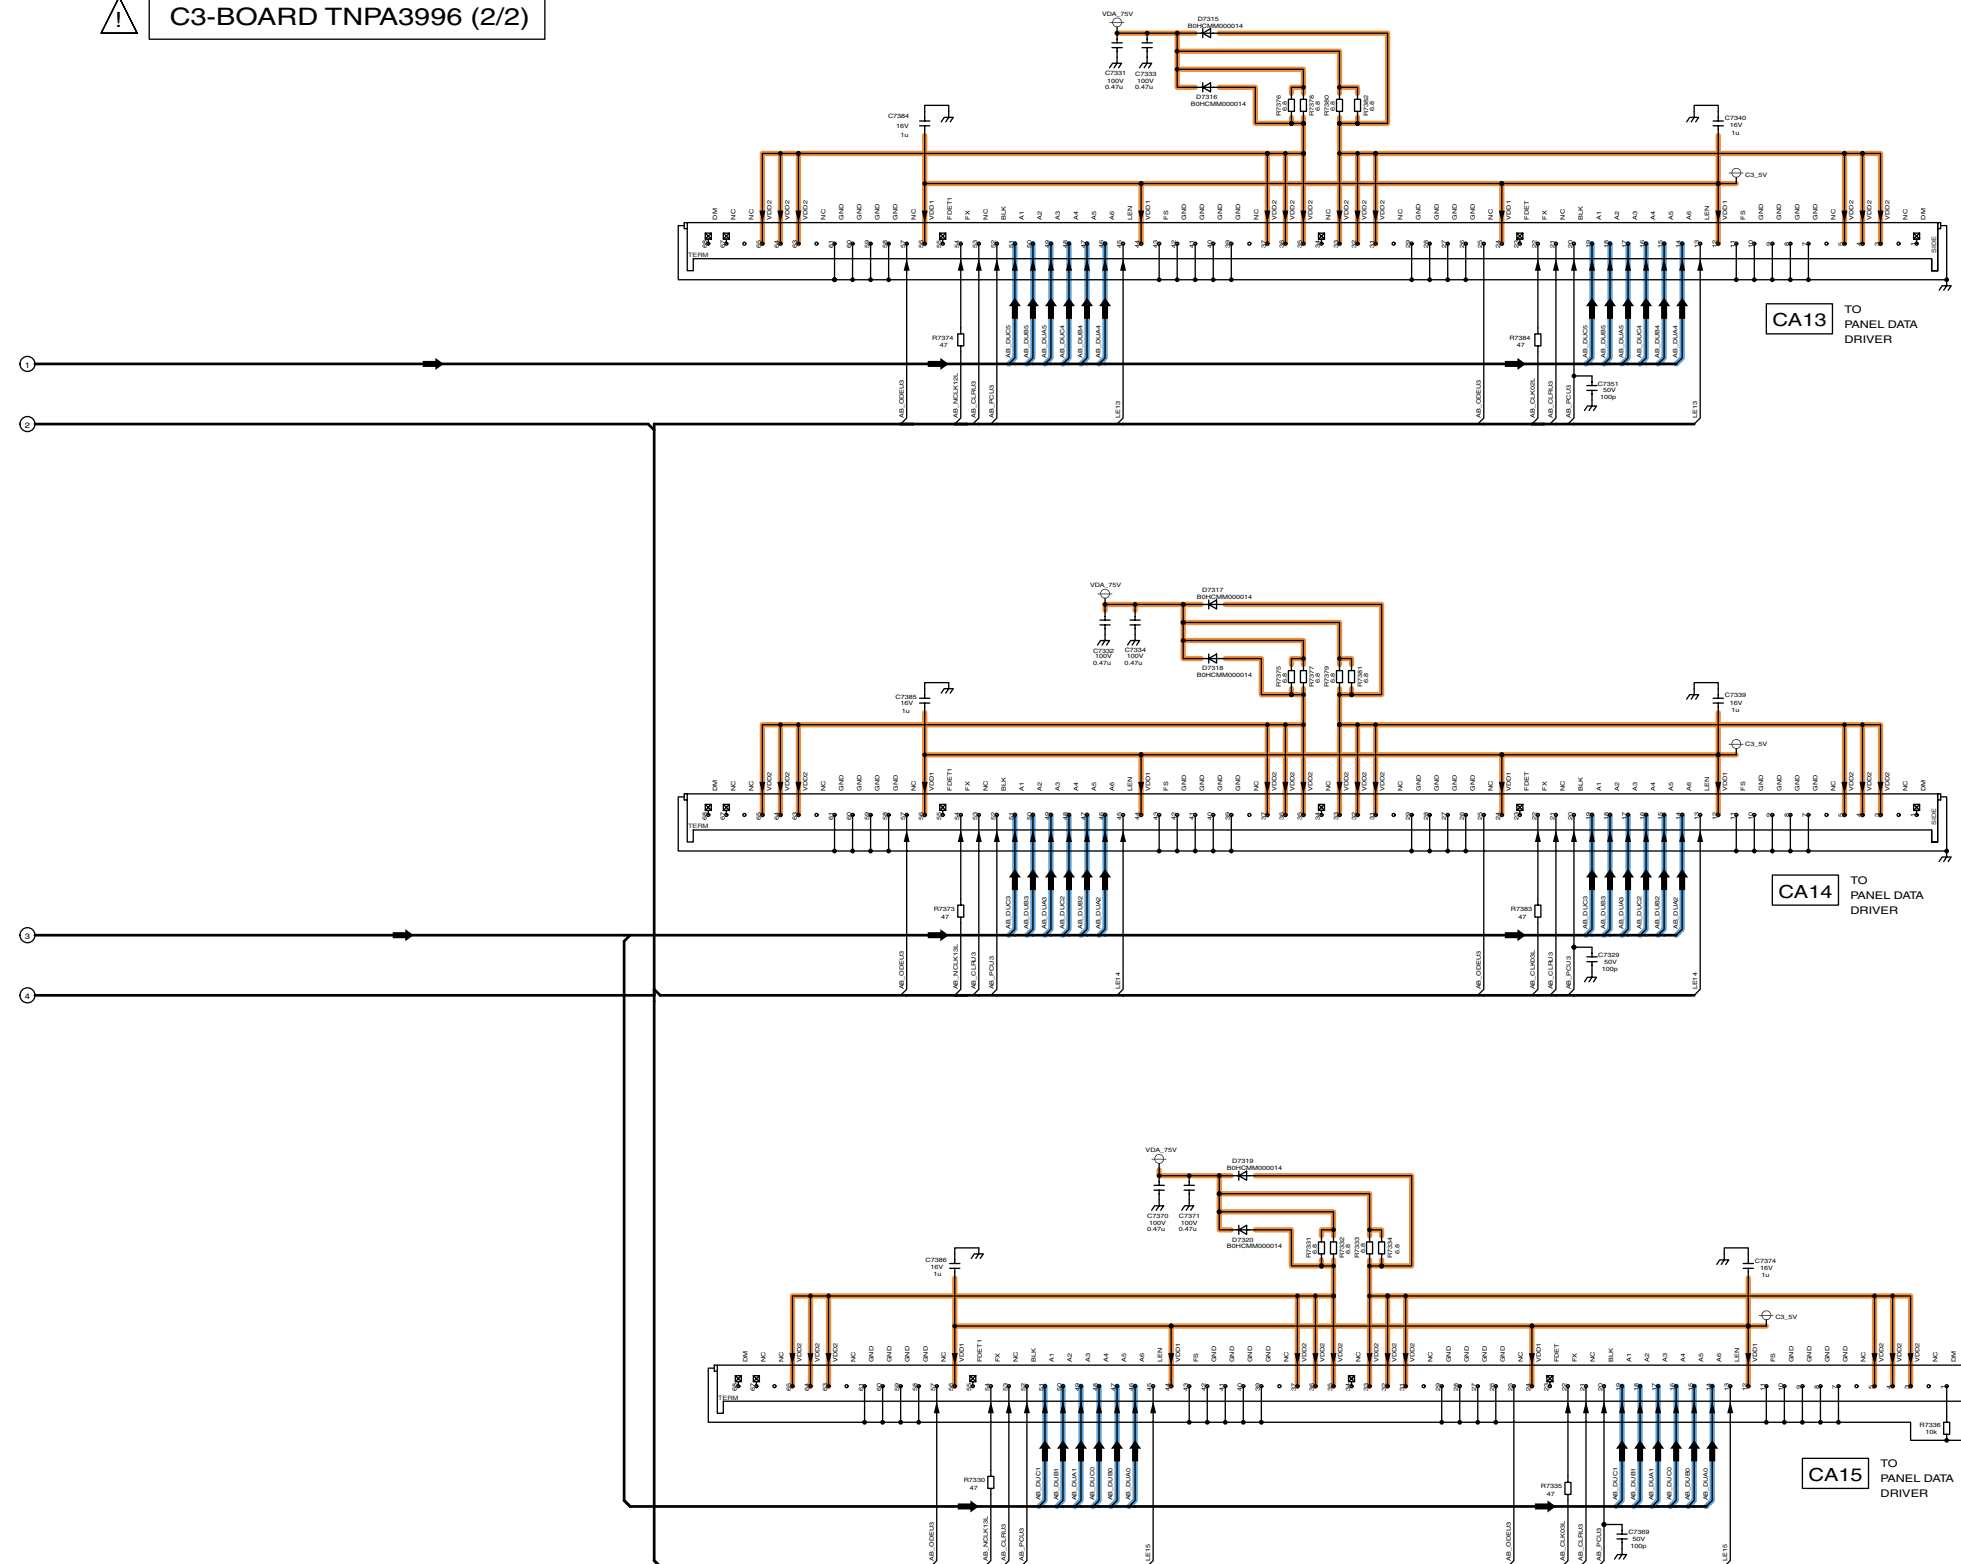

TH-58PY700AZ/M/MR, PZ700A
C3-Board (2 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C3-Board (2 of 2) Schematic Diagram

10

11

12

13

14


15

16

17

18

15.64. C4-Board (1 of 2) Schematic Diagram

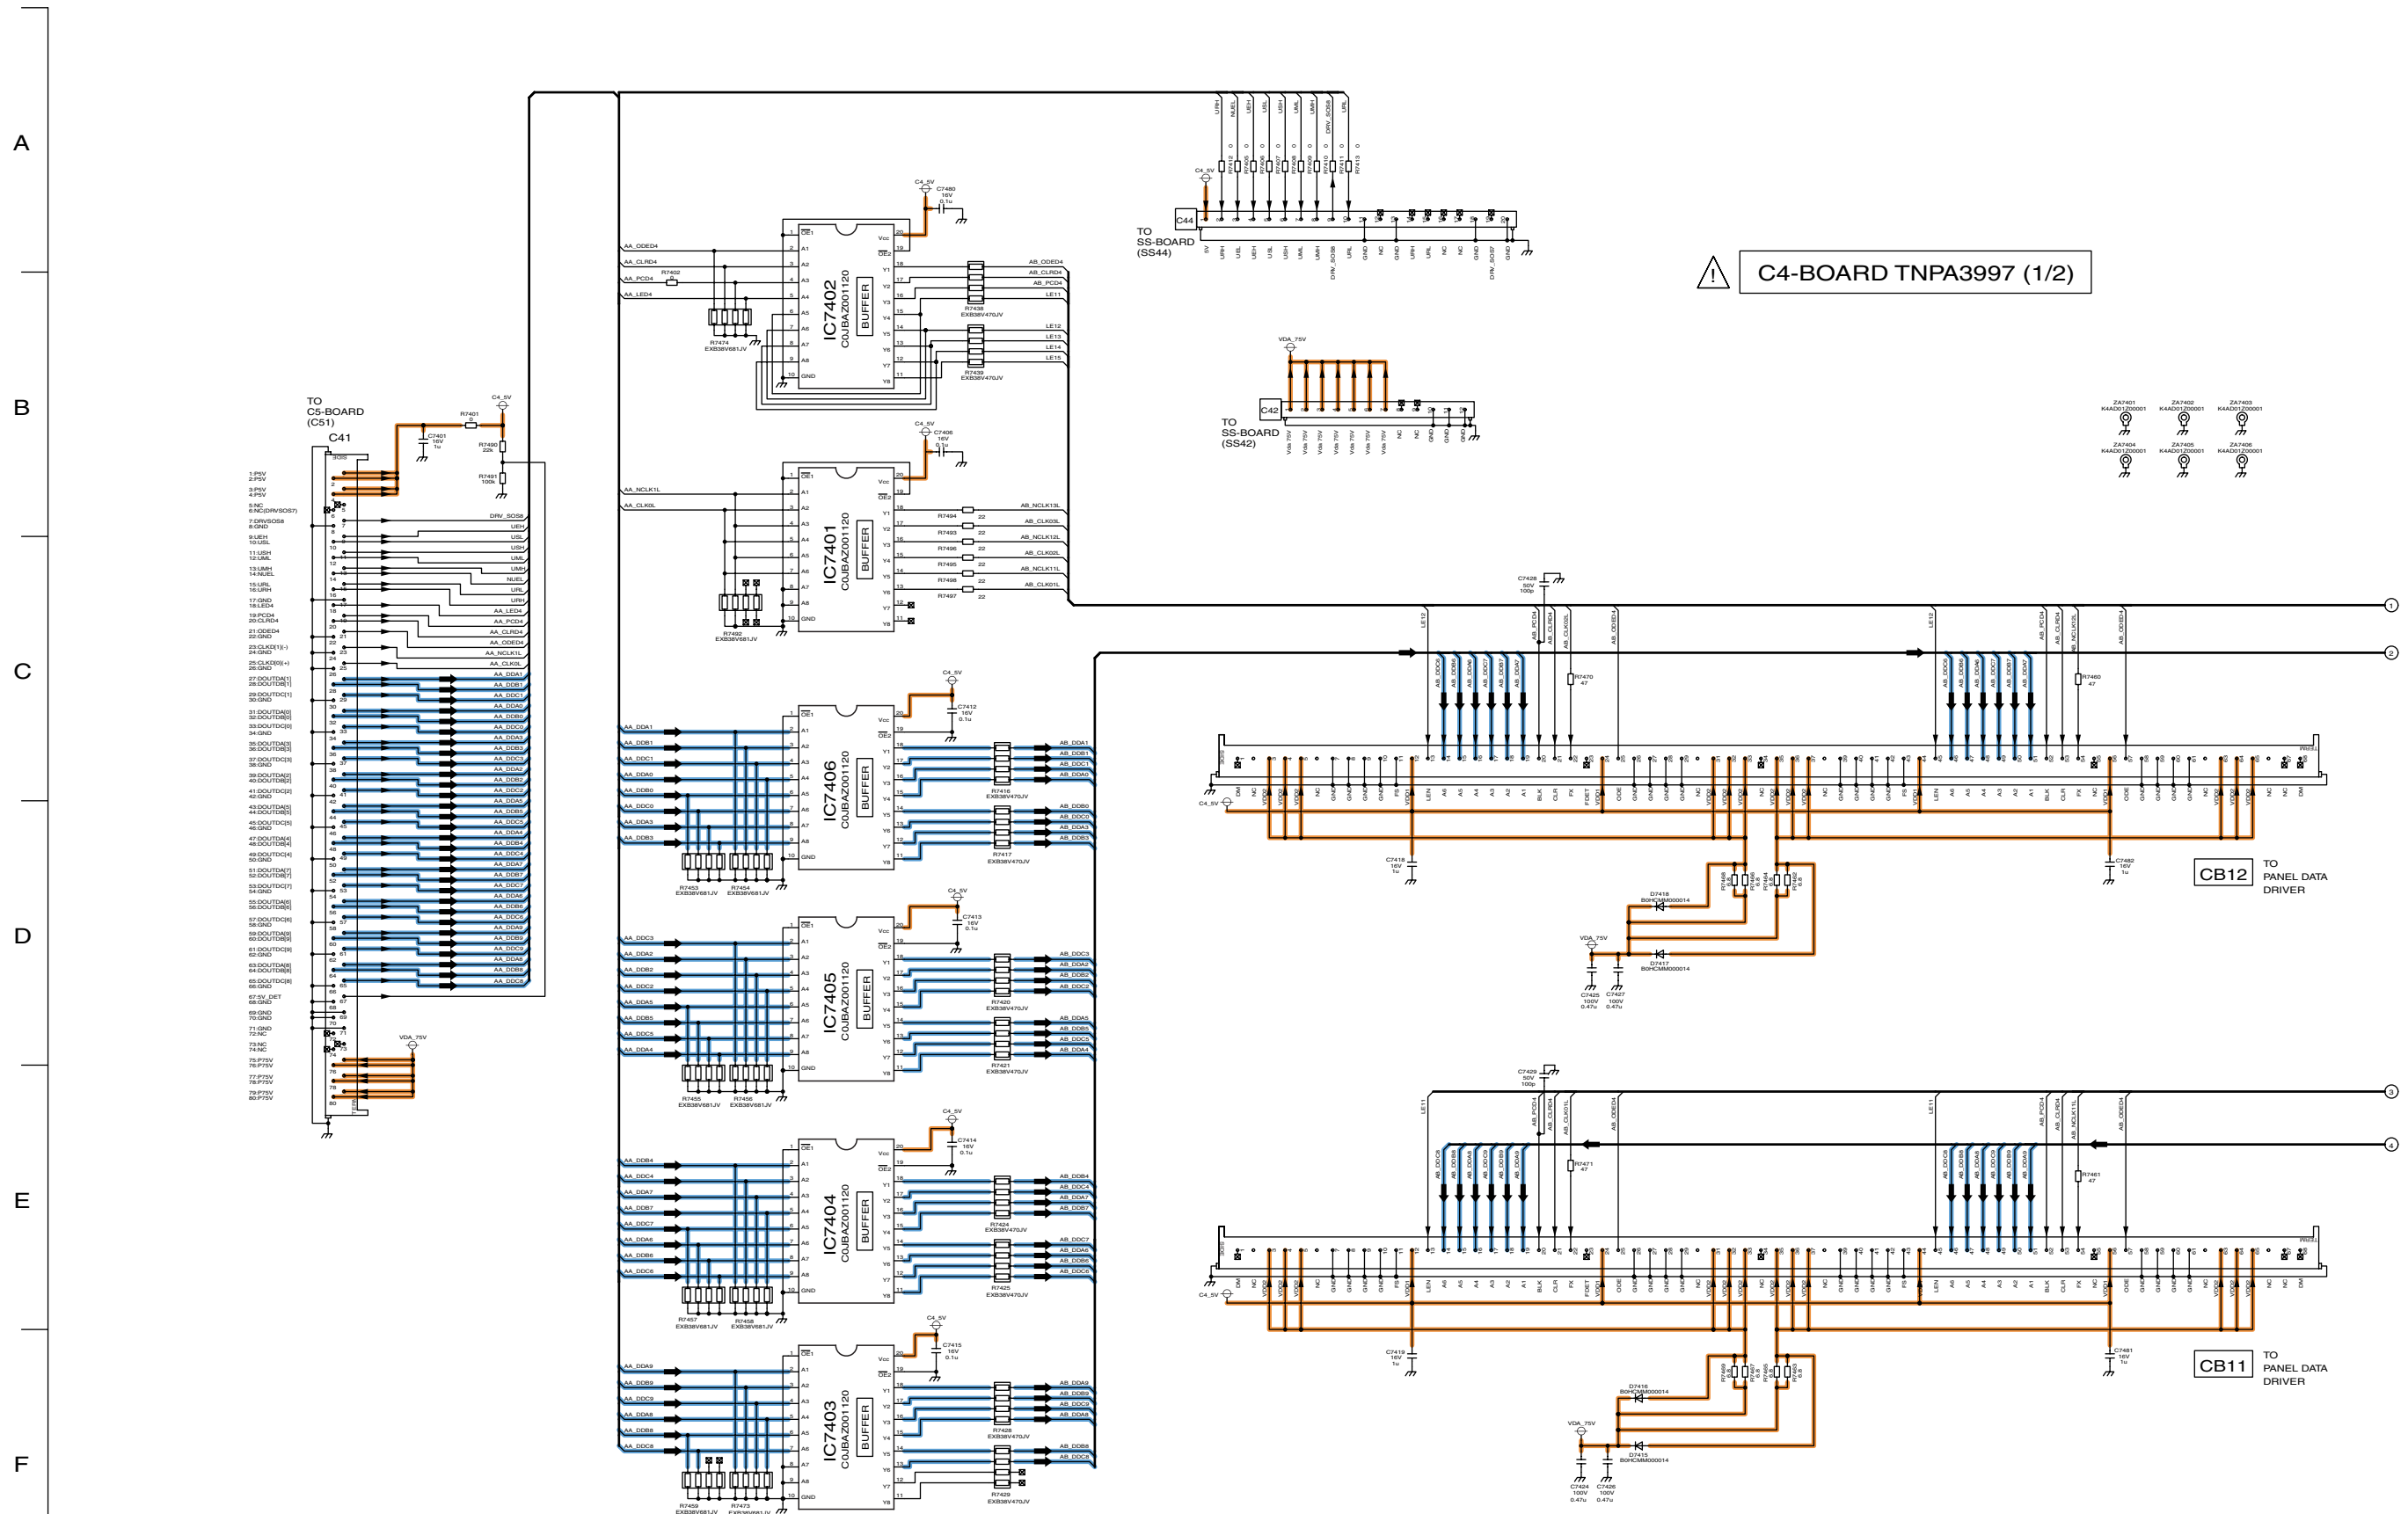


C4-BOARD TNPA3997 (1/2)

TH-58PY700AZ/M/MR, PZ700A
C4-Board (1 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C4-Board (1 of 2) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.65. C4-Board (2 of 2) Schematic Diagram

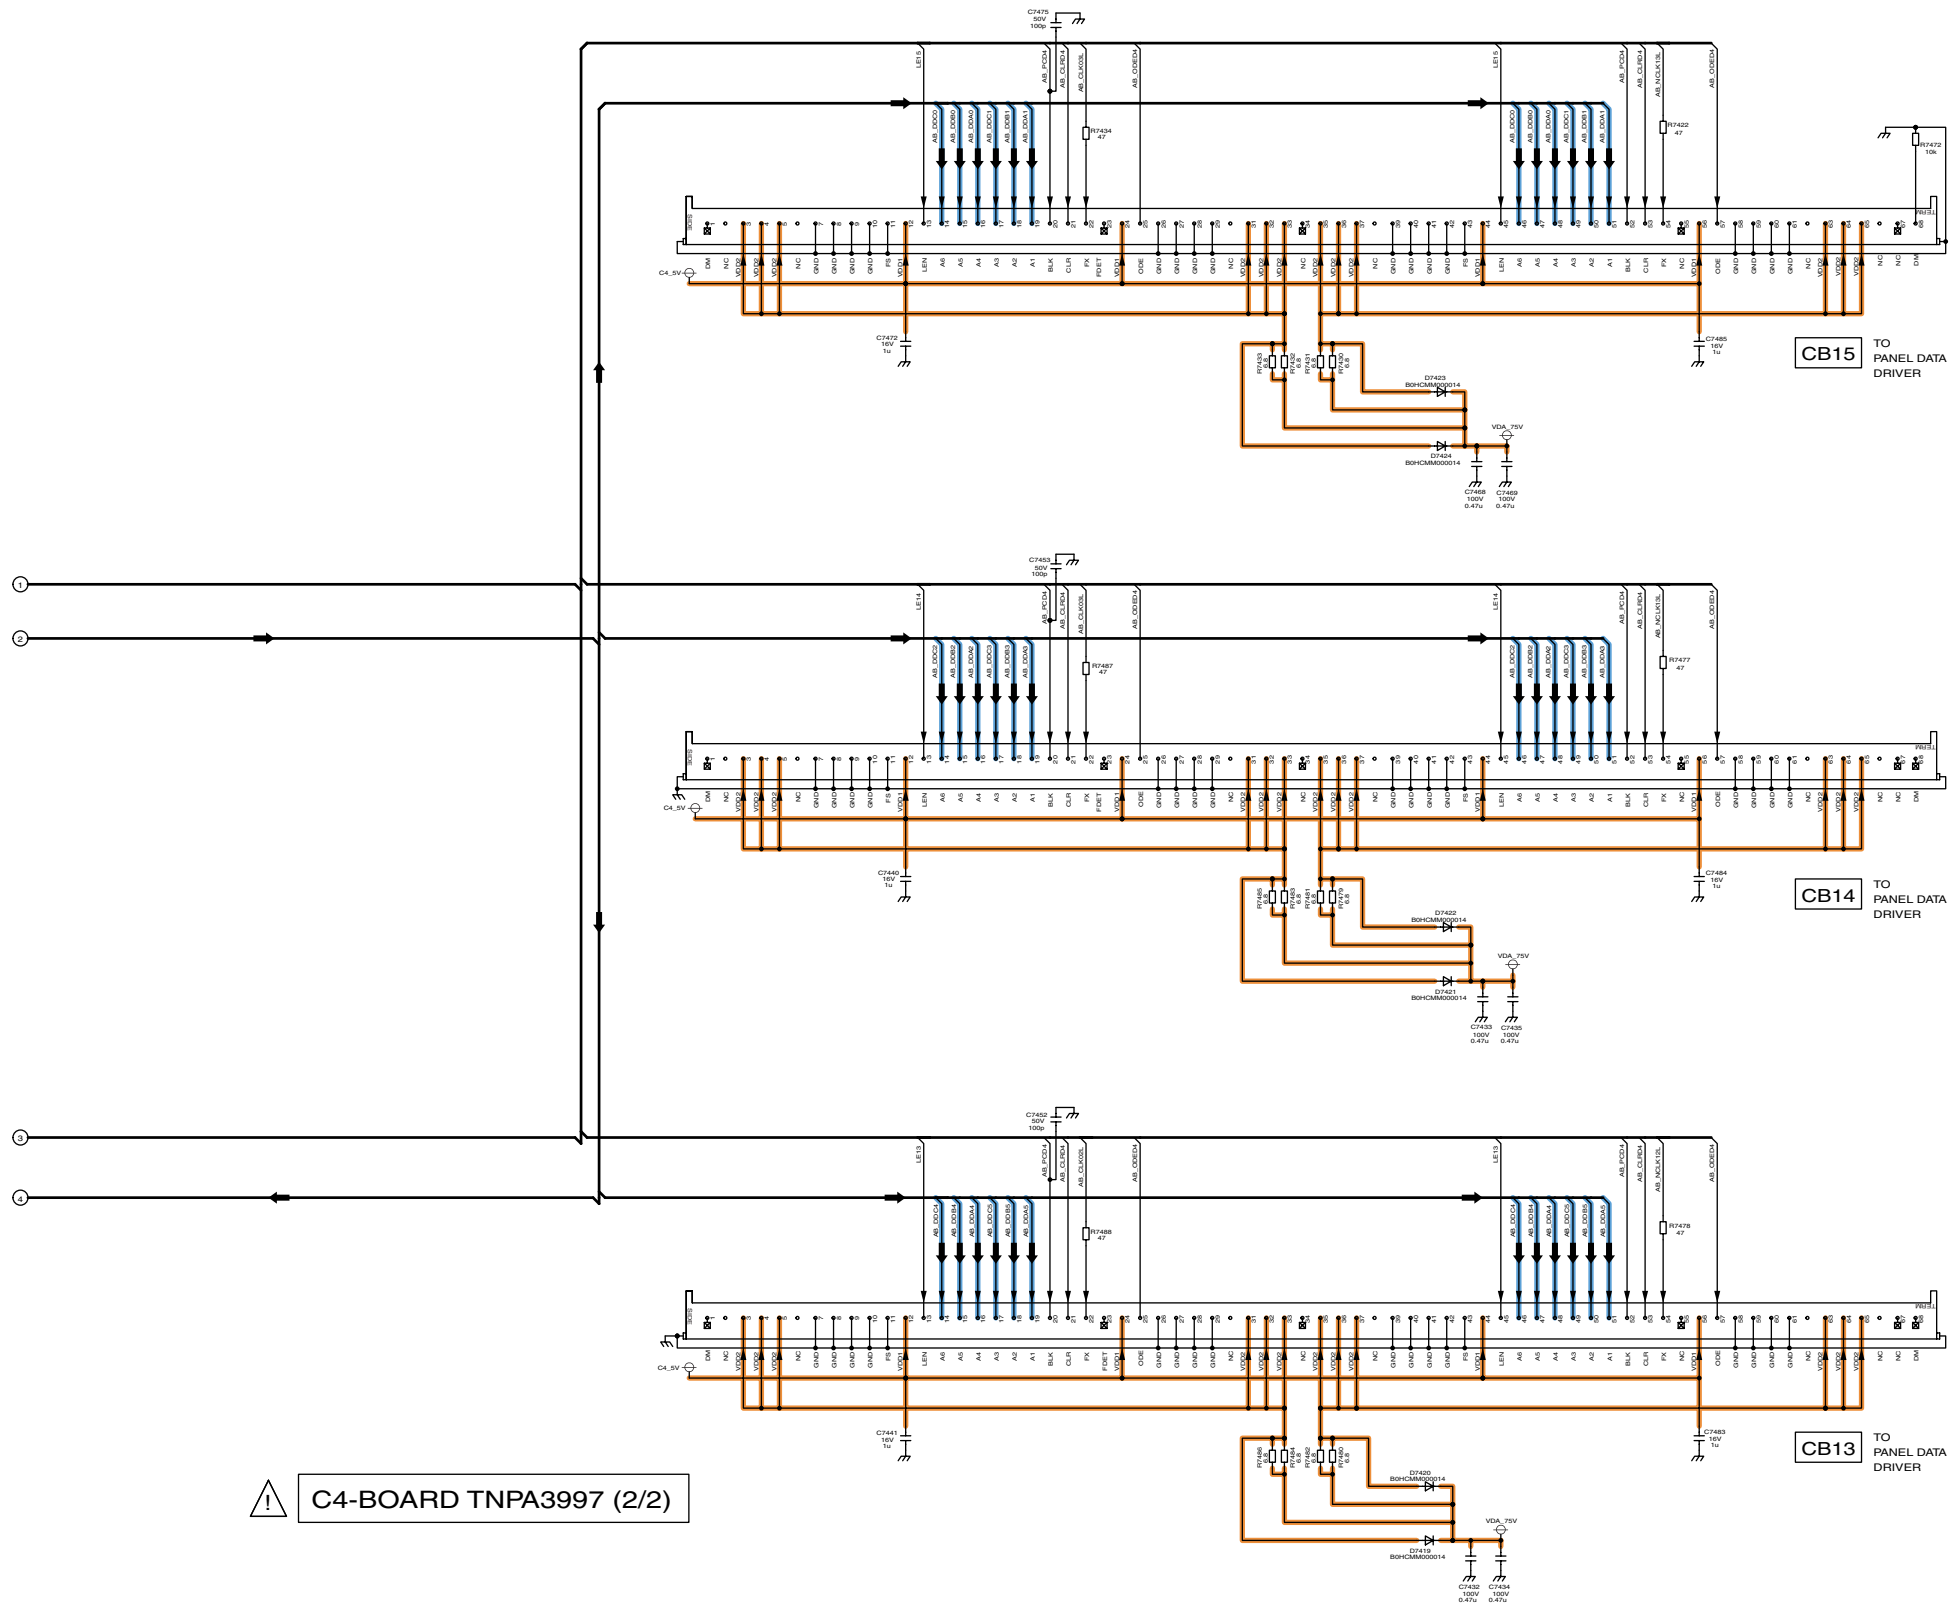

⚠ C4-BOARD TNPA3997 (2/2)

TH-58PY700AZ/M/MR, PZ700A
C4-Board (2 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C4-Board (2 of 2) Schematic Diagram

15.66. C5-Board (1 of 2) Schematic Diagram

A

! C5-BOARD TNPA3998 (1/2)


B

C

D

E


F

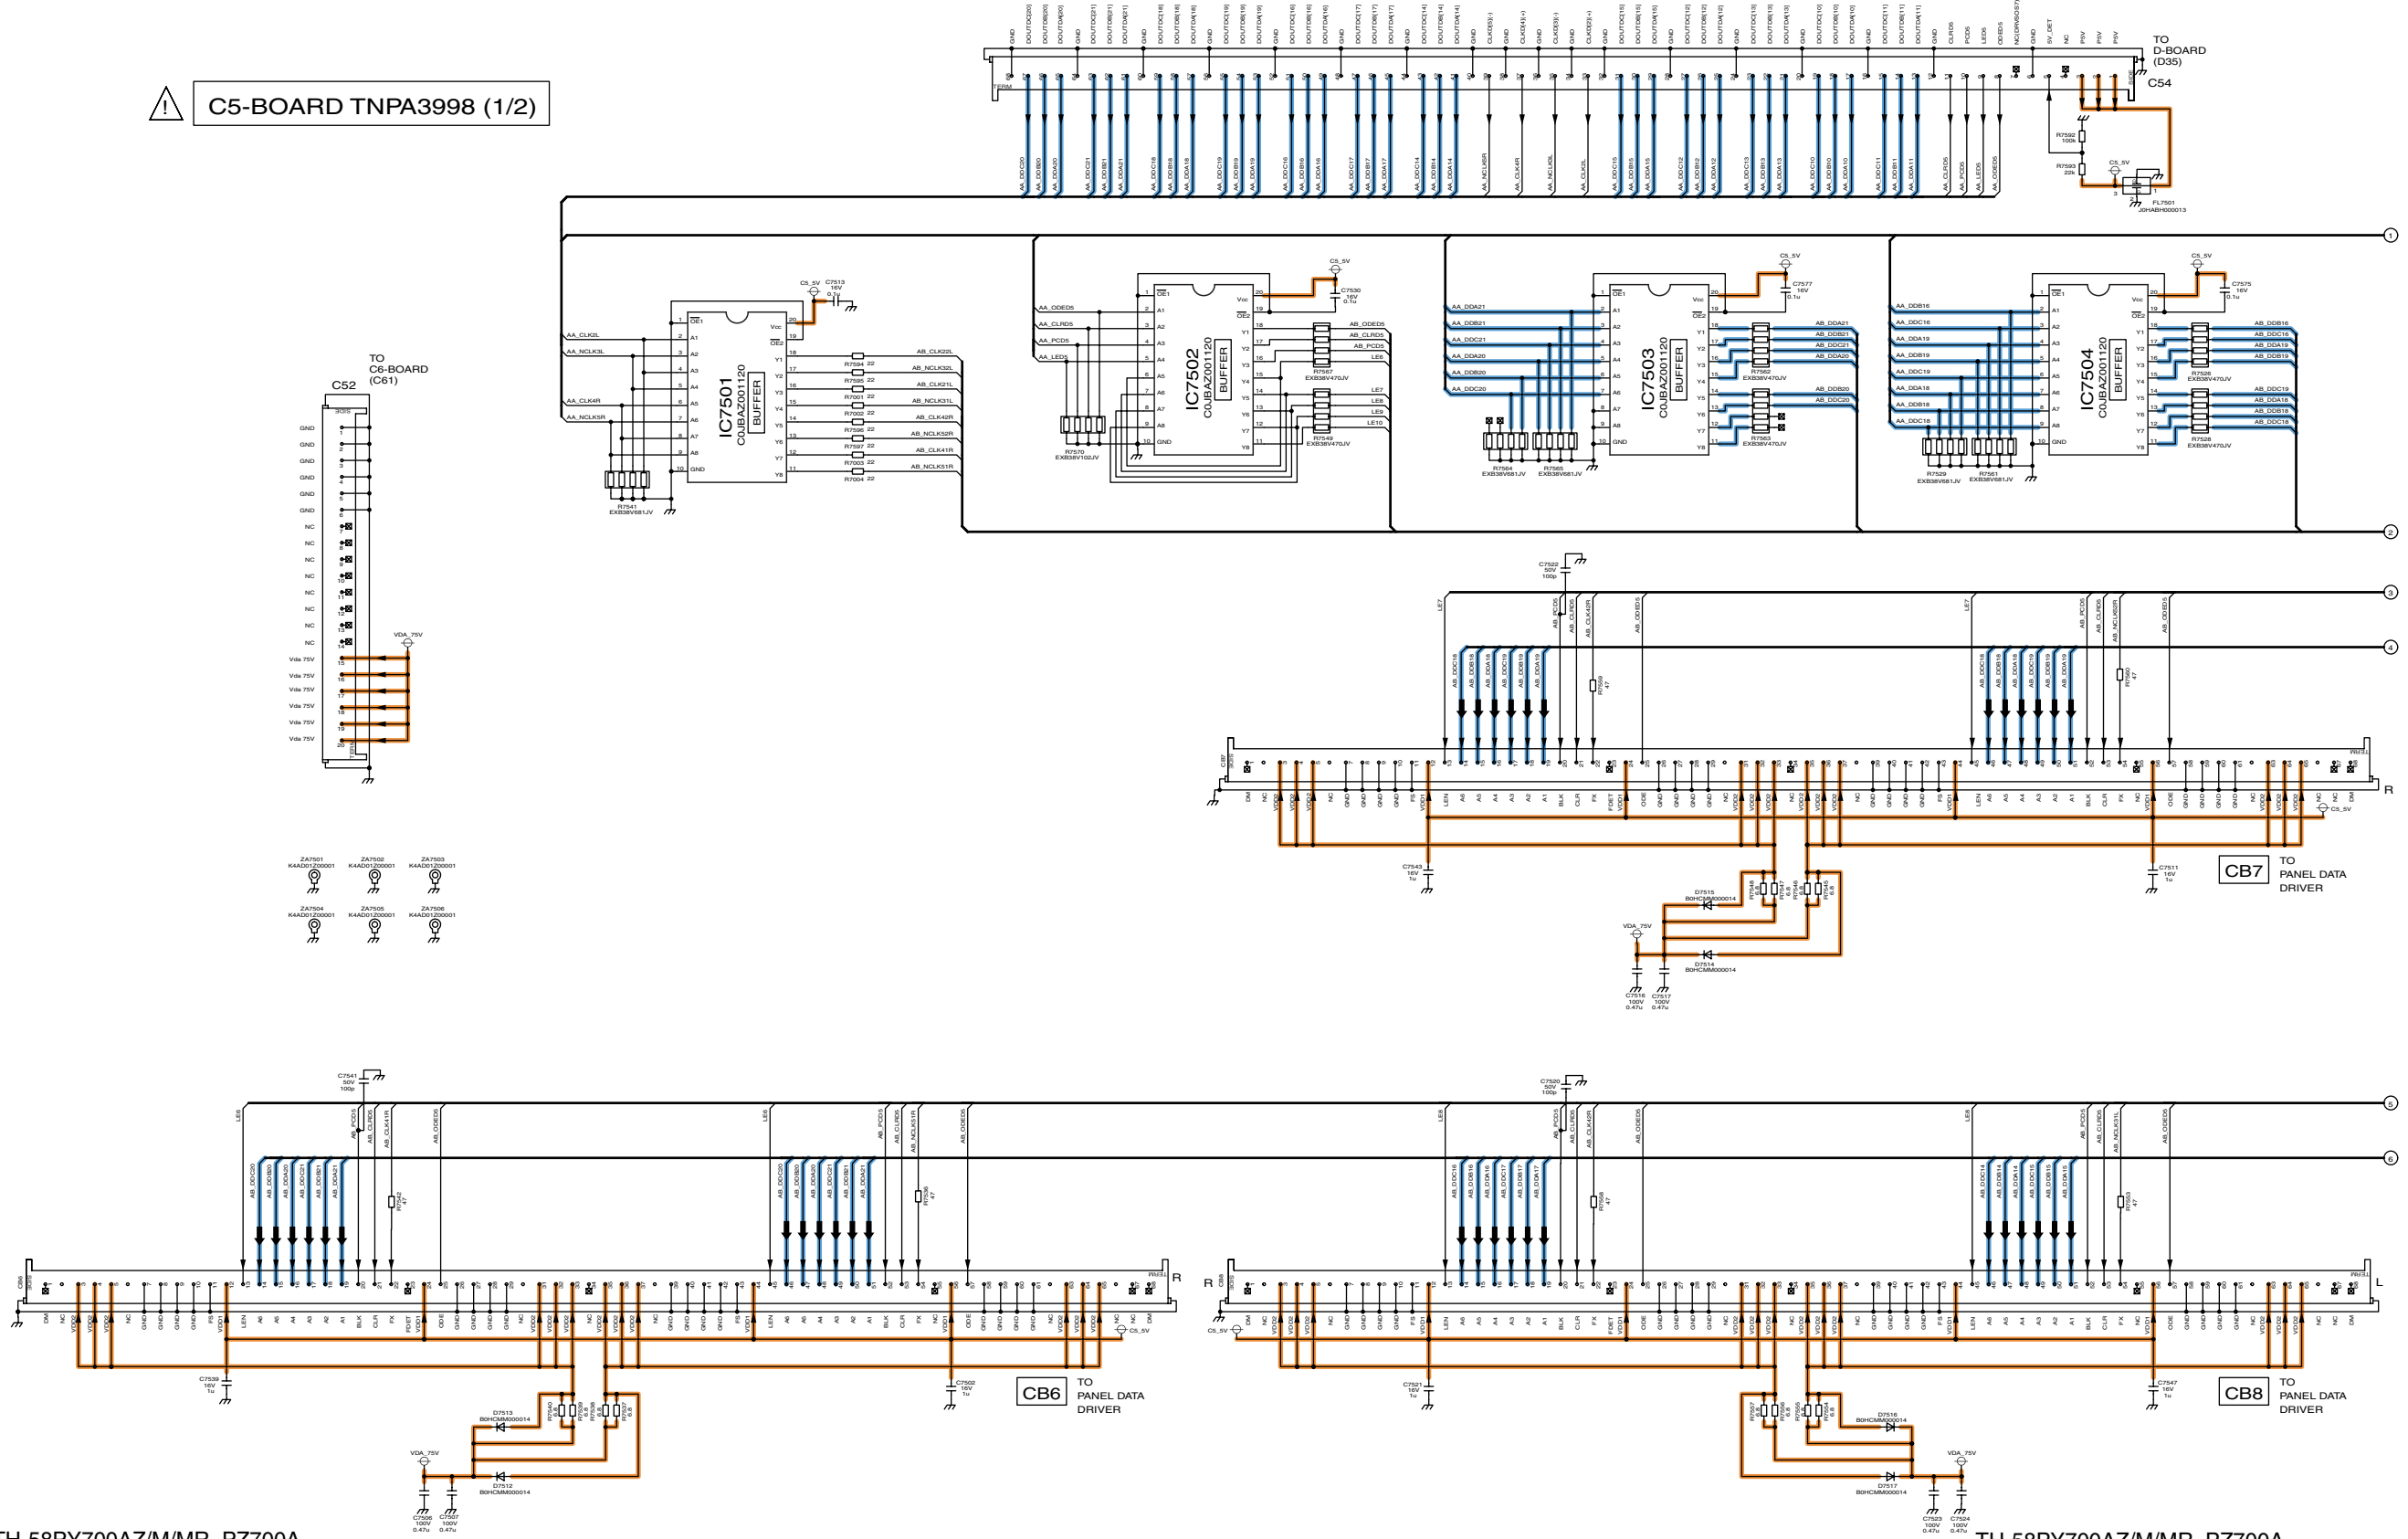


TH-58PY700AZ/M/MR, PZ700A
C5-Board (1 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
C5-Board (1 of 2) Schematic Diagram


15.67. C5-Board (2 of 2) Schematic Diagram

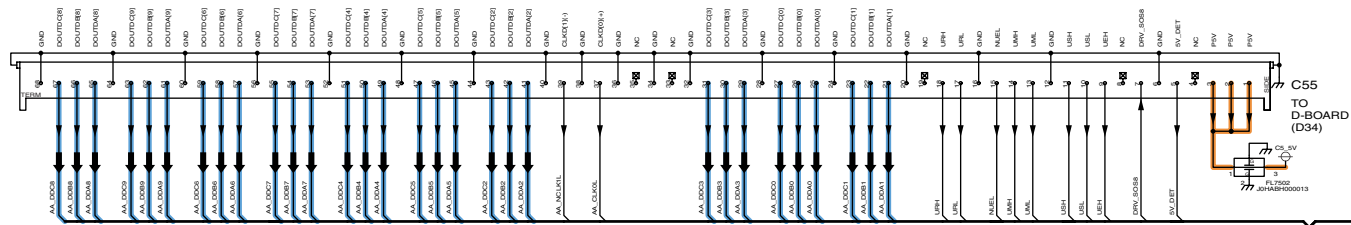


C5-BOARD TNPA3998 (2/2)

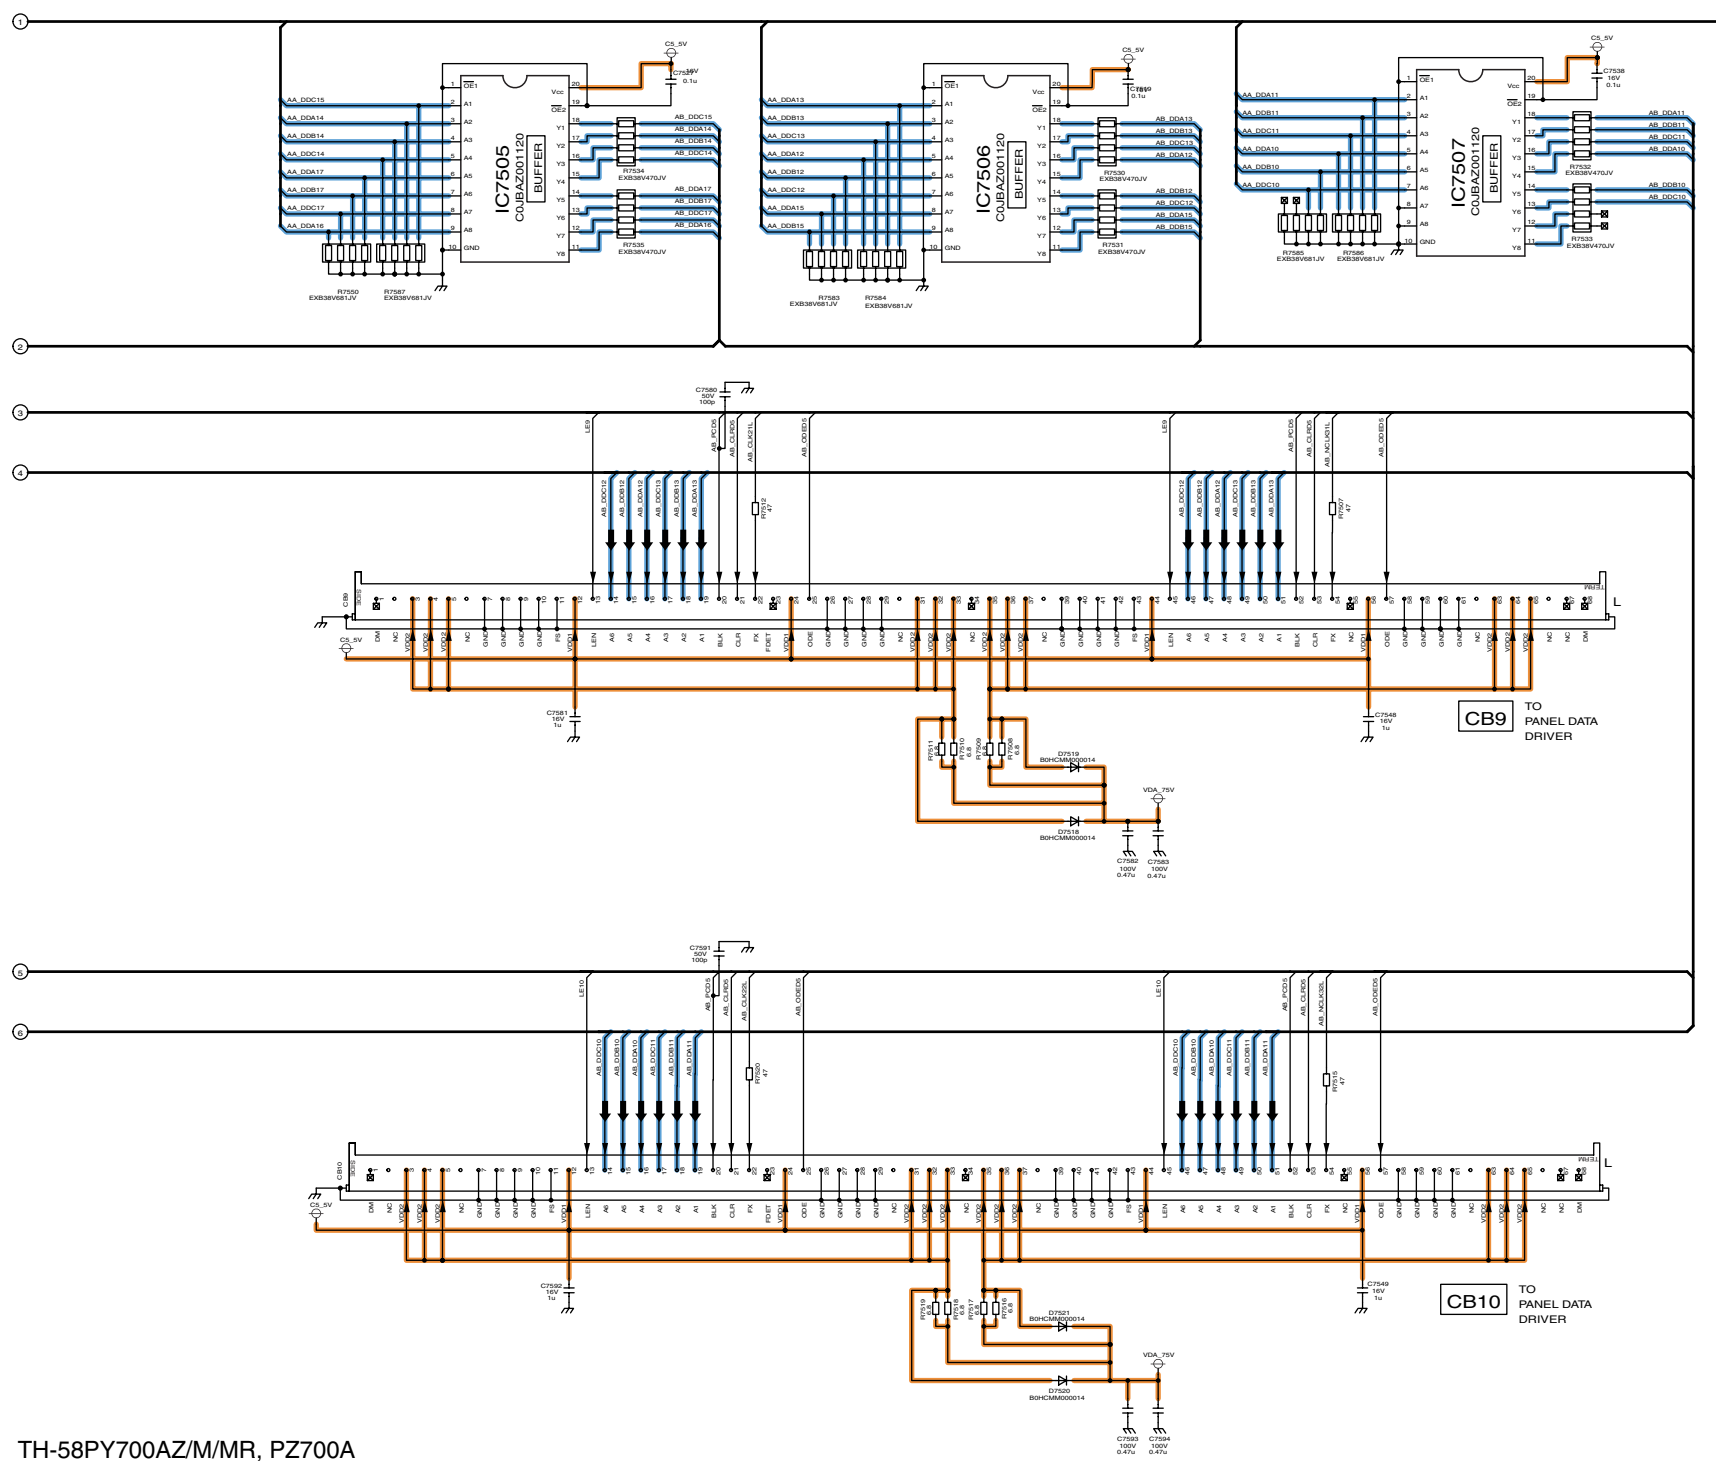


TH-58PY700AZ/M/MR, PZ700A
C5-Board (2 of 2) Schematic Diagram

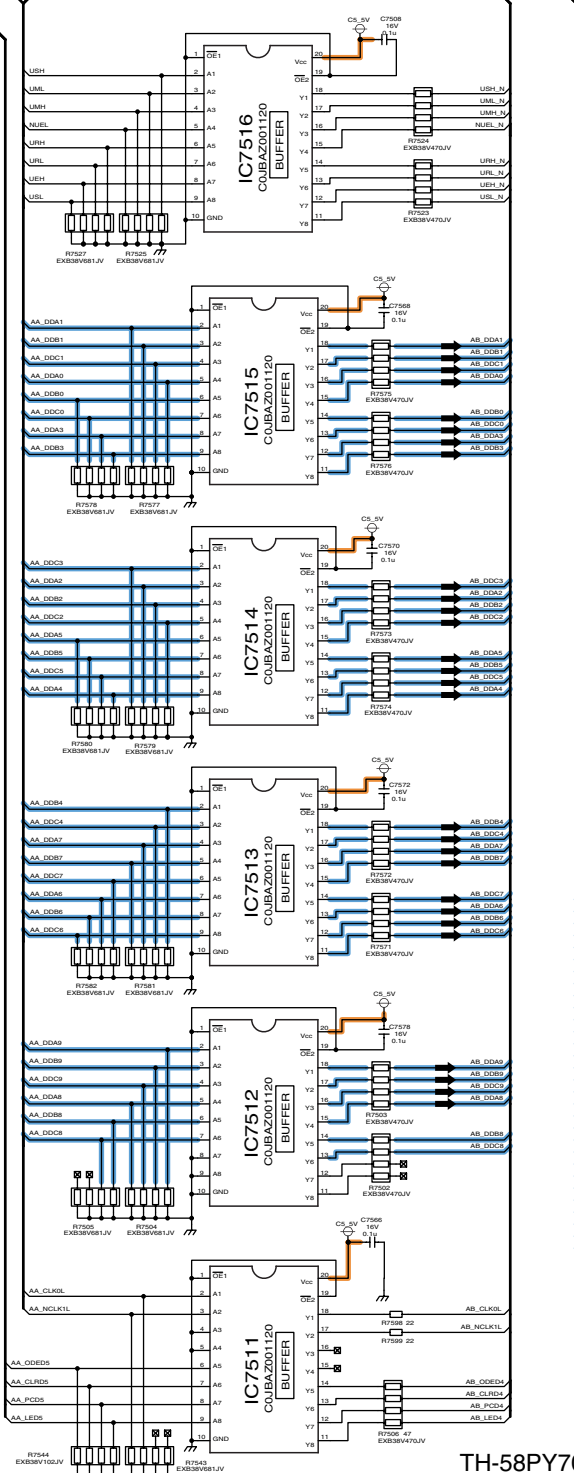


TH-58PY700AZ/M/MR, PZ700A
C5-Board (2 of 2) Schematic Diagram

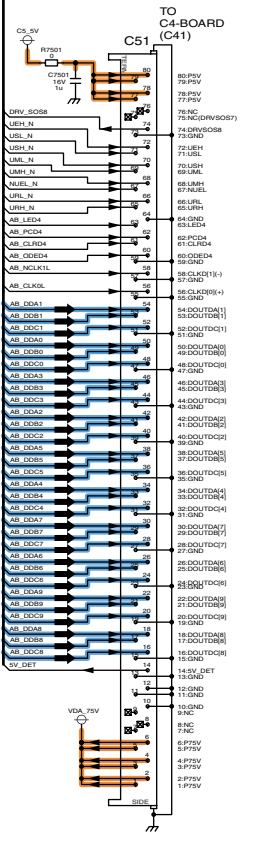

15.68. C6-Board (1 of 2) Schematic Diagram

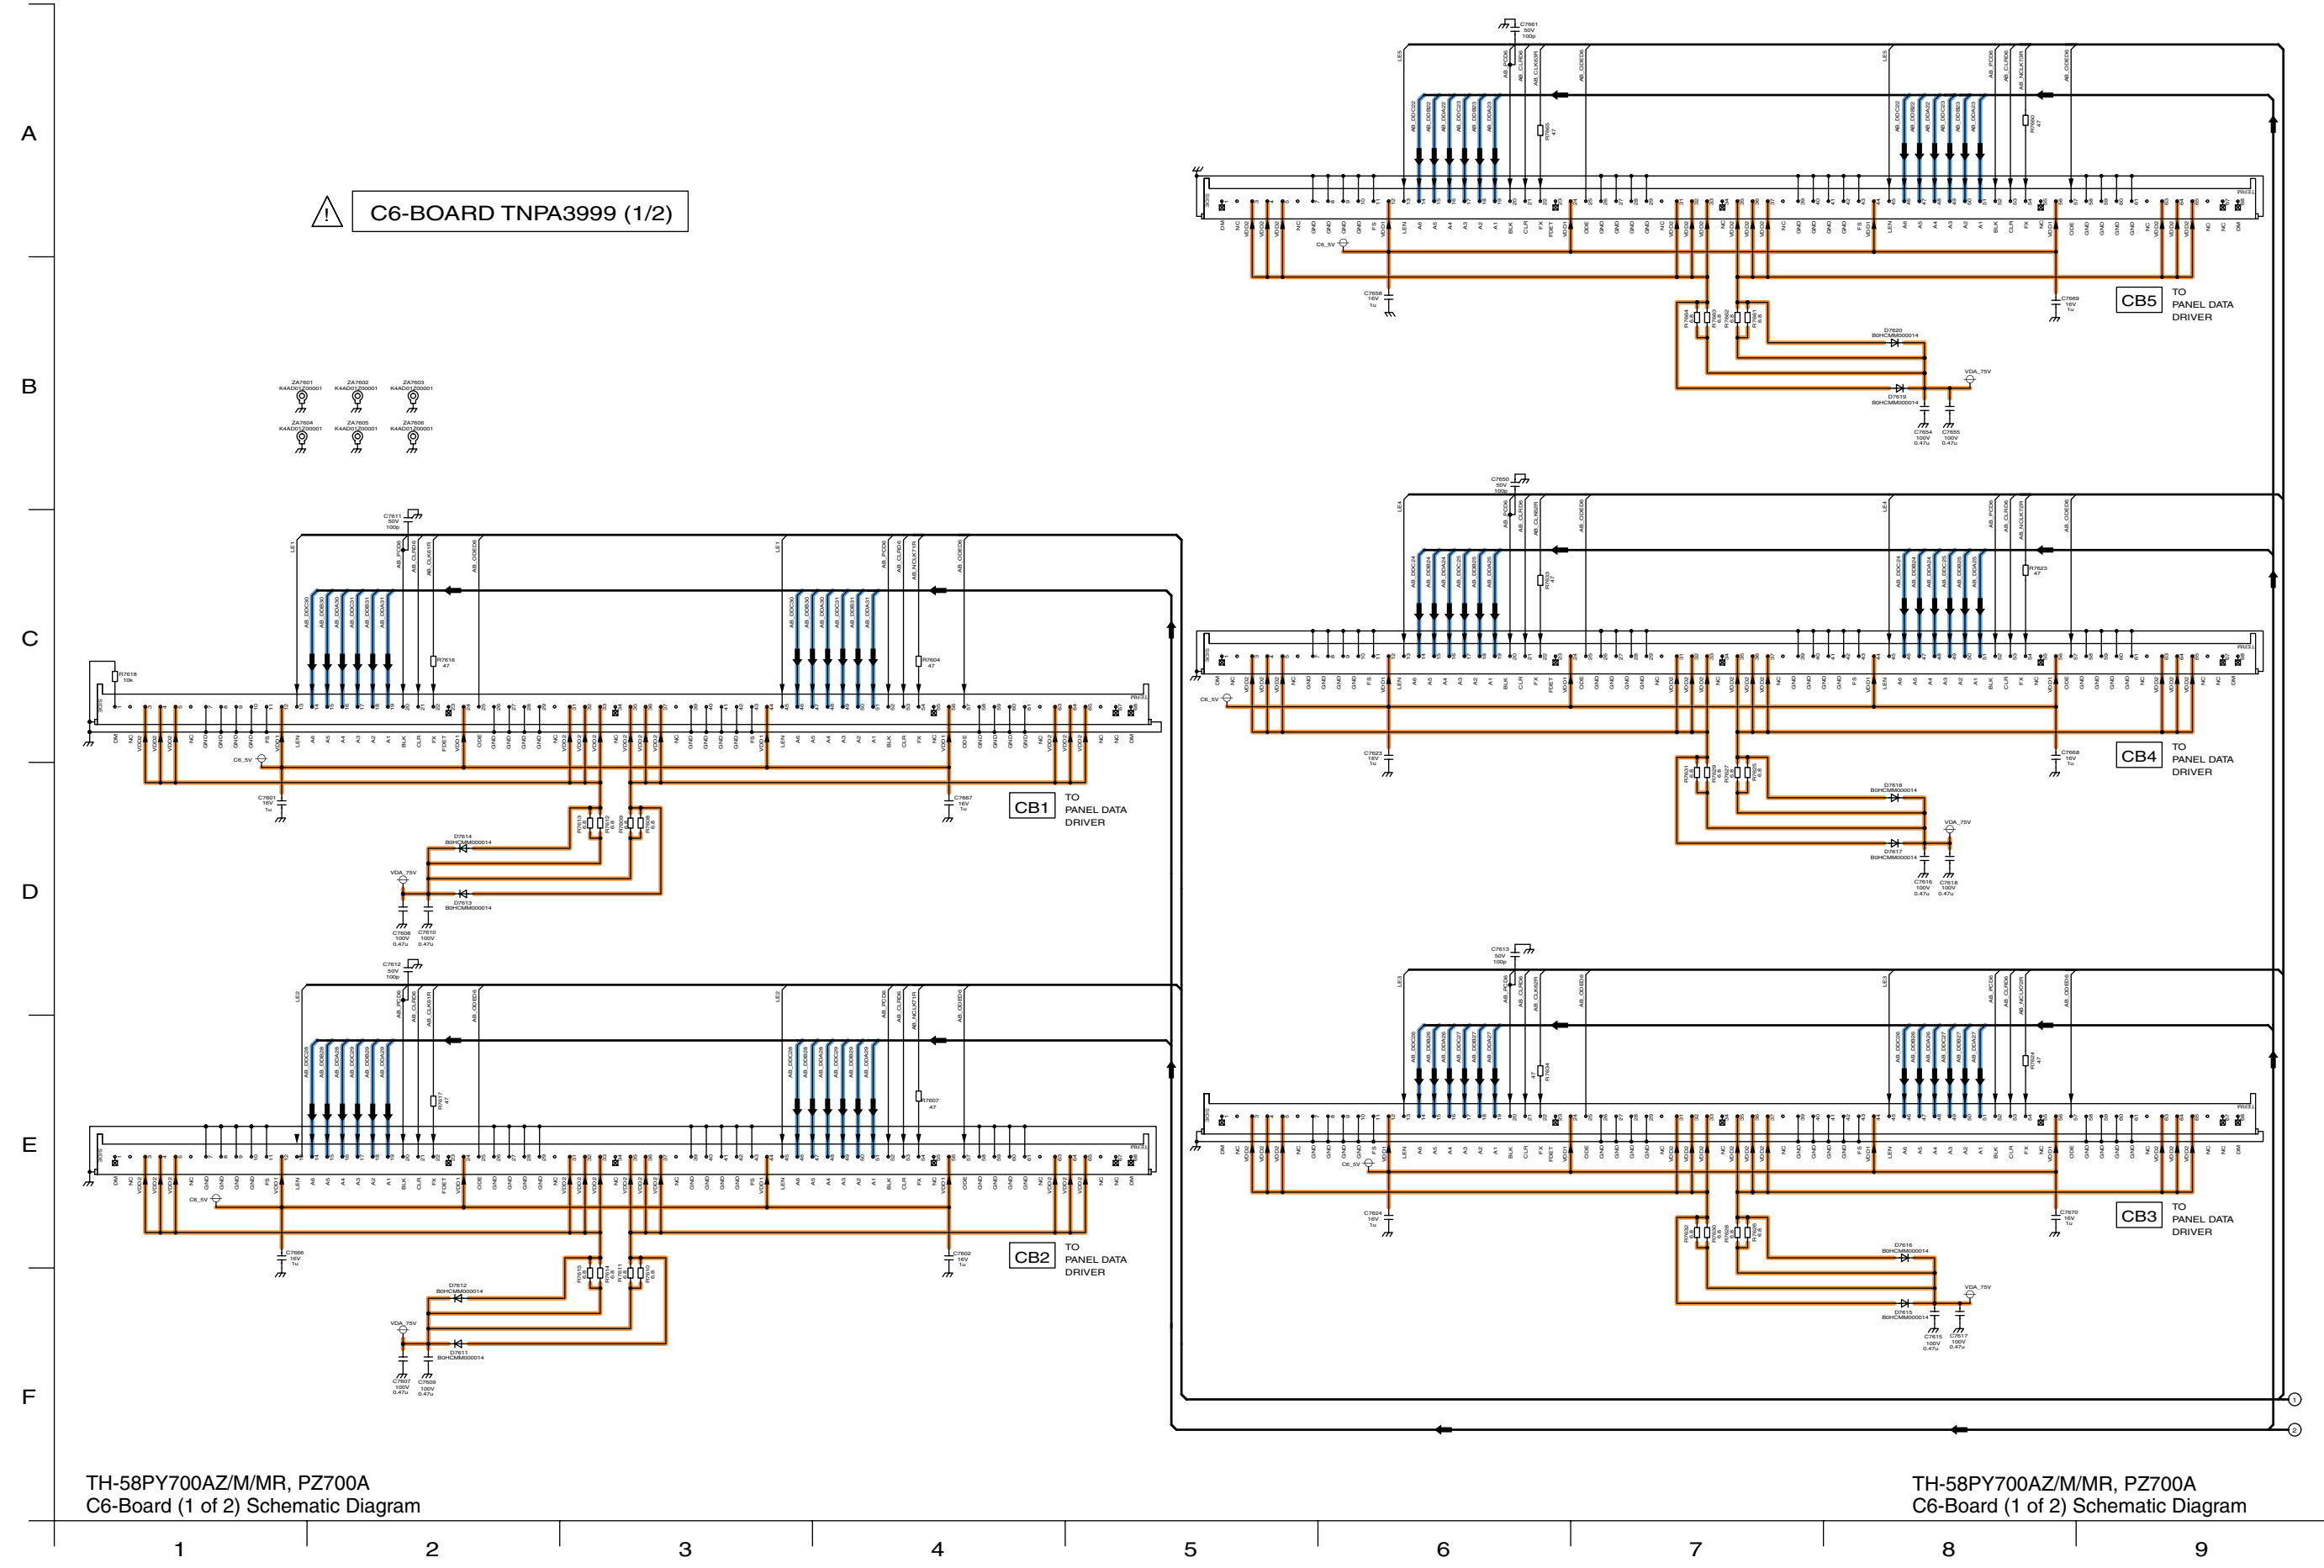

15.69. C6-Board (2 of 2) Schematic Diagram

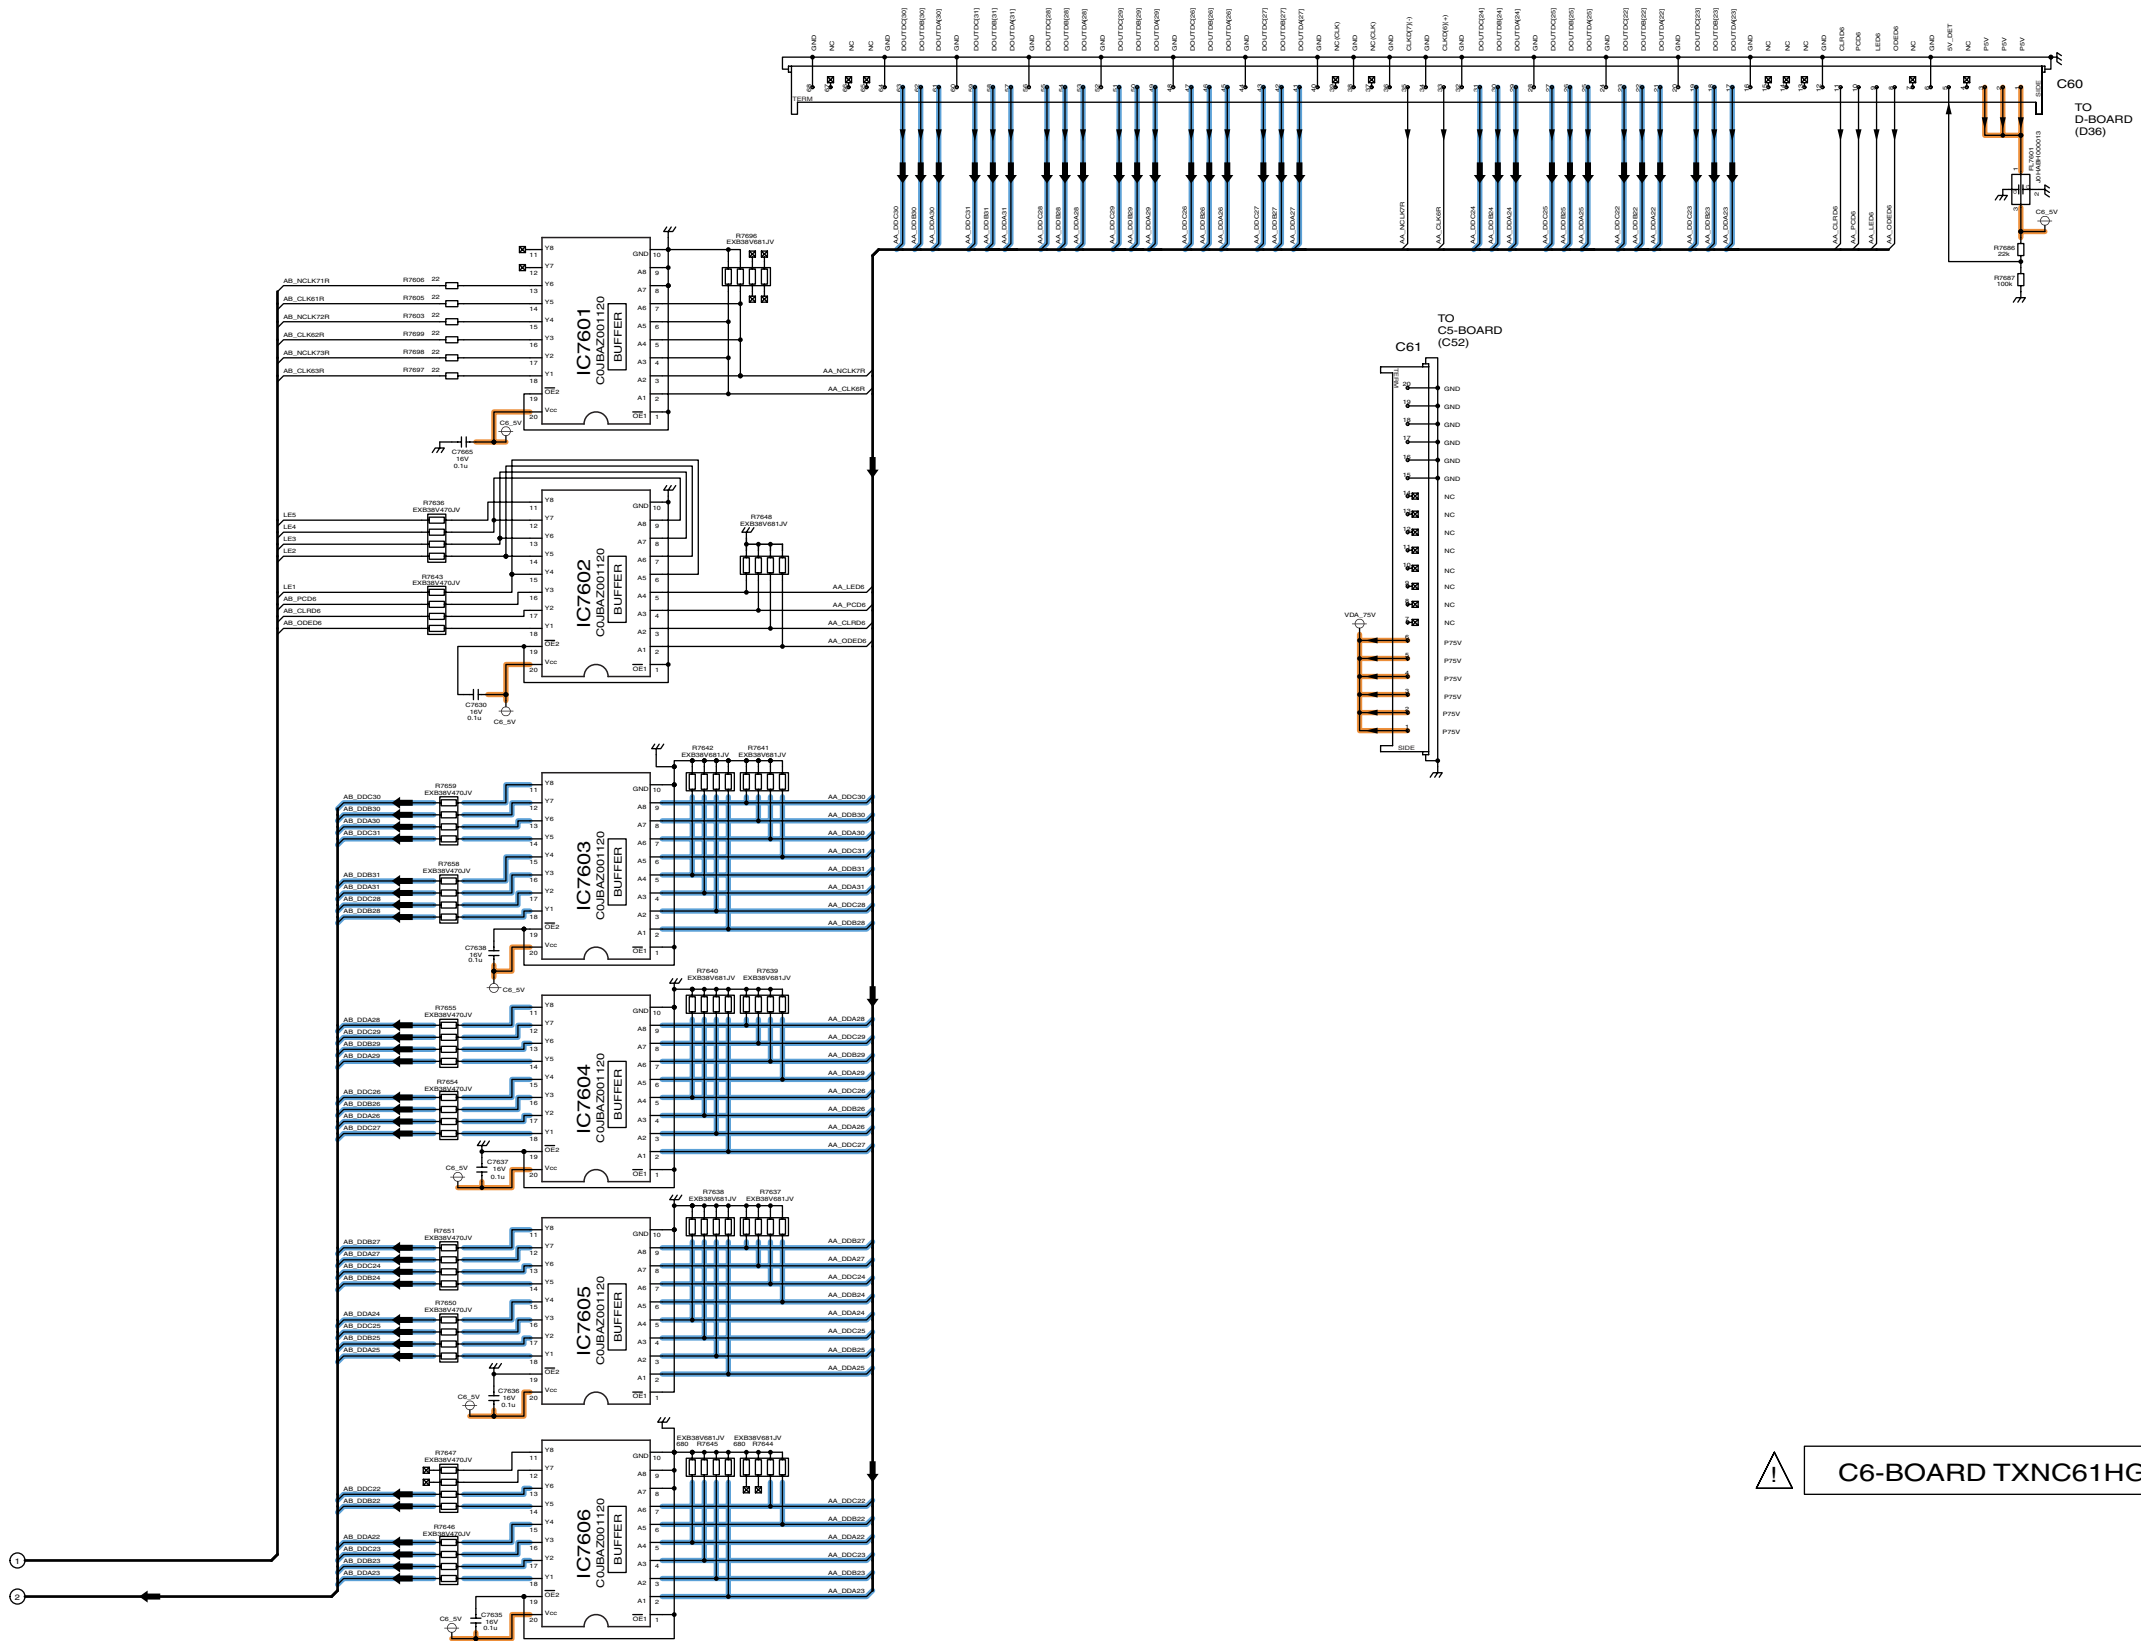


⚠ C6-BOARD TXNC61HGTUJ (2/2)

TH-58PZ700U
C6-Board (2 of 2) Schematic Diagram

TH-58PZ700U
C6-Board (2 of 2) Schematic Diagram

15.70. SC-Board Block Diagram

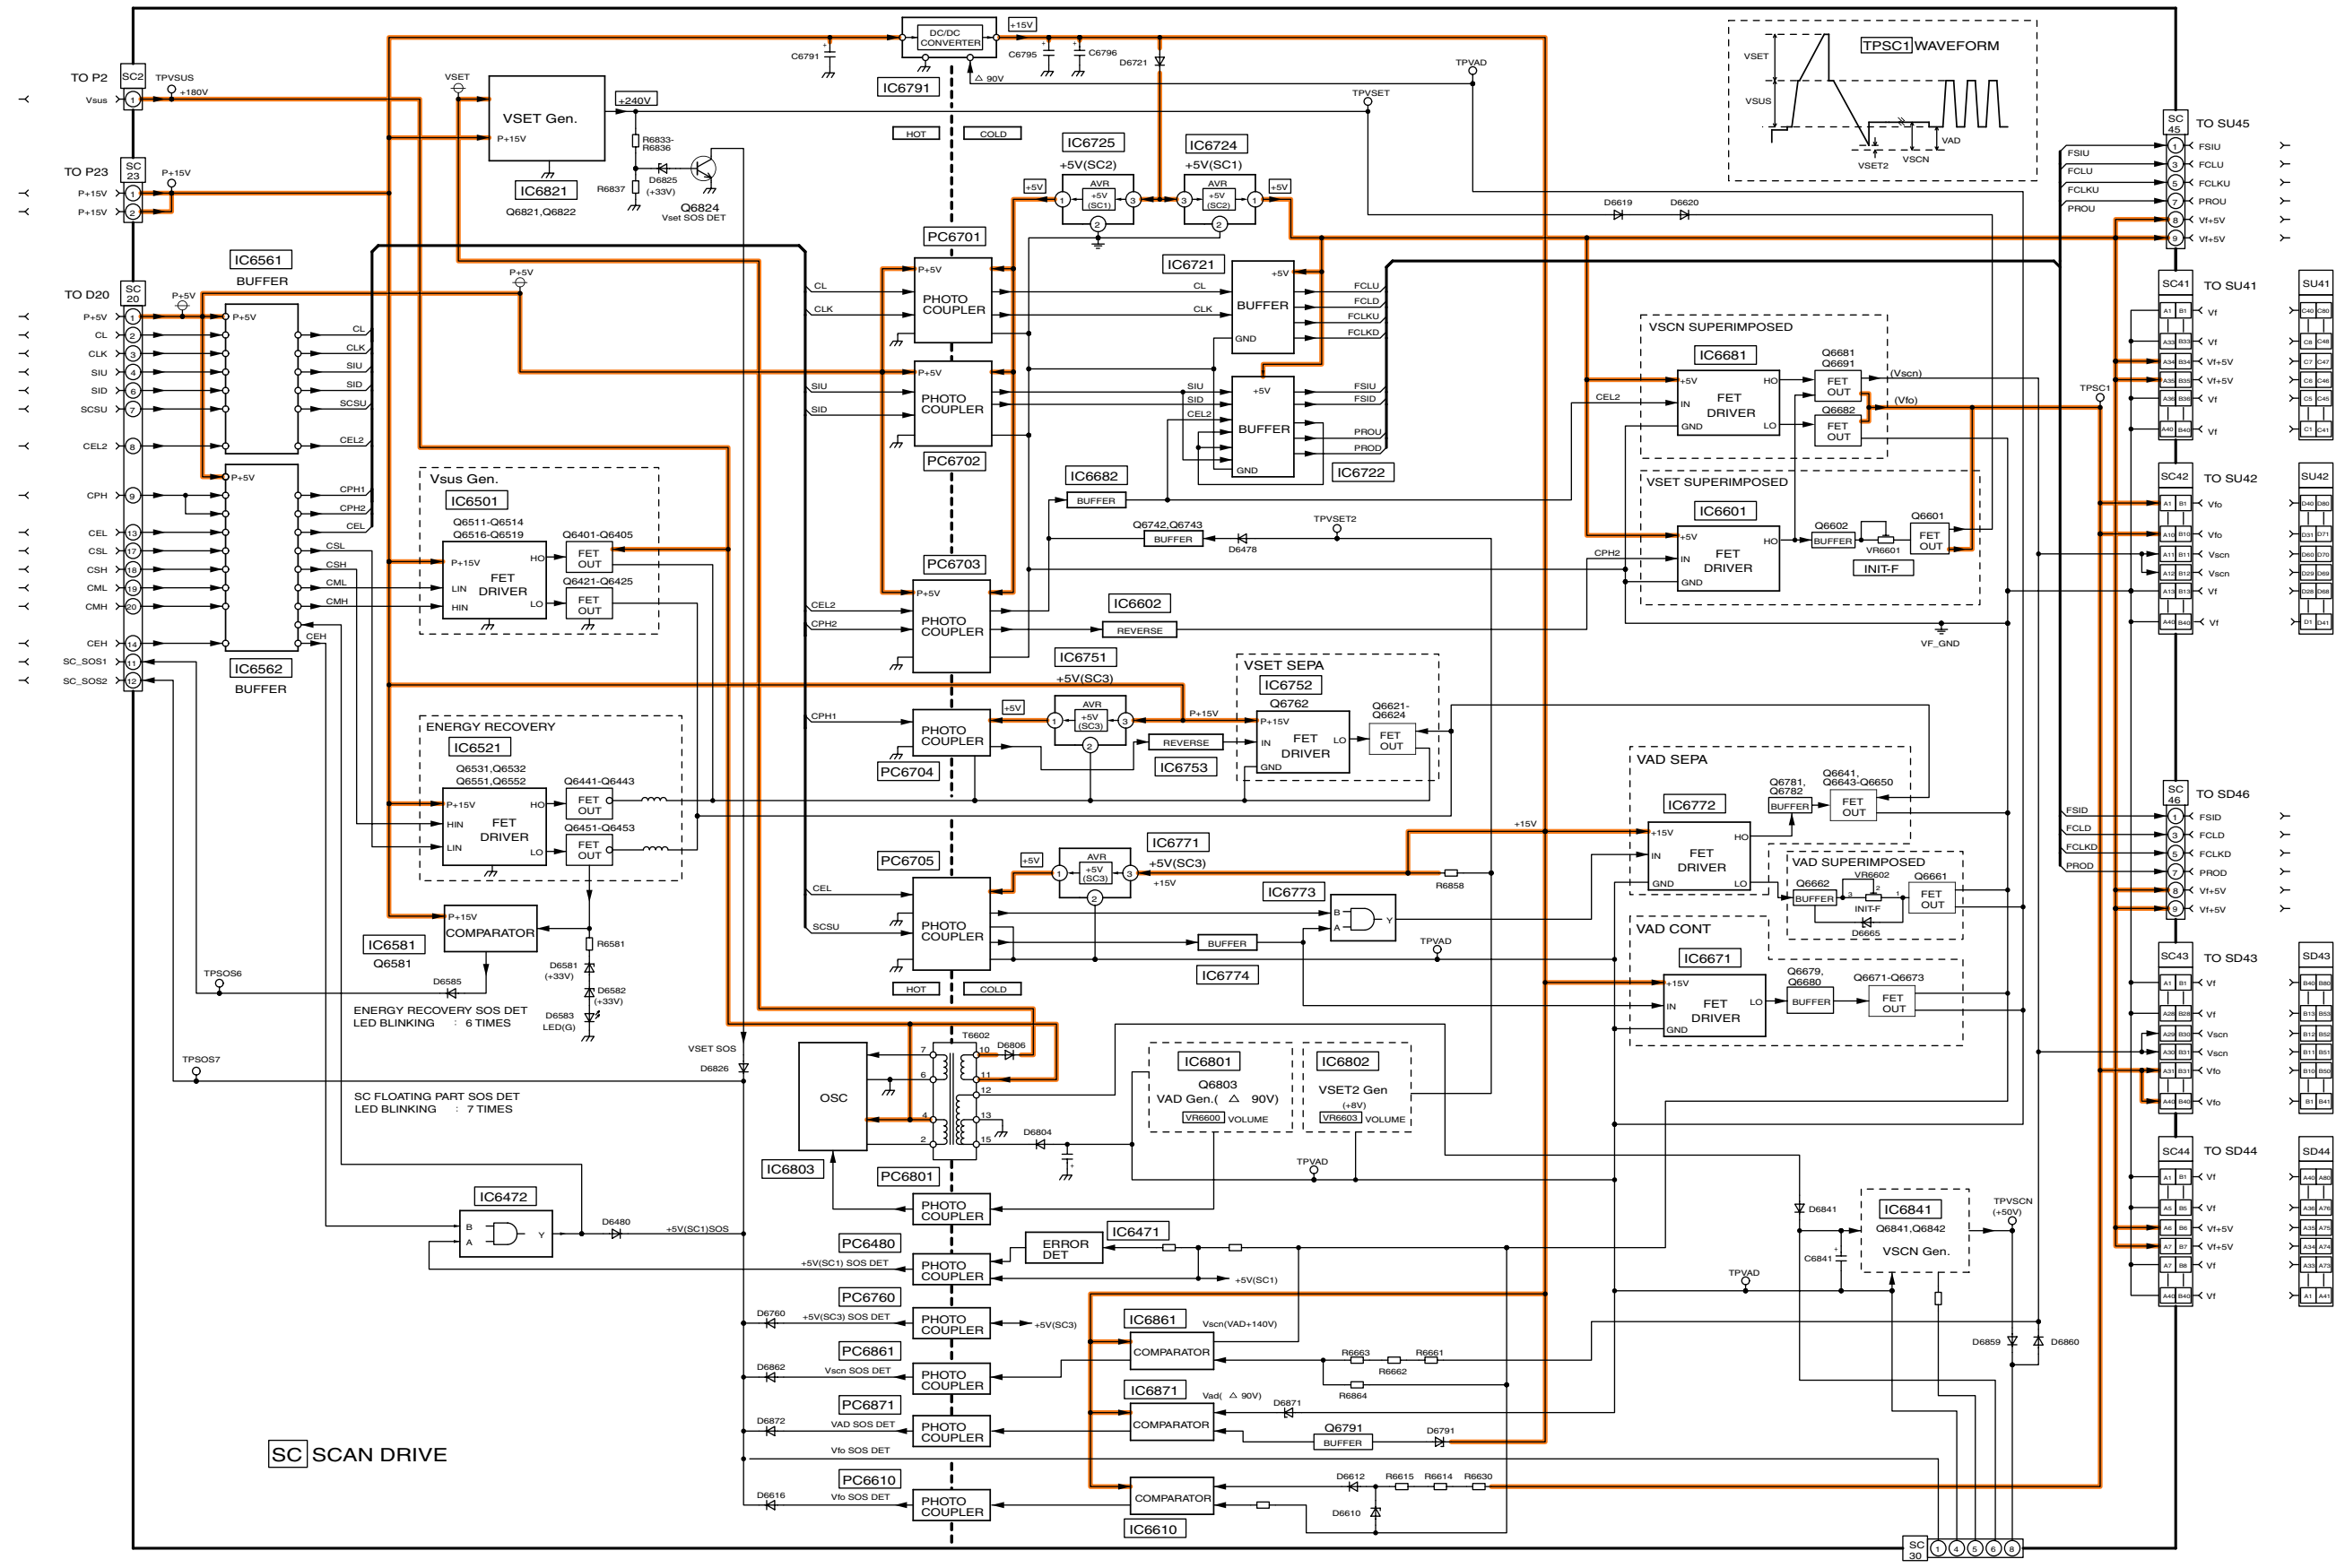


TH-58PY700AZ/M/MR, PZ700A
SC-Board Block Diagram

TH-58PY700AZ/M/MR, PZ700A
SC-Board Block Diagram

15.71. SC-Board (1 of 2) Schematic Diagram

A
B
C
D
E
F

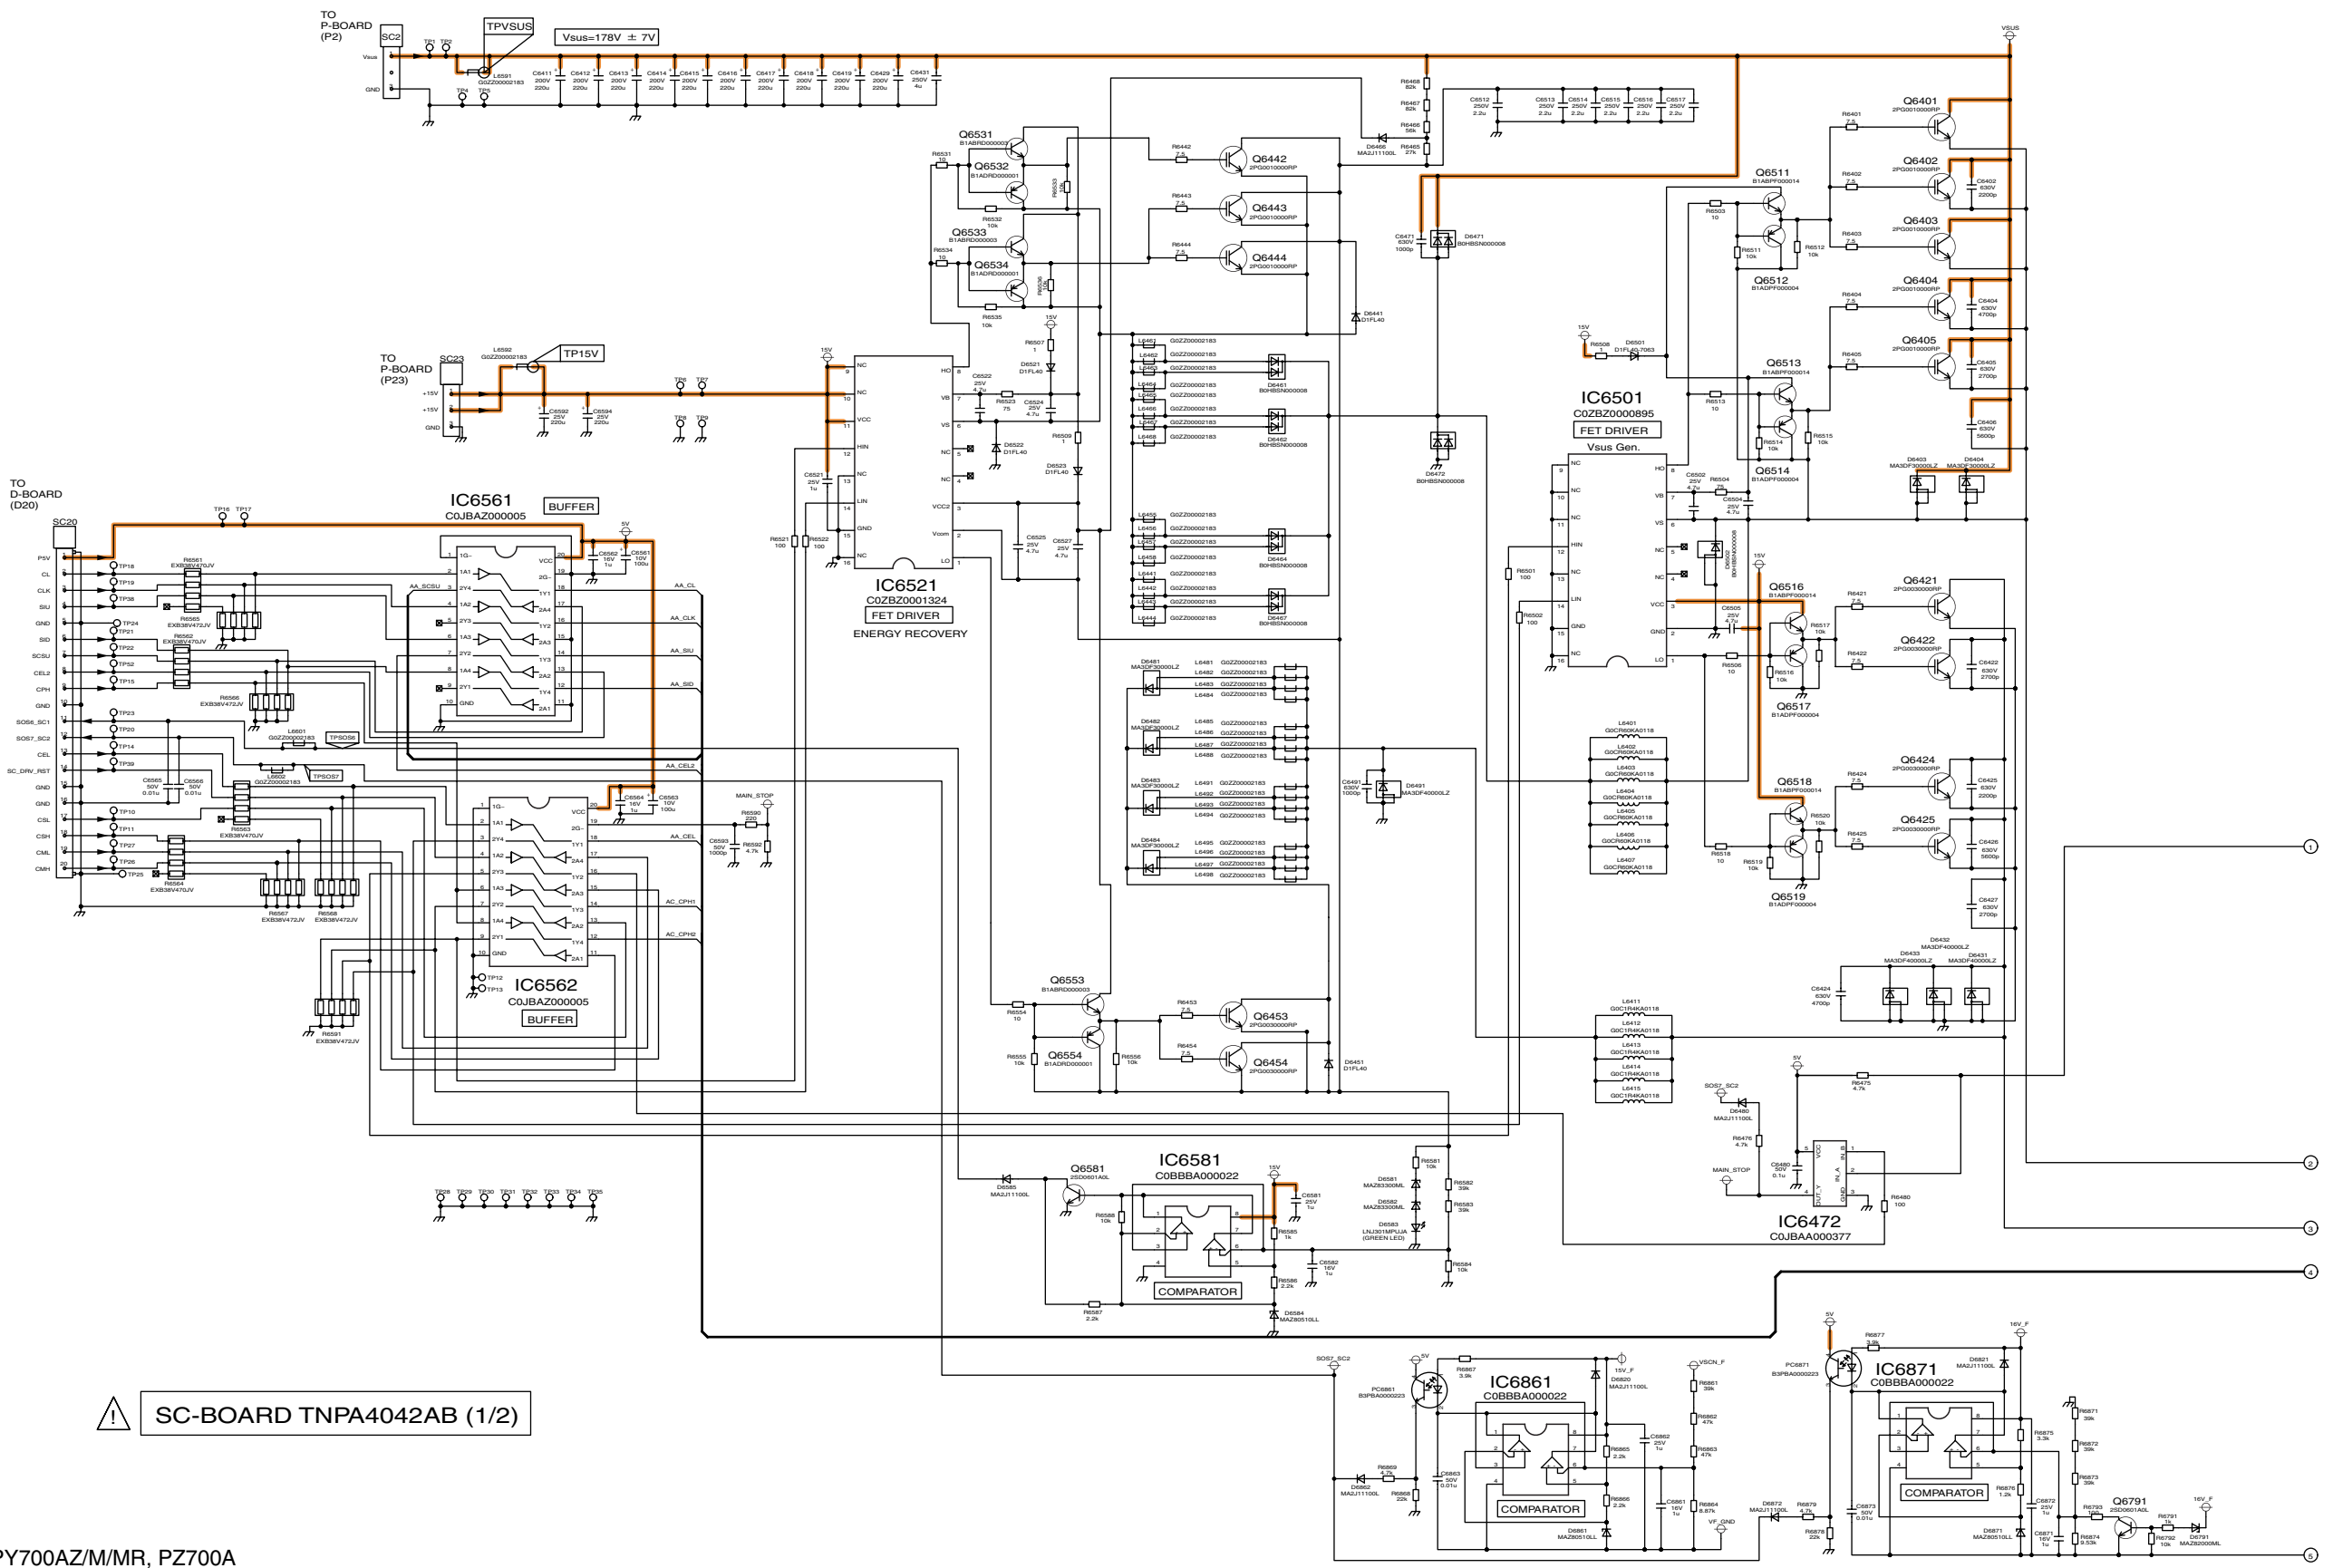


SC-BOARD TNPA4042AB (1/2)

TH-58PY700AZ/M/MR, PZ700A
SC-Board (1 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A SC-Board (1 of 2) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.72. SC-Board (2 of 2) Schematic Diagram

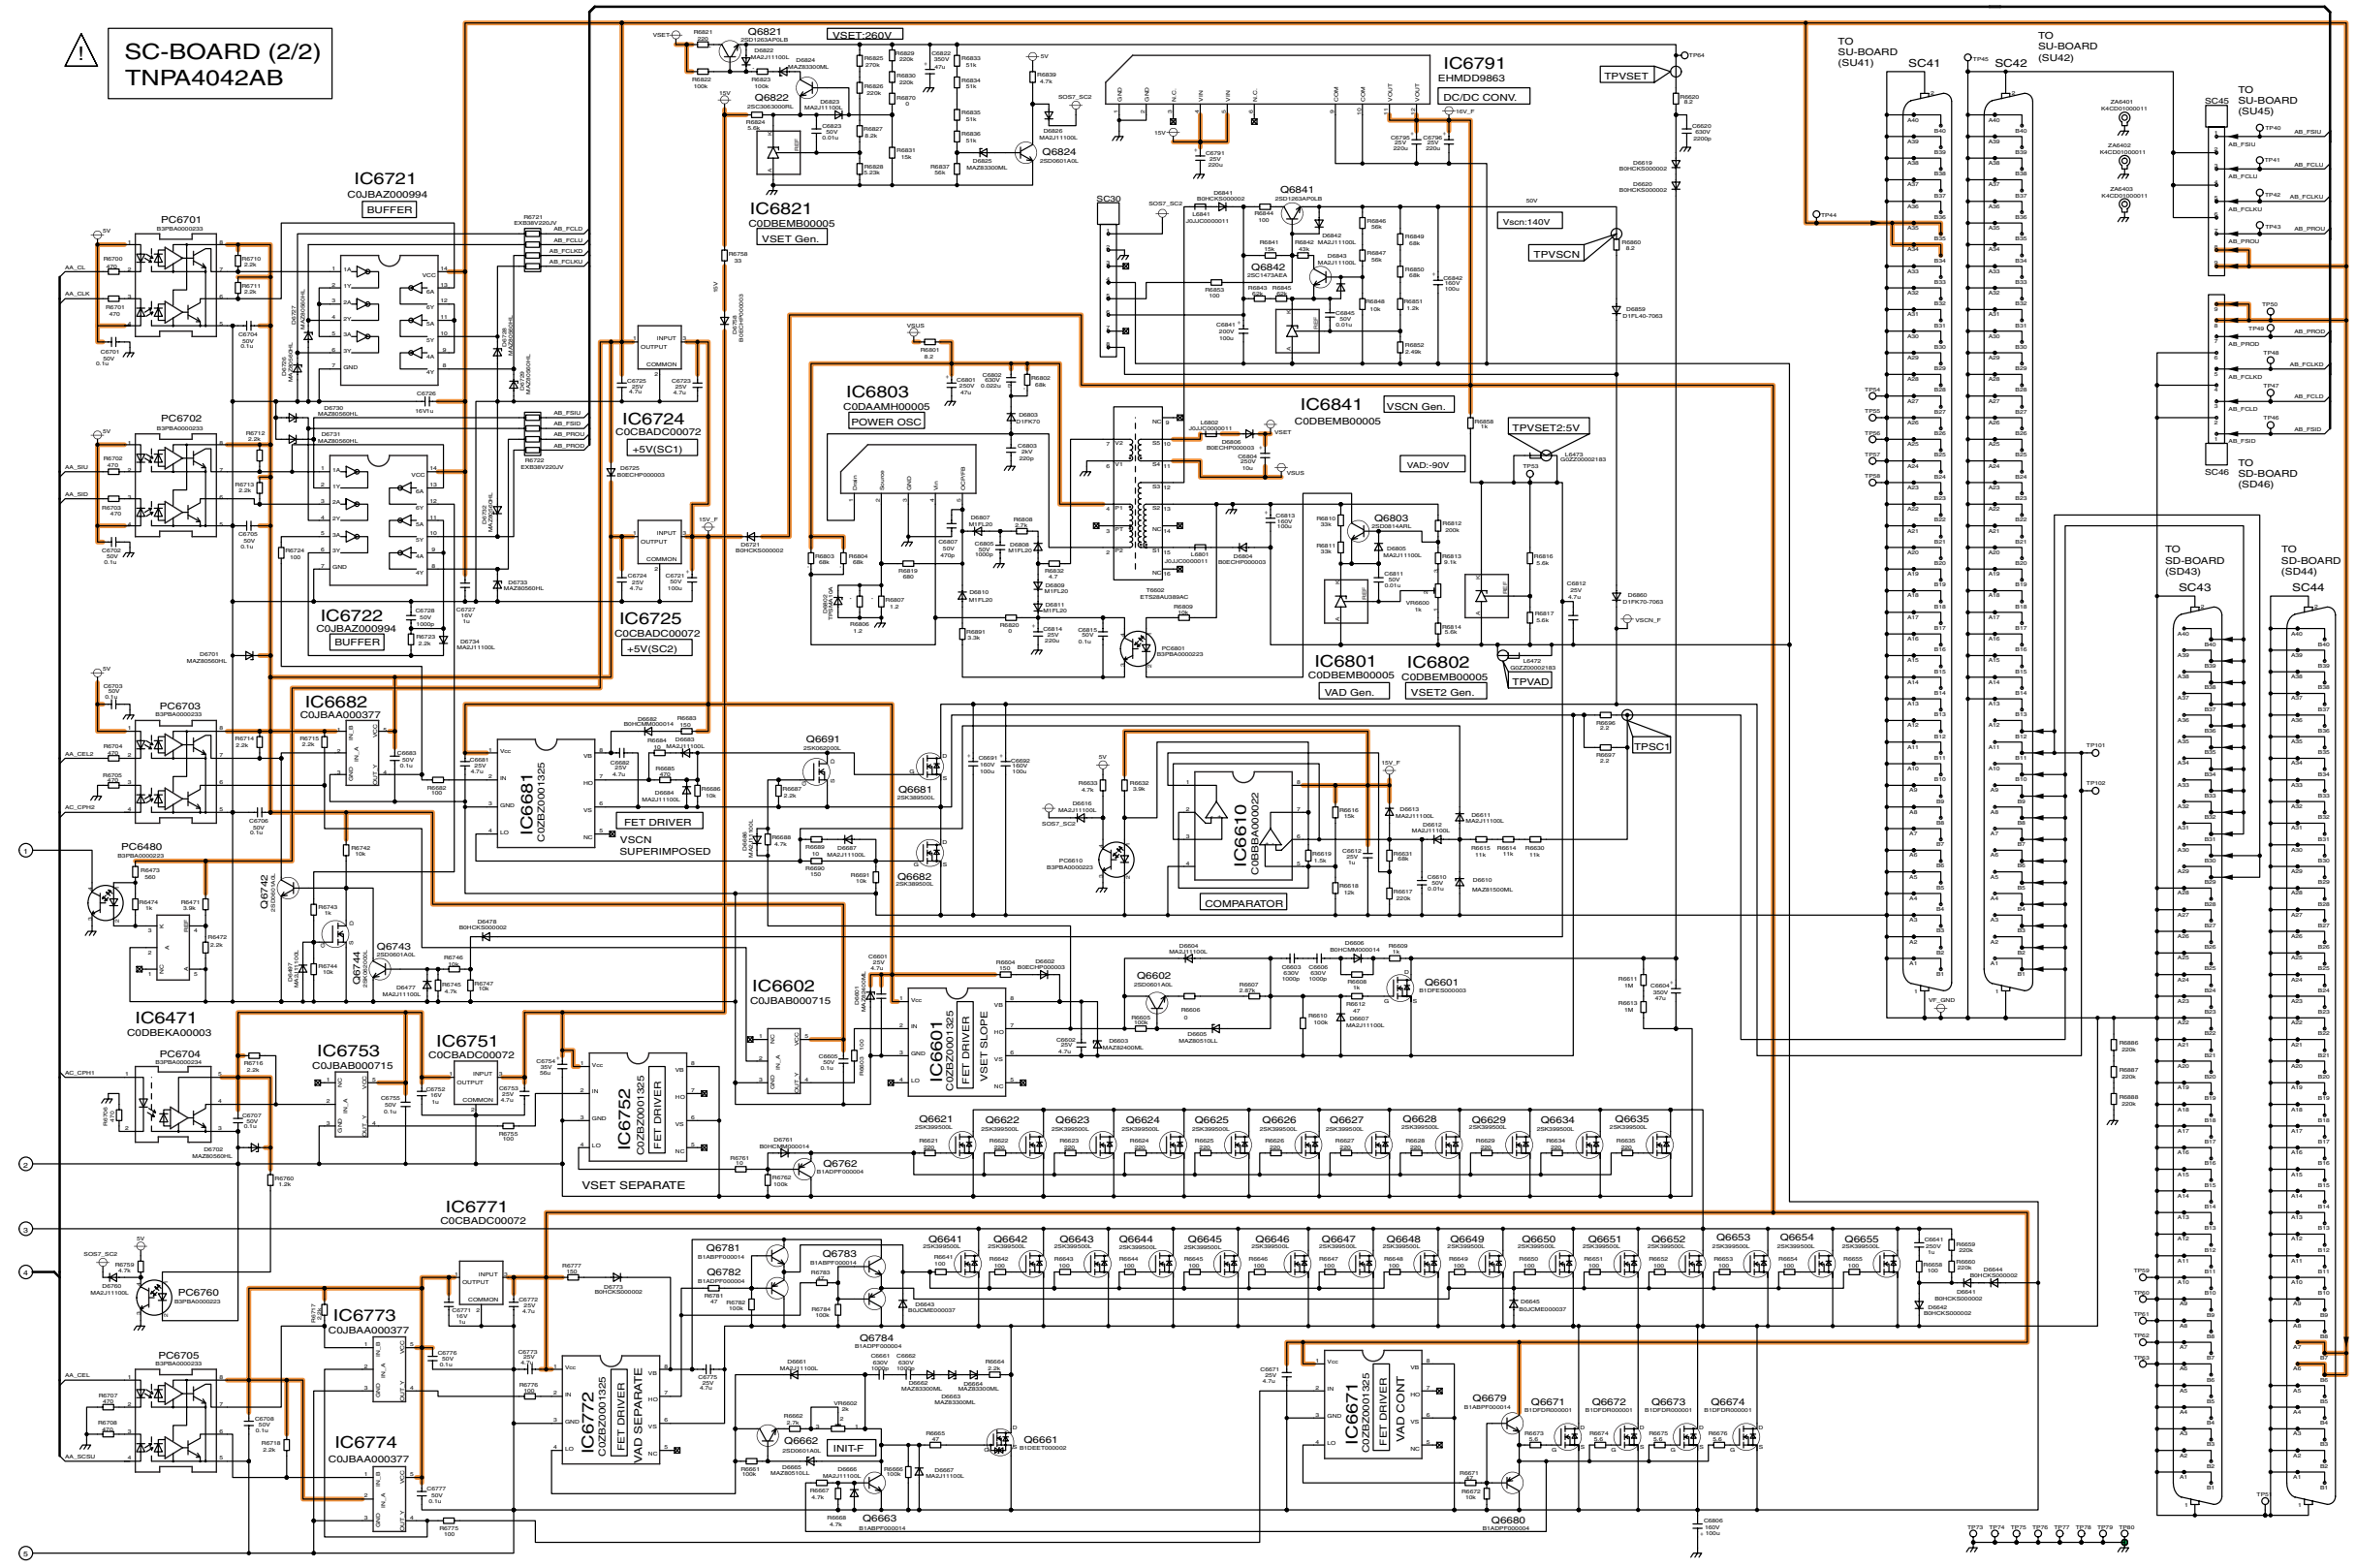

TH-58PY700AZ/M/MR, PZ700A SC-Board (2 of 2) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A SC-Board (2 of 2) Schematic Diagram

10

11

12

13

14


15

16

17

18

15.73. SU and SD-Board Block Diagram

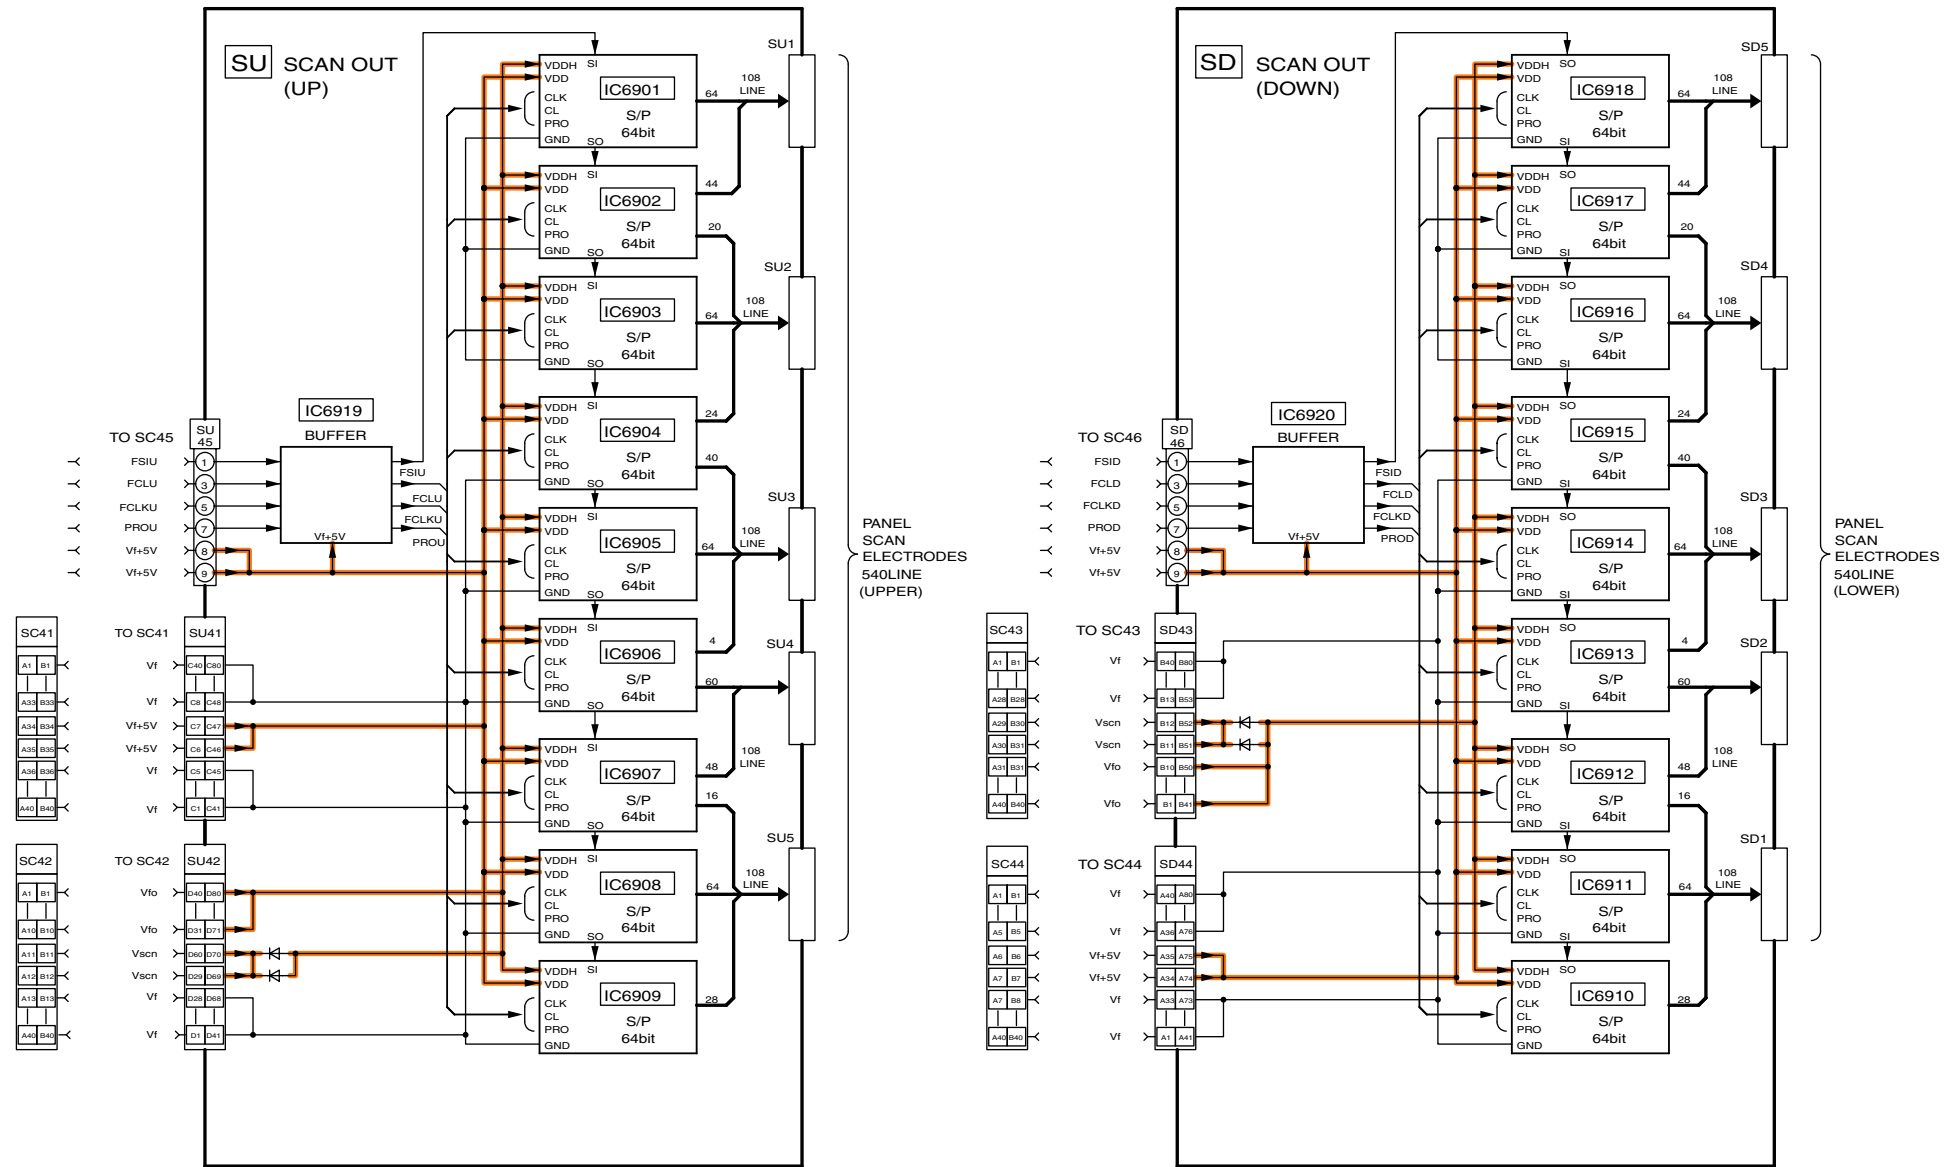

TH-58PY700AZ/M/MR, PZ700A
SU and SD-Board Block Diagram

TH-58PY700AZ/M/MR, PZ700A
SU and SD-Board Block Diagram

15.74. SU-Board (1 of 3) Schematic Diagram

A

⚠ SU-BOARD TNPA4000AB (1/3)


B

C

D

E

F

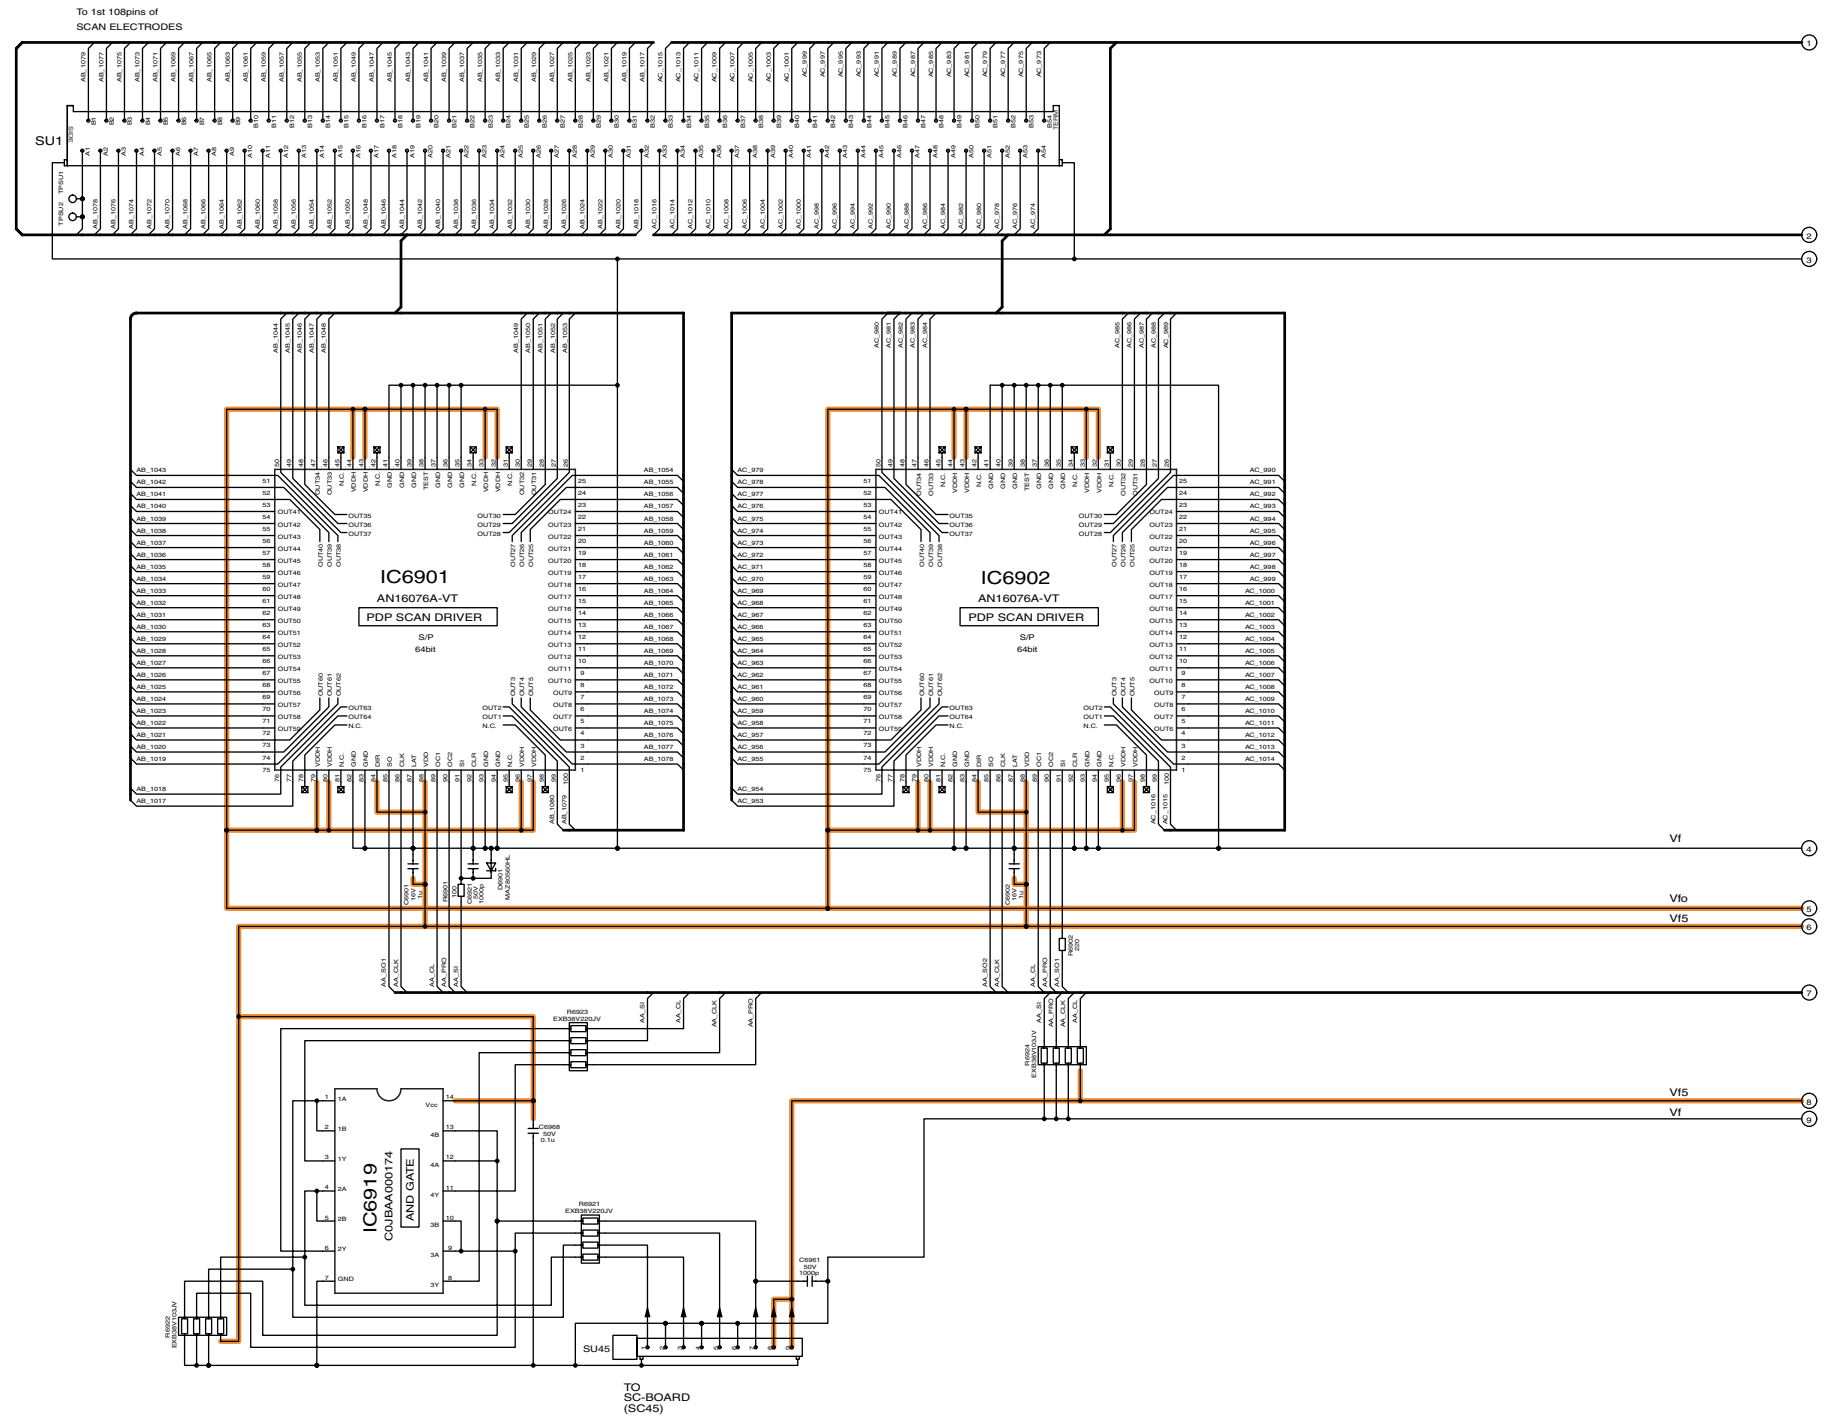


TH-58PY700AZ/M/MR, PZ700A
SU-Board (1 of 3) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
SU-Board (1 of 3) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.75. SU-Board (2 of 3) Schematic Diagram

SU-BOARD TNPA4000AB (2/3)

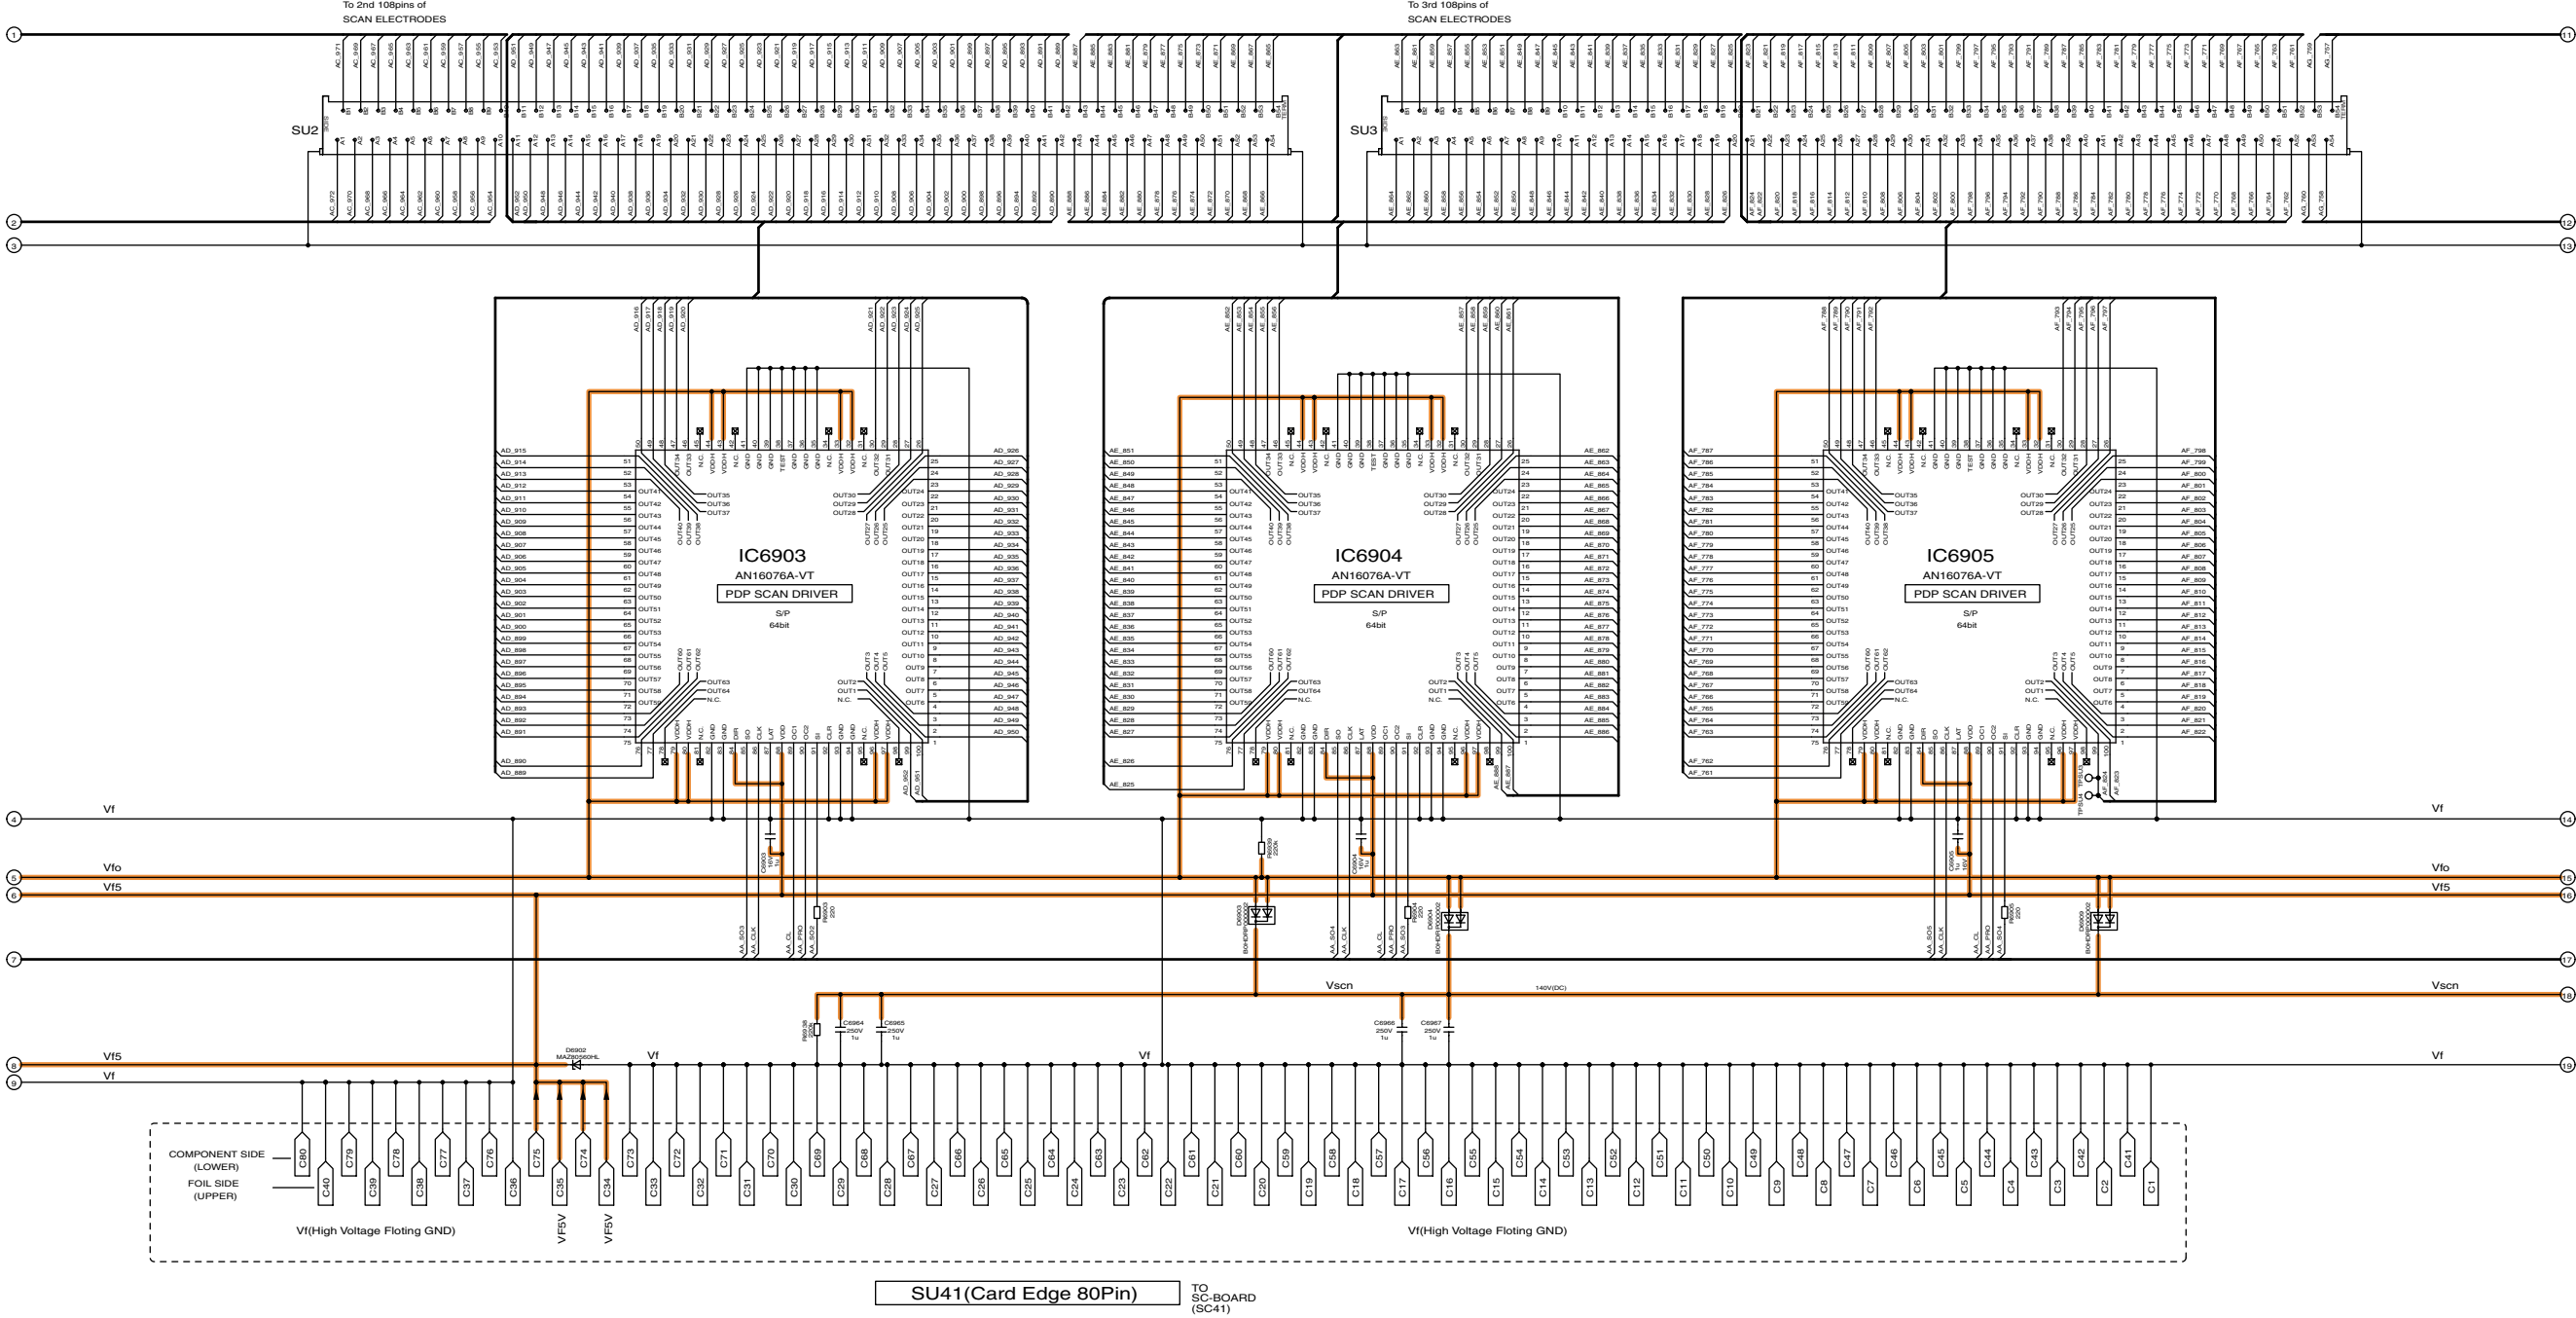


TH-58PY700AZ/M/MR, PZ700A
SU-Board (2 of 3) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
SU-Board (2 of 3) Schematic Diagram

10 11 12 13 14 15 16 17 18

15.76. SU-Board (3 of 3) Schematic Diagram

⚠ SU-BUARD TNPA4000AB (3/3)

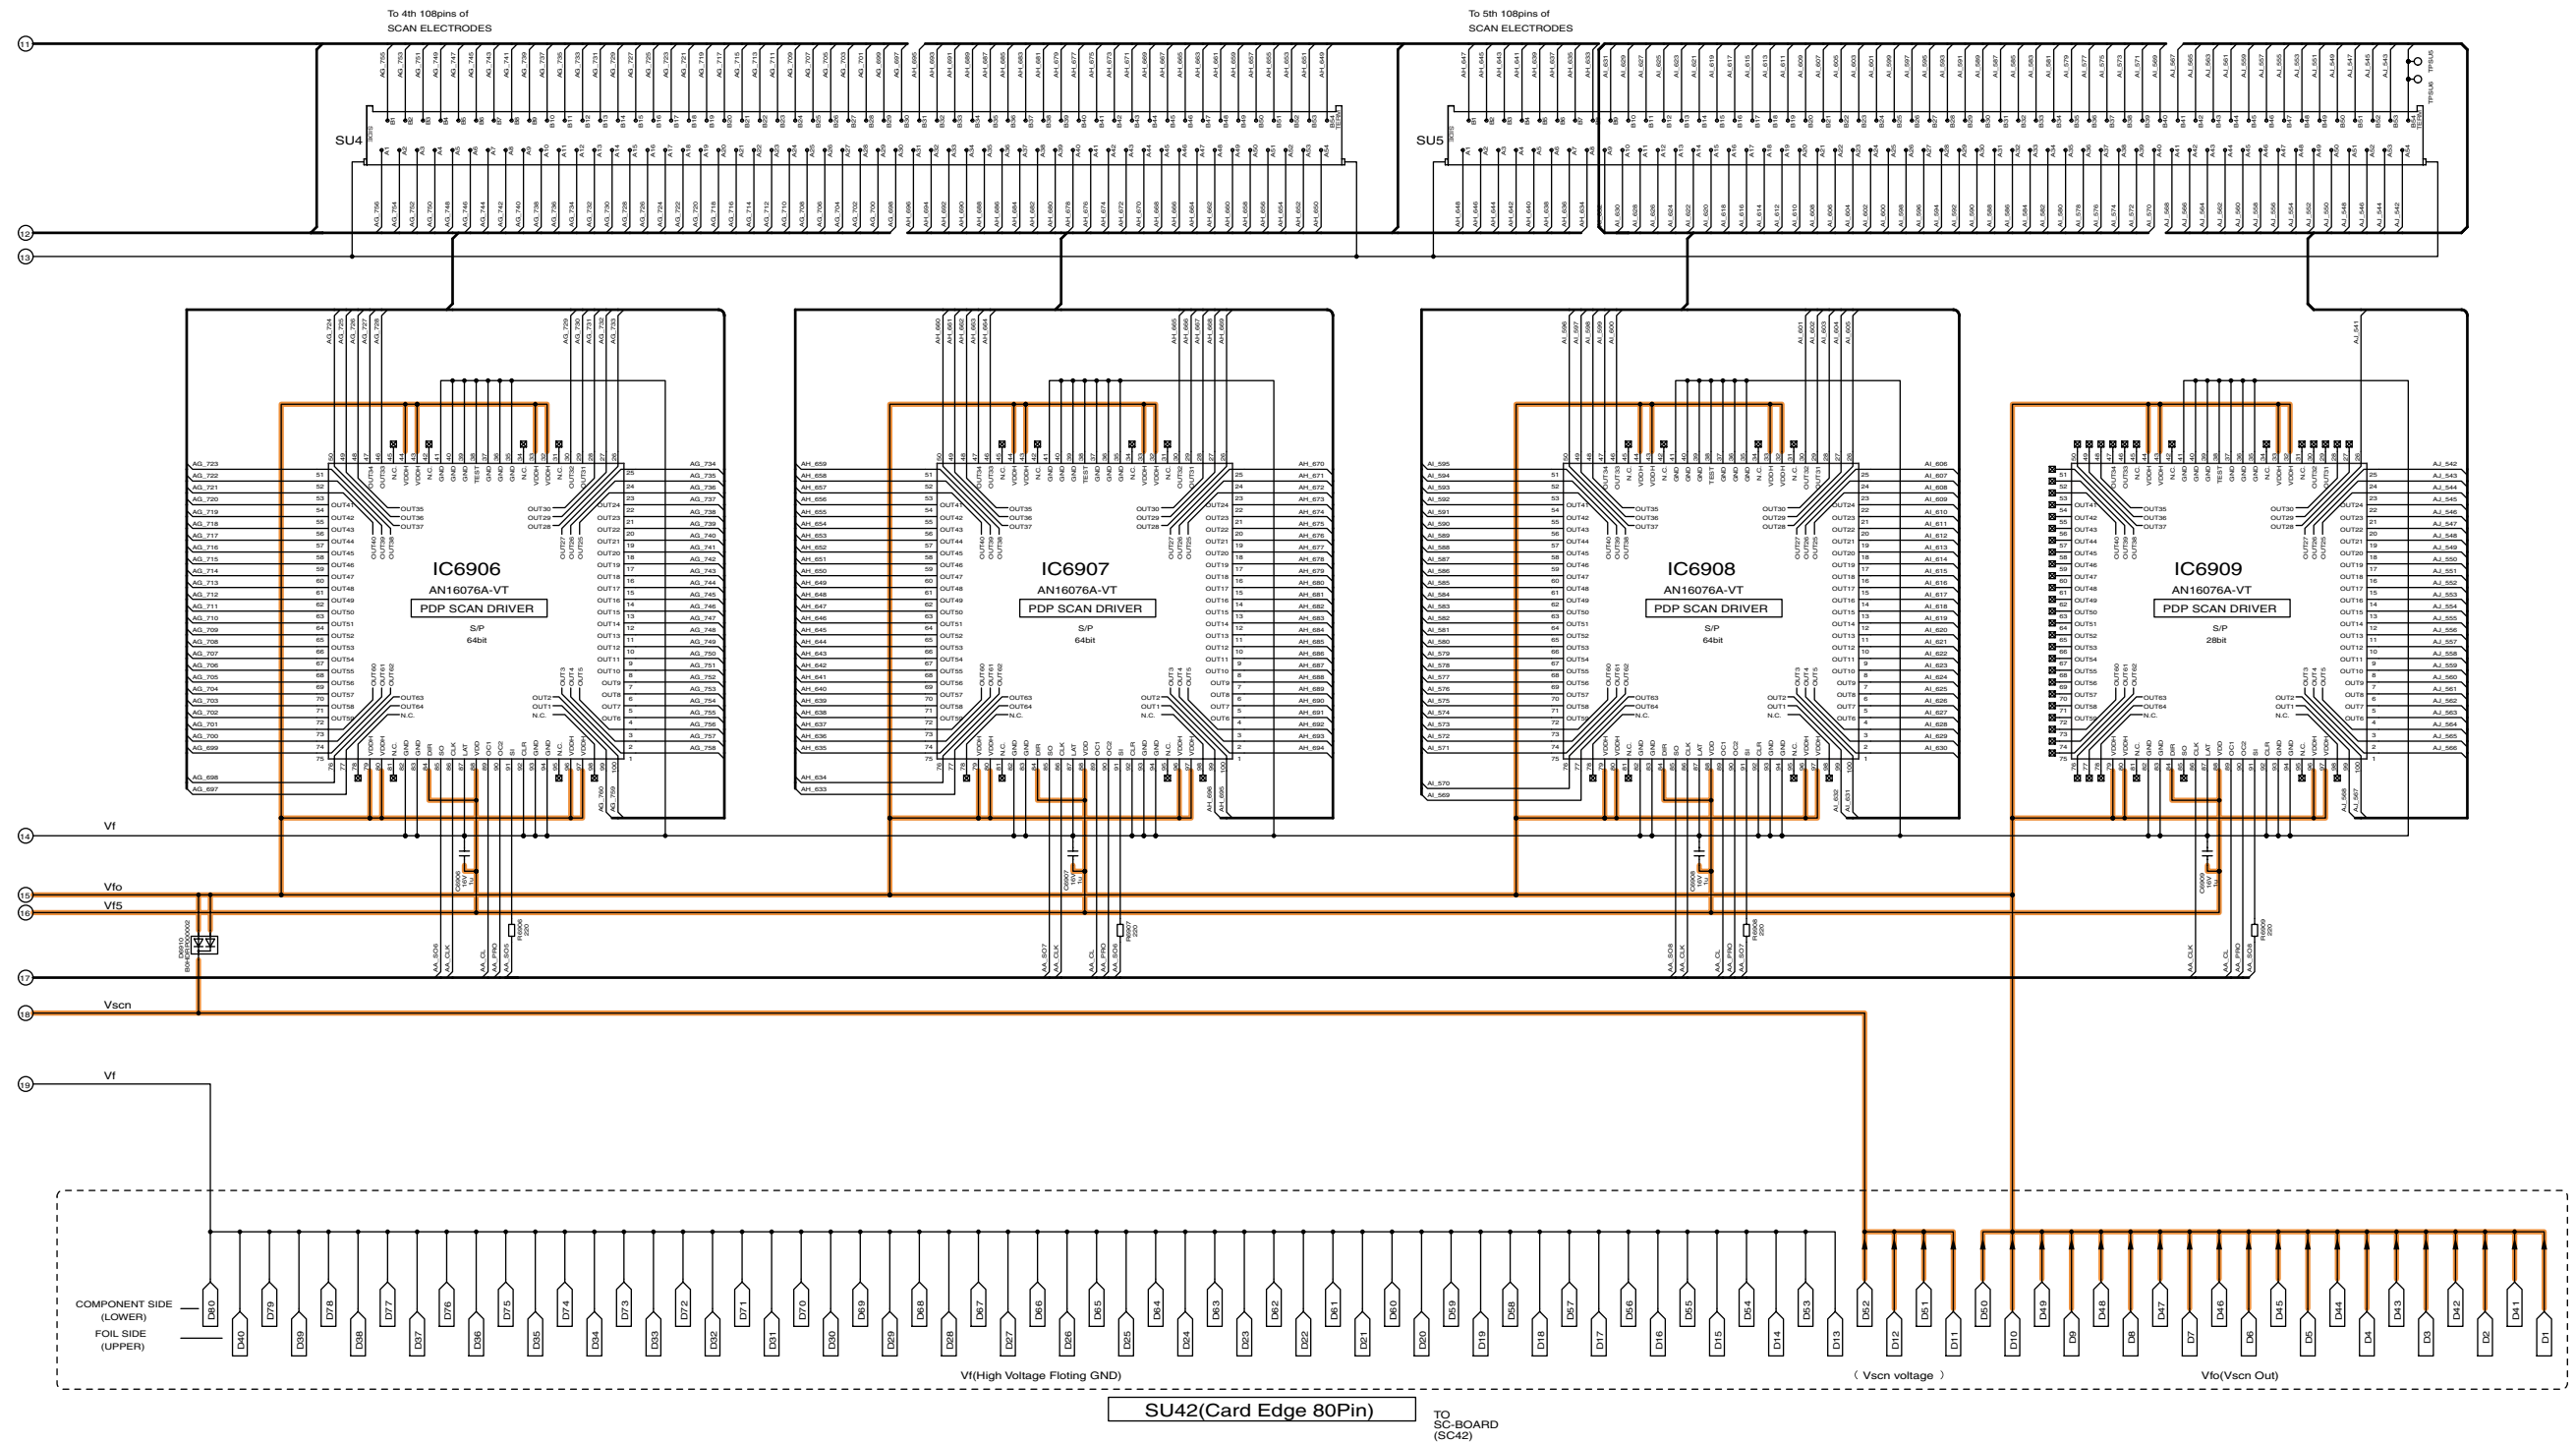

TH-58PY700AZ/M/MR, PZ700A
SU-Board (3 of 3) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
SU-Board (3 of 3) Schematic Diagram

19

20

21

22

23

24

25


26

27

15.77. SD-Board (1 of 3) Schematic Diagram

A
B
C
D
E
F

SD-BOARD TNPA4001AB (1/3)

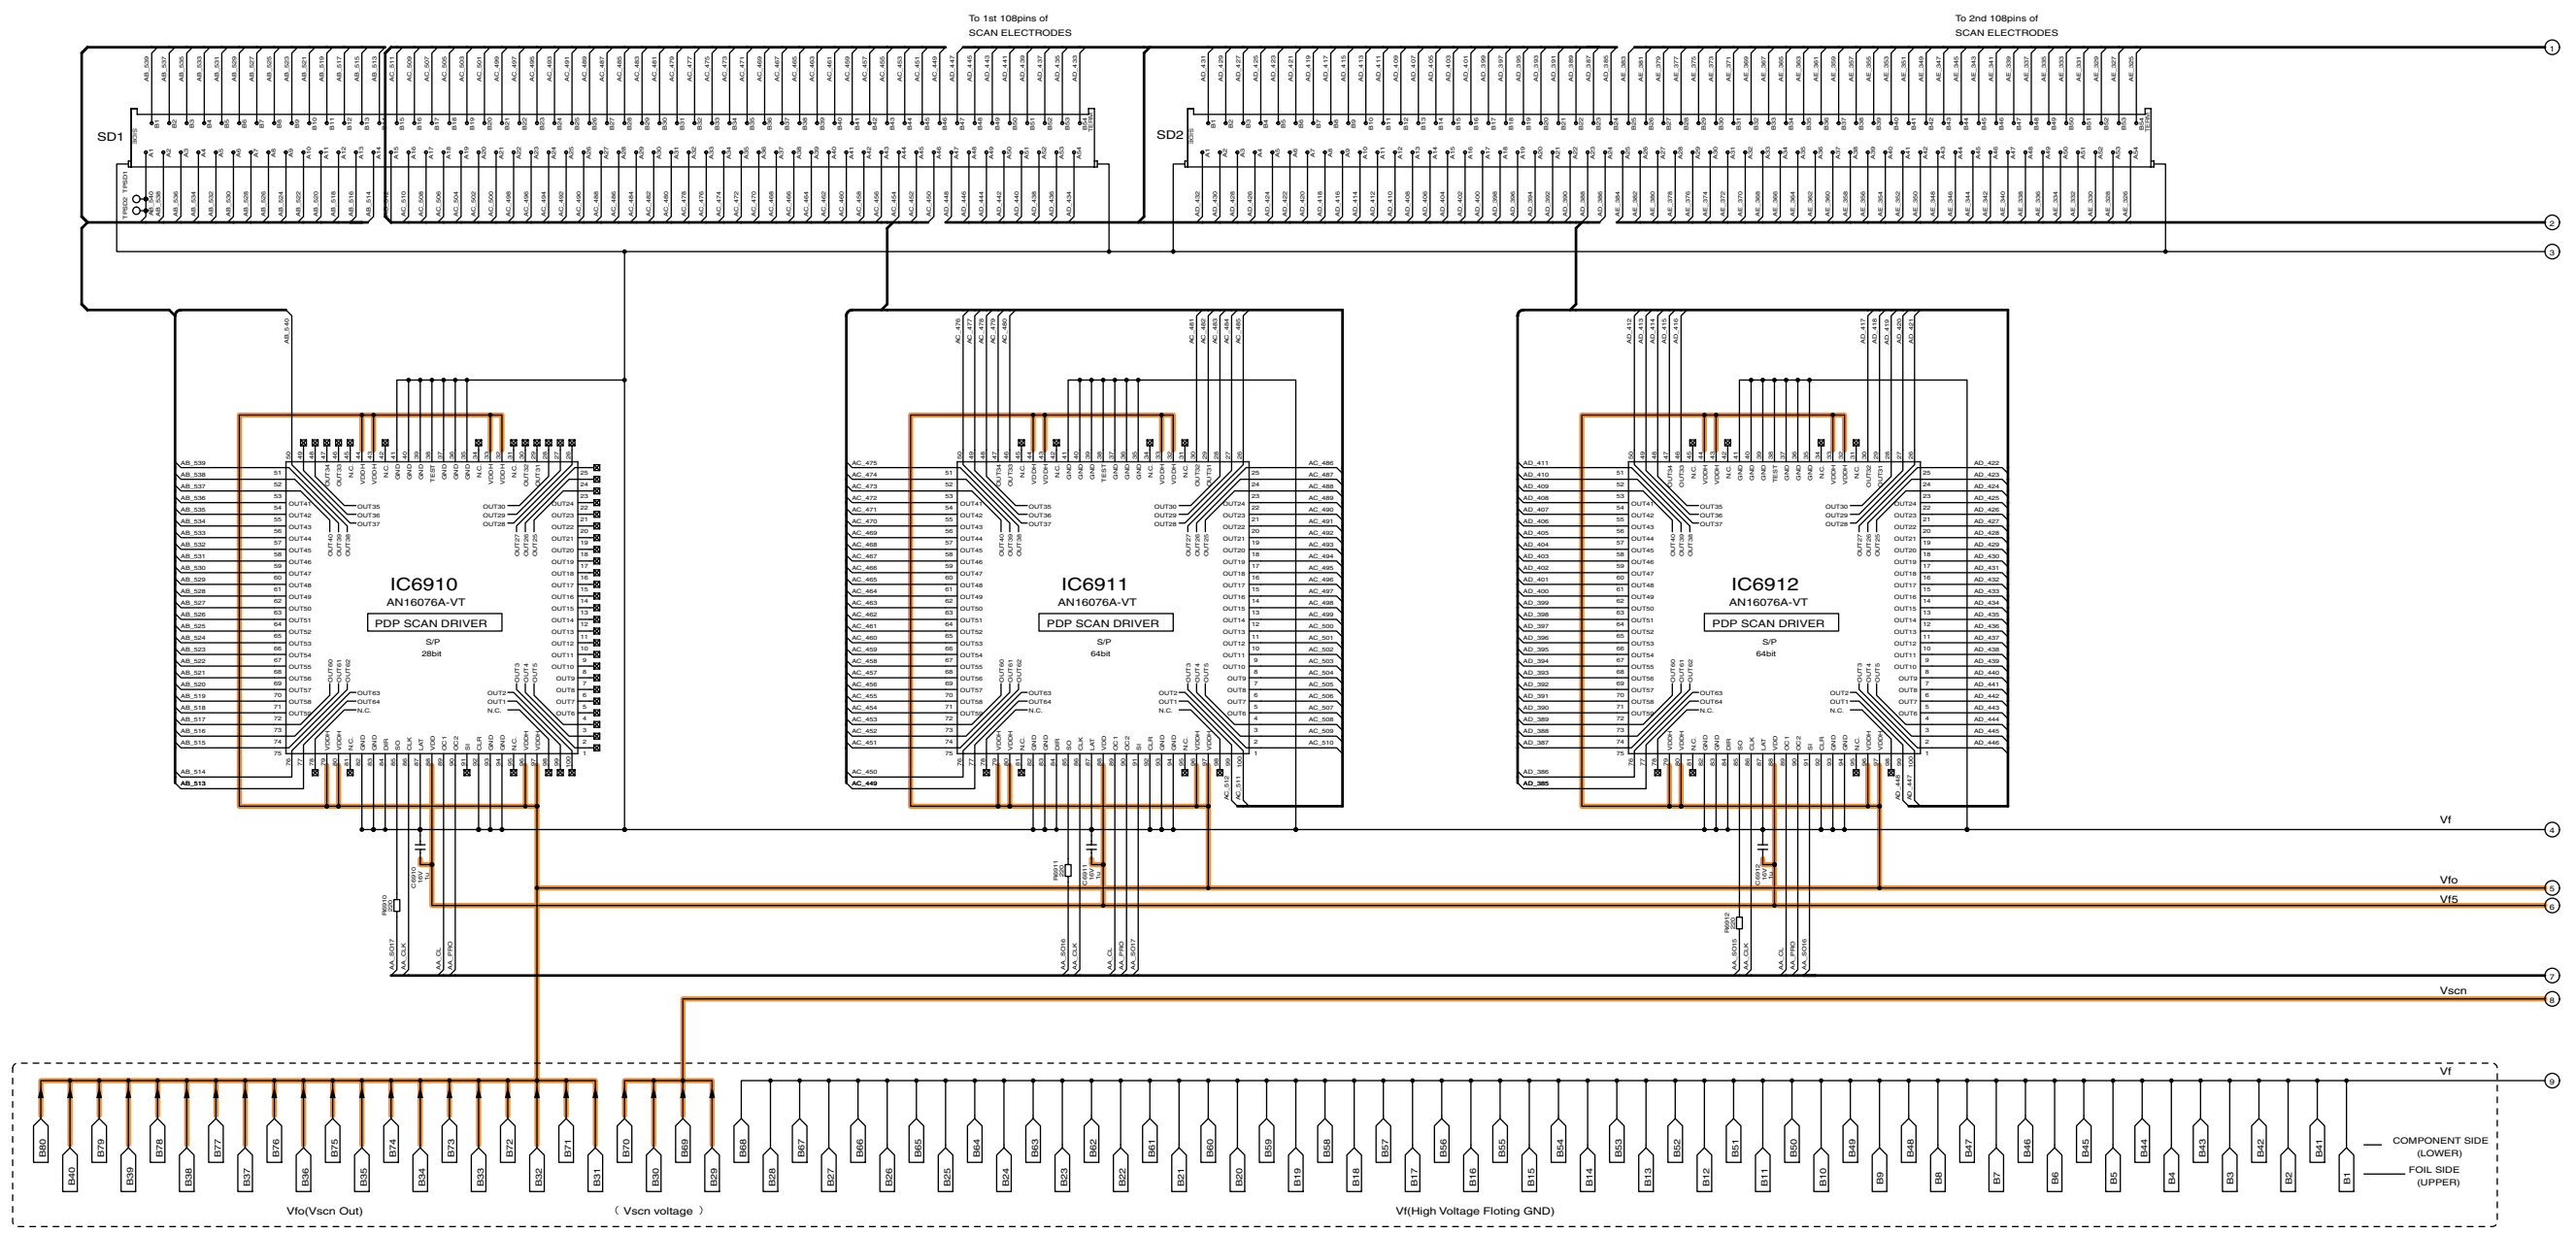


TH-58PY700AZ/M/MR, PZ700A
SD-Board (1 of 3) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
SD-Board (1 of 3) Schematic Diagram

1 2 3 4 5 6 7 8 9

15.78. SD-Board (2 of 3) Schematic Diagram

⚠ SD-BOARD TNPA4001AB (2/3)

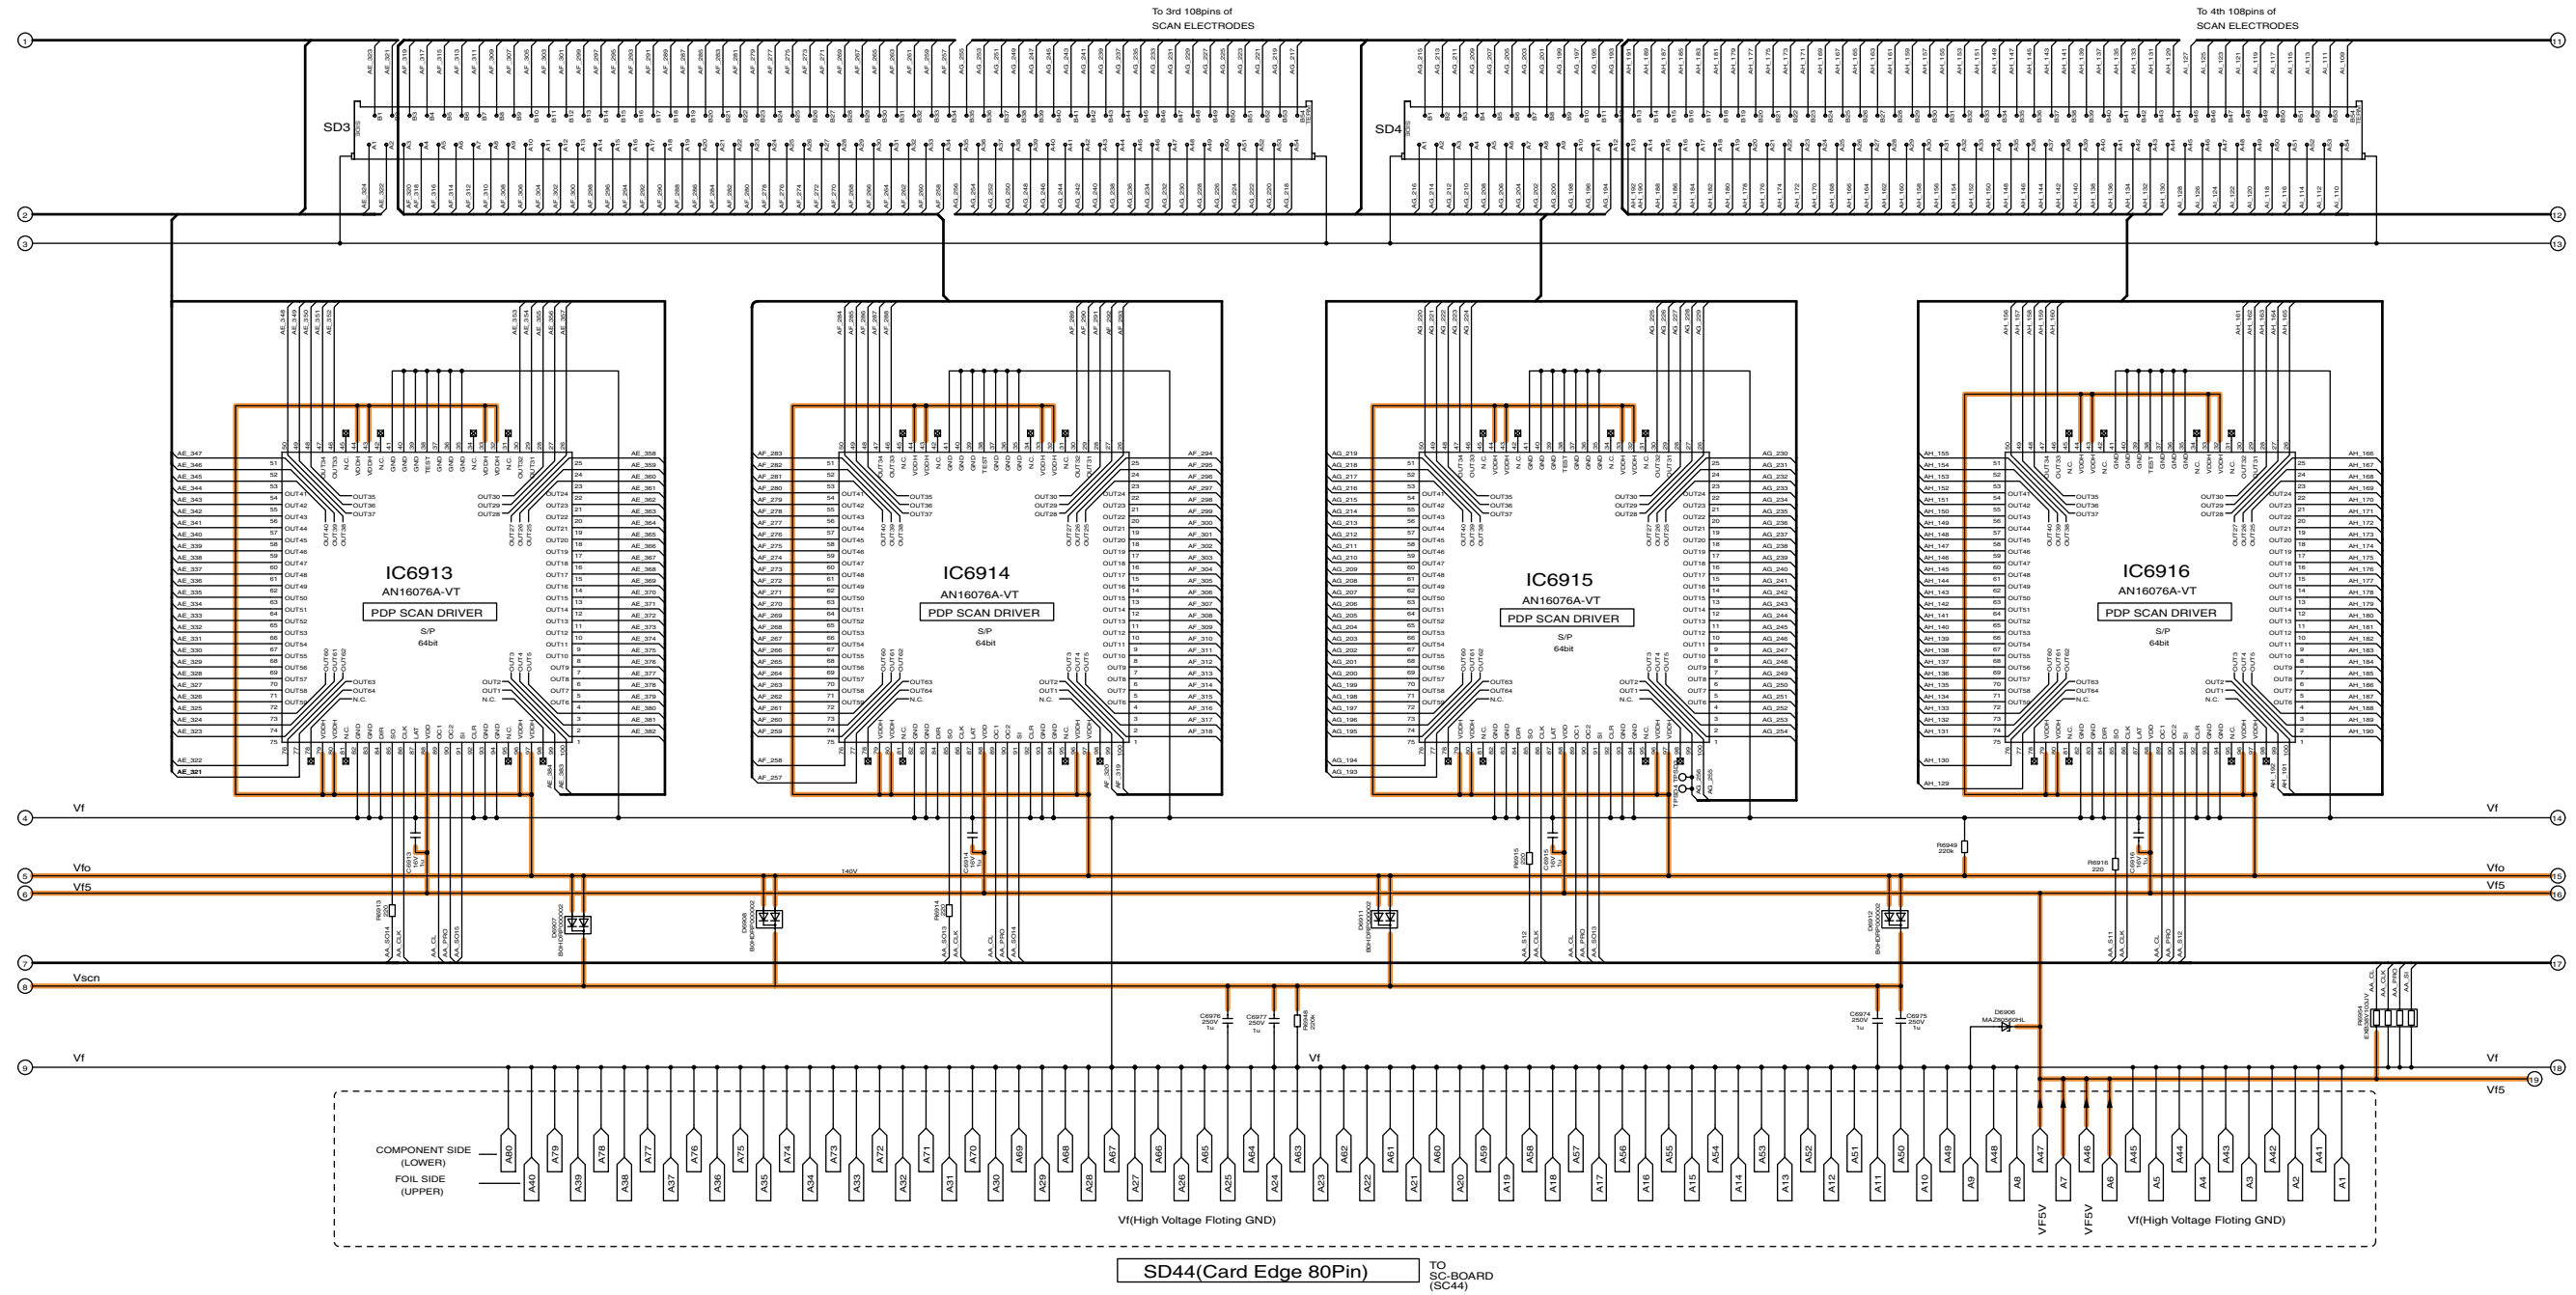


TH-58PY700AZ/M/MR, PZ700A
SD-Board (2 of 3) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
SD-Board (2 of 3) Schematic Diagram

10 11 12 13 14 15 16 17 18

15.79. SD-Board (3 of 3) Schematic Diagram

SD-BOARD TNPA4001AB (3/3)

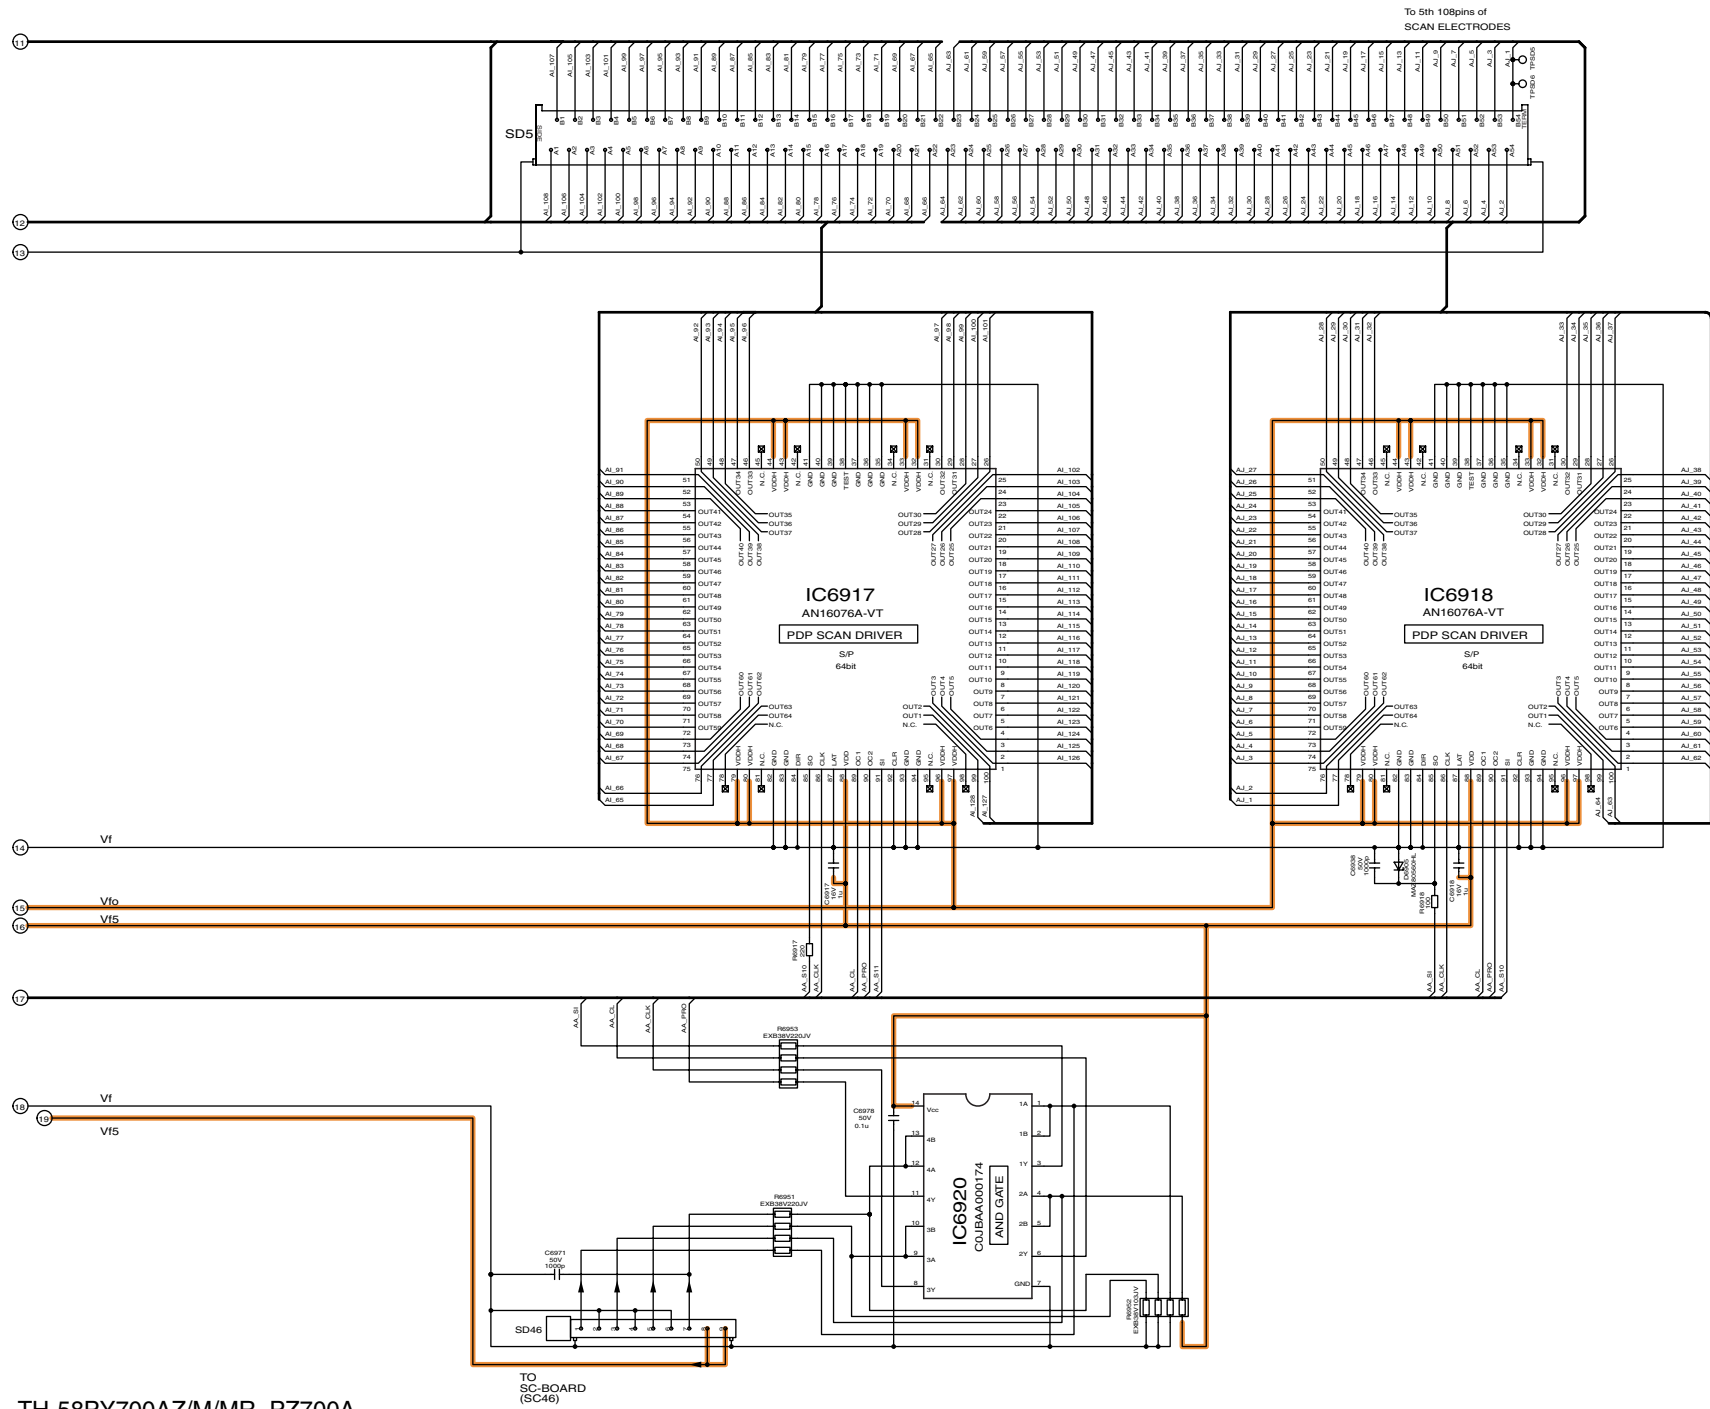

TH-58PY700AZ/M/MR, PZ700A
SD-Board (3 of 3) Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A
SD-Board (3 of 3) Schematic Diagram

19

20

21

22

23


24

25

26

27


15.80. SS, SS2 and SS3-Board Block Diagram

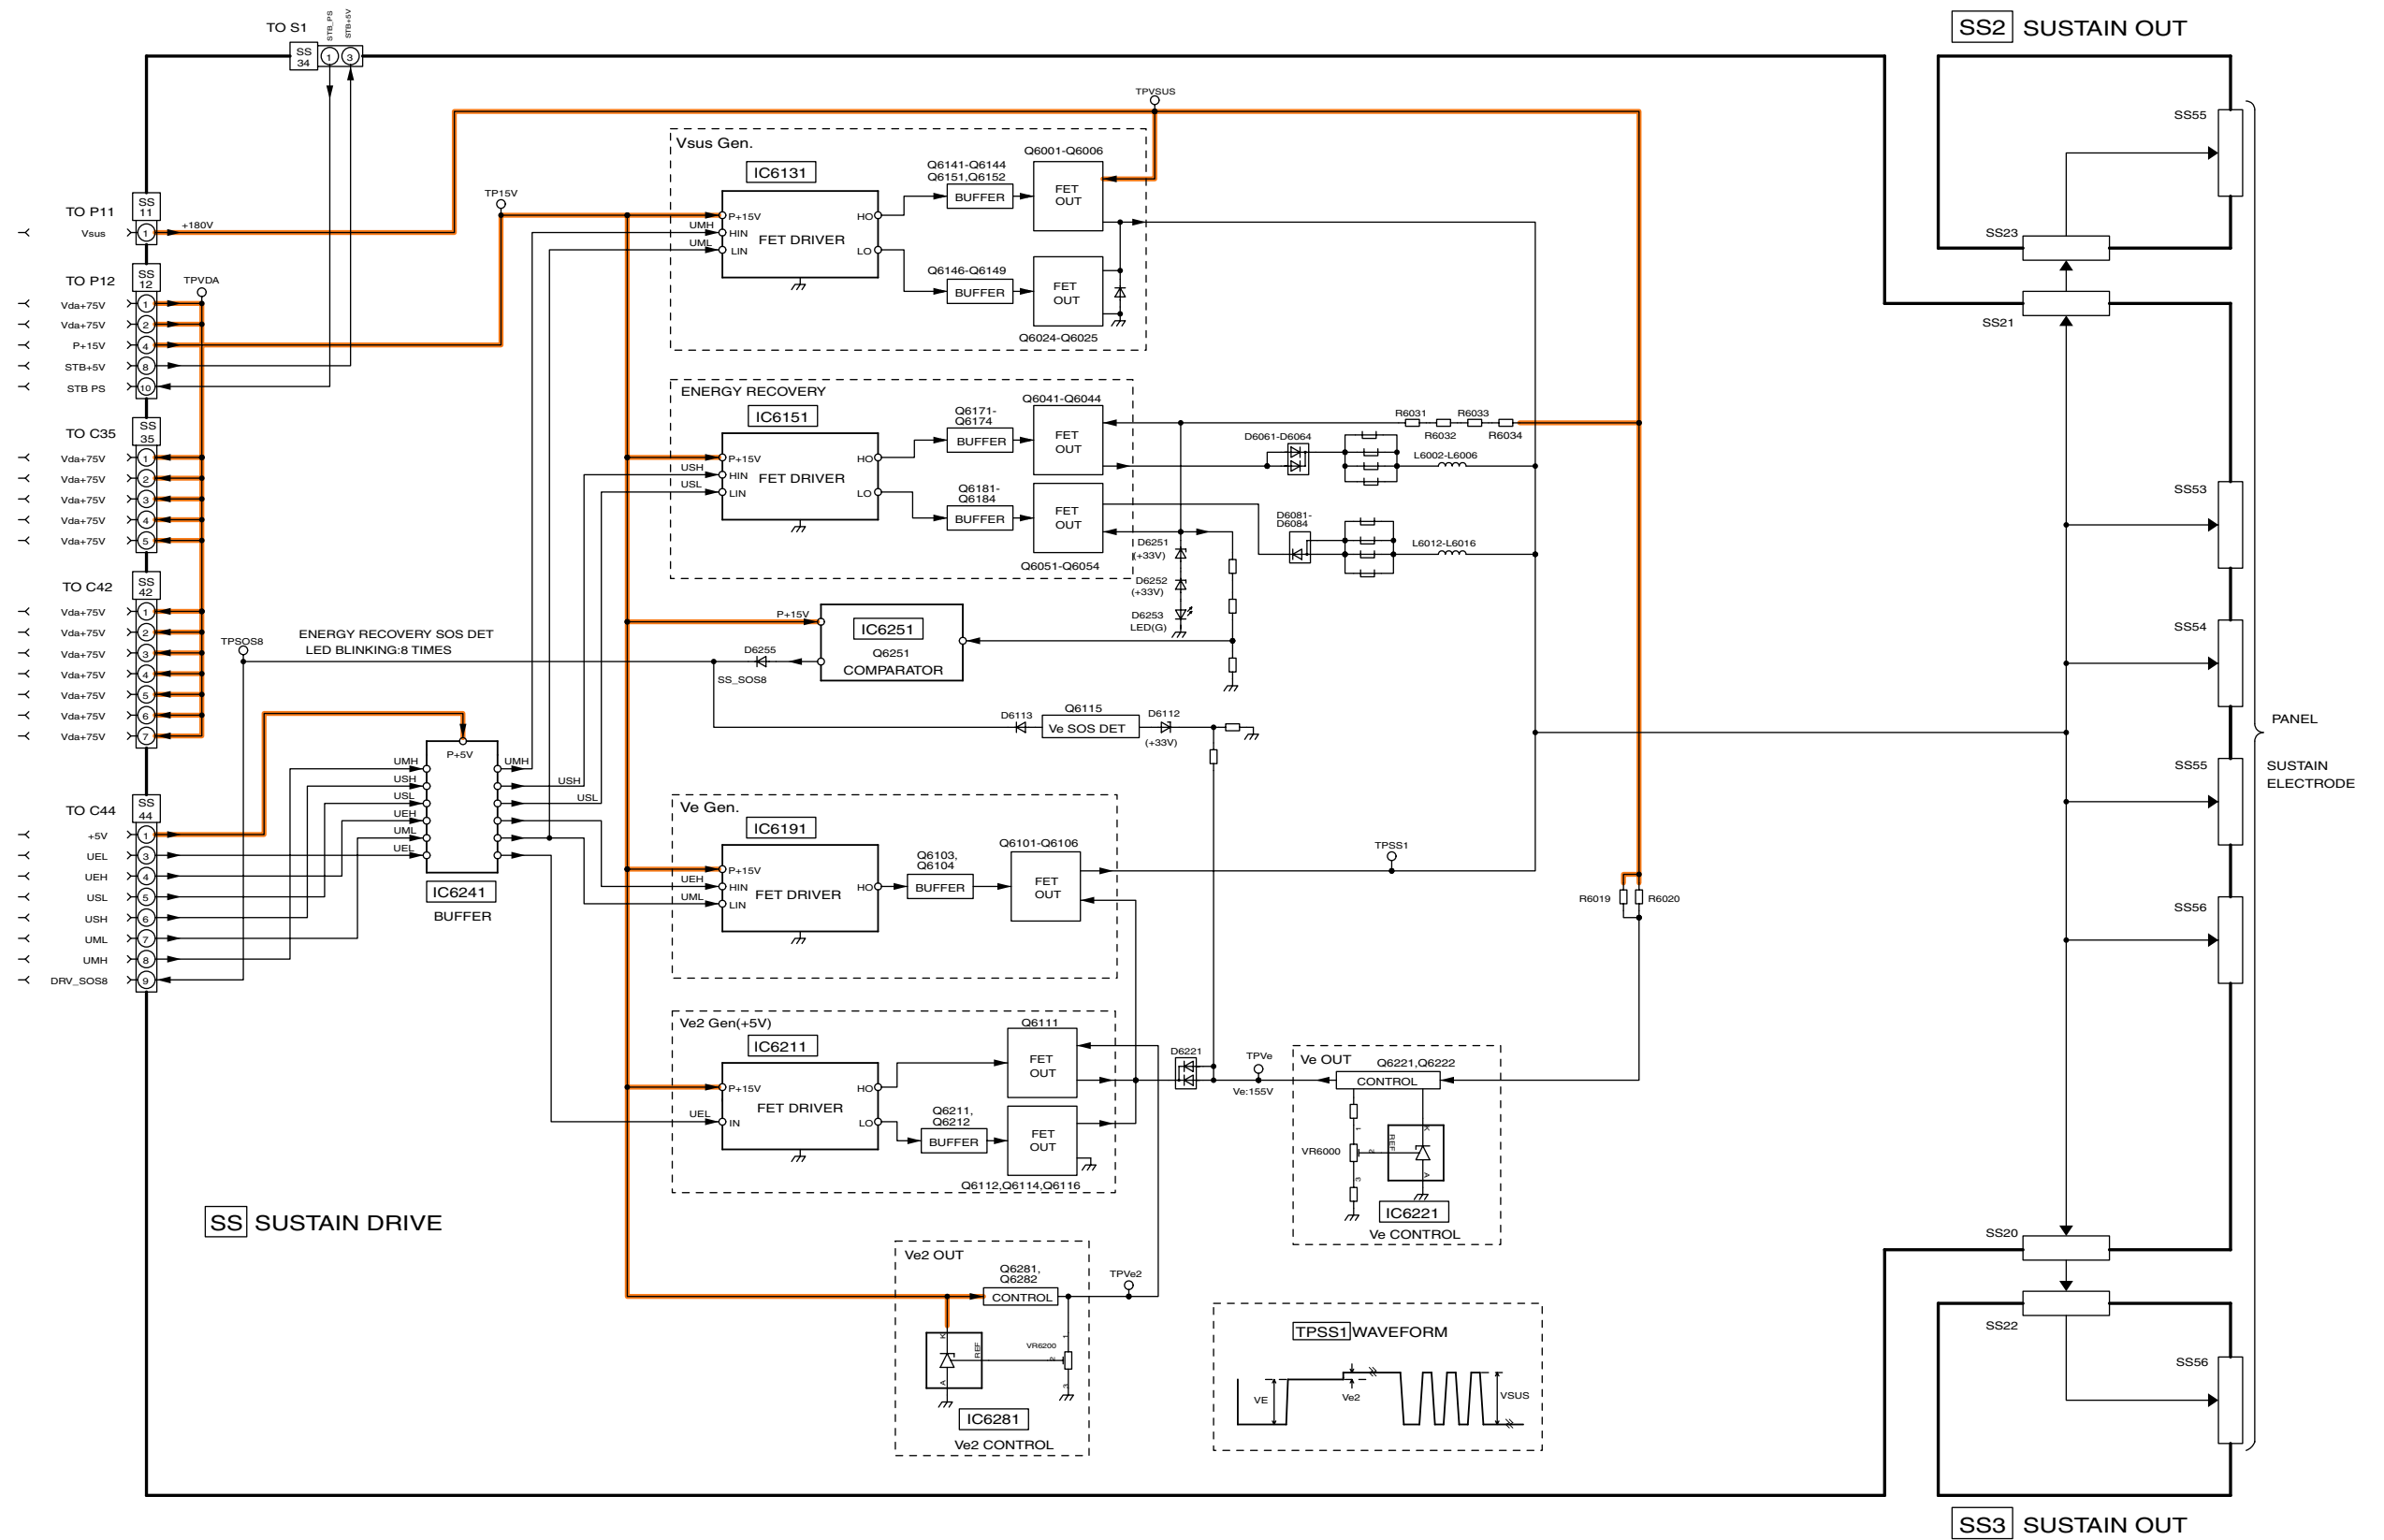

TH-58PY700AZ/M/MR, PZ700A
SS, SS2 and SS3-Board Block Diagram

TH-58PY700AZ/M/MR, PZ700A
SS, SS2 and SS3-Board Block Diagram

15.82. SS-Board (2 of 2), SS2 and SS3 Schematic Diagram

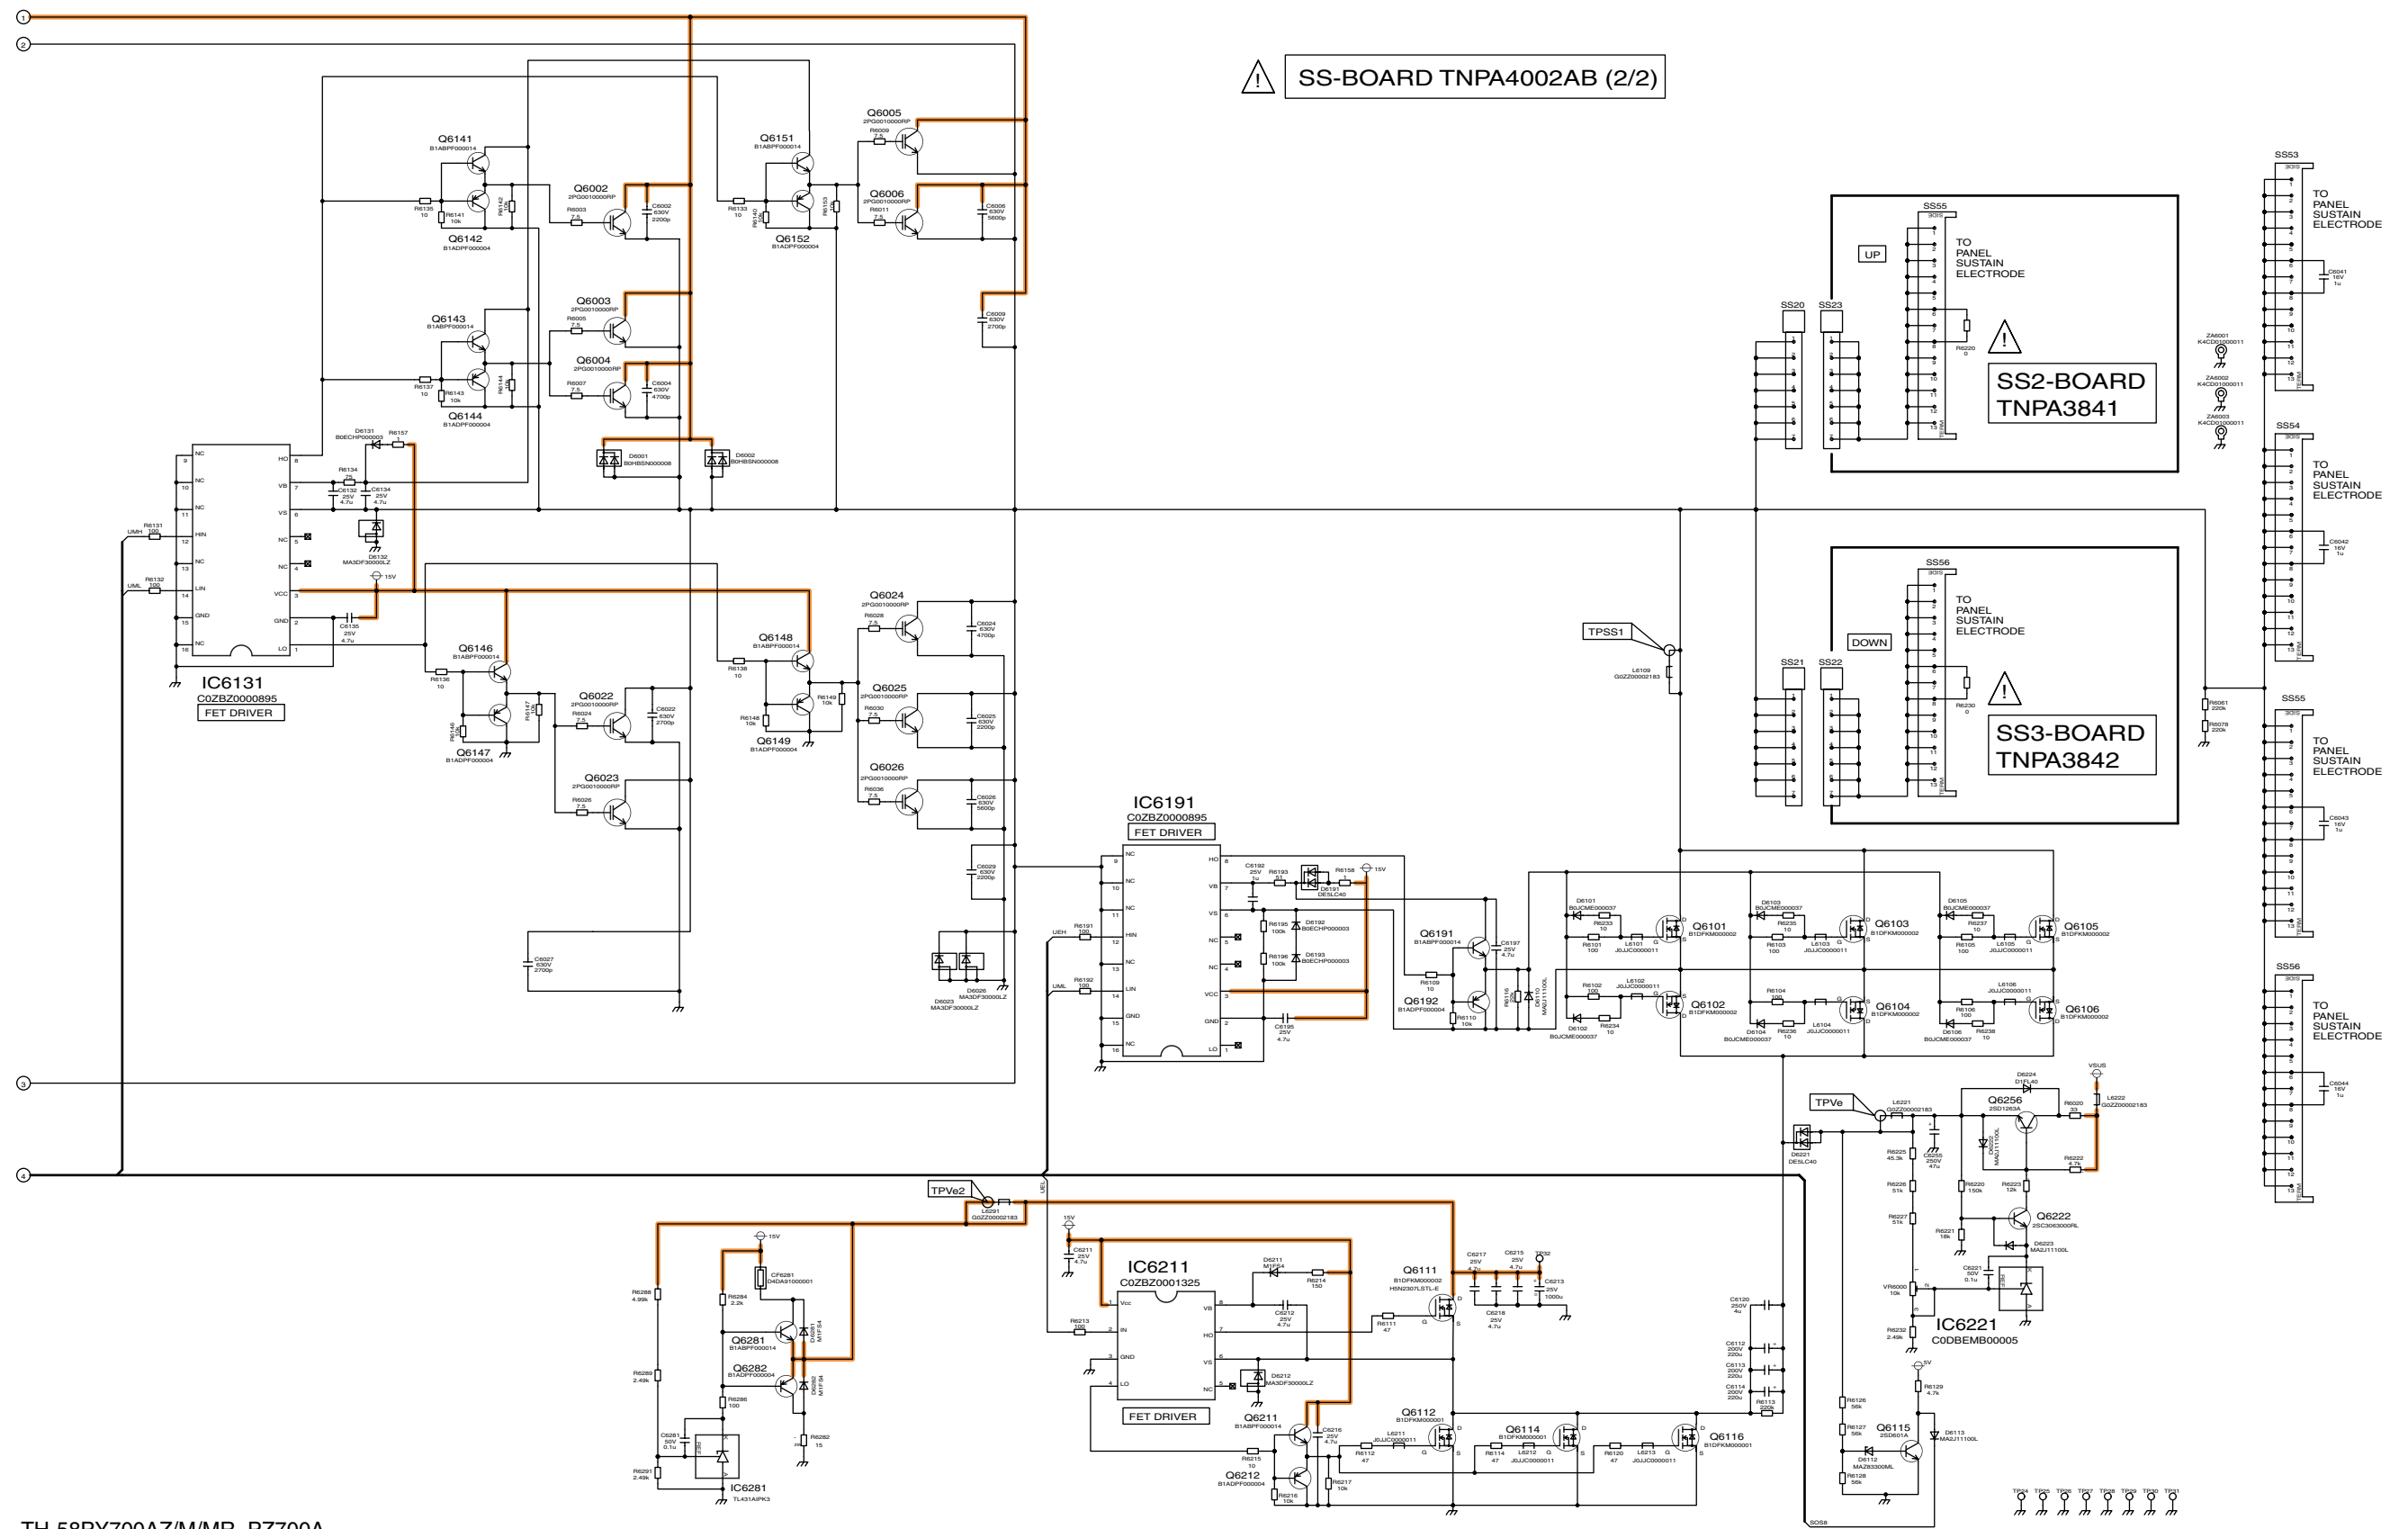

TH-58PY700AZ/M/MR, PZ700A
SS-Board (2 of 2), SS2 and SS3 Schematic Diagram

TH-58PY700AZ/M/MR, PZ700A SS-Board (2 of 2), SS2 and SS3 Schematic Diagram

10

11

12

13

14

15


16

17


18

16 Exploded Views & Replacement Parts List



16.1. Exploded Views

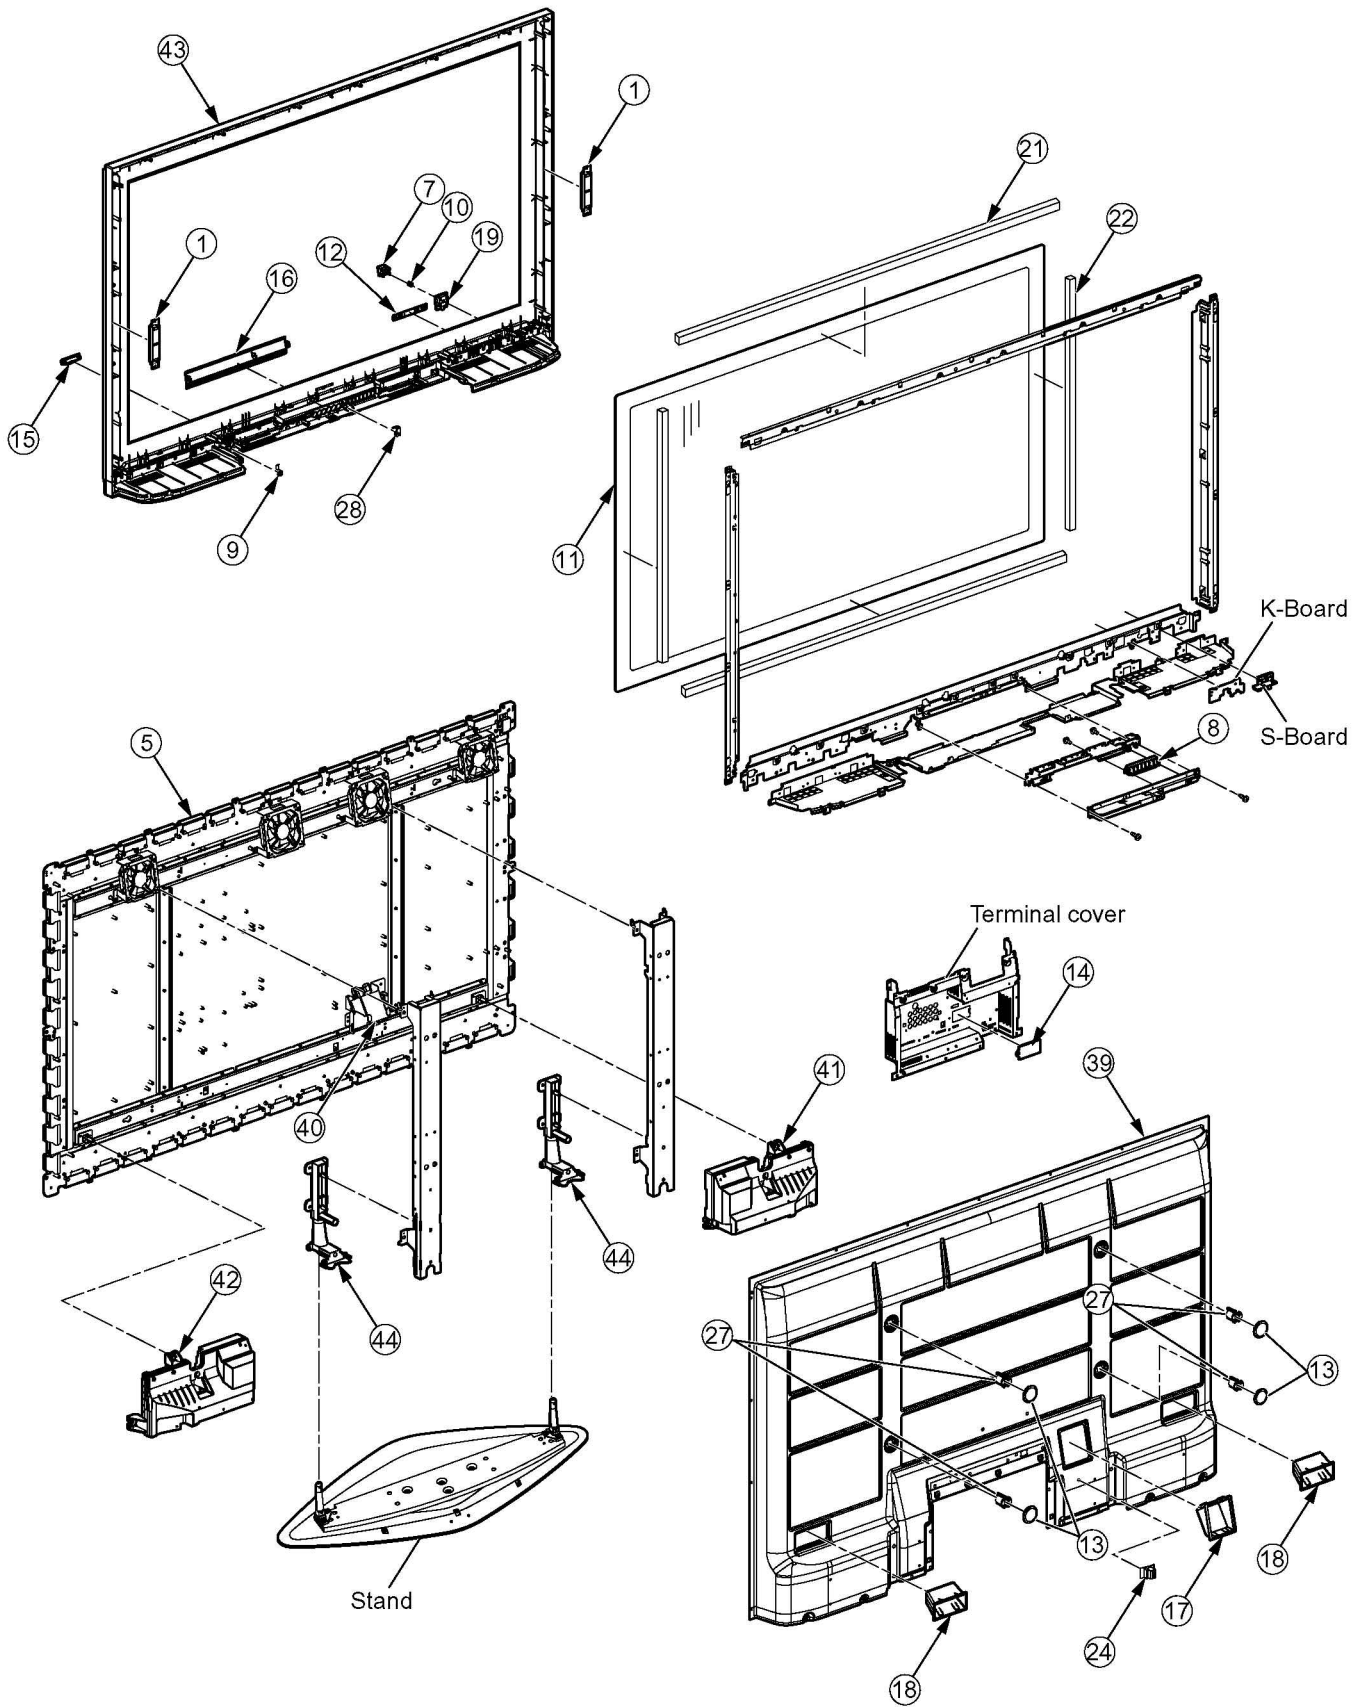


16.2. Fan Exploded Views

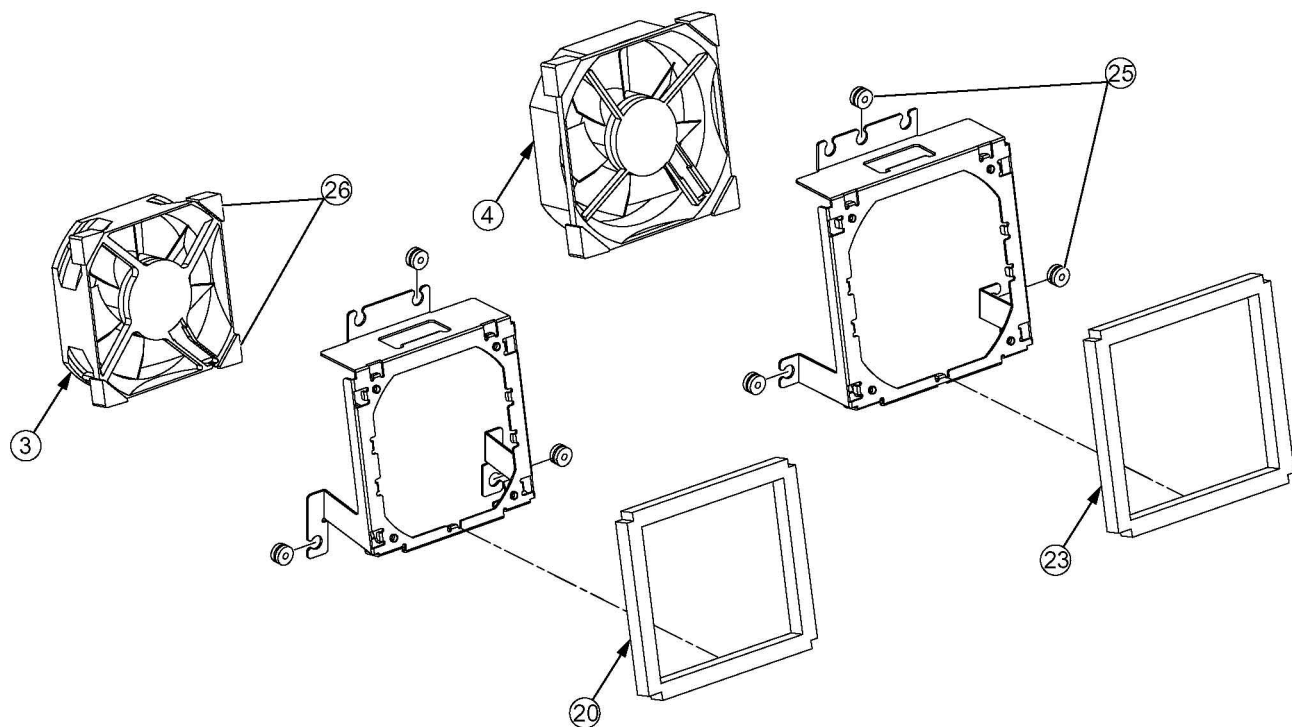


16.3. Packing Exploded Views (1)

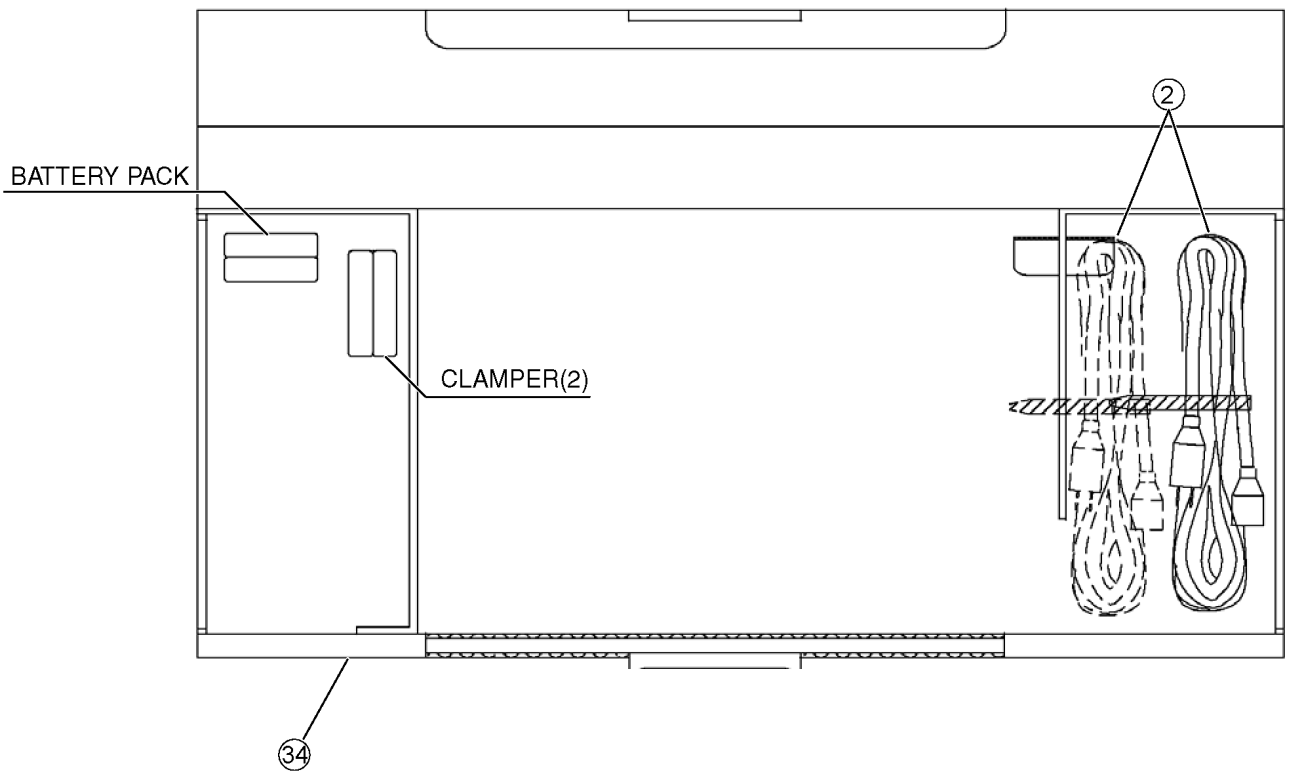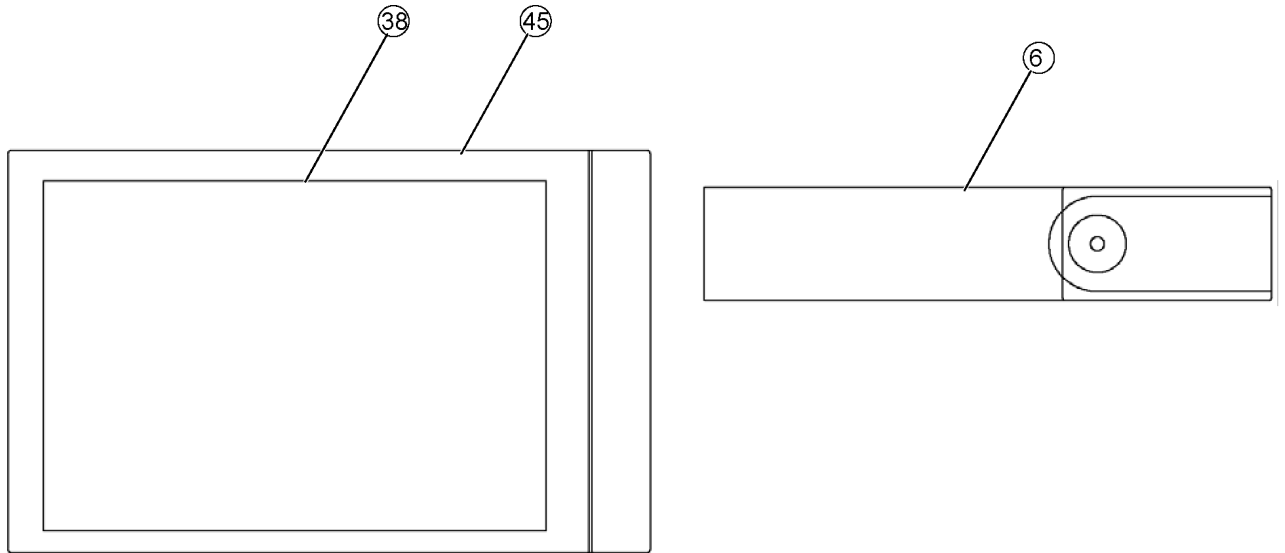

16.4. Packing Exploded Views (2)

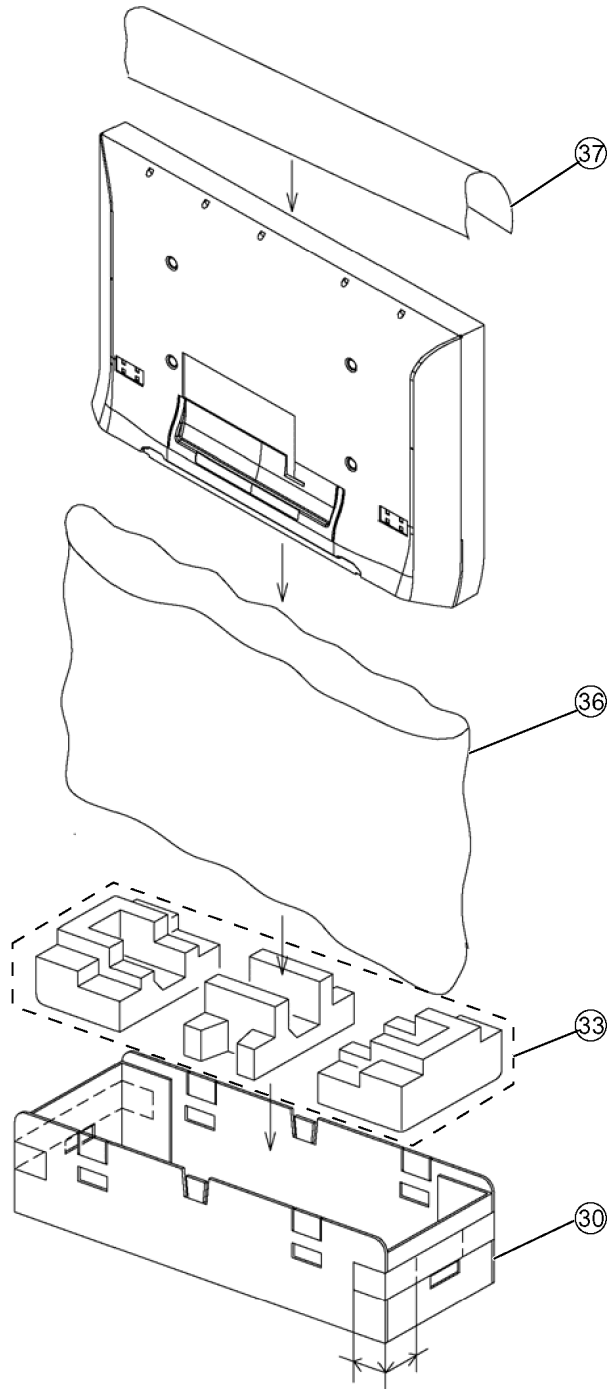

16.5. Packing Exploded Views (3)

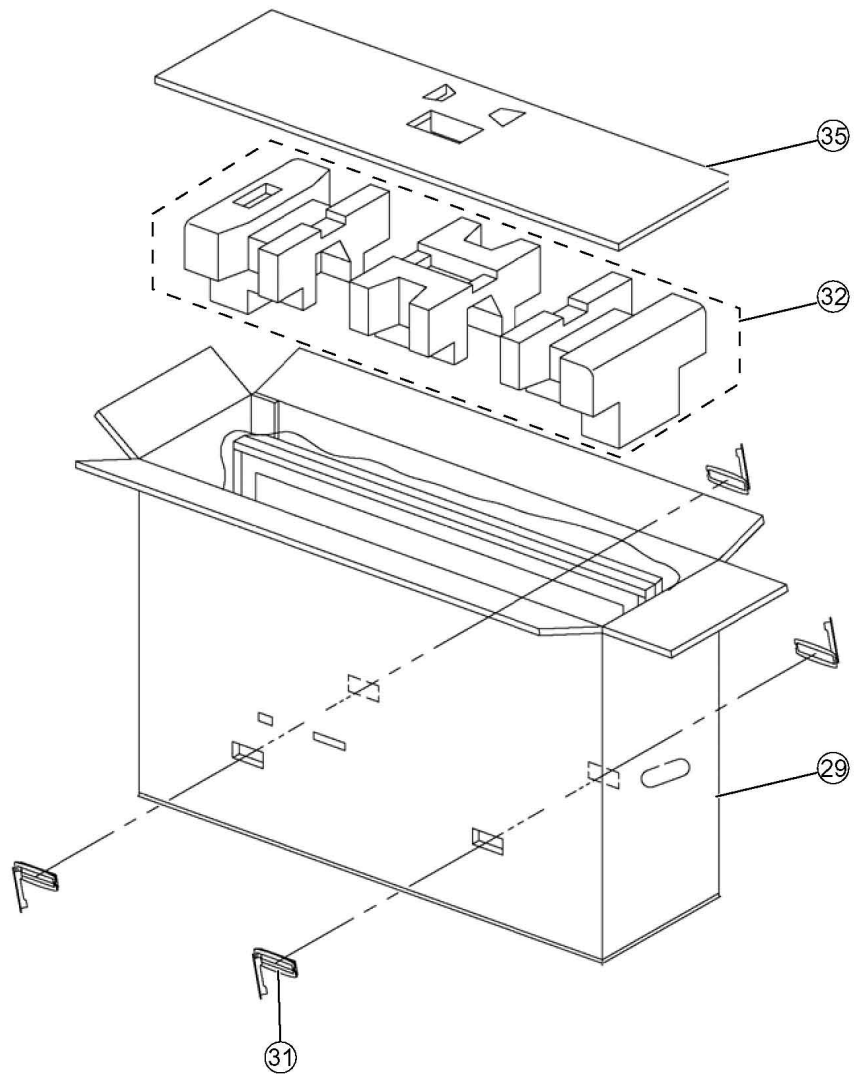

16.6. Replacement Parts List Notes

Important Safety Notice

Components identified by \triangle mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 \underline{C} 100KOHM, \underline{J} , 1/4W
 Type Allowance

2. Capacitor

Example:

ECKF1H103ZF \underline{C} 0.01UF, \underline{Z} , 50V
 Type Allowance

| Type | Allowance |
|-------------------------------|----------------|
| C : Carbon | F : $\pm 1\%$ |
| F : Fuse | G : $\pm 2\%$ |
| M : Metal Oxide Metal Film | J : $\pm 5\%$ |
| S : Solid | K : $\pm 10\%$ |
| W : Wire Wound | M : $\pm 20\%$ |

| Type | Allowance |
|------------------|-------------------------|
| C : Ceramic | C : $\pm 0.25\text{pF}$ |
| E : Electrolytic | D : $\pm 0.5\text{pF}$ |
| P : Polyester | F : $\pm 1\text{pF}$ |
| Polyprop | G : $\pm 3\text{pF}$ |
| lene | J : $\pm 5\text{pF}$ |
| T : Tantalum | K : $\pm 10\text{pF}$ |
| | L : $\pm 15\text{pF}$ |
| | M : $\pm 20\text{pF}$ |
| | P : +100%, -0% |
| | Z : +80%, -20% |

16.7. Mechanical Replacement Parts List

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| 1 | EAS10D85E | SPEAKER (LEFT/RIGHT) | 2 | |
| | J2ZZ00000036 | RF CABLE | 1 | AZ/M |
| | J2ZZ00000083 | RF CABLE | 1 | A |
| | K1ZZ00001424 | 3 PIECE CONNECTOR PLUG | 1 | |
| 2 | K2CK3DH00029 | AC CORD | 1 | A/AZ △ |
| 2 | K2CN3DH00006 | AC CORD | 1 | M/MR △ |
| 2 | K2CT3DH00025 | AC CORD | 1 | M △ |
| 3 | L6FAYYYH0050 | FAN UNIT (80MM) | 1 | |
| 4 | L6FAYYYH0052 | FAN UNIT (92MM) | 2 | |
| 5 | MD58F09A1J | PLASMA DISPLAY PANEL | 1 | △ |
| 6 | N2QAYB000120 | REMOTE CONTROL | 1 | AZ/M/MR |
| 6 | N2QAYB000122 | REMOTE CONTROL | 1 | A |
| 7 | TBXA51103 | POWER BUTTON | 1 | |
| 8 | TBXA51202 | CONTROL BUTTON | 1 | |
| 9 | TESA297 | SD DOOR SPRING | 1 | |
| 10 | TESD078 | BUTTON SPRING | 1 | |
| | THEL0429 | SCREW | 29 | |
| | THEL047J | SCREW (HDMI :2) | 2 | |
| | THTA0419 | HOOK SCREW | 1 | |
| | THTA0419 | HOOK SCREW | 1 | |
| | THTD013N | SCREW | 9 | |
| | THTF011N | SCREW | 178 | |
| 11 | TKGA5392 | FRONT GLASS | 1 | |
| 12 | TKKC5272 | LED PANEL | 1 | |
| 13 | TKKL5231-3 | M8 SPACER CAP | 4 | |
| 14 | TKKL5383 | ADJUSTMENT COVER | 1 | |
| 15 | TKPB06403 | SD DOOR | 1 | |
| 16 | TKPB06902 | BOTTOM DOOR | 1 | |
| 17 | TKPB13901 | INLET COVER | 1 | |
| | TKRA52102 | BLIND CAP | 2 | |
| 18 | TKRA52502 | REAR COVER HANDLE | 2 | |
| 19 | TKXA22201 | POWER BUTTON BRACKET | 1 | |
| 20 | TMKG669 | FAN SPONGE | 1 | |
| 21 | TMKG683 | CUSHION (UPPER/BOTTOM) | 2 | |
| 22 | TMKG684 | CUSHION (LEFT/RIGHT) | 2 | |
| 23 | TMKG685 | SPONGE | 2 | |
| | TMKY276 | SCREW HOLE COVER | 1 | |
| | TMM17499 | CLAMPER | 1 | |
| | TMM6428-1 | CLAMPER | 4 | |
| | TMM7464-2 | CLAMPER | 1 | |
| | TMM7464-2 | CLAMPER | 1 | |
| | TMME047 | CLAMPER | 1 | |
| | TMME084 | CLAMPER | 1 | |
| | TMME190 | CLAMPER | 21 | |
| 24 | TMME226 | AC CORD CLAMPER | 1 | |
| | TMME258 | CABLE CLAMPER | 2 | |
| | TMME260 | CLAMPER | 10 | |
| | TMME261 | CLAMPER | 1 | |
| | TMME285 | CLAMPER | 2 | |
| | TMME287 | CLAMPER | 7 | |
| | TMME292 | CLAMPER | 21 | |
| | TMME293 | CLAMPER | 1 | |
| | TMME305 | CLAMPER | 2 | |
| | TMME305 | CLAMPER | 1 | |
| | TMME308 | CLAMPER (RF-CABLE) | 1 | A |
| 25 | TMMJ068 | RUBBER (FAN) | 9 | |
| 26 | TMMJ082 | SPONGE (FAN CORNER) | 12 | |
| 27 | TMMX142 | M8 SPACER | 4 | |
| 28 | TMMX186 | DOOR SPRING | 1 | |
| 29 | TPCC24201 | CARTON BOX TOP | 1 | A |
| 29 | TPCC24401 | CARTON BOX TOP | 1 | AZ |
| 29 | TPCC24402 | CARTON BOX TOP | 1 | M |
| 29 | TPCC24403 | CARTON BOX TOP | 1 | MR |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|---|-----|-----------|
| 30 | TPCC24501 | CARTON BOX BOTTOM | 1 | |
| 31 | TPD169487 | JOINT | 4 | |
| 32 | TPDA1572 | CUSHION TOP | 1 | |
| 33 | TPDA1573 | CUSHION BOTTOM | 1 | |
| 34 | TPDF1902 | ACCESSORIES BOX | 1 | |
| 35 | TPDF1978 | PAD TOP | 1 | |
| 36 | TPEH246 | PROTECT COVER | 1 | |
| 37 | TPEH273 | TOP PROTECT SHEET | 1 | |
| 38 | TQBC2207 | INSTRUCTION BOOK (ENGLISH) | 1 | AZ △ |
| 38 | TQBC2208 | INSTRUCTION BOOK (ENGLISH) | 1 | M/MR △ |
| 38 | TQBC2209 | INSTRUCTION BOOK (ARABIA) | 1 | M/MR △ |
| 38 | TQBC2224 | INSTRUCTION BOOK (PERSIAN) | 1 | MR △ |
| 38 | TQBC2231 | INSTRUCTION BOOK (ENGLISH) | 1 | A △ |
| | TSXL519 | CABLE (C11-C22/C52-C61) | 2 | |
| | TSXL555 | CABLE (C21-C31/C41-C51) | 2 | |
| | TSXL564 | CABLE (D34-C55/D35-C54/D36-C60/D31-C10/D32-C24/D33-C25) | 6 | |
| | TSXL616 | CABLE (DG11-GH11) | 1 | |
| 39 | TTUA1689 | REAR COVER | 1 | A △ |
| 39 | TTUA1690 | REAR COVER | 1 | AZ △ |
| 39 | TTUA1691 | REAR COVER | 1 | M △ |
| 39 | TTUA1692 | REAR COVER | 1 | MR △ |
| 40 | TXAJS01HGTB | AC INLET ASSY | 1 | △ |
| 41 | TXFAB01HGTU | SPEAKER BOX ASSY (LEFT) | 1 | |
| 42 | TXFAB02HGTU | SPEAKER BOX ASSY (RIGHT) | 1 | |
| 43 | TXFKY01HGTA | CABINET ASSY | 1 | A △ |
| 43 | TXFKY01HGTM | CABINET ASSY | 1 | AZ/M/MR △ |
| | TXFMX01EVTJ | CORE ASSY | 1 | |
| | TXFMX01GZTJ | CORE ASSY | 1 | |
| 44 | TMZX5070-1 | STAND BLOCK | 2 | |
| | TXJH11HGTB | SPEAKER LEAD (H11-SP) | 1 | |
| | TXJH12HGTB | SPEAKER LEAD (H12-SP) | 1 | |
| | XTB4+12GFJ | SCREW | 42 | |
| | XTB4+12GFJK | SCREW | 8 | |
| | XTB4+12GFJK | SCREW | 17 | |
| | XTB4+16GFJ | SCREW | 2 | |
| | XTV3+10JFJK | SCREW | 4 | |
| | XTW3+10TFJ | SCREW | 2 | |
| | XTWT4+Z15DFJ | SCREW (SP BOX) | 2 | |
| | XYN3+F10FJ | SCREW | 1 | |
| | XYN3+F8FJ | SCREW | 52 | |
| | XYN3+J12FJ | SCREW | 56 | |
| | XYN3+J6FJ | SCREW | 1 | |
| | XYN3+J8FJ | SCREW | 3 | |
| | XYN4+E8FJ | SCREW | 1 | |
| | XYN4+F10FJ | SCREW | 14 | |
| | XYN5+C15FJ | SCREW | 8 | |
| | XYN6+F10FJ | SCREW | 8 | |
| 45 | XZBT6506 | POLY BAG | 1 | |

16.8. Electrical Replacement Parts List

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|------------|--------------|-------------------------|-----|---------|
| F1601.1602 | K5D103BMA001 | TIME LAG FUSE HIGH | 2 | △ |
| F1701.1702 | K5D502BNA007 | AC FUSE | 2 | △ |
| C10 | K1MN68BA0076 | 68P CONNECTOR | 1 | |
| C11 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C21 | K1MN80BA0076 | 80P CONNECTOR | 1 | |
| C22 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C24,25 | K1MN68BA0076 | 68P CONNECTOR | 2 | |
| C31 | K1MN80BA0076 | 80P CONNECTOR | 1 | |
| C35 | K1KA08AA0714 | 8P CONNECTOR | 1 | |
| C41 | K1MN80BA0076 | 80P CONNECTOR | 1 | |
| C42 | K1KA12BA0107 | 12P CONNECTOR | 1 | |
| C44 | K1KA20B00155 | 20P CONNECTOR | 1 | |
| C51 | K1MN80BA0076 | 80P CONNECTOR | 1 | |
| C52 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C54,55 | K1MN68BA0076 | 68P CONNECTOR | 2 | |
| C60 | K1MN68BA0076 | 68P CONNECTOR | 1 | |
| C61 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C1102 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1103,04 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C1106 | F1H1H2700008 | E 27UF, 50V | 1 | |
| C1107 | F1H1H2200008 | E 22UF, 50V | 1 | |
| C1108 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C1109 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1111 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1112 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C1114 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C1117 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C1122 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C1123 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1500 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1503-08 | F1G1A104A012 | C 0.01UF, K, 10V | 6 | |
| C1509 | ECJ1VB0J105K | C 1UF, K, 16V | 1 | |
| C1513,14 | ECJ0EC1H120J | C 120PF, K, 50V | 2 | |
| C1515 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C1516 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1517 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C1518 | ECUV1A335KBN | C 33UF 10V | 1 | |
| C1519-31 | F1G1A104A012 | C 0.01UF, K, 10V | 13 | |
| C1532-35 | F1J1A106A043 | C 0.010UF, K, 10V | 4 | |
| C1536-39 | ECJ0EC1H680J | C 680PF, K, 50V | 4 | |
| C1540,41 | ECJ0EB1C103K | C 0.010UF, K, 16V | 2 | |
| C1543,44 | F1G1H1020008 | C 1000PF, K, 50V | 2 | |
| C1547-53 | F1G1A104A012 | C 0.01UF, K, 10V | 7 | |
| C1554 | ECGMX0E101R | E 100UF, 10V | 1 | |
| C1555-62 | F1G1A105A047 | E 1UF, K, 10V | 8 | |
| C1563-67 | F1G1A104A012 | C 0.01UF, K, 10V | 5 | |
| C1568 | ECGMX0E101R | E 100UF, 10V | 1 | |
| C1569-76 | F1G1A105A047 | E 1UF, K, 10V | 8 | |
| C1578 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C1579 | F1G1H100A565 | C 100PF, K, 50V | 1 | |
| C1580 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C1581 | ECJ1VB0J105K | C 1UF, K, 16V | 1 | |
| C1582 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C1585,86 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C1587 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1596 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C1598,99 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C1600 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1601,02 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C1604 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C1608 | ECJ2FF1A475Z | C 4.7UF, Z, 10V | 1 | |
| C1610,11 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C1612,13 | ECJ2FF1A475Z | C 4.7UF, Z, 10V | 2 | |
| C1614 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1615 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C1616 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1617 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C1618,19 | ECJ0EC1H181J | C 180PF, K, 50V | 2 | |
| C1620,21 | ECJ0EC1H330J | C 330PF, K, 50V | 2 | |
| C1634,35 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C1636 | F1G1H221A541 | E 220UF, 50V | 1 | |
| C1637 | F1G1A104A012 | C 0.1UF, K, 10V | 1 | |
| C1638 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C1639 | F1G1C223A081 | C 0.022UF, 16V | 1 | |
| C1640 | F1H1H471A219 | E 470UF, 50V | 1 | |
| C1641 | ECJ1VB0J105K | C 1UF, K, 16V | 1 | |
| C1642 | F1G1A104A012 | C 0.1UF, K, 10V | 1 | |
| C1643 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C1644 | F1J1A475A039 | C 4.7UF, K, 10V | 1 | |
| C1645 | F1G1A104A012 | C 0.1UF, K, 10V | 1 | |
| C1646 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C1647 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C1650 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C1651 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C1652,53 | F1G1H221A541 | E 220UF, 50V | 2 | |
| C1655 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C1656 | ECJ0EB1A473K | C 0.047UF, K, 10V | 1 | |
| C1657 | ECJ1VB0J105K | C 1UF, K, 16V | 1 | |
| C1658 | F1G1A104A012 | C 0.1UF, K, 10V | 1 | |
| C1659-62 | F1J1A106A043 | C 0.010UF, K, 10V | 4 | |
| C1663,64 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C1665 | F1J1A475A039 | C 4.7UF, K, 10V | 1 | |
| C1666 | F1G1C223A081 | C 0.022UF, 16V | 1 | |
| C1667,68 | EEEB1C470P | C 47PF, J, 16V | 2 | |
| C1669 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1670,71 | ECGRL0G680ER | C 68PF, J, 4V | 2 | |
| C1672 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C1675 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C1690-02 | F1G1A104A012 | C 0.01UF, K, 10V | 13 | |
| C1703 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1704-14 | F1G1A104A012 | C 0.01UF, K, 10V | 11 | |
| C1715-18 | F1J1A106A043 | C 0.010UF, K, 10V | 4 | |
| C1719-33 | F1G1A104A012 | C 0.01UF, K, 10V | 15 | |
| C1734-36 | ECJ1VB0J105K | C 1UF, K, 16V | 3 | |
| C1737,38 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C1739-41 | ECJ1VB0J105K | C 1UF, K, 16V | 3 | |
| C1742-51 | F1G1A104A012 | C 0.01UF, K, 10V | 10 | |
| C1752,53 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C1754-64 | F1G1A104A012 | C 0.01UF, K, 10V | 11 | |
| C1765,66 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C1768,69 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C1771 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C1772 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C1773 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C1774 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C1777 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1778 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C1779 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C1781 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C1783-85 | F1G1A104A012 | C 0.01UF, K, 10V | 3 | |
| C1789 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2000 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C2005,06 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2010,11 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2013,14 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2016,17 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2021,22 | F1H1H5610007 | E 560UF, 50V | 2 | |
| C2023 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2048-50 | ECJ1XB1H104K | C 10PF, J, 50V | 3 | |
| C2052,53 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2054 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2055,56 | ECJ1VC1H120J | C 12PF, J, 50V | 2 | |
| C2057,58 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2059 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C2088 | ECJ2FB1A475K | C 4.7UF, K, 10V | 1 | |
| C2089 | F1H1H5610007 | E 560UF, 50V | 1 | |
| C2091 | ECJ1VC1H100C | C 10PF, C, 50V | 1 | |
| C2092 | F1H1H2200008 | E 22UF, 50V | 1 | |
| C2096,97 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2098,99 | EEEB0J221UP | C 220PF, J, 6.3V | 2 | |
| C2100 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2101 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2102 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2105,06 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2107,08 | F2G0J470A019 | E 47UF 6.3V | 2 | |
| C2109,10 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2111 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C2112,13 | F2G0J470A019 | E 47UF 6.3V | 2 | |
| C2114,15 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2116 | F1H1H471A792 | E 470UF, 50V | 1 | |
| C2117 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2118 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2119 | EEEB1A221P | C 220PF, J, 10V | 1 | |
| C2120,21 | F1H1H5600007 | E 56UF, 50V | 2 | |
| C2124 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2126 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2128 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2130 | F1J0J106A021 | C 0.010UF, K, 16V | 1 | |
| C2131 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2133 | EEEB1H4R7R | C 4.7PF, J, 50V | 1 | |
| C2134 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2135,36 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2137 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C2138 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2143 | F1H1H181A792 | E 180UF, 50V | 1 | |
| C2146 | F1H1H181A792 | E 180UF, 50V | 1 | |
| C2147 | EEEB1C220R | C 22PF, J, 16V | 1 | |
| C2151 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C2153 | ECJ1VC1H330J | C 33PF, J, 50V | 1 | |
| C2154 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2155 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2157 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2159,60 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2161 | EEEB1C101UP | C 100PF, J, 16V | 1 | |
| C2162-67 | ECJ1VB1C105K | C 0.01UF, K, 16V | 6 | |
| C2170 | ECJ1VC1H330J | C 33PF, J, 50V | 1 | |
| C2171 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2173 | ECJ2FF1C475Z | C 0.047UF, Z, 16V | 1 | |
| C2174 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2175 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C2176 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2179 | EEEB1C470P | C 47PF, J, 16V | 1 | |
| C2180 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C2183 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2184 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2185 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2186 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2187 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C2188 | F1H1H471A792 | E 470UF, 50V | 1 | |
| C2189 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2190,91 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C2192 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C2195 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2197,98 | ECJ1VB1C333K | C 0.033UF, K, 16V | 2 | |
| C2202 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C2203 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C2204-06 | ECJ1VB1C105K | C 0.01UF, K, 16V | 3 | |
| C2213 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2216 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2244 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2245 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C2246 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2251 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C2263,64 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C2265-68 | ECJ1XC1H101J | C 100PF, J, 50V | 4 | |
| C2270,71 | F1H1H471A792 | E 470UF, 50V | 2 | |
| C2272 | ECJ2FF1C475Z | C 0.047UF, Z, 16V | 1 | |
| C2280 | ECJ2FB1A475K | C 4.7UF, K, 10V | 1 | |
| C2281 | F1H1H5610007 | E 560UF, 50V | 1 | |
| C2288,89 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C2301,02 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C2303-10 | F1J1E105A171 | E 1 UF 25V | 8 | |
| C2311-16 | ECJ1XB1H104K | C 10PF, J, 50V | 6 | |
| C2317-24 | ECJ1VB1C333K | C 0.033UF, K, 16V | 8 | |
| C2325,26 | F1J1H474A757 | C 0.47UF, 50V | 2 | |
| C2327-30 | ECJ1XB1H104K | C 10PF, J, 50V | 4 | |
| C2331,32 | F1J1H474A757 | C 0.47UF, 50V | 2 | |
| C2333-36 | ECJ1XB1H104K | C 10PF, J, 50V | 4 | |
| C2337-40 | F1H1H223A219 | E 0.022UF, 50V | 4 | |
| C2341-44 | ECJ1XB1H104K | C 10PF, J, 50V | 4 | |
| C2345-48 | F1H1H223A219 | E 0.022UF, 50V | 4 | |
| C2349 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2352 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2353-60 | ECJ1XB1H104K | C 10PF, J, 50V | 8 | |
| C2361,62 | EEFFG1E471P | E 470UF, 25V | 2 | |
| C2363,64 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2365 | EEEB1C221UP | C 220PF, J, 16V | 1 | |
| C2375-82 | F1H1H223A219 | E 0.022UF, 50V | 8 | |
| C2383-90 | ECJ1VB1H102K | C 1000UF, Z, 50V | 8 | |
| C2502,03 | ECJ2XB1H102K | C 1000PF, K, 50V | 2 | |
| C2510 | F1K0J1060020 | C 10UF, K,6.3V | 1 | |
| C2511 | ECJ2XF1C105Z | C 1UF, Z, 16V | 1 | |
| C2512 | F1K0J1060020 | C 10UF, K,6.3V | 1 | |
| C2515 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2521 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2522-27 | ECJ1VB1H102K | C 1000UF, Z, 50V | 6 | |
| C2601,02 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C2801 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C2802,03 | F1J1H474A757 | C 0.47UF, 50V | 2 | |
| C2804 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | AZ/M |
| C2805-07 | F1J1H474A757 | C 0.47UF, 50V | 3 | AZ/M |
| C2813 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2814 | ECJ1VB1H472K | C 4700PF, K, 50V | 1 | |
| C2815 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C2816 | EEEB1V220P | E 22UF, 35V | 1 | |
| C2817 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C2819 | EEHBE1E470P | C 47PF, J, 25V | 1 | |
| C3021 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C3023,24 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C3026 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3027,28 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C3029 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C3031 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3033 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C3040 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3043 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C3051-56 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 6 | |
| C3059,60 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C3062-64 | ECJ1VB1C105K | C 0.01UF, K, 16V | 3 | |
| C3066 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | A |
| C3070 | EEHBOJ221UP | C 220PF, J, 6.3V | 1 | |
| C3075 | EEHBC1221UP | C 220PF, J, 16V | 1 | |
| C3078 | FK0J226A008 | C 22UF, K, 6.3V | 1 | |
| C3081 | F2H0J1010009 | C 100UF, 6.3V | 1 | |
| C3100-02 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 3 | |
| C3103 | EEHBC100R | C 10PF, J, 16V | 1 | |
| C3106 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | AZ/M |
| C3115-17 | ECJ1XB1H104K | C 10PF, J, 50V | 3 | |
| C3118 | EEHBC470P | C 47PF, J, 16V | 1 | |
| C3119 | EEHBC100R | C 10PF, J, 16V | 1 | |
| C3120 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3201 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3202 | FLJ1H474A757 | C 0.47UF, 50V | 1 | AZ/M |
| C3214 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3216 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3226-28 | ECJ1XB1H104K | C 10PF, J, 50V | 3 | |
| C3230 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3263 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3265-67 | ECJ1XB1H104K | C 10PF, J, 50V | 3 | |
| C3270 | EEHBOJ102UP | C 1100PF, J, 6.3V | 1 | |
| C3271 | EEHBC100R | C 10PF, J, 16V | 1 | |
| C3272 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C3273 | F2G1H100A031 | E 10UF, 50V | 1 | |
| C3274-76 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 3 | |
| C3279 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C3280 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C3281 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C3285 | EEHBOJ102UP | C 1100PF, J, 6.3V | 1 | AZ/M |
| C3286 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | AZ/M |
| C3291 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | AZ/M |
| C3292 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | AZ/M |
| C3293 | EEHBC100R | C 10PF, J, 16V | 1 | AZ/M |
| C3296 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | AZ/M |
| C3298 | EEHBI220P | E 22UF, 35V | 1 | AZ/M |
| C3299 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | AZ/M |
| C3300 | F2H0J1010009 | C 100UF, 6.3V | 1 | AZ/M |
| C3305 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | AZ/M |
| C3308 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | AZ/M |
| C3401 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C3701 | ECJ2XC1H561K | C 560PF, K, 50V | 1 | |
| C3703 | ECJ2XC1H561K | C 560PF, K, 50V | 1 | |
| C3711,12 | ECJ2VF1H333Z | C 0.033UF, Z, 50V | 2 | |
| C3715 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C3750 | FLJ1H102A721 | E 1000UF, 50V | 1 | |
| C3801,02 | FLG1A104A012 | C 0.01UF, K, 10V | 2 | |
| C3804 | FLG1A104A012 | C 0.01UF, K, 10V | 1 | |
| C3805 | EEHBOJ330R | C 33PF, J, 6.3V | 1 | |
| C3806-12 | FLG1A104A012 | C 0.01UF, K, 10V | 7 | |
| C3813 | FLJ0J106A004 | C 0.010UF, K, 16V | 1 | |
| C3814 | FLG1A104A012 | C 0.01UF, K, 10V | 1 | |
| C3815-20 | ECJ0EB1C103K | C 0.010UF, K, 16V | 6 | |
| C3823,24 | FLG1A104A012 | C 0.01UF, K, 10V | 2 | |
| C4005,06 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4008 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4010,11 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C4013-15 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4016 | FLJ1C475A170 | C 4.7UF, K, 16V | 1 | |
| C4018 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4019 | FLJ1H474A757 | C 0.47UF, 50V | 1 | |
| C4020,21 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4022 | FLJ1H474A757 | C 0.47UF, 50V | 1 | |
| C4023-25 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4027,28 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4030 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4032-34 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4035,36 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4038 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4039 | FLG1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4040 | FLG1H150A565 | E 15UF, 50V | 1 | |
| C4045,46 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4047 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4049 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4050 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4051-53 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4054 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C4500-03 | FLG1C104A081 | C 0.10UF, K, 16V | 4 | |
| C4506,07 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4508,09 | EEHBOJ330R | C 33PF, J, 6.3V | 2 | |
| C4510,11 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4513-15 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4517 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4520 | FLJ1A106A043 | C 0.010UF, K, 10V | 1 | |
| C4521 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4522 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C4523 | FLJ1H474A757 | C 0.47UF, 50V | 1 | |
| C4524 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C4527 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4528 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4531 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4533 | FLG1H680A565 | E 68UF, 50V | 1 | |
| C4534,35 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C4538 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4539 | FLJ1A106A043 | C 0.010UF, K, 10V | 1 | |
| C4541 | FLH1H471A219 | E 470UF, 50V | 1 | |
| C4543-45 | FLG1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4546 | FLH0J2250008 | C 2.2UF, K, 16V | 1 | |
| C4547 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4548,49 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C4550 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4551,52 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C4553 | FLG1H1020008 | E 1000UF, 50V | 1 | |
| C4555,56 | FLJ1A106A043 | C 0.010UF, K, 10V | 2 | |
| C4557 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4559,60 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4562 | FLH1H822A219 | E 8200UF, 50V | 1 | |
| C4563 | ECJ1VB1C823K | C 0.082UF, K, 16V | 1 | |
| C4564,65 | FLG1E1030005 | C 0.01UF, Z, 25V | 2 | |
| C4566 | ECJ1XB1C393K | C 0.039UF, K, 16V | 1 | |
| C4567 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C4568 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4569 | FLJ1C684A097 | C 0.68UF, Z, 16V | 1 | |
| C4570 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4572,73 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4574 | FLG1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4575 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4576 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4577,78 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4580 | FLG1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4581 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4582,83 | FLG1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4584,85 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4586 | FLG1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4587 | FLG1C104A081 | C 0.10UF, K, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C4588 | ECJ1VB1C823K | C 0.082UF, K, 16V | 1 | |
| C4589 | F1G1H150A565 | E 15UF, 50V | 1 | |
| C4590 | ECJ0EC1H180J | C 180PF, K, 50V | 1 | |
| C4591,92 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4593 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4595 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4596 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4598 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4600,01 | F1G1E1030005 | C 0.01UF, Z, 25V | 2 | |
| C4602 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4604 | F1H0J2250008 | C 2.2UF, K, 16V | 1 | |
| C4605 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4607 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4609 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4611 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4612 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4613 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4614 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4615 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4616,17 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C4618 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C4619 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C4620 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4621-23 | F1G1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4624,25 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C4626-28 | F1G1C104A081 | C 0.10UF, K, 16V | 3 | |
| C4629 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C4807 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C5000 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C5001 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5002 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5004 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5005 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5006 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5007 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5008 | ECJ1XC1H820J | C 82PF, J, 50V | 1 | |
| C5009 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5010 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5011,12 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C5013 | ECJ1VC1H680J | C 68PF, J, 50V | 1 | |
| C5015 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5016,17 | ECJ1VC1H180J | C 18PF, J, 50V | 2 | |
| C5018 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5019 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5020 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5021 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C5022 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5024 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5025 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5026 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5027 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5028 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5029 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5031 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C5032,33 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C5034,35 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C5036 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5037 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C5038 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5040 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5041 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5042 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5043 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5044,45 | F1G1H1020008 | C 1000PF, K, 50V | 2 | |
| C5046,47 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C5048 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5049 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C5050 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5051,52 | F1G1H1020008 | C 1000PF, K, 50V | 2 | |
| C5053 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5054 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5055-58 | F1G1A104A012 | C 0.01UF, K, 10V | 4 | |
| C5059 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5060 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5061,62 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C5063,64 | F1G1H1020008 | C 1000PF, K, 50V | 2 | |
| C5065 | ECGRLOG680ER | C 68PF, J, 4V | 1 | |
| C5066 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C5067 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5068-70 | F1G1H1020008 | C 1000PF, K, 50V | 3 | |
| C5071,72 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C5073,74 | F1G1H1020008 | C 1000PF, K, 50V | 2 | |
| C5075 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5076-79 | F1G1H1020008 | C 1000PF, K, 50V | 4 | |
| C5080 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5081-83 | F1G1H1020008 | C 1000PF, K, 50V | 3 | |
| C5084 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5085,86 | F1G1H1020008 | C 1000PF, K, 50V | 2 | |
| C5087 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5088 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5089,90 | F1G1H1020008 | C 1000PF, K, 50V | 2 | |
| C5091 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5092-94 | F1G1H1020008 | C 1000PF, K, 50V | 3 | |
| C5095 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5096 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5097-00 | F1G1H1020008 | C 1000PF, K, 50V | 4 | |
| C5101,02 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C5103 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5104 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5105 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5106 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5107 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5108,09 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C5110 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5111,12 | F1G1H1020008 | C 1000PF, K, 50V | 2 | |
| C5113 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5114 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5115 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5116 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5117,18 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C5120 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5121 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5122-43 | F1G1A104A012 | C 0.01UF, K, 10V | 22 | |
| C5144,45 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C5146 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5235 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5268-70 | F1J0J1060004 | C 0.010UF, K, 16V | 3 | |
| C5271 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5272 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5273 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5274 | EEHBOG101R | C 100PF, J, 4V | 1 | |
| C5275 | F1H1H471A792 | E 470UF, 50V | 1 | |
| C5276 | EEFCD0G560ER | 56UF, | 1 | |
| C5277 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5278 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5279 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5280 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5281 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5282 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5283 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5284 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5285-87 | F1G1A104A012 | C 0.01UF, K, 10V | 3 | |
| C5288 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5289 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C5290 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5291,92 | F1G1A104A012 | C 0.01UF, K, 10V | 2 | |
| C5293 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5294 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5295 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5296 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5297 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5298 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5299 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5300 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5301 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5302 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5303 | ECJ0EB1C103K | C 0.010UF, K, 16V | 1 | |
| C5343 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5344 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5345 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5347 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C5348 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5350 | F1H0J1050012 | C 1UF, K, 16V | 1 | |
| C5351 | EEHB0G470R | C 47PF, J, 4V | 1 | |
| C5352 | F1H1H471A792 | E 470UF, 50V | 1 | |
| C5353 | F1H0J1050012 | C 1UF, K, 16V | 1 | |
| C5354-56 | F1G1A104A012 | C 0.01UF, K, 10V | 3 | |
| C5357 | EEHB0G470R | C 47PF, J, 4V | 1 | |
| C5358 | F1H0J1050012 | C 1UF, K, 16V | 1 | |
| C5359 | EEHB0G470R | C 47PF, J, 4V | 1 | |
| C5360 | F1H1H471A792 | E 470UF, 50V | 1 | |
| C5361 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5362 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5363 | EEHB0G470R | C 47PF, J, 4V | 1 | |
| C5364-91 | F1G1A104A012 | C 0.01UF, K, 10V | 28 | |
| C5392 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C5393 | F1H1A154A012 | C 0.15UF, K, 50V | 1 | |
| C5394 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5395 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5397 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5409 | F1J1E104A137 | C 0.10UF, Z, 25V | 1 | |
| C5410 | ECA1EM471 | E 470UF, 25V | 1 | |
| C5412,13 | F1J1E104A137 | C 0.10UF, Z, 25V | 2 | |
| C5419 | ECA1EM471 | E 470UF, 25V | 1 | |
| C5420 | F1J1E104A137 | C 0.10UF, Z, 25V | 1 | |
| C5501 | F2A1C471A537 | E 470UF, 16V | 1 | |
| C5502 | ECJ2VB1C104K | C 0.1UF, K, 16V | 1 | |
| C5503 | F2A1C471A537 | E 470UF, 16V | 1 | |
| C5504 | ECJ2VB1C104K | C 0.1UF, K, 16V | 1 | |
| C5505 | F2A1C471A537 | E 470UF, 16V | 1 | |
| C5506 | ECJ2VB1C104K | C 0.1UF, K, 16V | 1 | |
| C5507 | F2A1C471A537 | E 470UF, 16V | 1 | |
| C5508 | ECJ2VB1C104K | C 0.1UF, K, 16V | 1 | |
| C5509 | F2A1V331A096 | E 330UF, 35V | 1 | |
| C5510 | F1J1E104A137 | C 0.10UF, Z, 25V | 1 | |
| C5521,22 | ECJ2VB1C104K | C 0.1UF, K, 16V | 2 | |
| C5551 | F2A1V331A096 | E 330UF, 35V | 1 | |
| C5552 | F1J1E104A137 | C 0.10UF, Z, 25V | 1 | |
| C5587 | F2A1C471A537 | E 470UF, 16V | 1 | |
| C5588 | ECJ2VB1C104K | C 0.1UF, K, 16V | 1 | |
| C5595 | ECA1HM220 | E 22UF, 50V | 1 | |
| C5600 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5601 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C5602 | ECGRLOG680ER | C 68PF, J, 4V | 1 | |
| C5603,04 | F1G1E1030005 | C 0.01UF, Z, 25V | 2 | |
| C5605 | F1J1A475A039 | C 4.7UF, K, 10V | 1 | |
| C5606 | F1H1H471A219 | E 470UF, 50V | 1 | |
| C5607 | F1G1H221A459 | E 220UF, 50V | 1 | |
| C5608 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C5609,10 | EEHBC1470P | C 47PF, J, 16V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C5615 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C5616 | ECJ0EB1A473K | C 0.047UF, K, 10V | 1 | |
| C5617 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5618,19 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C5620 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C5621 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5622 | F1J1A475A039 | C 4.7UF, K, 10V | 1 | |
| C5623 | ECJ0EB1H471K | C 470PF, K, 50V | 1 | |
| C5624 | F1G1H221A459 | E 220UF, 50V | 1 | |
| C5625 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5626,27 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C5628,29 | ECGRLOG680ER | C 68PF, J, 4V | 2 | |
| C5630,31 | EEHBC1470P | C 47PF, J, 16V | 2 | |
| C5632 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5636-41 | F1G1C104A081 | C 0.10UF, K, 16V | 6 | |
| C5643 | ECJ1XB1H104K | C 10PF, J, 50V | 1 | |
| C5644 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5645 | F1H1A225A051 | E 22UF, 50V | 1 | |
| C5661 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5662 | ECJ0EB1A473K | C 0.047UF, K, 10V | 1 | |
| C5663 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5670 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C5673,74 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C5676 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C5690,91 | F2G0J470A019 | E 47UF 6.3V | 2 | |
| C5692,93 | ECJ1XB1H104K | C 10PF, J, 50V | 2 | |
| C5694,95 | F2G0J470A019 | E 47UF 6.3V | 2 | |
| C5710-16 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 7 | |
| C5730 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5731 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C5851,52 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C5853 | F1J1C1050030 | C 1UF, Z, 16V | 1 | |
| C5854 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C5856 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C5857 | ECJ2VC1H680J | C 68PF, J, 50V | 1 | |
| C5858 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C5860 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C5862 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C5864 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C5866 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C5869 | F1G1A104A012 | C 0.01UF, K, 10V | 1 | |
| C5870 | F1G1H1020008 | C 1000PF, K, 50V | 1 | |
| C5910 | EEHBC1470P | C 47PF, J, 16V | 1 | |
| C5911,12 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C5914 | ECJ0EB1A473K | C 0.047UF, K, 10V | 1 | |
| C5915 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5916,17 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C5918 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5919 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5920 | F1H0J4750004 | C 4.7UF, K, 16V | 1 | |
| C5921 | ECJ0EB1H471K | C 470PF, K, 50V | 1 | |
| C5922 | F1G1H221A459 | E 220UF, 50V | 1 | |
| C5923 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C5924,25 | F1G1C104A077 | C 0.10UF, K, 16V | 2 | |
| C5926,27 | ECGRLOG680ER | C 68PF, J, 4V | 2 | |
| C5928,29 | EEHBC1470P | C 47PF, J, 16V | 2 | |
| C5930 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5939 | F1G1C104A077 | C 0.10UF, K, 16V | 1 | |
| C5950-52 | ECJ1XC1H101J | C 100PF, J, 50V | 3 | |
| C6002 | F1L2J222A022 | C 2200UF, K, 6.3V | 1 | |
| C6004 | F1L2J472A022 | C 4700UF, K, 6.3V | 1 | |
| C6006 | F1L2J562A022 | C 5600UF, K, 6.3V | 1 | |
| C6009 | F1L2J272A022 | C 2700UF, K, 6.3V | 1 | |
| C6011-19 | F2A2D221A022 | E 220UF, 200V | 9 | |
| C6022 | F1L2J272A022 | C 2700UF, K, 6.3V | 1 | |
| C6024 | F1L2J472A022 | C 4700UF, K, 6.3V | 1 | |
| C6025 | F1L2J222A022 | C 2200UF, K, 6.3V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| C6026 | F1L2J562A022 | C 5600UF, K, 6.3V | 1 | |
| C6027 | F1L2J272A022 | C 2700UF, K, 6.3V | 1 | |
| C6029 | F1L2J222A022 | C 2200UF, K, 6.3V | 1 | |
| C6032 | F0C2E405A176 | E 0.040UF, 250V | 1 | |
| C6037 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6041-44 | TCUY1C105ZFN | C 1UF, 16V | 4 | |
| C6091 | F1L2J1020001 | C 1000UF, K, 6.3V | 1 | |
| C6112-14 | F2A2D221A022 | E 220UF, 200V | 3 | |
| C6120 | F0C2E405A176 | E 0.040UF, 250V | 1 | |
| C6132 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6134, 35 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6151 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6152-54 | F1L1E4750004 | C 4.7UF, 25V | 3 | |
| C6192 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6195 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6197 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6202-07 | F0C2E225A218 | E 0.022UF, 250V | 6 | |
| C6211, 12 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6213 | F2A1E102A220 | E 1000UF, 25V | 1 | |
| C6215-18 | F1L1E4750004 | C 4.7UF, 25V | 4 | |
| C6221 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6241 | F2A1A101A439 | E 100UF, 10V | 1 | |
| C6242 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6243 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6251 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6252 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6255 | F2A2E470A022 | E 47UF, 250V | 1 | |
| C6261-70 | F2A2A471A072 | E 470UF, 100V | 10 | |
| C6272, 73 | F2A1E221A487 | E 220UF, 25V | 2 | |
| C6274, 75 | F0C2E405A176 | E 0.040UF, 250V | 2 | |
| C6281 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6402 | F1L2J222A022 | C 2200UF, K, 6.3V | 1 | |
| C6404 | F1L2J472A022 | C 4700UF, K, 6.3V | 1 | |
| C6405 | F1L2J272A022 | C 2700UF, K, 6.3V | 1 | |
| C6406 | F1L2J562A022 | C 5600UF, K, 6.3V | 1 | |
| C6411-19 | F2A2D221A022 | E 220UF, 200V | 9 | |
| C6422 | F1L2J272A022 | C 2700UF, K, 6.3V | 1 | |
| C6424 | F1L2J472A022 | C 4700UF, K, 6.3V | 1 | |
| C6425 | F1L2J222A022 | C 2200UF, K, 6.3V | 1 | |
| C6426 | F1L2J562A022 | C 5600UF, K, 6.3V | 1 | |
| C6427 | F1L2J272A022 | C 2700UF, K, 6.3V | 1 | |
| C6429 | F2A2D221A022 | E 220UF, 200V | 1 | |
| C6431 | F0C2E405A176 | E 0.040UF, 250V | 1 | |
| C6471 | F1L2J1020001 | C 1000UF, K, 6.3V | 1 | |
| C6480 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6491 | F1L2J1020001 | C 1000UF, K, 6.3V | 1 | |
| C6502 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6504, 05 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6512-17 | F0C2E225A218 | E 0.022UF, 250V | 6 | |
| C6521 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6522 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6524, 25 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6527 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6561 | F2A1A101A439 | E 100UF, 10V | 1 | |
| C6562 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6563 | F2A1A101A439 | E 100UF, 10V | 1 | |
| C6564 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6565, 66 | ECJ2VB1H103K | C 0.01UF, K, 50V | 2 | |
| C6581 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6582 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6592 | F2A1E221A487 | E 220UF, 25V | 1 | |
| C6593 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6594 | F2A1E221A487 | E 220UF, 25V | 1 | |
| C6601, 02 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6603 | F1K2J102A014 | C 1000UF, K, 6.3V | 1 | |
| C6604 | F2A2V470A020 | E 47UF, 350V | 1 | |
| C6605 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6606 | F1K2J102A014 | C 1000UF, K, 6.3V | 1 | |
| C6610 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6612 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6620 | F1L2J222A022 | C 2200UF, K, 6.3V | 1 | |
| C6641 | ECQE2105RKB | P 1UF, 250V | 1 | |
| C6661, 62 | F1K2J102A014 | C 1000UF, K, 6.3V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| C6671 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6681, 82 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6683 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6691, 92 | ECA2CM101 | E 100UF, 160V | 2 | |
| C6701-08 | ECJ2XB1H104K | C 0.1UF, K, 50V | 8 | |
| C6721 | F2A1H101A493 | E 100UF, 50V | 1 | |
| C6723-25 | F1L1E4750004 | C 4.7UF, 25V | 3 | |
| C6726, 27 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C6728 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6752 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6753 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6754 | F2A1V5600014 | E 56UF, 35V | 1 | |
| C6755 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6771 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6772, 73 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6775 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6776, 77 | ECJ2XB1H104K | C 0.1UF, K, 50V | 2 | |
| C6791 | F2A1E221A487 | E 220UF, 25V | 1 | |
| C6795, 96 | F2A1E221A487 | E 220UF, 25V | 2 | |
| C6801 | F2A2E470A022 | E 47UF, 250V | 1 | |
| C6802 | ECQE223KF | P 0.022UF, K, 400V | 1 | |
| C6803 | ECKD3D221KBP | C 220PF, K, 2KV | 1 | |
| C6804 | F2A2E100A022 | E 10UF, 250V | 1 | |
| C6805 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6806 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6807 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C6811 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6812 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6813 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6814 | F2A1E221A487 | E 220UF, 25V | 1 | |
| C6815 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6822 | F2A2V470A020 | E 47UF, 350V | 1 | |
| C6823 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6841 | ECA2DHG101 | E 100UF, 200V | 1 | |
| C6842 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6845 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6861 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6862 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6863 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6871 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6872 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6873 | ECJ2VB1H103K | C 0.01UF, K, 50V | 1 | |
| C6901-18 | TCUY1C105ZFN | C 1UF, 16V | 18 | |
| C6921 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6938 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6961 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6964-67 | F1L2E105A013 | E 0.10UF, 25V | 4 | |
| C6968 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6971 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6974-77 | F1L2E105A013 | E 0.10UF, 25V | 4 | |
| C6978 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C7101, 02 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7107-10 | F1K2A474A006 | C 0.47UF, 6.3V | 4 | |
| C7111 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7113 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7115-18 | F1K2A474A006 | C 0.47UF, 6.3V | 4 | |
| C7125, 26 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7130 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7135-38 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 4 | |
| C7150 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7152 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7170 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7172, 73 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7176 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7182 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7183-87 | TCUY1C105ZFN | C 1UF, 16V | 5 | |
| C7200, 01 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7203-05 | TCUY1C105ZFN | C 1UF, 16V | 3 | |
| C7207 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7208 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7209 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7212 | TCUY1C105ZFN | C 1UF, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C7213,14 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7216 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7217,18 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7221 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7222 | F1K2A474A006 | C 0.47UF, 6.3V | 1 | |
| C7224 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7225 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7226 | F1K2A474A006 | C 0.47UF, 6.3V | 1 | |
| C7231 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7238 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7240 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7253 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7264 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7266 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7268 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7270 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7272 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7274 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7275,76 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7279 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7285 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7286,87 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7290 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7297 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7299 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7301 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7304 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7308,09 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7311,12 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7315,16 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7323 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7324,25 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7326 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7327,28 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7329 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7331-34 | F1K2A474A006 | C 0.47UF, 6.3V | 4 | |
| C7339,40 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7351 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7369 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7370,71 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7374 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7381 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7382-86 | TCUY1C105ZFN | C 1UF, 16V | 5 | |
| C7401 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7406 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7412-15 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 4 | |
| C7418,19 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7424-27 | F1K2A474A006 | C 0.47UF, 6.3V | 4 | |
| C7428,29 | ECJ1XC1H101J | C 100PF, J, 50V | 2 | |
| C7432-35 | F1K2A474A006 | C 0.47UF, 6.3V | 4 | |
| C7440,41 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7452,53 | ECJ1XC1H101J | C 100PF, J, 50V | 2 | |
| C7468,69 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7472 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7475 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7480 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7481-85 | TCUY1C105ZFN | C 1UF, 16V | 5 | |
| C7501,02 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7506,07 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7508 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7511 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7513 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7516,17 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7519 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7520 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7521 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7522 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7523,24 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7527 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7530 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7538 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7539 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7541 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C7543 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7547-49 | TCUY1C105ZFN | C 1UF, 16V | 3 | |
| C7566 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7568 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7570 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7572 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7575 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7577,78 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7580 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7581 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7582,83 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7591 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7592 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7593,94 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7601,02 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7607-10 | F1K2A474A006 | C 0.47UF, 6.3V | 4 | |
| C7611-13 | ECJ1XC1H101J | C 100PF, J, 50V | 3 | |
| C7615-18 | F1K2A474A006 | C 0.47UF, 6.3V | 4 | |
| C7623,24 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7630 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7635-38 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 4 | |
| C7650 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7654,55 | F1K2A474A006 | C 0.47UF, 6.3V | 2 | |
| C7658 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7661 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7665 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7666-70 | TCUY1C105ZFN | C 1UF, 16V | 5 | |
| C7700 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7705 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7708 | F1H1A1050032 | E 10UF, 50V | 1 | |
| C7709 | F1H1A225A051 | E 22UF, 50V | 1 | |
| C7710,11 | F1J0J106A020 | C 0.010UF, K, 16V | 2 | |
| C7712 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7713 | ECJ1VC1H150J | C 15PF, J, 50V | 1 | |
| C7714 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7715 | ECJ1VC1H180J | C 18PF, J, 50V | 1 | |
| C7716 | F1J0J106A020 | C 0.010UF, K, 16V | 1 | |
| C7717 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7718 | F1J0J106A020 | C 0.010UF, K, 16V | 1 | |
| C7719,20 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7721 | F1J0J106A020 | C 0.010UF, K, 16V | 1 | |
| C7724,25 | ECJ1VC1H150J | C 15PF, J, 50V | 2 | |
| C7728 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7729 | ECJ1VC1H150J | C 15PF, J, 50V | 1 | |
| C7730 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7731 | ECJ1VC1H150J | C 15PF, J, 50V | 1 | |
| C7732,33 | ECJ1VF1C104Z | C 0.1UF, Z, 16V | 2 | |
| C7734,35 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7736 | ECJ1VF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C7737 | F1J0J106A020 | C 0.010UF, K, 16V | 1 | |
| C7738 | EEHBOG101R | C 100PF, J, 4V | 1 | |
| C7742 | F1J0J106A020 | C 0.010UF, K, 16V | 1 | |
| C7745 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C8001 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C8002-05 | F1H0J1050012 | C 1UF, K, 16V | 4 | |
| C8006-08 | F1G1C104A081 | C 0.10UF, K, 16V | 3 | |
| C8009,10 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C8011-14 | F1G1C104A081 | C 0.10UF, K, 16V | 4 | |
| C8015,16 | F1H0J1050012 | C 1UF, K, 16V | 2 | |
| C8017 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C8018-21 | F1G1C104A081 | C 0.10UF, K, 16V | 4 | |
| C8022 | F1H0J1050012 | C 1UF, K, 16V | 1 | |
| C8023,24 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C8025-29 | F1G1C104A081 | C 0.10UF, K, 16V | 5 | |
| C8030,31 | F1H0J1050012 | C 1UF, K, 16V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C8032 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C8033,34 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C8035,36 | F1J1A106A043 | C 0.010UF, K, 10V | 2 | |
| C8037-41 | F1G1C104A081 | C 0.10UF, K, 16V | 5 | |
| C8042 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8043-51 | F1G1C104A081 | C 0.10UF, K, 16V | 9 | |
| C8052 | F1H0J1050012 | C 1UF, K, 16V | 1 | |
| C8053 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C8056,57 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C8058 | F1J1A106A043 | C 0.010UF, K, 10V | 1 | |
| C8067 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C8068 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C8069 | F1G1H820A565 | E 82UF, 50V | 1 | |
| C8070-74 | F1G1C104A081 | C 0.10UF, K, 16V | 5 | |
| C8075 | F1J0G2260001 | C 0.001UF, 6.3V | 1 | |
| C8076-80 | F1G1C104A081 | C 0.10UF, K, 16V | 5 | |
| C8301 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 A | |
| C8304 | F1G1C104A081 | C 0.10UF, K, 16V | 1 A | |
| C8306 | F1G1H1020008 | E 1000UF, 50V | 1 A | |
| C8307 | F1G1C104A081 | C 0.10UF, K, 16V | 1 A | |
| C8309 | F1G1C104A081 | C 0.10UF, K, 16V | 1 A | |
| C8310 | EEEB0G101R | C 100PF, J, 4V | 1 A | |
| C8311,12 | F1G1H100A565 | C 100PF, K, 50V | 2 A | |
| C8313,14 | F1G1E1030005 | C 0.01UF, Z, 25V | 2 A | |
| C8316 | F2G0J470A019 | E 47UF 6.3V | 1 A | |
| C8319-21 | F1G1E1030005 | C 0.01UF, Z, 25V | 3 A | |
| C8322 | F1G1C104A081 | C 0.10UF, K, 16V | 1 A | |
| C8323,24 | F1G1H220A565 | E 22UF, 50V | 2 A | |
| C8325 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 A | |
| C8327,28 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 A | |
| C8329-36 | F1G1E1030005 | C 0.01UF, Z, 25V | 8 A | |
| C8338,39 | F1G1H220A565 | E 22UF, 50V | 2 A | |
| C8340 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 A | |
| C8551,52 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C8555 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C8601 | F1G1C104A081 | C 0.10UF, K, 16V | 1 | |
| C8621,22 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C8731 | F1G1E1030005 | C 0.01UF, Z, 25V | 1 | |
| C8802,03 | F1G1C104A081 | C 0.10UF, K, 16V | 2 | |
| C9028,29 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C9033,34 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 2 | |
| C9035,36 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C9037 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C9039 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9040 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 1 | |
| C9044-53 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 10 | |
| C9055-57 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 3 | |
| C9058 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9059-83 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 25 | |
| C9084 | EEFCD0G560ER | 56UF, | 1 | |
| C9085-99 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 15 | |
| C9101-10 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 10 | |
| C9111 | EEFCD0G560ER | 56UF, | 1 | |
| C9300-25 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 26 | |
| C9355-59 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 5 | |
| C9360-64 | ECJ3XB0J106M | C 10UF, M,6.3V | 5 | |
| C9365 | EEFCD0G560ER | 56UF, | 1 | |
| C9368 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9369-74 | ECJ1VF1H103Z | C 0.010UF, Z, 50V | 6 | |
| C9442-69 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 28 | |
| C9496 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9512,13 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C9514,15 | ECJ2XF1C105Z | C 1.0UF, Z, 16V | 2 | |
| C9516-25 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 10 | |
| C9526 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C9527,28 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C9531 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9532 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C9533 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9534-38 | ECJ3XB0J106M | C 10UF, M,6.3V | 5 | |
| C9539 | EEFCD0G560ER | 56UF, | 1 | |
| C9542 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9546,47 | ECJ1VC1H120J | C 12PF, J, 50V | 2 | |
| C9548 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9552 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9554 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9557 | ECJ2XF1C105Z | C 1.0UF, Z, 16V | 1 | |
| C9559-61 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 3 | |
| C9608 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 1 | |
| C9609 | ECJ3XB0J106M | C 10UF, M,6.3V | 1 | |
| C9610 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 1 | |
| C9800 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9801 | ECJ1VB1H472K | C 4700PF, K, 50V | 1 | |
| C9802 | ECJ1XC1H470J | C 47PF, J, 50V | 1 | |
| C9803 | ECJ1VB1H472K | C 4700PF, K, 50V | 1 | |
| C9804 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9805 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9806 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C9807,08 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9809 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9815,16 | ECGRL0G680ER | C 68PF, J, 4V | 2 | |
| C9817,18 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9823,24 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9825 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C9826 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 1 | |
| C9830-32 | ECJ3XB1C106M | C 1.0UF, K, 16V | 3 | |
| C9833 | ECJ3YB1E106M | C 10 UF, K, 25V | 1 | |
| C9837 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C9838 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 1 | |
| C9840 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 1 | |
| C9841,42 | ECJ2XF1C105Z | C 1.0UF, Z, 16V | 2 | |
| C9843 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 1 | |
| C9844 | ECJ1VF1H103Z | C 0.010UF, Z, 50V | 1 | |
| C9845,46 | ECJ1VFC104Z | C 0.1UF, Z, 16V | 2 | |
| C9847,48 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C9880,81 | ECJ1VB1H102K | C 1000UF, Z, 50V | 2 | |
| C9882 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9883 | ECJ1VB1H822K | C 8200PF, K, 50V | 1 | |
| C9884 | ECJ1VC1H100C | C 10PF, C, 50V | 1 | |
| C9885 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C9886 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9887 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9891 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9896 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9897 | ECJ1VB1H822K | C 8200PF, K, 50V | 1 | |
| C9898 | ECJ1VC1H100C | C 10PF, C, 50V | 1 | |
| C9899 | ECJ1VB1H102K | C 1000UF, Z, 50V | 1 | |
| C9926 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9967 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9969 | ECJ1VC1H330J | C 33PF, J, 50V | 1 | |
| C9970 | ECJ1XC1H470J | C 47PF, J, 50V | 1 | |
| C9971 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| CA1-15 | K1MN68BA0052 | 68P CONNECTOR | 15 | |
| CB1-15 | K1MN68BA0052 | 68P CONNECTOR | 15 | |
| CF6281 | D4DA9100001 | THERMISTOR | 1 | |
| D3 | K1KA30AA0009 | 30P CONNECTOR | 1 | |
| D5 | K1KB31AA0140 | 31P CONNECTOR | 1 | |
| D6 | K1KA21A00011 | 21P CONNECTOR | 1 | |
| D20 | K1KA20AA0008 | 20P CONNECTOR | 1 | |
| D25 | K1KA20B00155 | 20P CONNECTOR | 1 | |
| D31-33 | K1MN68BA0076 | 68P CONNECTOR | 3 | |
| D34-36 | K1MN68BA0251 | 68P CONNECTOR | 3 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| D1107 | MA704A | DIODE | 1 | |
| D1112 | MA2J72800L | DIODE | 1 | |
| D1500 | MA2J72900L | DIODE | 1 | |
| D1502 | B0JCDD000002 | DIODE | 1 | |
| D1503,04 | MA22D3900L | DIODE | 2 | |
| D1505 | B0JCDD000002 | DIODE | 1 | |
| D1507 | MA8024LTX | ZENER DIODE | 1 | |
| D1508 | MA8039L | ZENER DIODE | 1 | |
| D1509 | MA22D3900L | DIODE | 1 | |
| D1510 | B0JCDD000002 | DIODE | 1 | |
| D2025 | K7AAAY000003 | PHOTO LINK | 1 | |
| D2026 | MA2J11100L | DIODE | 1 | |
| D2028,29 | MA2J11100L | DIODE | 2 | |
| D2031-34 | MA2J11100L | DIODE | 4 | |
| D2119 | B0BC01100001 | ZENER DIODE | 1 | |
| D2189 | MA2J11100L | DIODE | 1 | |
| D2301,02 | MA2J11100L | DIODE | 2 | |
| D2303 | MA3056H | ZENER DIODE | 1 | |
| D2304 | MA2J11100L | DIODE | 1 | |
| D2510,11 | MAZ80560ML | ZENER DIODE | 2 | |
| D2512 | MA8043LTX | ZENER DIODE | 1 | |
| D2520 | LNJ107W5PRW | LED | 1 | |
| D2524 | MAZ80560ML | ZENER DIODE | 1 | |
| D2632,33 | MA2J11100L | DIODE | 2 | |
| D2634 | MA3X78900L | ZENER DIODE | 1 | |
| D2635 | MA2J11100L | DIODE | 1 | |
| D2636 | MA3047H | ZENER DIODE | 1 | |
| D2637 | MA2J11100L | DIODE | 1 | |
| D2638 | B0BC03900015 | ZENER DIODE | 1 | |
| D3003 | MA8140M | ZENER DIODE | 1 | |
| D3005,06 | MA8140M | ZENER DIODE | 2 | |
| D3035-43 | MA8140M | ZENER DIODE | 9 | |
| D3044 | B0BC01100001 | ZENER DIODE | 1 | |
| D3045-49 | MA8140M | ZENER DIODE | 5 | |
| D3100 | MA8140M | ZENER DIODE | 1 | |
| D3102 | MA2J11100L | DIODE | 1 | |
| D3334-38 | MA2J11100L | DIODE | 5 | |
| D3401,02 | MA2J72900L | DIODE | 2 | |
| D3405 | B0JCCE000008 | DIODE | 1 | |
| D3702 | MA8140M | ZENER DIODE | 1 | |
| D3801-11 | EZAEG2A50AX | DIODE | 11 | |
| D3812 | MA3056MTX | ZENER DIODE | 1 | |
| D3813,14 | B0HCMM000014 | DIODE | 2 | |
| D4500-12 | EZAEG2A50AX | DIODE | 13 | |
| D4513 | MA3056MTX | ZENER DIODE | 1 | |
| D4514 | EZAEG2A50AX | DIODE | 1 | |
| D4515 | MA3056MTX | ZENER DIODE | 1 | |
| D4516-23 | EZAEG2A50AX | DIODE | 8 | |
| D4524-27 | B0HCMM000014 | DIODE | 4 | |
| D4528 | EZAEG2A50AX | DIODE | 1 | |
| D4532 | B0HCMM000014 | DIODE | 1 | |
| D5402 | MA2J11100L | DIODE | 1 | |
| D5404 | MA2J11100L | DIODE | 1 | |
| D5406 | MA2J11100L | DIODE | 1 | |
| D5409 | B0JCME000037 | DIODE | 1 | |
| D5410 | MAZ81100ML | ZENER DIODE | 1 | |
| D5411 | MA2J11100L | DIODE | 1 | |
| D5412 | MA8033L | ZENER DIODE | 1 | |
| D5501,02 | B0BC01000035 | ZENER DIODE | 2 | |
| D5521 | MA2J11100L | DIODE | 1 | |
| D5522 | MA3X152A0L | DIODE | 1 | |
| D5526 | MA3X152A0L | DIODE | 1 | |
| D5528 | MA8120M | ZENER DIODE | 1 | |
| D5529 | MAZ80680LL | ZENER DIODE | 1 | |
| D5530 | MA2J11100L | DIODE | 1 | |
| D5531,32 | MA3X152A0L | DIODE | 2 | |
| D5533,34 | MA8120M | ZENER DIODE | 2 | |
| D5571 | B0BC6R600005 | ZENER DIODE | 1 | |
| D5573-75 | B0BC01100001 | ZENER DIODE | 3 | |
| D5601,02 | MA22D3900L | DIODE | 2 | |
| D5603,04 | B0JCDD000002 | DIODE | 2 | |
| D5605 | MA22D3900L | DIODE | 1 | |
| D5606 | B0JCDD000002 | DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| D5607,08 | MA8024LTX | ZENER DIODE | 2 | |
| D5609 | MA8056LTX | ZENER DIODE | 1 | |
| D5670 | MA2J11100L | DIODE | 1 | |
| D5671 | B0HCMM000014 | DIODE | 1 | |
| D5673 | B0HCMM000014 | DIODE | 1 | |
| D5690,91 | B0BC6R600005 | ZENER DIODE | 2 | |
| D5901,02 | MA22D3900L | DIODE | 2 | |
| D5903,04 | B0JCDD000002 | DIODE | 2 | |
| D5907,08 | B0BC4R700007 | ZENER DIODE | 2 | |
| D6001,02 | B0HBSN000008 | DIODE | 2 | |
| D6023 | MA3DF30000LZ | ZENER DIODE | 1 | |
| D6026 | MA3DF30000LZ | ZENER DIODE | 1 | |
| D6027,28 | B0ECHP000003 | DIODE | 2 | |
| D6032 | MA2J11100L | DIODE | 1 | |
| D6062-64 | B0HBSN000008 | DIODE | 3 | |
| D6071 | B0HBSN000008 | DIODE | 1 | |
| D6072 | MA3DF30000LZ | ZENER DIODE | 1 | |
| D6082-84 | MA3DF30000LZ | ZENER DIODE | 3 | |
| D6091 | MA3DF30000LZ | ZENER DIODE | 1 | |
| D6092 | B0HBSN000008 | DIODE | 1 | |
| D6101-06 | B0JCME000037 | DIODE | 6 | |
| D6110 | MA2J11100L | DIODE | 1 | |
| D6112 | MA8330M | ZENER DIODE | 1 | |
| D6113 | MA2J11100L | DIODE | 1 | |
| D6131 | B0ECHP000003 | DIODE | 1 | |
| D6132 | MA3DF30000LZ | ZENER DIODE | 1 | |
| D6151 | B0ECHP000003 | DIODE | 1 | |
| D6152 | MA3DF30000LZ | ZENER DIODE | 1 | |
| D6153 | B0ECHP000003 | DIODE | 1 | |
| D6191 | B0HBRP000003 | DIODE | 1 | |
| D6192,93 | B0ECHP000003 | DIODE | 2 | |
| D6211 | B0JCME000037 | DIODE | 1 | |
| D6212 | MA3DF30000LZ | ZENER DIODE | 1 | |
| D6221 | B0HBRP000003 | DIODE | 1 | |
| D6222,23 | MA2J11100L | DIODE | 2 | |
| D6224 | B0ECHP000003 | DIODE | 1 | |
| D6251,52 | MA8330M | ZENER DIODE | 2 | |
| D6253 | LNJ301MPUJA | LED | 1 | |
| D6254 | MAZ80510LL | ZENER DIODE | 1 | |
| D6255 | MA2J11100L | DIODE | 1 | |
| D6281,82 | B0JCME000037 | DIODE | 2 | |
| D6403,04 | MA3DF30000LZ | ZENER DIODE | 2 | |
| D6431-33 | MA3DF40000LZ | ZENER DIODE | 3 | |
| D6441 | B0ECHP000003 | DIODE | 1 | |
| D6451 | B0ECHP000003 | DIODE | 1 | |
| D6461,62 | B0HBSN000008 | DIODE | 2 | |
| D6464 | B0HBSN000008 | DIODE | 1 | |
| D6466 | MA2J11100L | DIODE | 1 | |
| D6467 | B0HBSN000008 | DIODE | 1 | |
| D6471,72 | B0HBSN000008 | DIODE | 2 | |
| D6477 | MA2J11100L | DIODE | 1 | |
| D6478 | B0HCKS000002 | DIODE | 1 | |
| D6480 | MA2J11100L | DIODE | 1 | |
| D6481-84 | MA3DF30000LZ | ZENER DIODE | 4 | |
| D6491 | MA3DF40000LZ | ZENER DIODE | 1 | |
| D6497 | MA2J11100L | DIODE | 1 | |
| D6501 | B0ECHP000003 | DIODE | 1 | |
| D6502 | B0HBSN000008 | DIODE | 1 | |
| D6521-23 | B0ECHP000003 | DIODE | 3 | |
| D6581,82 | MA8330M | ZENER DIODE | 2 | |
| D6583 | LNJ301MPUJA | LED | 1 | |
| D6584 | MAZ80510LL | ZENER DIODE | 1 | |
| D6585 | MA2J11100L | DIODE | 1 | |
| D6601 | MA8240MTX | ZENER DIODE | 1 | |
| D6602 | B0ECHP000003 | DIODE | 1 | |
| D6603 | MA8240MTX | ZENER DIODE | 1 | |
| D6604 | MA2J11100L | DIODE | 1 | |
| D6605 | MAZ80510LL | ZENER DIODE | 1 | |
| D6606 | B0HCMM000014 | DIODE | 1 | |
| D6607 | MA2J11100L | DIODE | 1 | |
| D6610 | MAZ81500ML | ZENER DIODE | 1 | |
| D6611-13 | MA2J11100L | DIODE | 3 | |
| D6616 | MA2J11100L | DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| D6619,20 | B0HCKS000002 | DIODE | 2 | |
| D6641,42 | B0HCKS000002 | DIODE | 2 | |
| D6643 | B0JCME000037 | DIODE | 1 | |
| D6644 | B0HCKS000002 | DIODE | 1 | |
| D6645 | B0JCME000037 | DIODE | 1 | |
| D6661 | MA2J11100L | DIODE | 1 | |
| D6662-64 | MA8330M | ZENER DIODE | 3 | |
| D6665 | MAZ80510LL | ZENER DIODE | 1 | |
| D6666,67 | MA2J11100L | DIODE | 2 | |
| D6682 | B0HCMM000014 | DIODE | 1 | |
| D6683,84 | MA2J11100L | DIODE | 2 | |
| D6686,87 | MA2J11100L | DIODE | 2 | |
| D6701,02 | MA8056H | ZENER DIODE | 2 | |
| D6721 | B0HCKS000002 | DIODE | 1 | |
| D6725 | B0ECHP000003 | DIODE | 1 | |
| D6726-33 | MA8056H | ZENER DIODE | 8 | |
| D6734 | MA2J11100L | DIODE | 1 | |
| D6758 | B0ECHP000003 | DIODE | 1 | |
| D6760 | MA2J11100L | DIODE | 1 | |
| D6761 | B0HCMM000014 | DIODE | 1 | |
| D6773 | B0HCKS000002 | DIODE | 1 | |
| D6791 | MA8200M | ZENER DIODE | 1 | |
| D6802 | B0BC01000044 | ZENER DIODE | 1 | |
| D6803 | B0HCKS000002 | DIODE | 1 | |
| D6804 | B0ECHP000003 | DIODE | 1 | |
| D6805 | MA2J11100L | DIODE | 1 | |
| D6806 | B0ECHP000003 | DIODE | 1 | |
| D6807-11 | B0HCMM000014 | DIODE | 5 | |
| D6820-23 | MA2J11100L | DIODE | 4 | |
| D6824,25 | MA8330M | ZENER DIODE | 2 | |
| D6826 | MA2J11100L | DIODE | 1 | |
| D6841 | B0HCKS000002 | DIODE | 1 | |
| D6842,43 | MA2J11100L | DIODE | 2 | |
| D6859 | B0ECHP000003 | DIODE | 1 | |
| D6860 | B0HCKS000002 | DIODE | 1 | |
| D6861 | MAZ80510LL | ZENER DIODE | 1 | |
| D6862 | MA2J11100L | DIODE | 1 | |
| D6871 | MAZ80510LL | ZENER DIODE | 1 | |
| D6872 | MA2J11100L | DIODE | 1 | |
| D6901,02 | MA8056H | ZENER DIODE | 2 | |
| D6903,04 | B0HDRP000002 | DIODE | 2 | |
| D6905,06 | MA8056H | ZENER DIODE | 2 | |
| D6907-12 | B0HDRP000002 | DIODE | 6 | |
| D7111-20 | B0HCMM000014 | DIODE | 10 | |
| D7211-20 | B0HCMM000014 | DIODE | 10 | |
| D7311-20 | B0HCMM000014 | DIODE | 10 | |
| D7415-24 | B0HCMM000014 | DIODE | 10 | |
| D7512-21 | B0HCMM000014 | DIODE | 10 | |
| D7611-20 | B0HCMM000014 | DIODE | 10 | |
| D7700 | B3AEB0000107 | LED | 1 | |
| D8850 | MA2J72800L | DIODE | 1 | |
| D9017-19 | MA3033 | ZENER DIODE | 3 | |
| D9020 | MA2J72800L | DIODE | 1 | |
| D9035 | MA2J72800L | DIODE | 1 | |
| D9100-03 | B0JCGD000002 | DIODE | 4 | |
| D9105,06 | B0JCGD000002 | DIODE | 2 | |
| D9110 | B0JCGD000002 | DIODE | 1 | |
| D9300-05 | MA152K | DIODE | 6 | |
| D9800 | B0JCME000037 | DIODE | 1 | |
| D9801 | B0JCDD000002 | DIODE | 1 | |
| D9802 | MA2J72800L | DIODE | 1 | |
| D9804 | MA152K | DIODE | 1 | |
| D9807,08 | MA152K | DIODE | 2 | |
| D9812 | B0JCME000037 | DIODE | 1 | |
| D9813 | B0JCDD000002 | DIODE | 1 | |
| D9814 | B0JCME000037 | DIODE | 1 | |
| D9815 | B0JCDD000002 | DIODE | 1 | |
| DG1 | K1KA12B00151 | 12P CONNECTOR | 1 | |
| DG2 | K1KB23A00003 | 23P CONNECTOR | 1 | |
| DG6 | K1KB80AA0218 | 80P CONNECTOR | 1 | |
| DG7 | K1KA04AA0104 | 4P CONNECTOR | 1 | |
| DG11 | K1KY30A00017 | 30P CONNECTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|---------------|-------------------------|-----|---------|
| DG23 | K1KA09AA0665 | 9P CONNECTOR | 1 | |
| DG25 | K1KBB0A00006 | CONNECTOR | 1 | |
| DG31 | K1KA20AA0009 | 20P CONNECTOR | 1 | |
| DG32 | K1KA07AA0266 | 7P CONNECTOR | 1 | |
| DG33 | K1KA11AA0715 | 11P CONNECTOR | 1 | |
| DG34,35 | K1KA30AA0009 | 30P CONNECTOR | 2 | |
| DG52 | K1KA14A00248 | 14P CONNECTOR | 1 | |
| DH4 | K1KA07AA0266 | 7P CONNECTOR | 1 | |
| DH5 | K1KB31AA0140 | 31P CONNECTOR | 1 | |
| DH8 | K1KB21BA0063 | 21P CONNECTOR | 1 | |
| DH25 | K1KAB0A00011 | CONNECTOR | 1 | |
| FL1505,06 | J0JAD0000028 | CHIP INDUCTOR | 2 | |
| FL1508 | J0MAB0000164 | LC FILTER | 1 | |
| FL2001,02 | J0HABB000004 | LC FILTER | 2 | |
| FL2003-06 | J0HABB000003 | LC FILTER | 4 | |
| FL3001,02 | J0HABB000003 | LC FILTER | 2 | |
| FL3003-05 | J0HABB000004 | LC FILTER | 3 | |
| FL3006,07 | J0JAD0000028 | CHIP INDUCTOR | 2 | |
| FL3008 | J0HABB000003 | LC FILTER | 1 | |
| FL3710-12 | J0MAB0000199 | LC FILTER | 3 | |
| FL5015-20 | J0JAD0000028 | CHIP INDUCTOR | 6 | |
| FL5730-34 | J0HABH000013 | LC FILTER | 5 | |
| FL5852,53 | J0JAD0000028 | CHIP INDUCTOR | 2 | |
| FL7101 | J0HABH000013 | LC FILTER | 1 | |
| FL7201,02 | J0HABH000013 | LC FILTER | 2 | |
| FL7501,02 | J0HABH000013 | LC FILTER | 2 | |
| FL7601 | J0HABH000013 | LC FILTER | 1 | |
| FL8801,02 | J0HAAA000013 | LC FILTER | 2 | |
| FL9000 | J0HABH000013 | LC FILTER | 1 | |
| FL9302-11 | J0HABH000013 | LC FILTER | 10 | |
| FL9501,02 | J0HABH000013 | LC FILTER | 2 | |
| FL9504 | F1J1E1040022 | C 0.10UF, Z, 25V | 1 | |
| FL9800 | J0HABH000013 | LC FILTER | 1 | |
| FL9803,04 | J0HABH000012 | LC FILTER | 2 | |
| FL9805-07 | J0HABH000013 | LC FILTER | 3 | |
| G51 | K1KY20A00015 | 20P CONNECTOR | 1 | |
| GH10 | K1FA121E0001 | 121P CONNECTOR | 1 | |
| GH11 | K1KY30A00017 | 30P CONNECTOR | 1 | |
| GS09 | K1KA06A00508 | 6P CONNECTOR | 1 | |
| GS52 | K1KA14B00129 | 14P CONNECTOR | 1 | |
| H2 | K1KA23A00003 | 23P CONNECTOR | 1 | |
| H3 | K1KA40AA0009 | 40P CONNECTOR | 1 | |
| H6 | K1KB80AA0218 | 80P CONNECTOR | 1 | |
| H8 | K1KA10AA0194 | 10P CONNECTOR | 1 | |
| H11 | K1KA05AA0190 | 5P CONNECTOR | 1 | |
| H12 | K1KA04AA0190 | 4P CONNECTOR | 1 | |
| H15 | K1KA04AA0714 | 4P CONNECTOR | 1 | |
| H51 | K1KA20AA0178 | 20P CONNECTOR | 1 | |
| IC1100 | MNZSFD7GP42 | IC | 1 | |
| IC1101 | TVRP466 | IC | 1 | A |
| IC1101 | TVRP399 | IC | 1 | AZ/M/MR |
| IC1501 | MN2WS0031CTY | IC | 1 | |
| IC1502 | C3ZBP0000038 | IC | 1 | |
| IC1504 | C1CB00002607 | IC | 1 | |
| IC1509,10 | C3ABSY000010 | IC | 2 | |
| IC1511,12 | C3ABRY000015 | IC | 2 | |
| IC1513 | C0ZBZ0001030 | IC | 1 | |
| IC1514 | C3EBKC000014 | IC | 1 | |
| IC1518 | C0ABBB000230 | IC | 1 | |
| IC1519 | C0FBBY000027 | IC | 1 | |
| IC1520 | C0JBCZ000550 | IC | 1 | |
| IC1521 | C0DBAYY00274 | IC | 1 | |
| IC1525 | C0CBCDC00035 | IC | 1 | |
| IC1526 | C0JBABZ002261 | IC | 1 | |
| IC1527 | C0CBCBD00008 | IC | 1 | |
| IC1528 | C0DBAYY00273 | IC | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| IC1530 | C3FBSY000005 | IC | 1 | |
| IC2000 | C0JBAZ002261 | IC | 1 | |
| IC2008 | C0CBCBE00001 | IC | 1 | |
| IC2010 | C0CBCBC00190 | IC | 1 | |
| IC2011 | C0ABBB000230 | IC | 1 | |
| IC2012 | C1BB00000947 | IC | 1 | |
| IC2013 | C0DBGYY00281 | IC | 1 | |
| IC2105 | AN15862A-VT | IC | 1 | |
| IC2106 | C1AB00002746 | IC | 1 | |
| IC2107 | C0DBFFD00003 | IC | 1 | |
| IC2301,02 | C1AB00002730 | IC | 2 | |
| IC2303 | C0DBGYY00202 | IC | 1 | |
| IC2601 | C0JBAU000034 | IC | 1 | |
| IC2610 | C0DBAJB00004 | IC | 1 | |
| IC3001 | AN15876A-VT | IC | 1 | |
| IC3801 | C1AB00002641 | IC | 1 | |
| IC3802 | TVRP315 | IC | 1 | |
| IC3803 | C0JBAU000034 | IC | 1 | |
| IC4001 | C1AB00002687 | IC | 1 | |
| IC4002 | C0CBCAC00275 | IC | 1 | |
| IC4004 | C0JBAZ002261 | IC | 1 | |
| IC4005 | C0CBCBC00190 | IC | 1 | |
| IC4500 | TVRP314 | IC | 1 | |
| IC4501 | TVRP313 | IC | 1 | |
| IC4503 | C1AB00002641 | IC | 1 | |
| IC4504 | C3EBEY000009 | IC | 1 | |
| IC4506 | C0DBGGF00001 | IC | 1 | |
| IC4507 | C0CBCBC00190 | IC | 1 | |
| IC4508,09 | C0CBCAD00082 | IC | 2 | |
| IC4510 | C1AB00002753 | IC | 1 | |
| IC4513,14 | C0JBAU000034 | IC | 2 | |
| IC4515 | NJM2903V | IC | 1 | |
| IC4800 | C1ZBZ0003577 | IC | 1 | |
| IC5000 | TVRP341 | IC | 1 | |
| IC5001 | C0CBCBC00190 | IC | 1 | |
| IC5002 | C0CBCAC00282 | IC | 1 | |
| IC5003 | C3ZBN0000026 | IC | 1 | |
| IC5006 | C0CBCAF00031 | IC | 1 | |
| IC5008 | C0CBCAF00023 | IC | 1 | |
| IC5009 | C0CBCAF00031 | IC | 1 | |
| IC5010 | TVRP342-1 | IC | 1 | |
| IC5012 | C0CBCBC00190 | IC | 1 | |
| IC5013 | C0EBD0000221 | IC | 1 | |
| IC5100 | MN84525 | IC | 1 | |
| IC5102 | C3ABQJ000055 | IC | 1 | |
| IC5105 | C1ZBZ0003668 | IC | 1 | |
| IC5400 | C0DBAZG00034 | IC | 1 | |
| IC5550,51 | EHMDD9851 | LINEAR IC | 2 | |
| IC5600 | C0DBAYY00273 | IC | 1 | |
| IC5601 | C0DBAYY00274 | IC | 1 | |
| IC5660 | C0EBM0000026 | IC | 1 | |
| IC5670 | C0CBCBC00190 | IC | 1 | |
| IC5671 | C0EBF0000376 | IC | 1 | |
| IC5851 | C0JBAZ002859 | IC | 1 | |
| IC5901 | C0DBAYY00274 | IC | 1 | |
| IC6131 | C0ZBZ0000895 | IC | 1 | |
| IC6151 | C0ZBZ0001324 | IC | 1 | |
| IC6191 | C0ZBZ0000895 | IC | 1 | |
| IC6211 | C0ZBZ0001325 | IC | 1 | |
| IC6221 | C0DBEMB00005 | IC | 1 | |
| IC6241 | C0JBAZ000005 | IC | 1 | |
| IC6251 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6281 | C0DBEMB00005 | IC | 1 | |
| IC6471 | C0DBEKA00003 | IC | 1 | |
| IC6472 | C0JBAA000377 | IC | 1 | |
| IC6501 | C0ZBZ0000895 | IC | 1 | |
| IC6521 | C0ZBZ0001324 | IC | 1 | |
| IC6561,62 | C0JBAZ000005 | IC | 2 | |
| IC6581 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6601 | C0ZBZ0001325 | IC | 1 | |
| IC6602 | C0JBAB000715 | IC | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| IC6610 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6671 | C0ZBZ0001325 | IC | 1 | |
| IC6681 | C0ZBZ0001325 | IC | 1 | |
| IC6682 | C0JBAA000377 | IC | 1 | |
| IC6721,22 | C0JBAZ000994 | IC | 2 | |
| IC6724,25 | C0CBADC00072 | IC | 2 | |
| IC6751 | C0CBADC00072 | IC | 1 | |
| IC6752 | C0ZBZ0001325 | IC | 1 | |
| IC6753 | C0JBAB000715 | IC | 1 | |
| IC6771 | C0CBADC00072 | IC | 1 | |
| IC6772 | C0ZBZ0001325 | IC | 1 | |
| IC6773,74 | C0JBAA000377 | IC | 2 | |
| IC6791 | EHMDD9863 | LINEAR IC | 1 | |
| IC6801,02 | C0DBEMB00005 | IC | 2 | |
| IC6803 | C0DAAMH00005 | IC | 1 | |
| IC6821 | C0DBEMB00005 | IC | 1 | |
| IC6841 | C0DBEMB00005 | IC | 1 | |
| IC6861 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6871 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6901-18 | AN16076A-VT | IC | 18 | |
| IC6919,20 | C0JBAA000174 | IC | 2 | |
| IC7101-06 | C0JBAZ001120 | IC | 6 | |
| IC7201-07 | C0JBAZ001120 | IC | 7 | |
| IC7211-15 | C0JBAZ001120 | IC | 5 | |
| IC7301-06 | C0JBAZ001120 | IC | 6 | |
| IC7401-06 | C0JBAZ001120 | IC | 6 | |
| IC7501-07 | C0JBAZ001120 | IC | 7 | |
| IC7511-16 | C0JBAZ001120 | IC | 6 | |
| IC7601-06 | C0JBAZ001120 | IC | 6 | |
| IC7700 | TVRP397 | IC | 1 | |
| IC7702 | C1CB00002668 | IC | 1 | |
| IC7703,04 | C0JBAR000358 | IC | 2 | |
| IC8001 | MN2WS0039A | IC | 1 | |
| IC8002,03 | C3ABSY000013 | C3ABSY000014 | 2 | A |
| IC8002,03 | C3ABSG000039 | IC | 2 | AZ/M/MR |
| IC8004 | C0ZBZ0001030 | IC | 1 | |
| IC8301 | C1AB00002710 | IC | 1 | A |
| IC8302 | C0CBCAD00082 | IC | 1 | A |
| IC8554 | TVRP559 | IC | 1 | A |
| IC8554 | TVRP558 | IC | 1 | AZ/M/MR |
| IC8601 | TVRP289 | IC | 1 | A |
| IC8601 | TVRP288 | IC | 1 | AZ |
| IC8601 | TVRP286 | IC | 1 | M |
| IC8601 | TVRP287 | IC | 1 | MR |
| IC8621,22 | C0JBAZ002845 | IC | 2 | |
| IC9001 | TVRP626 | IC | 1 | |
| IC9002 | C1ZBZ0003577 | IC | 1 | |
| IC9003 | TVRP068-7 | IC | 1 | |
| IC9007 | TVRP584 | IC | 1 | |
| IC9011 | C0EBF0000431 | IC | 1 | |
| IC9200 | C1ZBZ0003600 | IC | 1 | |
| IC9300 | MN84524 | IC | 1 | |
| IC9301 | C3ABQJ000055 | IC | 1 | |
| IC9304 | TVRP627 | IC | 1 | |
| IC9400 | MN84524 | IC | 1 | |
| IC9401 | C3ABQJ000055 | IC | 1 | |
| IC9402 | C0JBAZ002614 | IC | 1 | |
| IC9500 | C1ZBZ0003575 | IC | 1 | |
| IC9503-05 | C0JBAZ001120 | IC | 3 | |
| IC9603 | C0JBAZ002183 | IC | 1 | |
| IC9800 | C0DBAYY00054 | IC | 1 | |
| IC9802,03 | C0JBAZ001120 | IC | 2 | |
| IC9806 | C0DBAHD00011 | IC | 1 | |
| IC9807 | C0DBAYY00054 | IC | 1 | |
| IC9809 | C0DBAYY00054 | IC | 1 | |
| JG04 | K1KA14A00248 | 14P CONNECTOR | 1 | |
| JG08 | K1KB21BA0063 | 21P CONNECTOR | 1 | |
| JG09 | K1KA09AA0665 | 9P CONNECTOR | 1 | |
| JG10 | K1KA10AA0666 | 10P CONNECTOR | 1 | |
| JG11 | K1KA04A00554 | 4P CONNECTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| JG19 | K1KA06A00508 | 6P CONNECTOR | 1 | |
| | | | | |
| JK2003 | K2HA204A0053 | JACK | 1 | |
| JK3001 | K1FB315A0006 | CONNECTOR | 1 | |
| JK3100 | K1U936A00002 | CONNECTOR UNIT | 1 | |
| JK3701C | K4AK18B00003 | TERMINAL | 1 | |
| JK4500,01 | K1FY119D0002 | CONNECTOR | 2 | |
| JK7702 | K1NA09E00088 | 9P CONNECTOR | 1 | |
| | | | | |
| JS1,S2 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 2 | |
| JS1100 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| JS1109 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | M |
| JS1110 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | MR |
| JS1111 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | AZ |
| JS1112 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | A |
| JS2031-33 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| JS2046 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2048,49 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| JS2051 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2059-62 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| JS2064 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2096 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2098 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2101 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS2300,01 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| JS2513 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3000 | J0JCC0000100 | CHIP INDUCTOR | 1 | AZ/M |
| JS3002 | J0JCC0000100 | CHIP INDUCTOR | 1 | A |
| JS3004 | J0JCC0000100 | CHIP INDUCTOR | 1 | MR |
| JS3010-15 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 6 | |
| JS3023,24 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| JS3032 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3206 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3208 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3209 | J0JCC0000100 | CHIP INDUCTOR | 1 | AZ/M |
| JS3213 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| JS3702 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS3704,05 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 2 | |
| JS3707,08 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 2 | |
| JS3816 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| JS4001-03 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 3 | |
| JS4005 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| JS4007 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| JS4501 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| JS5000-09 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 10 | |
| JS5020-23 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| JS7700 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| | | | | |
| K1 | K1KY12B00001 | 12P CONNECTOR | 1 | |
| | | | | |
| L1100 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L1501,02 | J0JHC0000045 | CHIP INDUCTOR | 2 | |
| L1505-08 | J0JHC0000045 | CHIP INDUCTOR | 4 | |
| L1510 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L1511 | G1C3R3ZA0083 | INDUCTION COIL | 1 | |
| L1512 | G1C2R2ZA0083 | INDUCTION COIL | 1 | |
| L1513 | G1C100MA0203 | INDUCTION COIL | 1 | |
| L1514 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L1515 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L1522 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| L1523-28 | J0JHC0000045 | CHIP INDUCTOR | 6 | |
| L1530 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L1531 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L1533 | G1C1R5ZA0083 | INDUCTION COIL | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| L1534 | G1C100MA0203 | INDUCTION COIL | 1 | |
| L1535 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L2001,02 | J0JCC0000364 | CHIP INDUCTOR | 2 | |
| L2003,04 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L2007,08 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L2011,12 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L2015,16 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L2021 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2022 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| L2026 | G1C6R8MA0061 | INDUCTOR COIL | 1 | |
| L2027 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L2029 | J0JCC0000077 | CHIP INDUCTOR | 1 | |
| L2034,35 | J0JCC0000364 | CHIP INDUCTOR | 2 | |
| L2039,40 | J0JHC0000045 | CHIP INDUCTOR | 2 | |
| L2300-07 | G1C330MA0291 | INDUCTION COIL | 8 | |
| L2308-10 | J0JJC0000011 | CHIP INDUCTOR | 3 | |
| L2647 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| L2648 | G1C470MA0077 | INDUCTION COIL | 1 | |
| L2649 | G1C100MA0072 | INDUCTION COIL | 1 | |
| L2650 | G1C3R3ZA0083 | INDUCTION COIL | 1 | |
| L3001-03 | J0JCC0000100 | BEAD CHOKE | 3 | |
| L3010 | J0JCC0000100 | BEAD CHOKE | 1 | |
| L3013 | J0JCC0000100 | BEAD CHOKE | 1 | |
| L3206-08 | J0JCC0000241 | CHIP INDUCTOR | 3 | |
| L3209 | J0JGC0000021 | CHIP INDUCTOR | 1 | |
| L3211 | J0JGC0000021 | CHIP INDUCTOR | 1 | |
| L3219,20 | J0JCC0000241 | CHIP INDUCTOR | 2 | A/M |
| L3222 | J0JGC0000021 | CHIP INDUCTOR | 1 | A/M |
| L3223,24 | J0JCC0000241 | CHIP INDUCTOR | 2 | A/M |
| L3225,26 | J0JCC0000241 | CHIP INDUCTOR | 2 | |
| L3227 | J0JGC0000021 | CHIP INDUCTOR | 1 | A/M |
| L3700,01 | J0JCC0000364 | CHIP INDUCTOR | 2 | |
| L3707,08 | J0JCC0000100 | BEAD CHOKE | 2 | |
| L3801 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L3804,05 | J0JHC0000045 | CHIP INDUCTOR | 2 | |
| L4002 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L4004 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4006 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L4008 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4500-08 | J0JHC0000078 | CHIP INDUCTOR | 9 | |
| L4511 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4512 | J0JCC0000077 | CHIP INDUCTOR | 1 | |
| L4516-18 | J0JHC0000078 | CHIP INDUCTOR | 3 | |
| L4520,21 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L4524 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5000 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5001 | TALC168T100K | CHIP INDUCTOR COIL | 1 | |
| | | | | |
| L5002,03 | J0JCC0000077 | CHIP INDUCTOR | 2 | |
| L5004-06 | J0JHC0000078 | CHIP INDUCTOR | 3 | |
| L5015 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5017,18 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L5019,20 | J0JCC0000077 | CHIP INDUCTOR | 2 | |
| L5021 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L5024 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5401 | G0C101KA0167 | PEAKING COIL | 1 | |
| L5550 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5551,52 | G0C150MA0056 | PEAKING COIL | 2 | |
| L5553 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5554,55 | G0C150MA0056 | PEAKING COIL | 2 | |
| L5564 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5565 | G0A220GA0002 | CHOKE COIL | 1 | |
| L5566-68 | TALL08N2R7MA | INDUCTION COIL | 3 | |
| L5600,01 | G1C2R2ZA0083 | INDUCTION COIL | 2 | |
| L5602 | G1C3R3ZA0083 | INDUCTION COIL | 1 | |
| L5604 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L5605 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L5606 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L5610,11 | J0JHC0000035 | CHIP INDUCTOR | 2 | |
| L5670 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5690,91 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L5692 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L5735 | J0JHC0000078 | CHIP INDUCTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|---------------|-------------------------|-----|---------|
| L5900 | G1C2R2ZA0083 | INDUCTION COIL | 1 | |
| L5901 | G1C3R3ZA0083 | INDUCTION COIL | 1 | |
| L5904 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L5905 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L6002-06 | G0CR60KA0118 | PEAKING COIL | 5 | |
| L6012-16 | G0C1R4KA0118 | PEAKING COIL | 5 | |
| L6064-75 | G0ZZ00002183 | PEAKING COIL | 12 | |
| L6085-87 | G0ZZ00002183 | PEAKING COIL | 3 | |
| L6089-91 | G0ZZ00002183 | PEAKING COIL | 3 | |
| L6093-95 | G0ZZ00002183 | PEAKING COIL | 3 | |
| L6101-06 | J0JJC0000011 | CHIP INDUCTOR | 6 | |
| L6109 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6211-13 | J0JJC0000011 | CHIP INDUCTOR | 3 | |
| L6221,22 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6241 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6262 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6271 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6291 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6398,99 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6401-07 | G0CR60KA0118 | PEAKING COIL | 7 | |
| L6411-15 | G0C1R4KA0118 | PEAKING COIL | 5 | |
| L6441-44 | G0ZZ00002183 | PEAKING COIL | 4 | |
| L6455-58 | G0ZZ00002183 | PEAKING COIL | 4 | |
| L6461-68 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6472,73 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6481-88 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6491-98 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6591,92 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6601,02 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6801,02 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6841 | J0JJC0000011 | CHIP INDUCTOR | 1 | |
| L7702 | J0JCC0000364 | CHIP INDUCTOR | 1 | |
| L7704 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L7706 | J0JCC0000143 | CHIP INDUCTOR | 1 | |
| L8001-05 | J0JHC0000045 | CHIP INDUCTOR | 5 | |
| L8006 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| L8007-10 | J0JHC0000045 | CHIP INDUCTOR | 4 | |
| L8301,02 | J0JHC0000045 | CHIP INDUCTOR | 2 | A |
| L8304 | J0JHC0000045 | CHIP INDUCTOR | 1 | A |
| L8551 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L8621 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L8801 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8802 | J0JCC0000100 | BEAD CHOKE | 1 | |
| L9501,02 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L9503 | G1C150KA0038 | INDUCTION COIL | 1 | |
| L9504,05 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L9800 | G1C3R0MA0248 | INDUCTION COIL | 1 | |
| L9801,02 | G1C2R2MA0241 | INDUCTION COIL | 2 | |
| L9810 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| PA3 | K1KA40AA0009 | 40P CONNECTOR | 1 | |
| PA5 | K1KA11AA0194 | 11P CONNECTOR | 1 | |
| PA9 | K1KA04AA0190 | 4P CONNECTOR | 1 | |
| PA10 | K1KA06AA00452 | 6P CONNECTOR | 1 | |
| PA32 | K1KA03AA0192 | 3P CONNECTOR | 1 | |
| PA34 | K1KA03AA0192 | 3P CONNECTOR | 1 | |
| PA36 | K1KA03AA0192 | 3P CONNECTOR | 1 | |
| PA3401 | K5H8012A0023 | FUSE | 1 | |
| PA9800 | K5H4022A0023 | FUSE | 1 | |
| PC2511 | B3JB00000026 | IC | 1 | |
| PC6480 | B3PBA0000223 | IC | 1 | |
| PC6610 | B3PBA0000223 | IC | 1 | |
| PC6701-03 | B3PBA0000233 | IC | 3 | |
| PC6704 | B3PBA0000234 | IC | 1 | |
| PC6705 | B3PBA0000233 | IC | 1 | |
| PC6760 | B3PBA0000223 | IC | 1 | |
| PC6801 | B3PBA0000223 | IC | 1 | |
| PC6861 | B3PBA0000223 | IC | 1 | |
| PC6871 | B3PBA0000223 | IC | 1 | |
| PCB | TNPA4279AD | CIRCUIT BOARD H | 1 | A △ |
| PCB | TNPA4279AB | CIRCUIT BOARD H | 1 | AZ/M △ |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| PCB | TXN/H1HGTX | CIRCUIT BOARD H | 1 | MR △ |
| PCB | TXNDG1HGTA | CIRCUIT BOARD DG | 1 | A △ |
| PCB | TXNDG1HGTP | CIRCUIT BOARD DG | 1 | AZ △ |
| PCB | TXNDG1HGTM | CIRCUIT BOARD DG | 1 | M △ |
| PCB | TXNDG1HGTX | CIRCUIT BOARD DG | 1 | MR △ |
| PCB | TNPA4458AD | CIRCUIT BOARD DH | 1 | △ |
| PCB | TNPA4225AF | CIRCUIT BOARD JG | 1 | △ |
| PCB | TNPA4274AG | CIRCUIT BOARD PA | 1 | △ |
| PCB | ETXMM625MGHA | CIRCUIT BOARD P | 1 | △ |
| PCB | TNPA3994 | CIRCUIT BOARD C1 | 1 | △ |
| PCB | TNPA3995 | CIRCUIT BOARD C2 | 1 | △ |
| PCB | TNPA3996 | CIRCUIT BOARD C3 | 1 | △ |
| PCB | TNPA3997 | CIRCUIT BOARD C4 | 1 | △ |
| PCB | TNPA3998 | CIRCUIT BOARD C5 | 1 | △ |
| PCB | TNPA3999 | CIRCUIT BOARD C6 | 1 | △ |
| PCB | TZTNP01HGTA | CIRCUIT BOARD D | 1 | △ |
| PCB | TNPA4042AB | CIRCUIT BOARD SD | 1 | △ |
| PCB | TNPA4001AB | CIRCUIT BOARD SC | 1 | △ |
| PCB | TNPA4002AB | CIRCUIT BOARD SS | 1 | △ |
| PCB | TNPA3841 | CIRCUIT BOARD SS2 | 1 | △ |
| PCB | TNPA3842 | CIRCUIT BOARD SS3 | 1 | △ |
| PCB | TNPA4000AB | CIRCUIT BOARD SU | 1 | △ |
| PCB | TNPA4262AD | CIRCUIT BOARD G | 1 | △ |
| PCB | TNPA4135AF | CIRCUIT BOARD GH | 1 | △ |
| PCB | TNPA4137AE | CIRCUIT BOARD K | 1 | △ |
| PCB | TNPA4138AD | CIRCUIT BOARD S | 1 | △ |
| PCB | TXNGS1HGTA | CIRCUIT BOARD GS | 1 | △ |
| Q1107,08 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q1500,01 | 2SC584500L | TRANSISTOR | 2 | |
| Q1505,06 | B1MBEDA00015 | TRANSISTOR | 2 | |
| Q1511 | B1MBEDA00015 | TRANSISTOR | 1 | |
| Q2000,01 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q2002,03 | 2SC584500L | TRANSISTOR | 2 | |
| Q2015 | 2SA207700L | TRANSISTOR | 1 | |
| Q2016,17 | 2SC584500L | TRANSISTOR | 2 | |
| Q2021 | 2SA207700L | TRANSISTOR | 1 | |
| Q2031 | 2SA207700L | TRANSISTOR | 1 | |
| Q2033 | 2SA207700L | TRANSISTOR | 1 | |
| Q2034,35 | 2SC584500L | TRANSISTOR | 2 | |
| Q2039-42 | 2SC584500L | TRANSISTOR | 4 | |
| Q2101,02 | 2SC584500L | TRANSISTOR | 2 | |
| Q2301 | 2SA207700L | TRANSISTOR | 1 | |
| Q2510,11 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q2513 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q2635 | 2SC584500L | TRANSISTOR | 1 | |
| Q2636,37 | 2SA207700L | TRANSISTOR | 2 | |
| Q2638 | 2SC584500L | TRANSISTOR | 1 | |
| Q2639 | 2SK3065T100 | FET | 1 | |
| Q3031,32 | 2SC584500L | TRANSISTOR | 2 | |
| Q3200 | 2SA207700L | TRANSISTOR | 1 | |
| Q3201 | 2SA207700L | TRANSISTOR | 1 | AZ/M |
| Q3401,02 | 2SC584500L | TRANSISTOR | 2 | |
| Q3801,02 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q3804 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q4000-02 | 2SA207700L | TRANSISTOR | 3 | |
| Q4500-05 | 2SD0601ARL | TRANSISTOR | 6 | |
| Q4514-17 | 2SB0709ARL | TRANSISTOR | 4 | |
| Q4520 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q5000,01 | B1CBHD000002 | FET | 2 | |
| Q5501,02 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q5521,22 | 2SA207700L | TRANSISTOR | 2 | |
| Q5523,24 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q5561 | B1DHDC000028 | TRANSISTOR | 1 | |
| Q5562 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q5600-02 | B1MBEDA00015 | TRANSISTOR | 3 | |
| Q5603,04 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q5690,91 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q5692,93 | B1DHDC000028 | TRANSISTOR | 2 | |
| Q5901,02 | B1MBEDA00015 | TRANSISTOR | 2 | |
| Q6002-06 | 2PG0010000RP | TRANSISTOR | 5 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| Q6022-26 | 2PG0010000RP | TRANSISTOR | 5 | |
| Q6042-44 | 2PG0010000RP | TRANSISTOR | 3 | |
| Q6053,54 | 2PG0010000RP | TRANSISTOR | 2 | |
| Q6101-06 | B1DFKM000002 | TRANSISTOR | 6 | |
| Q6111 | B1DFKM000002 | TRANSISTOR | 1 | |
| Q6112 | B1DFKM000001 | TRANSISTOR | 1 | |
| Q6114 | B1DFKM000001 | TRANSISTOR | 1 | |
| Q6115 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6116 | B1DFKM000001 | TRANSISTOR | 1 | |
| Q6141 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6142 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6143 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6144 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6146 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6147 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6148 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6149 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6151 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6152 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6171 | B1ABRD000003 | TRANSISTOR | 1 | |
| Q6172 | B1ABRD000001 | TRANSISTOR | 1 | |
| Q6173 | B1ABRD000003 | TRANSISTOR | 1 | |
| Q6174 | B1ABRD000001 | TRANSISTOR | 1 | |
| Q6183 | B1ABRD000003 | TRANSISTOR | 1 | |
| Q6184 | B1ABRD000001 | TRANSISTOR | 1 | |
| Q6191 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6192 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6211 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6212 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6222 | 2SC3063 | TRANSISTOR | 1 | |
| Q6251 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6256 | 2SD1263A | TRANSISTOR | 1 | |
| Q6281 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6282 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6401-05 | 2PG0010000RP | TRANSISTOR | 5 | |
| Q6421,22 | 2PG0030000RP | TRANSISTOR | 2 | |
| Q6424,25 | 2PG0030000RP | TRANSISTOR | 2 | |
| Q6442-44 | 2PG0010000RP | TRANSISTOR | 3 | |
| Q6453,54 | 2PG0030000RP | TRANSISTOR | 2 | |
| Q6511 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6512 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6513 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6514 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6516 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6517 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6518 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6519 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6531 | B1ABRD000003 | TRANSISTOR | 1 | |
| Q6532 | B1ABRD000001 | TRANSISTOR | 1 | |
| Q6533 | B1ABRD000003 | TRANSISTOR | 1 | |
| Q6534 | B1ABRD000001 | TRANSISTOR | 1 | |
| Q6553 | B1ABRD000003 | TRANSISTOR | 1 | |
| Q6554 | B1ABRD000001 | TRANSISTOR | 1 | |
| Q6581 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6601 | B1DFES000003 | TRANSISTOR | 1 | |
| Q6602 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6621-29 | 2SK399500L | FET | 9 | |
| Q6634,35 | 2SK399500L | FET | 2 | |
| Q6641-55 | 2SK399500L | FET | 15 | |
| Q6661 | B1DEET000002 | TRANSISTOR | 1 | |
| Q6662 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6663 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6671-74 | B1DFDR000001 | TRANSISTOR | 4 | |
| Q6679 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6680 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6681,82 | 2SK389500L | FET | 2 | |
| Q6691 | 2SK620 | FET | 1 | |
| Q6742,43 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q6744 | 2SK620 | FET | 1 | |
| Q6762 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6781 | B1ABPF000014 | TRANSISTOR | 1 | |
| Q6782 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6783 | B1ABPF000014 | TRANSISTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| Q6784 | B1ADPF000004 | TRANSISTOR | 1 | |
| Q6791 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6803 | 2SD814A | TRANSISTOR | 1 | |
| Q6821 | 2SD1263A | TRANSISTOR | 1 | |
| Q6822 | 2SC3063 | TRANSISTOR | 1 | |
| Q6824 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q6841 | 2SD1263A | TRANSISTOR | 1 | |
| Q6842 | 2SC1473AEA | TRANSISTOR | 1 | |
| Q7700 | 2SB0709ARL | TRANSISTOR | 1 | |
| Q7701 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q8850 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q8852,53 | 2SD0601ARL | TRANSISTOR | 2 | |
| Q8911-13 | 2SD0601ARL | TRANSISTOR | 3 | |
| Q9044 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q9046 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q9050-54 | 2SD0601ARL | TRANSISTOR | 5 | |
| Q9057,58 | B1CBHD000002 | FET | 2 | |
| Q9100 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q9200,01 | B1CBHD000002 | FET | 2 | |
| Q9300-06 | 2SD0601ARL | TRANSISTOR | 7 | |
| Q9800,01 | B1MBEDA00015 | TRANSISTOR | 2 | |
| Q9803 | B1MBEDA00015 | TRANSISTOR | 1 | |
| Q9805,06 | 2SD0601ARL | TRANSISTOR | 2 | |
| | | | | |
| R1100 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1101 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1102 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1103 | ERJ2RKD330 | M 33 OHM, J,0.063W | 1 | |
| R1104 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1105-09 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 5 | |
| R1122 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1124,25 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1134 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1144 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1146 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R1147 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1153 | ERJ2GEJ821 | M 820 OHM, J,0.063W | 1 | |
| R1162 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1163 | ERJ2GEJ105 | M 1MOHM, J,0.063W | 1 | |
| R1164 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1165 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 1 | |
| R1166 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1169 | ERJ2GED563X | M 56KOHM, J,0.063W | 1 | |
| R1170 | ERJ2GEJ273 | M 27KOHM, J,0.063W | 1 | |
| R1171 | ERJ2GED563X | M 56KOHM, J,0.063W | 1 | |
| R1172 | ERJ2GEJ273 | M 27KOHM, J,0.063W | 1 | |
| R1173 | ERJ6GENF2000 | M 200 OHM,J,1/10W | 1 | |
| R1174,75 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1179 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1181 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1182 | ERJ2GEJ273 | M 27KOHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R1183,84 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1194 | ERJ2GED563X | M 56KOHM ,J,0.063W | 1 | |
| R1195 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1196 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R1199 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1200,01 | ERJ2GEJ562 | M 5.6KOHM, J,0.063W | 2 | |
| R1203 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1204 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1205,06 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1209 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1216 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R1217 | ERJ2GED563X | M 56KOHM ,J,0.063W | 1 | |
| R1218-20 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R1221 | ERJ3EKF7151 | M 7.15KOHM, 1/16W | 1 | |
| R1222,23 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |
| R1225-28 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 4 | |
| R1229 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1231-34 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 4 | |
| R1235 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1236,37 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |
| R1243 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1255 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R1500,01 | D1HG5608A002 | NETWORK RESISTER | 2 | |
| R1502-04 | EXB2HV101J | RESISTOR ARRAY | 3 | |
| R1505-18 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 14 | |
| R1519-28 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 10 | |
| R1529-32 | D1HG1218A002 | NETWORK RESISTER | 4 | |
| R1533-44 | ERJ2GEJ121 | M 120 OHM, J,0.063W | 12 | |
| R1545 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1546,47 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R1548 | EXB38V560JV | RESISTOR ARRAY | 1 | |
| R1549,50 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 2 | |
| R1551 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1552 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1553 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1554 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1555-57 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 3 | |
| R1558 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1559-61 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 3 | |
| R1562,63 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1564,65 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1566 | ERJ2RKD330 | M 33 OHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R1567 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1568 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R1573 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1574-82 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 9 | |
| R1584-89 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 6 | |
| R1591 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1592 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1593 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1594 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1595 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1596,97 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 2 | |
| R1598-00 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R1601 | D1HG1038A002 | NETWORK RESISTER | 1 | |
| R1602,03 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1604 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R1606,07 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1608-13 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 6 | |
| R1614 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R1615-17 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 3 | |
| R1618,19 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1620 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1621,22 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1623 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1624-30 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 7 | |
| R1632-36 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 5 | |
| R1637 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1638 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R1639,40 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1641 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1643,44 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1649,50 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1651 | D1HG1008A002 | NETWORK RESISTER | 1 | |
| R1652 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1654 | ERJ2GEJ331 | M 330 OHM, J,0.063W | 1 | |
| R1655 | ERJ2GEJ153 | M 15KOHM ,J,0.063W | 1 | |
| R1656 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R1658 | D1BA1601A026 | M 1.6KOHM, 1/10W | 1 | |
| R1659,60 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1661 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R1662 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1663 | ERJ2GEJ153 | M 15KOHM ,J,0.063W | 1 | |
| R1664 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R1666 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1667 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1669 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1670 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1671 | EXB38V103JV | RESISTOR ARRAY | 1 | |
| R1672 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1673 | ERJ2RKD330 | M 33 OHM, J,0.063W | 1 | |
| R1674 | EXB38V560JV | RESISTOR ARRAY | 1 | |
| R1675,76 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 2 | |
| R1677 | EXB38V330J | RESISTOR ARRAY | 1 | |
| R1678,79 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R1680,81 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1682 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R1691 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1694,95 | ERJ2RKD330 | M 33 OHM, J,0.063W | 2 | |
| R1696-99 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R1700 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R1701 | ERJ3GEYJ301 | M 300 OHM, J,1/16W | 1 | |
| R1702-04 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 3 | |
| R1705 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1706 | ERJ3GEYJ301 | M 300 OHM, J,1/16W | 1 | |
| R1707,08 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 2 | |
| R1709,10 | ERJ3EKF2700 | M 270 OHM, 1/16W | 2 | |
| R1713,14 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R1717-20 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R1722 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1723,24 | ERJ3EKF2700 | M 270 OHM, 1/16W | 2 | |
| R1727,28 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R1731-34 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R1735,36 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1737-40 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 4 | |
| R1741-62 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 22 | |
| R1763-02 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 40 | |
| R1803-24 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 22 | |
| R1825-65 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 41 | |
| R1888 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1891 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R1893 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 1 | |
| R1894 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1899 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1903 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1904 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1906 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 1 | |
| R1907 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R1909 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1911 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1912,13 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 2 | |
| R1914,15 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1916,17 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R1923 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R1924 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1926 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R1927,28 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R1929 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R1930 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R1931 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R1932,33 | ERJ2GEJ181 | M 180 OHM, J,0.063W | 2 | |
| R1934 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 1 | |
| R1936 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R1937 | ERJ3EKF2322 | M 23.2KOHM, 1/16W | 1 | |
| R1938 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1939 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R1940 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1942 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R1943,44 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R1945 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R1946 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R1947 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R1949 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R1955-57 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R1967-69 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R1973-75 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R1979-81 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R2001 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R2006 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R2007 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R2010-15 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 6 | |
| R2018 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R2020-23 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 4 | |
| R2024 | ERJ2RKD330 | M 33 OHM, J,0.063W | 1 | |
| R2025 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R2027 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R2028 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R2029-34 | ERJ6GEYJ184 | M 180KOHM, J,1/10W | 6 | |
| R2047 | ERJ3GEYJ331 | M 330 OHM, J,1/16W | 1 | |
| R2048 | ERJ3GEYJ222 | M 2.2KOHM, J,1/16W | 1 | |
| R2049 | ERJ3GEYJ331 | M 330 OHM, J,1/16W | 1 | |
| R2050 | ERJ3GEYJ222 | M 2.2KOHM, J,1/16W | 1 | |
| R2051,52 | ERJ6GEYJ184 | M 180KOHM, J,1/10W | 2 | |
| R2053,54 | ERJ3GEYJ104 | M 100KOHM, J,1/16W | 2 | |
| R2056,57 | ERJ3GEYJ220 | M 22 OHM, J,1/16W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R2058 | ERJ3GEYJ301 | M 300 OHM,J,1/16W | 1 | |
| R2059 | D0GB105JA057 | M 1MOHM,J,1/16W | 1 | |
| R2084 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2085 | ERJ3GEYJ561 | M 560 OHM,J,1/16W | 1 | |
| R2086 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2088 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2089 | ERJ3GEYJ561 | M 560 OHM,J,1/16W | 1 | |
| R2092 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2093 | ERJ3GEYJ332 | M 3.3KOHM,J,1/16W | 1 | |
| R2094 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R2096 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2097 | ERJ3GEYJ332 | M 3.3KOHM,J,1/16W | 1 | |
| R2098,99 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R2100 | ERJ3EKF2002 | M 20KOHM, 1/16W | 1 | |
| R2104 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R2106 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2110 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2111 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2112 | D0GB105JA057 | M 1MOHM,J,1/16W | 1 | |
| R2113 | ERJ3EKF1203 | M 120KOHM, 1/16W | 1 | |
| R2114 | ERJ3EKF7502 | M 75KOHM, 1/16W | 1 | |
| R2116,17 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R2118 | D0GB105JA057 | M 1MOHM,J,1/16W | 1 | |
| R2119 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2122 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2123 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R2124 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2125 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R2127 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2128 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R2129 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2131 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2132 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R2137,38 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2143,44 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R2145,46 | ERJ3EKF2002 | M 20KOHM, 1/16W | 2 | |
| R2149 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2150,51 | ERJ3EKF2002 | M 20KOHM, 1/16W | 2 | |
| R2152 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2154 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2156 | ERJ3GEYJ331 | M 330 OHM,J,1/16W | 1 | |
| R2160 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2162 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2164 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2165 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2166 | ERJ3EKF1602 | M16.0KOHM, 1/16W | 1 | |
| R2167 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2168 | ERJ3EKF1602 | M16.0KOHM, 1/16W | 1 | |
| R2169 | ERJ3EKF2202 | M 22KOHM, 1/16W | 1 | |
| R2170-75 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 6 | |
| R2178 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R2179 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2180 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R2181 | ERJ3EKF2202 | M 22KOHM, 1/16W | 1 | |
| R2182,83 | ERJ3EKF3602 | M 36KOHM, 1/16W | 2 | |
| R2184,85 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 2 | |
| R2186 | ERJ3GEYJ823 | M 82KOHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R2187 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R2189 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2192,93 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 2 | |
| R2194 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R2195,96 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 2 | |
| R2197 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R2198 | ERJ3EKF1583 | M 158KOHM, 1/16W | 1 | |
| R2205 | ERJ3GEYJ203 | M 20KOHM,J,1/16W | 1 | |
| R2206 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2208-10 | D0GB103JA057 | M 10KOHM,J,1/16W | 3 | |
| R2216 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2217 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R2218 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R2220 | D0GB123JA057 | M 12KOHM,J,1/16W | 1 | |
| R2223-25 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R2227-32 | J0JCC0000100 | CHIP INDUCTOR | 6 | |
| R2233 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2235 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R2236,37 | D0GB102JA057 | M 1KOHM,J,1/16W | 2 | |
| R2239 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2242 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2257 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2263 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2265 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2266 | ERJ3GEYJ561 | M 560 OHM,J,1/16W | 1 | |
| R2270,71 | EXB28V220J | RESISTOR ARRAY | 2 | |
| R2276 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2290,91 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R2294-97 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| R2301,02 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 2 | |
| R2305 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2306,07 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 2 | |
| R2308,09 | ERJ8GEYJ3R3V | M 3.3 OHM, J,1/8W | 2 | |
| R2311-16 | ERJ8GEYJ3R3V | M 3.3 OHM, J,1/8W | 6 | |
| R2317-26 | ERJ6GEYJ100V | M 10 OHM,J,1/10W | 10 | |
| R2330 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R2331 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R2506,07 | J0JCC0000096 | CHIP INDUCTOR | 2 | |
| R2512 | ERJ6GEYG470V | M 47 OHM,J,1/10W | 1 | |
| R2516 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R2517 | ERJ6GEYG470V | M 47 OHM,J,1/10W | 1 | |
| R2520 | ERJ3GEYJ224 | M 220KOHM,J,1/16W | 1 | |
| R2521 | ERJ6GEYG470V | M 47 OHM,J,1/10W | 1 | |
| R2524 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R2525 | ERJ3EKF5760 | M 576 OHM, 1/16W | 1 | |
| R2530 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R2531 | ERJ3GEYJ271 | M 270 OHM,J,1/16W | 1 | |
| R2542 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R2556,57 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 2 | |
| R2558 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R2575 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R2576,77 | J0JCC0000241 | CHIP INDUCTOR | 2 | |
| R2578,79 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R2601-03 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R2624,25 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R2628,29 | ERJ3GEYJ752 | M 7.5KOHM,J,1/16W | 2 | |
| R2853 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2854 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R2855 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R2856 | J0JCC0000100 | CHIP INDUCTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R2857 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2858 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R2859 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2860 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2861 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R2863,64 | D0GB102JA057 | M 1KOHM,J,1/16W | 2 | |
| R2865 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R2866 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R2867 | ERJ6ENF8202 | M 82KOHM, 1/10W | 1 | |
| R2868 | ERJ6ENF1602 | M 16KOHM, 1/10W | 1 | |
| R2869 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2890 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R3001-10 | ERJ6RED750 | M 75 OHM, 1/10W | 10 | |
| R3012 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3020-22 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 3 | |
| R3044,45 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R3059 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R3062-65 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 4 | |
| R3068 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3069 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R3072-74 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 3 | |
| R3086 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | AZ/M |
| R3087 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R3088 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | A |
| R3089 | ERJ3GEYJ331 | M 330 OHM,J,1/16W | 1 | |
| R3090 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R3096-01 | ERJ3GEYJ680 | M 68 OHM,J,1/16W | 6 | |
| R3102 | J0JCC0000100 | CHIP INDUCTOR | 1 | A/MR |
| R3103 | J0JCC0000021 | CHIP INDUCTOR | 1 | |
| R3104 | J0JCC0000100 | CHIP INDUCTOR | 1 | A/MR |
| R3105 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | AZ/M |
| R3107 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R3109 | J0JCC0000021 | CHIP INDUCTOR | 1 | |
| R3110 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3111 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R3112 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | AZ/M |
| R3113 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R3119 | ERJ3EKF1000 | M 100 OHM, 1/16W | 1 | |
| R3120 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R3121 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R3123 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R3130,31 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R3133 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R3135 | ERJ3EKF1000 | M 100 OHM, 1/16W | 1 | |
| R3137 | ERJ3EKF1000 | M 100 OHM, 1/16W | 1 | |
| R3140 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R3143 | ERJ6ENF69R8 | M 69.8OHM, 1/10W | 1 | |
| R3145 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R3168 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R3174-76 | ERJ3GEYJ680 | M 68 OHM,J,1/16W | 3 | |
| R3177 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R3180 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R3188 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3191 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R3202 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3205 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3206 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R3215 | J0JCC0000100 | CHIP INDUCTOR | 1 | AZ/M |
| R3216 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3222 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3227-29 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R3233,34 | ERJ6RED750 | M 75 OHM, 1/10W | 2 | |
| R3236-38 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R3239 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R3240 | ERJ3EKF5600 | M 560 OHM, 1/16W | 1 | |
| R3243 | ERJ6GEYG271 | M 270 OHM,J,1/10W | 1 | |
| R3244 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3246 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3247 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R3249 | D0GB152JA057 | M 1.5KOHM,J,1/16W | 1 | |
| R3250,51 | D0GB152JA057 | M 1.5KOHM,J,1/16W | 1 | AZ/M |
| R3252 | ERJ6GEYG271 | M 270 OHM,J,1/10W | 1 | AZ/M |
| R3253,54 | J0JCC0000100 | CHIP INDUCTOR | 2 | AZ/M |
| R3255 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | AZ/M |
| R3256 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | AZ/M |
| R3259 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | AZ/M |
| R3260 | ERJ3EKF5600 | M 560 OHM, 1/16W | 1 | AZ/M |
| R3266 | D0GB152JA057 | M 1.5KOHM,J,1/16W | 1 | |
| R3268 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | A/MR |
| R3302 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 1 | |
| R3305 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 1 | |
| R3306,07 | ERJ6GEYF472 | M 4.7KOHM,J,1/10W | 2 | |
| R3308,09 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 2 | |
| R3310 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3313 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3318 | ERJ6RED750 | M 75 OHM, 1/10W | 1 | |
| R3348,49 | ERJ3GEYJ680 | M 68 OHM,J,1/16W | 2 | |
| R3350 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3401 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R3402 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R3403 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R3404 | D0GB473JA057 | M 47KOHM,J,1/16W | 1 | |
| R3405 | ERJ3GEYD153V | M 15KOHM,J,1/16W | 1 | |
| R3709-11 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R3714 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3716,17 | ERJ6GEYJ184 | M 180KOHM,J,1/10W | 2 | |
| R3721 | ERJ6GEYG103 | M 10KOHM,J,1/10W | 1 | |
| R3722-25 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| R3732 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3746 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3748 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3750 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3751 | ERJ6ENF1432 | M14.3KOHM, 1/10W | 1 | |
| R3753 | ERJ6ENF1741 | M1.74KOHM, 1/10W | 1 | |
| R3754 | ERJ6ENF1621 | M1.62KOHM, 1/10W | 1 | |
| R3755 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3758 | ERJ6ENF6651 | M6.65KOHM, 1/10W | 1 | |
| R3765 | ERJ6ENF2321 | M2.32KOHM, 1/10W | 1 | |
| R3767 | ERJ6ENF3161 | M3.16KOHM, 1/10W | 1 | |
| R3768 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R3801,02 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R3803 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R3804,05 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R3806 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R3807,08 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R3809,10 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R3811 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R3812 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R3814 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R3815 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R3818 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R3819,20 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R3821 | ERJ2GEJ390 | M 39 OHM, J,0.063W | 1 | |
| R3822 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R3823 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R3824-31 | ERJ2GEJ2R7X | M 2.7OHM, J,0.063W | 8 | |
| R3832 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R3834 | ERJ3EKF49R9 | M 49.9 OHM, 1/16W | 1 | |
| R3835 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R3840,41 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R3851 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 1 | |
| R3852-54 | ERJ3EKF82R0 | M 82 OHM, 1/16W | 3 | |
| R3855 | ERJ3EKF5601 | M 5.6KOHM, 1/16W | 1 | |
| R3856 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R3858 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R3860 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R3865 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R3868,69 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R3871-73 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 3 | |
| R3874 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R3875 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R3876 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R3877,78 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R3880 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R3884 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R3885-87 | D1HG1038A002 | NETWORK RESISTER | 3 | |
| R3888,89 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R3890,91 | D1HG1038A002 | NETWORK RESISTER | 2 | |
| R3892 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R3893 | D1HG1038A002 | NETWORK RESISTER | 1 | |
| R3894-98 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 5 | |
| R3899-01 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 3 | |
| R3902,03 | D1HG5608A002 | NETWORK RESISTER | 2 | |
| R3904 | D1HG1038A002 | NETWORK RESISTER | 1 | |
| R3905-09 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 5 | |
| R3910,11 | D1HG1038A002 | NETWORK RESISTER | 2 | |
| R3912-17 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 6 | |
| R3918,19 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R3921-23 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R3924 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R3926 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R3927,28 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R3929 | D1BA3302A026 | M 33KOHM, 1/10W | 1 | |
| R3930 | D1BA5602A026 | M 56KOHM, 1/10W | 1 | |
| R3931 | D1BA3302A026 | M 33KOHM, 1/10W | 1 | |
| R3932 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R3933 | D1BA5602A026 | M 56KOHM, 1/10W | 1 | |
| R3934 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R3935 | ERJ2GEJ242 | M 2.4KOHM, J,0.063W | 1 | |
| R3937 | ERJ2GEJ242 | M 2.4KOHM, J,0.063W | 1 | |
| R3939,40 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R3942-44 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R3959 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R3960 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R3970-73 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R3975 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R3976 | ERJ3EKF2322 | M23.2KOHM, 1/16W | 1 | |
| R3977 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R3978 | ERJ3EKF2322 | M23.2KOHM, 1/16W | 1 | |
| R3979 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R3981-85 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 5 | |
| R3986 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R3987 | ERJ3EKF1272 | M12.7KOHM, 1/16W | 1 | |
| R3988 | ERJ3EKF4752 | M47.5KOHM, 1/16W | 1 | |
| R3989 | ERJ3EKF3002 | M 30KOHM, 1/16W | 1 | |
| R3995 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R3999 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4002,03 | EXB2HV680J | RESISTOR ARRAY | 2 | |
| R4004,05 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 2 | |
| R4006 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4007 | ERJ3EKF7500 | M 750 OHM, 1/16W | 1 | |
| R4010 | ERJ3EKF1821 | M1.82KOHM, 1/16W | 1 | |
| R4011,12 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4013 | ERJ2GEJ681 | M 680 OHM, J,0.063W | 1 | |
| R4014 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4016 | ERJ2GEJ681 | M 680 OHM, J,0.063W | 1 | |
| R4017 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4019 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4025 | DOGB202JA057 | M 2KOHM,J,1/16W | 1 | |
| R4028,29 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R4034 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4200-02 | ERJ2RKD330 | M 33 OHM, J,0.063W | 3 | |
| R4203,04 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R4205,06 | D1HG33080001 | NETWORK RESISTER | 2 | |
| R4207 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R4208,09 | D1HG33080001 | NETWORK RESISTER | 2 | |
| R4210 | ERJ2RKD330 | M 33 OHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R4229 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4230 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4241 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4244 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4246,47 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R4249 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4284 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4287,88 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |
| R4291,92 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R4302-08 | ERJ2RKD330 | M 33 OHM, J,0.063W | 7 | |
| R4309 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R4311,12 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R4317 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4320-23 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 4 | |
| R4325,26 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |
| R4328-30 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 3 | |
| R4500,01 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4502,03 | ERJ2RKD330 | M 33 OHM, J,0.063W | 2 | |
| R4506,07 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4508-23 | ERJ2GEJ2R2X | M 2.2OHM, J,0.063W | 16 | |
| R4524,25 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4526,27 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 2 | |
| R4528 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4529 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4530 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4531 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4532,33 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4535,36 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4538 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4539 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R4540 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4541-43 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R4544-47 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 4 | |
| R4552 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4561 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4562,63 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4564,65 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4567 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R4578,79 | ERJ2GEJ151 | M 150 OHM, J,0.063W | 2 | |
| R4585 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4587 | ERJ3GEYF821 | M 820 OHM, 1/16W | 1 | |
| R4593 | ERJ3EKF1001 | M 1KOHM, 1/16W | 1 | |
| R4596-98 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 3 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R4601 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 1 | |
| R4604 | ERJ3EKF7501 | M 7.5KOHM, 1/16W | 1 | |
| R4606 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R4611 | ERJ3EKF1371 | M 1.37KOHM, 1/16W | 1 | |
| R4612 | ERJ3EKF1501 | M 1.5KOHM, 1/16W | 1 | |
| R4613,14 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4615 | ERJ3EKF1600 | M 160 OHM, 1/16W | 1 | |
| R4622 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4624 | ERJ3EKF1691 | M 1.69KOHM, 1/16W | 1 | |
| R4626 | ERJ2GEJ105 | M 1MOHM, J,0.063W | 1 | |
| R4627 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4628,29 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R4631 | ERJ3EKF4990 | M 499 OHM, 1/16W | 1 | |
| R4634 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4635 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R4636-38 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R4639,40 | EXB28V680JX | RESISTOR ARRAY | 2 | |
| R4641 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4642 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R4643,44 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4645-47 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R4648 | EXB28V330J | RESISTOR ARRAY | 1 | |
| R4649 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R4650,51 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 2 | |
| R4652 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4653 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4654 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R4655 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4656 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R4657,58 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4659 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4661 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4663 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4665,66 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |
| R4667 | ERJ2GEJ151 | M 150 OHM, J,0.063W | 1 | |
| R4670 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R4672 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R4676-81 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 6 | |
| R4682 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R4683 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4686 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R4687,88 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4689-92 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R4694 | ERJ2RKD330 | M 33 OHM, J,0.063W | 1 | |
| R4698,99 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R4702,03 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R4706 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4707 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4708 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4800 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R4819, 20 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4832 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4833 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R4834 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4838 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4841 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R4842 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4844, 45 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R4846 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R4848 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R5000, 01 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 2 | |
| R5002-04 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 3 | |
| R5005 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R5007 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R5008 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R5009 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R5010 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R5011, 12 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R5013 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R5014-18 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 5 | |
| R5019, 20 | EXB2HV680J | RESISTOR ARRAY | 2 | |
| R5021-25 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 5 | |
| R5026 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R5027 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5028 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R5029, 30 | ERJ3EKF1000 | M 100 OHM, 1/16W | 2 | |
| R5031 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5032 | ERJ3EKF1001 | M 1KOHM, 1/16W | 1 | |
| R5033 | ERJ3EKF4751 | M 4.75KOHM, 1/16W | 1 | |
| R5034 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R5035 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R5036 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5038 | ERJ2GEJ105 | M 1MOHM, J,0.063W | 1 | |
| R5039-41 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 3 | |
| R5043, 44 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R5045 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R5046 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5048 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5051-54 | D1HG8208A002 | NETWORK RESISTER | 4 | |
| R5055-58 | EXB2HV221JV | RESISTOR ARRAY | 4 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R5059-64 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 6 | |
| R5065, 66 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R5067 | JOJCC0000100 | CHIP INDUCTOR | 1 | |
| R5068, 69 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 2 | |
| R5070-72 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 3 | |
| R5087 | ERJ3EKF5601 | M 5.6KOHM, 1/16W | 1 | |
| R5088 | ERJ3EKF1001 | M 1KOHM, 1/16W | 1 | |
| R5091 | ERJ3EKF3302 | M 33KOHM, 1/16W | 1 | |
| R5092 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5117 | ERJ3EKF3302 | M 33KOHM, 1/16W | 1 | |
| R5118 | ERJ3EKF3242 | M32.4KOHM, 1/16W | 1 | |
| R5119, 20 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R5121 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R5122 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R5123 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R5124 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R5125 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R5126 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R5127 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R5128 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R5129 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R5130, 31 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 2 | |
| R5132, 33 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R5134 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R5135 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R5136, 37 | ERJ3EKF1001 | M 1KOHM, 1/16W | 2 | |
| R5138-42 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 5 | |
| R5169 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R5170 | ERJ3EKF3242 | M32.4KOHM, 1/16W | 1 | |
| R5172 | ERJ3EKF1690 | M 169 OHM, 1/16W | 1 | |
| R5173, 74 | ERJ3GEYJ121 | M 120 OHM, J,1/16W | 2 | |
| R5176 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R5179 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5181 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5183, 84 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R5191 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5194 | DOYAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5196 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 1 | |
| R5197, 98 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R5199-02 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 4 | |
| R5203 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | |
| R5204 | D0GB103JA057 | M 10KOHM, J,1/16W | 1 | |
| R5205, 06 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R5214 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5215-34 | ERJ3GEYJ121 | M 120 OHM, J,1/16W | 20 | |
| R5235-44 | ERJ3EKF1690 | M 169 OHM, 1/16W | 10 | |
| R5246 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R5248 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R5249 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R5250 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R5251 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R5300,01 | D1HG8208A002 | NETWORK RESISTER | 2 | |
| R5302-08 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 7 | |
| R5318 | ERJ2GEJ821 | M 820 OHM, J,0.063W | 1 | |
| R5319 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R5329 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5337 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 1 | |
| R5338 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5339 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5340 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R5342-44 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R5345,46 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 2 | |
| R5347 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5402 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5404 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5406 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5409 | ERJ6ENF4702 | M 47KOHM, 1/10W | 1 | |
| R5412 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5413 | ERJ6GEYJ471 | M 470 OHM, J,1/10W | 1 | |
| R5416 | ERJ6ENF2741 | M2.74KOHM, 1/10W | 1 | |
| R5417 | ERJ6ENF9100 | M 910 OHM, 1/10W | 1 | |
| R5418 | ERJ6ENF2202 | M 2.2KOHM, 1/10W | 1 | |
| R5420 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R5423 | ERJ6GEYG102 | M 1KOHM, J,1/10W | 1 | |
| R5443 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R5485 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R5502,03 | ERJ6ENF1271 | M1.27KOHM, 1/10W | 2 | |
| R5506,07 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 2 | |
| R5508 | ERJ6GEYF473 | M 47KOHM, J,1/10W | 1 | |
| R5509 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R5525,26 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 2 | |
| R5527 | ERJ6GEYF473 | M 47KOHM, J,1/10W | 1 | |
| R5531 | ERJ6GEYG222 | M 2.2KOHM, J,1/10W | 1 | |
| R5532 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5533 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 1 | |
| R5534 | ERJ6GEYF473 | M 47KOHM, J,1/10W | 1 | |
| R5535 | ERJ6GEYG222 | M 2.2KOHM, J,1/10W | 1 | |
| R5536 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5537 | ERJ6GEYG681 | M 680 OHM, J,1/10W | 1 | |
| R5538 | ERJ6GEYG222 | M 2.2KOHM, J,1/10W | 1 | |
| R5540 | ERJ6GEYJ471 | M 470 OHM, J,1/10W | 1 | |
| R5542 | ERJ6GEYJ471 | M 470 OHM, J,1/10W | 1 | |
| R5544 | ERJ6GEYG221 | M 220 OHM, J,1/10W | 1 | |
| R5546,47 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 2 | |
| R5548,49 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 2 | |
| R5552,53 | ERJ6GEYJ471 | M 470 OHM, J,1/10W | 2 | |
| R5554 | ERJ6ENF2611 | M2.61KOHM, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R5555 | ERJ6ENF1271 | M1.27KOHM, 1/10W | 1 | |
| R5570 | ERJ6GEYG103 | M 10KOHM, J,1/10W | 1 | |
| R5571 | ERJ6GEYF473 | M 47KOHM, J,1/10W | 1 | |
| R5572 | ERJ6GEYG222 | M 2.2KOHM, J,1/10W | 1 | |
| R5573 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 1 | |
| R5576,77 | ERJ6GEYF472 | M 4.7KOHM, J,1/10W | 2 | |
| R5600 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R5604 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R5605 | ERJ3EKF1272 | M12.7KOHM, 1/16W | 1 | |
| R5606-09 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R5610 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R5611 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R5612 | ERJ3EKF2322 | M23.2KOHM, 1/16W | 1 | |
| R5620 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R5621 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R5622 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R5623 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R5625-28 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R5629 | ERJ3EKF3012 | M30.1KOHM, 1/16W | 1 | |
| R5630 | ERJ3EKF4752 | M47.5KOHM, 1/16W | 1 | |
| R5631 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R5632 | ERJ3EKF3002 | M 30KOHM, 1/16W | 1 | |
| R5633,34 | ERJ3EKF1602 | M16.0KOHM, 1/16W | 2 | |
| R5635 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R5636 | ERJ2GEJ683 | M 68KOHM, J,0.063W | 1 | |
| R5637 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5638 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5641 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R5644 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R5646 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5647 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R5660 | ERJ2GEJ562 | M 5.6KOHM, J,0.063W | 1 | |
| R5661 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R5662 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R5670 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5671 | ERJ2GEJ183 | M 18KOHM, J,0.063W | 1 | |
| R5672 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R5674 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R5690,91 | D0GB103JA057 | M 10KOHM, J,1/16W | 2 | |
| R5692,93 | D0GB473JA057 | M 47KOHM, J,1/16W | 2 | |
| R5694,95 | D0GB102JA057 | M 1KOHM, J,1/16W | 2 | |
| R5696,97 | D0GB103JA057 | M 10KOHM, J,1/16W | 2 | |
| R5730,31 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | |
| R5732 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R5733 | ERJ2GED563X | M 56KOHM, J,0.063W | 1 | |
| R5851 | ERJ3GEYJ100 | M 10 OHM, J,1/16W | 1 | |
| R5852 | ERJ3GEYJ104 | M 100KOHM, J,1/16W | 1 | |
| R5853 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R5854 | EXB2HV680J | RESISTOR ARRAY | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R5855 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R5856, 57 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 2 | |
| R5858 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R5859 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R5860, 61 | EXB2HV470JV | RESISTOR ARRAY | 2 | |
| R5865-67 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 3 | |
| R5868 | ERJ2RKD330 | M 33 OHM, J, 0.063W | 1 | |
| R5870-72 | ERJ2RKD330 | M 33 OHM, J, 0.063W | 3 | |
| R5875-78 | ERJ2GEJ470 | M 47 OHM, J, 0.063W | 4 | |
| R5882, 83 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 2 | |
| R5884 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R5908, 09 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 2 | |
| R5914 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R5916 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R5920 | ERJ2GEJ680 | M 68 OHM, J, 0.063W | 1 | |
| R5921 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R5922 | ERJ2GEJ104 | M 100KOHM, J, 0.063W | 1 | |
| R5923 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |
| R5925-28 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 4 | |
| R5929 | ERJ3EKF2802 | M 28KOHM, 1/16W | 1 | |
| R5930 | ERJ3EKF4752 | M47.5KOHM, 1/16W | 1 | |
| R5931 | ERJ3EKF3012 | M30.1KOHM, 1/16W | 1 | |
| R5932 | ERJ3EKF1272 | M12.7KOHM, 1/16W | 1 | |
| R5933, 34 | ERJ3EKF1602 | M16.0KOHM, 1/16W | 2 | |
| R5937 | D0YAR0000007 | M 0.0 OHM, J, 0.063W | 1 | |
| R5938-40 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R6003 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6005 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6007 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6009 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6011 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6020 | ERF5TJ330 | W 33 OHM, 5W | 1 | |
| R6024 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6026 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6028 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6030 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6031, 32 | ERJ6ENF8202 | M 82KOHM, 1/10W | 2 | |
| R6033 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6034 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R6036 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6043 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6045 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6047 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6055 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6057 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 1 | |
| R6061 | ERJ6GEYJ224 | M 220KOHM, J, 1/10W | 1 | |
| R6078 | ERJ6GEYJ224 | M 220KOHM, J, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R6101-06 | DOGD101JA059 | M 100 OHM, J, 0.25W | 6 | |
| R6109 | DOGD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6110 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 1 | |
| R6111, 12 | DOGD470JA059 | M 47 OHM, J, 0.25W | 2 | |
| R6113 | ERJ14YJ224 | M 220KOHM, J, 1/4W | 1 | |
| R6114 | DOGD470JA059 | M 47 OHM, J, 0.25W | 1 | |
| R6116 | ERJ6GEYJ223 | M 22KOHM, J, 1/10W | 1 | |
| R6120 | DOGD470JA059 | M 47 OHM, J, 0.25W | 1 | |
| R6126-28 | ERJ6GEYJ563 | M 56KOHM, J, 1/10W | 3 | |
| R6129 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6131, 32 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6133 | DOGD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6134 | DOGD750JA059 | M 75 OHM, J, 0.25W | 1 | |
| R6135-38 | DOGD100JA059 | M 10 OHM, J, 0.25W | 4 | |
| R6140-44 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 5 | |
| R6146-49 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 4 | |
| R6151, 52 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6153 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 1 | |
| R6154 | DOGD750JA059 | M 75 OHM, J, 0.25W | 1 | |
| R6157-60 | D0GF1R0JA047 | M 1.0 OHM, J, 0.33W | 4 | |
| R6171 | DOGD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6172, 73 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 2 | |
| R6174 | DOGD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6175, 76 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 2 | |
| R6184 | DOGD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6185, 86 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 2 | |
| R6191, 92 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6193 | DOGD510JA059 | M 51 OHM, J, 0.25W | 1 | |
| R6195, 96 | DOGD104JA059 | M 100KOHM, J, 0.25W | 2 | |
| R6213 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6214 | DOGD151JA059 | M 150 OHM, J, 0.25W | 1 | |
| R6215 | DOGD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6216, 17 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 2 | |
| R6220 | ERDS2TC0 | C 0 OHM, 1/4W | 1 | |
| R6220 | ERJ14YJ154 | M 150KOHM, J, 1/4W | 1 | |
| R6221 | ERJ6GEYJ183 | M 18KOHM, J, 1/10W | 1 | |
| R6222 | ERG1SJ472 | M 4.7KOHM, J, 1W | 1 | |
| R6223 | ERG2FJS123D | M 12KOHM, J, 2W | 1 | |
| R6225 | ERJ6ENF4532 | M4.53KOHM, 1/10W | 1 | |
| R6226, 27 | ERJ6ENF5102 | M 51KOHM, 1/10W | 2 | |
| R6230 | ERDS2TC0 | C 0 OHM, 1/4W | 1 | |
| R6232 | ERJ6ENF2491 | M2.49KOHM, 1/10W | 1 | |
| R6233-38 | DOGD100JA059 | M 10 OHM, J, 0.25W | 6 | |
| R6241 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R6242 | EXB38V472JV | RESISTOR ARRAY | 1 | |
| R6243 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R6244 | EXB38V472JV | RESISTOR ARRAY | 1 | |
| R6251 | DOGD103JA059 | M 10KOHM, J, 0.25W | 1 | |
| R6252, 53 | ERJ6ENF3902 | M 39KOHM, 1/10W | 2 | |
| R6254 | ERJ6ENF6801 | M 6.8KOHM, 1/10W | 1 | |
| R6255 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6256 | ERJ6ENF1501 | M 1.5KOHM, 1/10W | 1 | |
| R6257 | ERJ6GEYJ103 | M 10KOHM, J, 1/10W | 1 | |
| R6258 | ERJ6GEYJ222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6261 | ERJ6GEYJ104 | M 100KOHM, J, 1/10W | 1 | |
| R6282 | ERG2FJS150D | M 15 OHM, J, 2W | 1 | |
| R6284 | ERJ6GEYJ222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6286 | DOGD101JA059 | M 100 OHM, J, 0.25W | 1 | |
| R6288 | ERJ6ENF4991 | M4.99KOHM, 1/10W | 1 | |
| R6289 | ERJ6ENF2491 | M2.49KOHM, 1/10W | 1 | |
| R6291 | ERJ6ENF2491 | M2.49KOHM, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R6401-05 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 5 | |
| R6421, 22 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 2 | |
| R6424, 25 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 2 | |
| R6442-44 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 3 | |
| R6453, 54 | D0GF7R5JA047 | M 7.5 OHM, J, 0.33W | 2 | |
| R6465 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R6466 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6467, 68 | ERJ6ENF8202 | M 82KOHM, 1/10W | 2 | |
| R6471 | ERJ6GEYG392 | M 3.9KOHM, J, 1/10W | 1 | |
| R6472 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6473 | ERJ6GEYF561 | M 560 OHM, J, 1/10W | 1 | |
| R6474 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 1 | |
| R6475, 76 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 2 | |
| R6480 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6501, 02 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6503 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6504 | D0GD750JA059 | M 75 OHM, J, 0.25W | 1 | |
| R6506 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6507-09 | D0GF1R0JA047 | M 1.0 OHM, J, 0.33W | 3 | |
| R6511, 12 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R6513 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6514-17 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 4 | |
| R6518 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6519, 20 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R6521, 22 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 2 | |
| R6523 | D0GD750JA059 | M 75 OHM, J, 0.25W | 1 | |
| R6531 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6532, 33 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R6534 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6535, 36 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R6554 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6555, 56 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R6561-64 | EXB38V470J | RESISTOR ARRAY | 4 | |
| R6565-68 | EXB38V472JV | RESISTOR ARRAY | 4 | |
| R6581 | D0GD103JA059 | M 10KOHM, J, 0.25W | 1 | |
| R6582, 83 | ERJ6ENF3902 | M 39KOHM, 1/10W | 2 | |
| R6584 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R6585 | ERJ6ENF1001 | M 1KOHM, 1/10W | 1 | |
| R6586 | ERJ6ENF2201 | M 2.2KOHM, 1/10W | 1 | |
| R6587 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6588 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6590 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 1 | |
| R6591 | EXB38V472JV | RESISTOR ARRAY | 1 | |
| R6592 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6603 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6604 | D0GD151JA059 | M 150 OHM, J, 0.25W | 1 | |
| R6605 | ERJ6GEYG104 | M 100KOHM, J, 1/10W | 1 | |
| R6606 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R6607 | ERJ6ENF2871 | M 2.87KOHM, 1/10W | 1 | |
| R6608, 09 | D0GF102JA047 | M 1.0 KOHM, J, 0.33W | 2 | |
| R6610 | ERJ6GEYG104 | M 100KOHM, J, 1/10W | 1 | |
| R6611 | ERJ6GEYG105 | M 1MOHM, J, 1/10W | 1 | |
| R6612 | D0GD470JA059 | M 47 OHM, J, 0.25W | 1 | |
| R6613 | ERJ6GEYG105 | M 1MOHM, J, 1/10W | 1 | |
| R6614, 15 | D0GF113JA047 | M 11 KOHM, J, 0.33W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-------------------------|-----|---------|
| R6616 | ERJ6ENF1502 | M 15KOHM, 1/10W | 1 | |
| R6617 | ERJ6GEYJ224 | M 220KOHM, J, 1/10W | 1 | |
| R6618 | ERJ6RBD123V | M 12KOHM, 1/10W | 1 | |
| R6619 | ERJ6ENF1501 | M 1.5KOHM, 1/10W | 1 | |
| R6620 | D0D28R2JA021 | M 8.2 OHM, J, 2W | 1 | |
| R6621-29 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 9 | |
| R6630 | D0GF113JA047 | M 11 KOHM, J, 0.33W | 1 | |
| R6631 | ERJ6GEYG683 | M 68KOHM, J, 1/10W | 1 | |
| R6632 | ERJ6GEYG392 | M 3.9KOHM, J, 1/10W | 1 | |
| R6633 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6634, 35 | ERJ6GEYG221 | M 220 OHM, J, 1/10W | 2 | |
| R6641-55 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 15 | |
| R6658 | D0D1101JA009 | M 100 OHM, J, 1W | 1 | |
| R6659, 60 | ERJ6GEYJ224 | M 220KOHM, J, 1/10W | 2 | |
| R6661 | ERJ6GEYG104 | M 100KOHM, J, 1/10W | 1 | |
| R6662 | ERJ6ENF2701 | M 2.7KOHM, 1/10W | 1 | |
| R6664 | D0GF222JA047 | M 2.2KOHM, J, 0.33W | 1 | |
| R6665 | D0GD470JA059 | M 47 OHM, J, 0.25W | 1 | |
| R6666 | ERJ6GEYG104 | M 100KOHM, J, 1/10W | 1 | |
| R6667, 68 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 2 | |
| R6671 | D0GD470JA059 | M 47 OHM, J, 0.25W | 1 | |
| R6672 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6673-76 | D0GD5R6JA059 | M 5.6 OHM, J, 0.25W | 4 | |
| R6682 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6683 | D0GD151JA059 | M 150 OHM, J, 0.25W | 1 | |
| R6684 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6685 | ERJ6GEYJ471 | M 470 OHM, J, 1/10W | 1 | |
| R6686 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6687 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6688 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6689 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6690 | ERJ6GEYF151 | M 150 OHM, J, 1/10W | 1 | |
| R6691 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6696, 97 | D0D32R2JA020 | M 2.2 OHM, J, 3W | 2 | |
| R6700-08 | ERJ6GEYJ471 | M 470 OHM, J, 1/10W | 9 | |
| R6710-18 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 9 | |
| R6721, 22 | EXB38V220JV | RESISTOR ARRAY | 2 | |
| R6723 | ERJ6GEYG222 | M 2.2KOHM, J, 1/10W | 1 | |
| R6724 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6742 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6743 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 1 | |
| R6744 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R6745 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6746, 47 | D0GD103JA059 | M 10KOHM, J, 0.25W | 2 | |
| R6755 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R6758 | D0GF330JA047 | M 33 OHM, J, 0.33W | 1 | |
| R6759 | ERJ6GEYF472 | M 4.7KOHM, J, 1/10W | 1 | |
| R6760 | ERJ6GEYG122 | M 1.2KOHM, J, 1/10W | 1 | |
| R6761 | D0GD100JA059 | M 10 OHM, J, 0.25W | 1 | |
| R6762 | ERJ6GEYG104 | M 100KOHM, J, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R6775,76 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 2 | |
| R6777 | D0GD151JA059 | M 150 OHM,J,0.25W | 1 | |
| R6781 | D0GD470JA059 | M 47 OHM,J,0.25W | 1 | |
| R6782 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6783 | D0GD470JA059 | M 47 OHM,J,0.25W | 1 | |
| R6784 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6791 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6792 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6793 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 1 | |
| R6801 | ERG2FNJS8R2E | M 8.2 OHM, J, 2W | 1 | |
| R6802-04 | ERG2FJS683D | M 68KOHM, J, 2W | 3 | |
| R6806,07 | ERX12SJR1R2 | M 1.2 OHM, J,1/2W | 2 | |
| R6808 | D0GD272JA059 | M 2.7KOHM,J,0.25W | 1 | |
| R6809 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6810,11 | ERJ6GEYF333 | M 33KOHM,J,1/10W | 2 | |
| R6812 | ERJ6ENF2003 | M 200KOHM, 1/10W | 1 | |
| R6813 | ERJ6ENF9101 | M 9.1KOHM, 1/10W | 1 | |
| R6814 | ERJ6ENF5601 | M 5.6KOHM, 1/10W | 1 | |
| R6816,17 | ERJ6ENF5601 | M 5.6KOHM, 1/10W | 2 | |
| R6819 | ERJ6GEYJ681 | M 680 OHM,J,1/10W | 1 | |
| R6820 | ERJ6GEYOR00V | M 0 OHM, 1/10W | 1 | |
| R6821 | ERG2FJS221D | M 220 OHM, J, 2W | 1 | |
| R6822 | ERJ12YJ104U | M 100KOHM, 1/2W | 1 | |
| R6823 | ERG1FJS104D | M 100KOHM, J, 1W | 1 | |
| R6824 | ERJ6GEYJ562 | M 5.6KOHM,J,1/10W | 1 | |
| R6825 | ERJ6ENF2703 | M 270KOHM, 1/10W | 1 | |
| R6826 | ERJ6ENF2203 | M 220KOHM, 1/10W | 1 | |
| R6827 | ERJ6ENF8201 | M 8.2KOHM, 1/10W | 1 | |
| R6828 | ERJ6ENF5231 | M5.23KOHM, 1/10W | 1 | |
| R6829,30 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 2 | |
| R6831 | ERJ6GEYJ153 | M 15KOHM,J,1/10W | 1 | |
| R6832 | D0GF4R7JA047 | M 4.7 OHM,J, 0.33W | 1 | |
| R6833-36 | ERJ6ENF5102 | M 51KOHM, 1/10W | 4 | |
| R6837 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6839 | ERJ6GEYF472 | M 4.7KOHM,J,1/10W | 1 | |
| R6841 | ERJ12YJ153U | M 15KOHM, 1/2W | 1 | |
| R6842 | ERJ12YJ433U | M 43KOHM, 1/2W | 1 | |
| R6843 | ERJ6GEYJ623 | M 62KOHM,J,1/10W | 1 | |
| R6844 | D0D2101JA021 | M 100 OHM,J,2W | 1 | |
| R6845 | ERJ6GEYJ623 | M 62KOHM,J,1/10W | 1 | |
| R6846,47 | ERJ6GEYJ563 | M 56KOHM,J,1/10W | 2 | |
| R6848 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6849,50 | ERJ6ENF6802 | M 68KOHM, 1/10W | 2 | |
| R6851 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6852 | ERJ6ENF2491 | M2.49KOHM, 1/10W | 1 | |
| R6853 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 1 | |
| R6858 | D0GD102JA059 | M 1.0KOHM,J,0.25W | 1 | |
| R6860 | D0D28R2JA021 | M 8.2 OHM,J,2W | 1 | |
| R6861 | ERJ6ENF3902 | M 39KOHM, 1/10W | 1 | |
| R6862,63 | ERJ6ENF4702 | M 47KOHM, 1/10W | 2 | |
| R6864 | ERJ6ENF8871 | M8.87KOHM, 1/10W | 1 | |
| R6865,66 | ERJ6ENF2201 | M 2.2KOHM, 1/10W | 2 | |
| R6867 | ERJ6GEYJ392 | M 3.9KOHM,J,1/10W | 1 | |
| R6868 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R6869 | ERJ6GEYF472 | M 4.7KOHM,J,1/10W | 1 | |
| R6870 | ERJ6GEYOR00V | M 0 OHM, 1/10W | 1 | |
| R6871-73 | ERJ6ENF3902 | M 39KOHM, 1/10W | 3 | |
| R6874 | ERJ6ENF9531 | M9.53KOHM, 1/10W | 1 | |
| R6875 | ERJ6ENF3301 | M 3.3KOHM, 1/10W | 1 | |
| R6876 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R6877 | ERJ6GEYJ392 | M 3.9KOHM,J,1/10W | 1 | |
| R6878 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R6879 | ERJ6GEYF472 | M 4.7KOHM,J,1/10W | 1 | |
| R6886-88 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 3 | |
| R6891 | ERJ6GEYJ332 | M 3.3KOHM,J,1/10W | 1 | |
| R6901 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 1 | |
| R6902-17 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 16 | |
| R6918 | ERJ6GEYJ101V | M 100 OHM,J,1/10W | 1 | |
| R6921 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R6922 | EXB38V103JV | RESISTOR ARRAY | 1 | |
| R6923 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R6924 | EXB38V103JV | RESISTOR ARRAY | 1 | |
| R6938,39 | ERJ8GEYJ224 | M 220KOHM, J,1/8W | 2 | |
| R6948,49 | ERJ8GEYJ224 | M 220KOHM, J,1/8W | 2 | |
| R6951 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R6952 | EXB38V103JV | RESISTOR ARRAY | 1 | |
| R6953 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R6954 | EXB38V103JV | RESISTOR ARRAY | 1 | |
| R7001-04 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 4 | |
| R7101 | D0GF103JA047 | M 10 KOHM,J, 0.33W | 1 | |
| R7104 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7107 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7108-15 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |
| R7116,17 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7123,24 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7125-32 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |
| R7133-35 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R7136-39 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7140 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7143-45 | EXB38V681J | RESISTOR ARRAY | 3 | |
| R7146,47 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7148,49 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7150,51 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7152,53 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7154,55 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7156 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7157-60 | EXB38V470J | RESISTOR ARRAY | 4 | |
| R7186 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7187 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R7191 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7193 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7194-99 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 6 | |
| R7200-07 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |
| R7208,09 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7210 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7211 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7212 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7213,14 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7217,18 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7221,22 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7223-26 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7227,28 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7229,30 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7231 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7232,33 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7234 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7235,36 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7237,38 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 2 | |
| R7239,40 | EXB38V470J | RESISTOR ARRAY | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R7241,42 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 2 | |
| R7243 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7244 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7245 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7246,47 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7248 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R7249,50 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 2 | |
| R7251,52 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7253,54 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 2 | |
| R7255 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7256-58 | EXB38V681J | RESISTOR ARRAY | 3 | |
| R7259-64 | EXB38V470J | RESISTOR ARRAY | 6 | |
| R7266-75 | EXB38V681J | RESISTOR ARRAY | 10 | |
| R7276 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7283 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7284 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7285 | ERJ6GEYG104 | M 100KOHM,J,1/10W | 1 | |
| R7286 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7287-96 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 10 | |
| R7302 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R7303,04 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7305-10 | EXB38V681J | RESISTOR ARRAY | 6 | |
| R7311,12 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7313,14 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7315,16 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7317,18 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7319,20 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7321,22 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R7323,24 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7325,26 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R7330 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7331-34 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7335 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7336 | D0GF103JA047 | M 10 KOHM,J, 0.33W | 1 | |
| R7354,55 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7358-65 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |
| R7366,67 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7373,74 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7375-82 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |
| R7383,84 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7385 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R7386 | ERJ6GEYG104 | M 100KOHM,J,1/10W | 1 | |
| R7387 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7398,99 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R7401 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R7402 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R7405-13 | J0JCC0000100 | CHIP INDUCTOR | 9 | |
| R7416,17 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7420,21 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7422 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7424,25 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7428,29 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7430-33 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7434 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7438,39 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7453-59 | EXB38V681J | RESISTOR ARRAY | 7 | |
| R7460,61 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7462-69 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |
| R7470,71 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7472 | D0GF103JA047 | M 10 KOHM,J, 0.33W | 1 | |
| R7473,74 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7477,78 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7479-86 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R7487,88 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7490 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7491 | ERJ6GEYG104 | M 100KOHM,J,1/10W | 1 | |
| R7492 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7493-98 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 6 | |
| R7501 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R7502,03 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7504,05 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7506 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7507 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7508-11 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7512 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7515 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7516-19 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7520 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7523,24 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7525 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7526 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7527 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7528 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7529 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7530-35 | EXB38V470J | RESISTOR ARRAY | 6 | |
| R7536 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7537-40 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7541 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7542 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7543 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7544 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7545-48 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7549 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7550 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7553 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7554-57 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7558-60 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R7561 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7562,63 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7564,65 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7567 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7570 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7571-76 | EXB38V470J | RESISTOR ARRAY | 6 | |
| R7577-87 | EXB38V681J | RESISTOR ARRAY | 11 | |
| R7592 | ERJ6GEYG104 | M 100KOHM,J,1/10W | 1 | |
| R7593 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7594-99 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 6 | |
| R7603 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R7604 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7605,06 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R7607 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7608-15 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |
| R7616,17 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7618 | D0GF103JA047 | M 10 KOHM,J, 0.33W | 1 | |
| R7623,24 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7625-32 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 8 | |
| R7633,34 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7636 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7637-42 | EXB38V681J | RESISTOR ARRAY | 6 | |
| R7643 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7644,45 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7646,47 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7648 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7650,51 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7654,55 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7658,59 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7660 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R7661-64 | D0GZ6R8JA020 | M 6.8 OHM,J, 0.5W | 4 | |
| R7665 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7686 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7687 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R7696 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7697-99 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 3 | |
| R7701 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R7702 | ERJ3EKF75R0 | M 75 OHM,J,1/16W | 1 | |
| R7703 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R7704 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R7706 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R7707 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R7708,09 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 2 | |
| R7710 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R7711 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R7712 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R7713 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R7714 | ERJ3EKF1202 | M 12KOHM, 1/16W | 1 | |
| R7715 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R7716 | D0GB105JA057 | M 1MOHM,J,1/16W | 1 | |
| R7717,18 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R7719 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R7720 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R7725 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R7726,27 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 2 | |
| R7733-35 | ERJ3GEYJ680 | M 68 OHM,J,1/16W | 3 | |
| R7737,38 | ERJ3GEYJ680 | M 68 OHM,J,1/16W | 2 | |
| R7742 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R7744 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R7749-51 | J0JCC0000100 | CHIP INDUCTOR | 3 | |
| R7754 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R7770 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R7779 | EXB38V220JV | RESISTOR ARRAY | 1 | |
| R7781 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R7782 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R8001 | ERJ2GEJ181 | M 180 OHM, J,0.063W | 1 | |
| R8002 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 1 | |
| R8003 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R8004 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R8005 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8006 | ERJ3EKF6801 | M 6.8KOHM, 1/16W | 1 | |
| R8023-29 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 7 | |
| R8030 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8031,32 | ERJ3EKF2700 | M 270 OHM, 1/16W | 2 | |
| R8035 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8039 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8056-73 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 18 | |
| R8074 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R8075-78 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 4 | |
| R8079,80 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 2 | |
| R8081 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8082 | D1BA75R0A026 | M0.75KOHM, 1/10W | 1 | |
| R8083 | ERJ2GEJ301 | M 300 OHM, J,0.063W | 1 | |
| R8084 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R8086 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R8087 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8090 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8091 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8093 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R8095 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8097 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R8098,99 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8100 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R8101 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8106 | ERJ2GEJ202 | M 2KOHM, J,0.063W | 1 | |
| R8107 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8110,11 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8301 | EXB2HV680J | RESISTOR ARRAY | 1 | A |
| R8303,04 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | A |
| R8305 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | A |
| R8306,07 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | A |
| R8308 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | A |
| R8309-12 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 4 | A |
| R8314,15 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | A |
| R8318 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | A |
| R8321 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | A |
| R8322 | ERJ2GEJ102X | M 1KOHM, J,0.063W | 1 | A |
| R8323,24 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 2 | A |
| R8325-27 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | A |
| R8328 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | AZ/M/MR |
| R8329 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | A |
| R8471 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8472 | D1HG1038A002 | NETWORK RESISTER | 1 | |
| R8474,75 | EXB28V103JX | RESISTOR ARRAY | 2 | |
| R8501 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8502-04 | ERJ2GEJ331 | M 330 OHM, J,0.063W | 3 | |
| R8506 | ERJ2GEJ331 | M 330 OHM, J,0.063W | 1 | |
| R8507-10 | ERJ3EKF91R0 | M 91 OHM, 1/16W | 4 | |
| R8512 | ERJ3EKF1800 | M 180 OHM, 1/16W | 1 | |
| R8513 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8517-19 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 3 | |
| R8551 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8555-61 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 7 | |
| R8564 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8601,02 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R8603 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R8604 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R8605 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8621-36 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 16 | |
| R8653 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8655 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8702 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8703 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8709 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8710 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8711,12 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8732 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8735-39 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 5 | |
| R8742 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8745,46 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8749 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8802 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8803,04 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 2 | |
| R8805-09 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 5 | |
| R8812 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8813 | EXB28V680JK | RESISTOR ARRAY | 1 | |
| R8814-17 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 4 | |
| R8821 | ERJ3GEYJ560 | M 56 OHM, J,1/16W | 1 | |
| R8822 | ERJ6ENF2000 | M 200 OHM, J,1/10W | 1 | |
| R8826 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8828 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8832 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8833 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R8834 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8851-54 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 4 | |
| R8855-60 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 6 | |
| R8862-64 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R8865-67 | EXB2HV680J | RESISTOR ARRAY | 3 | |
| R8868 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8869 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8870 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8871 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8874-76 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R8877-89 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 13 | |
| R8891,92 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 2 | |
| R8893 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8894 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8895-97 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 3 | |
| R8898,99 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R8900,01 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 2 | |
| R8904-10 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 7 | |
| R8911-18 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 8 | |
| R8919-22 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 4 | |
| R8923,24 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 2 | |
| R8925,26 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R8927 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8928 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R8929 | EXB2HVR000 | RESISTOR ARRAY | 1 | |
| R8930 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8932 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R8933-35 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R8936 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R8937 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R8938 | ERJ8GEYJ472 | M 4.7KOHM, J,1/8W | 1 | |
| R8939 | ERJ2GEJ473 | M 47KOHM, J,0.063W | 1 | |
| R8942 | ERJ2GEJ562 | M 5.6KOHM, J,0.063W | 1 | |
| R8943 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R8944 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R8946 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8947 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8948 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8950 | D0YAR0000007 | M 0.0 OHM, J,0.063W | 1 | |
| R8952 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8954 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8958 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R8963 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8964-67 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 4 | |
| R9060-67 | ERJ3GEYJ101 | M 100 OHM, J,1/16W | 8 | |
| R9070 | ERJ3GEYJ470 | M 47 OHM, J,1/16W | 1 | |
| R9074 | ERJ3GEYJ101 | M 100 OHM, J,1/16W | 1 | |
| R9076 | ERJ3GEYJ101 | M 100 OHM, J,1/16W | 1 | |
| R9094 | D0GB103JA057 | M 10KOHM, J,1/16W | 1 | |
| R9097,98 | D0GB103JA057 | M 10KOHM, J,1/16W | 2 | |
| R9099 | ERJ3GEYJ101 | M 100 OHM, J,1/16W | 1 | |
| R9101 | D0GB103JA057 | M 10KOHM, J,1/16W | 1 | |
| R9102 | ERJ3GEYJ101 | M 100 OHM, J,1/16W | 1 | |
| R9105 | ERJ3GEYJ101 | M 100 OHM, J,1/16W | 1 | |
| R9107 | ERJ3GEYJ332 | M 3.3KOHM, J,1/16W | 1 | |
| R9108,09 | D0GB103JA057 | M 10KOHM, J,1/16W | 2 | |
| R9110 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9111 | ERJ3GEYJ223 | M 22KOHM, J,1/16W | 1 | |
| R9113 | ERJ3GEYJ100 | M 10 OHM, J,1/16W | 1 | |
| R9114-17 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| R9118,19 | ERJ3EKF1001 | M 1KOHM, 1/16W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R9120 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9121 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9122-25 | J0JCC0000100 | CHIP INDUCTOR | 4 | |
| R9126 | ERJ3EKF1001 | M 1KOHM, 1/16W | 1 | |
| R9127 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R9129 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R9130 | ERJ3EKF1001 | M 1KOHM, 1/16W | 1 | |
| R9134 | ERJ3GEYJ333 | M 33KOHM,J,1/16W | 1 | |
| R9140 | ERJ6GEYOR00V | M 0 OHM, 1/10W | 1 | |
| R9141 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9143-45 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 3 | |
| R9148 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9149 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9150,51 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9154,55 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 2 | |
| R9156 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9158,59 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R9160,61 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R9162 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9165,66 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R9167 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9169 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9170-72 | D0GB393JA041 | M 39KOHM,J,1/16W | 3 | |
| R9174-76 | D0GB103JA057 | M 10KOHM,J,1/16W | 3 | |
| R9177 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R9178 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9180 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9181-84 | D0GB102JA057 | M 1KOHM,J,1/16W | 4 | |
| R9185,86 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9187,88 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 2 | |
| R9189,90 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R9192 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9193 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9194 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9196 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9198 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9199 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9201,02 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9203 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R9204,05 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9206,07 | D0GB102JA057 | M 1KOHM,J,1/16W | 2 | |
| R9209 | ERJ3GEYJ100 | M 10 OHM,J,1/16W | 1 | |
| R9210 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9215 | D0GB123JA057 | M 12KOHM,J,1/16W | 1 | |
| R9217-22 | D0GB103JA057 | M 10KOHM,J,1/16W | 6 | |
| R9236 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9237 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9244,45 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 2 | |
| R9247,48 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9367 | ERJ6GEYG181 | M 180 OHM,J,1/10W | 1 | |
| R9371 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9372 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9373 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9374 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9375 | D0GB151JA057 | M 150 OHM,J,1/16W | 1 | |
| R9389 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R9391 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9393-97 | D1HG8208A002 | NETWORK RESISTOR | 5 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R9398 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9399 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9400 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9404 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9409,10 | EXB38V820JV | RESISTOR ARRAY | 2 | |
| R9412-21 | EXB38V470J | RESISTOR ARRAY | 10 | |
| R9428 | EXB38V103JV | RESISTOR ARRAY | 1 | |
| R9430 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9433 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R9438 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9442-49 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 8 | |
| R9450 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9451 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9452 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9453-58 | D1HG8208A002 | NETWORK RESISTOR | 6 | |
| R9459 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9460 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9461 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9462 | D1HG8208A002 | NETWORK RESISTOR | 1 | |
| R9463 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9464 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9465 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9466-71 | D1HG8208A002 | NETWORK RESISTOR | 6 | |
| R9472,73 | EXB38V820JV | RESISTOR ARRAY | 2 | |
| R9474 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9476 | D0GB102JA057 | M 1KOHM,J,1/16W | 1 | |
| R9481 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9484,85 | ERJ3EKF1001 | M 1KOHM, 1/16W | 2 | |
| R9486 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9487 | D0GB151JA057 | M 150 OHM,J,1/16W | 1 | |
| R9488 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9489-95 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 7 | |
| R9496 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9497 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9506 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9507 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 1 | |
| R9515 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9523 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9525 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9526 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9527,28 | EXB2HV222JV | RESISTOR ARRAY | 2 | |
| R9529,30 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R9531-33 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R9534 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9535,36 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R9539 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9540 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9542 | ERJ3GEYJ680 | M 68 OHM,J,1/16W | 1 | |
| R9543,44 | D0GB103JA057 | M 10KOHM,J,1/16W | 2 | |
| R9545 | ERJ3GEYJ304 | M 300KOHM,J,1/16W | 1 | |
| R9548-50 | D0GB103JA057 | M 10KOHM,J,1/16W | 3 | |
| R9552-55 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 4 | |
| R9558 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9560 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9561-67 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 7 | |
| R9568 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9569 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9570 | D0GB103JA057 | M 10KOHM,J,1/16W | 1 | |
| R9571-73 | D1HG8208A002 | NETWORK RESISTOR | 3 | |
| R9574 | J0JCC0000100 | CHIP INDUCTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R9575-77 | D1HG8208A002 | NETWORK RESISTER | 3 | |
| R9579 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9580,81 | ERJ3EKF1001 | M 1KOHM, 1/16W | 2 | |
| R9584 | ERJ3GEYJ330 | M 33 OHM, J, 1/16W | 1 | |
| R9585,86 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 2 | |
| R9587-95 | EXB38V470J | RESISTOR ARRAY | 9 | |
| R9596-99 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 4 | |
| R9602 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9603 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9604,05 | J0JCC0000100 | CHIP INDUCTOR | 2 | |
| R9606 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R9607 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 1 | |
| R9608-15 | EXB2HV470JV | RESISTOR ARRAY | 8 | |
| R9619,20 | ERJ3GEYJ472 | M 47 OHM, J, 1/16W | 2 | |
| R9622 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9624,25 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9628-30 | D0GB103JA057 | M 10KOHM, J, 1/16W | 3 | |
| R9631 | EXB2HV222JV | RESISTOR ARRAY | 1 | |
| R9632-34 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 3 | |
| R9637 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 1 | |
| R9639 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 1 | |
| R9640 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9641 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 1 | |
| R9642 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9644 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9647 | D0GB103JA057 | M 10KOHM, J, 1/16W | 1 | |
| R9652 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9653 | D1HG1038A002 | NETWORK RESISTER | 1 | |
| R9800 | ERJ3EKF1302 | M 13KOHM, 1/16W | 1 | |
| R9801 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R9802 | ERJ3EKF6202 | M 62KOHM, 1/16W | 1 | |
| R9803 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9804 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R9805 | ERJ3EKF3002 | M 30KOHM, 1/16W | 1 | |
| R9806 | ERJ3EKF3902 | M 39KOHM, 1/16W | 1 | |
| R9807 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9808 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 1 | |
| R9810 | ERJ3EKF3001 | M 3KOHM, 1/16W | 1 | |
| R9813 | ERJ3EKF2401 | M 2.4KOHM, 1/16W | 1 | |
| R9814 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R9815 | ERJ3EKF2202 | M 22KOHM, 1/16W | 1 | |
| R9816 | ERJ3EKF8202 | M 82KOHM, 1/16W | 1 | |
| R9823-28 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 6 | |
| R9830,31 | D0GB103JA057 | M 10KOHM, J, 1/16W | 2 | |
| R9838,39 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 2 | |
| R9840 | ERJ3GEYJ220 | M 22 OHM, J, 1/16W | 1 | |
| R9841 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9842-44 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 3 | |
| R9845 | ERJ3GEYJ562 | M 5.6KOHM, J, 1/16W | 1 | |
| R9846,47 | EXB2HV222JV | RESISTOR ARRAY | 2 | |
| R9848,49 | EXB2HV470JV | RESISTOR ARRAY | 2 | |
| R9850 | D0GB473JA057 | M 47KOHM, J, 1/16W | 1 | |
| R9854 | ERJ3GEYJ101 | M 100 OHM, J, 1/16W | 1 | |
| R9859 | EXB38V101JV | RESISTOR ARRAY | 1 | |
| R9868 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 1 | |
| R9869-71 | D0GB103JA057 | M 10KOHM, J, 1/16W | 3 | |
| R9872 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9875-77 | D0GB103JA057 | M 10KOHM, J, 1/16W | 3 | |
| R9878 | ERJ3EKF3902 | M 39KOHM, 1/16W | 1 | |
| R9879 | ERJ3EKF2002 | M 20KOHM, 1/16W | 1 | |
| R9880 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R9883 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9884 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 1 | |
| R9891 | ERJ3GEYF473 | M 47KOHM, 1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|--------------------------|-----|---------|
| R9892 | ERJ3EKF1502 | M 15KOHM, 1/16W | 1 | |
| R9893 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R9896 | J0JCC0000100 | CHIP INDUCTOR | 1 | |
| R9897 | ERJ3GEYJ104 | M 100KOHM, J, 1/16W | 1 | |
| R9898 | ERJ3GEYJ470 | M 47 OHM, J, 1/16W | 1 | |
| RM2501 | PNA4701M05TV | REMOCON RECEIVER | 1 | |
| S1 | K1KA03BA0061 | 3P CONNECTOR | 1 | |
| SC2 | K1KA02A00676 | 2P CONNECTOR | 1 | |
| SC20 | K1KA20AA0008 | 20P CONNECTOR | 1 | |
| SC23 | K1KA03AA0193 | 3P CONNECTOR | 1 | |
| SC30 | K1KA08AA0192 | 8P CONNECTOR | 1 | |
| SC41-44 | K1ML80B00001 | 80P CONNECTOR | 4 | |
| SC45,46 | K1KA09A00239 | 9P CONNECTOR | 2 | |
| SD1-D5 | K1MNA8BA0250 | 8P CONNECTOR | 5 | |
| SD46 | K1KB09A00045 | 9P CONNECTOR | 1 | |
| SS11 | K1KA02A00676 | 2P CONNECTOR | 1 | |
| SS12 | K1KA10AA0194 | 10P CONNECTOR | 1 | |
| SS20,21 | K1KA07A00170 | 7P CONNECTOR | 2 | |
| SS22,23 | K1KB07AA0087 | 7P CONNECTOR | 2 | |
| SS34 | K1KA03AA0193 | 3P CONNECTOR | 1 | |
| SS35 | K1KA08AA0193 | 8P CONNECTOR | 1 | |
| SS42 | K1KA12AA0194 | 12P CONNECTOR | 1 | |
| SS44 | K1KA20AA0009 | 20P CONNECTOR | 1 | |
| SS53-55 | K1MN13B00020 | 13P CONNECTOR | 3 | |
| SS55 | K1MN13B00020 | 13P CONNECTOR | 2 | |
| 01,56 | | | | |
| SS56 02 | K1MN13B00020 | 13P CONNECTOR | 1 | |
| SU1-U5 | K1MNA8BA0250 | 8P CONNECTOR | 5 | |
| SU45 | K1KB09A00045 | 9P CONNECTOR | 1 | |
| SW2500 | K0F162B00002 | SWITCH | 1 | △ |
| SW3753-57 | EVQPC105K | SWITCH | 5 | |
| T6602 | ETS28AU389AC | SWITCHING TRANS | 1 | |
| TU3200 | ENGF9701GF | TUNER | 1 | △ |
| TU3201 | ENG39D01GF | TUNER | 1 | AZ/M △ |
| TU8301 | ENV77M05D8F | TUNER | 1 | A △ |
| VR6000 | EVMEASA00B14 | CONTROL 10KOHMB 0.3W | 1 | |
| VR6600 | EVMEASA00B13 | CONTROL 1KOHMB 0.3W | 1 | |
| VR6602 | EVMEASA00B23 | CONTROL 2KOHMB 0.3W | 1 | |
| X1100 | H0J100500035 | CRYSTAL | 1 | |
| X1500 | H0J300500026 | CRYSTAL | 1 | |
| X1501 | H0J270500061 | CRYSTAL | 1 | |
| X2010 | H0J245500082 | CRYSTAL | 1 | |
| X4500 | H0J270500113 | CRYSTAL | 1 | |
| X5000 | H0J270500087 | CRYSTAL | 1 | |
| X7700 | H0J240500037 | CRYSTAL | 1 | |
| X8001 | H0J270500061 | CRYSTAL | 1 | |
| X8301 | H0J204500006 | CRYSTAL | 1 | A |
| X9000 | H2D200500011 | CRYSTAL | 1 | |
| X9500 | H0J200500038 | CRYSTAL | 1 | |
| ZA0001 | K4AZ01D00004 | TERMINAL | 1 | |
| ZA0002 | K4CD08000002 | AV TERMINAL | 1 | |
| ZA0004,05 | K4AZ01D00004 | TERMINAL | 2 | |
| ZA0006,07 | K4CD08000002 | AV TERMINAL | 2 | |
| ZA1500-03 | K4AZ01D00004 | TERMINAL | 4 | |
| ZA3001-08 | K4CD08000002 | AV TERMINAL | 8 | |
| ZA3701 | K4CZ01000027 | COMPATIBLE WITH JALCO K9 | 1 | |
| ZA5001-04 | K4AZ01D00004 | TERMINAL | 4 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|--------------------------|-----|---------|
| ZA5501-04 | K4CZ01000027 | COMPATIBLE WITH JALCO K9 | 4 | |
| ZA6001-03 | K4CD01000011 | AV TERMINAL | 3 | |
| ZA6401-03 | K4CD01000011 | AV TERMINAL | 3 | |
| ZA7101-06 | K4AD01Z00001 | TERMINAL | 6 | |
| ZA7201-06 | K4AD01Z00001 | TERMINAL | 6 | |
| ZA7301-06 | K4AD01Z00001 | TERMINAL | 6 | |
| ZA7401-06 | K4AD01Z00001 | TERMINAL | 6 | |
| ZA7501-06 | K4AD01Z00001 | TERMINAL | 6 | |
| ZA7601-06 | K4AD01Z00001 | TERMINAL | 6 | |
| ZA7701 | K4AD01D00004 | TERMINAL | 1 | |
| ZA9001 | K4CD01000011 | AV TERMINAL | 1 | |
| A1601,02 | RA362MSV7 | ARRESTOR | 2 | △ |
| C201 | KZE1E470 | C 470U 25V | 1 | |
| C203 | RR3DD101K | CERAMIC CAPACITOR | 1 | |
| C206 | ECWH12333HV | PLASTIC FILM CAPACITOR | 1 | |
| C208 | RR3DD101K | CERAMIC CAPACITOR | 1 | |
| C211 | ECWH12473HV | PLASTIC FILM CAPACITOR | 1 | |
| C212,13 | TBB224K2 | CERAMIC CHIP CAPACITOR | 2 | |
| C251 | KMQ220901Z | ELECTROLYTIC CAPACITOR | 1 | |
| C253,54 | KMQ220901Z | ELECTROLYTIC CAPACITOR | 2 | |
| C256,57 | ECQE6223KF | P 0.022UF, K,400V | 2 | |
| C258 | KMQ220901Z | ELECTROLYTIC CAPACITOR | 1 | |
| C301 | KZE1E101 | C 100UF 25V | 1 | |
| C303,04 | RR3DD101K | CERAMIC CAPACITOR | 2 | |
| C305 | ECWH12333HV | PLASTIC FILM CAPACITOR | 1 | |
| C306 | KZE2A270 | C 27UF 100V | 1 | |
| C307,08 | KZE1E182S | C 1800UF 25V | 2 | |
| C310 | TBB475K1 | CERAMIC CHIP CAPACITOR | 1 | |
| C312 | TBB475K1 | CERAMIC CHIP CAPACITOR | 1 | |
| C313,14 | KZE1E821L | C 8200UF 25V | 2 | |
| C315 | KZE1E101 | C 100UF 25V | 1 | |
| C316-18 | TEB104K5 | C 0.1UF 50V | 3 | |
| C319 | KZE1E101 | C 100UF 25V | 1 | |
| C320 | TEB104K5 | C 0.1UF 50V | 1 | |
| C321 | ECJ2VB1H223K | C 0.022UF, K, 50V | 1 | |
| C401 | TAB104K2E | CERAMIC CHIP CAPACITOR | 1 | |
| C402 | KMQ2C471H | ELECTROLYTIC CAPACITOR | 1 | |
| C403 | TAB104K2E | CERAMIC CHIP CAPACITOR | 1 | |
| C404 | KZE1H181 | ELECTROLYTIC CAPACITOR | 1 | |
| C405 | TBB224K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C406,07 | KZE2A471S | C 470UF 100V | 2 | |
| C501 | ECQU2A473ML | P 0.047UF, M,250V | 1 | △ |
| C502 | TBB104K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C503 | KZE1E470 | C 470U 25V | 1 | |
| C504 | KMQ2W560 | ELECTROLYTIC CAPACITOR | 1 | |
| C505 | KZE1E470 | C 470U 25V | 1 | |
| C506 | YBB474K1 | CERAMIC CHIP CAPACITOR | 1 | |
| C507 | MBB103K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C508 | KZE1E470 | C 470U 25V | 1 | |
| C509 | KZE1H221 | ELECTROLYTIC CAPACITOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| C510 | ECKENA101KBR | C 100P 250V | 1 | △ |
| C511 | KZE1A152 | ELECTROLYTIC CAPACITOR | 1 | |
| C512 | TBB474K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C513 | KZE1E101 | C 100UF 25V | 1 | |
| C515 | TBB475K1 | CERAMIC CHIP CAPACITOR | 1 | |
| C516 | KZE1E101 | C 100UF 25V | 1 | |
| C517-19 | TEB104K5 | C 0.1UF 50V | 3 | |
| C520 | MBB103K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C521 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C601 | KZE1H221 | ELECTROLYTIC CAPACITOR | 1 | |
| C1601 | ECQU2A105ML | P 1UF, 250V | 1 | △ |
| C1602 | KZE1E470 | C 470U 25V | 1 | |
| C1603,04 | ECKENA101KBR | C 100P 250V | 2 | △ |
| C1605 | KZE1E101 | C 100UF 25V | 1 | |
| C1606 | ECQU2A224ML | P 0.22UF, 250V | 1 | △ |
| C1608 | KZE1E470 | C 470U 25V | 1 | |
| C1610 | MBB103K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C1611,12 | MMXC2W474K | PLASTIC FILM CAPACITOR | 2 | |
| C1613 | TBB474K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C1614 | MBB103K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C1615 | KZE1H221 | ELECTROLYTIC CAPACITOR | 1 | |
| C1616 | MBB102K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C1617 | MBB224K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C1619 | ECQE6472B45 | C 4700U 630V | 1 | |
| C1620 | ECQE6473RKF | PLASTIC FILM CAPACITOR | 1 | |
| C1621,22 | KMQ2W221L | C 220U 450V | 2 | |
| C1624 | KMQ2W221L | C 220U 450V | 1 | |
| C1625 | ECKENA221KBR | C 221P 250V | 1 | △ |
| C1627 | MMXC2W225K | PLASTIC FILM CAPACITOR | 1 | |
| C1630,31 | ECKENA221KBR | C 221P 250V | 2 | △ |
| C1701 | ECQU2A105ML | P 1UF, 250V | 1 | △ |
| C1704 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C1705 | ECQU2A224ML | P 0.22UF, 250V | 1 | △ |
| C1706 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C1707,08 | MMXC2W474K | PLASTIC FILM CAPACITOR | 2 | |
| C1709 | TBB474K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C1710 | MBB103K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C1711 | MBB102K5 | CERAMIC CHIP CAPACITOR | 1 | |
| C1712 | TBB224K2 | CERAMIC CHIP CAPACITOR | 1 | |
| C1713 | KZE1E101 | C 100UF 25V | 1 | |
| C1714 | ECQE6472B45 | C 4700U 630V | 1 | |
| C1715 | ECQE6473RKF | PLASTIC FILM CAPACITOR | 1 | |
| C1716,17 | KMQ2W221L | C 220U 450V | 2 | |
| C1718 | ECKENA471KBR | CERAMIC CAPACITOR | 1 | △ |
| C1719 | KMQ2W161K | ELECTROLYTIC CAPACITOR | 1 | |
| CN02 | B8B-PH-KS | CONNECTOR | 1 | |
| CN06 | B8B-PH-KS | CONNECTOR | 1 | |
| CN08 | K1KA03A00507 | CONNECTOR | 1 | △ |
| CN1601 | B3P4VH-B-L | CONNECTOR | 1 | △ |
| CN1602 | K1KA03A00507 | CONNECTOR | 1 | △ |
| CN1701 | B3P4VH-B-L | CONNECTOR | 1 | △ |
| D209,10 | AG01A | DIODE | 2 | |
| D251 | YG901C3R | DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| D252 | MA2J11100L | DIODE | 1 | |
| D253-55 | YG901C3R | DIODE | 3 | |
| D256 | MA2J11100L | DIODE | 1 | |
| D301,02 | MA165TA5 | DIODE | 2 | |
| D303,04 | MA2J72800L | DIODE | 2 | |
| D305 | YG805C06R | DIODE | 1 | |
| D306 | AG01A | DIODE | 1 | |
| D307 | YG805C06R | DIODE | 1 | |
| D401 | D15XBN20 | DIODE | 1 | |
| D405 | AG01A | DIODE | 1 | |
| D406 | YG901C3R | DIODE | 1 | |
| D501 | B0EBKT000007 | DIODE | 1 | △ |
| D502,03 | ERA22-10 | DIODE | 2 | |
| D504 | MA2J11100L | DIODE | 1 | |
| D505 | ST3D82 | DIODE | 1 | |
| D506 | ERA91-02 | DIODE | 1 | |
| D507 | AG01A | DIODE | 1 | |
| D508 | RK39 | DIODE | 1 | |
| D509 | MA2J11100L | DIODE | 1 | |
| D510,11 | MA165TA5 | DIODE | 2 | |
| D512 | MA2J11100L | DIODE | 1 | |
| D513 | RK44 | DIODE | 1 | |
| D601 | AG01A | DIODE | 1 | |
| D1601,02 | MA2J11100L | DIODE | 2 | |
| D1603,04 | B0EAKR000059 | DIODE | 2 | |
| D1605 | M1F60 | DIODE | 1 | |
| D1701,02 | MA2J11100L | DIODE | 2 | |
| D1704 | B0EAKR000059 | DIODE | 1 | |
| D1705 | M1F60 | DIODE | 1 | |
| D1706 | EM1C | DIODE | 1 | |
| | | | | |
| F201 | HU216005BP | CARTRIDGE FUSE | 1 | △ |
| F301 | HU216005BP | CARTRIDGE FUSE | 1 | △ |
| F501 | HU216002BP | CARTRIDGE FUSE | 1 | △ |
| | | | | |
| IC401 | C0DAEMB00003 | IC | 1 | |
| IC501 | MIP3E30MP | IC | 1 | △ |
| | | | | |
| IP201 | ERBSE0R75U | MICRO FUSE | 1 | |
| IP301 | ERBSE0R75U | MICRO FUSE | 1 | |
| | | | | |
| K1602 | DG12D1-0 | RELAY | 1 | △ |
| K1603 | DJ12D2-0 | RELAY | 1 | △ |
| K1701 | KS321M01 | RELAY | 1 | △ |
| K1702 | DJ12D2-0T5 | RELAY | 1 | △ |
| | | | | |
| L301,02 | EXCELDR35 | BEAD CHOKE | 2 | |
| L401 | LH8TB681K | CHOKE | 1 | |
| L402 | H221012HY | CHOKE | 1 | |
| L403,04 | EXCELDR35 | BEAD CHOKE | 2 | |
| L501 | EXCELSA35 | BEAD CHOKE | 1 | |
| L503 | EXCELDR35 | BEAD CHOKE | 1 | |
| L601 | EXCELDR35 | BEAD CHOKE | 1 | |
| L1601,02 | P3112308Z | FILTER CHOKE | 2 | △ |
| L1603 | ETB50CZ12GAD | TRANSFORMER | 1 | |
| L1604-06 | EXCELSR35 | BEAD CHOKE | 3 | |
| L1607,08 | EXCCL4532U1 | BEAD CHOKE | 2 | |
| L1701,02 | P2515303Z | FILTER CHOKE | 2 | △ |
| L1703 | H2747104Z | CHOKE | 1 | |
| L1704,05 | EXCELSA35 | BEAD CHOKE | 2 | |
| | | | | |
| MC201 | MLZNC682 | MODULE | 1 | △ |
| MC202,03 | MP00R3 | MODULE | 2 | △ |
| MC301 | MLZNC102 | MODULE | 1 | △ |
| MC401 | MLLSB103 | MODUIE | 1 | △ |
| MC501 | MLSZA100 | MODULE | 1 | △ |
| MC601 | MLWNB393 | MODULE | 1 | △ |
| MC701 | MLZDD103 | MODUIE | 1 | △ |
| MC1601 | MP00P6 | MODUIE | 1 | △ |
| MC1602 | MLLPC123 | MODULE | 1 | △ |
| MC1603 | MLWNB393 | MODULE | 1 | △ |
| MC1604 | MP00P13 | MODUIE | 1 | △ |
| MC1701 | MP00P15 | MODULE | 1 | △ |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-----------------------------|-----|---------|
| MC1702 | MLLPC123 | MODULE | 1 | △ |
| | | | | |
| P2 | B2P3-VH-B | CONNECTOR | 1 | |
| P5 | B11B-PH-KS | CONNECTOR | 1 | |
| P9 | B03P-VL | CONNECTOR | 1 | △ |
| P10 | B6B-PH-KS | CONNECTOR | 1 | |
| P11 | B2P3-VH-B | CONNECTOR | 1 | |
| P12 | B10B-PH-KS | CONNECTOR | 1 | |
| P23 | B3B-PH-KS | CONNECTOR | 1 | |
| P25 | B20B-PHDSS | CONNECTOR | 1 | |
| | | | | |
| PC201,02 | PS2581A | PHOTO COUPLER | 2 | △ |
| PC401 | PS2581A | PHOTO COUPLER | 1 | △ |
| PC505 | PS2581A | PHOTO COUPLER | 1 | △ |
| PC1701 | TLP421F | OPTOISOLATOR | 1 | △ |
| | | | | |
| Q201,02 | 2SB14400RL | TRANSISTOR | 2 | |
| Q203,04 | 2SD2185 | TRANSISTOR | 2 | |
| Q301,02 | FMR21N55G | FIELD EFFECT TRANSISTOR | 2 | △ |
| Q303 | 2SB1218A | TRANSISTOR | 1 | |
| Q304 | 2SK2903 | FET | 1 | |
| Q305 | 2SB1218A | TRANSISTOR | 1 | |
| Q306 | 2SK2903 | FET | 1 | |
| Q401 | 2SK3607 | FIELD EFFECT TRANSISTOR | 1 | |
| | | | | |
| Q402,03 | 2SA17670Q1TV | TRANSISTOR | 2 | |
| Q501 | 2SK3302 | FET | 1 | △ |
| Q502 | 2SK2731 | FET | 1 | |
| Q503,04 | HAT1130R | FET | 2 | |
| Q505 | 2SB710AQRSTX | TRANSISTOR | 1 | |
| Q506 | 2SB1218A | TRANSISTOR | 1 | |
| Q1601 | 2SB0709ARL | TRANSISTOR | 1 | |
| Q1602 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q1603 | 2SD2185 | TRANSISTOR | 1 | |
| Q1604 | 2SB14400RL | TRANSISTOR | 1 | |
| Q1701 | 2SD1819AWL | TRANSISTOR | 1 | |
| Q1702 | 2SB0709ARL | TRANSISTOR | 1 | |
| Q1703 | 2SD0601ARL | TRANSISTOR | 1 | |
| Q1704 | 2SD2185 | TRANSISTOR | 1 | |
| Q1705 | 2SB14400RL | TRANSISTOR | 1 | |
| | | | | |
| R201 | ERJ12YJ820 | CHIP RESISTOR | 1 | |
| R203,04 | SG732K220 | CHIP RESISTOR | 2 | |
| R208,09 | ERJ6GEYJ334 | M 330KOHM,J,1/10W | 2 | |
| R210 | ERQ14AJ4R7J | FUSIBLE METAL FILM RESISTOR | 1 | |
| R211-13 | ERJ12YJ683 | M 68KOHM, 1/2W | 3 | |
| R214 | ERJ12YJ820 | CHIP RESISTOR | 1 | |
| R216,17 | SG732K220 | CHIP RESISTOR | 2 | |
| R218,19 | ERJ6GEYJ334 | M 330KOHM,J,1/10W | 2 | |
| R220 | ERJ6GEYJ4R7 | M 4.7 OHM,J,1/10W | 1 | |
| R221 | ERJ6GENF1502 | M 15KOHM, 1/10W | 1 | |
| R222,23 | ERJ6GEYG154 | CHIP RESISTOR | 2 | |
| R224,25 | ERQ14AJ3R3J | FUSIBLE METAL FILM RESISTOR | 2 | |
| R251,52 | ERDS1TJ201 | C 200 OHM, J,1/2W | 2 | |
| R253-55 | ERJ6GENF1003 | M 100KOHM, 1/10W | 3 | |
| R256,57 | ERJ6GEYF472 | M 4.7KOHM,F,1/10W | 2 | |
| R258-60 | ERJ6ENF5492 | M54.9KOHM, 1/10W | 3 | |
| R261 | ERJ6ENF7152 | M71.5KOHM, 1/10W | 1 | |
| R262 | ERJ6GEYJ220 | M 22 OHM,J,1/10W | 1 | |
| R263 | ERJ6GEYG222 | M 2.2KOHM,J,1/10W | 1 | |
| R264 | ERJ6GEYG391 | CHIP RESISTOR | 1 | |
| R265 | ERJ6GEYG222 | M 2.2KOHM,J,1/10W | 1 | |
| R266 | ERJ6GEYJ471 | M 470 OHM,J,1/10W | 1 | |
| R267 | ERJ6GEYF472 | M 4.7KOHM,F,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-----------------------------|-----|---------|
| R268 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R269 | ERJ6ENF1003 | M 100KOHM, 1/10W | 1 | |
| R270 | ERDS1TJ472 | C 4.7KOHM, J, 1/2W | 1 | |
| R271-75 | ERDS1TJ622 | CARBON FILM RESISTOR | 5 | |
| R301 | ERQ14AJ4R7J | FUSIBLE METAL FILM RESISTOR | 1 | |
| R302, 03 | ERJ12YJ101 | M 100 OHM, J, 1/2W | 2 | |
| R304 | SG732K560 | 0.5W 560HM | 1 | |
| R305 | SG732K180 | CHIP RESISTOR | 1 | |
| R306-08 | ERJ12YJ683 | M 68KOHM, 1/2W | 3 | |
| R309, 10 | ERJ6GEYJ334 | M 330KOHM, J, 1/10W | 2 | |
| R311 | ERJ12YJ100 | M 10 OHM, J, 1/2W | 1 | |
| R312 | ERJ6ENF1622 | M16.2KOHM, 1/10W | 1 | |
| R313 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 1 | |
| R314 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R315, 16 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R317 | ERJ6GEYG153 | M 15KOHM, J, 1/10W | 1 | |
| R318 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R319, 20 | ERJ6GEYJ513 | M 51KOHM, J, 1/10W | 2 | |
| R321 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R322 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R323 | ERJ6GEYG153 | M 15KOHM, J, 1/10W | 1 | |
| R324, 25 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 2 | |
| R326-33 | ERJ12YJ222 | M 2.2KOHM, J, 1/2W | 8 | |
| R334 | ERJ6GEYJ223 | M 22KOHM, J, 1/10W | 1 | |
| R335 | ERJ6ENF5111 | M5.11KOHM, 1/10W | 1 | |
| R401, 02 | ERJ6GEYG154 | CHIP RESISTOR | 2 | |
| R403 | ERJ12YJ100 | M 10 OHM, J, 1/2W | 1 | |
| R404 | MPC2WR05K | METAL PLATE RESISTOR | 1 | |
| R405 | ERJ6ENF2152 | M21.5KOHM, 1/10W | 1 | |
| R406 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R407 | ERJ6ENF2152 | M21.5KOHM, 1/10W | 1 | |
| R408 | ERJ6GEYJ330 | CHIP RESISTOR | 1 | |
| R409 | ERJ6GEYJ223 | M 22KOHM, J, 1/10W | 1 | |
| R410 | ERJ6ENF2152 | M21.5KOHM, 1/10W | 1 | |
| R411, 12 | ERJ6GEYG152 | CHIP RESISTOR | 2 | |
| R413, 14 | ERJ6ENF1912 | M19.1KOHM, 1/10W | 2 | |
| R415 | ERJ6ENF8662 | CHIP RESISTOR | 1 | |
| R416-19 | ERJ6ENF1302 | M 13KOHM, 1/10W | 4 | |
| R420 | ERJ6GEY0R00V | M 0 OHM, 1/10W | 1 | |
| R421 | ERJ6ENF8061 | M8.06KOHM, 1/10W | 1 | |
| R501, 02 | ERDS1TJ474 | C 4.7KOHM, J, 1/2W | 2 | |
| R503, 04 | ERJ6ENF8253 | M 825KOHM, 1/10W | 2 | |
| R505 | ERJ6GEYJ334 | M 330KOHM, J, 1/10W | 1 | |
| R506, 07 | ERJ6ENF8253 | M 825KOHM, 1/10W | 2 | |
| R508 | ERJ6GEYJ334 | M 330KOHM, J, 1/10W | 1 | |
| R509, 10 | ERJ6ENF8253 | M 825KOHM, 1/10W | 2 | |
| R511 | ERJ12YJ100 | M 10 OHM, J, 1/2W | 1 | |
| R512 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R513 | ERJ6GEYJ202 | M 2KOHM, J, 1/10W | 1 | |
| R514, 15 | ERJ6GEYJ222 | M 2.2KOHM, J, 1/10W | 2 | |
| R516 | ERJ6GEYJ681 | M 680 OHM, J, 1/10W | 1 | |
| R517 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 1 | |
| R518 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R519 | ERDS2FJ332 | CARBON FILM RESISTOR | 1 | |
| R520 | ERJ6GEYJ332 | M 3.3KOHM, J, 1/10W | 1 | |
| R521 | ERJ6GEYJ222 | M 2.2KOHM, J, 1/10W | 1 | |
| R522 | ERJ6GEYG102 | M 1KOHM, J, 1/10W | 1 | |
| R523 | ERJ6GEYJ391 | CHIP RESISTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|-----------|--------------|-----------------------------|-----|---------|
| R524 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R525 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R528 | ERDS2FJ101 | CARBON FILM RESISTOR | 1 | |
| R529 | ERJ12YJ151 | M 150 OHM, J, 1/2W | 1 | |
| R531 | ERJ6GEYG153 | M 15KOHM, J, 1/10W | 1 | |
| R532, 33 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R534 | ERJ6GEYJ334 | M 330KOHM, J, 1/10W | 1 | |
| R601 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R1602 | R5B100J | W 10 OHM, J, 5W | 1 | |
| R1603 | ERC12UGK185 | S 1.8MOHM, K, 1/2W | 1 | △ |
| R1604-07 | ERJ6ENF1213 | M 121KOHM, 1/10W | 4 | |
| R1608-11 | RF5EJR18B | F 0.18 OHM, J, 5W | 4 | |
| R1612 | ERJ6GEYG183 | M 18KOHM, J, 1/10W | 1 | |
| R1613 | ERJ12YJ100 | M 10 OHM, J, 1/2W | 1 | |
| R1614, 15 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R1616 | ERJ6GEYF473 | M 47KOHM, J, 1/10W | 1 | |
| R1617 | ERJ12YJ820 | CHIP RESISTOR | 1 | |
| R1618 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R1619, 20 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 2 | |
| R1621 | ERJ6GEYG154 | CHIP RESISTOR | 1 | |
| R1622 | ERJ12YJ820 | CHIP RESISTOR | 1 | |
| R1623 | ERQ14AJ330 | F 33 OHM, J, 1/4W | 1 | |
| R1624 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R1625 | ERJ6GEYG154 | CHIP RESISTOR | 1 | |
| R1626 | ERJ12YJ820 | CHIP RESISTOR | 1 | |
| R1627-29 | ERJ6GEYG183 | M 18KOHM, J, 1/10W | 3 | |
| R1630 | ERJ6GEYG154 | CHIP RESISTOR | 1 | |
| R1631 | ERJ6ENF2803 | CHIP RESISTOR | 1 | |
| R1632-35 | ERJ6ENF2493 | M 249KOHM, 1/10W | 4 | |
| R1636-38 | ERJ6ENF4023 | M 402KOHM, 1/10W | 3 | |
| R1639, 40 | ERJ6GEYG154 | CHIP RESISTOR | 2 | |
| R1641-44 | ERJ6ENF2703 | M 270KOHM, 1/10W | 4 | |
| R1645 | ERJ6ENF2493 | M 249KOHM, 1/10W | 1 | |
| R1646 | ERJ12YJ100 | M 10 OHM, J, 1/2W | 1 | |
| R1647, 48 | ERJ12YJ680 | M 68 OHM, J, 1/2W | 2 | |
| R1650 | ERJ6ENF4023 | M 402KOHM, 1/10W | 1 | |
| R1701 | ERC12UGK685 | CARBON COMPOSITION RESISTOR | 1 | △ |
| R1702 | R5B100J | W 10 OHM, J, 5W | 1 | |
| R1703, 04 | ERJ6GEYJ223 | M 22KOHM, J, 1/10W | 2 | |
| R1705 | ERJ6ENF3902 | M 39KOHM, 1/10W | 1 | |
| R1706-09 | ERJ6ENF1213 | M 121KOHM, 1/10W | 4 | |
| R1710, 11 | MPC5WR22K | METAL PLATE RESISTOR | 2 | |
| R1712 | ERDS2FJ273 | C 27KOHM, J, 1/4W | 1 | |
| R1713 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R1714 | ERJ12YJ470 | M 47 OHM, J, 1/2W | 1 | |
| R1715 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R1716 | ERDS2FJ473 | CARBON FILM RESISTOR | 1 | |
| R1717 | ERJ6GEYJ101V | M 100 OHM, J, 1/10W | 1 | |
| R1718 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R1719 | ERJ6GEYG154 | CHIP RESISTOR | 1 | |
| R1720 | ERJ6GEYG103 | M 10KOHM, J, 1/10W | 1 | |
| R1721 | ERQ14AJ330J | FUSIBLE METAL FILM RESISTOR | 1 | |
| R1722 | ERJ12YJ470 | M 47 OHM, J, 1/2W | 1 | |
| R1723 | ERJ6GEYG154 | CHIP RESISTOR | 1 | |
| R1724-26 | ERJ6GEYG183 | M 18KOHM, J, 1/10W | 3 | |
| R1727-31 | ERJ6ENF2493 | M 249KOHM, 1/10W | 5 | |
| R1732 | ERJ6GEYG154 | CHIP RESISTOR | 1 | |
| R1733-35 | ERJ6ENF4023 | M 402KOHM, 1/10W | 3 | |
| R1736, 37 | ERJ6GEYG154 | CHIP RESISTOR | 2 | |
| R1738-41 | ERJ6ENF2703 | M 270KOHM, 1/10W | 4 | |
| R1746 | ERJ6ENF2493 | M 249KOHM, 1/10W | 1 | |
| R1747 | ERJ12YJ100 | M 10 OHM, J, 1/2W | 1 | |
| R1748, 49 | ERJ12YJ201 | CHIP RESISTOR | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|----------|--------------|-------------------------|-----|---------|
| R1750 | ERJ6ENF4023 | M 402KOHM, 1/10W | 1 | |
| RF1601 | A5MC100JP2 | 139C 10 | 1 | △ |
| RF1701 | A5MC100JP2 | 139C 10 | 1 | △ |
| T201 | ETB57LZ1AGAD | TRANSFORMER | 1 | △ |
| T202 | ETB57LZ19GAD | TRANSFORMER | 1 | △ |
| T301 | ETB57LZ1BGAD | TRANSFORMER | 1 | △ |
| T501 | ETB25KA1B8AD | TRANSFORMER | 1 | △ |
| VR251 | EVMEASA01B25 | VARIABLE RESISTOR | 1 | |
| VR301 | EVMEASA01B14 | VARIABLE RESISTOR | 1 | |
| VR401 | EVMEASA01B14 | VARIABLE RESISTOR | 1 | |
| Z501 | ERZVGAD471 | VARISTOR | 1 | △ |
| Z601 | ERZVGAD471 | VARISTOR | 1 | △ |
| Z1601 | ERZVGED751 | VARISTOR | 1 | △ |
| Z1602 | ERZVGAD471 | VARISTOR | 1 | △ |
| ZD201,02 | MAZ4270NMF | ZENER DIODE | 2 | |
| ZD205,06 | MAZ4270NMF | ZENER DIODE | 2 | |
| ZD301,02 | MAZ4270NMF | ZENER DIODE | 2 | |
| ZD305-08 | MA8150 | ZENER DIODE | 4 | |
| ZD401 | MA4033 | ZENER DIODE | 1 | |
| ZD402 | MA8360 | ZENER DIODE | 1 | |
| ZD501 | MA4120N | ZENER DIODE | 1 | |
| ZD502 | MAZ82700ML | ZENER DIODE | 1 | |
| ZD601 | MAZ82700ML | ZENER DIODE | 1 | |
| ZD1601 | MA4300N | ZENER DIODE | 1 | |
| ZD1602 | MA4047N | ZENER DIODE | 1 | |
| ZD1701 | MA4047N | ZENER DIODE | 1 | |