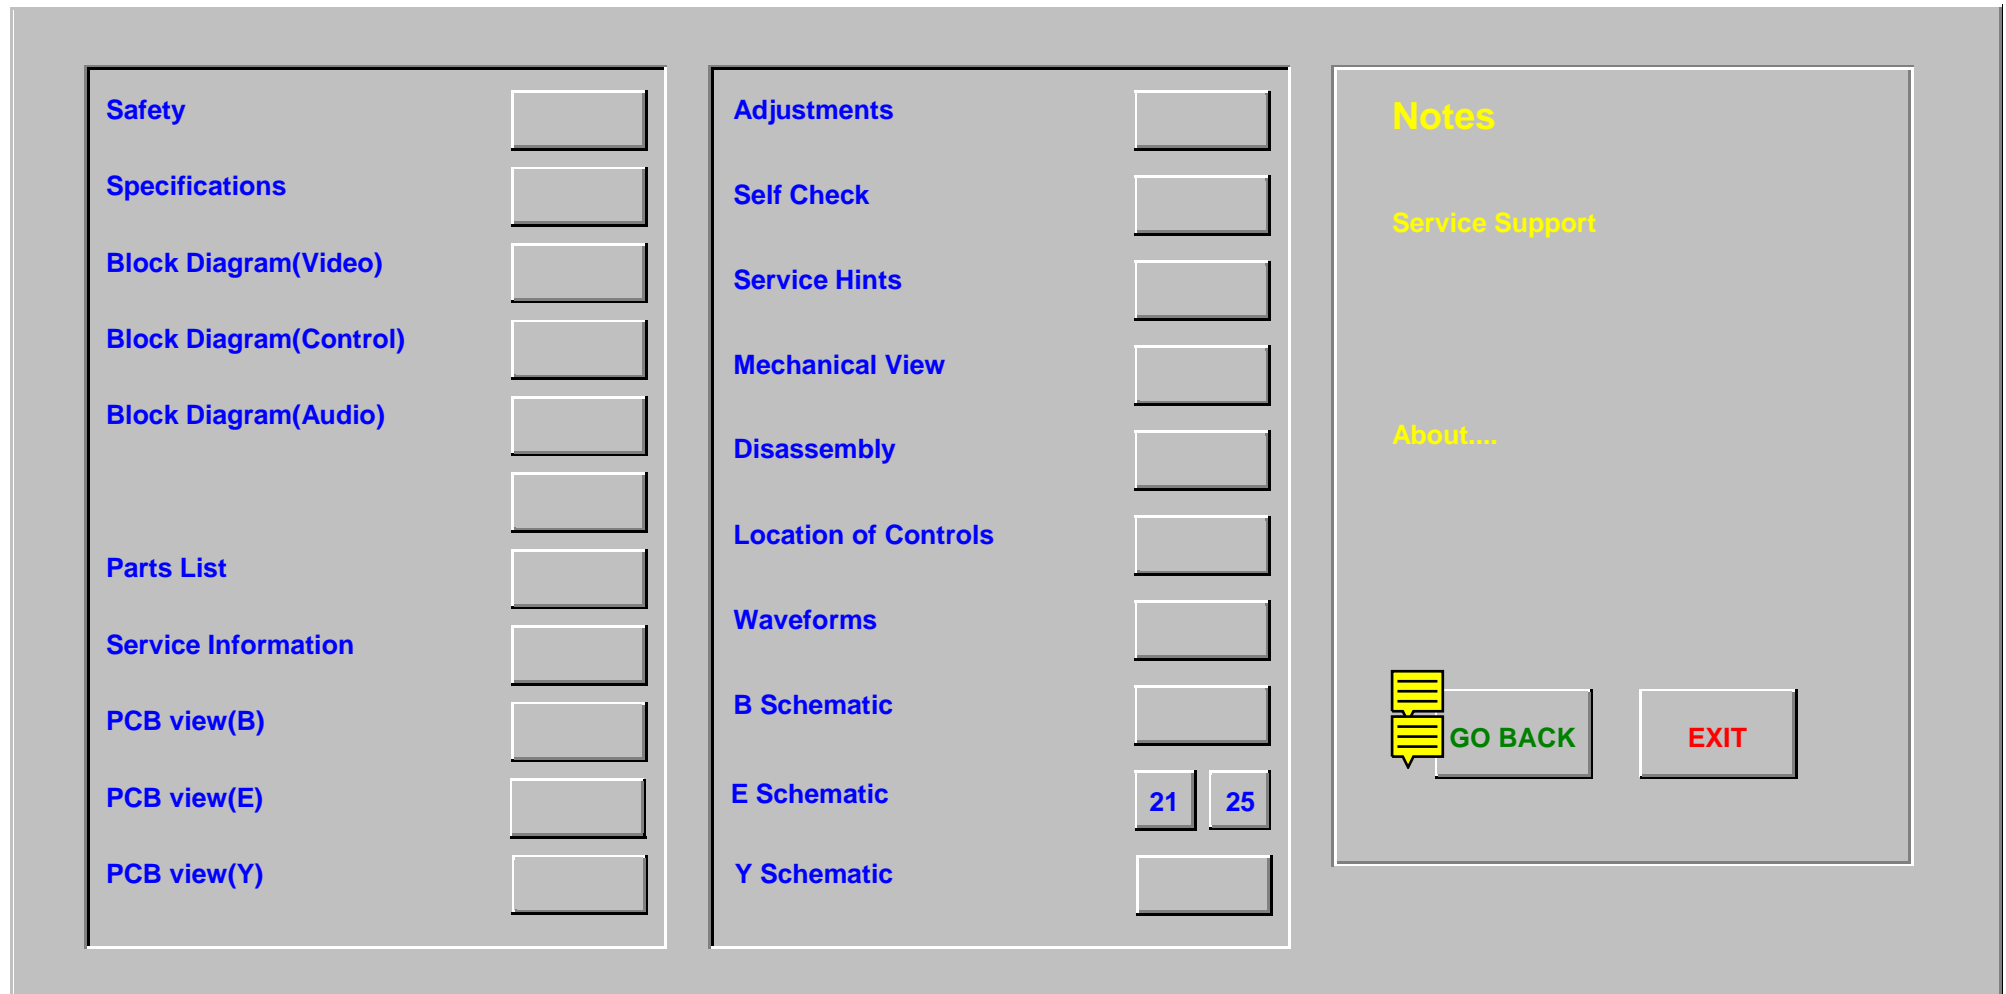


Service Manual

Colour Television EURO 2 Chassis

TX-21MD1E TX-25MD1E



Service Manual

Colour Television

TX-25MD1E

TX-21MD1E

EURO-2 Chassis

Specifications

(Information in brackets {} refer to TX-21MD1E)

Power Source :	220-240V AC 50Hz
Power Consumption :	92W { 75W }
Aerial Impedance :	75Ω unbalanced, Coaxial Type
Receiving System :	PAL-B / G, PAL-60 SECAM-B / G
Receiving Channels :	VHF E2 – E12 VHF H1 – H2 (ITALY) VHF A – H (ITALY) VHF R1 – R2 VHF R3 – R5 VHF R6 – R12 UHF E21 – E69 CATV (S01 – S05) CATV S1 – S10 (M1 – M10) CATV S11 – S20 (U1 – U10) CATV S21 – S41 (HYPERBAND)
Intermediate Frequency :	
Video	38.9MHz
Sound	33.4MHz, 33.16MHz 32.4MHz, 33.05MHz
Colour	34.47MHz (PAL) 34.657MHz, 34.5MHz (SECAM)

Video / Audio

Terminals :

AUDIO MONITOR OUT	Audio (RCA x 2) 500mV rms, 1kΩ
AV1 IN	Video (21 pin) 1 Vp-p 75Ω Audio (21 pin) 500mV rms, 10kΩ RGB (21 pin)
AV1 OUT	Video (21 pin) 1 Vp-p 75Ω Audio (21 pin) 500mV rms, 1kΩ
AV2 IN	Video (21 pin) 1 Vp-p 75Ω Audio (21 pin) 500mV rms, 10 kΩ S-Video IN Y : 1 Vp-p 75Ω (21 pin) C : 0.3 Vp-p 75Ω

AV2 OUT Video (21 pin) 1 Vp-p 75Ω
Audio (21 pin) 500mV rms, 1kΩ

AV3 IN Audio (RCA x 2)
500mV rms, 10kΩ
Video (RCA x 1)
1 Vp-p 75Ω

High Voltage : 28kV ±1kV {27kV ±1kV} at zero beam current

Picture Tube : 63 cmV {55 cmV}
measured diagonally.

Audio Output : 2 x 15 W (Music Power)
Internal Speaker 8Ω Impedance

Headphones 1 x 8 Ω Impedance

Accessories supplied : Remote Control
UM3 Battery

Dimensions : Height : 531 mm {480mm}
Width : 601 mm {525mm}
Depth : 440mm {480mm}

Net Weight 25kg {20.2kg}

Specifications are subject to change without notice.
Weight and dimensions shown are approximate.

Contents


Safety Precautions	2 ..
Location of Controls	3 ..
Chassis Service Position	4 ..
Self Check	6 ..
Adjustment Procedure	6 ..
Alignment Settings	7 ..
Waveform Pattern Table	8 ..
Conductor Views	9 ..
Block Diagrams	13 ..
Schematic Diagrams	16 ..
Parts Location	21 ..
Replacement Parts List	22 ..

Safety Precautions

General Guide Lines

1. It is advisable to insert an isolation transformer in the AC supply before servicing a hot chassis.
2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R–C combinations are correctly installed.
4. When the receiver is not being used for a long period of time, unplug the power cord from the AC outlet.
5. Potentials as high as 29 kV are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the picture to the chassis before handling the tube.
6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazards.

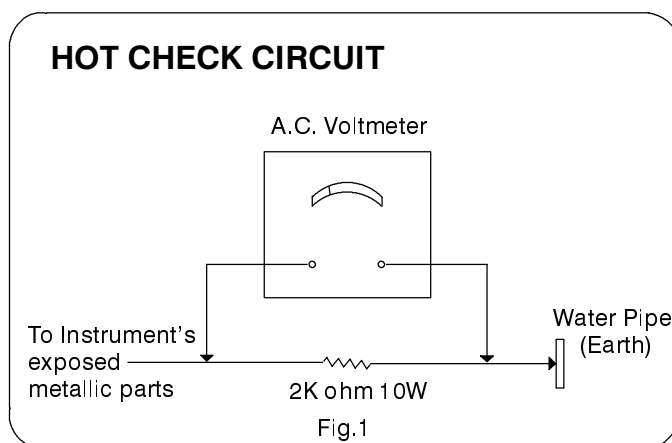4. Check each exposed Metallic part and check the voltage at each point.
5. Reverse the AC plug at the outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 1.4 Vrms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.



Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis the reading must be infinite.

Leakage Current Hot Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 2k ohm 10W resistor in series with an exposed metallic part on the receiver and an earth such as a water pipe.
3. Use an AC voltmeter with high impedance to measure the potential across the resistor.

X–Radiation Warning

1. The potential sources of X–Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service ensure that the jig is capable of handling 29kV without causing X–Radiation.

NOTE : It is important to use an accurate periodically calibrated high voltage meter

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate 28kV ± 1 kV {27kV ± 1 kV} at zero beam current if the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent an X–Radiation possibility, it is essential to use the specified tube.

Service Hints

How to remove the rear cover

1. Remove the 5 fixing screws (A) as shown in Fig.2

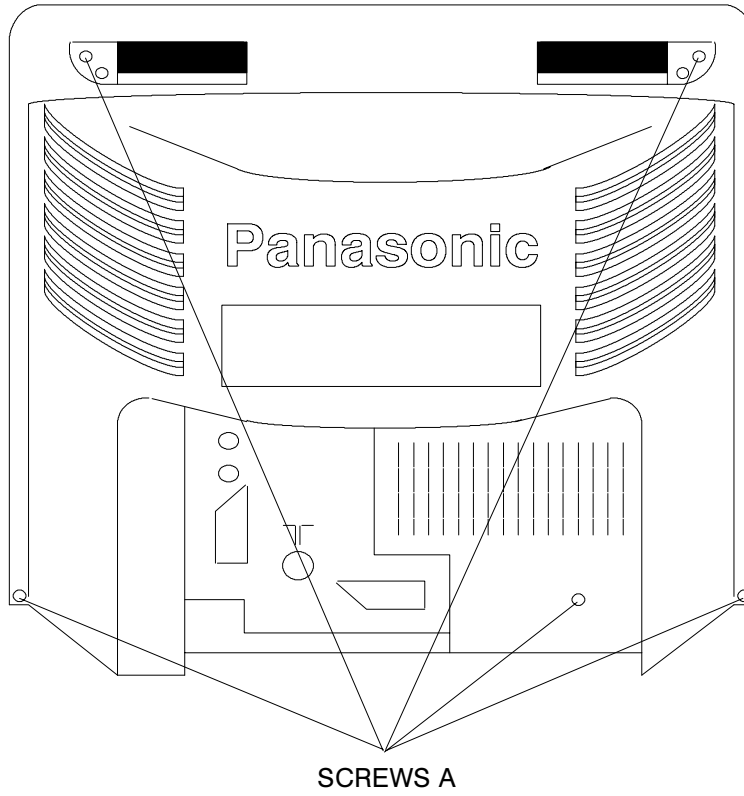


Fig.2.

Location Of Controls


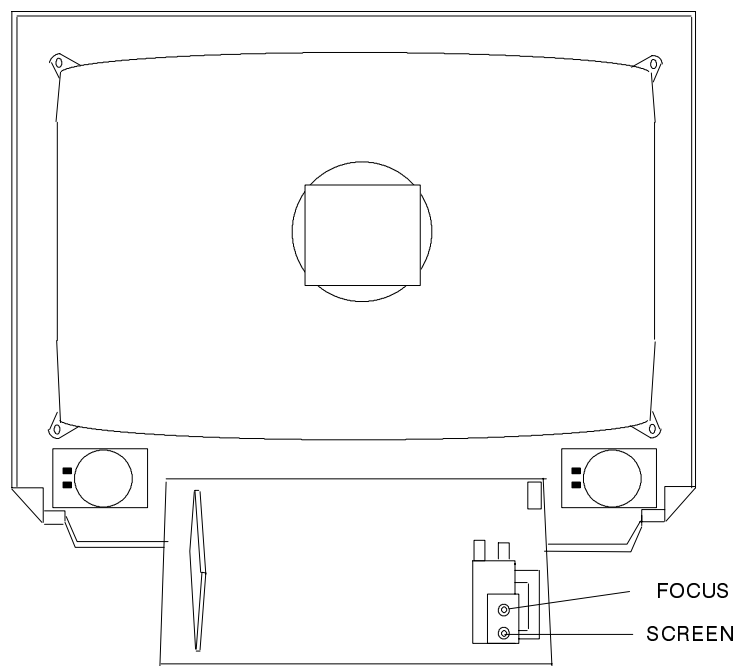
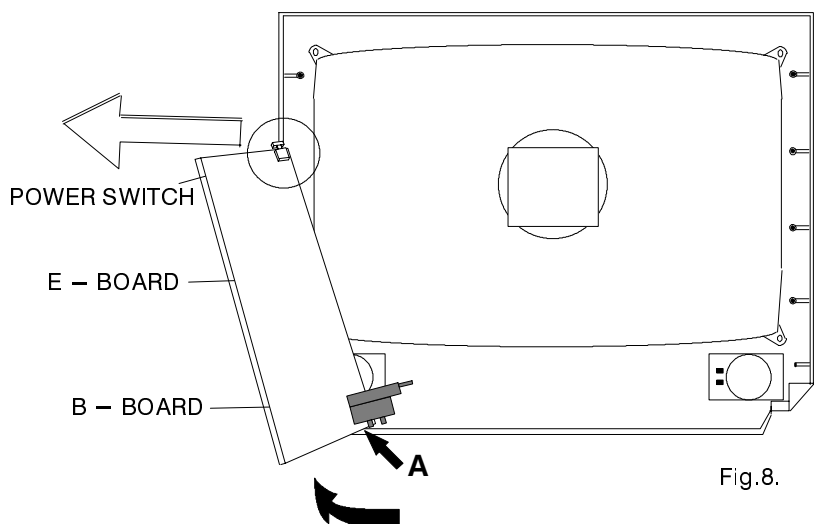
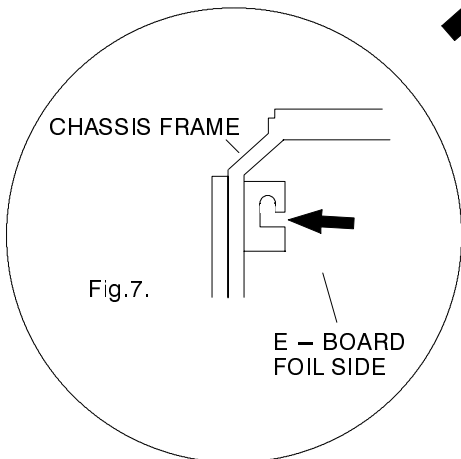
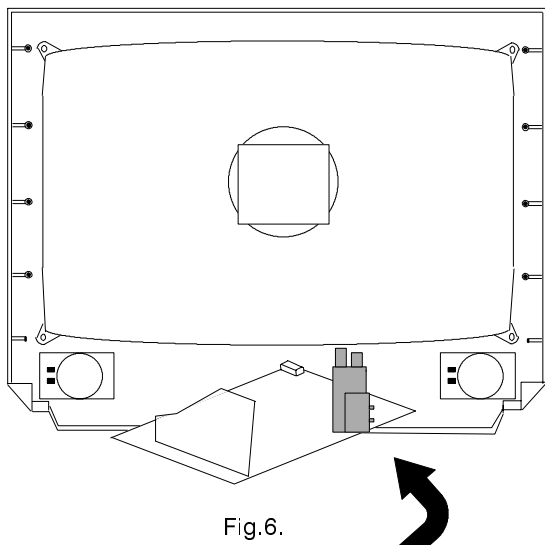
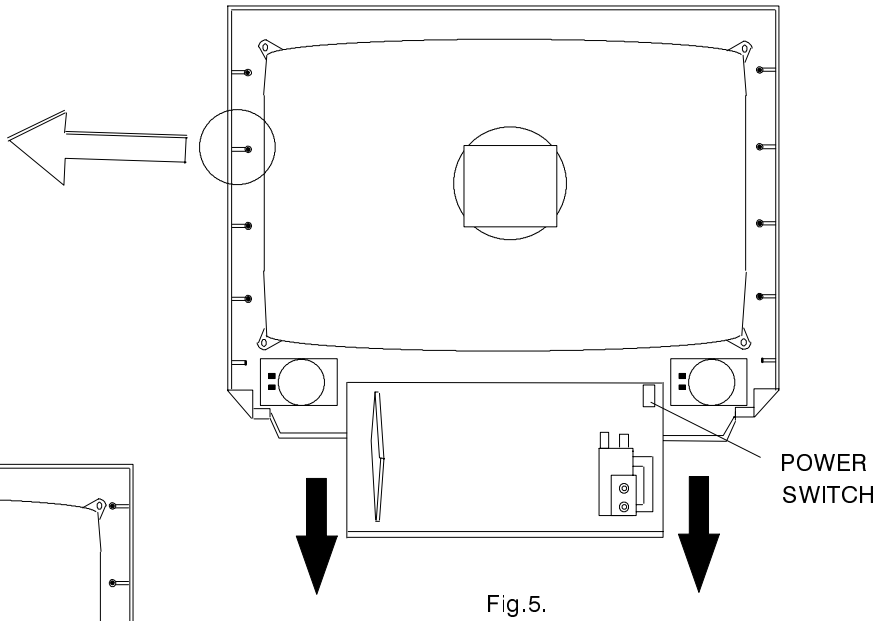


Fig.3.

How to move the chassis into the Service position

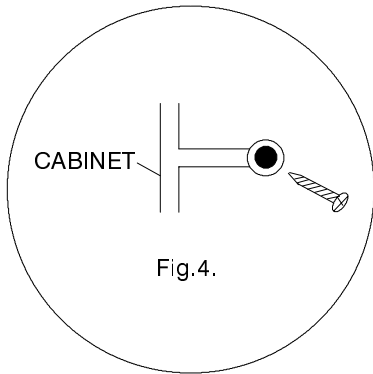1. Insert 1 of the backcover screws into the rib on the left hand side of the cabinet as shown in Fig.4.
2. Hold and lift the rear of the E- PCB chassis and gently pull the chassis toward you as shown in fig.5.
3. Release the respective wiring clips and rotate the chassis horizontally through 90°, anti-clockwise, shown in Fig.6, then elevate the front of the chassis as shown in fig.8.
4. Clip the chassis frame onto the screw in the rib of the cabinet, shown in Fig.7/8.
5. Locate the base of the chassis frame into the recess marked A, shown in Fig.8.
6. After servicing remove the screw and ensure all wiring is returned to its original position before returning the receiver to the customer.



Service Mode

The remote control is used for entering and storing adjustments, with the exception of cut-off adjustments which must always be done prior to service adjustment. Perform adjustments in accordance with screen display. The display on the screen also specifies the CCU variants as well as the approx. setting values. The adjustment sequence for the service mode is indicated below.

1. Set the Bass to maximum position, set the Treble to minimum position, press the F button followed by the Volume down on the customer controls at the front of the TV and at the same time press the Reveal button on the remote control, this will place the TV into the Service Mode.
2. Press the RED / GREEN buttons to step down / up through the functions.
3. Press the YELLOW / BLUE buttons to alter the function values.
4. Press the STORE button on the preset panel after each adjustment has been made to store the required values.
5. To exit the Service Mode press the Normalisation button.

NOTE: This TV also has the option of using a Memory Pack which enables you to copy the preset TV channels and analogue levels into the Memory Pack and then upload them onto another EURO-2 TV set.

Using the Memory Pack

TV to Memory Pack process

1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:–

Program
External>>TV

3. Press the blue button on the remote control. The screen will show:–

Program
TV>>External

4. Press the STORE button on the TV. The screen will show:–

Storing

5. All the tuning information stored inside the TV will now be transferred to the Memory Pack. This process will take 2–3 minutes to complete and when finished the screen will show:–

OK!

Memory Pack to TV Process

1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:–

Program
External>>TV

3. Press the STORE button on the TV. The screen will show:–

Loading

4. All the tuning information stored inside the Memory Pack will now be transferred to the TV. This process will take 2–3 minutes to complete and when finished the screen will show:–

OK!

5. The tuning information from the Memory Pack has now been copied into the TV
6. To exit from the Service Mode switch off the TV.
7. The process has now been completed and the Memory Pack can now be removed.

Errors

If an error occurs while using the Memory Pack the TV will detect this and the screen will show:–

Program
Error!

If this happens then switch off the TV and repeat the process that was being used. If the errors continue to occur then check the connectors between the TV and the memory pack and check the 9V battery inside the memory pack.

SELF CHECK

Self check is used to automatically check the Bus lines and Hexadecimal code of the TV set.

To enter the Self Check mode press Function down button, on the Preset Panel, at the same time pressing the Status button, on the Remote Control, and the screen will show:—

1 — ok	Tuner	11 — --	Dolby IC for C/R	21 — ok	P SBLED
2 — ok	VIF	12 — ok	P S MODE	22 — ok	P OFF
3 — ok	EEPROM	13 — ok	P TA0	23 — ok	P DEFL
4 — --	Sound AV switch 1	14 — ok	P TA1	24 — ok	P RAM
5 — ok	Video AV switch 1	15 — ok	P TA2		
6 — ok	VDP	16 — ok	P TA3	5A	Hex codes
7 — ok	TPU	17 — ok	P SDA	22	
8 — ok	MSP	18 — ok	P SCL1	20	
9 — --	Dolby Sub	19 — ok	P SCL 3	94	
10 — --	Dolby IC for L/R	20 — ok	P SCL4	85	

If the CCU ports have been checked and found to be incorrect then "--" will appear in place of "OK".























Adjustment Procedure

Item/Preparation	Adjustments
<p>+B SET-UP</p> <ol style="list-style-type: none"> 1. Recieve a window pattern 2. Set the controls: Brightness minimum Contrast minimum Volume minimum 	<ol style="list-style-type: none"> 1. Set the +B voltage up as follows: Adjust R811 so that B2 shows 130V +/- 1V 2. Confirm the following voltages. B1 200 +/- 10V B6 12 +/- 0.5V B3 27 +/- 1V B7 5 + 0.1/-0.25V B4 35.5 +/- 1V B8 5 +/- 0.25V B5 16.0 +/- 1V U33 31 +/- 1V
<p>RF AGC</p> <ol style="list-style-type: none"> 1. Receive a test pattern. 2. Connect an oscilloscope between the tuner RF AGC and ground. 3. Set the oscilloscope gain range to 1V/div. 	<ol style="list-style-type: none"> 1. Check that the noise becomes large when the RF AGC VR R126 is turned counterclockwise. After the check turn it clockwise 2. Gradually turn the RF AGC VR anti-clockwise, and set the RF AGC VR to the point where the RF AGC voltage is just falling to a point where this voltage drops by 0.2V from the maximum value.
<p>CUT OFF</p> <ol style="list-style-type: none"> 1. Receive a widow pattern. 2. Degauss the tube externally. 3. Set the TV into Service Mode 1. 4. Select Cutoff DC mode. 	<ol style="list-style-type: none"> 1. Confirm then value is 128 and select Ug2 mode noting colour with largest value 2. Turn the screen VR until a colour reaches 20~30. 3. Connect an oscilloscope to the cathode with the biggest value colour. 4. Select Cutoff DC mode and adjust Cutoff pulse to 159V +/- 5V. 5. Disconnect the oscilloscope and adjust the screen to whichever colour reaches 50 +/- 10 first.

Alignment Settings

Alignment Function	TX–25MD1E	TX–21MD1E	Settings / Special features
1. Vertical amplitude	V–AM P051	V–AM P063	Optimum setting
2. Vertical symmetry	V–SYM 013	V–SYM 002	
3. Vertical linearity	V–LIN 012	V–LIN –020	
4. Vert. D.C.	Vert. D.C. 000	Vert. D.C. 000	No adjustment
5. V–Pos.	V. Pos. 003	V. Pos 005	Optimum setting
6. Horizontal amplitude	H–AM P –033	H–AM P –044	Optimum setting
7. Horizontal position	H–POS 049	H–POS 542	
8. Text Position	TEXT POSITION 045	TEXT POSITION 049	Optimum setting
9. EW–amplitude	E–W–AMP 1 –058	E–W–AMP 1 –059	Optimum setting
10. EW–amplitude	E–W–AMP 2 023	E–W–AMP 2 044	Optimum setting
11. Trapezium–comp	TRAPEZ–1 –014	TRAPEZ–1 000	Optimum setting
12. Trapezium– comp	TRAPEZ–2 012	TRAPEZ–2 –009	Optimum setting
13. Colour VCO	Colour VCO 015	Colour VCO 006	Press either Blue or Yellow buttons to effect automatic adjustment
14. Cut–off DC	Cut–off DC 050	Cut–off DC 050	No adjustment
15. Ug2 Test	Ug 2 Test 107 021 023	Ug 2 Test 094 044 020	Select Cutoff DC in Service Mode mode and confirm the value is 128. Select Ug 2 Test noting colour with largest value, adjust on FBT until a colour reaches 20 ~ 30. Connect an oscilloscope to the cathode of the biggest value colour, select Cutoff DC mode and adjust get Cutoff pulse voltage to 159±5V. Disconnect the oscilloscope and adjust the screen to whichever colour reaches 50±10 first.
16. Cutoff	Cutoff 045 055 050	Cutoff 057 064 056	Press the GREEN button to step through the settings. Adjust for optimum.
17. White	White 224 255 237	White 200 255 246	Press the GREEN button to step through the settings. Adjust for optimum.

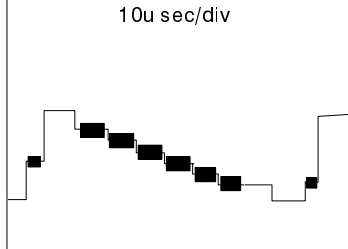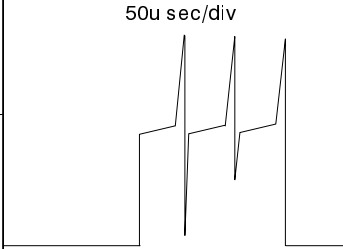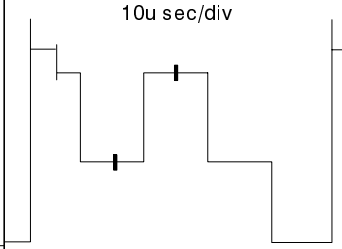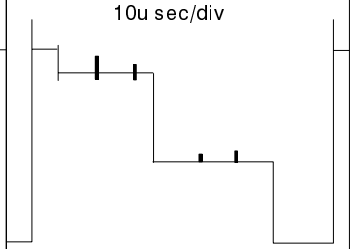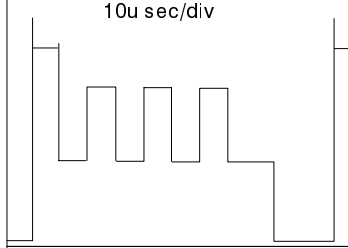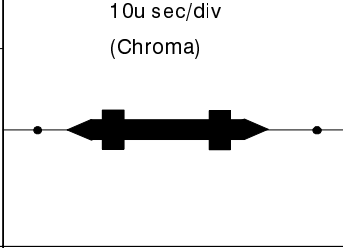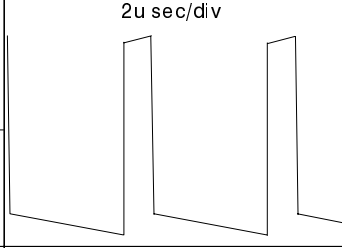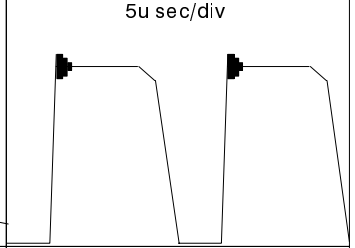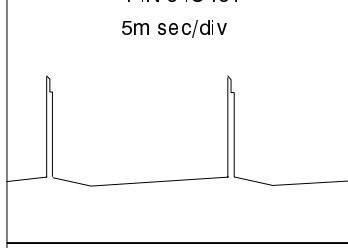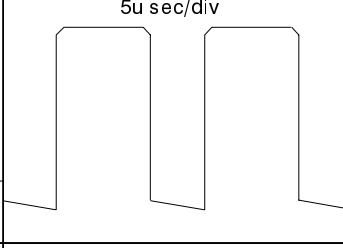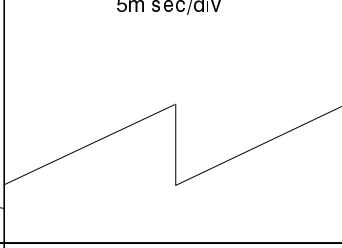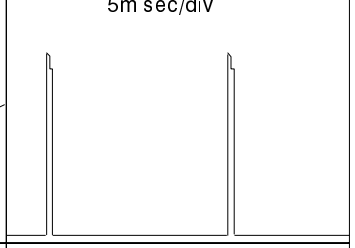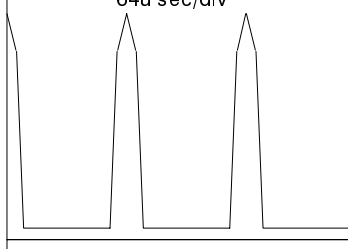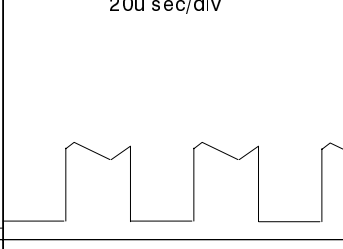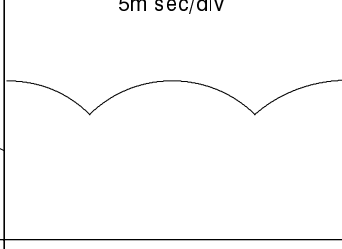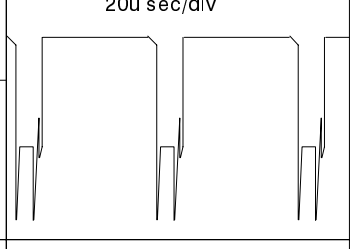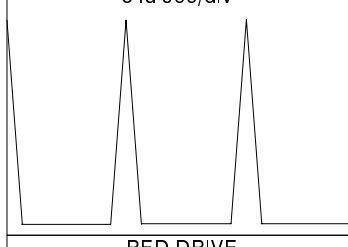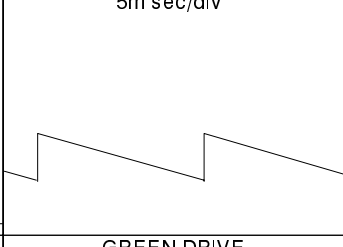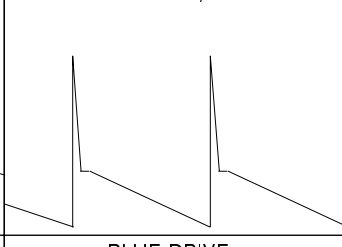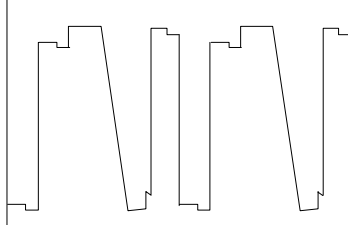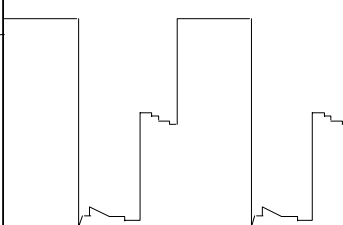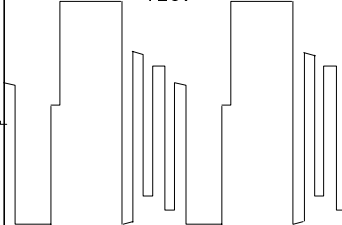WAVEFORM PATTERN TABLE




<p>PIN 42 I601 10u sec/div</p> 	<p>PIN 6 E8 50u sec/div</p> 	<p>PIN 5 E8 10u sec/div</p> 	<p>PIN 3 E8 10u sec/div</p> 
<p>PIN 4 E8 10u sec/div</p> 	<p>PIN 44 IC601 10u sec/div (Chroma)</p> 	<p>PIN 7 IC801 2u sec/div</p> 	<p>PIN 18 T801 5u sec/div</p> 
<p>PIN 6 IC451 5m sec/div</p> 	<p>PIN 3 IC801 5u sec/div</p> 	<p>PIN 6 IC601 5m sec/div</p> 	<p>PIN 34 IC601 5m sec/div</p> 
<p>COLLECTOR Q551 64u sec/div</p> 	<p>BASE Q503 20u sec/div</p> 	<p>PIN 7 IC701 5m sec/div</p> 	<p>BASE Q551 20u sec/div</p> 
<p>PIN 8 IC701 64u sec/div</p> 	<p>PIN 1 IC451 5m sec/div</p> 	<p>PIN 5 IC451 5m sec/div</p> 	
<p>RED DRIVE EMITTER Q351 80v</p> 	<p>GREEN DRIVE EMITTER Q352 100v</p> 	<p>BLUE DRIVE EMITTER Q353 120v</p> 	




SCHEMATIC DIAGRAM FOR MODELS TX–25/21MD1E (EURO–2L CHASSIS)

IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

Notes

1. RESISTOR
All resistors are carbon 1/4W resistor, unless marked.
Unit of resistance is OHM (Ω) (K=1,000, M=1,000,000).
2. CAPACITOR
All capacitors are ceramic 50V capacitors, unless marked, the unit of capacitance is μF unless otherwise stated.
3. COIL
Unit of inductance is μH , unless otherwise stated.
4. TEST POINT
 : Test Point position
5. EARTH SYMBOL
 : Chassis Earth (Cold)
 : Line Earth (Hot)
6. VOLTAGE MEASUREMENT
Voltage is measured by a DC voltmeter.
Measurement conditions are as follows:

Power source	AC 220–240V, 50Hz
Receiving Signal	Colour Bar signal (RF)
All customer controls	Maximum position
7.
 : Indicates the Video signal path
 : Indicates the Audio signal path
 : Indicates the Vertical/Horizontal signal path
8. This schematic diagram is the latest at the time of printing and is subject to change without notice.

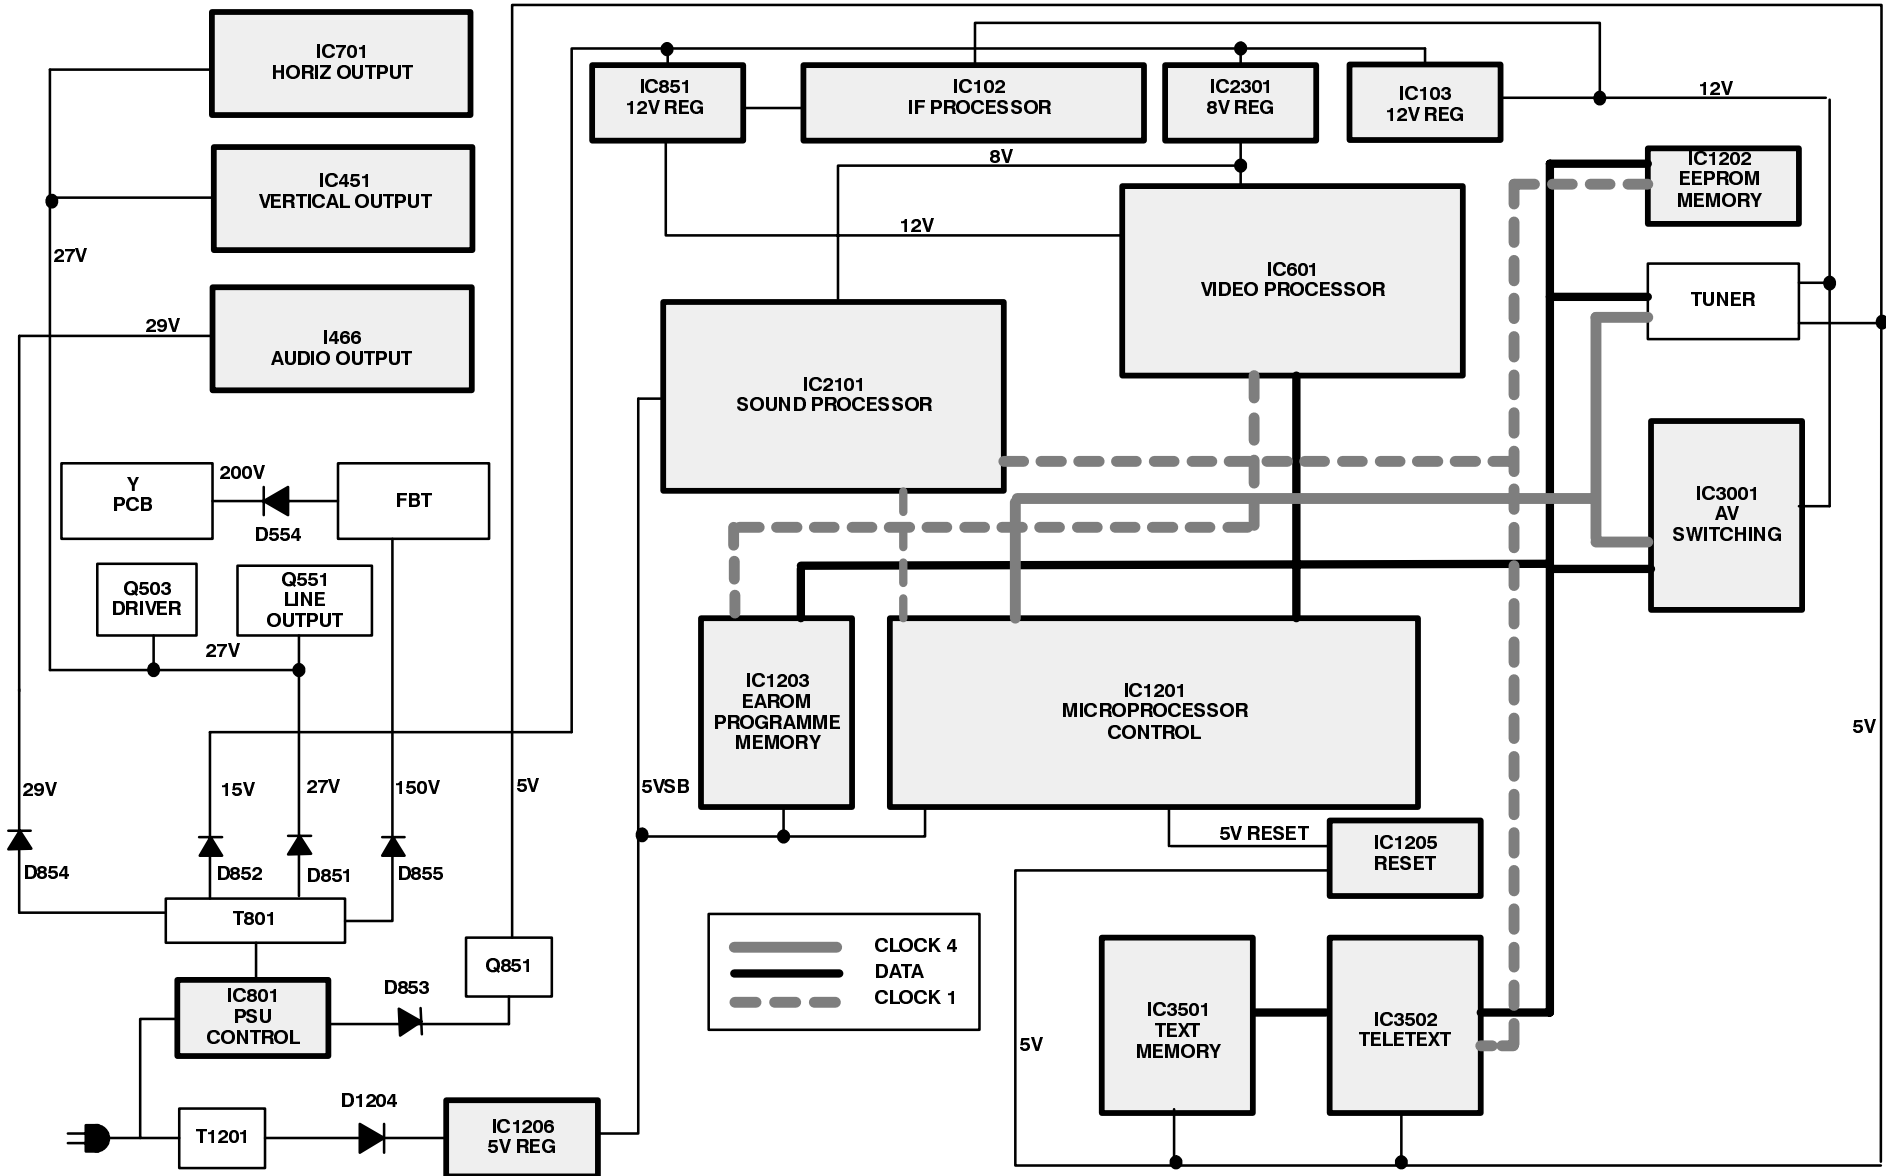
Precautions

- a. Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
- b. Do not short-circuit the hot and cold circuits as electrical components may be damaged.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously, as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.


Remarks

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits, except the Power Circuit, are COLD.


POWER SUPPLY AND CONTROL BLOCK DIAGRAM




VIDEO BLOCK DIAGRAM

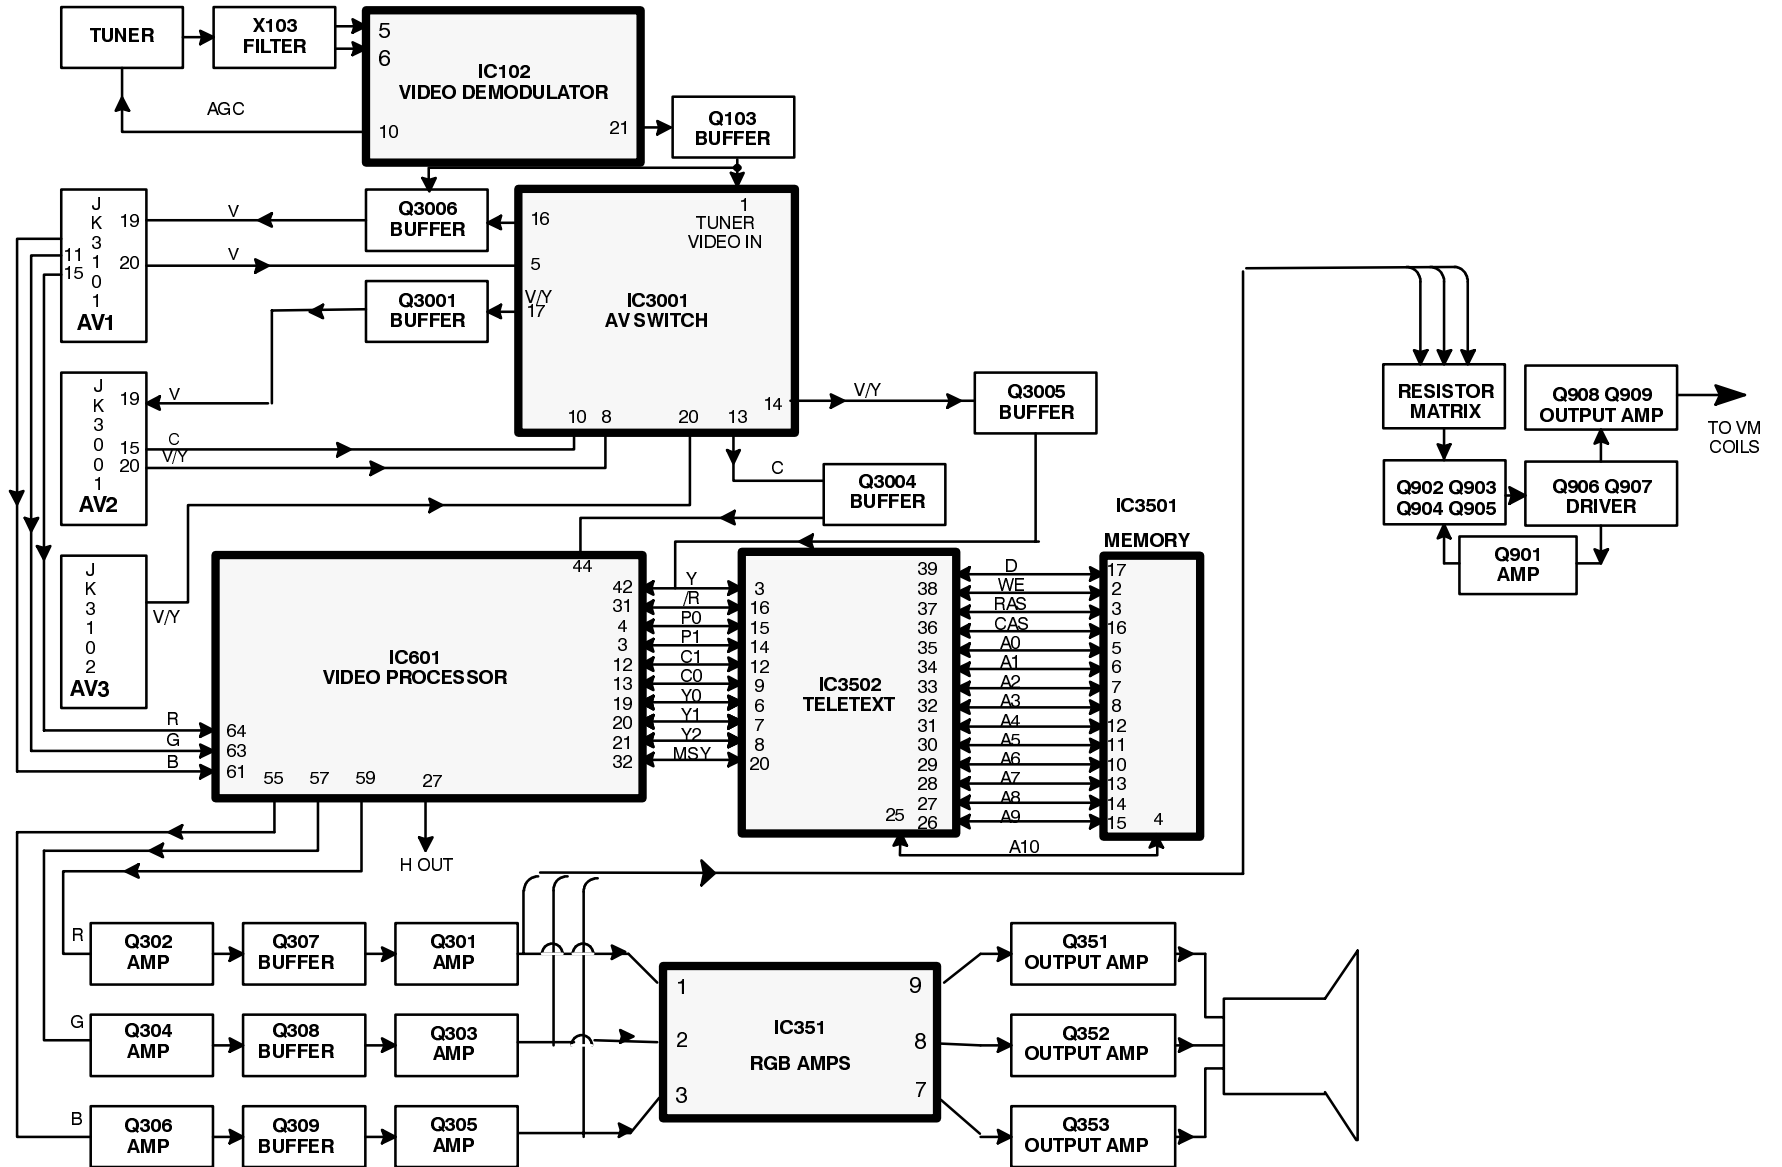

AUDIO BLOCK DIAGRAM

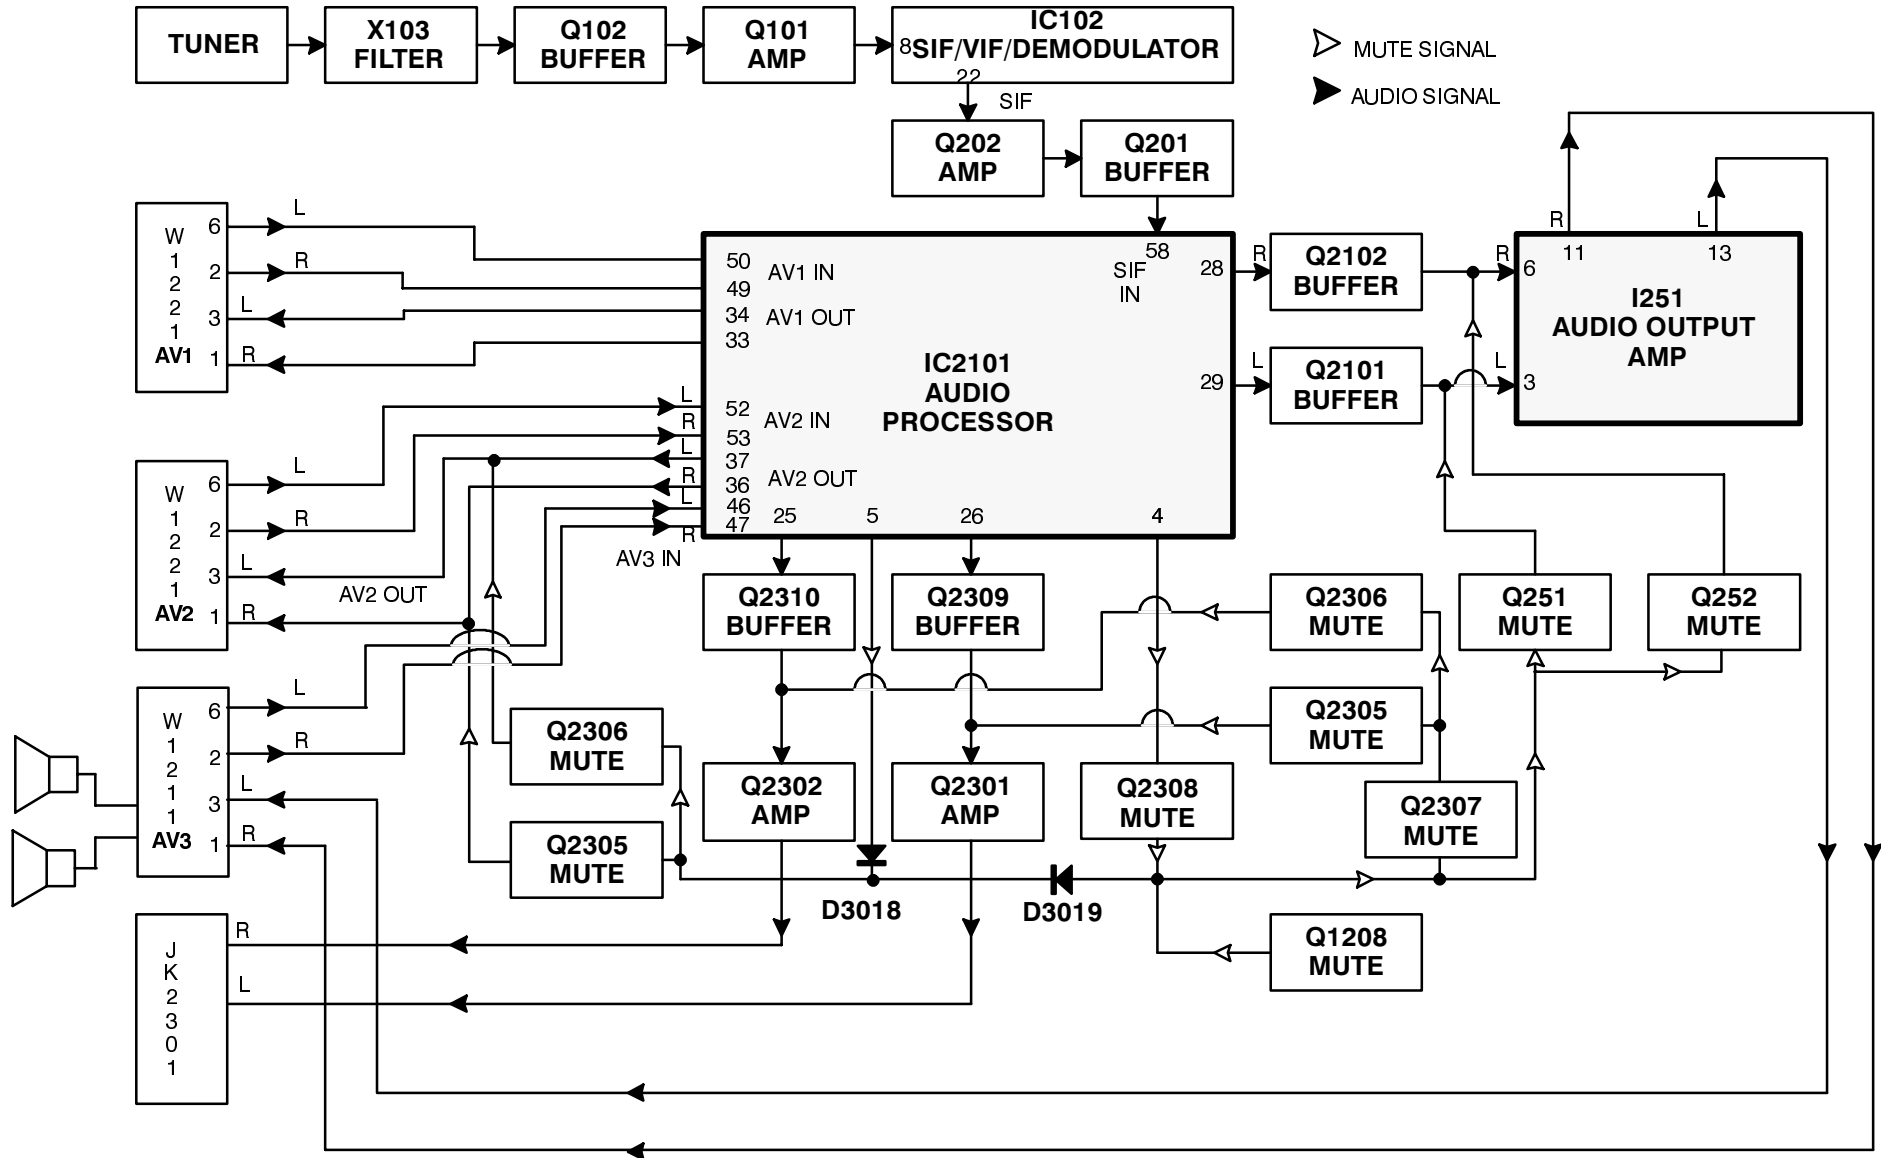

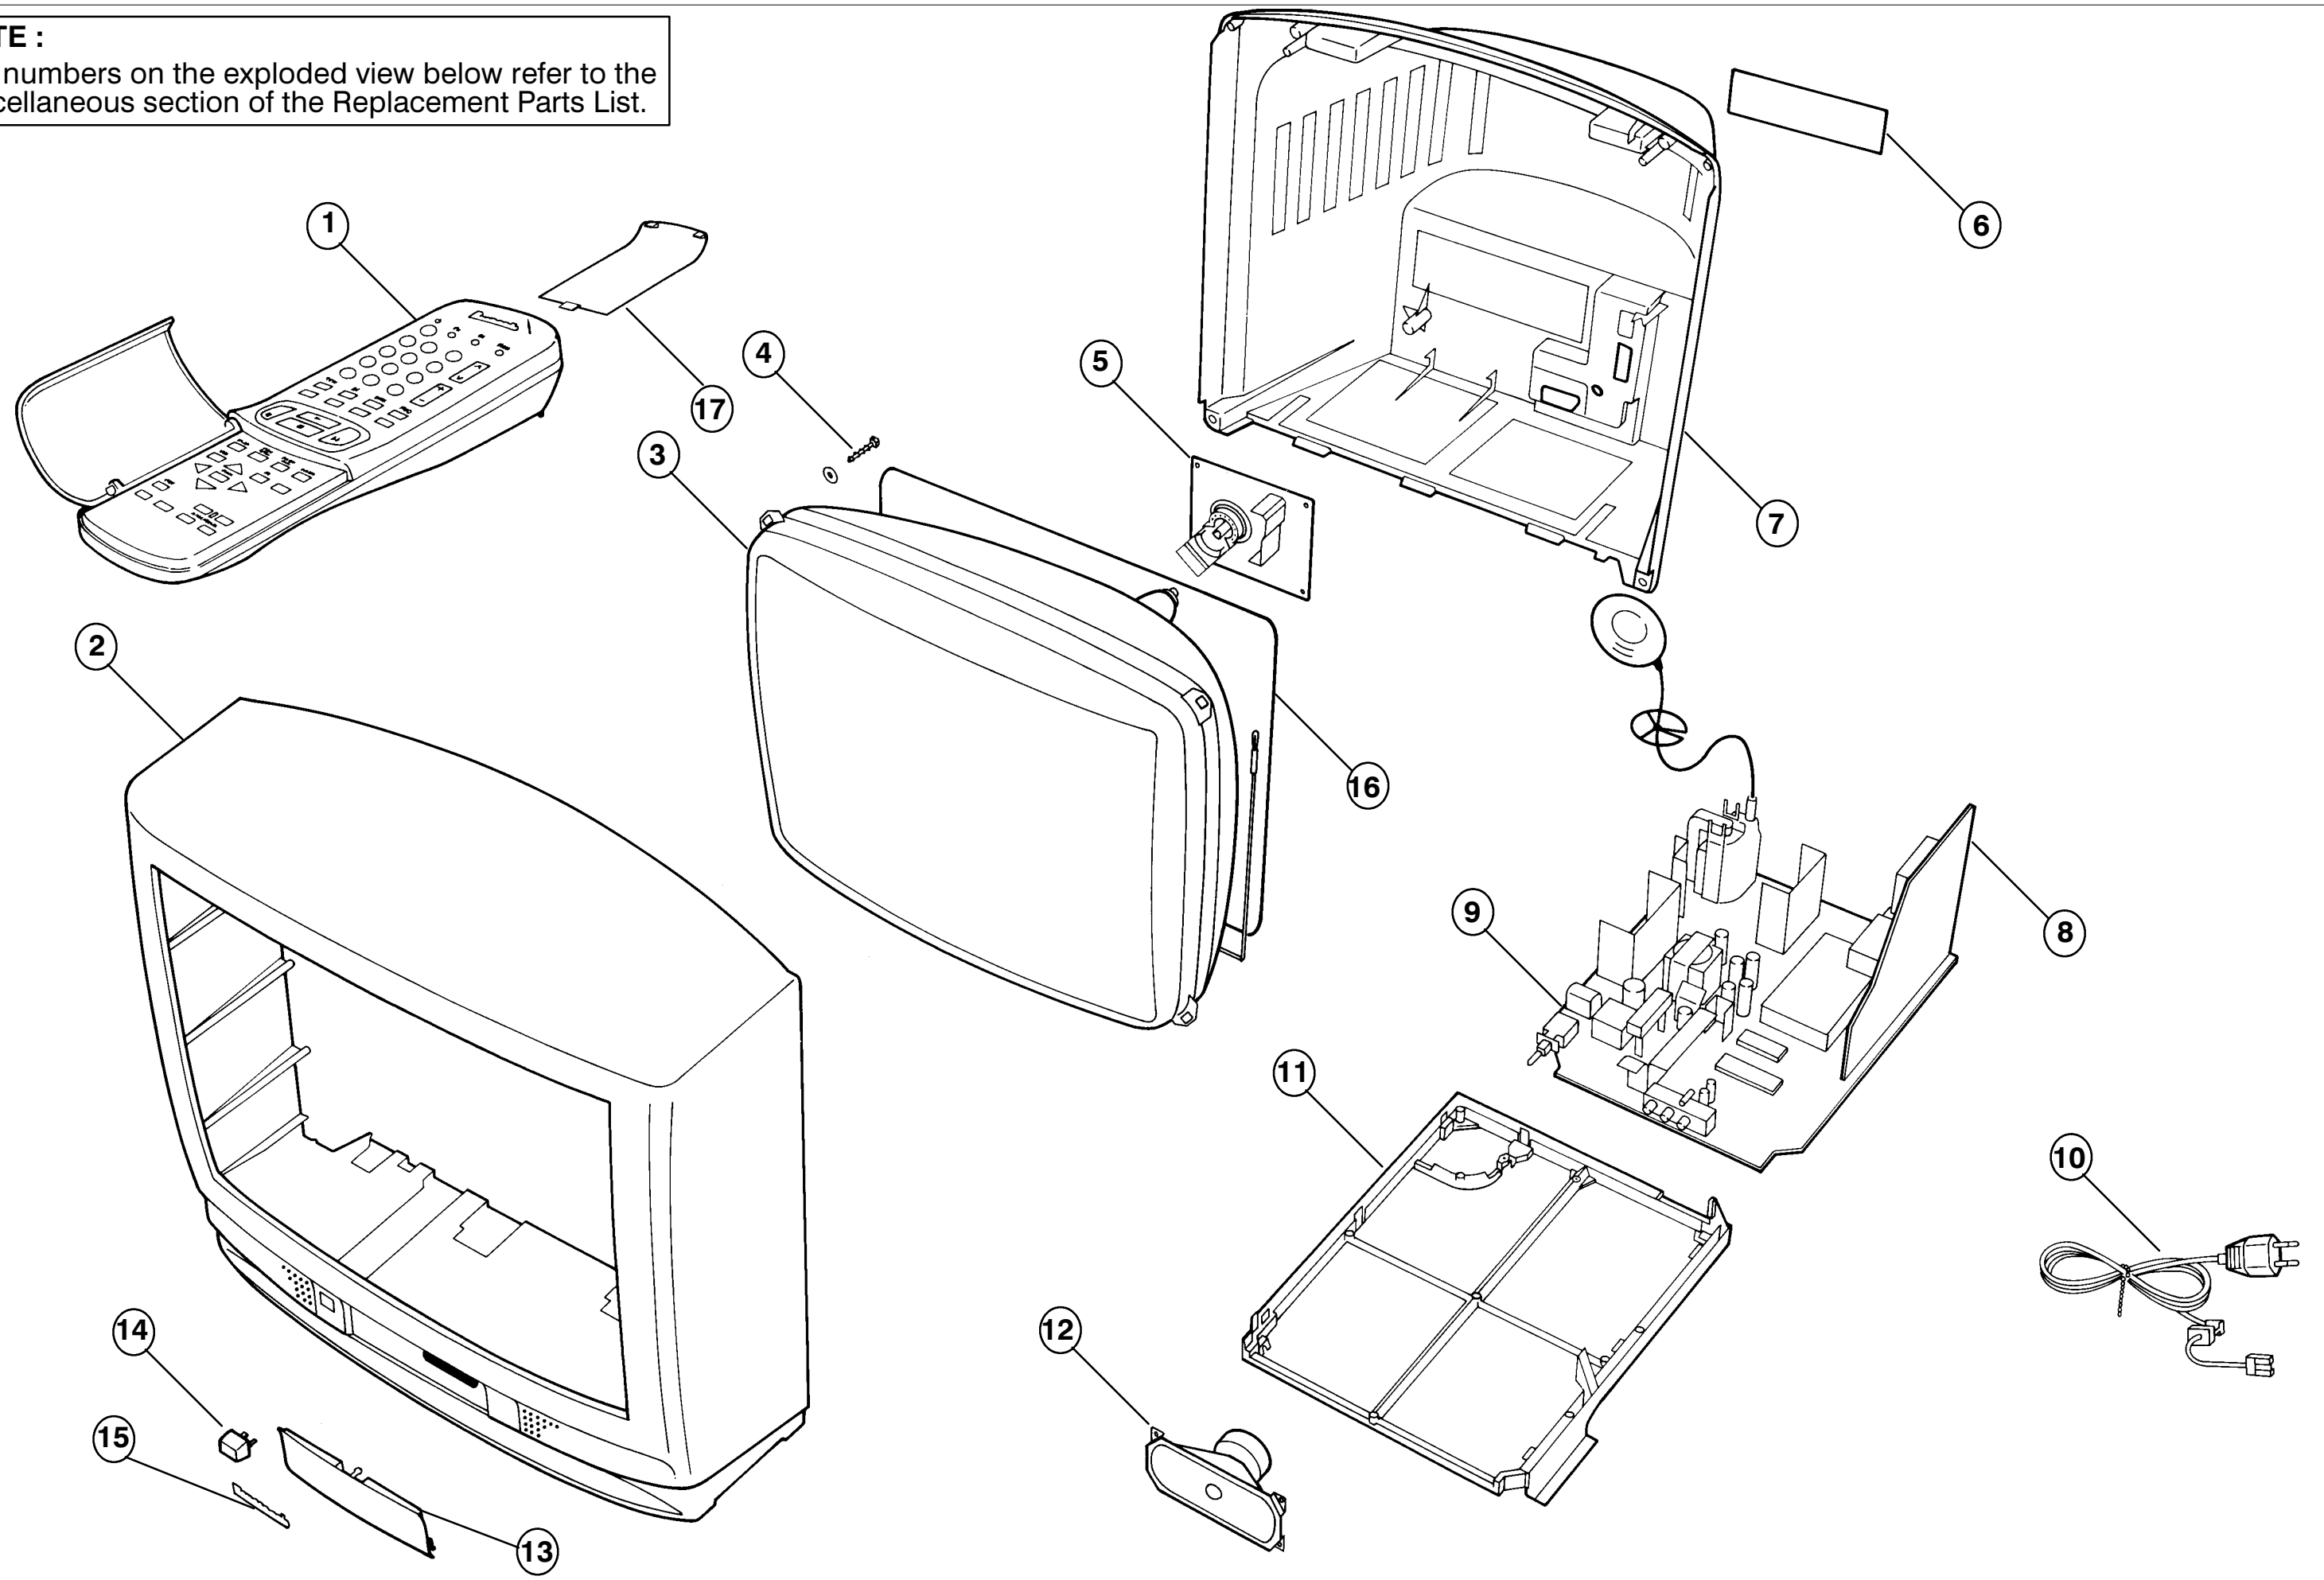NOTE :
The numbers on the exploded view below refer to the miscellaneous section of the Replacement Parts List.



REPLACEMENT PARTS LIST

Important Safety Notice

Components identified by Δ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.

Ref No.	Part No.	Description	
MISCELLANEOUS COMPONENTS			
1)	EUR51920	REMOTE CONTROL	
2)	*****	SEE DIFFERENCE LIST	
3)	*****	SEE DIFFERENCE LIST	
4)	*****	SEE DIFFERENCE LIST	
5)	*****	SEE DIFFERENCE LIST	
6)	TBM8E1451-1	PRESET LABEL	
7)	*****	SEE DIFFERENCE LIST	
8)	TNP117064AG	B P.C.B.	Δ
9)	*****	SEE DIFFERENCE LIST	
10)	TSX8E0011	MAINS LEAD	Δ
11)	TMX8E010	CHASSIS FRAME	
12)	EASG12D531F2	SPEAKER	
13)	TKP8E1127	LID	
14)	TBX8E026	POWER BUTTON	
15)	TBM153022	PANASONIC BADGE	
16)	*****	SEE DIFFERENCE LIST	
17)	UR51EC780	BATTERY COVER (REMOTE)	
	TKP8E1128	LED PANEL	
	TMW8E020	LED HOLDER	
	TMX8E010	LED PANEL	
	TPD8E562	CUSHION	
	TQB8E2025A	GERMAN INSTRUCTION BOOK	Δ
	TQB8E2025B	DUTCH INSTRUCTION BOOK	Δ
	TQB8E2025D	FRENCH INSTRUCTION BOOK	Δ
	TQB8E2025E	SPANISH INSTRUCTION BOOK	Δ
	TQB8E2025F	SWEDISH INSTRUCTION BOOK	Δ
	TQB8E2025G	NORWEGIAN INSTRUCTION BOOK	Δ
	TQB8E2025H	SUOMI INSTRUCTION BOOK	Δ
	TQB8E2025J	PORTUGUESE INSTRUCTION BOOK	Δ
	TQB8E2025K	DANISH INSTRUCTION BOOK	Δ
	TEK6935	LID SWITCH	
	TES8E012	EARTH SPRING	
	F9-4-220	RELAY	
	UM-3DEP-2P	BATTERY	
MOE10	TES4537	SPRING	
MOE4	TES8E011	CHASSIS SPRING	
MOE6	TES4537	SPRING	
TNR001	ENV578F5G3	TUNER	Δ
CAPACITORS			
C001	ECUV1H103ZFX	S.M.CAP	50V 10nF
C002	ECEA1HUR33	ELECT	50V 0.33 μ F
C003	ECUV1H104ZFX	S.M.CAP	50V 100nF
C004	ECEA1CU221	ELECT	16V 220 μ F
C006	ECEA1CU101	ELECT	16V 100 μ F
C008	ECQB1H104J	FILM	50V 100nF
C009	ECUV1H104ZFX	S.M.CAP	50V 100nF
C011	ECQB1H104J	FILM	50V 100nF
C011	ECUV1H104ZFX	S.M.CAP	50V 100nF
C109	ECUV1H390JFX	S.M.CAP	50V 39pF
C110	ECUV1H102KBX	S.M.CAP	50V 1nF
C111	ECUV1H683ZFX	S.M.CAP	50V 68nF
C112	ECUV1H150JGX	S.M.CAP	50V 15pF
C113	ECEA1CU100	ELECT	16V 10 μ F
C114	ECUV1H270JFX	S.M.CAP	50V 27pF
C115	ECUV1H103ZFX	S.M.CAP	50V 10nF
C116	ECEA1CU100	ELECT	16V 10 μ F

Ref No.	Part No.	Description	
C117	ECUV1H103ZFX	S.M.CAP	50V 10nF
C118	ECUV1H103ZFX	S.M.CAP	50V 10nF
C119	ECEA1HUR47	ELECT	50V 0.47 μ F
C120	ECUV1H102KBX	S.M.CAP	50V 1nF
C121	ECUV1H103ZFX	S.M.CAP	50V 10nF
C122	ECUV1H151JX	S.M.CAP	50V 150pF
C123	ECUV1H102KBX	S.M.CAP	50V 1nF
C124	ECEA1CU470	ELECT	16V 47 μ F
C125	ECUV1H103ZFX	S.M.CAP	50V 10nF
C127	ECEA1CU470	ELECT	16V 47 μ F
C128	ECUV1H103ZFX	S.M.CAP	50V 10nF
C130	ECEA1HUR47	ELECT	50V 0.47 μ F
C131	ECEA1HU2R2	ELECT	50V 2.2 μ F
C132	ECUV1H331KBX	S.M.CAP	50V 330pF
C133	ECUV1H102KBX	S.M.CAP	50V 1nF
C134	ECUV1H103ZFX	S.M.CAP	50V 10nF
C135	ECUV1H103ZFX	S.M.CAP	50V 10nF
C136	ECEA1CU100	ELECT	16V 10 μ F
C137	ECEA1EU100	ELECT	25V 10 μ F
C138	ECUV1H103ZFX	S.M.CAP	50V 10nF
C139	ECUV1H020CCX	S.M.CAP	50V 2pF
C140	ECEA1HU010	ELECT	50V 1 μ F
C141	ECUV1H102KBX	S.M.CAP	50V 1nF
C142	ECUV1H102KBX	S.M.CAP	50V 1nF
C143	ECUV1H102KBX	S.M.CAP	50V 1nF
C145	ECEA1CU470	ELECT	16V 47 μ F
C146	ECUV1H104ZFX	S.M.CAP	50V 100nF
C170	ECUV1H331KBX	S.M.CAP	50V 330pF
C201	ECUV1H070DCX	S.M.CAP	50V 7pF
C202	ECUV1H070DCX	S.M.CAP	50V 7pF
C203	ECUV1H470JX	S.M.CAP	50V 47pF
C204	ECUV1H560JCX	S.M.CAP	50V 56pF
C205	ECUV1H100DCX	S.M.CAP	50V 10pF
C207	ECUV1H220JCX	S.M.CAP	50V 22pF
C209	ECUV1H103ZFX	S.M.CAP	50V 10nF
C210	ECUV1H103ZFX	S.M.CAP	50V 10nF
C211	ECUV1H103ZFX	S.M.CAP	50V 10nF
C251	ECEA1EU101	ELECT	25V 100 μ F
C252	ECUV1H223KBX	S.M.CAP	50V 22nF
C253	ECEA1HU4R7	ELECT	50V 4.7 μ F
C255	ECEA1EGE101	ELECT	25V 100 μ F
C256	ECUV1H223KBX	S.M.CAP	50V 22nF
C257	ECEA1HU4R7	ELECT	50V 4.7 μ F
C258	ECEA1EU101	ELECT	25V 100 μ F
C260	ECEA1VU102	ELECT	35V 1000 μ F
C261	ECEA1VU102	ELECT	35V 1000 μ F
C263	ECEA1HU010	ELECT	50V 1 μ F
C264	ECEA1HGE222	ELECT	50V 2200 μ F
C266	ECEA1HU010	ELECT	50V 1 μ F
C267	ECUV1H104ZFX	S.M.CAP	50V 100nF
C268	ECUV1H104ZFX	S.M.CAP	50V 100nF
C269	ECEA1CU100	ELECT	16V 10 μ F
C271	ECUV1H561KBX	S.M.CAP	50V 560pF
C301	ECEA1CU470	ELECT	16V 47 μ F
C302	ECUV1H104ZFX	S.M.CAP	50V 100nF
C303	ECUV1H104ZFX	S.M.CAP	50V 100nF
C310	ECUV1H104ZFX	S.M.CAP	50V 100nF
C354	ECQM2104KZ	FILM	250V 100nF
C355	ECUV1H222JCX	S.M.CAP	50V 2.2nF
C356	ECUV1H222JCX	S.M.CAP	50V 2.2nF
C357	ECUV1H222JCX	S.M.CAP	50V 2.2nF
C360	ECKC3D152J	CERAMIC	2KV 1.5nF Δ

**TX – 25MD1E
TX – 21MD1E**

Ref No.	Part No.	Description			
C361	ECA1HMR47GB	ELECT	50V	R47µF	
C451	ECUV1H102JX	S.M.CAP	50V	1nF	
C452	ECUV1H473ZFX	S.M.CAP	50V	47nF	
C453	ECUV1H472KBX	S.M.CAP	50V	4.7nF	
C454	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C456	ECEA1HGE221	ELECT	50V	220µF	
C458	ECQM1H154J	FILM	50V	150nF	
C460	ECQV1H105JZ	FILM	50V	1µF	
C462	ECEA1VGE332	ELECT	35V	3300µF	
C501	ECEA1AU330	ELECT	10V	33µF	
C506	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C508	ECQV1H105JZ	FILM	50V	1µF	
C509	ECEA1HGE101	ELECT	50V	100µF	
C510	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C511	ECQM2683JZ	FILM	250V	68nF	
C555	ECWH12H103J	FILM	1250V	10nF	△
C562	ECKC2H101J	CERAMIC	500V	100pF	△
C563	ECEA2EU220	ELECT	250V	22µF	
C564	ECEA2AU2R2	ELECT	100V	2.2µF	
C565	ECQP1H273J	FILM	50V	27nF	
C601	ECUV1H271JCX	S.M.CAP	50V	270pF	
C602	ECUV1H121JCX	S.M.CAP	50V	120pF	
C603	ECUV1H471JCX	S.M.CAP	50V	470pF	
C604	ECEA0JU102	ELECT	6.3V	1000µF	
C605	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C608	ECUV1H683ZFX	S.M.CAP	50V	68nF	
C609	ECEA1CU470	ELECT	16V	47µF	
C610	ECUV1H683ZFX	S.M.CAP	50V	68nF	
C611	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C612	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C613	ECUV1H102JCX	S.M.CAP	50V	1nF	
C614	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C615	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C616	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C618	ECUV1H473ZFX	S.M.CAP	50V	47nF	
C619	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C620	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C621	ECEA1CU100	ELECT	16V	10µF	
C622	ECEA1CU100	ELECT	16V	10µF	
C623	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C624	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C625	ECEA1HNR22	ELECT	50V	0.22µF	
C626	ECEA0JU102	ELECT	6.3V	1000µF	
C627	ECUV1H100DCX	S.M.CAP	50V	10pF	
C628	ECUV1H470JCX	S.M.CAP	50V	47pF	
C629	ECUV1H101JCX	S.M.CAP	50V	100pF	
C630	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C631	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C632	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C633	ECUV1H102JCX	S.M.CAP	50V	1nF	
C636	ECUV1H101JCX	S.M.CAP	50V	100pF	
C637	ECUV1H102KBX	S.M.CAP	50V	1nF	
C638	ECUV1H181JCX	S.M.CAP	50V	180pF	
C639	ECUV1H561KBX	S.M.CAP	50V	560pF	
C702	ECUV1H103KBX	S.M.CAP	50V	10nF	
C704	ECQB1H223K	FILM	50V	22nF	
C801	ECUV1H101JCX	S.M.CAP	50V	100pF	
C802	ECQE6104K	FILM	600V	100nF	△
C803	ECUV1H560JX	S.M.CAP	50V	56pF	
C804	ECEA1CU101	ELECT	16V	100µF	
C805	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C806	ECEA1HU101	ELECT	50V	100µF	
C807	ECEA1EGE101	ELECT	25V	100µF	
C808	ECQB1H103J	FILM	50V	10nF	
C809	ECQB1H103J	FILM	50V	10nF	
C810	ECQU2A224MN	FILM	250V	220nF	
C811	ECEA1HN010	ELECT	50V	1µF	
C815	ECKC2H472J	CERAMIC	500V	4.7nF	△
C816	ECKC3D222JB	CERAMIC	2KV	2200pF	△
C817	ECQB1H223K	FILM	50V	22nF	

Ref No.	Part No.	Description			
C818	ECKC2H472J	CERAMIC	500V	4.7nF	△
C821	ECKCNS332J	CERAMIC	1.2KV	3.3nF	△
C851	ECKC2H681J	CERAMIC	500V	680pF	△
C852	ECEA1HU102	ELECT	50V	1000µF	
C853	ECEA1EGE222	ELECT	25V	2200µF	
C854	ECEA1HGE102	ELECT	50V	1000µF	
C855	ECKC3D471JB	CERAMIC	2KV	470pF	△
C856	ECEA1EGE222	ELECT	25V	2200µF	
C858	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C859	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C860	ECEA1CU471	ELECT	16V	470µF	
C862	ECEA1CU471	ELECT	16V	470µF	
C1051	ECEA0JU101	ELECT	6.3V	100µF	
C1052	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1201	ECUV1H332KBX	S.M.CAP	50V	3.3nF	
C1202	ECUV1H332KBX	S.M.CAP	50V	3.3nF	
C1203	ECUV1H332KBX	S.M.CAP	50V	3.3nF	
C1204	ECUV1H332KBX	S.M.CAP	50V	3.3nF	
C1205	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C1206	ECEA1HU4R7	ELECT	50V	4.7µF	
C1207	ECUV1H472KBX	S.M.CAP	50V	4.7nF	
C1208	ECUV1H390JCX	S.M.CAP	50V	39pF	
C1209	ECUV1H390JCX	S.M.CAP	50V	39pF	
C1210	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C1211	ECUV1H470JCX	S.M.CAP	50V	47pF	
C1212	ECEA1CU470	ELECT	16V	47µF	
C1213	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C1214	ECEA1CU470	ELECT	16V	47µF	
C1215	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C1217	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1219	ECEA1CU471	ELECT	16V	470µF	
C1220	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C1221	ECEA0JU102	ELECT	6.3V	1000µF	
C1222	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1223	ECEA1CU101	ELECT	16V	100µF	
C1224	ECEA0JU222	ELECT	6.3V	2200µF	
C1225	ECEA0JM472GE	ELECT	6.3V	4.7nF	
C1226	ECEA1CU101	ELECT	16V	100µF	
C2101	ECUV1H223KBX	S.M.CAP	50V	22nF	
C2102	ECUV1H391KBX	S.M.CAP	50V	390pF	
C2103	ECUV1H102KBX	S.M.CAP	50V	1nF	
C2104	ECUV1H102KBX	S.M.CAP	50V	1nF	
C2107	ECUV1H391KBX	S.M.CAP	50V	390pF	
C2108	ECEA1CU101	ELECT	16V	100µF	
C2109	ECUV1H223KBX	S.M.CAP	50V	22nF	
C2110	ECEA1CU100	ELECT	16V	10µF	
C2111	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C2112	ECEA1CU100	ELECT	16V	10µF	
C2113	ECUV1H102KBX	S.M.CAP	50V	1nF	
C2114	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C2115	ECUV1H471KBX	S.M.CAP	50V	470pF	
C2116	ECEA1HU3R3	ELECT	50V	3.3µF	
C2117	ECUV1H471KBX	S.M.CAP	50V	470pF	
C2118	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C2119	ECEA1CU100	ELECT	16V	10µF	
C2120	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C2121	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C2122	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C2123	ECEA1CU100	ELECT	16V	10µF	
C2124	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C2125	ECUV1H030CCX	S.M.CAP	50V	30pF	
C2126	ECUV1H030CCX	S.M.CAP	50V	30pF	
C2127	ECEA1CU100	ELECT	16V	10µF	
C2307	ECEA1CU470	ELECT	16V	47µF	
C2308	ECEA1CU470	ELECT	16V	47µF	
C2309	ECEA1CU101	ELECT	16V	100µF	
C2310	ECEA1CU470	ELECT	16V	47µF	
C2312	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C2313	ECUV1H103KBX	S.M.CAP	50V	10nF	
C2314	ECUV1H104ZFX	S.M.CAP	50V	100nF	

Ref No.	Part No.	Description
C2315	ECUV1H103KBX	S.M.CAP 50V 10nF
C2316	ECUV1H103ZFX	S.M.CAP 50V 10nF
C2317	ECEA1CU470	ELECT 16V 47µF
C2318	ECUV1H222KBX	S.M.CAP 50V 2.2nF
C2319	ECUV1H222KBX	S.M.CAP 50V 2.2nF
C2651	ECUV1H103KBX	S.M.CAP 50V 10nF
C2652	ECUV1H103KBX	S.M.CAP 50V 10nF
C3001	ECEA1HUR47	ELECT 50V 0.47µF
C3002	ECEA1HUR47	ELECT 50V 0.47µF
C3003	ECEA1EU4R7	ELECT 25V 4.7µF
C3004	ECEA1HU4R7	ELECT 50V 4.7µF
C3005	ECEA1HU4R7	ELECT 50V 4.7µF
C3006	ECUV1H473ZFX	S.M.CAP 50V 47nF
C3007	ECEA1HU470	ELECT 50V 47µF
C3011	ECUV1H473ZFX	S.M.CAP 50V 47nF
C3012	ECEA1CU470	ELECT 16V 47µF
C3013	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3014	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3017	ECEA1CN470	ELECT 16V 47µF
C3018	ECUV1H102KBX	S.M.CAP 50V 1nF
C3019	ECUV1H102KBX	S.M.CAP 50V 1nF
C3021	ECUV1H102KBX	S.M.CAP 50V 1nF
C3023	ECEA1CU470	ELECT 16V 47µF
C3024	ECUV1H473ZFX	S.M.CAP 50V 47nF
C3025	ECUV1H102KBX	S.M.CAP 50V 1nF
C3026	ECEA1HUR47	ELECT 50V 0.47µF
C3027	ECEA1HUR47	ELECT 50V 0.47µF
C3028	ECUV1H221JX	S.M.CAP 50V 220pF
C3029	ECUV1H221JX	S.M.CAP 50V 220pF
C3030	ECUV1H221JX	S.M.CAP 50V 220pF
C3031	ECUV1H221JX	S.M.CAP 50V 220pF
C3032	ECEA1HUR47	ELECT 50V 0.47µF
C3033	ECEA1HUR47	ELECT 50V 0.47µF
C3034	ECUV1H221JX	S.M.CAP 50V 220pF
C3035	ECUV1H221JX	S.M.CAP 50V 220pF
C3036	ECUV1H222KBX	S.M.CAP 50V 2.2nF
C3037	ECUV1H561JCX	S.M.CAP 50V 560pF
C3038	ECEA1CU470	ELECT 16V 47µF
C3039	ECEA1CU470	ELECT 16V 47µF
C3040	ECEA1HUR47	ELECT 50V 0.47µF
C3041	ECEA1HUR47	ELECT 50V 0.47µF
C3043	ECEA1HU4R7	ELECT 50V 4.7µF
C3045	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3050	ECUV1H222KBX	S.M.CAP 50V 2.2nF
C3051	ECUV1H222KBX	S.M.CAP 50V 2.2nF
C3052	ECUV1H561JCX	S.M.CAP 50V 560pF
C3053	ECUV1H561JCX	S.M.CAP 50V 560pF
C3054	ECUV1H222KBX	S.M.CAP 50V 2.2nF
C3055	ECUV1H561JCX	S.M.CAP 50V 560pF
C3056	ECCR1H101J	CERAMIC 50V 100pF
C3062	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3071	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3151	ECUV1H561JCX	S.M.CAP 50V 560pF
C3152	ECUV1H561JCX	S.M.CAP 50V 560pF
C3501	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3502	ECEA1CU101	ELECT 16V 100µF
C3503	ECUV1H103ZFX	S.M.CAP 50V 10nF
C3504	ECUV1H102JCX	S.M.CAP 50V 1nF
C3505	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3506	ECEA1CU470	ELECT 16V 47µF
C3507	ECEA1CU470	ELECT 16V 47µF
C3508	ECUV1H473ZFX	S.M.CAP 50V 47nF
C3509	ECUV1H103ZFX	S.M.CAP 50V 10nF
C3510	ECEA0JU102	ELECT 6.3V 1000µF
C3511	ECUV1H103ZFX	S.M.CAP 50V 10nF

DIODES

D251	MA2180TP	DIODE
D252	MA165TA5	DIODE
D253	MA700TA5	DIODE

Ref No.	Part No.	Description
D254	MA700TA5	DIODE
D310	MA165TA5	DIODE
D311	MA29TA5	DIODE
D312	MA29TA5	DIODE
D354	ERA22-04V1	DIODE
D355	ERA22-04V1	DIODE
D356	ERA22-04V1	DIODE
D357	MA165TA5	DIODE
D358	MA165TA5	DIODE
D359	MA165TA5	DIODE
D360	MA4150	DIODE
D451	MA165TA5	DIODE
D452	MA165TA5	DIODE
D454	ERA15-02V3	DIODE
D456	MA2160BLFS	DIODE
D501	MA165TA5	DIODE
D502	EU02	DIODE
D551	ERD07-15L7	DIODE
D552	TVSRU2AM	DIODE
D554	AU02V0	DIODE
D556	MA166TA5	DIODE
D601	MA165TA5	DIODE
D602	MA165TA5	DIODE
D604	MA165TA5	DIODE
D605	MA165TA5	DIODE
D606	MA165TA5	DIODE
D609	MA167TA5	DIODE
D701	MA165TA5	DIODE
D702	MA4056	DIODE
D801	MA165TA5	DIODE
D802	MA165TA5	DIODE
D803	MA165TA5	DIODE
D804	ERA15-02V3	DIODE
D805	EU02	DIODE
D806	RBV4-08	DIODE
D807	EU02	DIODE
D808	PC120FY	DIODE
D809	MA165TA5	DIODE
D851	EU02	DIODE
D852	ERD32-02L7	DIODE
D853	FML22SLF610	DIODE
D854	RU4AMLF-M1	DIODE
D855	RU4BLF-L1	DIODE
D856	MA4047	DIODE
D857	MA4300	DIODE
D858	MA29TA5	DIODE
D1201	LN81RPHL	DIODE
D1203	MA4082	DIODE
D1204	TVSS1WBS10	DIODE
D1205	MA165TA5	DIODE
D1207	MA165TA5	DIODE
D1208	MA165TA5	DIODE
D1209	MA165TA5	DIODE
D2303	MA165TA5	DIODE
D2304	MA4091	DIODE
D3001	MA4120	DIODE
D3003	MA4082	DIODE
D3004	MA4100	DIODE
D3005	MA4120	DIODE
D3006	MA4120	DIODE
D3007	MA4120	DIODE
D3008	MA4082	DIODE
D3009	MA4082	DIODE
D3010	MA4082	DIODE
D3011	MA4082	DIODE
D3012	MA4120	DIODE
D3013	MA4120	DIODE
D3014	MA4120	DIODE
D3015	MA4120	DIODE
D3016	MA4120	DIODE
D3018	MA165TA5	DIODE

Ref No.	Part No.	Description	
D3019	MA165TA5	DIODE	
D3501	MA165TA5	DIODE	
FUSES			
F801	19181-3.15	FUSE	▲
F851	TR5-T1250	FUSE	▲
F852	TR5-T2000	FUSE	▲
F853	TR5-T2000	FUSE	▲
F8011	EYF52BC	FUSE HOLDER	
F8012	EYF52BC	FUSE HOLDER	
SOCKETS			
H1202	832AG11D-ESL	I.C.SOCKET	
INTEGRATED CIRCUITS			
IC102	LA7577N	V.I.F.	
IC103	L78M12MRB	12V REGULATOR	
IC1051	RPM-637CBRL	L.E.D. RECEIVER	
IC1201	CCU3000I-05	CENTRAL CONTROL UNIT	
IC1202	27C010-08AME	EPROM	
IC1205	MN1280R	RESET	
IC1206	L78M05MRB	5V REGULATOR	
IC2101	MSP3410-15	AUDIO PROCESSOR	
IC2301	AN78L08TA	8V REGULATOR	
IC251	LA4280-TV	AUDIO OUTPUT	
IC3001	TEA6415C	A.V. SWITCHING	
IC3501	UD61256DC-08	DYNAMIC RAM	
IC3502	TPU3040-20	TEXT PROCESSING UNIT	
IC351	TDA6103Q	RGB AMPLIFIER	
IC451	TDA8175-3	VERTICAL OUTPUT	
IC601	VDP3108-25	VIDEO PROCESSOR	
IC701	TEA2031A	HORIZONTAL OUTPUT	
IC801	TDA4601	I.C.POWER SUPPLY	
IC851	L78M12MRB	12V REGULATOR	
TERMINALS AND LINKS			
JA.1	ERJ6GEY0R00	WIRE LINK	
JA.1	ERJ8GEY0R00	WIRE LINK	
JA.10	ERJ6GEY0R00	WIRE LINK	
JA.11	ERJ6GEY0R00	WIRE LINK	
JA.11	ERJ8GEY0R00	WIRE LINK	
JA.12	ERJ6GEY0R00	WIRE LINK	
JA.12	ERJ8GEY0R00	WIRE LINK	
JA.13	ERJ6GEY0R00	WIRE LINK	
JA.14	ERJ6GEY0R00	WIRE LINK	
JA.14	ERJ8GEY0R00	WIRE LINK	
JA.15	ERJ6GEY0R00	WIRE LINK	
JA.15	ERJ8GEY0R00	WIRE LINK	
JA.16	ERJ6GEY0R00	WIRE LINK	
JA.16	ERJ8GEY0R00	WIRE LINK	
JA.17	ERJ6GEY0R00	WIRE LINK	
JA.17	ERJ8GEY0R00	WIRE LINK	
JA.18	ERJ6GEY0R00	WIRE LINK	
JA.19	ERJ6GEY0R00	WIRE LINK	
JA.2	ERJ6GEY0R00	WIRE LINK	
JA.2	ERJ8GEY0R00	WIRE LINK	
JA.20	ERJ6GEY0R00	WIRE LINK	
JA.21	ERJ6GEY0R00	WIRE LINK	
JA.22	ERJ6GEY0R00	WIRE LINK	
JA.22	ERJ8GEY0R00	WIRE LINK	
JA.23	ERJ6GEY0R00	WIRE LINK	
JA.24	ERJ6GEY0R00	WIRE LINK	
JA.25	ERJ6GEY0R00	WIRE LINK	
JA.25	ERJ8GEY0R00	WIRE LINK	
JA.26	ERJ6GEY0R00	WIRE LINK	
JA.27	ERJ6GEY0R00	WIRE LINK	

Ref No.	Part No.	Description	
JA.28	ERJ6GEY0R00	WIRE LINK	
JA.29	ERJ6GEY0R00	WIRE LINK	
JA.3	ERJ6GEY0R00	WIRE LINK	
JA.3	ERJ8GEY0R00	WIRE LINK	
JA.30	ERJ6GEY0R00	WIRE LINK	
JA.31	ERJ6GEY0R00	WIRE LINK	
JA.32	ERJ6GEY0R00	WIRE LINK	
JA.33	ERJ6GEY0R00	WIRE LINK	
JA.34	ERJ6GEY0R00	WIRE LINK	
JA.35	ERJ6GEY0R00	WIRE LINK	
JA.36	ERJ6GEY0R00	WIRE LINK	
JA.37	ERJ6GEY0R00	WIRE LINK	
JA.38	ERJ6GEY0R00	WIRE LINK	
JA.39	ERJ6GEY0R00	WIRE LINK	
JA.4	ERJ6GEY0R00	WIRE LINK	
JA.4	ERJ8GEY0R00	WIRE LINK	
JA.5	ERJ6GEY0R00	WIRE LINK	
JA.6	ERJ6GEY0R00	WIRE LINK	
JA.6	ERJ8GEY0R00	WIRE LINK	
JA.7	ERJ6GEY0R00	WIRE LINK	
JA.7	ERJ8GEY0R00	WIRE LINK	
JA.8	ERJ6GEY0R00	WIRE LINK	
JA.9	ERJ6GEY0R00	WIRE LINK	
JK2301	TJB18644	AV TERMINAL	
JK3001	TJS8E007	21PIN TERMINAL	
JK3101	TJS8E007	21PIN TERMINAL	
JSB.5	ERJ6GEY0R00	WIRE LINK	
JSE.31	ERJ6GEY0R00	WIRE LINK	
JSE011	ERJ6GEY0R00	WIRE LINK	
JSE012	ERJ6GEY0R00	WIRE LINK	
JSE013	ERJ6GEY0R00	WIRE LINK	
JSE014	ERJ6GEY0R00	WIRE LINK	
JSE015	ERJ6GEY0R00	WIRE LINK	
JSE016	ERJ6GEY0R00	WIRE LINK	
JSE032	ERJ6GEY0R00	WIRE LINK	
J196	EXCELSA35T	COIL	
COILS			
L001	TLT100K991R	COIL	
L002	TLT047K991R	COIL	
L102	EIV7EN200B	COIL	
L103	TLT100K991R	COIL	
L104	EIV7EN201B	COIL	
L105	TLT082K991R	COIL	
L106	TLT022K991R	COIL	
L109	TLTR47K991R	COIL	
L111	TLTR82K991R	COIL	
L112	EXCELSA35T	COIL	
L113	EXCELSA35T	COIL	
L202	TLT068K991R	COIL	
L251	EXCELSA35T	COIL	
L301	TLT047K991R	COIL	
L302	EXCEMT101BT	COIL	
L303	EXCEMT101BT	COIL	
L304	EXCEMT101BT	COIL	
L601	TLT047K991R	COIL	
L602	EXCELD35V	COIL	
L603	TLT047K991R	COIL	
L604	EXCELD35V	COIL	
L606	TLT015K991R	COIL	
L607	EXCELSA35T	COIL	
L701	ELC10D006	COIL	
L801	298-19711	COIL	
L802	TLT022K991R	COIL	
L803	ELF18D490F	COIL	
L804	ELESN4R7KA	COIL	
L805	298-82858001	COIL	
L851	EXCELD35V	COIL	
L852	EXCELSA35T	COIL	
L853	ELEIE470KA	COIL	

Ref No.	Part No.	Description
L854	ELEIN470KA	COIL
L855	ELEIN470KA	COIL
L856	ELEIN470KA	COIL
L1051	TLT331K991R	COIL
L1201	TLT047K991R	COIL
L1202	TLT047K991R	COIL
L1203	TLT047K991R	COIL
L1204	EXCELD35V	COIL
L2101	TLT100K991R	COIL
L2102	TLT039K991R	COIL
L2103	EXCELSA35T	COIL
L2104	EXCELSA35T	COIL
L3151	EXCEMT101BT	COIL
L3152	EXCEMT101BT	COIL
L3153	EXCEMT101BT	COIL
L3154	EXCEMT101BT	COIL
L3155	ELEBT6R8KA	COIL
L3156	ELEBT6R8KA	COIL
L3158	EXCELSA39V	COIL
L3501	EXCELD35V	COIL
L3502	EXCELD35V	COIL
L3503	ELESN4R7KA	COIL
L3504	EXCELSA35T	COIL

TRANSISTORS

Q101	BF370-126	TRANSISTOR
Q102	BF370-126	TRANSISTOR
Q103	BC847B	TRANSISTOR
Q201	BC847B	TRANSISTOR
Q202	BC847B	TRANSISTOR
Q251	2SD1328STX	TRANSISTOR
Q252	2SD1328STX	TRANSISTOR
Q253	BC847B	TRANSISTOR
Q301	BC857B	TRANSISTOR
Q302	BC847B	TRANSISTOR
Q303	BC857B	TRANSISTOR
Q304	BC847B	TRANSISTOR
Q305	BC857B	TRANSISTOR
Q306	BC847B	TRANSISTOR
Q307	BC847B	TRANSISTOR
Q308	BC847B	TRANSISTOR
Q309	BC847B	TRANSISTOR
Q310	BC847B	TRANSISTOR
Q311	BC847B	TRANSISTOR
Q351	2SA1767	TRANSISTOR
Q352	2SA1767	TRANSISTOR
Q353	2SA1767	TRANSISTOR
Q451	BC847B	TRANSISTOR
Q501	BC847B	TRANSISTOR
Q502	BC847B	TRANSISTOR
Q503	2SD836-AL	TRANSISTOR
Q504	BC847B	TRANSISTOR
Q552	2SC1473-RN	TRANSISTOR
Q701	BC857B	TRANSISTOR
Q801	2SC1573	TRANSISTOR
Q802	S2000NLBMA	TRANSISTOR
Q851	2SD1273PLB	TRANSISTOR
Q852	TFD312SOF632	DIODE
Q1201	BC847B	TRANSISTOR
Q1202	BC847B	TRANSISTOR
Q1205	BC847B	TRANSISTOR
Q1206	BC847B	TRANSISTOR
Q1207	BC847B	TRANSISTOR
Q1208	BC857B	TRANSISTOR
Q2101	BC860B	TRANSISTOR
Q2102	BC860B	TRANSISTOR
Q2301	BC857B	TRANSISTOR
Q2302	BC857B	TRANSISTOR
Q2305	2SD1328STX	TRANSISTOR
Q2306	2SD1328STX	TRANSISTOR

Ref No.	Part No.	Description
Q2307	BC860B	TRANSISTOR
Q2308	BC857B	TRANSISTOR
Q2309	BC860B	TRANSISTOR
Q2310	BC860B	TRANSISTOR
Q3001	2SC1318-S	TRANSISTOR
Q3004	BC847B	TRANSISTOR
Q3005	BC847B	TRANSISTOR
Q3006	2SC1318-S	TRANSISTOR
Q3011	BC857B	TRANSISTOR
Q3012	2SD1328STX	TRANSISTOR
Q3013	2SD1328STX	TRANSISTOR

RESISTOR

R.107	ERJ6GEY0R00	WIRE LINK
R.109	ERJ6GEY0R00	WIRE LINK
R.123	ERJ6GEY0R00	WIRE LINK
R.139	ERJ6GEY0R00	WIRE LINK
R.142	ERJ6GEY0R00	WIRE LINK
R.143	ERJ6GEY0R00	WIRE LINK
R.203	ERJ6GEY0R00	WIRE LINK
R.604	ERJ6GEY0R00	WIRE LINK
R.622	ERJ6GEY0R00	WIRE LINK
R001	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R002	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R003	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R004	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R113	ERJ6GEYJ153	S.M.CARB 0.1W 5% 15KΩ
R116	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R117	ERJ6GEYJ683	S.M.CARB 0.1W 5% 68KΩ
R118	ERJ6ENF4701	SM.CARB0.125W 1% 700Ω
R119	ERJ6ENF1202	SM.CARB0.125W 1% 2KΩ
R120	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R121	ERJ6GEYJ201	S.M.CARB0.125W 5% 200Ω
R122	ERJ6GEYJ470	S.M.CARB 0.1W 5% 47Ω
R124	ERJ6GEYJ682	S.M.CARB 0.1W 5% 6K8Ω
R125	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R126	EVNDXAA03B53	CONTROL 5KΩ
R127	ERDS1TJ121	CARBON 0.5W 5% 120Ω
R128	ERJ6GEYJ271	S.M.CARB 0.1W 5% 270Ω
R129	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R130	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R131	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R132	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R133	ERJ6GEYJ682	S.M.CARB 0.1W 5% 6K8Ω
R134	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R136	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R137	ERJ6GEYJ563	S.M.CARB 0.1W 5% 56KΩ
R138	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R141	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R145	ERJ6GEYJ152	S.M.CARB 0.1W 5% 1K5Ω
R146	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R147	ERJ6GEYJ821	S.M.CARB 0.1W 5% 820Ω
R149	ERJ6GEYJ181	S.M.CARB 0.1W 5% 180Ω
R201	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R204	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R205	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R206	ERJ6GEYJ681	S.M.CARB 0.1W 5% 680Ω
R207	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R208	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R209	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R210	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R253	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R255	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R256	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R260	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R261	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R262	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R263	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R264	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R265	ERD25TJ2R2	CARBON 0.25W 5% 2R2Ω

Ref No.	Part No.	Description				
R266	ERD25TJ2R2	CARBON 0.25W	5%	2R2Ω		
R267	ERF7ZK4R7	WOUND 7W	10%	4R7Ω	△	
R268	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		
R269	ERJ6GEYJ273	S.M.CARB 0.1W	5%	27KΩ		
R271	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		
R272	ERF7ZK5R6	WOUND 7W	10%	5R6Ω	△	
R273	ERD25TJ273	CARBON 0.25W	5%	27KΩ		
R301	ERJ6GEYJ750	S.M.CARB 0.1W	5%	75Ω		
R302	ERJ6GEYJ391	S.M.CARB 0.1W	5%	390Ω		
R303	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω		
R304	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω		
R305	ERJ6GEYJ750	S.M.CARB 0.1W	5%	75Ω		
R306	ERJ6GEYJ391	S.M.CARB 0.1W	5%	390Ω		
R307	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω		
R308	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω		
R309	ERJ6GEYJ750	S.M.CARB 0.1W	5%	75Ω		
R310	ERJ6GEYJ391	S.M.CARB 0.1W	5%	390Ω		
R311	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω		
R312	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω		
R313	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R314	ERJ6GEYJ332	S.M.CARB 0.1W	5%	3K3Ω		
R315	ERJ6GEYJ332	S.M.CARB 0.1W	5%	3K3Ω		
R316	ERJ6GEYJ332	S.M.CARB 0.1W	5%	3K3Ω		
R321	ERJ6GEYJ473	S.M.CARB 0.1W	5%	47KΩ		
R322	ERJ6GEYJ473	S.M.CARB 0.1W	5%	47KΩ		
R323	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		
R324	ERJ6GEYJ104	S.M.CARB 0.1W	5%	100KΩ		
R354	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ		
R355	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ		
R356	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ		
R366	ERDS1TJ152	CARBON 0.5W	5%	1K5Ω		
R367	ERDS1TJ152	CARBON 0.5W	5%	1K5Ω		
R368	ERDS1TJ152	CARBON 0.5W	5%	1K5Ω		
R372	ERQ12AJ121	FUSABLE 12W	5%	120Ω	△	
R373	ERJ6GEYJ220	S.M.CARB 0.1W	5%	22Ω		
R375	ERJ6GEYJ684	S.M.CARB 0.1W	5%	680KΩ		
R376	ERJ6GEYJ183	S.M.CARB 0.1W	5%	18KΩ		
R451	ERJ6GEYJ223	S.M.CARB 0.1W	5%	22KΩ		
R452	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R453	ERJ6GEYJ104	S.M.CARB 0.1W	5%	100KΩ		
R455	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R456	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		
R457	ERJ6GEYJ682	S.M.CARB 0.1W	5%	6K8Ω		
R458	ERD25TJ1R5	CARBON 0.25W	5%	1R5Ω		
R459	ERJ6GEYJ470	S.M.CARB 0.1W	5%	47Ω		
R460	ERJ6GEYJ183	S.M.CARB 0.1W	5%	18KΩ		
R461	ERDS1TJ471	CARBON 0.5W	5%	470Ω		
R462	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R463	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R465	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R466	ERO25CKF1801	METAL 0.25W	1%	1K8Ω	△	
R472	ERDS1TJ4R7	CARBON 0.5W	5%	4R7Ω		
R501	ERJ6GEYJ331	S.M.CARB 0.1W	5%	330Ω		
R502	ERJ6GEYJ560	S.M.CARB 0.1W	5%	56Ω		
R503	ERJ6GEYJ273	S.M.CARB 0.1W	5%	27KΩ		
R504	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R506	ERD25TJ560	CARBON 0.25W	5%	56Ω		
R507	ERQ14AJ3R3	METAL 0.25W	5%	3R3Ω	△	
R509	ERDS1TJ152	CARBON 0.5W	5%	1K5Ω		
R510	ERDS1TJ152	CARBON 0.5W	5%	1K5Ω		
R511	ERJ6GEYJ104	S.M.CARB 0.1W	5%	100KΩ		
R512	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R513	ERJ6GEYJ123	S.M.CARB 0.1W	5%	12KΩ		
R514	ERJ6GEYJ123	S.M.CARB 0.1W	5%	12KΩ		
R551	ERW2PKR47	WIREWOUND2W	10%	0R47Ω	△	
R553	ERG1SJ152	METAL 1W	5%	1.5KΩ	△	
R558	ERDS1TJ124	CARBON 0.5W	5%	120KΩ		
R561	ERJ6GEYJ563	S.M.CARB 0.1W	5%	56KΩ		
R567	ERJ6GEYJ274	S.M.CARB 0.1W	5%	270KΩ		
R601	ERJ6GEYJ151	S.M.CARB 0.1W	5%	150Ω		

Ref No.	Part No.	Description				
R602	ERJ6GEYJ151	S.M.CARB 0.1W	5%	150Ω		
R603	ERJ6GEYJ750	S.M.CARB 0.1W	5%	75Ω		
R605	ERJ6GEYJ183	S.M.CARB 0.1W	5%	18KΩ		
R606	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R607	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		
R608	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R609	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R610	ERJ6GEYJ473	S.M.CARB 0.1W	5%	47KΩ		
R611	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ		
R612	ERJ6GEYJ123	S.M.CARB 0.1W	5%	12KΩ		
R613	ERJ6GEYJ271	S.M.CARB 0.1W	5%	270Ω		
R614	ERJ6GEYJ470	S.M.CARB 0.1W	5%	47Ω		
R615	ERJ6GEYJ333	S.M.CARB 0.1W	5%	33KΩ		
R616	ERJ6GEYJ153	S.M.CARB 0.1W	5%	15KΩ		
R618	ERJ6GEYJ151	S.M.CARB 0.1W	5%	150Ω		
R619	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R623	ERJ6GEYJ821	S.M.CARB 0.1W	5%	820Ω		
R701	ERQ12AJ101	FUSIBLE 0.5W	5%	100Ω	△	
R703	ERG2FJ821	METAL 2W	5%	820Ω	△	
R704	ERJ6GEYJ563	S.M.CARB 0.1W	5%	56KΩ		
R705	ERJ6GEYJ104	S.M.CARB 0.1W	5%	100KΩ		
R708	ERJ6GEYJ393	S.M.CARB 0.1W	5%	39KΩ		
R709	ERJ6GEYJ393	S.M.CARB 0.1W	5%	39KΩ		
R710	ERJ6GEYJ273	S.M.CARB 0.1W	5%	27KΩ		
R711	ERJ6GEYJ681	S.M.CARB 0.1W	5%	680Ω		
R712	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R713	ERG1SJ101	METAL 1W	5%	100Ω		
R801	ERG3FJ682H	METAL 3W	5%	6K8Ω	△	
R802	ERG2FJ472	METAL 2W	5%	4.7KΩ	△	
R803	ERX12SJWR47	METAL 12W	1%	1R7Ω		
R804	ERJ6GEYJ682	S.M.CARB 0.1W	5%	6K8Ω		
R805	ERJ6GEYJ221	S.M.CARB 0.1W	5%	220Ω		
R806	ERG1SJ823	METAL 1W	5%	82KΩ	△	
R807	ERO25CKF1201	METAL 0.25W	1%	1K2Ω	△	
R810	ERD25TJ103	CARBON 0.25W	5%	10KΩ		
R811	EVMEASA00B33	CONTROL		82KΩ		
R812	ERDS1TJ220	CARBON 0.5W	5%	22Ω		
R813	ERD50FJ334	CARBON 0.5W	5%	330KΩ		
R814	ERF7ZK2R7	WIRE 7W	10%	2R7Ω		
R817	ERG3FJ470	METAL 3W	5%	47Ω	△	
R818	ERD50FJ564	CARBON 0.5W	5%	560KΩ		
R819	ERD50FJ564	CARBON 0.5W	5%	560KΩ		
R820	ERD75TAJ825	CARBON 0.75W	5%	8M2Ω	△	
R852	ERJ6GEYJ271	S.M.CARB 0.1W	5%	270Ω		
R853	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R854	ERDS1TJ474	CARBON 0.5W	5%	470KΩ		
R855	ERG2FJ223	METAL 2W	5%	22KΩ	△	
R856	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ		
R1201	ERJ6GEYJ271	S.M.CARB 0.1W	5%	270Ω		
R1202	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R1203	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R1204	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R1205	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R1206	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R1207	ERD25TJ331	CARBON 0.25W	5%	330Ω		
R1208	ERJ6GEYJ223	S.M.CARB 0.1W	5%	22KΩ		
R1209	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R1210	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R1212	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		
R1213	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		
R1214	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R1215	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R1216	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R1217	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω		
R1218	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R1219	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R1220	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω		
R1221	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		
R1222	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ		

Ref No.	Part No.	Description			
R1224	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R1225	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R1226	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R1227	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R1229	ERJ6GEY0R00	WIRE LINK			
R1230	ERJ6GEY0R00	WIRE LINK			
R1231	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R1232	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R1233	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R1235	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R1236	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R1237	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R1238	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R1239	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R1240	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R1241	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R1242	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R1244	ERJ6GEY0R00	WIRE LINK			
R1245	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R1246	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R1247	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R1249	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R1250	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R1251	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R1252	ERX1SJ3R3	METAL	1W	5%	3R3Ω
R1253	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R1254	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R1255	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R1256	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R1257	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R1258	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R1260	ERDS1FJ121	CARBON	0.5W	5%	120Ω
R2101	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2102	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2103	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2104	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2105	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2106	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18KΩ
R2107	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2108	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2109	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2110	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R2111	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2301	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2302	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2303	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2304	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2313	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2314	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2315	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2316	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2318	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2321	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R2322	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2323	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R2324	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2325	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R2326	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2327	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2328	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2329	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2330	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2331	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R2332	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2333	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2334	ERJ6GEY0R00	WIRE LINK			
R2335	ERJ6GEY0R00	WIRE LINK			
R2651	ERG2FJ221	METAL	2W	5%	220Ω ▲
R2652	ERG2FJ221	METAL	2W	5%	220Ω ▲
R2653	ERDS1TJ151	CARBON	0.5W	5%	150Ω
R2654	ERDS1TJ151	CARBON	0.5W	5%	150Ω

Ref No.	Part No.	Description			
R3001	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3002	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3003	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3004	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3005	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3006	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3007	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3008	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3009	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3010	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3011	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3012	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3013	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3015	ERJ6GEY0R00	WIRE LINK			
R3016	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3017	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3019	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3020	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3022	ERD2FCG560	CARBON	2W	2%	56Ω
R3024	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3025	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3026	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3027	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68Ω
R3029	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68Ω
R3030	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3032	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68Ω
R3034	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3036	ERJ6GEYJ220	S.M.CARB	0.1W	5%	22Ω
R3037	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3038	ERD2FCG100	CARB	2W	2%	10Ω
R3039	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3040	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3041	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3042	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8Ω
R3043	ERD2FCG100	CARB	2W	2%	10Ω
R3044	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3045	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3046	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3047	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68Ω
R3048	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3049	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68Ω
R3050	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3051	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3052	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3053	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3054	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3055	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3056	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3057	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3058	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3059	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3060	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3062	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3063	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3064	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3065	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3066	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3067	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R3068	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3069	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3070	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3071	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3150	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3151	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3152	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3153	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3154	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3155	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3156	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3157	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3158	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω

Ref No.	Part No.	Description
R3502	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R3504	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R3505	ERJ6GEY0R00	WIRE LINK
R3508	ERJ6GEYJ183	S.M.CARB 0.1W 5% 18KΩ
R3511	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R3512	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
SWITCHES		
S801	ESB91232A	SWITCH Δ
S1201	EVQ23405R	SWITCH
S1202	EVQ23405R	SWITCH
S1203	EVQ23405R	SWITCH
S1204	EVQ23405R	SWITCH
S1205	EVQ23405R	SWITCH

Ref No.	Part No.	Description
TRANSFORMERS		
T501	5270103200	TRANSFORMER
T1201	ETP35KAN61ZU	TRANSFORMER
FILTERS		
X101	EFCS5M7MW3	CERAMIC FILTER
X103	G3355K	SAW FILTER
X105	EFCV3095A6	CHIP FILTER
X601	TSS2169-B	CRYSTAL
X1201	TSS120M2	CRYSTAL
X2101	TSS4004-B	CRYSTAL

DIFFERENCES FOR MODEL TX-21MD1E

Ref No.	Part No.	Description
MISCELLANEOUS COMPONENTS		
2)	TKY8E040	CABINET Δ
3)	A59ECF20X12	C.R.T. Δ
5)	TNP117070AA	Y P.C.B. Δ
7)	TKU8E00190	REAR COVER Δ
9)	TNP197091AS	E P.C.B. Δ
16)	TLK8E05115	DEGAUSSING COIL
	TPC8E4511	OUTER CARTON
	SVM100	COIL
	TBM8E1478	REAR COVER LABEL
CAPACITORS		
C254	ECQM1H334J	FILM 50V 330nF
C259	ECQM1H334J	FILM 50V 330nF
C262	ECEA1HN2R2	ELECT 50V 2.2μF
C265	ECEA1HN2R2	ELECT 50V 2.2μF
C358	ECQM1H224J	FILM 50V 220nF
C364	ECUV1H103ZFX	S.M.CAP 50V 10nF
C366	ECEA1CM100GBELECT	16V 10pF
C455	ECEA1VGE222	ELECT 35V 2200μF
C457	ECUV1H223KBX	S.M.CAP 50V 22nF
C459	ECQM1H224J	FILM 50V 220nF
C461	ECQM1H684J	FILM 50V 680nF
C551	ECWH15H472J	FILM 1500V 4.7nF
C552	ECWH15H102H	FILM 1500V 1.0nF
C554	ECWF2H514J	FILM 500V 510nF Δ
C556	ECQM4333JC	FILM 400V 33nF
C559	ECWF2H684J	FILM 500V 680nF Δ
C560	ECEA2GGE2R2	ELECT 400V 2R2μF
C701	ECEA1HGE101	ELECT 50V 100μF
C703	ECEA1HGE100	ELECT 50V 10μF
C705	ECQB1H102J	FILM 50V 1nF
C820	ECOS2GG181NGELECT	400V 180μF Δ
C857	ECEA2EU101	ELECT 250V 100μF
C861	ECOS2EA221AB	ELECT 400V 220μF
C901	ECUV1H030CCX	S.M.CAP 50V 30pF
C902	ECEA1VU101	ELECT 35V 100μF
C903	ECEA1CM470GBELECT	16V 47pF
C904	ECUV1H103ZFX	S.M.CAP 50V 10nF
C905	ECEA1HM4R7GBELECT	50V 4R7μF
C906	ECUV1H471KBX	S.M.CAP 50V 470pF
C907	ECUV1H271JCX	S.M.CAP 50V 270pF
C908	ECUV1H151JCX	S.M.CAP 50V 150pF
C909	ECKC2H472J	CERAMIC 500V 4.7nF Δ
C910	ECKC2H472J	CERAMIC 500V 4.7nF Δ
C911	ECUV1H151JCX	S.M.CAP 50V 150pF

Ref No.	Part No.	Description
C912	ECEA2CU100	ELECT 160V 10μF
C913	ECEA1CM101GBELECT	16V 100pF
C914	ECEA1CM101GBELECT	16V 100pF
C915	ECDA1CM471GBELECT	16V 470pF
C916	ECEA2CU100	ELECT 160V 10μF
DIODES		
D901	MA165TA5	DIODE
D902	MA165TA5	DIODE
INTEGRATED CIRCUITS		
IC1203	X24C16P-MD1E	EAROM
TERMINALS AND LINKS		
JA1	ERJ6GEY0R00	WIRE LINK
COILS		
L352	SDL-4101	COIL
L353	SDL-4101	COIL
L354	SDL-4101	COIL
L552	ELH5L421	COIL
L553	ELC08D055	COIL
L554	297-23293	COIL
L901	EXCELSA24T	COIL
L902	EXCELSA24T	COIL
TRANSISTORS		
Q551	2SD1577LB	TRANSISTOR
Q901	BC847B	TRANSISTOR
Q902	BC847B	TRANSISTOR
Q903	BC847B	TRANSISTOR
Q904	BC857B	TRANSISTOR
Q905	BC847B	TRANSISTOR
Q906	BC847B	TRANSISTOR
Q907	BC857B	TRANSISTOR
Q908	2SA1535ARLB	TRANSISTOR
Q909	2SC3944ARLB	TRANSISTOR
RESISTOR		
R251	ERJ6GEYJ820	S.M.CARB 0.1W 5% 82Ω
R252	ERJ6GEYJ122	S.M.CARB 0.1W 5% 1K2Ω
R254	ERJ6GEYJ820	S.M.CARB 0.1W 5% 82Ω
R257	ERJ6GEYJ100	S.M.CARB 0.1W 5% 10Ω

Ref No.	Part No.	Description			
R258	ERJ6GEYJ122	S.M.CARB	0.1W	5%	1K2Ω
R259	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R351	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R352	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R353	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R357	ERG1SJ683	METAL	1W	5%	68KΩ
R358	ERG1SJ683	METAL	1W	5%	68KΩ
R359	ERG1SJ683	METAL	1W	5%	68KΩ
R363	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R364	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R365	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R369	ERD25TJ203	CARBON	0.25W	5%	20KΩ
R370	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2Ω
R374	ERD25TJ274	CARBON	0.25W	5%	270KΩ
R377	ERQ12HKR82	FUSABLE	12W	10%	R82Ω
R381	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R382	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R383	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R464	ERW12PKR68	WIRE	12W	10%	R68Ω
R467	ERO25CKF1801	METAL	0.25W	1%	1K8Ω
R471	ERDS1TJ152	CARBON	0.5W	5%	1K5Ω
R554	ERQ14AJW101	FUSABLE	14W	X%	100Ω
R562	ERJ6GEYJ155	S.M.CARB	0.125W	5%	1.5MΩ
R563	ERJ6GEYJ155	S.M.CARB	0.125W	5%	1.5MΩ
R564	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R566	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R702	ERQ12HJ220	METAL	0.5W	5%	22Ω
R706	ERJ6GEYJ242	S.M.CARB	0.1W	5%	2K4Ω
R707	ERJ6GEYJ911	S.M.CARB	0.1W	5%	910Ω
R808	232266296706	THERMISTOR			
R809	ERO25CKF1332	METAL	25W	1%	13KΩ
R901	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω
R902	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω
R903	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω
R904	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R905	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω

Ref No.	Part No.	Description			
R906	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R907	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R908	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R909	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R910	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R911	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5Ω
R913	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18KΩ
R914	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R915	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8Ω
R916	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R917	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120Ω
R919	ERQ14AJ390	FUSABLE	14W	5%	39Ω
R920	ERQ14AJ390	FUSABLE	14W	5%	39Ω
R921	ERD25TJ471	CARBON	0.25W	5%	470Ω
R922	ERD25TJ393	CARBON	0.25W	5%	39KΩ
R923	ERD25TJ393	CARBON	0.25W	5%	39KΩ
R924	ERDS1FJ390	CARBON	0.5W	5%	39Ω
R925	ERJ6GEY0R00	WIRE LINK			
R926	ERJ6GEY0R00	WIRE LINK			
R927	ERD25TJ471	CARBON	0.25W	5%	470Ω
R928	ERD25TJ2R7	CARBON	0.25W	5%	2R7Ω
R929	ERDS1FJ471	CARBON	0.5W	5%	470Ω
R930	ERD25TJ2R7	CARBON	0.25W	5%	2R7Ω
R931	ERDS1FJ390	CARBON	0.5W	5%	39Ω
R932	ERDS1FJ101	CARBON	0.5W	5%	100Ω
R933	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R934	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R935	ERQ14AJ3R9	FUSIBLE	0.25W	5%	3R9Ω
R936	ERQ1CJP331	METAL	1W	5%	330Ω
R937	ERQ14AJ100	METAL	0.25W	5%	10Ω

TRANSFORMERS

T551	ZTFH65008A	TRANSFORMER
T801	TLP8E1002	TRANSFORMER


DIFFERENCES FOR MODEL TX-25MD1E


Ref No.	Part No.	Description			
MISCELLANEOUS COMPONENTS					
A51EAL55X01		C.R.T.			Δ
TBM8E1477-1		REAR COVER LABEL			
TKU8E00180		REAR COVER			Δ
TKY8E039		CABINET			Δ
TLK8E05117		DEGUASSE COIL			
TNP117069AA		Y P.C.B.			Δ
TNP197091AR		E P.C.B.			Δ
TPC8E4510		OUTER CARTON			
X24C16P-F1E		EAROM			
CAPACITORS					
C254	ECQM1H224J	FILM	50V	220nF	
C259	ECQM1H224J	FILM	50V	220nF	
C262	ECEA1HN010	ELECT	50V	1μF	
C265	ECEA1HN010	ELECT	50V	1μF	
C358	ECQB1H224J	FILM	50V	0.22μF	
C455	ECEA1VU222	ELECT	35V	2200μF	
C457	ECUV1H103KBX	S.M.CAP	50V	10nF	
C459	ECQM1H154J	FILM	50V	150nF	
C463	ECQB1H222J	FILM	50V	2200pF	
C551	ECWH12H272J	CERAMIC	500V	2.7nF	Δ
C552	ECWH12H102J	FILM	1.0nF		
C556	ECQF4273JZH	FILM	400V	0.027μF	
C559	ECWF2H474J	FILM	500V	470nF	Δ
C701	ECEA1HU101	ELECT	50V	100μF	
C703	ECEA1HU100	ELECT	50V	10μF	

Ref No.	Part No.	Description			
C705	ECQB1H152K	FILM	50V	1.5nF	
C820	ECOS2GA151CB	ELECT	400V	150pF	
C857	ECEA2CM101E	ELECT	160V	100pF	
C861	ECA2CGE221	ELECT	160V	220μF	
COILS					
L552	ELH5L429	COIL			
TRANSISTORS					
Q551	BU2506DXLB	TRANSISTOR			
RESISTOR					
R251	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R252	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5Ω
R254	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R257	ERJ6GEYJ2R2	S.M.CARB	0.125W	5%	2R2Ω
R258	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5Ω
R259	ERJ6GEYJ2R2	S.M.CARB	0.125W	5%	2R2Ω
R351	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8Ω
R352	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8Ω
R353	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8Ω
R357	ERG1SJ563	METAL	1W	5%	56KΩ
R358	ERG1SJ563	METAL	1W	5%	56KΩ
R359	ERG1SJ563	METAL	1W	5%	56KΩ
R363	ERDS1TJ103	CARBON	0.5W	5%	10KΩ
R364	ERDS1TJ103	CARBON	0.5W	5%	10KΩ

Ref No.	Part No.	Description
R365	ERDS1TJ103	CARBON 0.5W 5% 10KΩ
R369	ERD25TJ223	CARBON 0.25W 5% 22KΩ
R370	ERD25TJ103	CARBON 0.25W 5% 10KΩ
R374	ERDS1TJ274	CARBON 0.5W 5% 270KΩ
R377	ERQ12HJ1R2	METAL 0.5W 5% 1R2Ω ▲
R378	ERJ6GEY0R00	WIRE LINK
R379	ERJ6GEY0R00	WIRE LINK
R380	ERJ6GEY0R00	WIRE LINK
R464	ERW12PK1R5	WIRE 12W 10% 1R5Ω
R467	ERO25CKF1201	METAL 0.25W 1% 1K2Ω ▲
R471	ERDS1TJ102	CARBON 0.5W 5% 1KΩ
R562	ERJ6GEYJ225	S.M.CARB0.125W 5% 2.2MΩ
R563	ERJ6GEYJ225	S.M.CARB0.125W 5% 2.2MΩ
R564	ERJ6GEYJ623	S.M.CARB0.125W 5% 62KΩ

Ref No.	Part No.	Description
R566	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R702	ERQ12HJ330	METAL 0.5W 5% 33Ω ▲
R706	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R707	ERJ6GEYJ122	S.M.CARB 0.1W 5% 1K2Ω
R808	232266296319	THERMISTOR
R809	ERO25CKF1302	METAL 0.25W 1% 13KΩ ▲
TRANSFORMERS		
T551	ZTFH44007A	F.B.T ▲
T801	TLP8E1001	TRANSFORMER

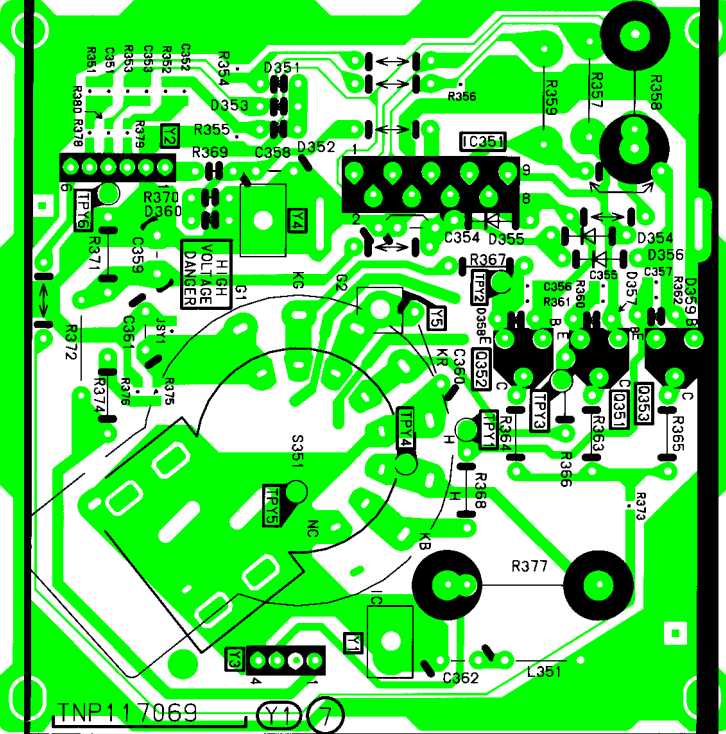

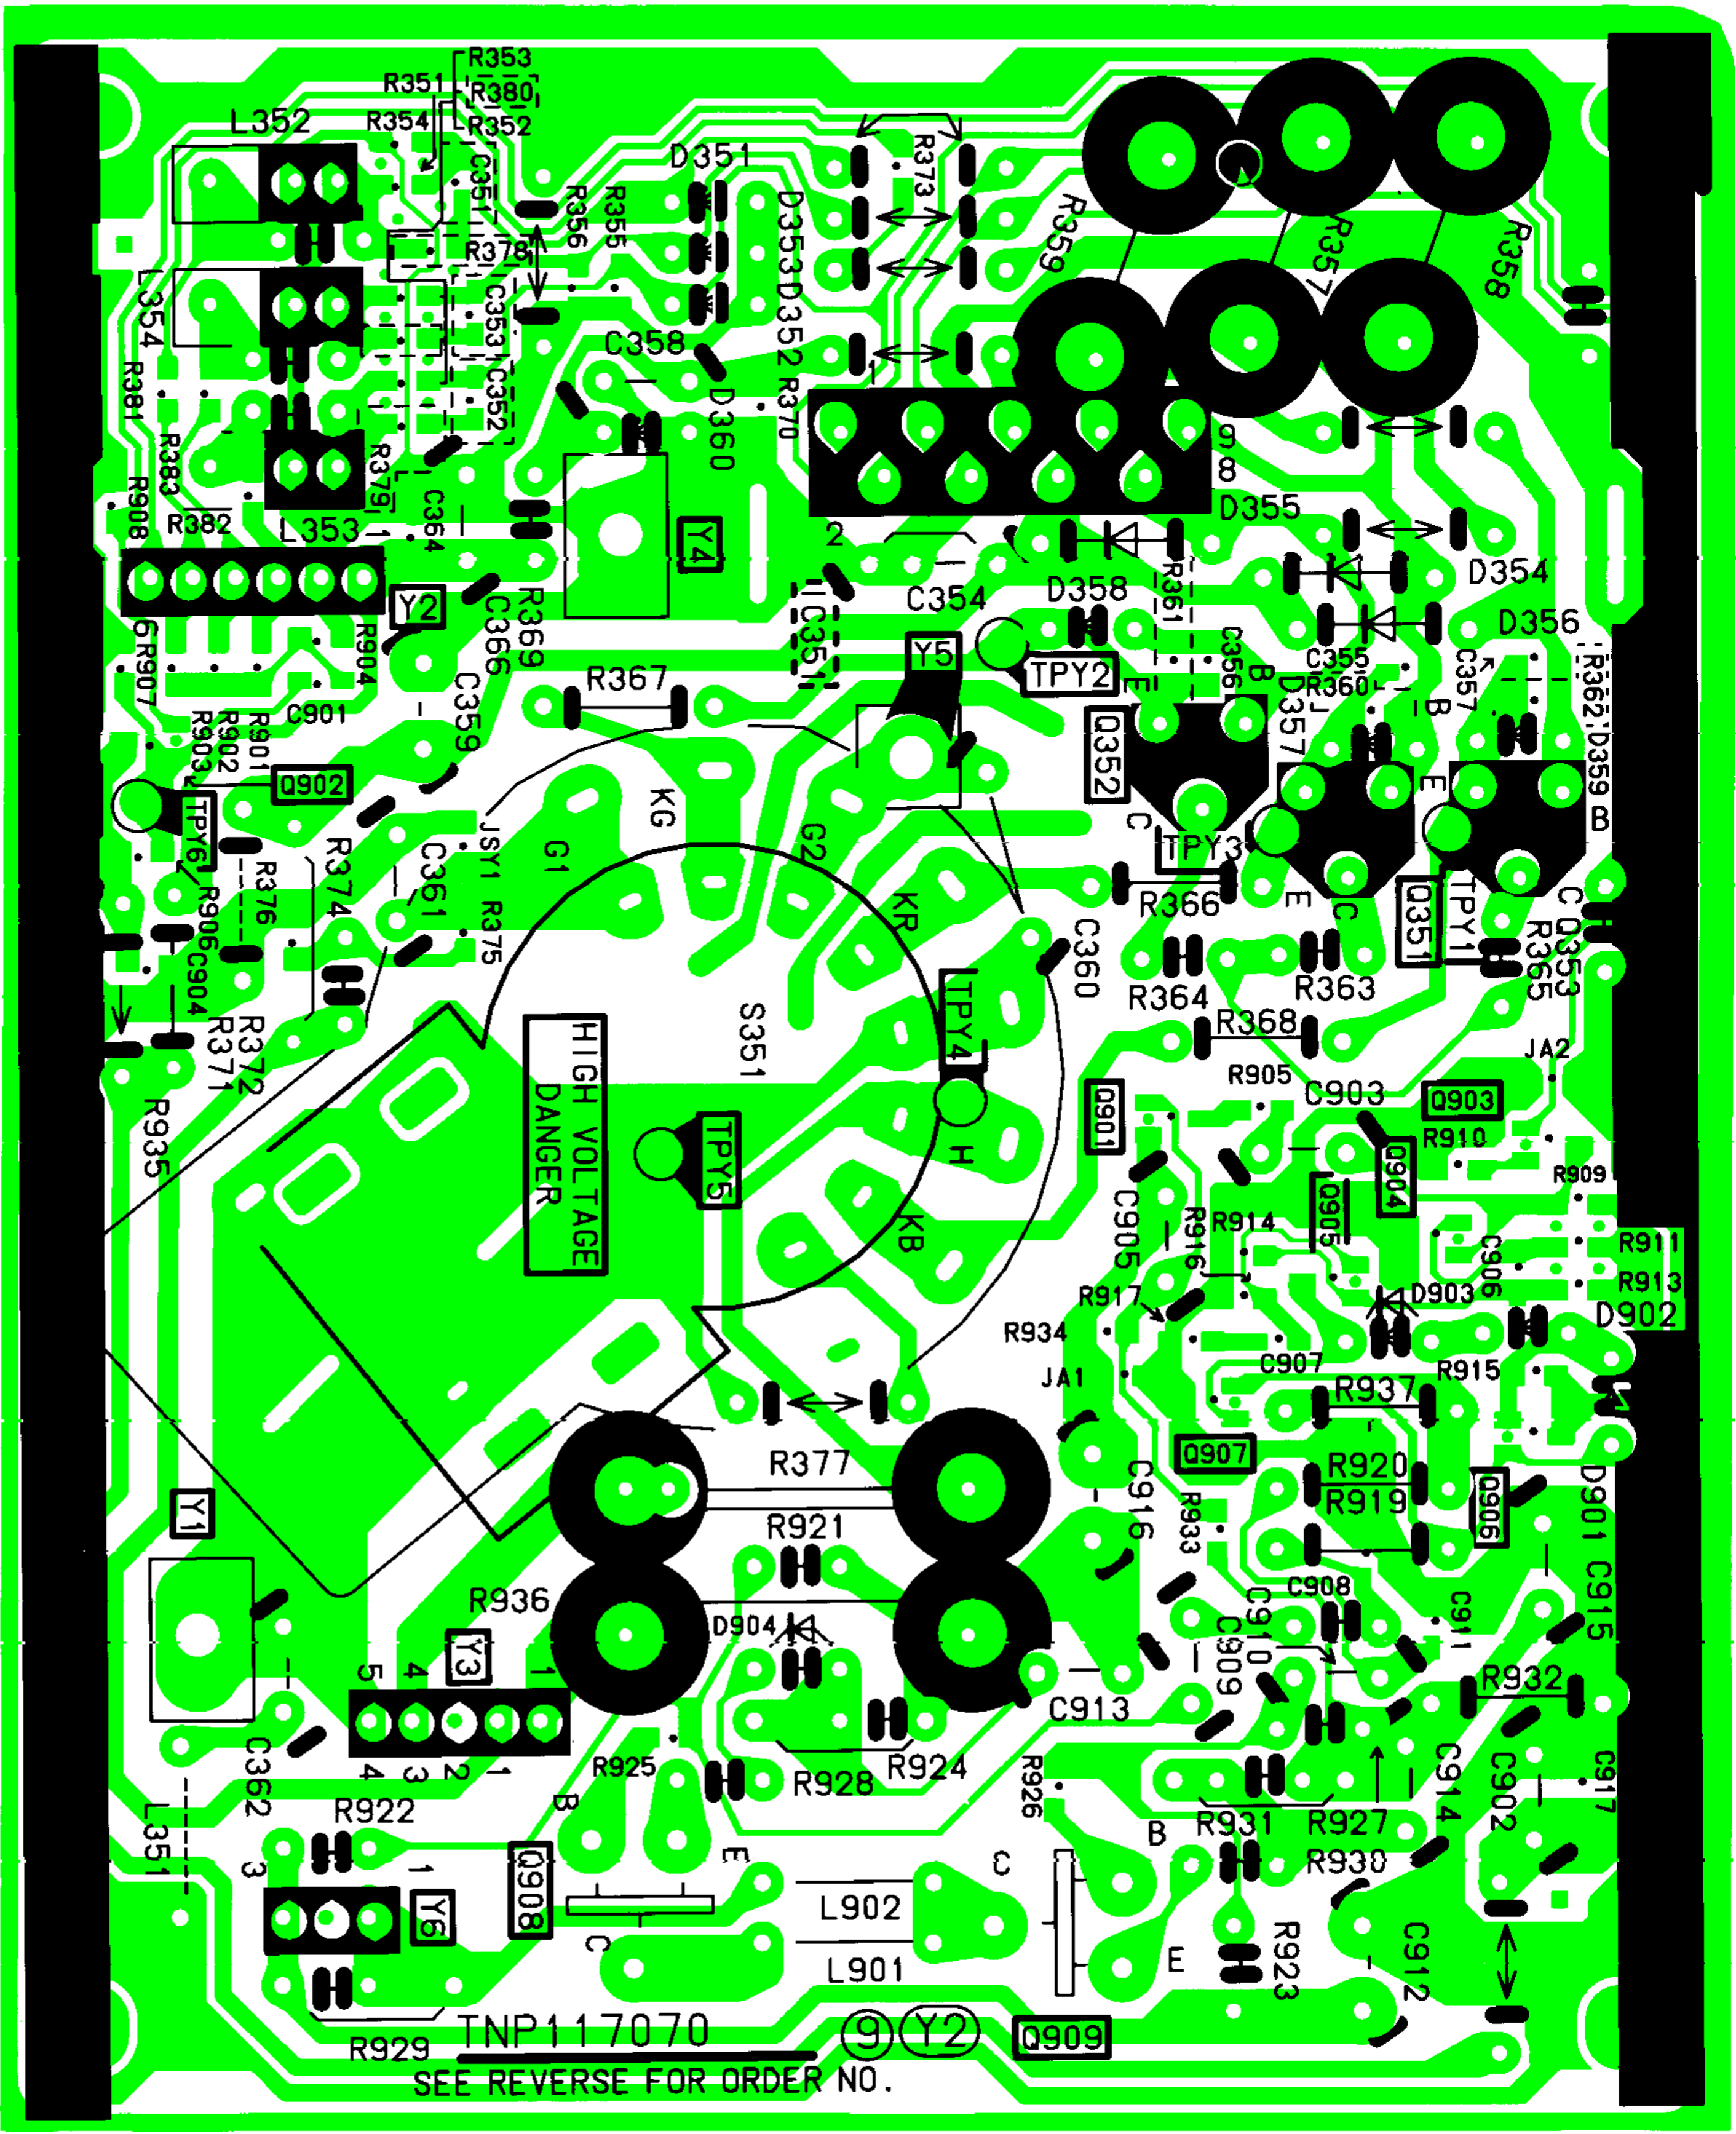



**HIGH VOLTAGE
DANGER**

R929 TNP117070

SEE REVERSE FOR ORDER NO.

9 Y2

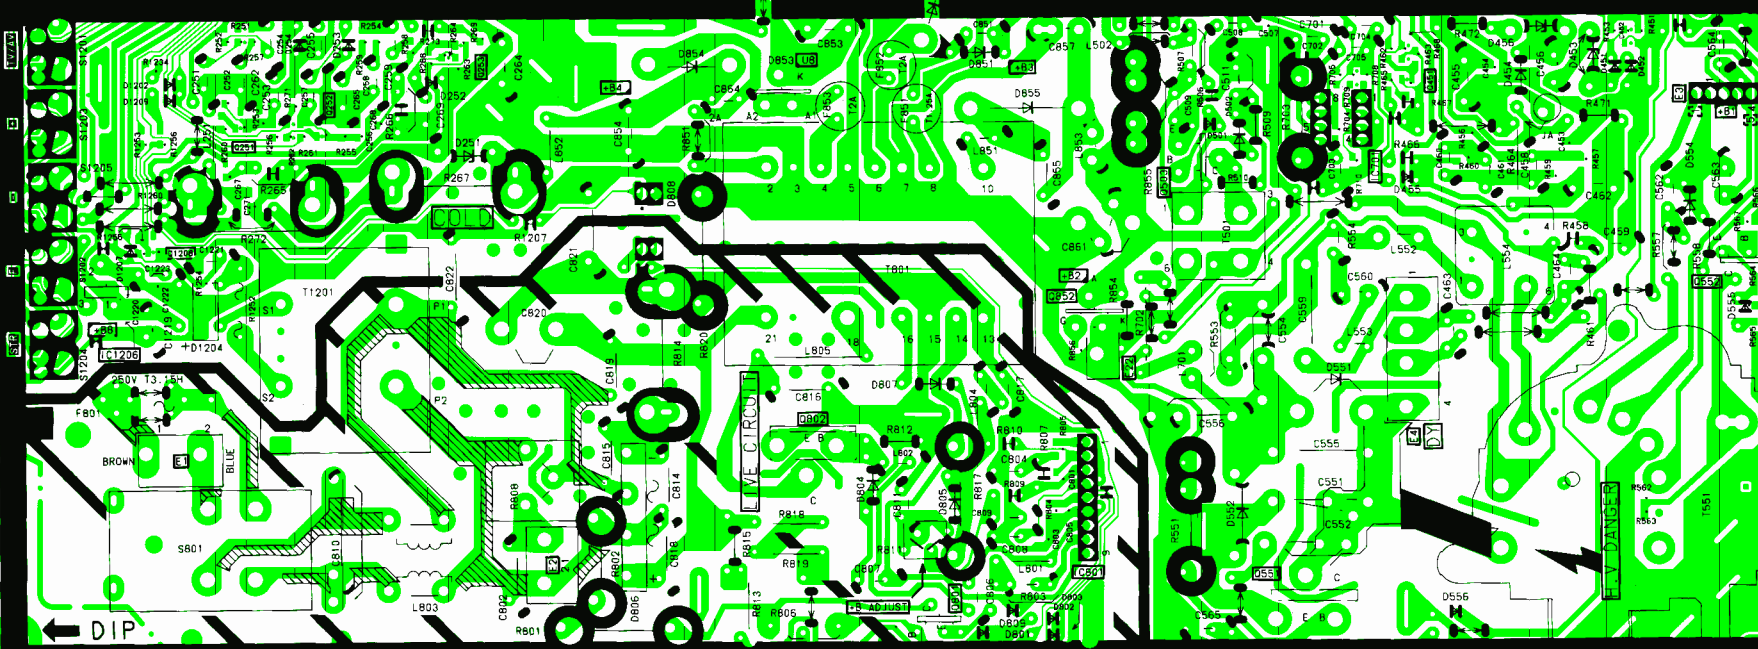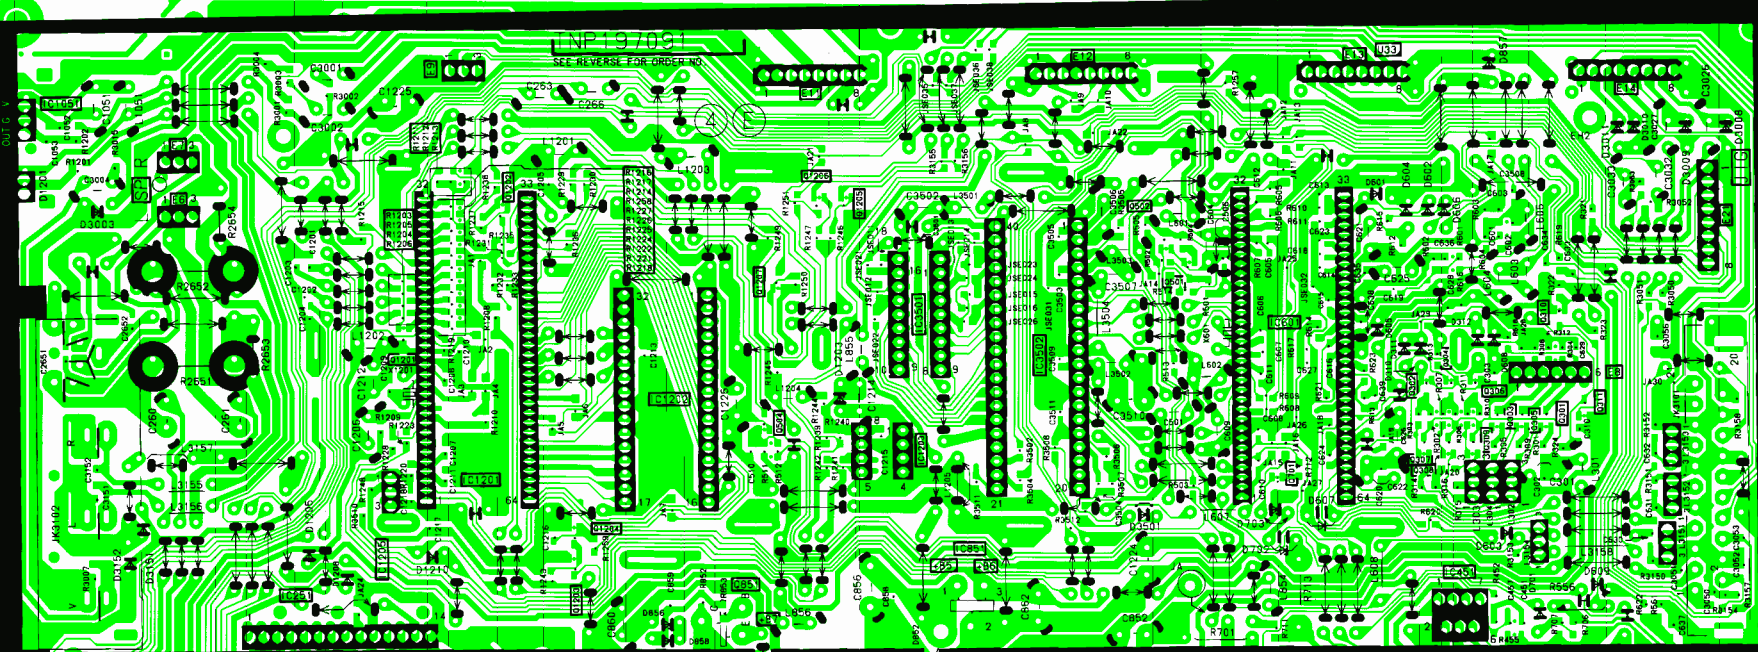
Q909




TN117064

R0071

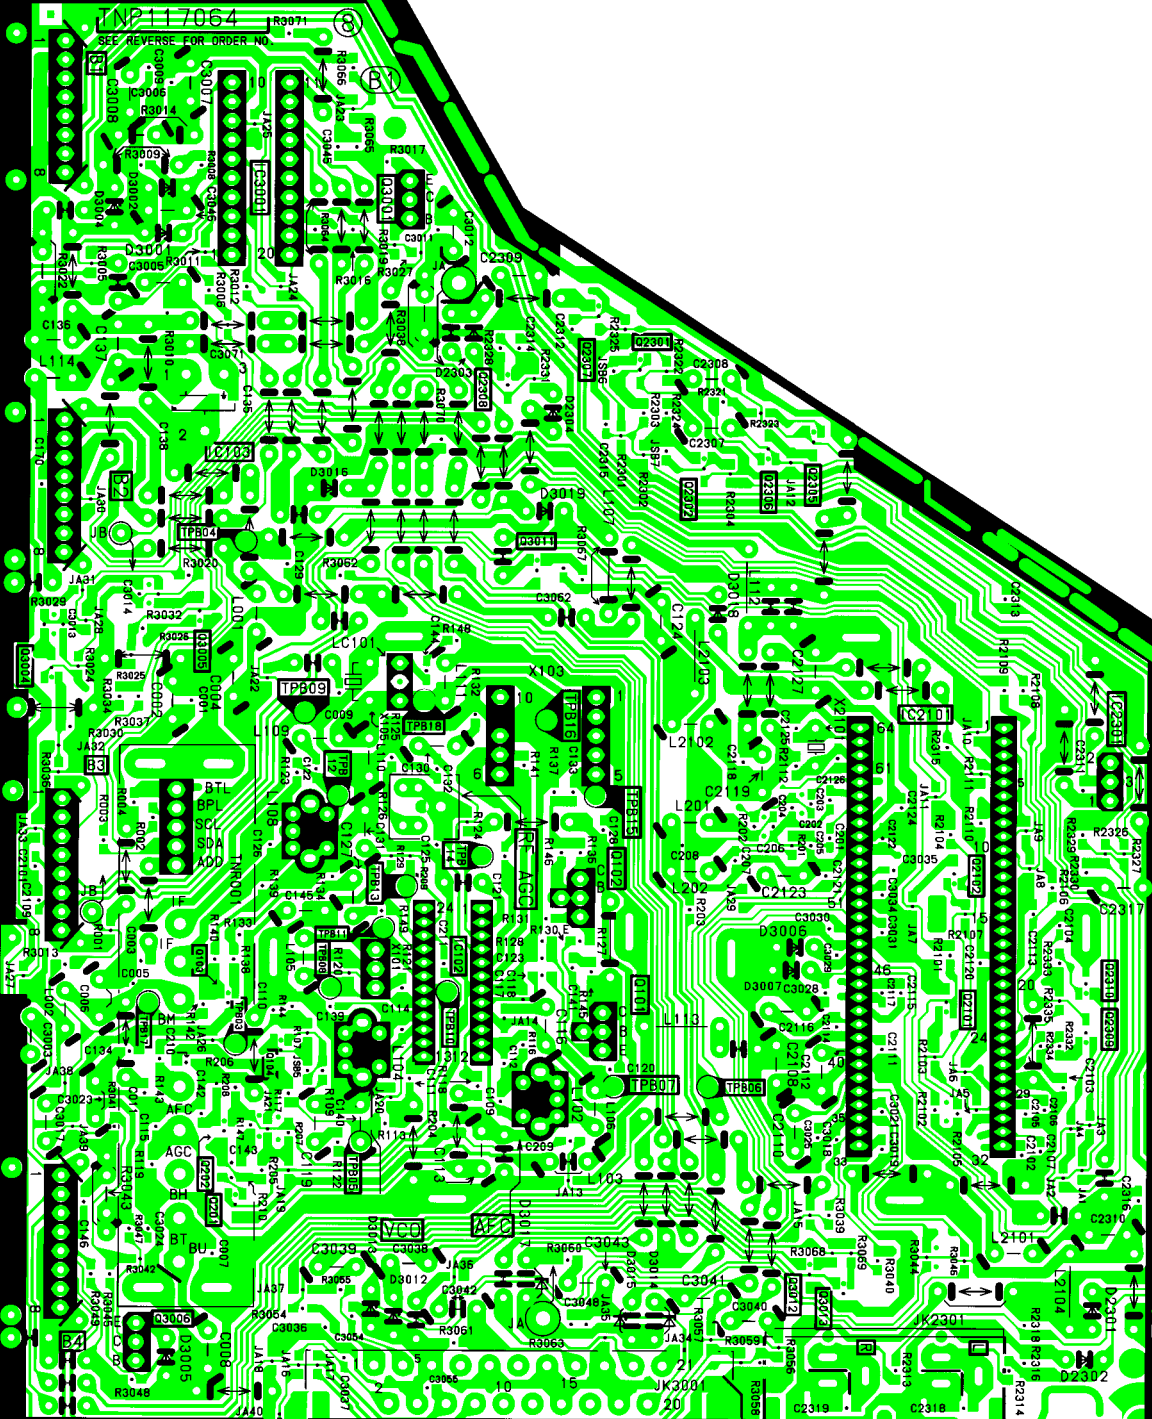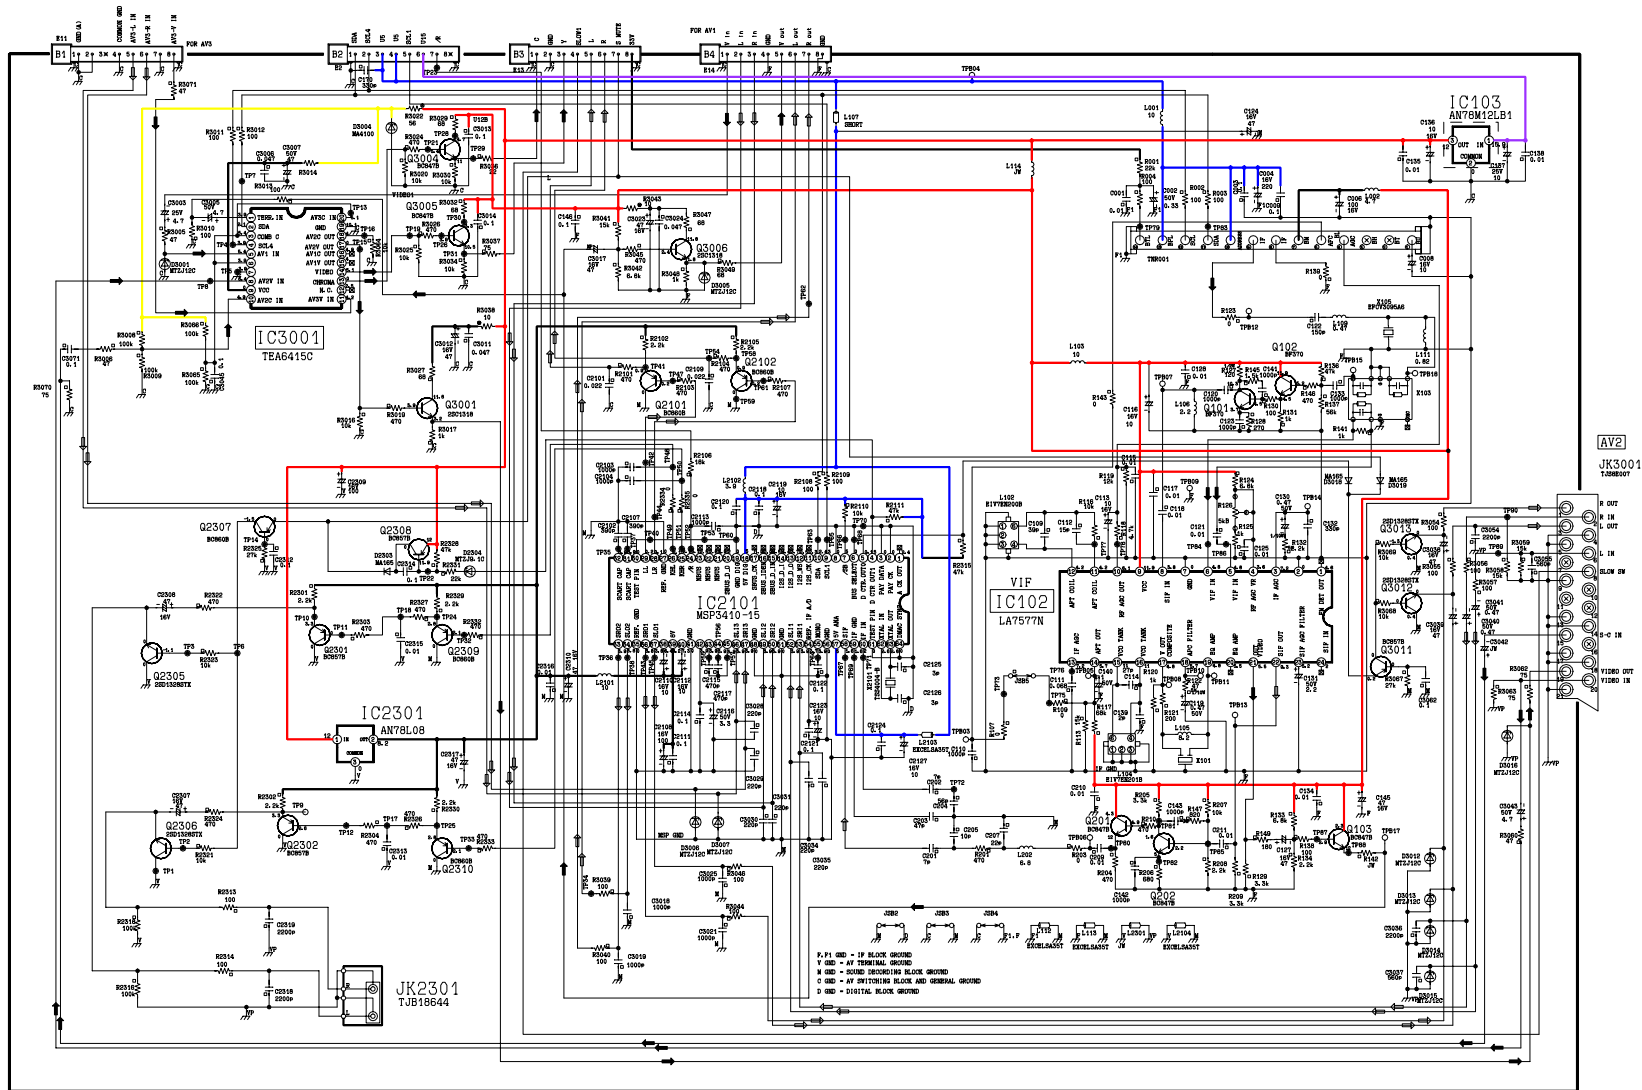SEE REVERSE FOR ORDER NO.





AY2
JK3001
T06001

JK2301
T018644


- F.P.1 GND - IF BLOCK GROUND
- Y GND - AF TERMINAL GROUND
- A GND - AUDIO SIGNALING BLOCK GROUND
- S GND - AV SWITCHING BLOCK AND GENERAL GROUND
- D GND - DIGITAL BLOCK GROUND

JK3402
TJB16673

AV3

JK3101
TJB38807

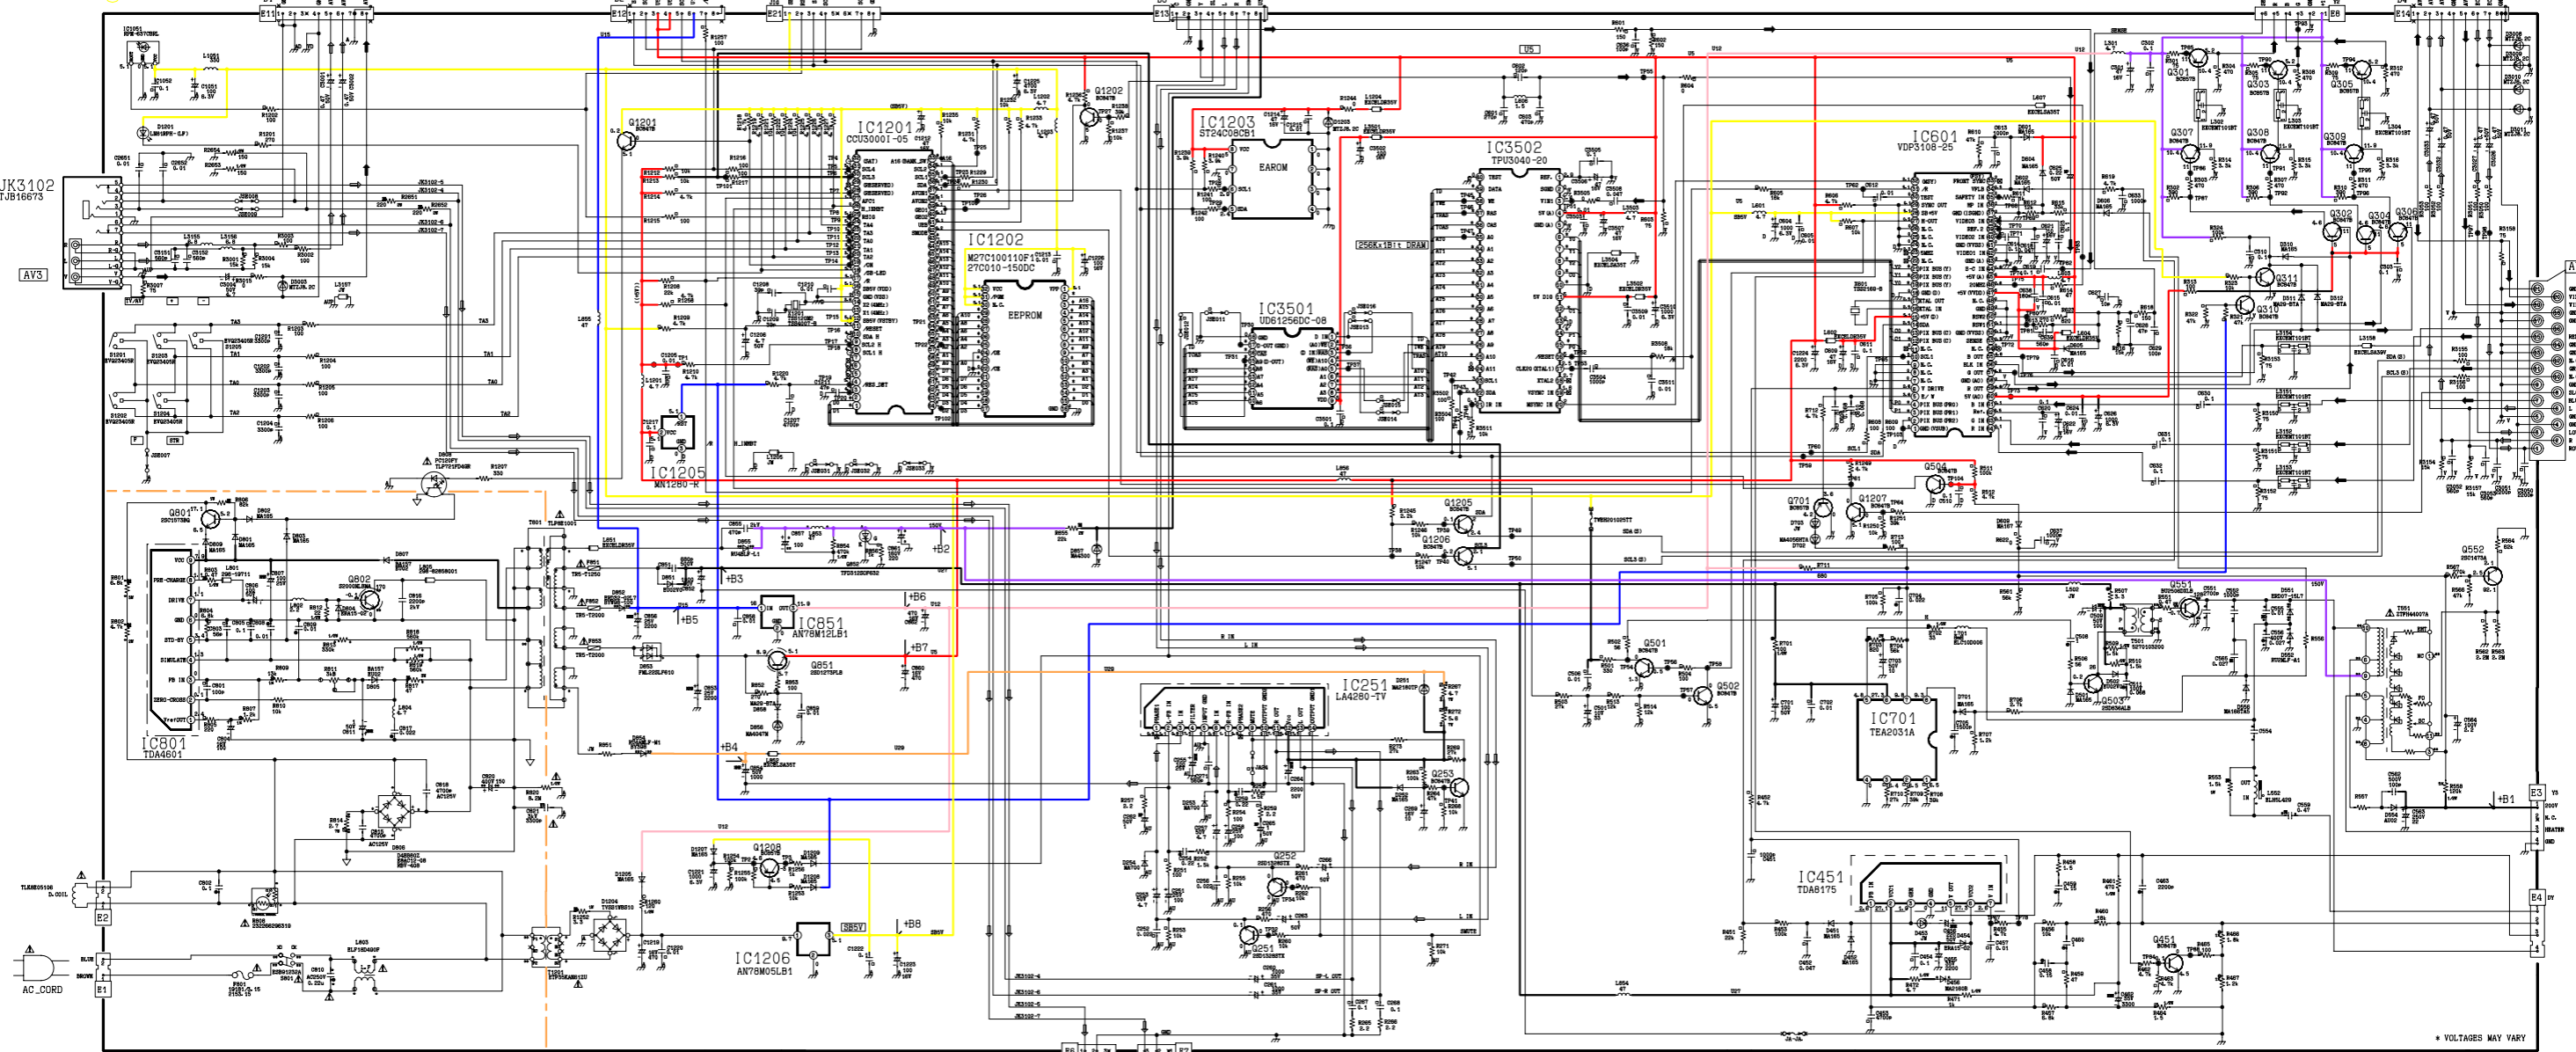AV1




JK3402
TJB16673

AV3

JK3101
TJB38007

AV1

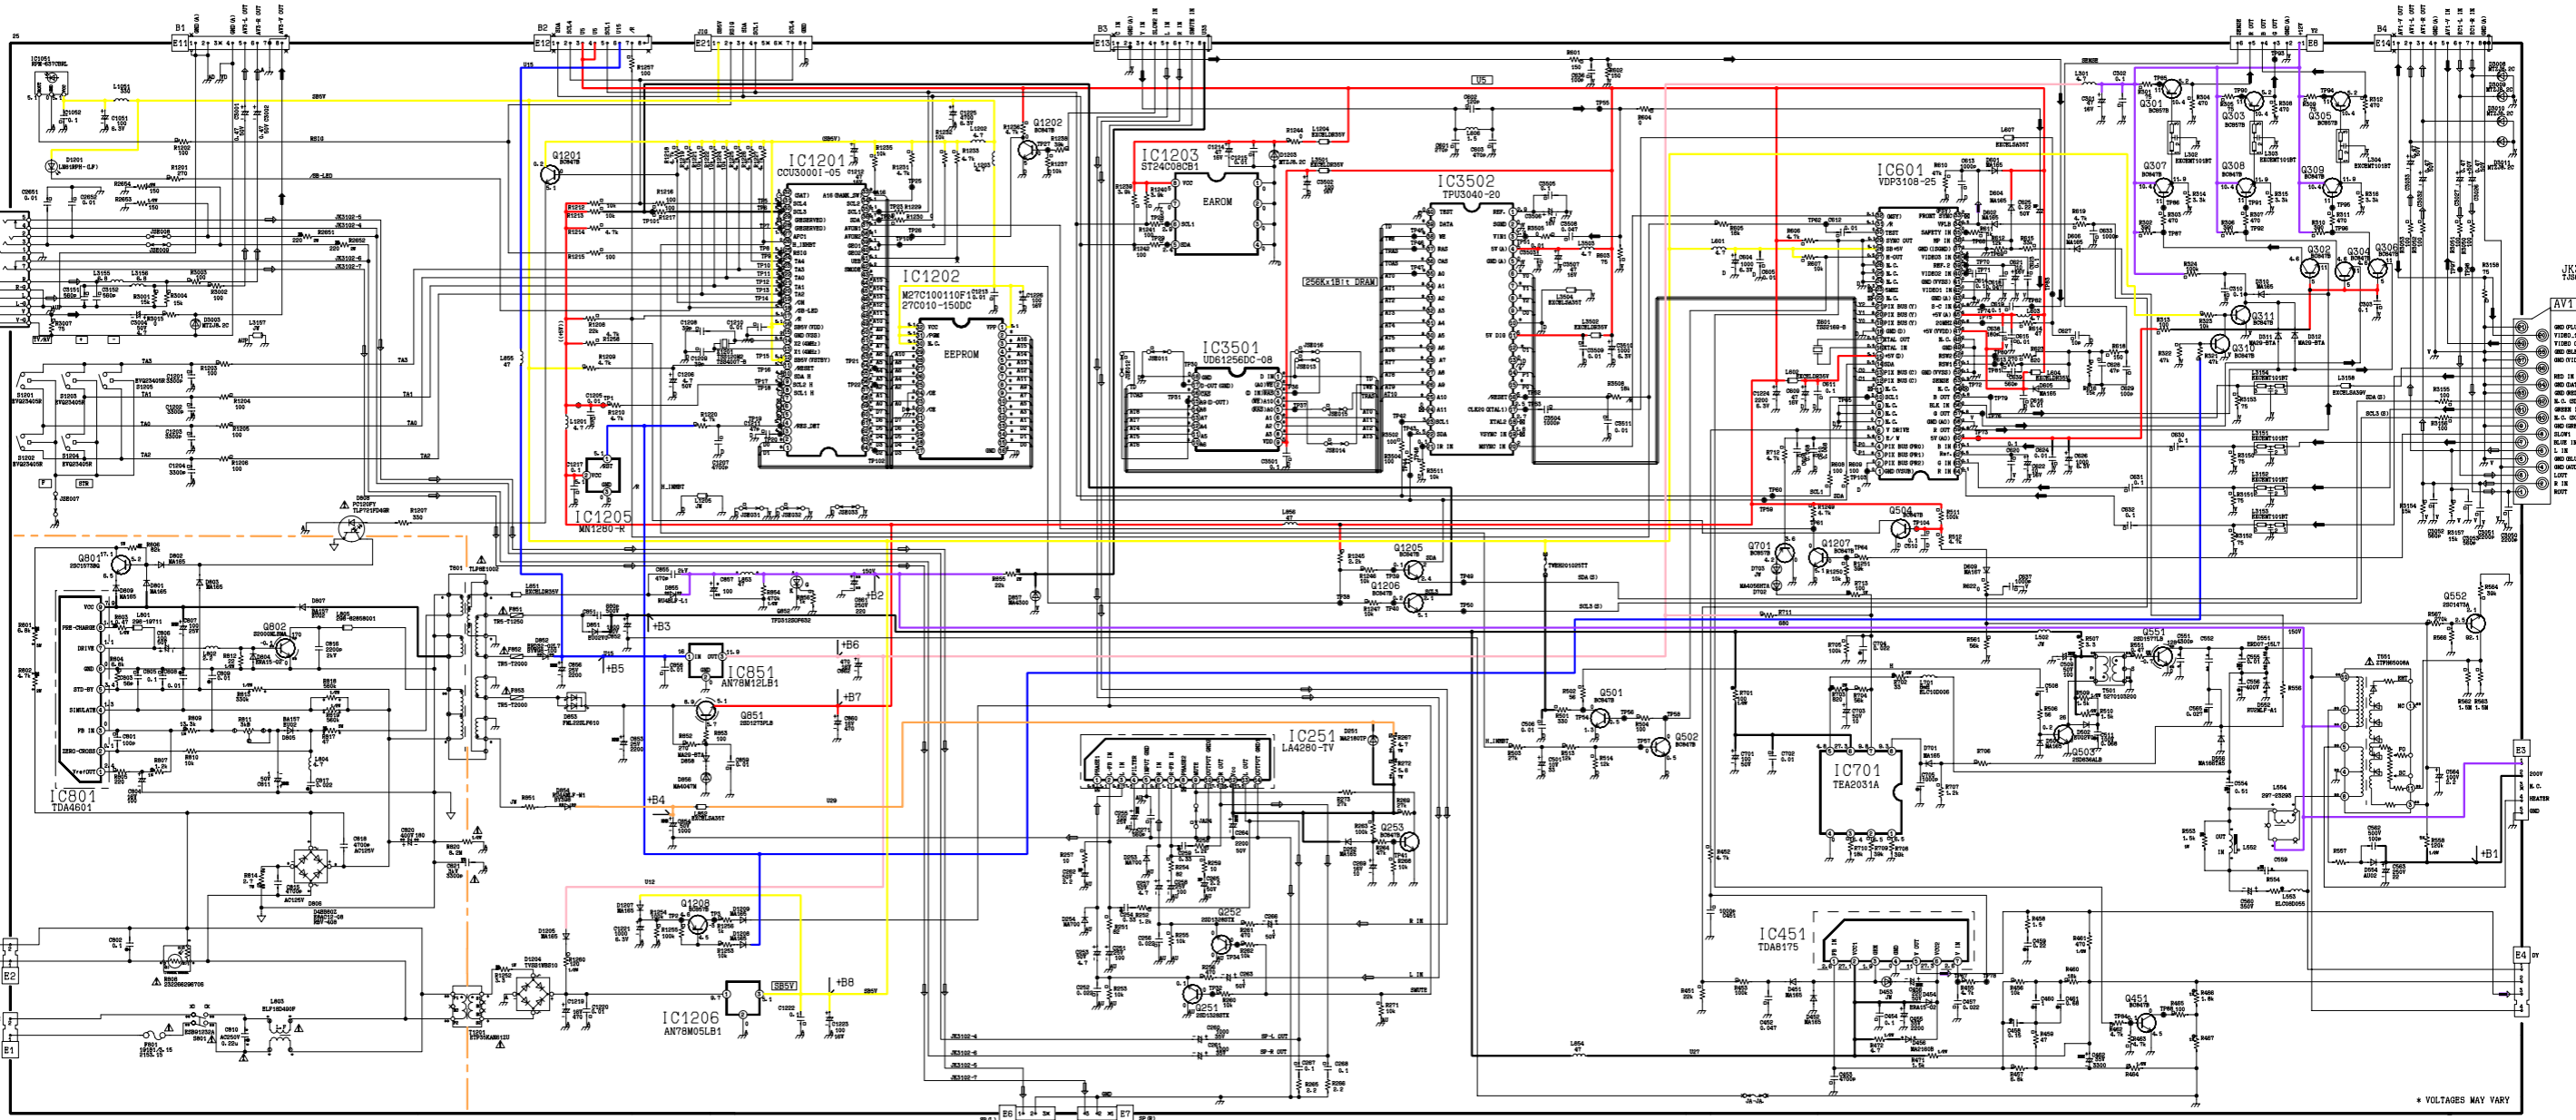AC_CORD
TSX8E017 (UK)



* VOLTAGES MAY VARY

