

Service Manual

Air Conditioner



Indoor Unit

CS-PC12KKF-2

CS-PC18KKF-2


CS-PC24KKF-2

Outdoor Unit

CU-PC12KKF-2

CU-PC18KKF-2

CU-PC24KKF-2

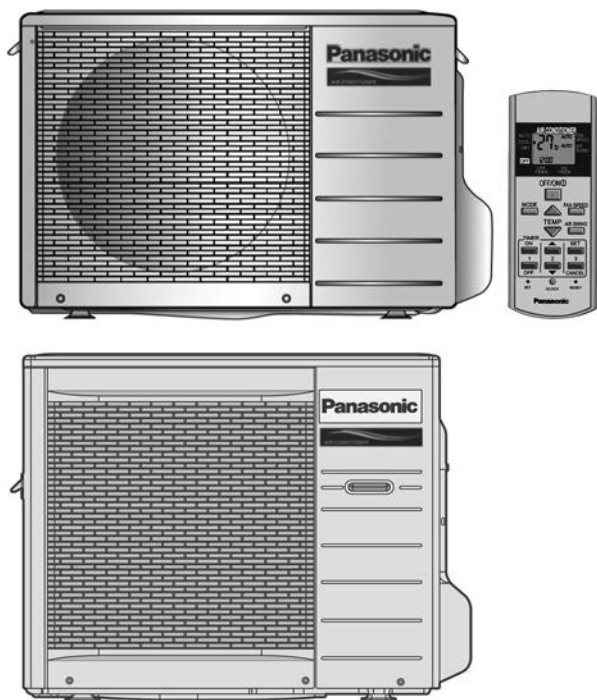

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

TABLE OF CONTENTS

	PAGE
1 Safety Precautions-----	3
2 Specifications -----	5
3 Features -----	9

	PAGE
4 Location of Controls and Components-----	10
4.1. Indoor Unit -----	10
4.2. Outdoor Unit-----	10



Panasonic®

© Panasonic HA Air-Conditioning (M) Sdn. Bhd. 2010.
Unauthorized copying and distribution is a violation of law.


4.3. Remote Control-----	10
5 Dimensions -----	11
5.1. Indoor Unit -----	11
5.2. Outdoor Unit-----	13
6 Refrigeration Cycle Diagram -----	15
7 Block Diagram -----	16
7.1. CS-PC12KKF-2-----	16
7.2. CS-PC18KKF-2 CS-PC24KKF-2-----	17
8 Wiring Connection Diagram -----	18
8.1. CS-PC12KKF-2 CU-PC12KKF-2-----	18
8.2. CS-PC18KKF-2 CU-PC18KKF-2-----	19
8.3. CS-PC24KKF-2 CU-PC24KKF-2-----	20
9 Electronic Circuit Diagram-----	21
9.1. CS-PC12KKF-2-----	21
9.2. CS-PC18KKF-2 CS-PC24KKF-2-----	22
10 Printed Circuit Board -----	23
10.1. Indoor Unit -----	23
10.2. Indicator Printed Circuit Board-----	25
11 Installation Instruction -----	26
11.1. Select The Best Location -----	26
11.2. Indoor Unit -----	27
11.3. Outdoor Unit-----	31
12 Operation and Control-----	34
12.1. Cooling Operation-----	34
12.2. Soft Dry Operation -----	35
12.3. Automatic Operation-----	37
12.4. Indoor Fan Speed Control -----	38
12.5. Outdoor Fan Speed Control -----	39
12.6. Vertical Airflow Direction Control -----	40
12.7. Horizontal Airflow Direction Control -----	40
12.8. Timer Control-----	40
12.9. Random Auto Restart Control-----	41
12.10. Remote Control Signal Receiving Sound -----	41
13 Protection Control -----	42
13.1. Restart Control (Time Delay Safety Control)-----	42
13.2. 7 Minutes Time Save Control -----	42
13.3. 60 Seconds Forced Operation-----	42
13.4. Starting current Control -----	42
13.5. Freeze Preventive Control -----	42
13.6. Compressor Reverse Rotation Protection Control -----	43
13.7. Dew Prevention control-----	43
14 Servicing Mode -----	44
14.1. Auto OFF/ON Button -----	44
14.2. Remote Control Button -----	45
15 Troubleshooting Guide-----	46
15.1. Refrigeration cycle system-----	46
16 Disassembly and Assembly Instructions -----	48
16.1. CS-PC12KKF-2-----	48
16.2. CS-PC18KKF-2 CS-PC24KKF-2-----	52
17 Technical Data-----	56
17.1. Thermostat Characteristics -----	56
17.2. Operation Characteristics -----	57
17.3. Fan Performance-----	63
17.4. Cooling Capacity Performance Data -----	63
17.5. Sound Data -----	68
18 Exploded View and Replacement Parts List -----	70
18.1. Indoor Unit -----	70
18.2. Outdoor Unit-----	74

1 Safety Precautions






- Read the following "SAFETY PRECAUTIONS" carefully before perform any servicing.
- Electrical work must be installed or serviced by a licensed electrician. Be sure to use the correct rating of the power plug and main circuit for the model installed.
- The caution items stated here must be followed because these important contents are related to safety. The meaning of each indication used is as below. Incorrect installation or servicing due to ignoring of the instruction will cause harm or damage, and the seriousness is classified by the following indications.

 WARNING	This indication shows the possibility of causing death or serious injury.
 CAUTION	This indication shows the possibility of causing injury or damage to properties.

- The items to be followed are classified by the symbols:

	This symbol denotes item that is PROHIBITED from doing.
---	---

- Carry out test running to confirm that no abnormality occurs after the servicing. Then, explain to user the operation, care and maintenance as stated in instructions. Please remind the customer to keep the operating instructions for future reference.

 WARNING	
1. Do not modify the machine, part, material during repairing service.	
2. If wiring unit is supplied as repairing part, do not repair or connect the wire even only partial wire break. Exchange the whole wiring unit.	
3. Do not wrench the fasten terminal. Pull it out or insert it straightly.	
4. Engage authorized dealer or specialist for installation and servicing. If installation or servicing done by the user is defective, it will cause water leakage, electrical shock or fire.	
5. Install according to this installation instructions strictly. If installation is defective, it will cause water leakage, electric shock or fire.	
6. Use the attached accessories parts and specified parts for installation and servicing. Otherwise, it will cause the set to fall, water leakage, fire or electrical shock.	
7. Install at a strong and firm location which is able to withstand the set's weight. If the strength is not enough or installation is not properly done, the set will drop and cause injury.	
8. For electrical work, follow the local national wiring standard, regulation and the installation instruction. An independent circuit and single outlet must be used. If electrical circuit capacity is not enough or defect found in electrical work, it will cause electrical shock or fire.	
9. This equipment is strongly recommended to install with Earth Leakage Circuit Breaker (ELCB) or Residual Current Device (RCD). Otherwise, it may cause electrical shock and fire in case equipment breakdown or insulation breakdown.	
10. Use the specified cable 1.5 mm ² and connect tightly for indoor/outdoor connection. Connect tightly and clamp the cable so that no external force will be acted on the terminal. If connection or fixing is not perfect, it will cause heat-up or fire at the connection.	
11. Wire routing must be properly arranged so that control board cover is fixed properly. If control board cover is not fixed perfectly, it will cause heat-up or fire at the connection point of terminal, fire or electrical shock.	
12. When carrying out piping connection, take care not to let air substances other than the specified refrigerant go into refrigeration cycle. Otherwise, it will cause lower capacity, abnormal high pressure in the refrigeration cycle, explosive and injury.	
13. Do not install outdoor unit near handrail of veranda. When installing air-conditioner unit at veranda of high rise building, child may climb up to outdoor unit and cross over the handrail and causing accident.	
14. This equipment must be properly earthed. Earth line must not be connected to gas pipe, water pipe, earth of lightning rod and telephone. Otherwise, it may cause electric shock in case equipment breakdown or insulation breakdown.	
15. Keep away from small children, the thin film may cling to nose and mouth and prevent breathing.	
16. Do not damage or use unspecified power supply cord. Otherwise it will cause fire or electric shock.	
17. Do not modify the length of the power supply cord or use extension cord, and do not share the single outlet with other electric appliances. Otherwise, it will cause fire or electric shock.	
18. During pump down operation, stop the compressor before remove the refrigeration piping. When remove piping while valve at open condition, burst may occur and cause injury.	
19. During installation, before run the compressor, confirm the refrigerant pipes are fixed. Operation of compressor without fixing the piping, setting the valves at open condition, a burst may occur and cause injury.	
20. After completion of installation or service, confirm there is no leakage or refrigerant gas. It may generate toxic gas when the refrigerant contacts with fire.	



WARNING

21. Ventilate if there is refrigerant gas leakage during operation. It may cause toxic gas when refrigerant contacts with fire.

22. Do not insert your fingers or other objects into the unit, high speed rotating fan may cause injury.



23. Must not use other parts except original parts described in catalog and manual.



CAUTION

1. Do not install the unit at place where leakage of flammable gas may occur. In case gas leaks and accumulates at surrounding of the unit, it may cause fire.



2. Carry out drainage piping as mentioned in installation instructions. If drainage is not perfect, water may enter the room and damage the furniture.

3. Tighten the flare nut with torque wrench according to specified method. If the flare nut is over-tightened, after a long period, the flare may break and cause refrigerant gas leakage.

4. Do not touch outdoor unit air inlet and aluminium fin. It may cause injury.



5. Select an installation location which is easy for maintenance.

6. Pb free solder has a higher melting point than standard solder; typically the melting point is 50°F – 70°F (30°C – 40°C) higher. Please use a high temperature solder iron. In case of the soldering iron with temperature control, please set it to 700 ± 20°F (370 ± 10°C). Pb free solder will tend to splash when heated too high (about 1100°F / 600°C).

7. Power supply connection to the air conditioner. Connect the power supply cord of the air conditioner to the mains using one of the following methods.

Power supply point shall be the place where there is ease for access for the power disconnection in case of emergency. In some countries, permanent connection of this room air conditioner to the power supply is prohibited.

i. Power supply connection to the receptacle using a power plug. Use an approved 15/16A (3/4~1.5 HP) or 16A (2.0 HP) or 20A (2.5 HP) power plug with earth pin for the connection to the socket.

ii. Power supply connection to a circuit breaker for the permanent connection. Use an approved 16A (3/4~2.0 HP) or 20A (2.5 HP) circuit breaker for the permanent connection. It must be a double pole switch with a minimum 3.0 mm contact gap.

8. Do not release refrigerant during piping work for installation, servicing, reinstallation and during repairing a refrigerant parts. Take care of the liquid refrigerant, it may cause frostbite.



9. Installation or servicing work: It may need two people to carry out the installation or servicing work.

10. Do not install this appliance in a laundry room or other location where water may drip from the ceiling, etc.



11. Do not sit or step on the unit, you may fall down accidentally.



12. Do not touch the sharp aluminium fin, sharp parts may cause injury.



2 Specifications

Model			Indoor	CS-PC12KKF-2	
			Outdoor	CU-PC12KKF-2	
Performance Test Condition				NEW JIS	
Power Supply			Phase, Hz	Single, 50	
			V	220	240
Cooling	Capacity		kW	3.32	3.36
			BTU/h	11300	11500
			kJ/h	11950	12100
	Running Current		A	5.7	5.5
	Input Power		W	1.24k	1.29k
	EER		W/W	2.68	2.60
			BTU/hW	9.11	8.91
	Power Factor		%	99	98
	Indoor Noise		dB-A	High: 40; Low: 30	
			Power Level dB	—	
Outdoor Noise		dB-A	High: 51; Low: -	High: 52; Low: -	
		Power Level dB	—	—	
Max Current (A) / Max Input Power (W)				8.1 / 1.75k	
Starting Current (A)				30.0	
Compressor		Type		Rotary (1 cylinder) rolling piston type	
		Motor Type		Induction (2-poles)	
		Output Power	W	1.0k	
Indoor Fan	Type			Cross-flow Fan	
	Material			ASG20K1	
	Motor Type			Induction (4-poles)	
	Input Power		W	36	37
	Output Power		W	18	
	Speed	Lo	rpm	800	
		Me	rpm	940	
		Hi	rpm	1100	
SHi		rpm	—		
Outdoor Fan	Type			Propeller Fan	
	Material			PP Resin	
	Motor Type			Induction (6-poles)	
	Input Power		W	80.3	89.1
	Output Power		W	45	
	Speed	Hi	rpm	875	905
Moisture Removal			L/h (Pt/h)	1.9 (4.0)	
Indoor Airflow		Lo	m ³ /min (ft ³ /m)	7.5 (265)	
		Me	m ³ /min (ft ³ /m)	8.8 (311)	
		Hi	m ³ /min (ft ³ /m)	10.3 (364)	
		SHi	m ³ /min (ft ³ /m)	—	
Outdoor Airflow		Hi	m ³ /min (ft ³ /m)	33.2 (1172)	34.2 (1207)
Refrigeration Cycle		Control Device		Capillary Tube	
		Refrigerant Oil	cm ³	ATMOS NM56M or SUNISO 4GDID (450cm ³)	
		Refrigerant Type	g (oz)	R22, 870 (30.7)	

Model		Indoor	CS-PC12KKF-2	
		Outdoor	CU-PC12KKF-2	
Dimension	Height (I/D / O/D)	mm (inch)	290 (11-7/16)	540 (21-9/32)
	Width (I/D / O/D)	mm (inch)	870 (34-9/32)	780 (30-23/32)
	Depth (I/D / O/D)	mm (inch)	204 (8-1/16)	289 (11-13/32)
Weight	Net (I/D / O/D)	kg (lb)	9 (20) / 35 (77)	
Piping	Pipe Diameter (Liquid / Gas)	mm (inch)	6.35 (1/4") / 12.70 (1/2")	
	Standard length	m (ft)	7.5 (24.6)	
	Length range (min~max)	m (ft)	3~15 (9.8~49.2)	
	I/D & O/D Height different	m (ft)	5 (16.4)	
	Additional Gas Amount	g/m (oz/ft)	10 (0.1)	
	Length for Additional Gas	m (ft)	7.5 (24.6)	
Drain Hose	Inner Diameter	mm	16	
	Length	mm	550	
Indoor Heat Exchanger	Fin Material		Aluminium (Pre Coat)	
	Fin Type		Slit Fin	
	Row × Stage × FPI		2 × 15 × 21	
	Size (W × H × L)	mm	610 × 315 × 25.4	
Outdoor Heat Exchanger	Fin Material		Aluminium (Blue Coat)	
	Fin Type		Corrugated Fin	
	Row × Stage × FPI		1 × 24 × 17	
	Size (W × H × L)	mm	22.0 × 508 × 708.4	
Air Filter	Material		Polypropelene	
	Type		One-touch	
Power Supply			Indoor Power Supply	
Power Supply Cord		A	15	
Thermostat			—	
Protection Device			—	
			Dry Bulb	Wet Bulb
Indoor Operation Range	Maximum		32	23
	Minimum		16	11
Outdoor Operation Range	Maximum		55	31
	Minimum		16	11

1. Cooling capacities are based on indoor temperature of 27°C Dry Bulb (80.6°F Dry Bulb), 19.0°C Wet Bulb (66.2°F Wet Bulb) and outdoor air temperature of 35°C Dry Bulb (95°F Dry Bulb), 24°C Wet Bulb (75.2°F Wet Bulb).
2. Specification are subjected to change without prior notice for further improvement.

Model			Indoor	CS-PC18KKF-2		CS-PC24KKF-2	
			Outdoor	CU-PC18KKF-2		CU-PC24KKF-2	
Performance Test Condition				NEW JIS		NEW JIS	
Power Supply			Phase, Hz	Single, 50		Single, 50	
			V	220	240	220	240
Cooling	Capacity		kW	5.10	5.10	6.68	6.68
			BTU/h	17400	17400	22800	22800
			kJ/h	18360	18360	24050	24050
	Running Current		A	9.2	9.8	11.7	11.6
	Input Power		W	1.97k	2.10k	2.50k	2.58k
	EER		W/W	2.59	2.43	2.67	2.59
			BTU/hW	8.83	8.29	9.12	8.84
	Power Factor		%	97	89	97	93
	Indoor Noise		dB-A	High: 45; Low: 41		High: 48; Low: 42	High: 49; Low: 42
			Power Level dB	—		—	
Outdoor Noise		dB-A	High: 56; Low: -	High: 58; Low: -	High: 61; Low: -	High: 63; Low: -	
		Power Level dB	—		—		
Max Current (A) / Max Input Power (W)				12.9 / 2.95k		17.1 / 3.66k	
Starting Current (A)				44.0		60.0	
Compressor		Type	Rotary (1 cylinder) rolling piston type		Rotary (1 cylinder) rolling piston type		
		Motor Type					Induction (2-poles)
		Output Power	W	1.5k	2.0k		
Indoor Fan	Type		Cross-flow Fan		Cross-flow Fan		
	Material		ASG20K1		ASG30K1		
	Motor Type		Transistor (8-poles)		Transistor (8-poles)		
	Input Power		W	94.8	94.8	94.8	94.8
	Output Power		W	40		40	
	Speed	Lo	rpm	1120	1120	1150	1150
		Me	rpm	1200	1200	1240	1240
		Hi	rpm	1280	1280	1390	1390
SHi		rpm	—	—	—	—	
Outdoor Fan	Type		Propeller Fan		Propeller Fan		
	Material		PP Resin		PP Resin		
	Motor Type		Induction (6-poles)		Induction (6-poles)		
	Input Power		W	87.8	92.4	157.1	172.9
	Output Power		W	45		88	
	Speed	Lo	rpm	—	—	440	500
		Hi	rpm	875	905	860	890
Moisture Removal			L/h (Pt/h)	2.8 (5.9)		3.8 (8.0)	
Indoor Airflow		Lo	m³/min (ft³/m)	14.8 (522)	14.8 (522)	15.0 (529)	15.0 (529)
		Me	m³/min (ft³/m)	15.8 (560)	15.8 (560)	16.1 (570)	16.1 (570)
		Hi	m³/min (ft³/m)	16.9 (597)	16.9 (597)	18.1 (639)	18.1 (639)
		SHi	m³/min (ft³/m)	—		—	
Outdoor Airflow		Lo	rpm	—	—	26.6 (940)	30.3 (1071)
		Hi	m³/min (ft³/m)	31.6 (1115)	32.6 (1151)	52.0 (1840)	54.0 (1910)
Refrigeration Cycle		Control Device	Capillary Tube		Capillary Tube		
		Refrigerant Oil	cm³	ATMOS NM56M or SUNISO 4GDID (450cm³)		ATMOS M60 or SUNISO 4GDID (700cm³)	
		Refrigerant Type	g (oz)	R22, 1.01k (35.7)		R22, 1.40k (49.4)	

Model		Indoor	CS-PC18KKF-2		CS-PC24KKF-2	
		Outdoor	CU-PC18KKF-2		CU-PC24KKF-2	
Dimension	Height (I/D / O/D)	mm (inch)	290 (11-7/16)	540 (21-9/32)	290 (11-7/16)	750 (29-17/32)
	Width (I/D / O/D)	mm (inch)	1070 (42-5/32)	780 (30-23/32)	1070 (42-5/32)	875 (34-15/32)
	Depth (I/D / O/D)	mm (inch)	235 (9-9/32)	289 (11-13/32)	235 (9-9/32)	345 (13-19/32)
Weight	Net (I/D / O/D)	kg (lb)	12.0 (26) / 39.0 (86)		12.0 (26) / 56.0 (123)	
Piping	Pipe Diameter (Liquid / Gas)	mm (inch)	6.35 (1/4") / 12.70 (1/2")		6.35 (1/4") / 15.88 (5/8")	
	Standard length	m (ft)	5.0 (16.4)		5.0 (16.4)	
	Length range (min~max)	m (ft)	3~25 (9.8~82.0)		3~25 (9.8~82.0)	
	I/D & O/D Height different	m (ft)	20 (65.6)		20 (65.6)	
	Additional Gas Amount	g/m (oz/ft)	20 (0.2)		30 (0.3)	
	Length for Additional Gas	m (ft)	7.5 (24.6)		7.5 (24.6)	
Drain Hose	Inner Diameter	mm	14		14	
	Length	mm	550		550	
Indoor Heat Exchanger	Fin Material		Aluminium (Pre Coat)		Aluminium (Pre Coat)	
	Fin Type		Slit Fin		Slit Fin	
	Row × Stage × FPI		2 × 15 × 21		2 × 15 × 21	
	Size (W × H × L)	mm	810 × 315 × 25.4		810 × 315 × 25.4	
Outdoor Heat Exchanger	Fin Material		Aluminium (Blue Coat)		Aluminium (Blue Coat)	
	Fin Type		Slit Fin		Slit Fin	
	Row × Stage × FPI		2 × 24 × 17		2 × 34 × 17	
	Size (W × H × L)	mm	25.4 × 504 × 693.4: 713.4		25.4 × 714 × 826.2: 846.2	
Air Filter	Material		Polypropelene		Polypropelene	
	Type		One-touch		One-touch	
Power Supply			Indoor Power Supply		Indoor Power Supply	
Power Supply Cord		A	16		20	
Thermostat			—		—	
Protection Device			—		—	
			Dry Bulb	Wet Bu b	Dry Bulb	Wet Bulb
Indoor Operation Range		Maximum	32	23	32	23
		Minimum	16	11	16	11
Outdoor Operation Range		Maximum	55	31	55	31
		Minimum	16	11	16	11

- Cooling capacities are based on indoor temperature of 27°C Dry Bulb (80.6°F Dry Bulb), 19.0°C Wet Bulb (66.2°F Wet Bulb) and outdoor air temperature of 35°C Dry Bulb (95°F Dry Bulb), 24°C Wet Bulb (75.2°F Wet Bulb).
- Specification are subjected to change without prior notice for further improvement.

3 Features

- **Long Installation Piping**

- Long piping up to 15 meter (PC12KKF-2) and 25 meter (PC18/24KKF-2).

- **Easy to use remote control**

- **Quality Improvement**


- Random auto restart after power failure for safety restart operation
- Gas leakage protection
- Prevent compressor reverse cycle
- Overload protector to protect Compressor
- Noise prevention during soft dry operation
- Blue Coated Condenser for high resistance to corrosion

- **Operation Improvement**


- 24-hour timer setting

4 Location of Controls and Components


4.1. Indoor Unit

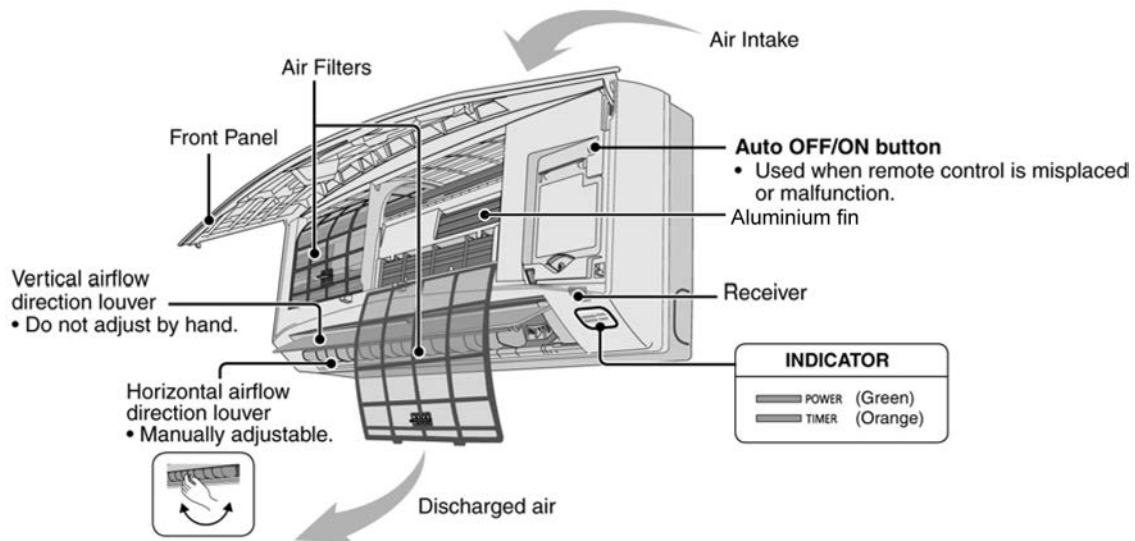

4.2. Outdoor Unit

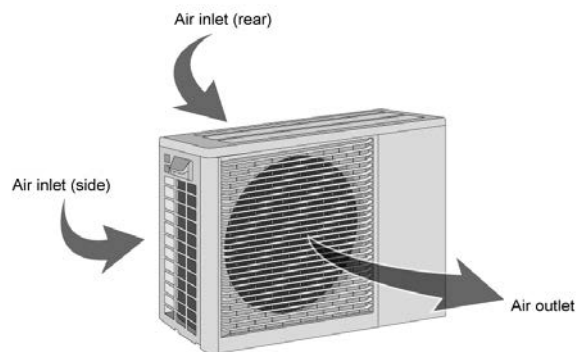


4.3. Remote Control

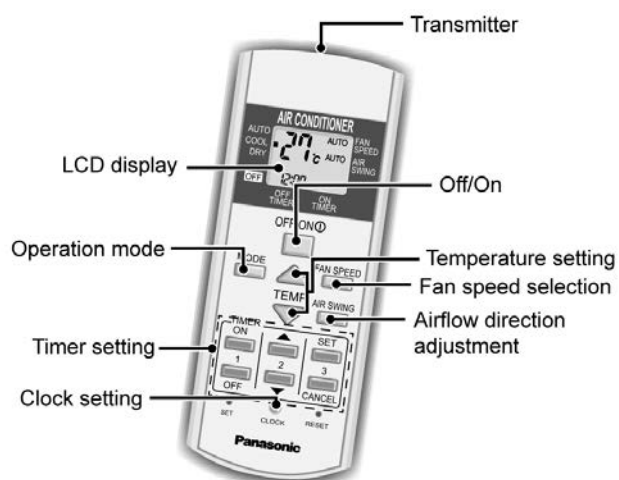


- * For normal operation, the **SET** button is not in use.
- * Press **RESET** button to restore the remote control's default setting.


5.1.1. CS-PC12KKF-2

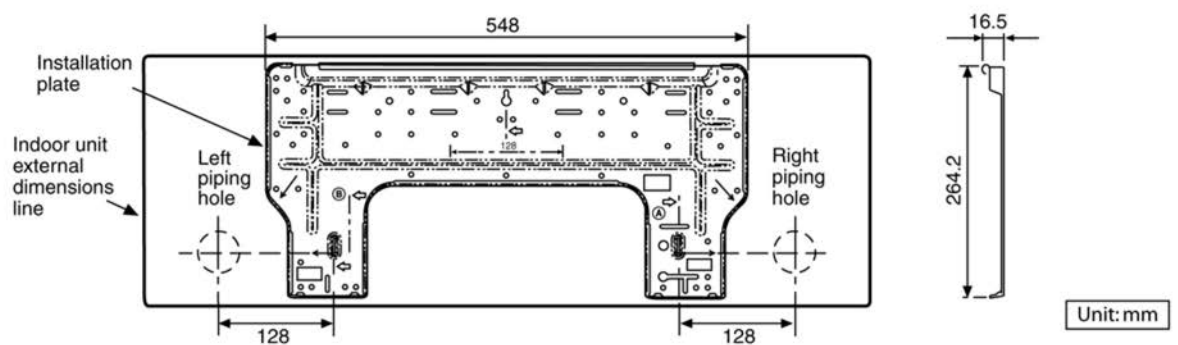

5.1.2. CS-PC18KKF-2 CS-PC24KKF-2

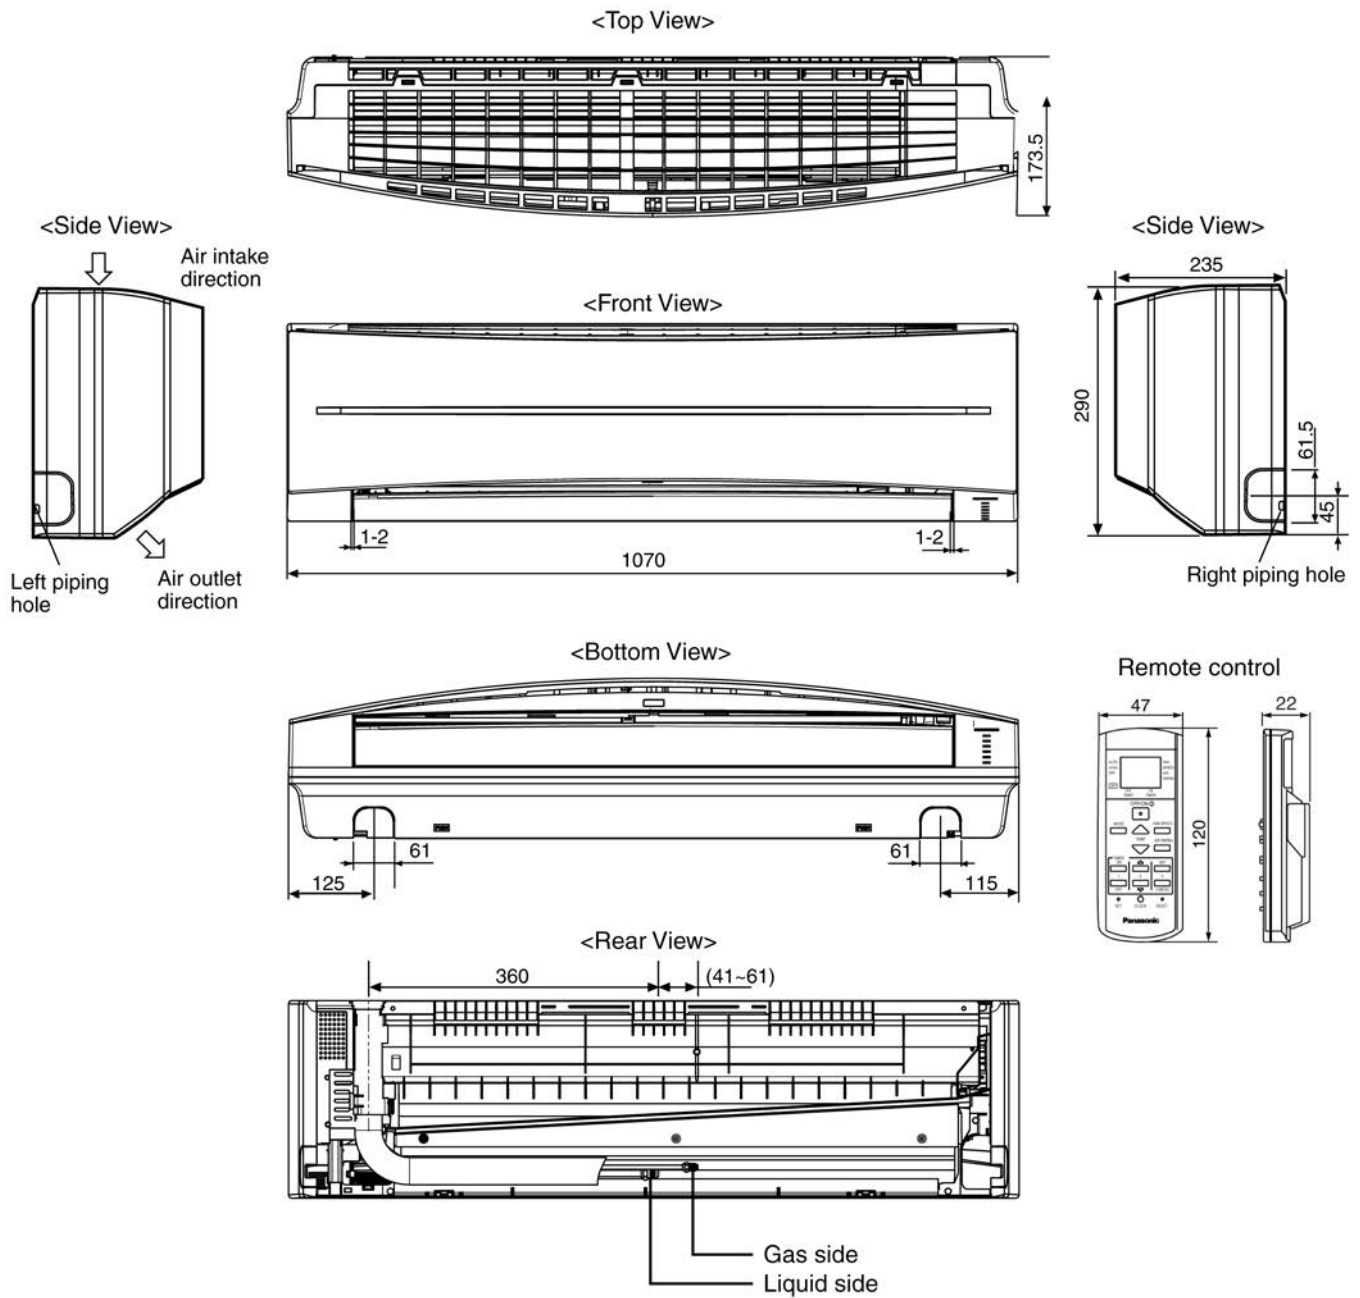


Relative position between the indoor unit and the installation plate <Front View>


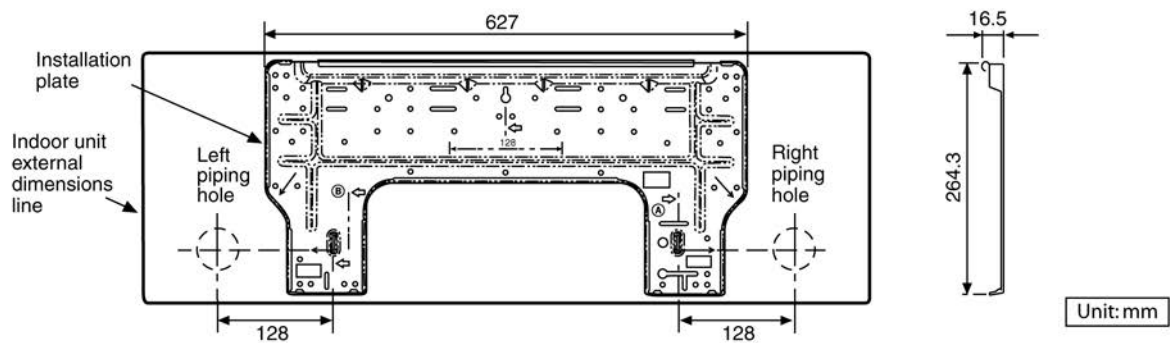


5.2. Outdoor Unit


5.2.1. CU-PC12KKF-2 CU-PC18KKF-2

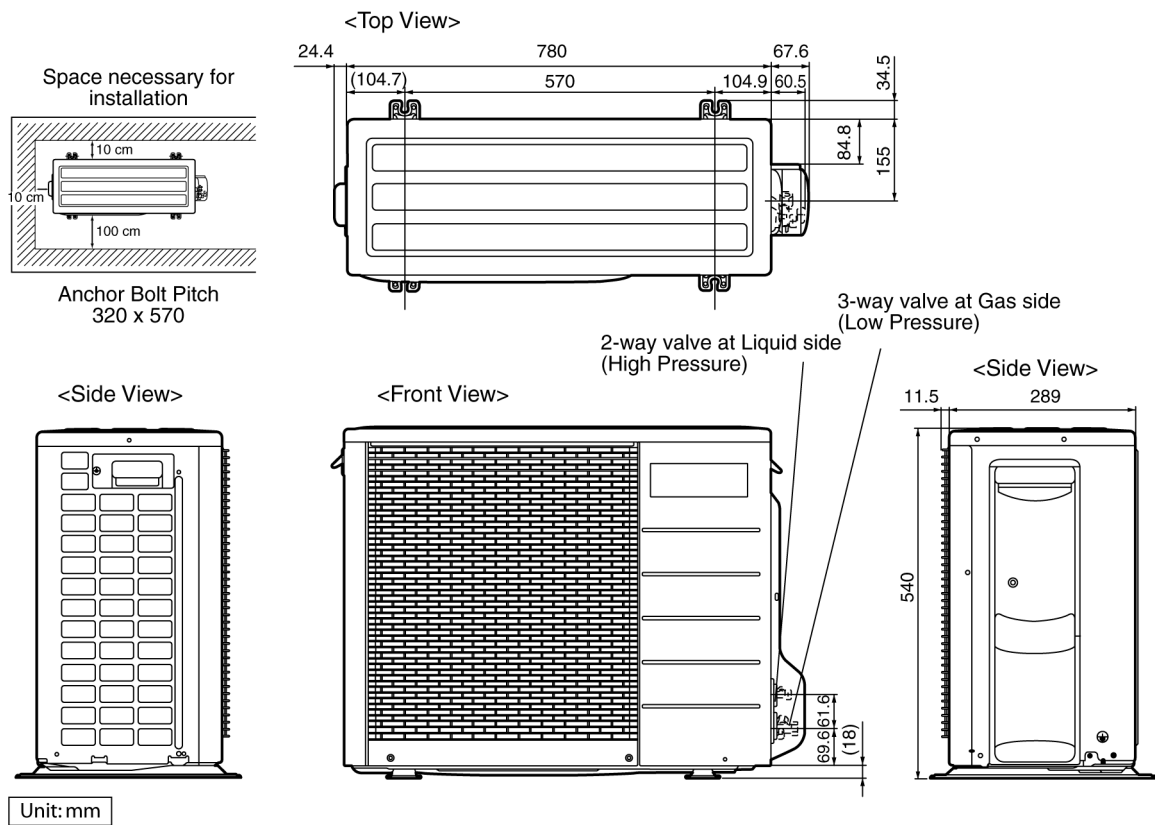


5.2.2. CU-PC24KKF-2

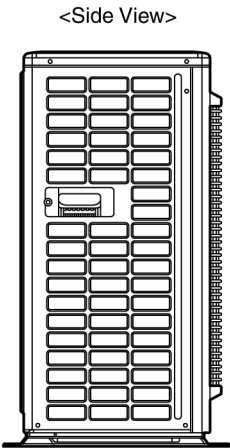

Unit: mm

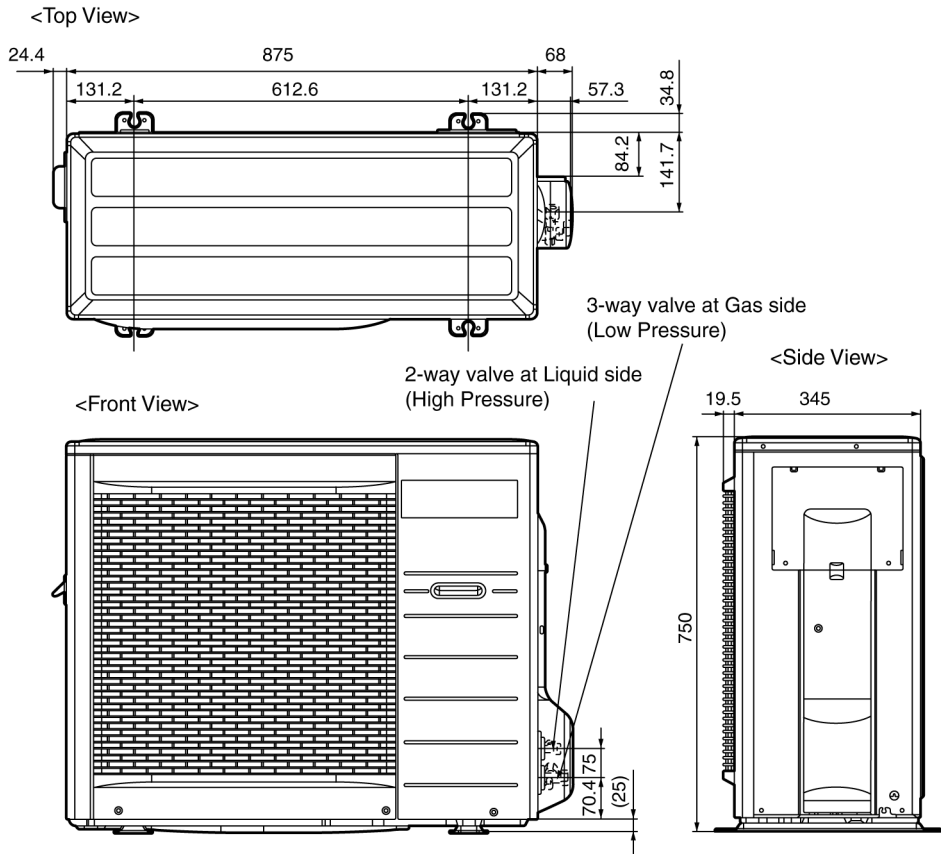


6 Refrigeration Cycle Diagram

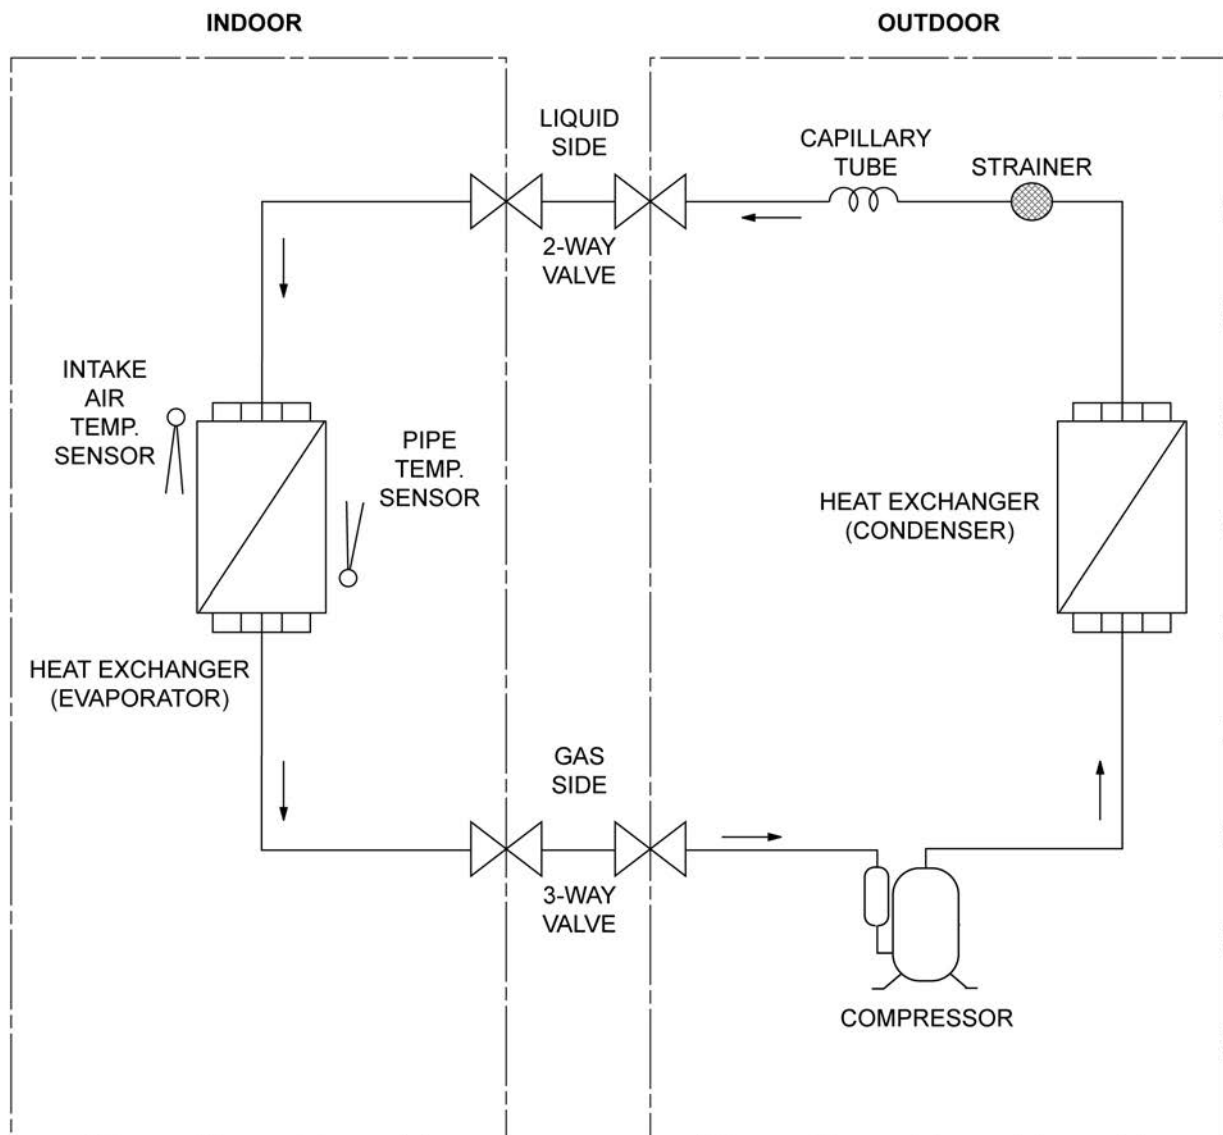


7 Block Diagram

7.1. CS-PC12KKF-2

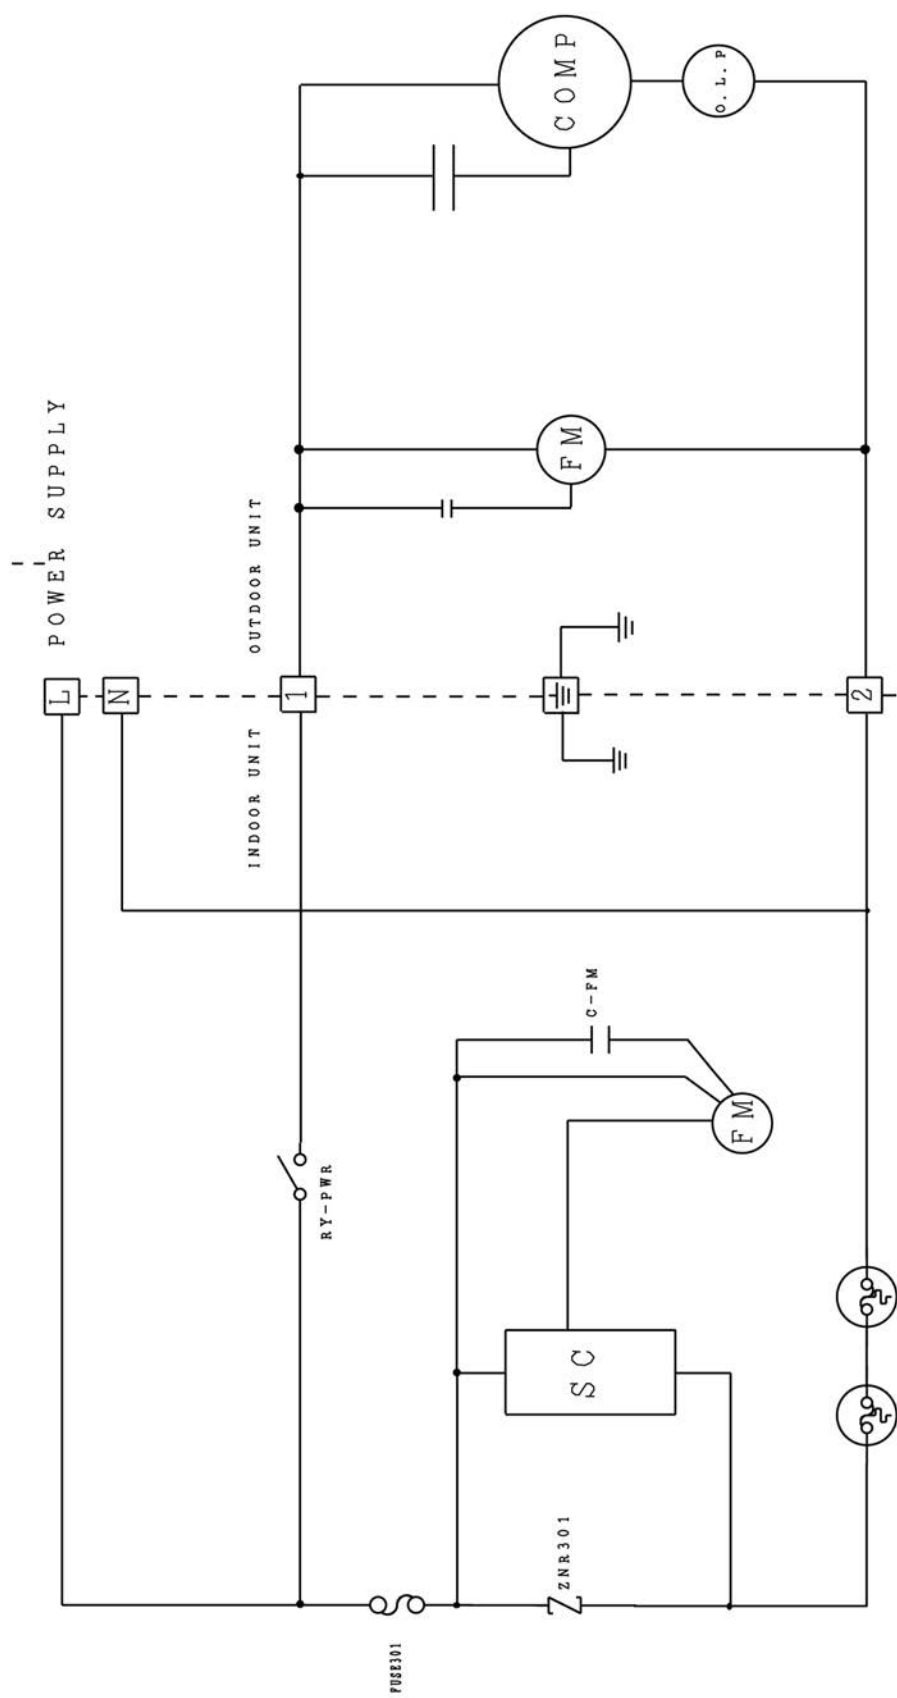


7.2. CS-PC18KKF-2 CS-PC24KKF-2

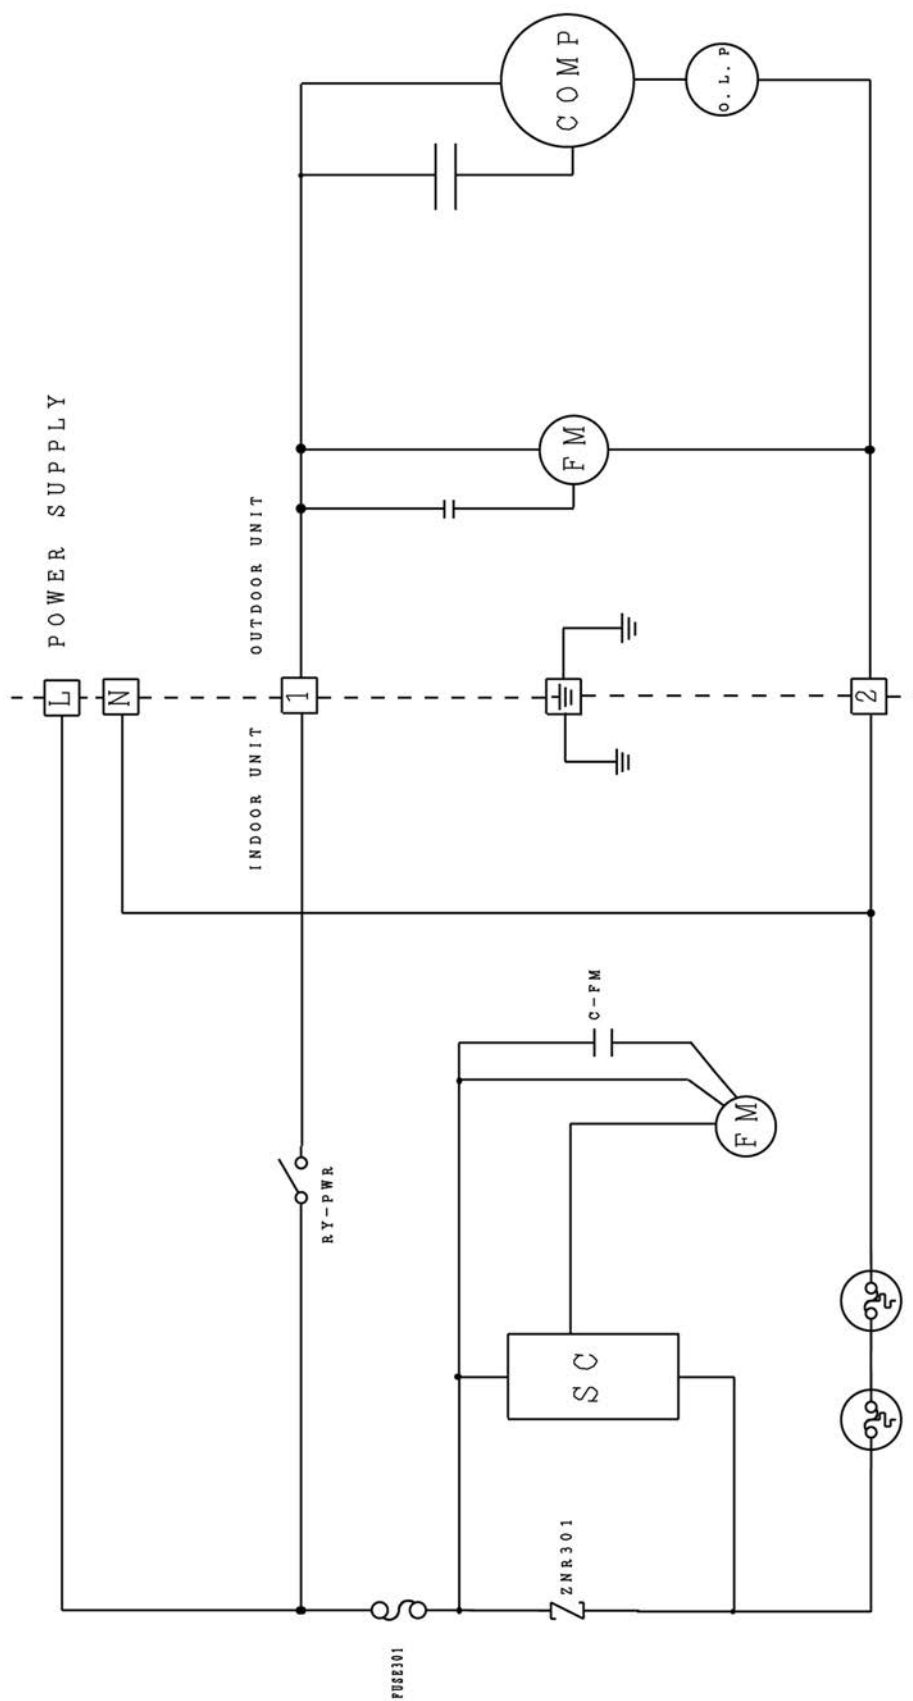

8 Wiring Connection Diagram

8.1. CS-PC12KKF-2 CU-PC12KKF-2

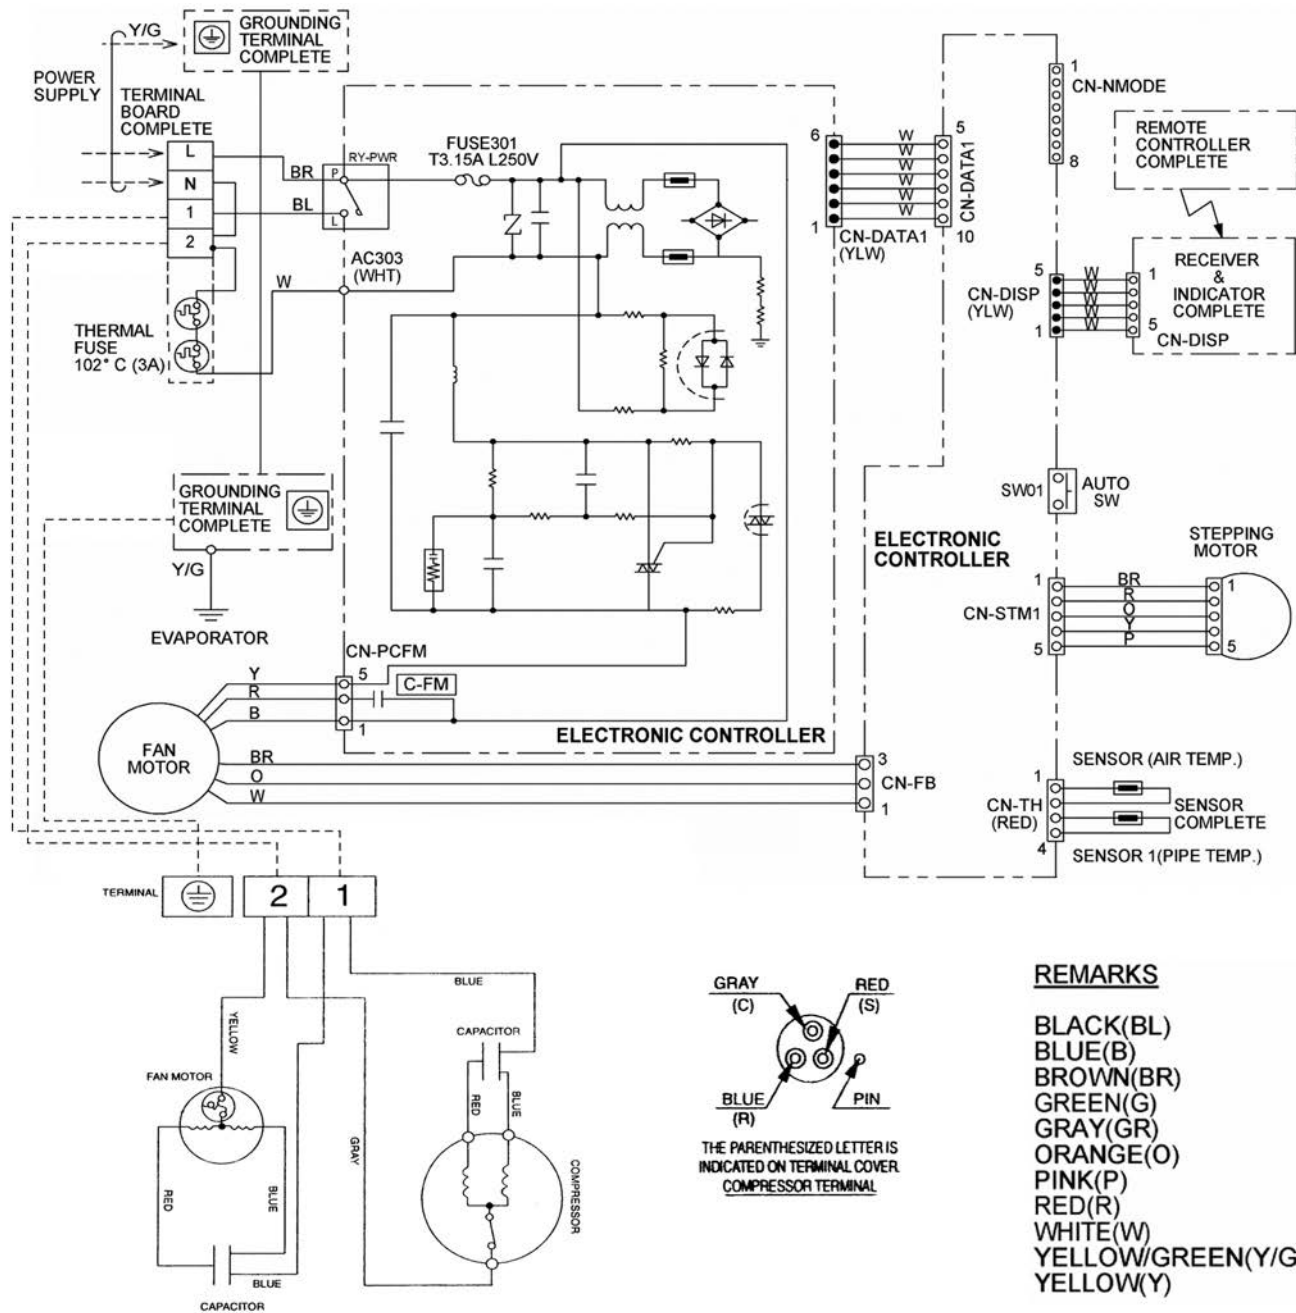

Resistance of Outdoor Fan Motor Windings

MODEL	CU-PC12KKF-2
CONNECTION	CWA951676
BLUE-YELLOW	198 Ω
YELLOW-RED	293 Ω


Note: Resistance at 25°C of ambient temperature.

Resistance of Compressor Windings

MODEL	CU-PC12KKF-2
CONNECTION	2KS210D5AA06
C - R	2.279 Ω
C - S	3.526 Ω

Note: Resistance at 20°C of ambient temperature.

8.2. CS-PC18KKF-2 CU-PC18KKF-2

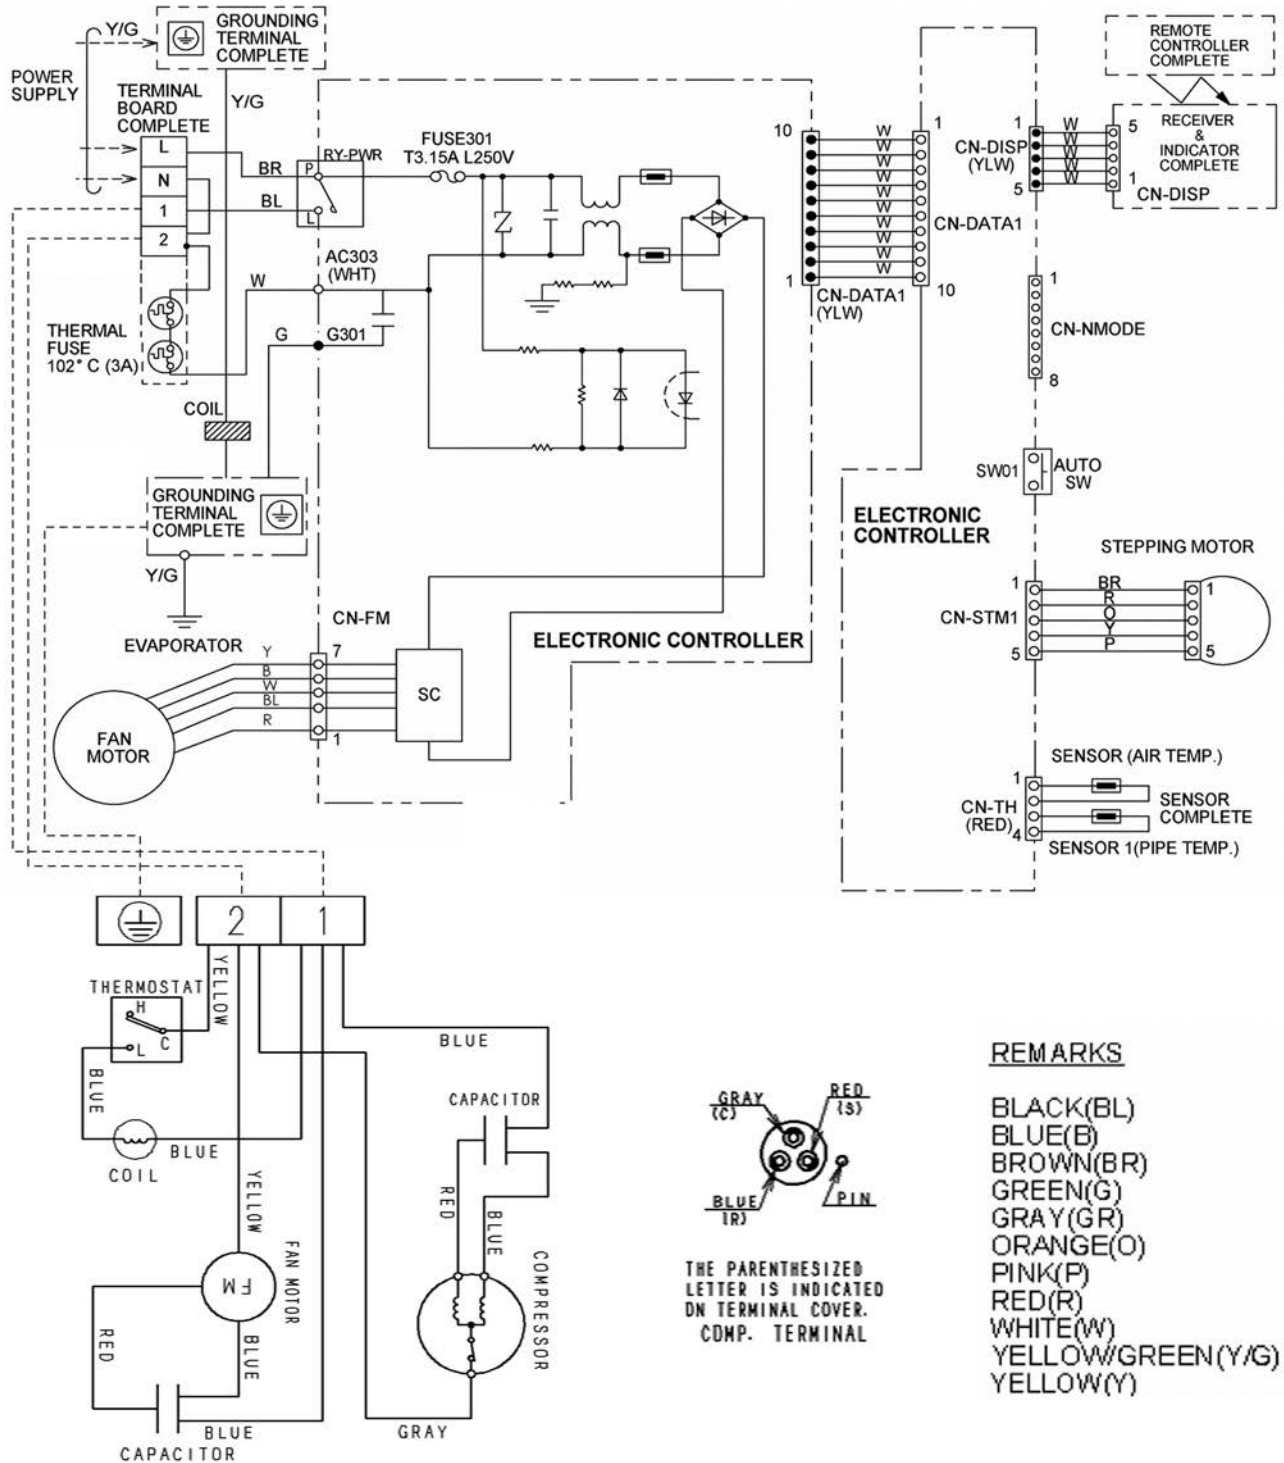

Resistance of Outdoor Fan Motor Windings

MODEL	CU-PC18KKF-2
CONNECTION	CWA951676
BLUE-YELLOW	198 Ω
YELLOW-RED	293 Ω


Note: Resistance at 25°C of ambient temperature.

Resistance of Compressor Windings

MODEL	CU-PC18KKF-2
CONNECTION	2KS324D5AA06
C - R	1.419 Ω
C - S	3.781 Ω

Note: Resistance at 20°C of ambient temperature.

8.3. CS-PC24KKF-2 CU-PC24KKF-2

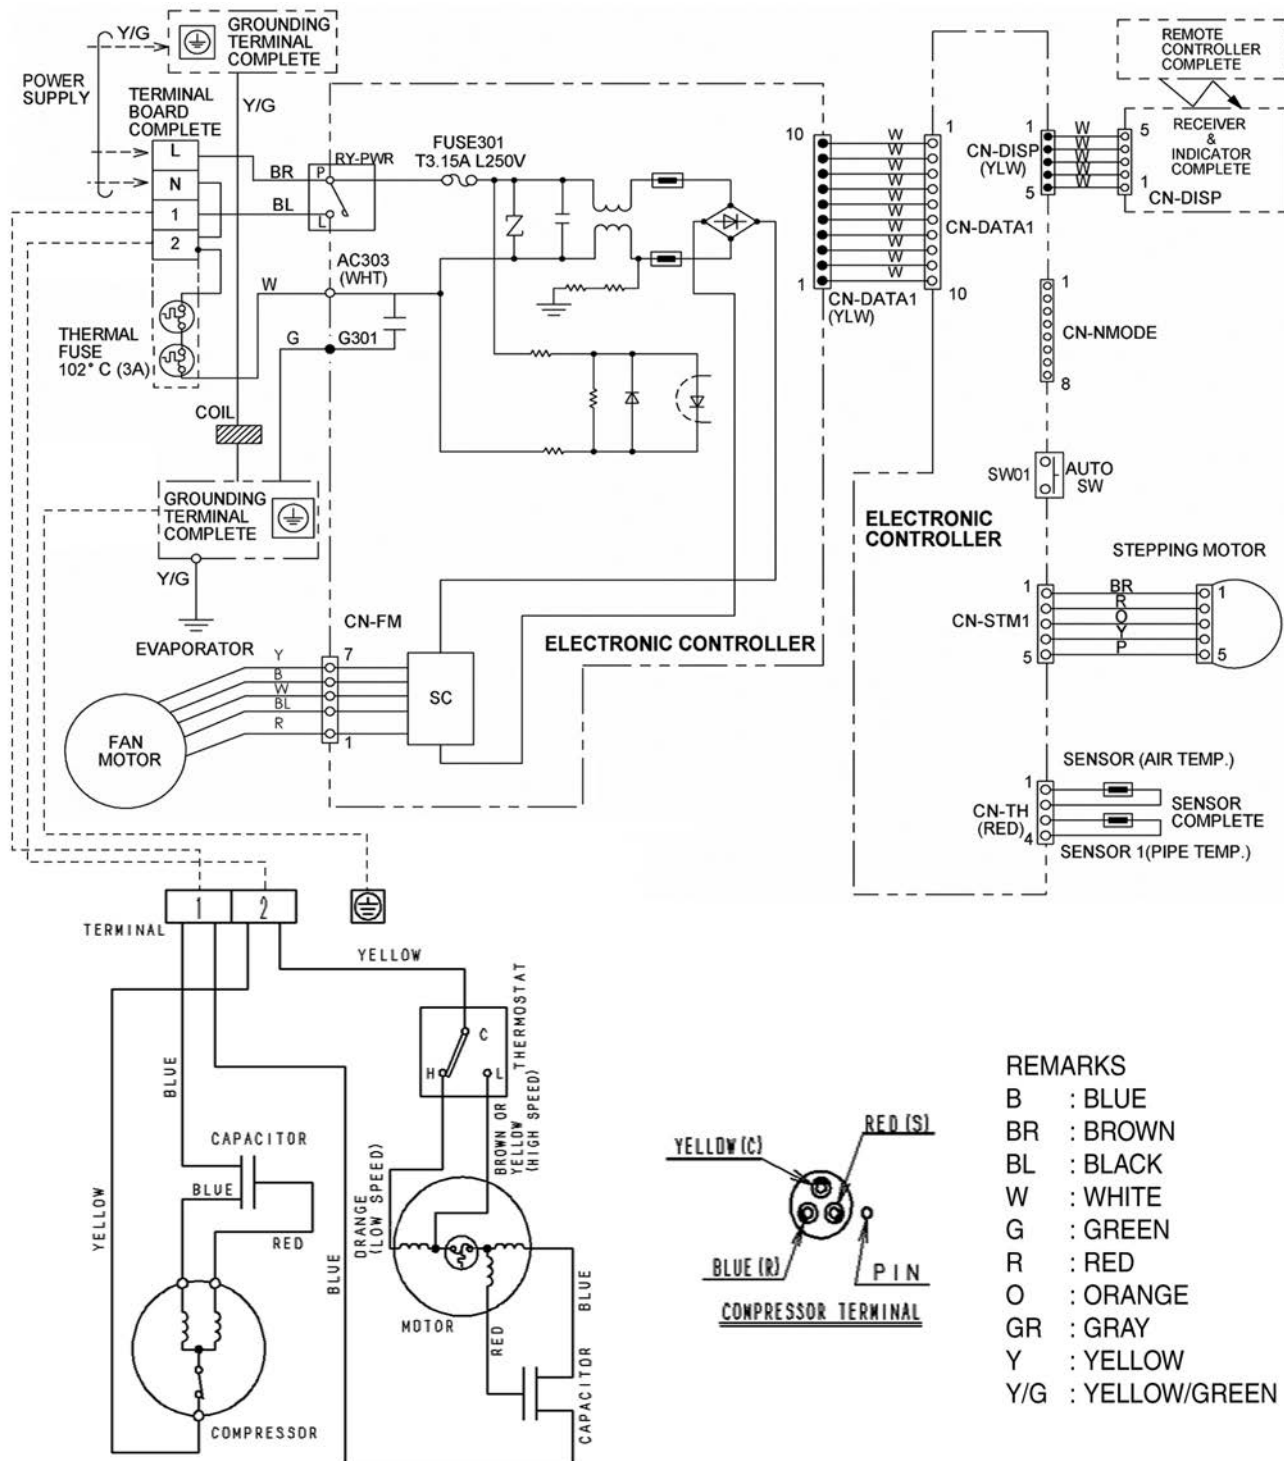

Resistance of Outdoor Fan Motor Windings

MODEL	CU-PC24KKF-2
CONNECTION	CWA951689
BLUE-YELLOW	64 Ω
YELLOW-ORANGE	90 Ω
YELLOW-RED	55 Ω

Note: Resistance at 25°C of ambient temperature.


Resistance of Compressor Windings

MODEL	CU-PC24KKF-2
CONNECTION	2JS438D3CB04
C - R	1.121 Ω
C - S	2.535 Ω


Note: Resistance at 20°C of ambient temperature.

9 Electronic Circuit Diagram

9.1. CS-PC12KKF-2

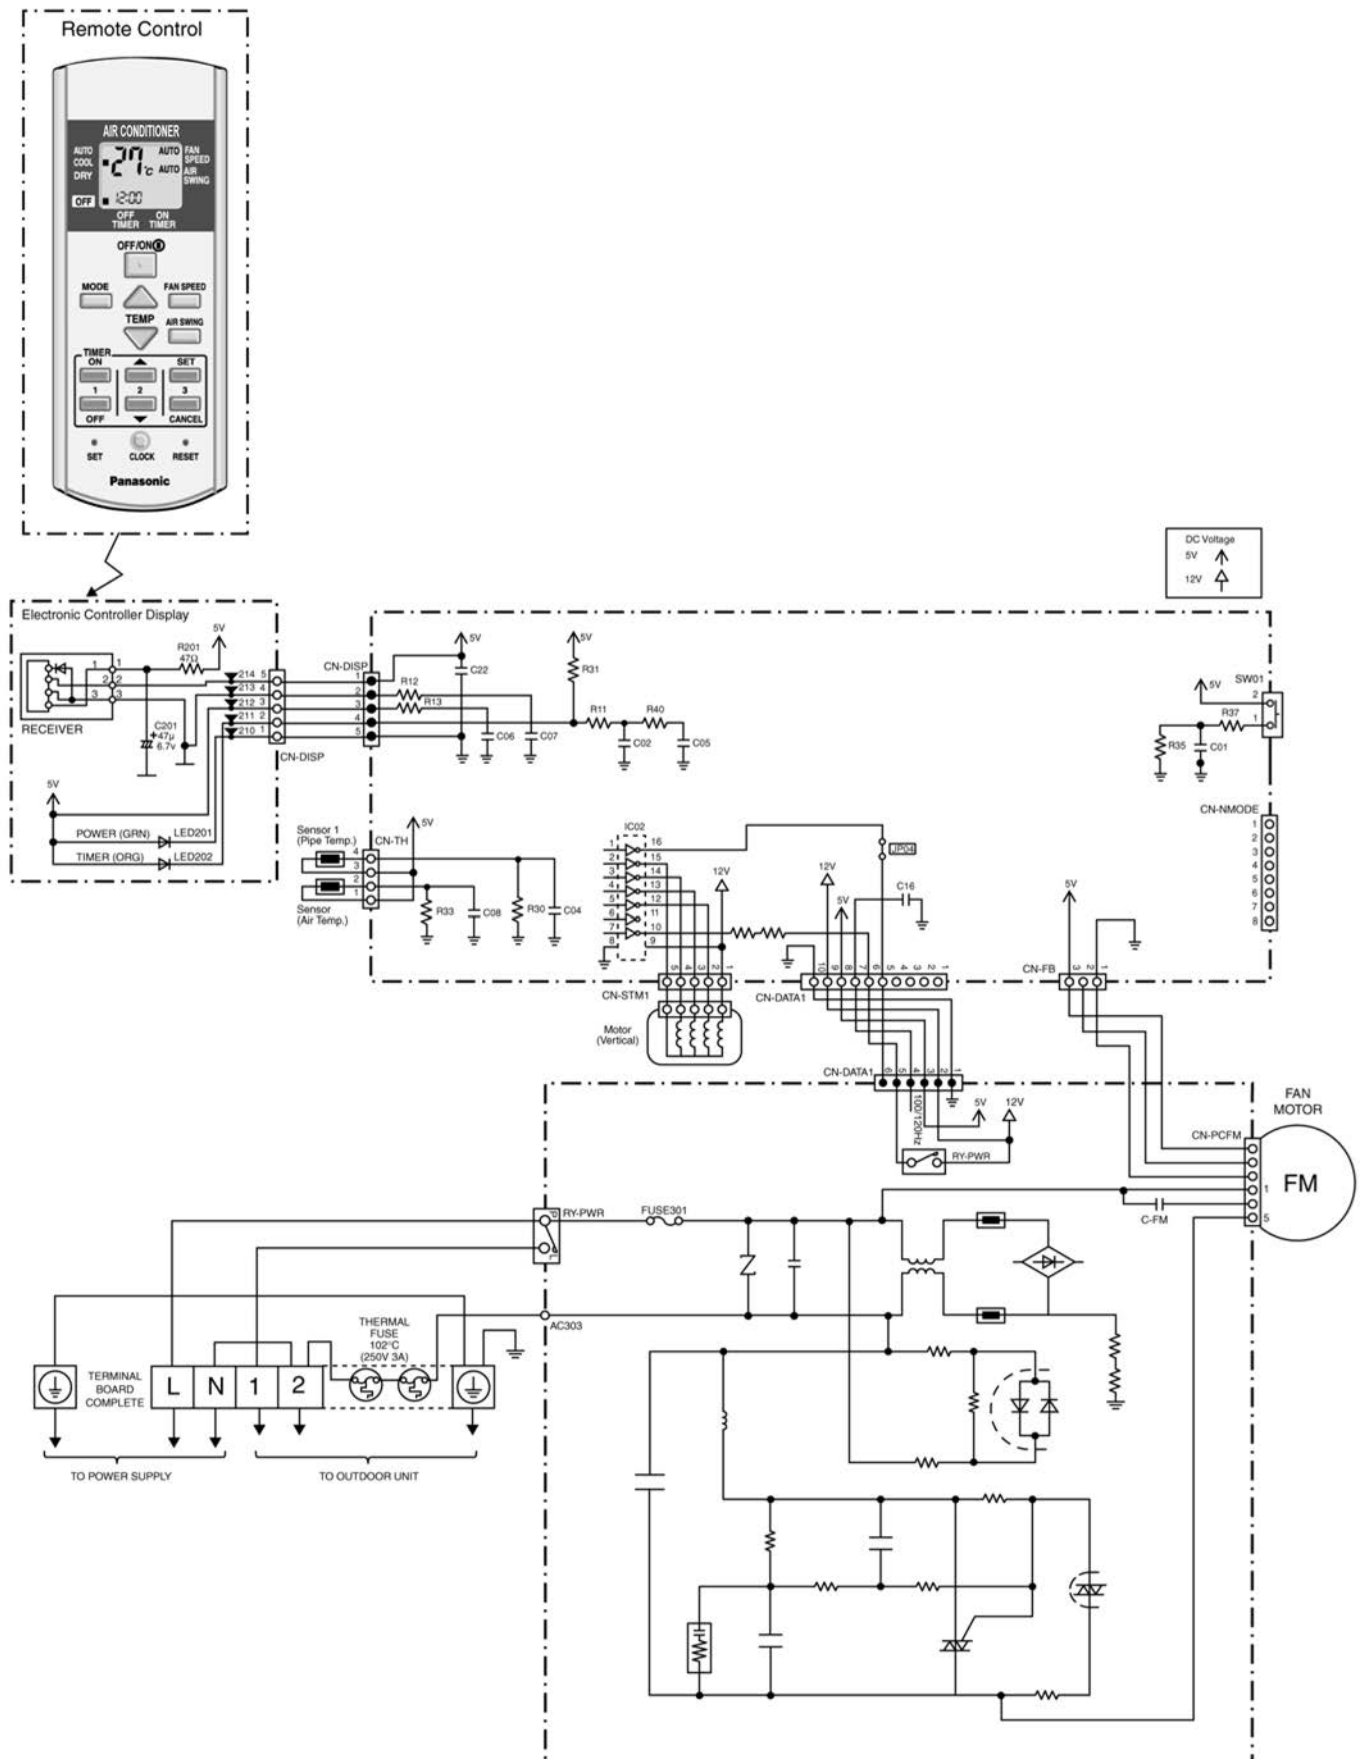

9.2. CS-PC18KKF-2 CS-PC24KKF-2

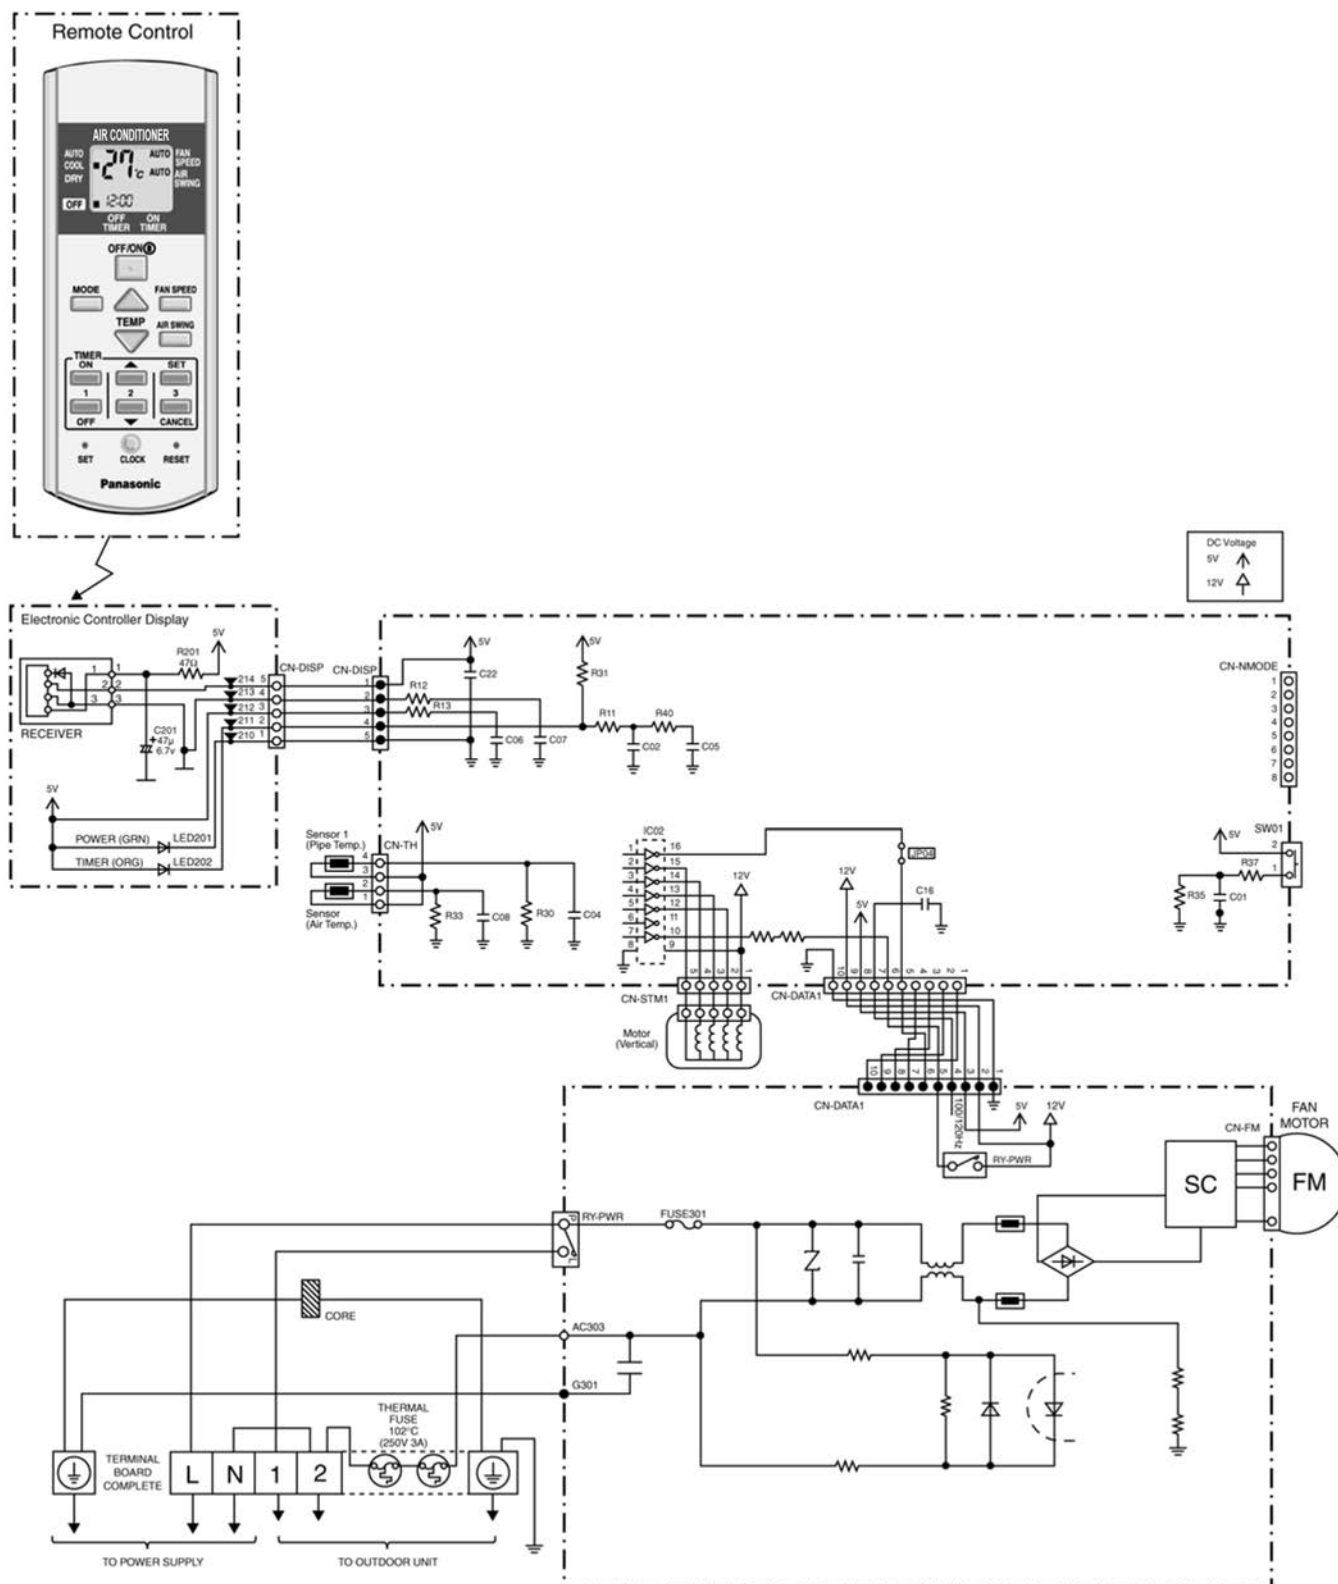


10.1.1. Main Printed Circuit Board



10.1.2.1. CS-PC12KKF-2



10.2. Indicator Printed Circuit Board

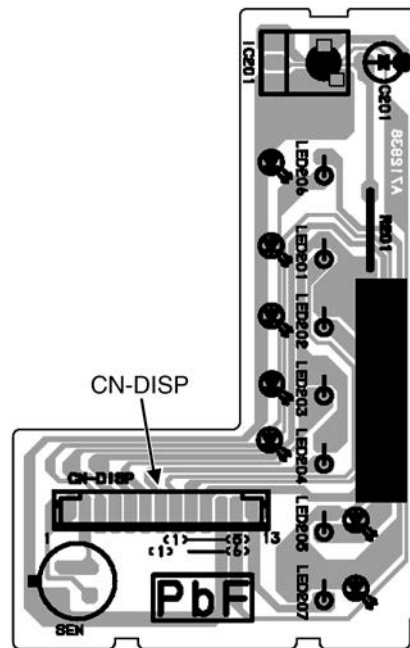

11 Installation Instruction

11.1. Select The Best Location

11.1.1. Indoor Unit

- Do not install the unit in excessive oil fume area such as kitchen, workshop and etc.
- There should not be any heat source or steam near the unit.
- There should not be any obstacles blocking the air circulation.
- A place where air circulation in the room is good.
- A place where drainage can be easily done.
- A place where noise prevention is taken into consideration.
- Do not install the unit near the door way.
- Ensure the spaces indicated by arrows from the wall, ceiling, fence or other obstacles.
- Recommended installation height for indoor unit shall be at least 2.5 m.

11.1.2. Outdoor Unit


- If an awning is built over the unit to prevent direct sunlight or rain, be careful that heat radiation from the condenser is not obstructed.
- There should not be any animal or plant which could be affected by hot air discharged.
- Keep the spaces indicated by arrows from wall, ceiling, fence or other obstacles.
- Do not place any obstacles which may cause a short circuit of the discharged air.
- If piping length is over the [piping length for additional gas], additional refrigerant should be added as shown in the table.

Model	Horse Power (HP)	Piping size		Std. Length (m)	Max. Ele- vation (m)	Min. Piping Length (m)	Max. Piping Length (m)	Additional Refrigerant (g/m)	Piping Length for add. gas (m)
		Gas	Li- quid						
C12***	1.5HP	1/2"	1/4"	7.5	5	3	15	10	7.5
SC/ PC12***					5	3	15	10	7.5
C18***	2.0HP	5/8"		5	20	3	25	20	7.5
SC/ PC18***					20	3	25	20	7.5
C24***	2.5HP				20	3	25	30	7.5
SC/ PC24***					20	3	25	30	7.5

Example: For C12***

If the unit is installed at 10 m distance, the quantity of additional refrigerant should be 25 g $(10 - 7.5) \text{ m} \times 10 \text{ g/m} = 25 \text{ g}$


11.1.3. Indoor/Outdoor Unit Installation Diagram

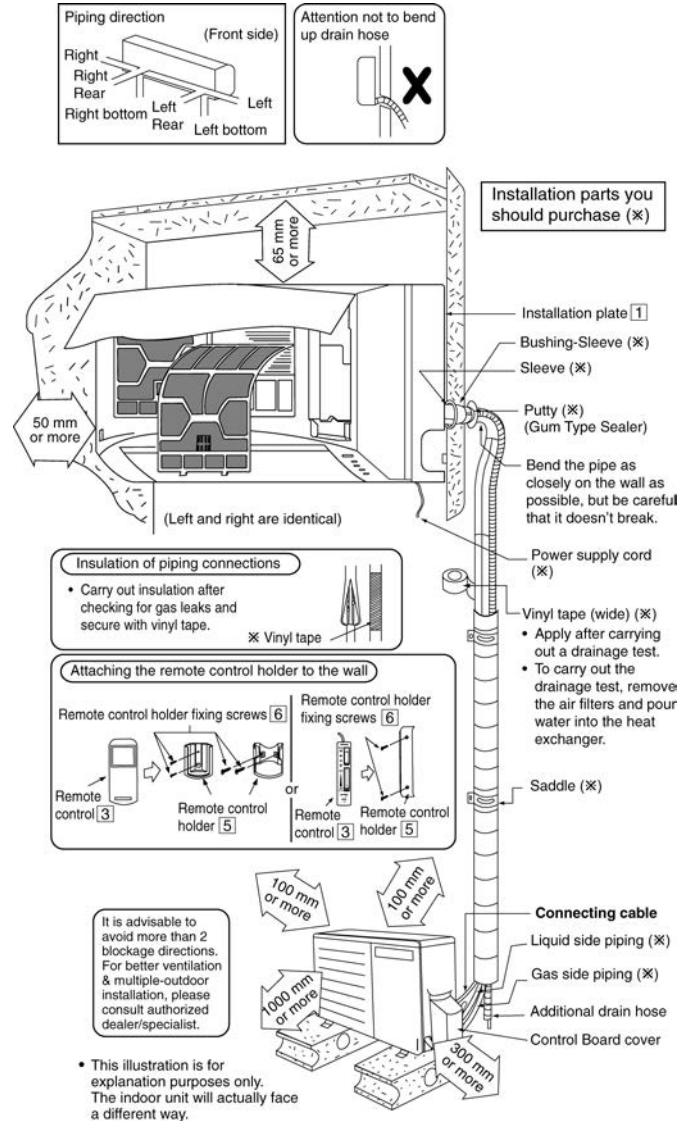

11.2. Indoor Unit

11.2.1. How To Fix Installation Plate

The mounting wall shall be strong and solid enough to prevent it from the vibration.

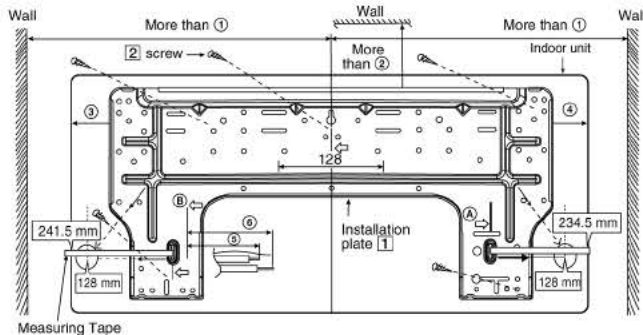

Model	Dimension					
	①	②	③	④	⑤	⑥
C12***, SC/PC12***	485 mm	82 mm	165 mm	158 mm	43 mm	95 mm
C18***, SC/PC18***, C24***, SC/PC24***	585 mm	82 mm	165 mm	158 mm	109 mm	159 mm

The centre of installation plate should be at more than ① at right and left of the wall.

The distance from installation plate edge to ceiling should more than ②.

From installation plate left edge to unit's left side is ③.

From installation plate right edge to unit's right is ④.

⑤ : For left side piping, piping connection for liquid should be about ⑤ from this line.

⑥ : For left side piping, piping connection for gas should be about ⑥ from this line.

1. Mount the installation plate on the wall with 5 screws or more (at least 5 screws).

(If mounting the unit on the concrete wall, consider using anchor bolts.)

• Always mount the installation plate horizontally by aligning the marking-off line with the thread and using a level gauge.

2. Drill the piping plate hole with $\phi 70$ mm hole-core drill.

• Putting measuring tape at position as shown in the diagram above.

The hole center is obtained by measuring the distance namely 128 mm for left and right hole respectively. Another method is intersection point of arrow mark extension.

The meeting point of the extension arrow mark is the hole center position.

• Drill the piping hole at either the right or the left and the hole should be slightly slanting to the outdoor side. (refer to step 3)


11.2.2. To Drill A Hole In The Wall And Install A Sleeve Of Piping

1. Insert the piping sleeve to the hole.
2. Fix the bushing to the sleeve.
3. Cut the sleeve until it extrudes about 15 mm from the wall.


Caution

When the wall is hollow, please be sure to use the sleeve for tube assembly to prevent dangers caused by mice biting the connecting cable.

4. Finish by sealing the sleeve with putty or caulking compound at the final stage.

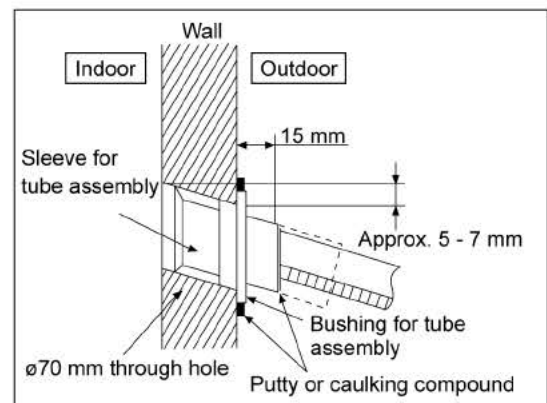

11.2.3. Indoor Unit Installation

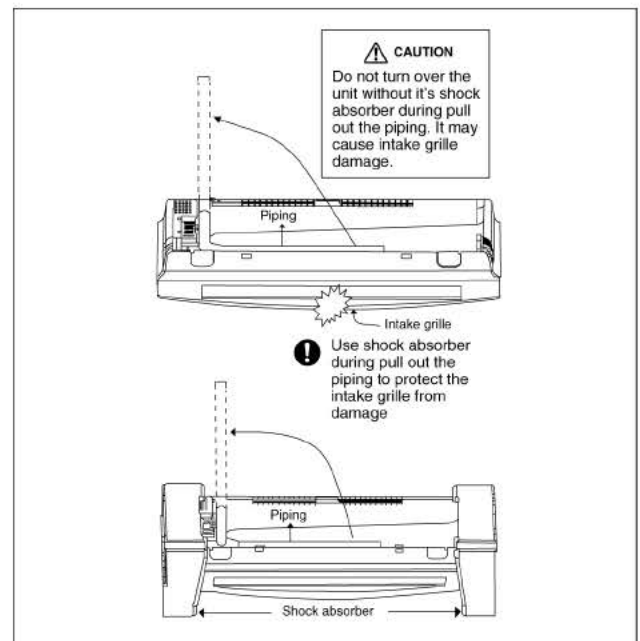

1. For the right rear piping

- Step-1** Pull out the Indoor piping
- Step-2** Install the Indoor Unit
- Step-3** Secure the Indoor Unit
- Step-4** Insert the power supply cord and connecting cable

- Insert the cables from bottom of the unit through the control board hole until terminal board area.

2. For the right and right bottom piping

- Step-1** Pull out the Indoor piping
- Step-2** Install the Indoor Unit
- Step-3** Insert the power supply cord and connecting cable
- Step-4** Secure the Indoor Unit

- Insert the cables from bottom of the unit through the control board hole until terminal board area.

3. For the embedded piping

- Step-1** Replace the drain hose
- Step-2** Bend the embedded piping
- Step-3** Pull the connecting cable into Indoor Unit
- Step-4** Cut and flare the embedded piping
- Step-5** Install the Indoor Unit
- Step-6** Connect the piping
- Step-7** Insulate and finish the piping
- Step-8** Secure the Indoor Unit

- Use a spring bender or equivalent to bend the piping so that the piping is not crushed.


- The power supply cord and indoor unit and outdoor unit connecting cable can be connected without removing the front grille.

- When determining the dimensions of the piping, slide the unit all the way to the left on the installation plate.
- Refer to the section "Cutting and flaring the piping".

- Please refer to "Connecting the piping" column in outdoor unit section. (Below steps are done after connecting the outdoor piping and gas-leakage confirmation.)

- Please refer to "Piping and finishing" column of outdoor section and "Insulation of piping connection" column as mentioned in indoor/outdoor unit installation.


Right Rear piping

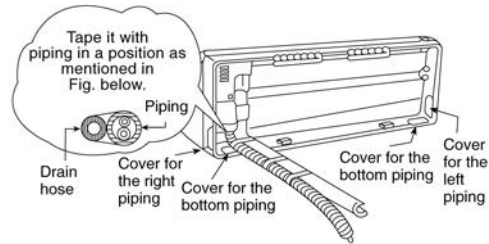


How to keep the cover

In case of the cover is cut, keep the cover at the rear of chassis as shown in the illustration for future reinstallation.

(Left, right and 2 bottom covers for piping.)




Right and Right Bottom piping

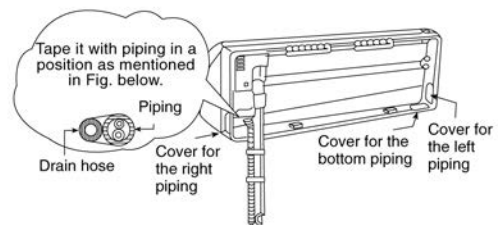


Install the indoor unit

Hook the indoor unit onto the upper portion of installation plate. (Engage the indoor unit with the upper edge of the installation plate). Ensure the hooks are properly seated on the installation plate by moving it in left and right.





Secure the Indoor Unit

Press the lower left and right side of the unit against the installation plate until hooks engages with their slot (sound click).




Insert the connecting cable

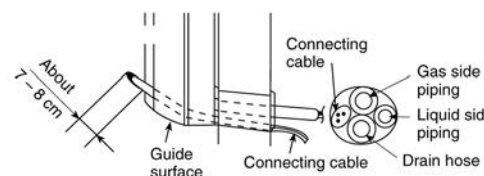

To take out the unit, push the **[PUSH]** marking at the bottom unit, and pull it slightly towards you to disengage the hooks from the unit.


(This can be used for left rear piping and bottom piping also.)

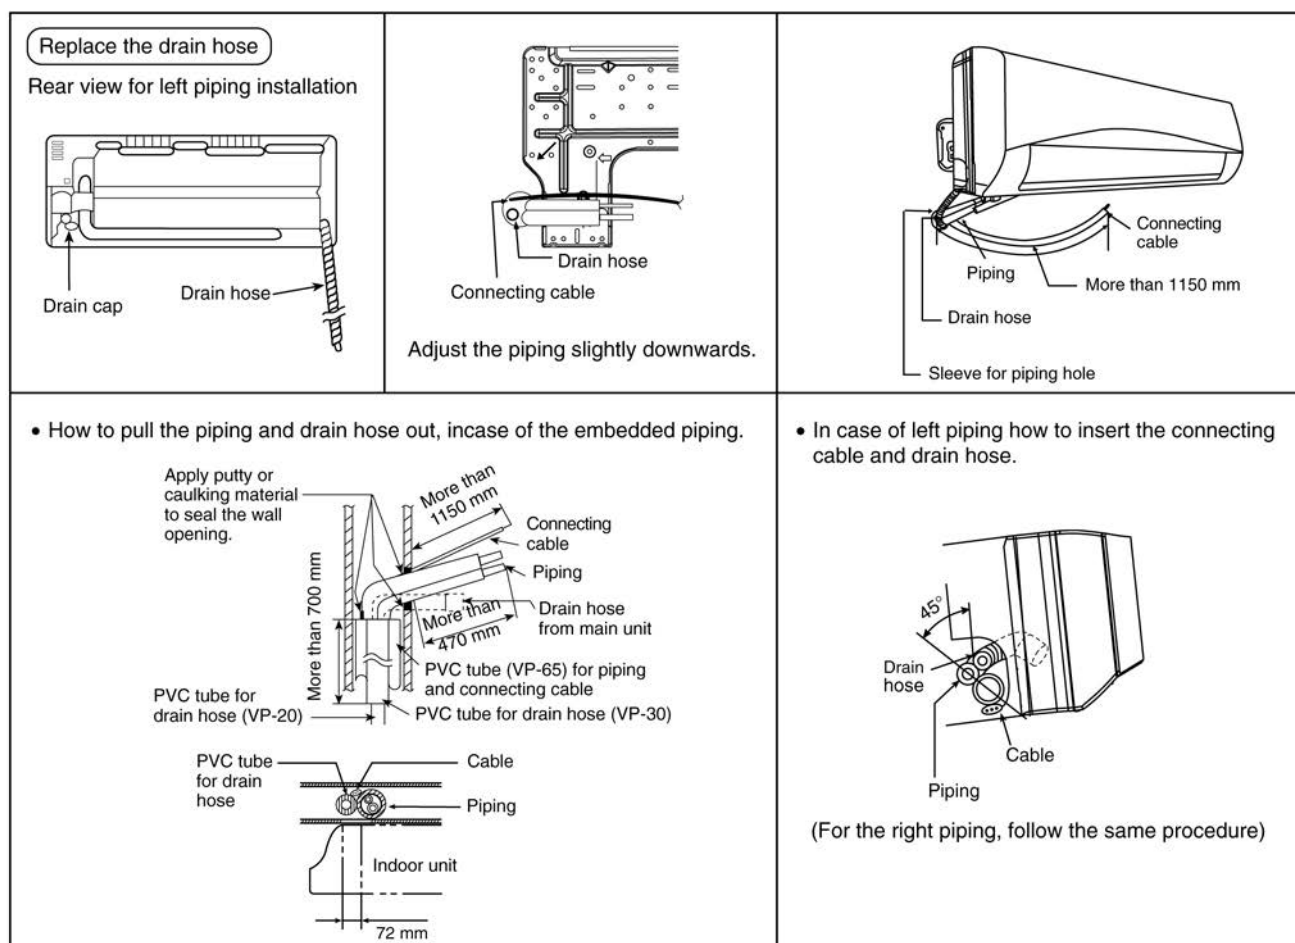

11.2.4. Connect The Cable To The Indoor Unit


The power supply cable and indoor unit and outdoor unit connecting cable can be connected without removing the front grille.

- ① Install the indoor unit on the installing holder that mounted on the wall,
- ② Open the front panel and grille door by loosening the screw.
- ③ Cable connection to the power supply through Isolating Devices (Disconnecting means).
 - Connect the approved polychloroprene sheathed **power supply cord** 3 x 1.5 mm² (1.0~1.5HP) or 3 x 2.5 mm² (2.0~2.5HP), type designation 245 IEC 57 or heavier cord to the terminal board, and connect the others end of the cable to Isolating Devices (Disconnecting means).
 - Do not use joint power supply cord. Replace the wire if the existing wire (from concealed wiring, or otherwise) is too short.
 - In unavoidable case, joining of power supply cord between isolating devices and terminal board of air conditioner shall be done by using approved socket and plug rated 15/16A (1.0~1.5HP) or 16A (2.0HP) or 20A (2.5HP). Wiring work to both socket and plug must follow to national wiring standard.
- ④ Bind all the power supply cord lead wire with tape and route the power supply cord via the left escapement.
- ⑤ **Connection cable** between indoor unit and outdoor unit shall be approved polychloroprene sheathed 3 x 1.5 mm² (1.0 ~ 1.5HP) or 3 x 2.5 mm² (2.0 ~ 2.5HP) flexible cord, type designation 245 IEC 57 or heavier cord. Do not use joint connection cable. Replace the wire if the existing wire (from concealed wiring, or otherwise) is too short.
- ⑥ Bind all the indoor and outdoor connecting cable with tape and route the connecting cable via the right escapement.
- ⑦ Remove the tapes and connect the power supply cord and connecting cable between indoor unit and outdoor unit according to the diagram below.

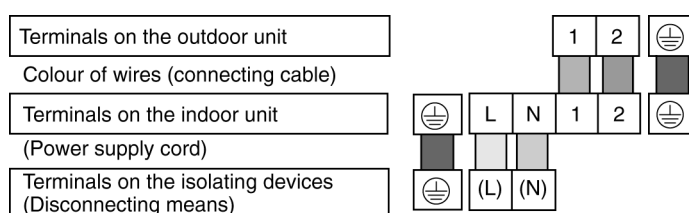

- ⑧ Secure the power supply cord and connecting cable onto the control board with the holder.

⑨ Close grille door by tighten with screw and close the front panel.

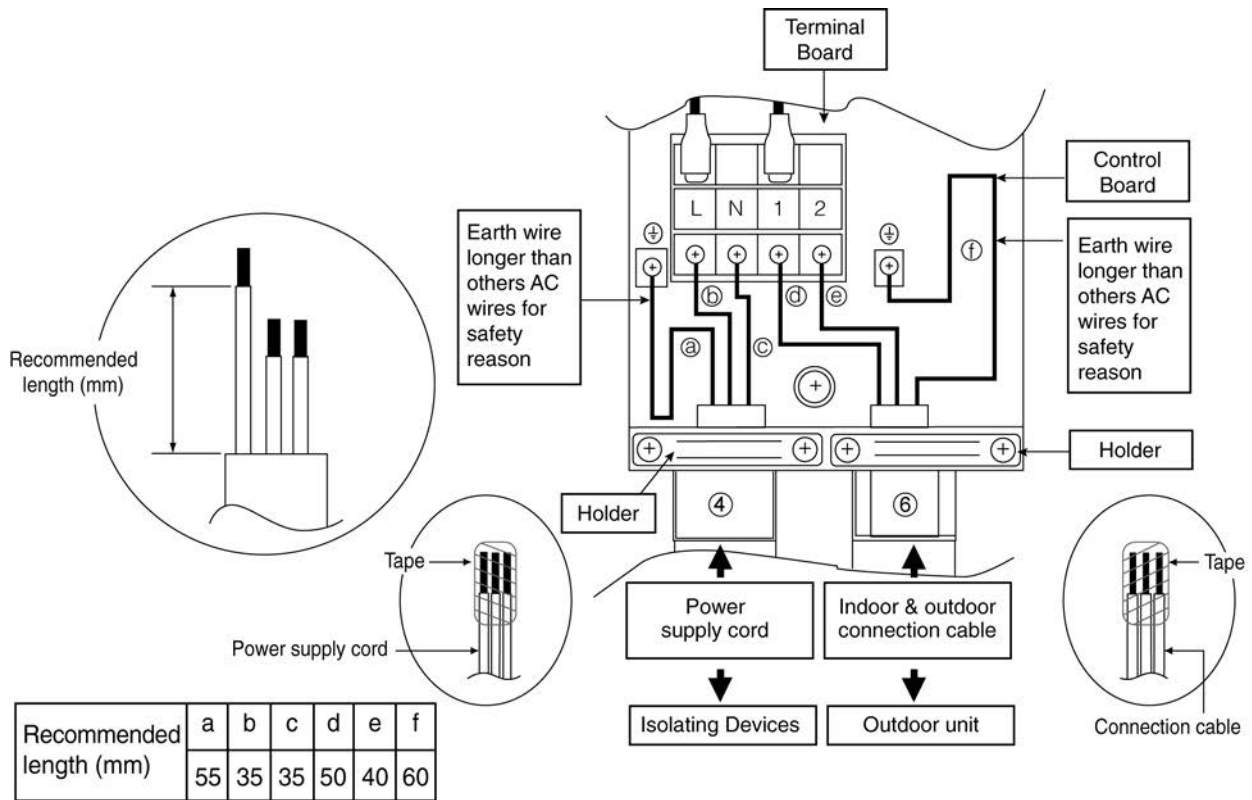


⚠ This equipment must be properly earthed.

Note:

- Isolating Devices (Disconnecting means) should have minimum 3.0 mm contact gap.
- Ensure the colour of wires of outdoor unit and the terminal Nos. are the same to the indoor's respectively.
- Earth wire shall be Yellow/Green (Y/G) in colour and longer than other AC wires as shown in the figure for the electrical safety in case of the slipping out of the cord from the anchorage.


11.2.5. Wire Stripping And Connecting Requirement

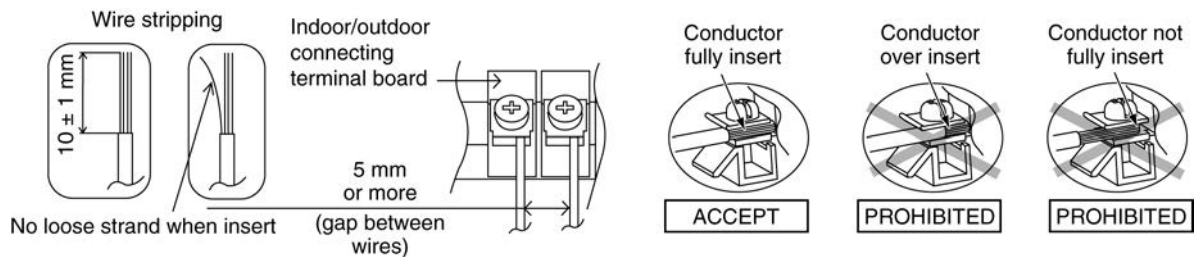

11.3. Outdoor Unit

11.3.1. Install The Outdoor Unit

- After selecting the best location, start installation according to Indoor/Outdoor Unit Installation Diagram.
- 1. Fix the unit on concrete or rigid frame firmly and horizontally by bolt nut (ø10 mm).
- 2. When installing at roof, please consider strong wind and earthquake. Please fasten the installation stand firmly with bolt or nails.

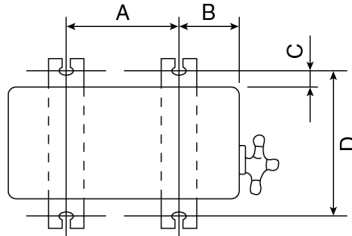

Model	A	B	C	D
C12***, PC12***, C18***, PC18***	570 mm	105 mm	18.5 mm	320 mm
C24***, PC24***	612.5 mm	131 mm	19 mm	383 mm

11.3.2. Connecting The Piping

Connecting The Piping To Indoor Unit

Please make flare after inserting flare nut (locate at joint portion of tube assembly) onto the copper pipe. (In case of using long piping)

Connect the piping

- Align the center of piping and sufficiently tighten the flare nut with fingers.
- Further tighten the flare nut with torque wrench in specified torque as stated in the table.

Piping size	Torque
1/4" [6.35 mm]	[18 N•m (1.8 kgf.m)]
3/8" (9.52 mm)	[42 N•m (4.3 kgf.m)]
1/2" (12.7 mm)	[55 N•m (5.6 kgf.m)]
5/8" (15.88 mm)	[65 N•m (6.6 kgf.m)]
3/4" (19.05 mm)	[100 N•m (10.2 kgf.m)]



CAUTION


Do not over tighten, over tightening cause gas leakage.

Connecting The Piping To Outdoor Unit

Decide piping length and then cut by using pipe cutter. Remove burrs from cut edge.


Make flare after inserting the flare nut (locate at valve) onto the copper pipe.

Align center of piping to valves and then tighten with torque wrench to the specified torque as stated in the table.

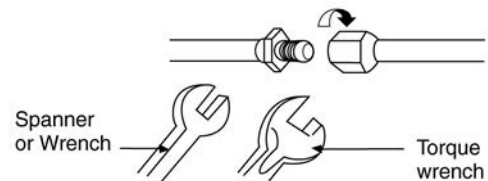

11.3.3. Evacuation Of The Equipment

WHEN INSTALLING AN AIR CONDITIONER, BE SURE TO EVACUATE THE AIR INSIDE THE INDOOR UNIT AND PIPES in the following procedure.

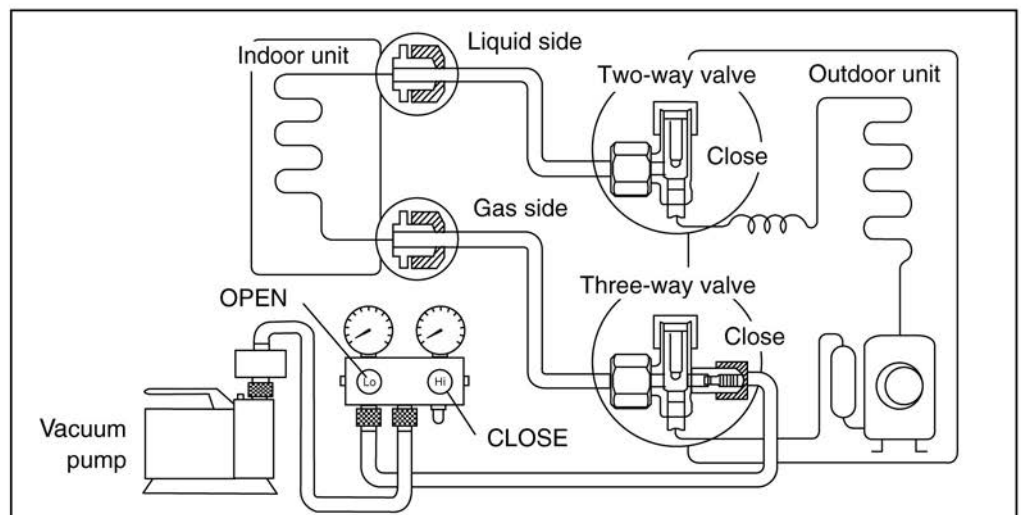

1. Connect a charging hose with a push pin to the Low side of a charging set and the service port of the 3-way valve.
 - Be sure to connect the end of the charging hose with the push pin to the service port.
2. Connect the center hose of the charging set to a vacuum pump.
3. Turn on the power switch of the vacuum pump and make sure that the needle in the gauge moves from 0 cmHg (0 MPa) to -76 cmHg (-0.1 MPa). Then evacuate the air approximately ten minutes.
4. Close the Low side valve of the charging set and turn off the vacuum pump. Make sure that the needle in the gauge does not move after approximately five minutes.

Note : BE SURE TO TAKE THIS PROCEDURE IN ORDER TO AVOID REFRIGERANT GAS LEAKAGE.
5. Disconnect the charging hose from the vacuum pump and from the service port of the 3-way valve.
6. Tighten the service port caps of the 3-way valve at a torque of 18 N•m with a torque wrench.
7. Remove the valve caps of both of the 2-way valve and 3-way valve. Position both of the valves to "OPEN" using a hexagonal wrench (4 mm).
8. Mount valve caps onto the 2-way valve and the 3-way valve.
 - Be sure to check for gas leakage.





CAUTION

- If gauge needle does not move from 0 cmHg (0 MPa) to -76 cmHg (-0.1 MPa), in step ③ above take the following measure:
 - If the leak stops when the piping connections are tightened further, continue working from step ③.
 - If the leak does not stop when the connections are retightened, repair location of leak.
 - Do not release refrigerant during piping work for installation and reinstallation.
 - Take care of the liquid refrigerant, it may cause frostbite.

11.3.4. Air Purging Of The Piping And Indoor

The remaining air in the Refrigeration cycle which contains moisture may cause malfunction on the compressor.

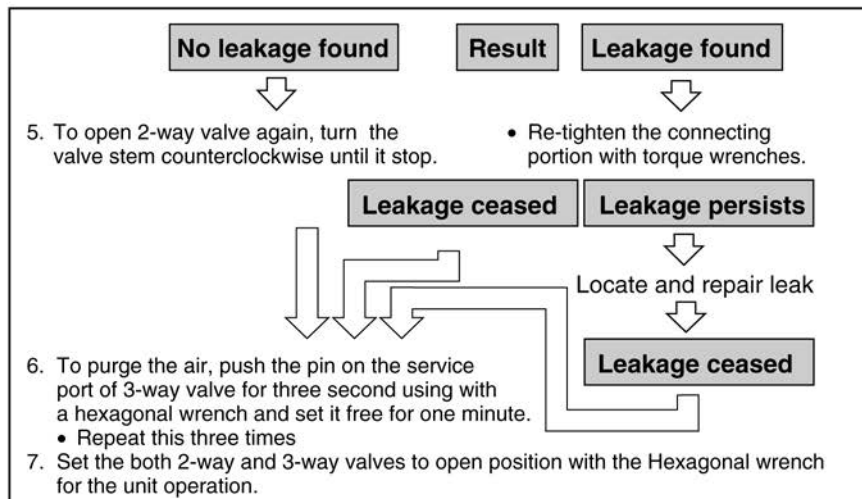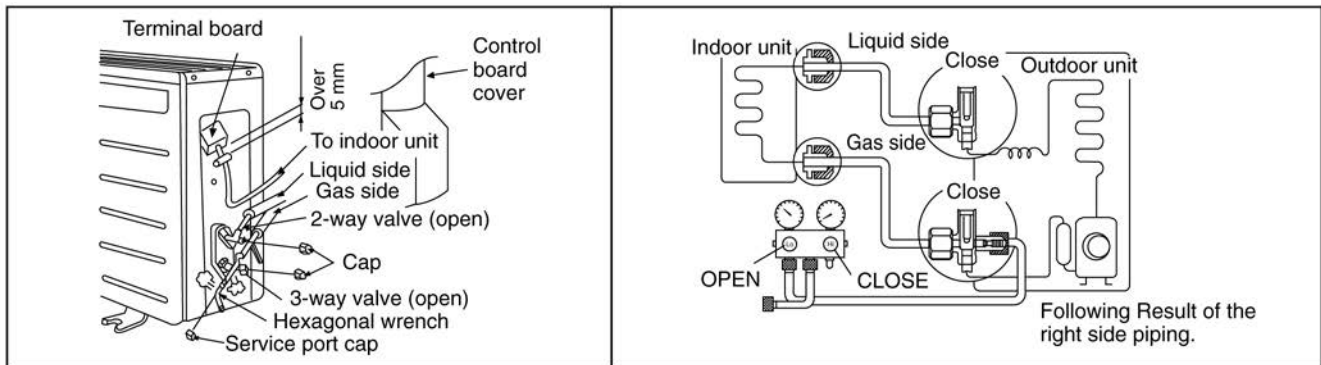

1. Remove the caps from the 2-way and 3-way valves.
2. Remove the service-port cap from the 3-way valves.
3. To open the valve, turn the valve stem of 2-way valve counter-clockwise approx. 90° and hold it there for ten seconds, then close it.
4. Check gas-leakage of the connecting portion of the pipings.
 - For the left pipings, refer to item 4(A).



- 4(A). Checking gas leakage for left piping
- 1) a. Connect the manifold gauge to the service port of 3-way valve.
b. Measure the pressure.
 - 2) a. Keep it for 5-10 minutes.
b. Ensure that the pressure indicated on the gauge is the same as that of measured during the first time.

11.3.5. Connect The Cable To The Outdoor Unit

1. Remove the control board cover from the unit by loosening the screw.
2. **Connecting cable** between indoor unit and outdoor unit shall be approved polychloroprene sheathed $3 \times 1.5 \text{ mm}^2$ (3/4 ~ 1.5HP), $3 \times 2.5 \text{ mm}^2$ (2.0 ~ 2.5HP) flexible cord, type designation 245 IEC 57 or heavier cord.


Terminals on the indoor unit	1	2	
Color of wires			
Terminals on the outdoor unit	1	2	

3. Secure the cable onto the control board with the holder (clammer).
4. Attach the control board cover back to the original position with the screw.
5. For wire stripping and connection requirement, refer to instruction ⑤ of indoor unit.



This equipment must be properly earthed.

- Earth wire shall be Yellow/Green (Y/G) in colour and longer than other AC wires for safety reason.

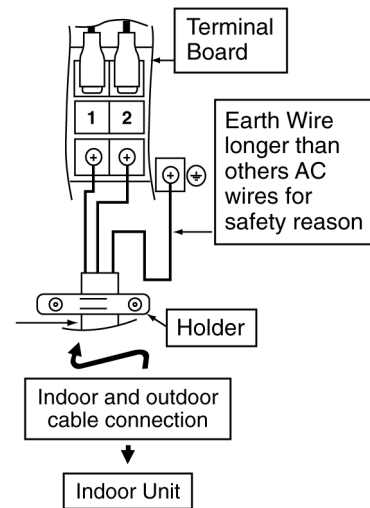


11.3.6. Pipe Insulation

1. Please carry out insulation at pipe connection portion as mentioned in Indoor/Outdoor Unit Installation Diagram. Please wrap the insulated piping end to prevent water from going inside the piping.
2. If drain hose or connecting piping is in the room (where dew may form), please increase the insulation by using POLY-E FOAM with thickness 6mm or above.

11.3.7. Cutting And Flaring The Piping

1. Please cut using pipe cutter and then remove the burrs.
2. Remove the burrs by using reamer. If burrs is not removed, gas leakage may be caused.
Turn the piping end down to avoid the metal powder entering the pipe.
3. Please make flare after inserting the flare nut onto the copper pipes.

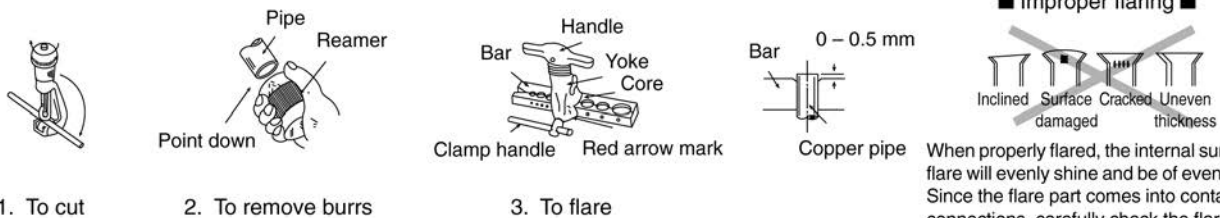


When properly flared, the internal surface of the flare will evenly shine and be of even thickness. Since the flare part comes into contact with the connections, carefully check the flare finish.


12 Operation and Control

12.1. Cooling Operation

- Cooling operation can be set using remote control.
- This operation is applied to cool down the room temperature reaches the setting temperature set on the remote control.
- The remote control setting temperature, which takes the reading of intake air temperature sensor, can be adjusted from 16°C to 30°C.
- During cooling operation, the compressor will stop running and restart as shown in figure below.

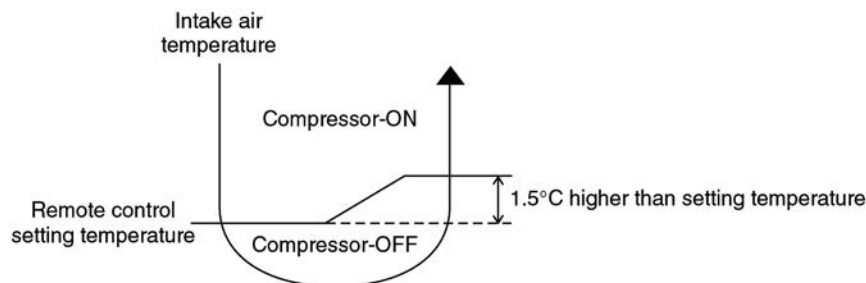

12.1.1. Cooling Operation Time Diagram (For PC12KKF-2)

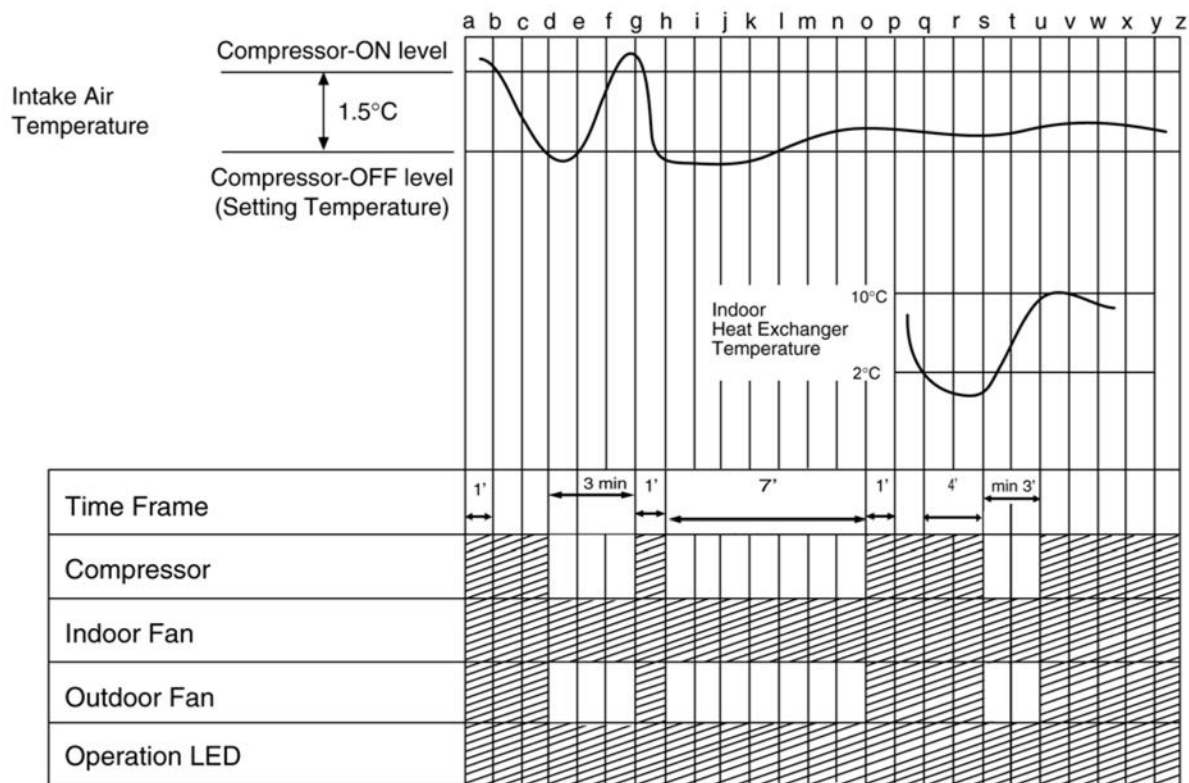

<Description of operation>

a – b, g – h : Minimum 60 seconds forced operation

d – g, s – u : Minimum 3 minutes restart control (Time Delay Safety Control)


h – o : Maximum 7 minutes time save control

q – u : Freeze Prevention Control

 Operation

 Stop

12.1.2. Cooling Operation Time Diagram (For PC18KKF-2, PC24KKF-2)

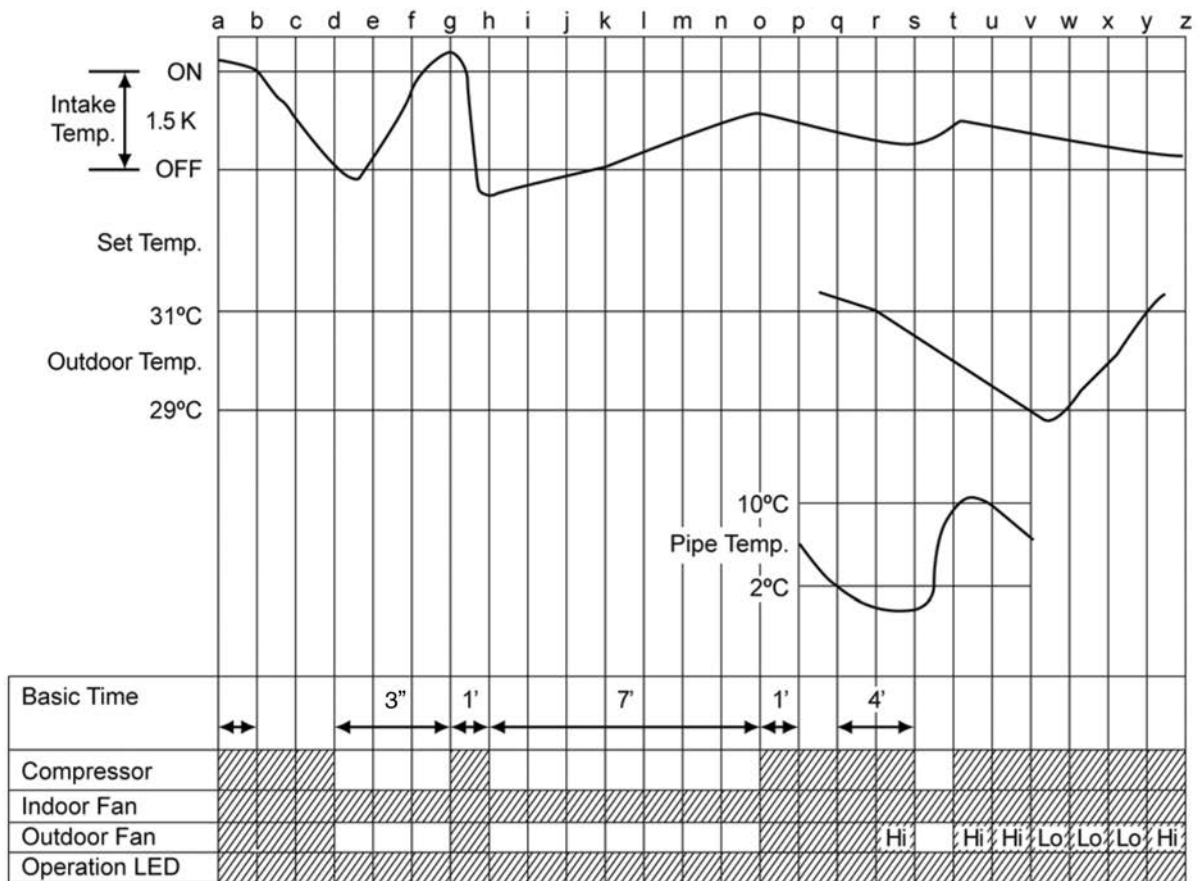


<Description of operation>

- d - g : restart control (waiting for 3 min.)
- a - b, g - h, o - p : 60 sec. Forcible operation.
- h - o : 7 min. time save control.
- q - t : freeze prevention control.
- v - y : outdoor fan control.




12.2. Soft Dry Operation

- Soft Dry operation can be set using remote control.
- Soft Dry operation is applied to dehumidify and to perform a gentle cooling to the room.
- This operation starts when the intake air temperature sensor reaches -1.5°C from the setting temperature on the remote control.
- When operation begins, Soft Dry will be switched "ON" for a maximum 10 minutes, then Soft Dry operation will be turned "OFF" for a minimum 6 minutes. After that, the Soft Dry operation will be "ON" and "OFF" based on the setting temperature as shown in figure below.
- However after 3 minutes of compressor off, during Soft Dry "OFF" (within 6 minutes Soft Dry restart control), the indoor unit will start to operate at normal Cooling mode if the intake temperature is higher than Cooling "ON" point.

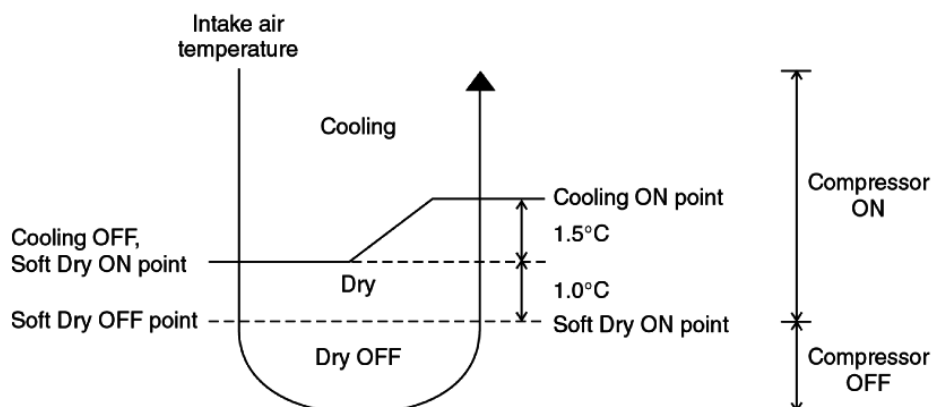


12.2.1. Soft Dry Operation Time Diagram (For PC12KKF-2)

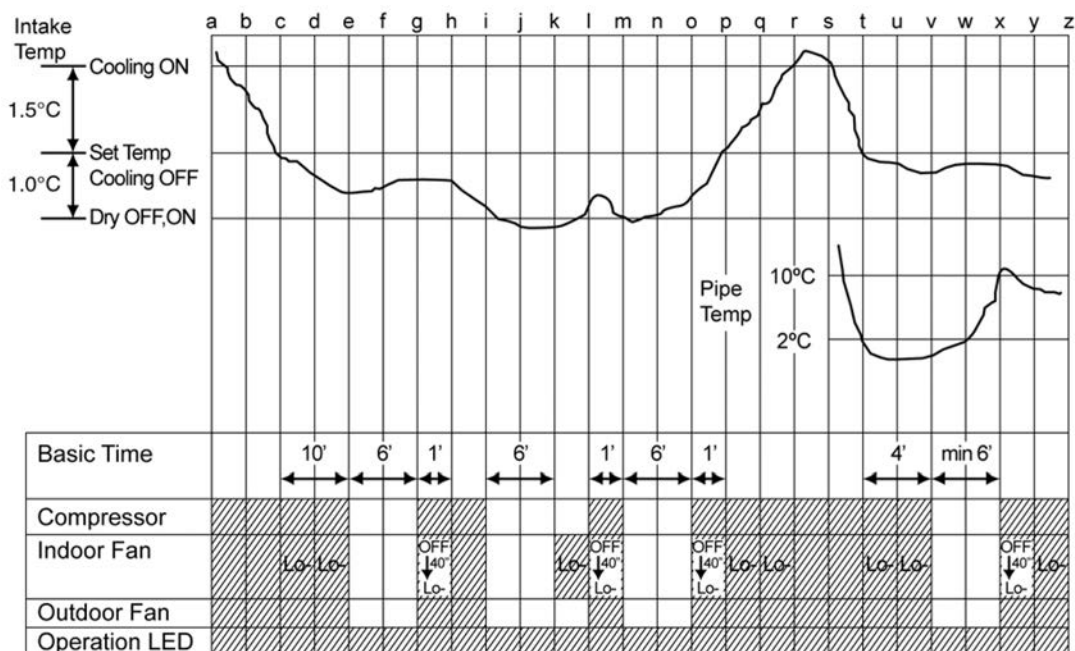


<Description of operation>

- a - c : Minimum 3 minutes restart control (Time Delay Safety Control) - Cooling operation.
- c - e : 10 minutes dry operation.
- e - g, i - k, m - o, v - x : Minimum 6 minutes restart control (Time Delay Safety Control) - Soft Dry operation.
- g - h, l - m, o - p : Minimum 60 seconds force operation.
- t - x : Freeze Prevention Control.



12.2.2. Soft Dry Operation Time Diagram (For PC18KKF-2, PC24KKF-2)

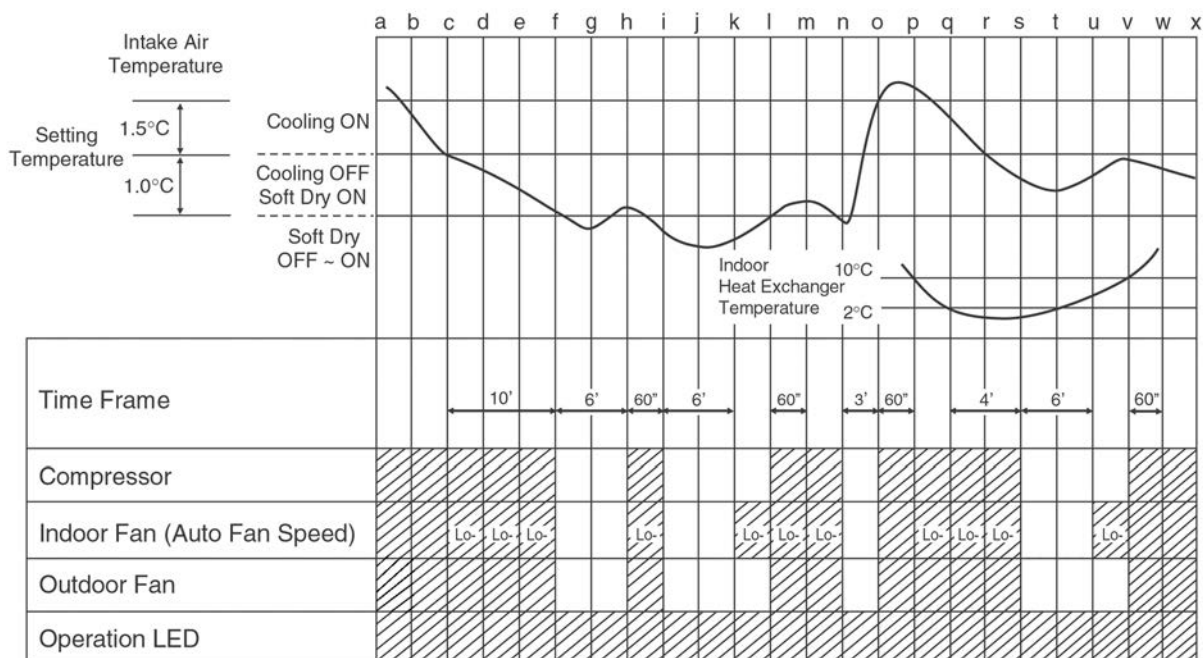

<Description of operation>

- h - i, l - m, o - p, v - w : Minimum 60 seconds forced operation
- n - o : Minimum 3 minutes restart control (Time Delay Safety Control) - Cooling operation
- f - h, i - k, s - u : Minimum 6 minutes restart control (Time Delay Safety Control) - Soft dry operation
- q - v : Freeze Prevention Control



12.3. Automatic Operation

- Automatic operation can be set using remote control.
- This operation starts to operate with indoor fan at SLo speed for 20 seconds to judge the intake air temperature.
- After judged the temperature, the operation mode is determined by referring to the below standard.

Intake Air Temperature	↑	Cooling Operation
	↓	Soft Dry Operation

- Then, the unit start to operate at determined operation mode, until it is switched off using remote control, with the setting temperature as shown in table below.

	Setting Temperature (Standard)
Cooling Operation	25°C
Soft Dry Operation	22°C

- The setting temperature for all the operations can be changed one level up or one level down from the standard temperature as shown in below table by pressing on the temperature up or temperature down button at remote control.

			Cooling	Soft Dry
Higher	→	+2°C	27°C	24°C
Standard	→	±0°C	25°C	22°C
Lower	→	-2°C	23°C	20°C

- The operation mode judging temperature and standard setting temperature can be increased by 2°C permanently, by open the circuit of JX03 at indoor units printed circuit board.

Intake Air Temperature	↑	Cooling Operation
	↓	Soft Dry Operation

	Setting Temperature (Standard)
Cooling Operation	27°C
Soft Dry Operation	24°C

12.4. Indoor Fan Speed Control

- Indoor Fan Speed can be set using remote control.

12.4.1. Fan Speed Rotation Chart

Speed	Fan Speed (rpm)		
	CS-PC12KKF-2	CS-PC18KKF-2	CS-PC24KKF-2
Hi	1110	1240	1390
Me	940	1150	1240
H Lo	840	1130	1210
C Lo	800	1060	1150
Lo-	760	850	970
S Lo	740	670	750

12.4.2. Automatic Fan Speed Control

- When set to Auto Fan Speed, the fan speed is adjusted between maximum and minimum setting as shown in the table.
 - Fan speed rotates in the range of Hi and Me.
 - Deodorizing Control will be activated.


(For PC12KKF-2)

Speed Mode				SHi	Hi	Me	HLo	CLo	Lo-	SLo	Stop
Cooling	Normal	Manual	Hi		○						
			Me		○						
			Lo				○				
		Auto				○	○		○		○
Soft Dry	Normal	Manual							○		○
		Auto							○		○
Mode Judgement										○	

(For PC18KKF-2, PC24KKF-2)

Speed Mode				SHi	Hi	Me	HLo	CLo	Lo-	SLo	Stop
Cooling	Normal	Manual	Hi		○						
			Me		○						
			Lo		○		○				
		Auto			○	○			○		○
Soft Dry									○		
									○		
Mode Judgement										○	

- Auto Fan Speed during cooling operation:
 - Indoor fan will rotate alternately between off and on as shown in below diagram.
 - At the beginning of each compressor start operation, indoor fan will increase fan speed gradually for deodorizing purpose.
 - For the first time the compressor operate, indoor fan will be switched to Hi fan speed from Lo- after 70 seconds from the start of compressor. This cause the room temperature to achieve the setting temperature quickly.
 - During compressor stop, indoor fan will operate at Lo for the beginning 3 minutes to prevent higher volume of refrigerant in liquid form returning to the compressor.
 - After the compressor at turn off condition for 3 minutes, indoor fan will start to operate at Lo- to circulate the air in the room. This is to obtain the actual reading of the intake air temperature.
 - For the resume of compressor operation, indoor fan will operate at Me fan speed to provide comfort and lesser noise environment, after 70 seconds from the restart of compressor.

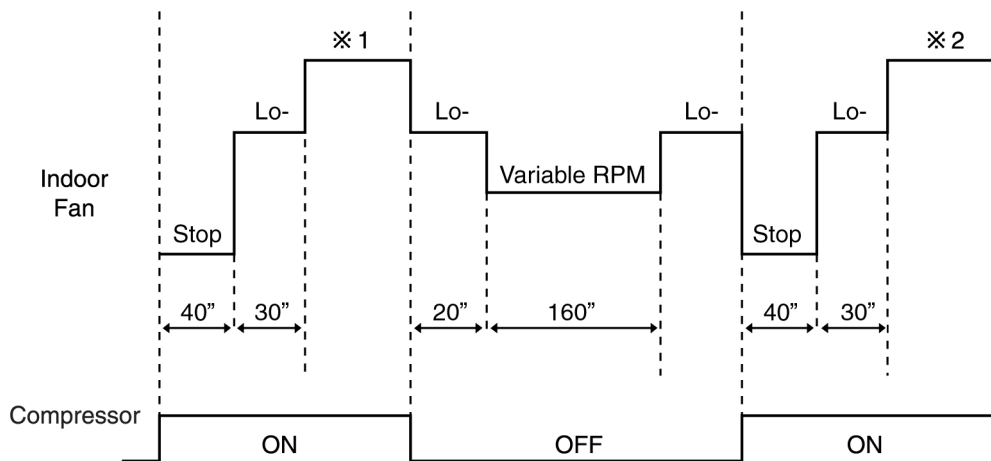


※ 1 Fan Speed is Hi until the compressor stops (when the room temperature reaches setting temperature).

※ 2 Fan Speed is Me after the compressor restarts.

• Auto Fan Speed during Soft Dry operation:

1. Indoor fan will rotate alternately between off and Lo-.
2. At the beginning of each compressor start operation, indoor fan will increase fan speed gradually for deodorizing purpose.
3. When compressor at turn off condition for 6 minutes, indoor fan will start fan speed at Lo- to circulate the air in the room. This is to obtain the actual reading of intake air temperature.

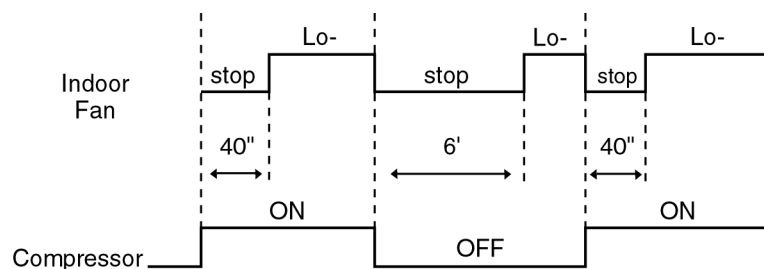

12.4.3. Manual Fan Speed Control

- Manual fan speed adjustment can be carried out by using the Fan Speed selection button at the remote control.
- There are 3 types of fan speed settings: Lo, Me, Hi.

12.4.4. Indoor Fan Motor RPM Abnormal Control

- Immediate after the fan motor is started, rpm abnormal control is performed once every second.
- During fan motor on, if fan motor feedback ≥ 2550 or < 50 rpm continuously for 10 seconds, the fan motor error counter increased; fan motor is then stopped and restarted. If the fan motor error counter increased to 7, the air conditioner will stop.


12.5. Outdoor Fan Speed Control

- There is only one speed for outdoor fan motor.
- When the air conditioner is turned on, the compressor and the outdoor fan will operate simultaneously.
- Likewise, both compressor and outdoor fan will stop at the same time if the unit is turned off.


12.6. Vertical Airflow Direction Control

12.6.1. Auto Control

- When the vertical airflow direction is set to Auto using the remote control, the louver swings up and down as shown in the diagram.
- When stop operation using the remote control, the discharge vent is reset, and stop at the closing position.
- During Cooling operation or Soft Dry operation, indoor fan motor may stop to rotate at certain periods. At that condition, the louver will stop swinging.

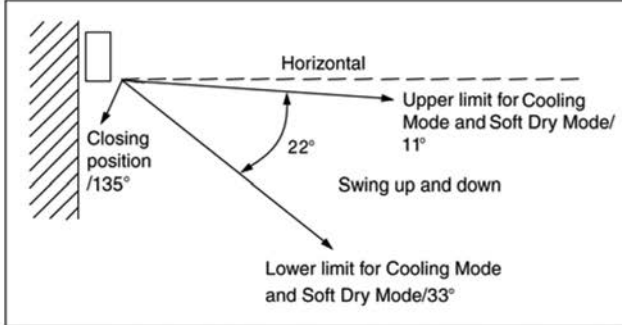


PC12KKF

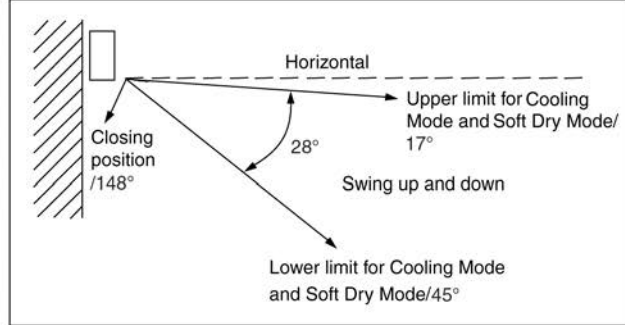


PC18KKF, PC24KKF

12.6.2. Manual Control

- When the vertical airflow direction is set to Manual using the remote control, the automatic airflow is released and the airflow direction louver move up and down in the range shown in the diagram.
- The louver can be adjusted by pressing the button to the desired louver position.
- When stop operation using the remote control, the discharge vent is reset, and stop at the closing position.

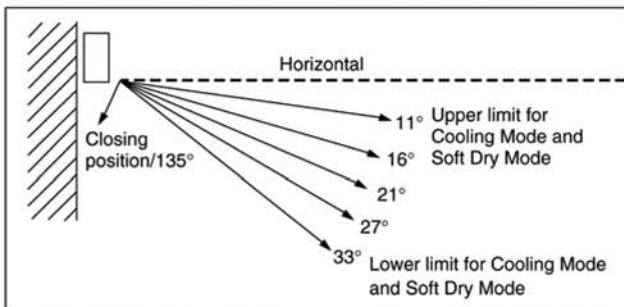

PC12KKF

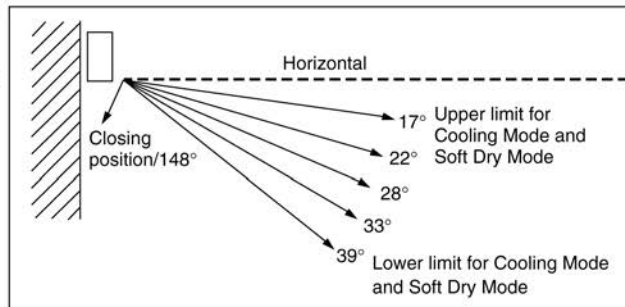

PC18KKF, PC24KKF

12.7. Horizontal Airflow Direction Control

- The horizontal airflow direction louvers can be adjusted manually by hand.

12.8. Timer Control

12.8.1. ON Timer

- When the ON Timer is set by using the remote control, the unit will start to operate slightly before the set time, so that the room will reach nearly to the set temperature by the set time.
- For Cooling and Soft Dry operation, the operation will start 15 minutes before the set time.
- For Automatic operation, the indoor fan will operate at SLo speed for 20 seconds, 15 minutes before the set time to detect the intake air temperature to determine the operation mode. The power LED will blink at this time.

12.8.2. OFF Timer

- When the OFF Timer is set by using the remote control, the unit will stop operate according to the desired setting.

Notes:

1. By pressing ON/OFF operation button, the ON Timer or OFF Timer setting will not be cancelled.
2. To cancel the previous timer setting, press CANCEL button.
3. To activate the previous timer setting, press SET button.
4. If main power supply is switched off, the Timer setting will be cancelled.

12.9. Random Auto Restart Control

- If there is a power failure during operation, the air conditioner will automatically restart after 3 to 4 minutes when the power is resumed.
- It will start with previous operation mode and airflow direction.
- If there are more than one air conditioner unit in operation and power failure occur, restart time for each unit to operate will be decided randomly using 4 parameters:- intake air temperature, setting temperature, fan speed and air swing louver position.
- This Random Auto Restart Control is not available when Timer is set.
- This control can be admitted by open the circuit of JX02 (refer to printed circuit board indoor unit). (For PC18KKF-2 and PC24KKF-2 only)

12.10. Remote Control Signal Receiving Sound

- Short beep sound will be heard when turn ON the air conditioner or enabling other operations.
- Long beep sound will be heard when turn OFF the air conditioner or disabling other operations.


13 Protection Control

13.1. Restart Control (Time Delay Safety Control)

- When the thermo-off temperature (temperature which compressor stops to operate) is reached during:-
 - Cooling operation - the compressor stops for 3 minutes (minimum) before resume operation.
 - Soft Dry operation - the compressor stops for 6 minutes (minimum) before resume operation.
- If the operation is stopped by the remote control, the compressor will not turn on within 3 minutes from the moment operation stop, although the unit is turn on again within the period.
- This phenomenon is to balance the pressure inside the refrigerant cycle.

13.2. 7 Minutes Time Save Control

- The compressor will start automatically if it has stopped for 7 minutes and the intake air temperature falls between the compressor ON temperature (A) and compressor OFF temperature (B) during the period.
- This phenomenon is to reduce the built up humidity inside a room.

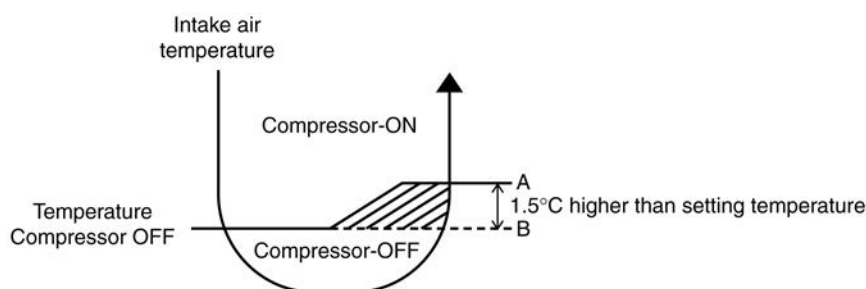

13.3. 60 Seconds Forced Operation


- Once the air conditioner is turned on, the compressor will not stop within 60 seconds in a normal operation although the intake air temperature has reached the thermo-off temperature. However, force stop by pressing the OFF/ON operation button at the remote control is permitted.
- The reason for the compressor to force operate at minimum 60 seconds is to allow the refrigerant oil run in a full cycle and return back to the outdoor unit.

13.4. Starting current Control

- When the compressor, outdoor fan motor and indoor fan motor are simultaneously started, the indoor fan motor will start to operate at 1.6 second later.
- The reason of the difference is to reduce the starting current flow.


13.5. Freeze Preventive Control

- If the temperature of the indoor heat exchanger falls below 2°C continuously for 4 minutes or more, the compressor turns off. The fan speed setting remains the same.
- This phenomenon is to protect the indoor heat exchanger from freezing and to prevent higher volume of refrigerant in liquid from returning to the compressor.
- Compressor will restart again when the indoor heat exchanger temperature rises to 10°C (Recovery).
- Restart control (Time Delay Safety Control) will be applied in this Control if the recovery time is too short.

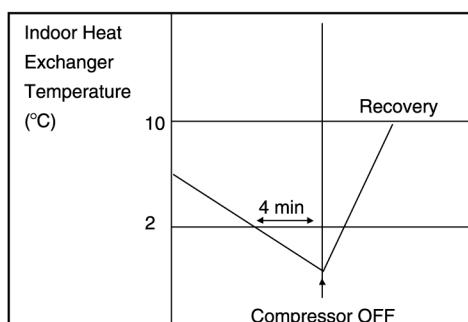

- (For PC12KKF only)

The current fan speed will change to freeze prevention speed after 70 seconds compressor on. The fan speed will be increased according to the indoor pipe temperature the figure below.

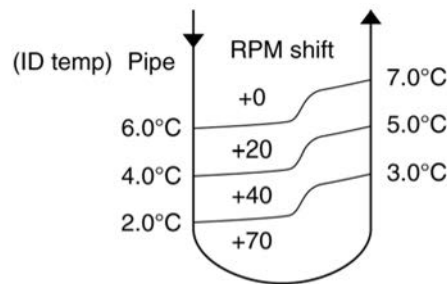

13.6. Compressor Reverse Rotation Protection Control

- If the compressor is operating continuously for 5 minutes or longer and the temperature difference between intake air and indoor heat exchanger is 2.5°C or less for continuous 2 minutes, compressor will stop and restart automatically.
- Time Delay Safety Control is activated before the compressor restart.



ΔT = Intake air temperature - Indoor heat exchanger temperature


- This is to prevent compressor from rotate reversely when there is an instantaneous power failure.
- If this condition happens continuously for 5 times within 50 minutes, unit will turns off with TIMER LED blinks.
- The 5 times counter can be reset when either one of the following condition happen:
 - Unit is OFF by remote control or AUTO OFF/ON button.
 - Indoor intake temperature - indoor piping temperature >5°C for 1 minute or more.
 - Operation mode change.
- The unit could be ON by pressing OFF/ON button at remote control but the TIMER LED will continue blinking.
- TIMER LED blinking will reset if:
 - Indoor intake temperature - indoor piping temperature >5°C for 1 minute or more.
 - Power supply reset.

13.7. Dew Prevention control

- To prevent dew formation at indoor unit discharge area.
- This control will be activated if:-
 - Cooling mode.
 - Remote Control setting temperature is less than 25°C.
 - Fan speed is at CLo.
 - Room temperature is constant ($\pm 1^\circ\text{C}$) for 60 minutes (PC12KKF-2) or 30 minutes (PC18/24KKF-2).
 - Compressor is continuously running.
- Fan speed will be adjusted accordingly in this control.
 - Fan speed will be increased slowly if the unit is in quiet mode but no change in normal cooling mode.
- Dew prevention stop condition
 - Remote control setting temperature is more than 25°C.
 - Fan speed is not set to CLo.

14 Servicing Mode

14.1. Auto OFF/ON Button

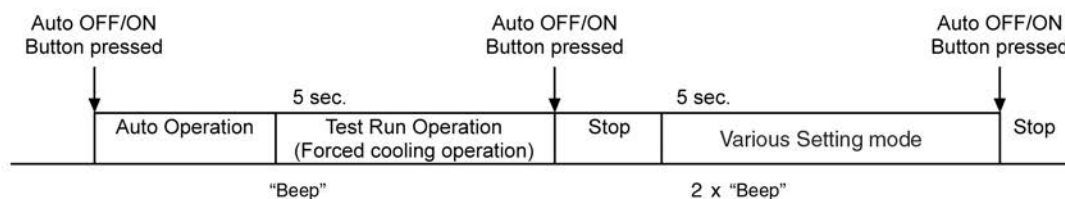

1. AUTO OPERATION MODE

The Auto operation will be activated immediately once the Auto OFF/ON button is pressed. This operation can be used to operate air conditioner with limited function if remote control is misplaced or malfunctioned.

2. TEST RUN OPERATION (FOR PUMP DOWN/SERVICING PURPOSE)

The Test Run operation will be activated if the Auto OFF/ON button is pressed continuously for more than 5 seconds. A "beep" sound will occur at the fifth second, in order to identify the starting of this operation.

3. VARIOUS SETTING MODE

The Various Setting Mode will be activated if (within 20 seconds of Test Run Operation) the Auto OFF/ON button is pressed for more than 5 seconds. 2 "beep" sounds will be heard to identify the starting of this operation.

Under Various Setting mode, user could perform the following operation:

i) Remote control receiving sound OFF/ON

Press "Auto OFF/ON button" to toggle remote control receiving sound.

- Short "beep": Turn ON remote control receiving sound.
- Long "beep": Turn OFF remote control receiving sound.

After Auto OFF/ON Button is pressed, the 20 seconds counter for Remote Control Receiving Sound OFF/ON Mode is restarted.

ii) Remote Control Number switch

- There are 4 types of remote control transmission code could be selected and stored in EEPROM of indoor unit. The indoor unit will only operate when received signal with same transmission code from remote control. This could prevent signal interference when there are 2 or more indoor units installed nearby together.
- To change remote control transmission code, short or open jumpers at the remote control printed circuit board.

Remote Control Printed Circuit Board		
Jumper A (J-A)	Jumper B (J-B)	Remote Control No.
Short	Open	A (Default)
Open	Open	B
Short	Short	C
Open	Short	D

- During Various Setting mode, after select the transmission code combination of remote control, press any button at remote control to transmit and store the desired transmission code to the EEPROM.
- After signal is received, the various setting mode is cancelled and return to normal operation.
- If there is no code is transmitted or Auto OFF/ON button is not pressed within 20 seconds, the Various Setting mode will be cancelled.

14.2. Remote Control Button

14.2.1. SET BUTTON

- To check remote control transmission code and store the transmission code to EEPROM.
 - Press "SET" button for more than 10 seconds by using pointer.
 - Press "TIMER SET" button until a "beep" sound is heard as confirmation of transmission code change.

14.2.2. CLOCK BUTTON

- To change the remote control's time format.
 - Press for more than 5 seconds.

14.2.3. RESET

- To clear and restore the remote control setting to factory default.
 - Press once to clear the memory.

14.2.4. TIMER ▲

- To change indoor unit indicator's LED intensity.
 - Press continuously for 5 seconds.

14.2.5. TIMER ▼

- To change remote control display from Degree Celsius (°C) to Degree Fahrenheit (°F).
 - Press continuously for 10 seconds.

15 Troubleshooting Guide


15.1. Refrigeration cycle system

In order to diagnose malfunctions, ensure the air conditioner is free from electrical problems before inspecting the refrigeration cycle. Such problems include insufficient insulation, problem with the power source, malfunction of a compressor and a fan. The normal outlet air temperature and pressure of the refrigeration cycle depends on various conditions, the standard values for them are shown in the table to the right.

Normal Pressure and Outlet Air Temperature (Standard)

	Gas pressure Mpa (kg/cm ² G)	Outlet air temperature (°C)
Cooling Mode	0.4 ~ 0.6 (4 ~ 6)	12 ~ 16

* Condition: Indoor fan speed = High
Outdoor temperature = 35°C

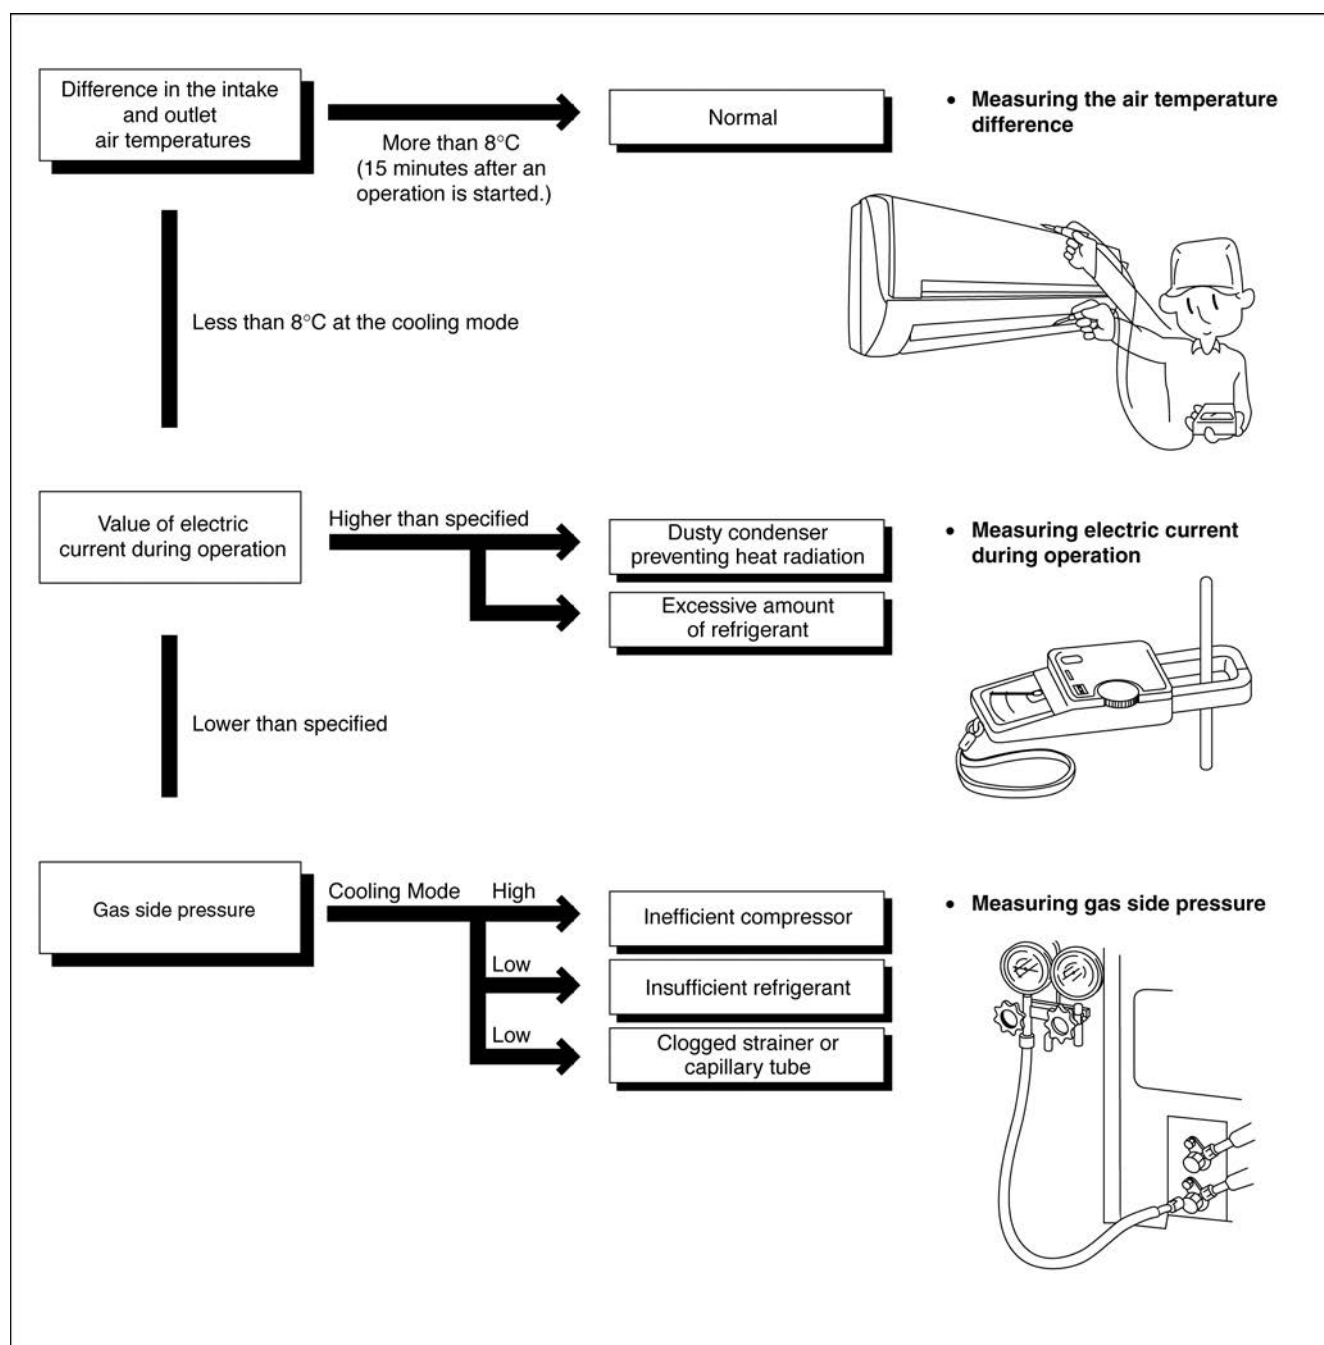

15.1.1. Relationship between the condition of the air conditioner and pressure and electric current

Condition of the air conditioner	Cooling Mode		
	Low Pressure	High Pressure	Electric current during operation
Insufficient refrigerant (gas leakage)	↘	↘	↘
Clogged capillary tube or Strainer	↘	↘	↘
Short circuit in the indoor unit	↘	↘	↘
Heat radiation deficiency of the outdoor unit	↗	↗	↗
Inefficient compression	↗	↘	↘

- Carry out the measurements of pressure, electric current, and temperature fifteen minutes after an operation is started.

15.1.2. Diagnosis methods of a malfunction of a compressor

Nature of fault	Symptom
Insufficient compressing of a compressor	<ul style="list-style-type: none"> • Electric current during operation becomes approximately 20% lower than the normal value. • The discharge tube of the compressor becomes abnormally hot (normally 70 to 90°C). • The difference between high pressure and low pressure becomes almost zero.
Locked compressor	<ul style="list-style-type: none"> • Electric current reaches a high level abnormally, and the value exceeds the limit of an ammeter. In some cases, a breaker turns off. • The compressor has a humming sound.

16 Disassembly and Assembly Instructions


WARNING

High Voltage is generated in the electrical parts area by the capacitor. Ensure that the capacitor has discharged sufficiently before proceeding with repair work. Failure to heed this caution may result in electric shocks.


16.1. CS-PC12KKF-2


16.1.1. Indoor Electronic Controllers and Control Board Removal Procedures

16.1.1.1. To remove Front Grille

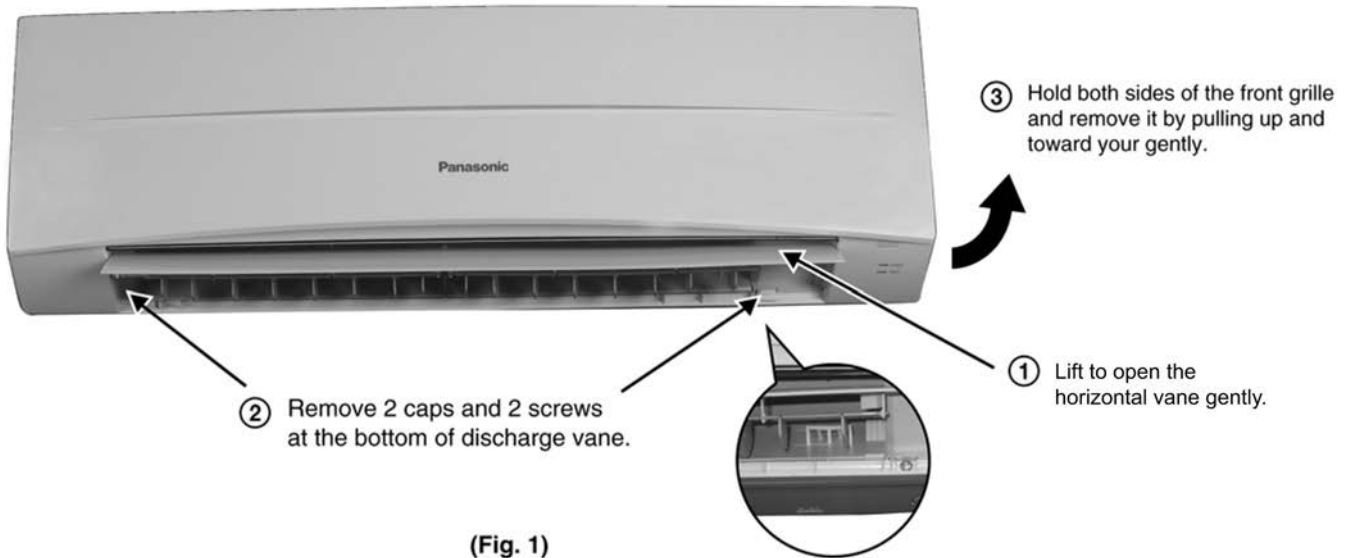


16.1.1.2. To remove Power Electronic Controller

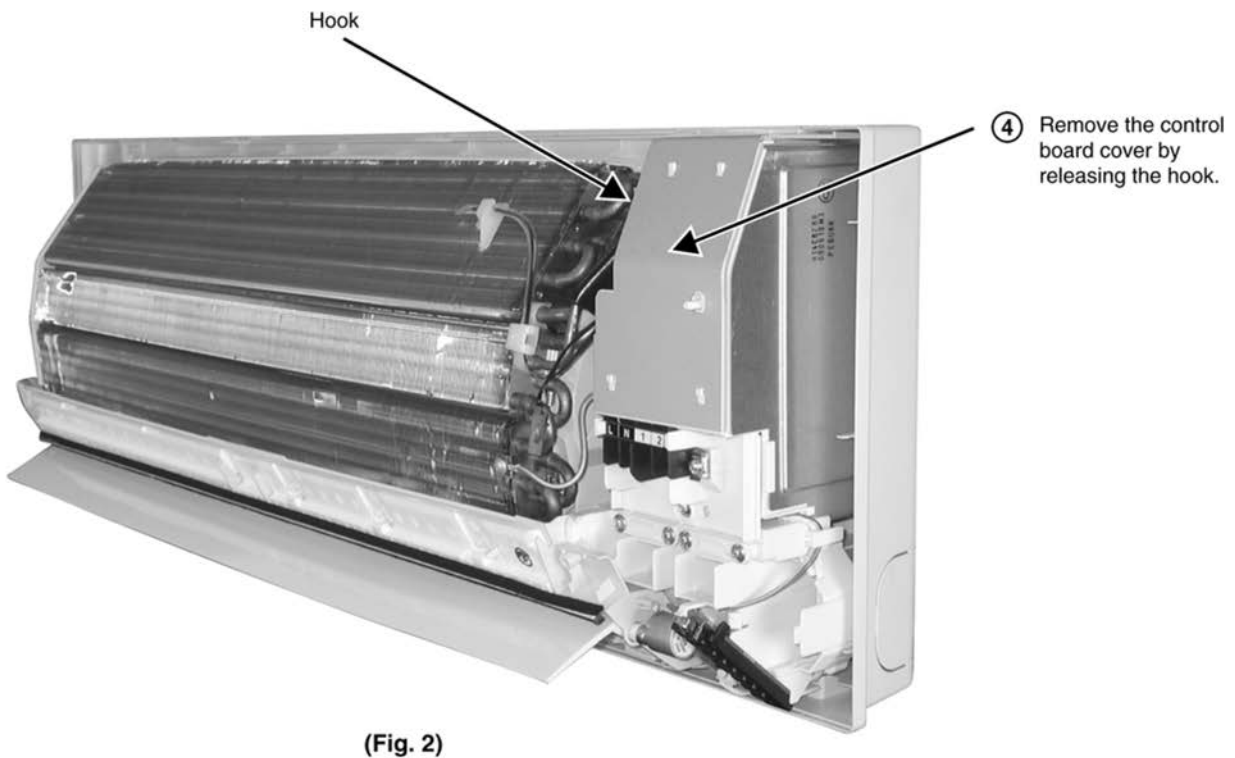


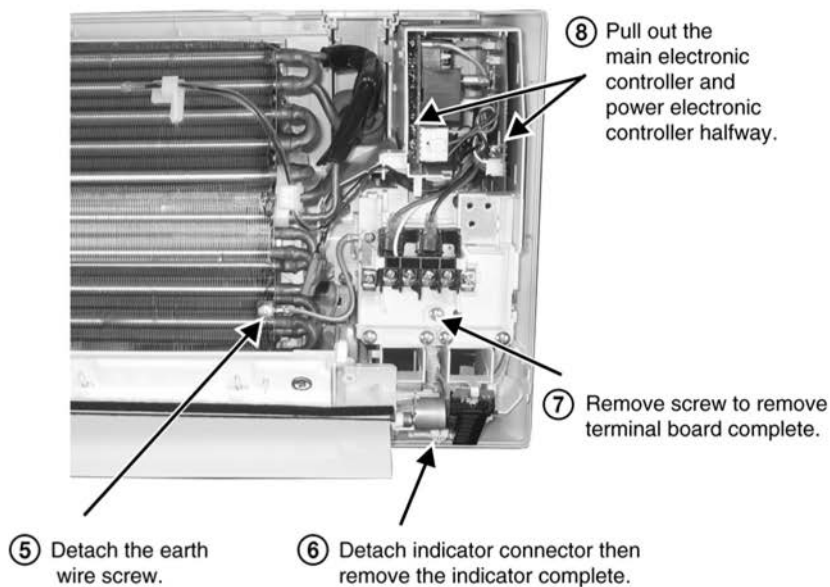

(Fig. 3)

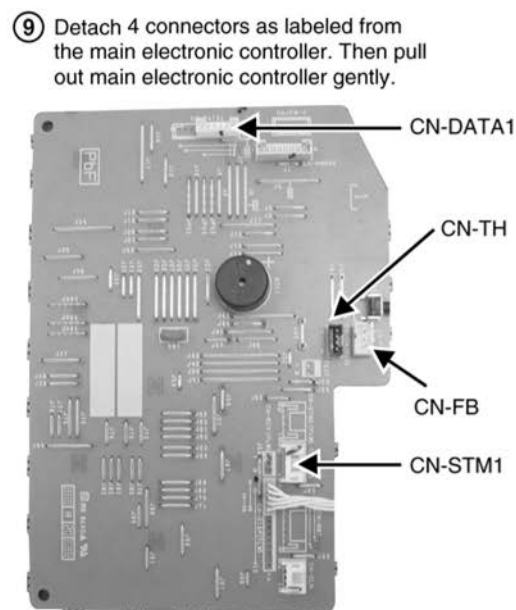


(Fig. 4)

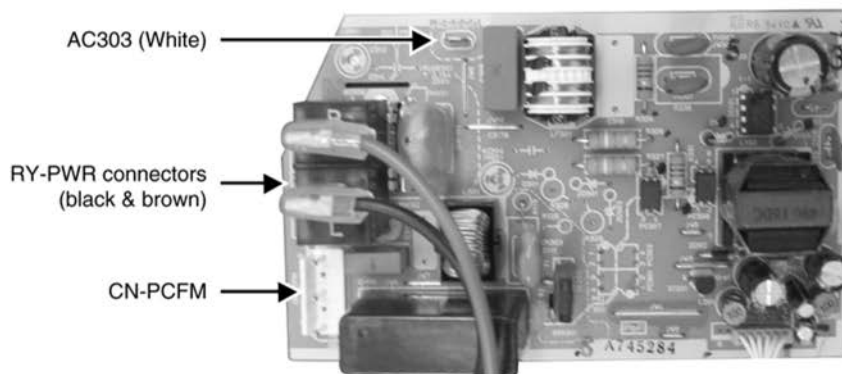

(Fig. 5)


- ⑩ Detach the AC303, RY-PWR and CN-PCFM connectors from the power electronic controller. Then pull out power electronic controller gently.

16.1.1.3. To remove Discharge Grille

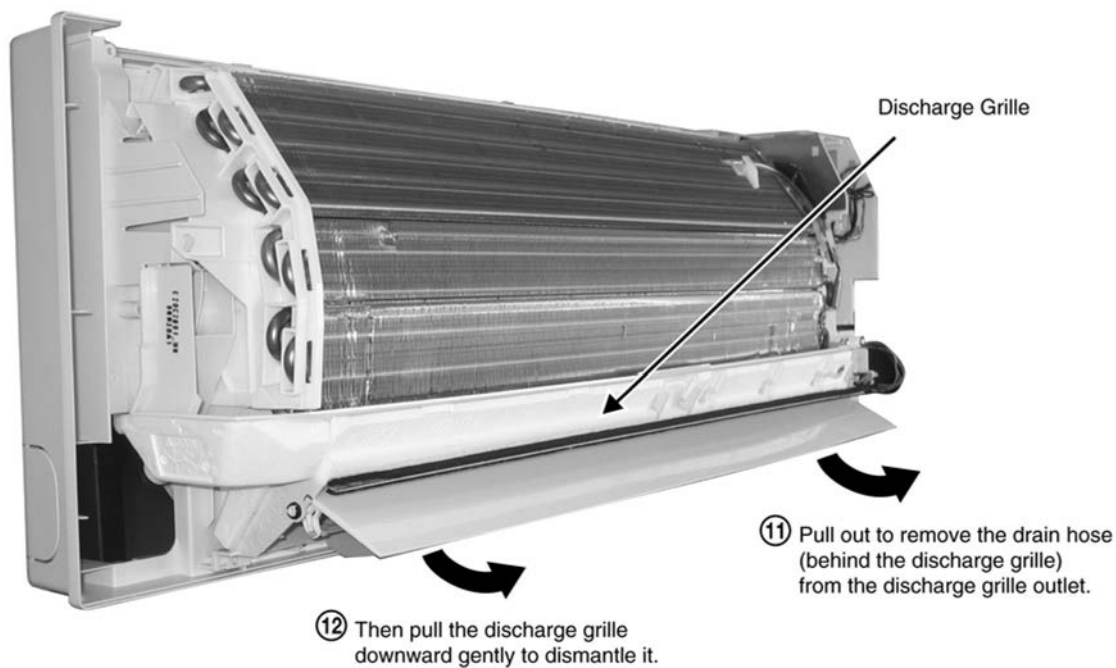


(Fig. 6)

16.1.1.4. To remove Control Board

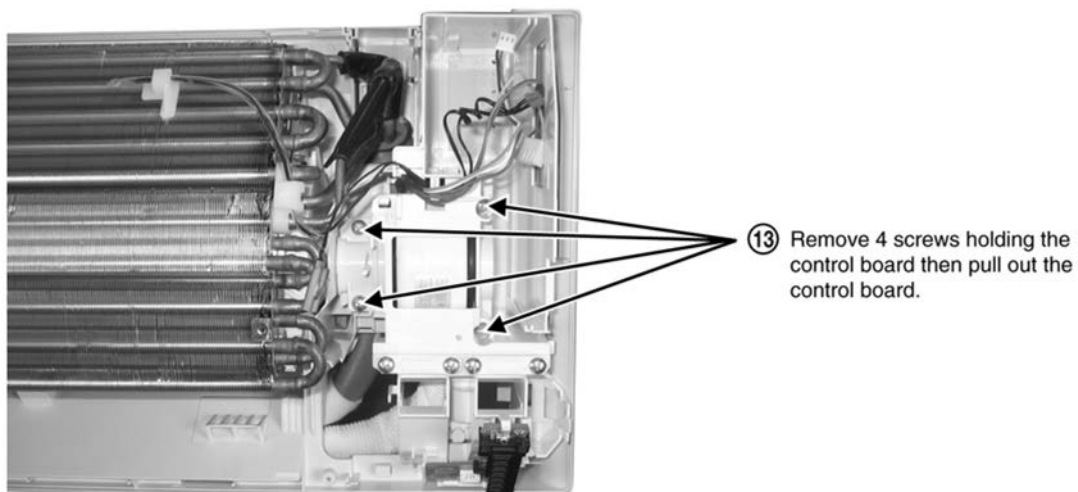


(Fig. 7)


16.1.1.5. To remove Cross Flow Fan and Indoor Fan Motor

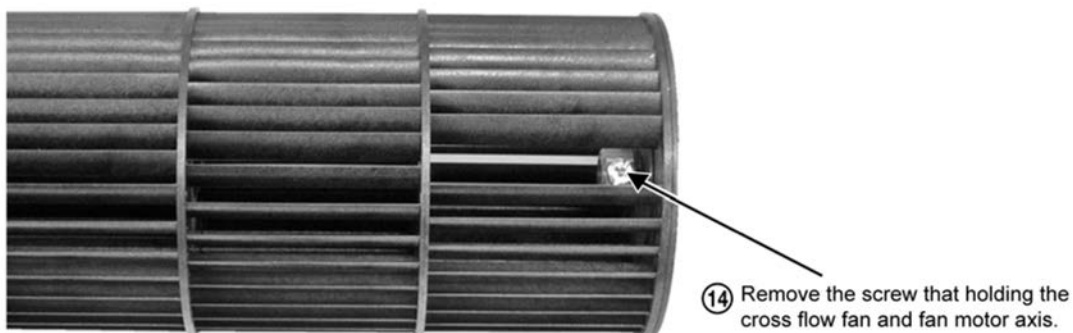


(Fig. 8)

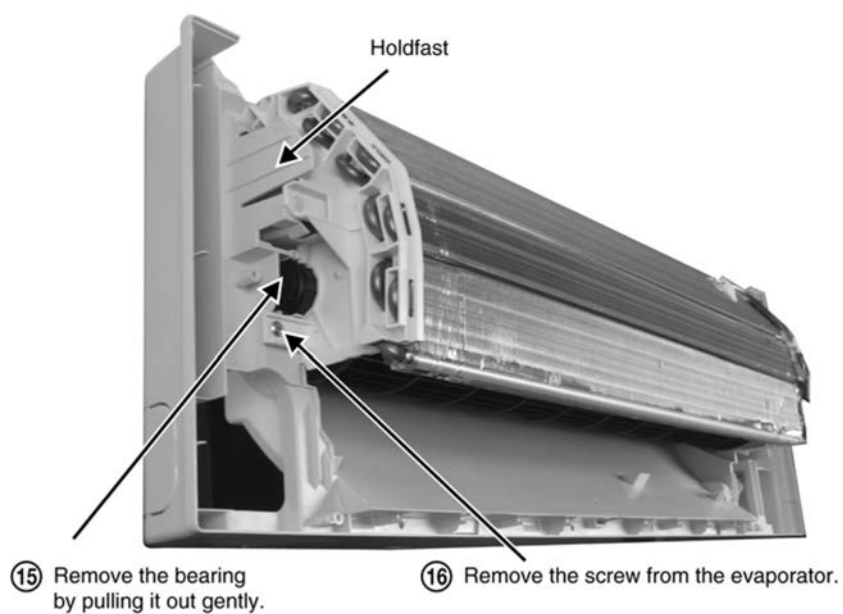

(Fig. 9)

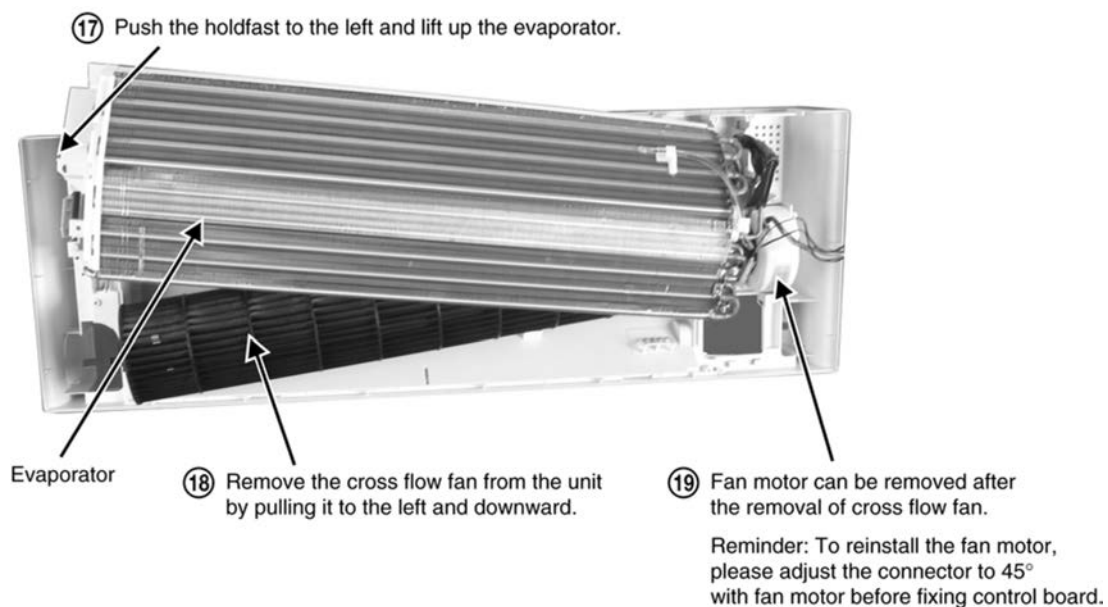

(Fig. 10)

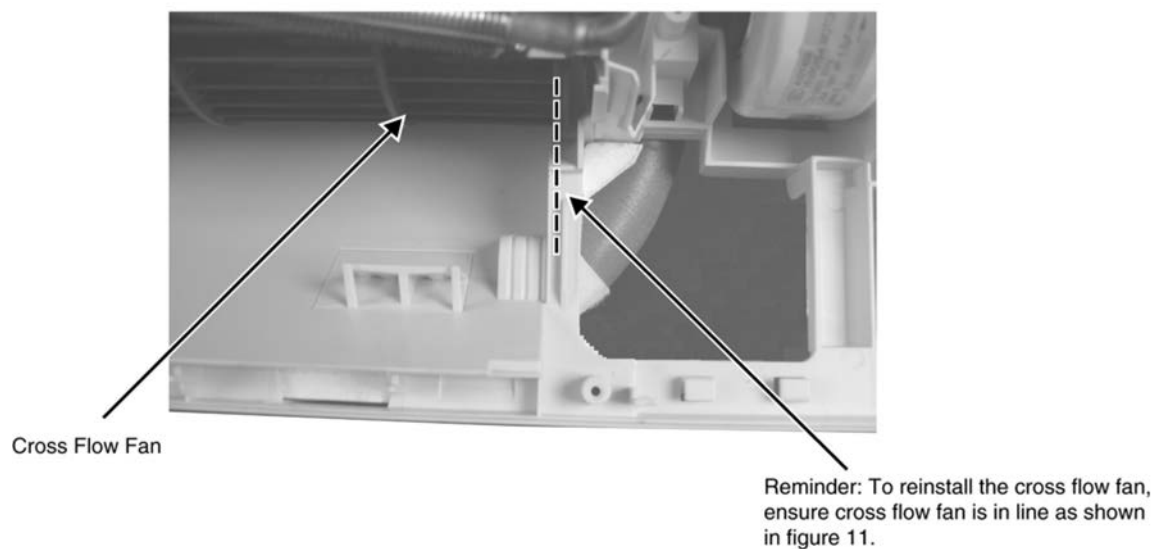


(Fig. 11)


16.2. CS-PC18KKF-2 CS-PC24KKF-2


16.2.1. Indoor Electronic Controllers and Control Board Removal Procedures

16.2.1.1. To remove Front Grille

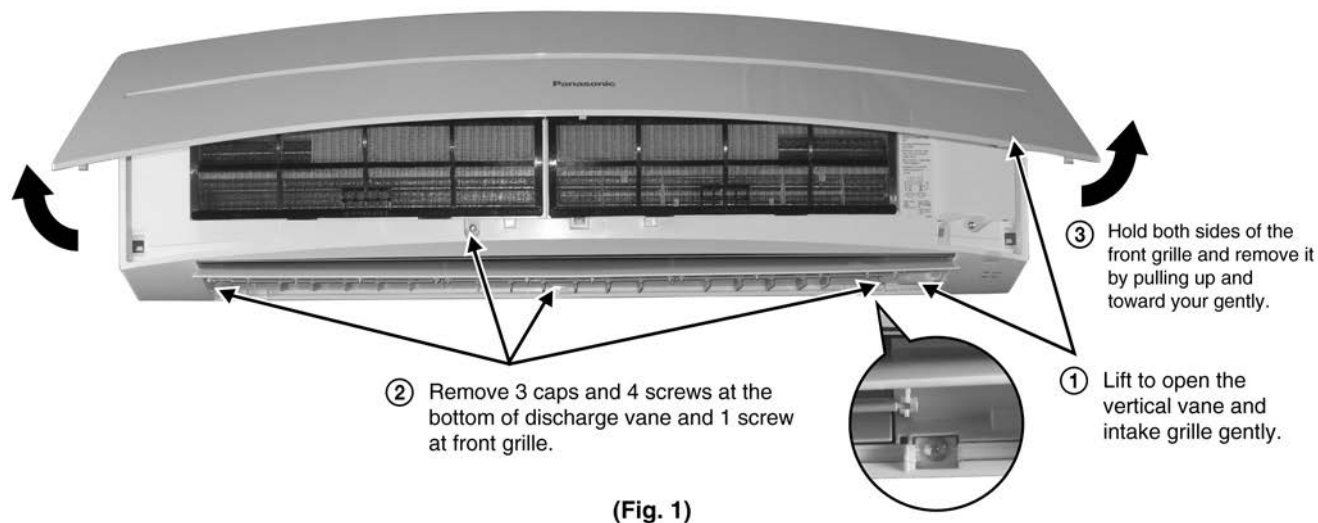


16.2.1.2. To remove Power Electronic Controller

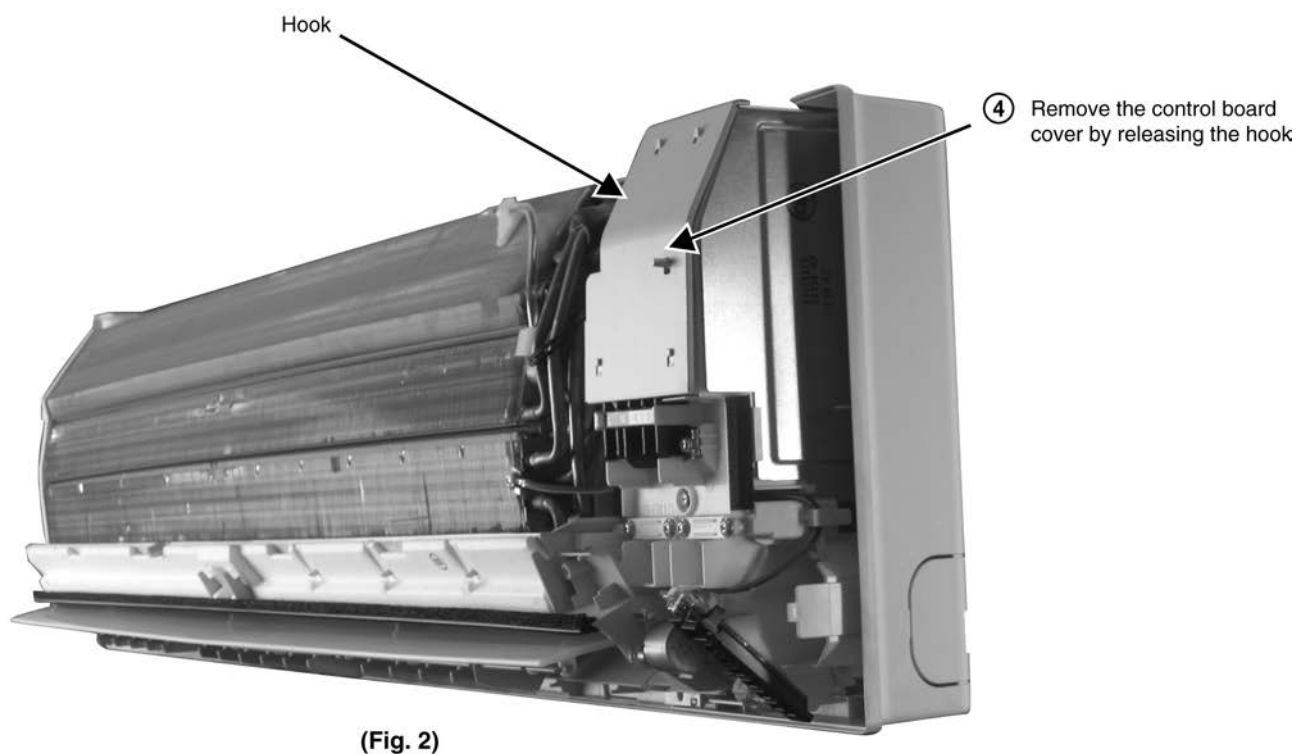


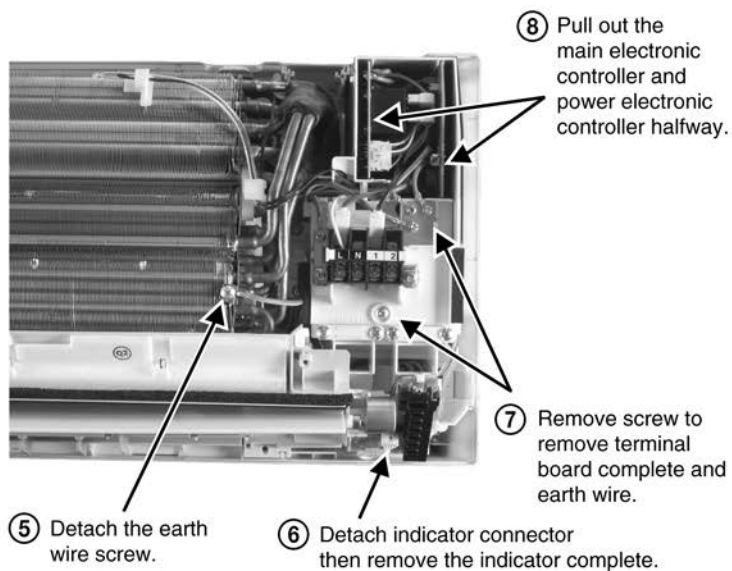

(Fig. 3)

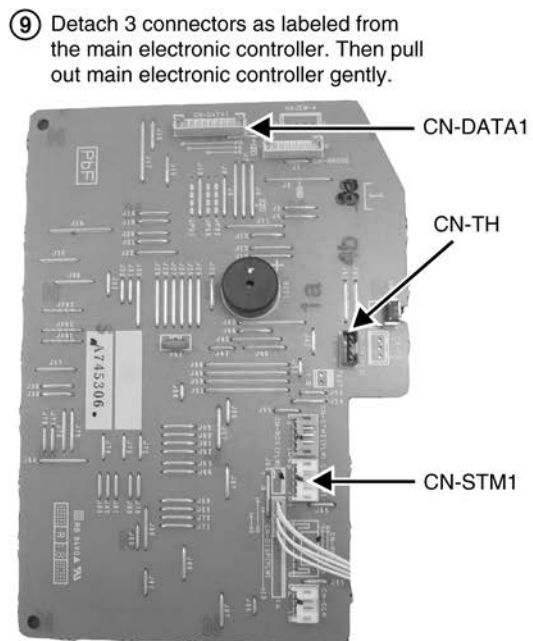


(Fig. 4)

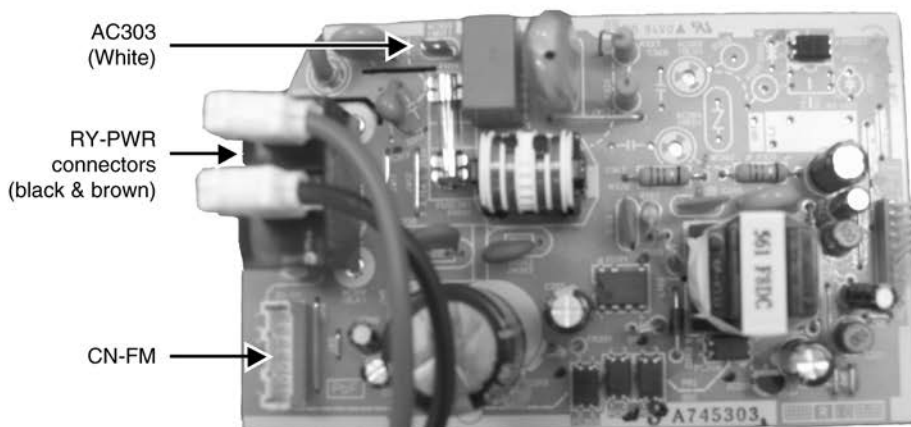

(Fig. 5)


- ⑩ Detach the AC303, RY-PWR and CN-FM connectors from the power electronic controller. Then pull out power electronic controller gently.

16.2.1.3. To remove Discharge Grille

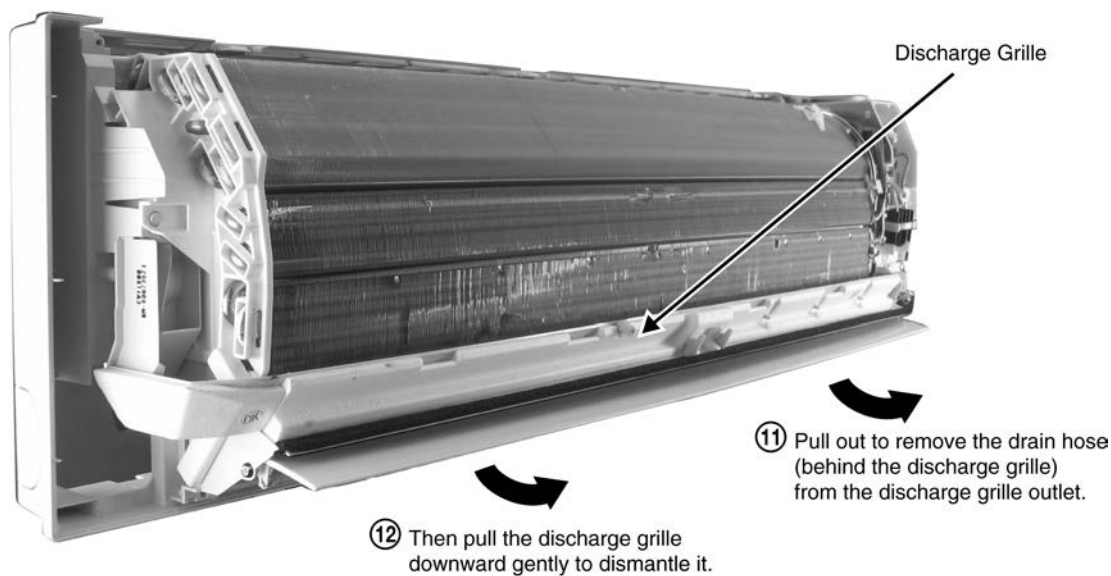


(Fig. 6)

16.2.1.4. To remove Control Board

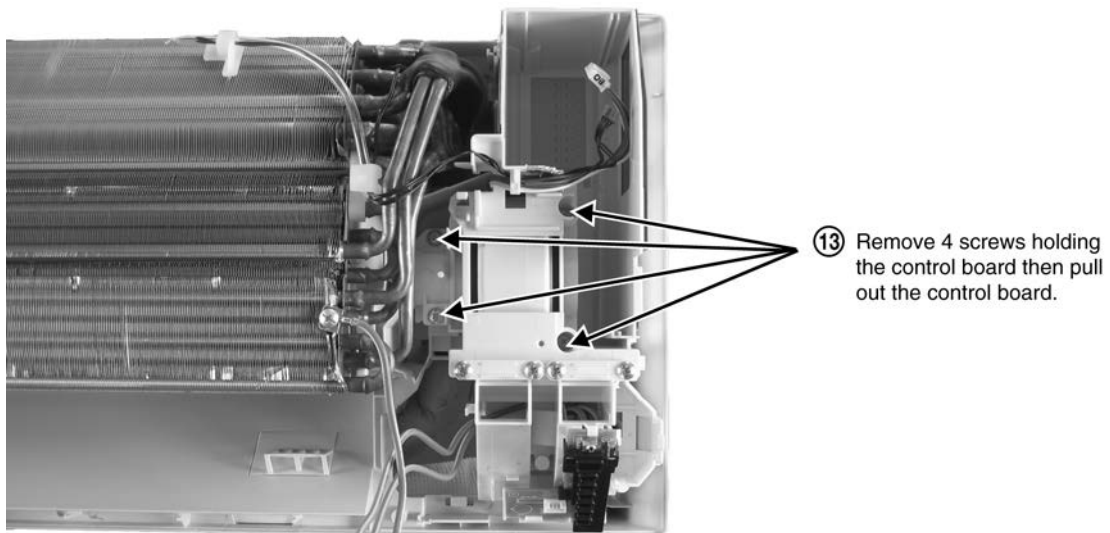


(Fig. 7)


16.2.1.5. To remove Cross Flow Fan and Indoor Fan Motor

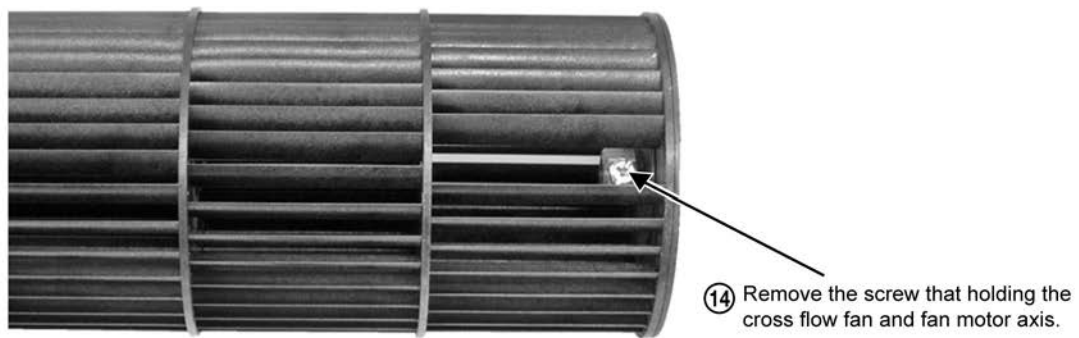


(Fig. 8)

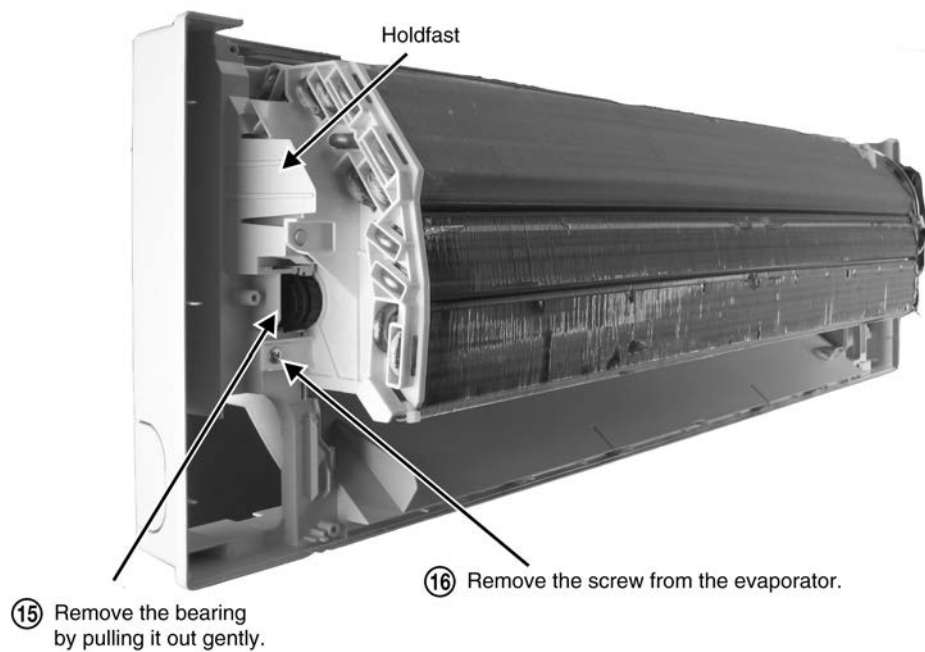

(Fig. 9)

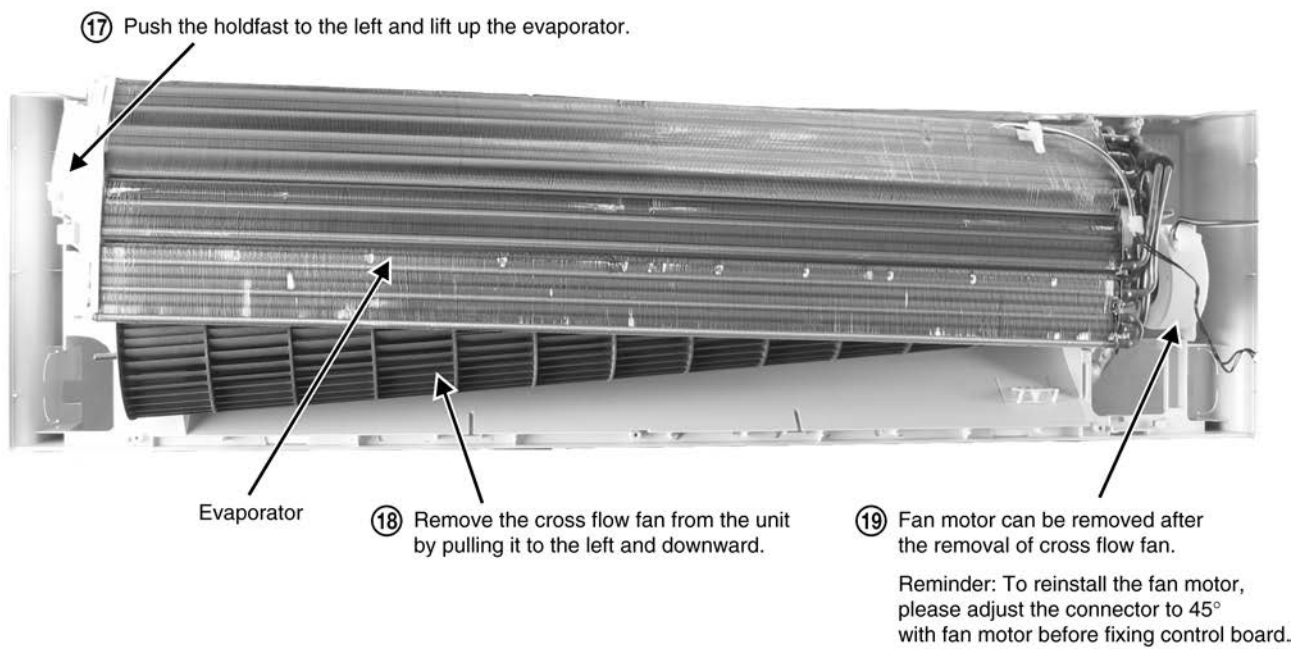

(Fig. 10)

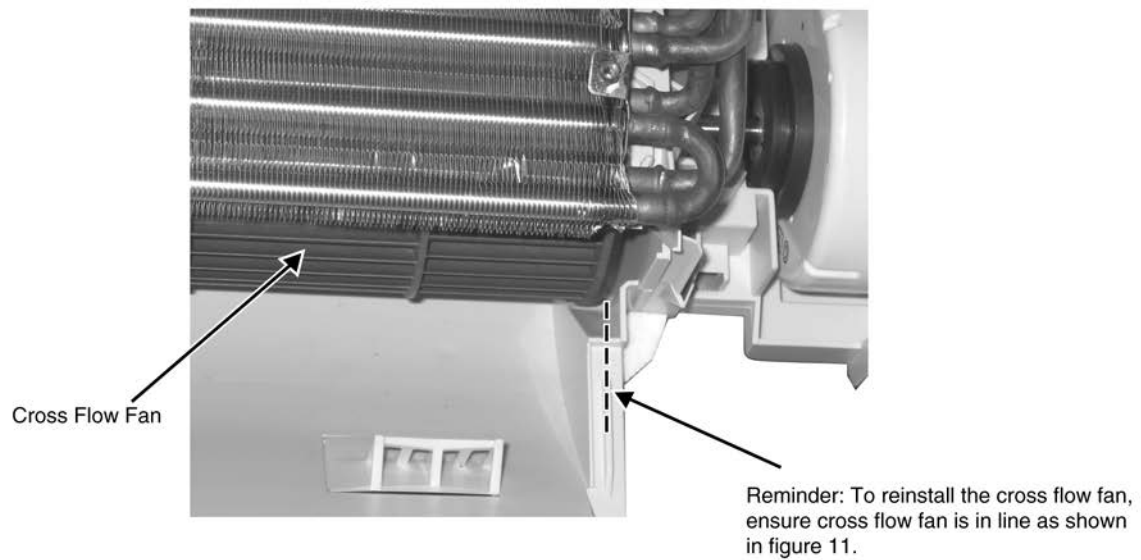


(Fig. 11)


17 Technical Data

17.1. Thermostat Characteristics

Cooling

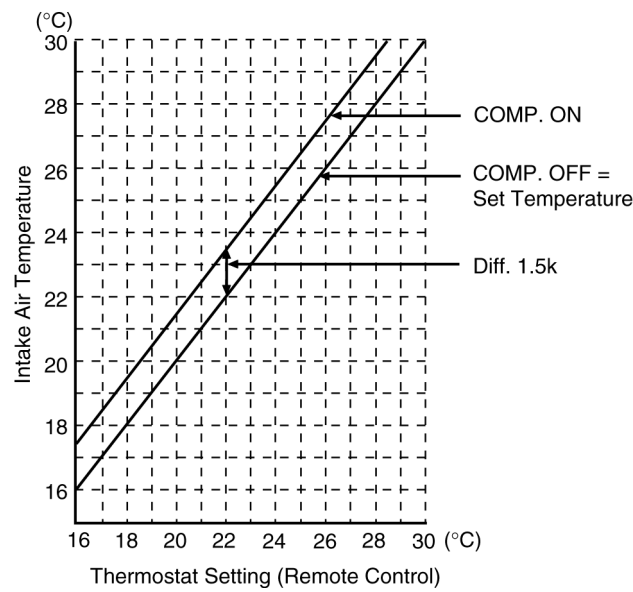

Soft Dry

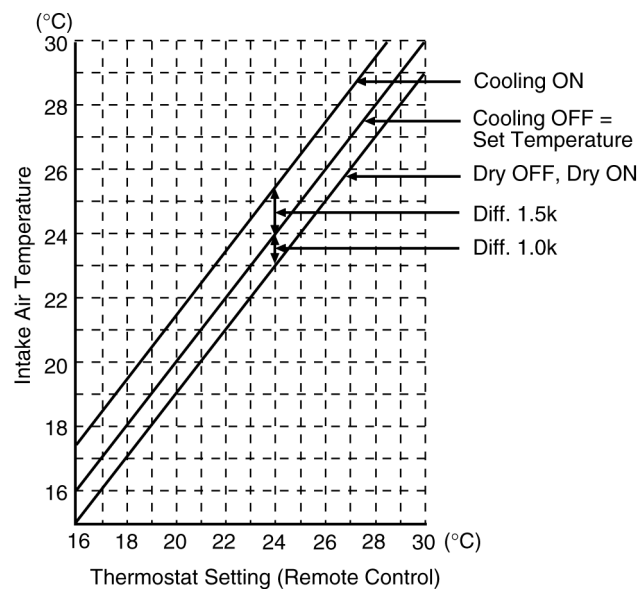

17.2. Operation Characteristics





17.2.1. CS-PC12KKF-2 CU-PC12KKF-2

• Cooling Characteristic

[Condition] Room temperature: 27°C (DBT), 19°C (WBT)


Cooling condition: At High fan

Piping length: 7.5m

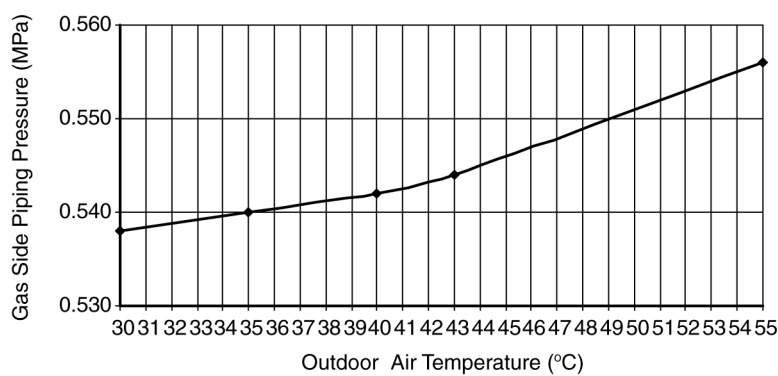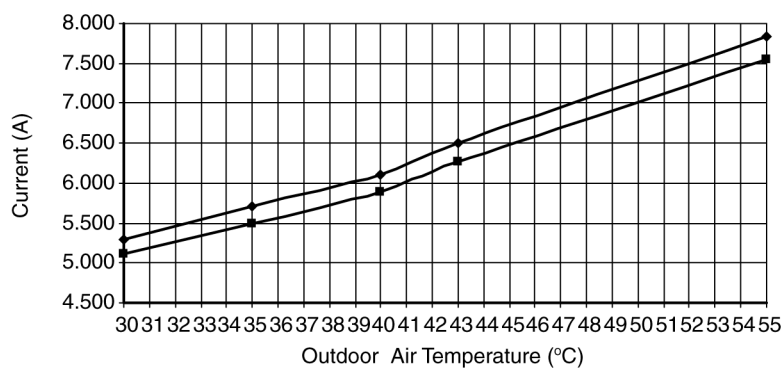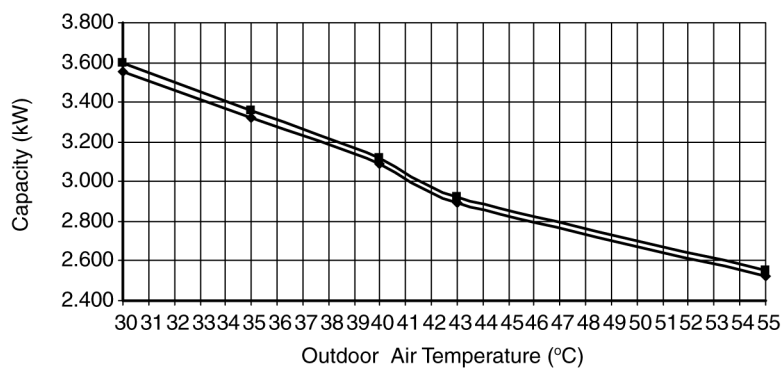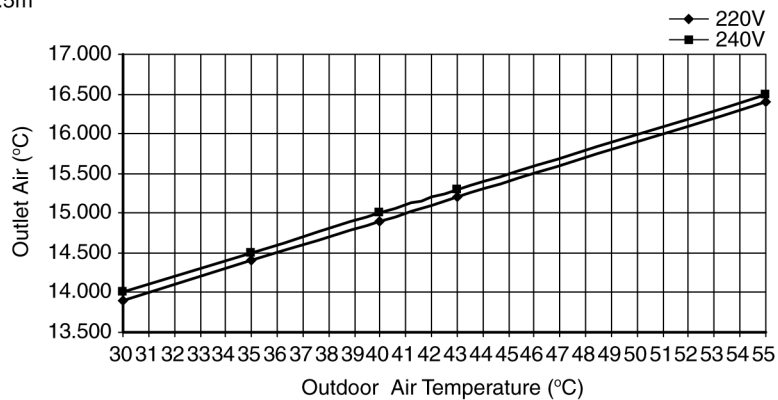

• Piping Length Characteristic





[Condition] Room temperature: 27°C (DBT), 19°C (WBT)
Cooling condition: At High fan
Outdoor temperature: 35/24°C

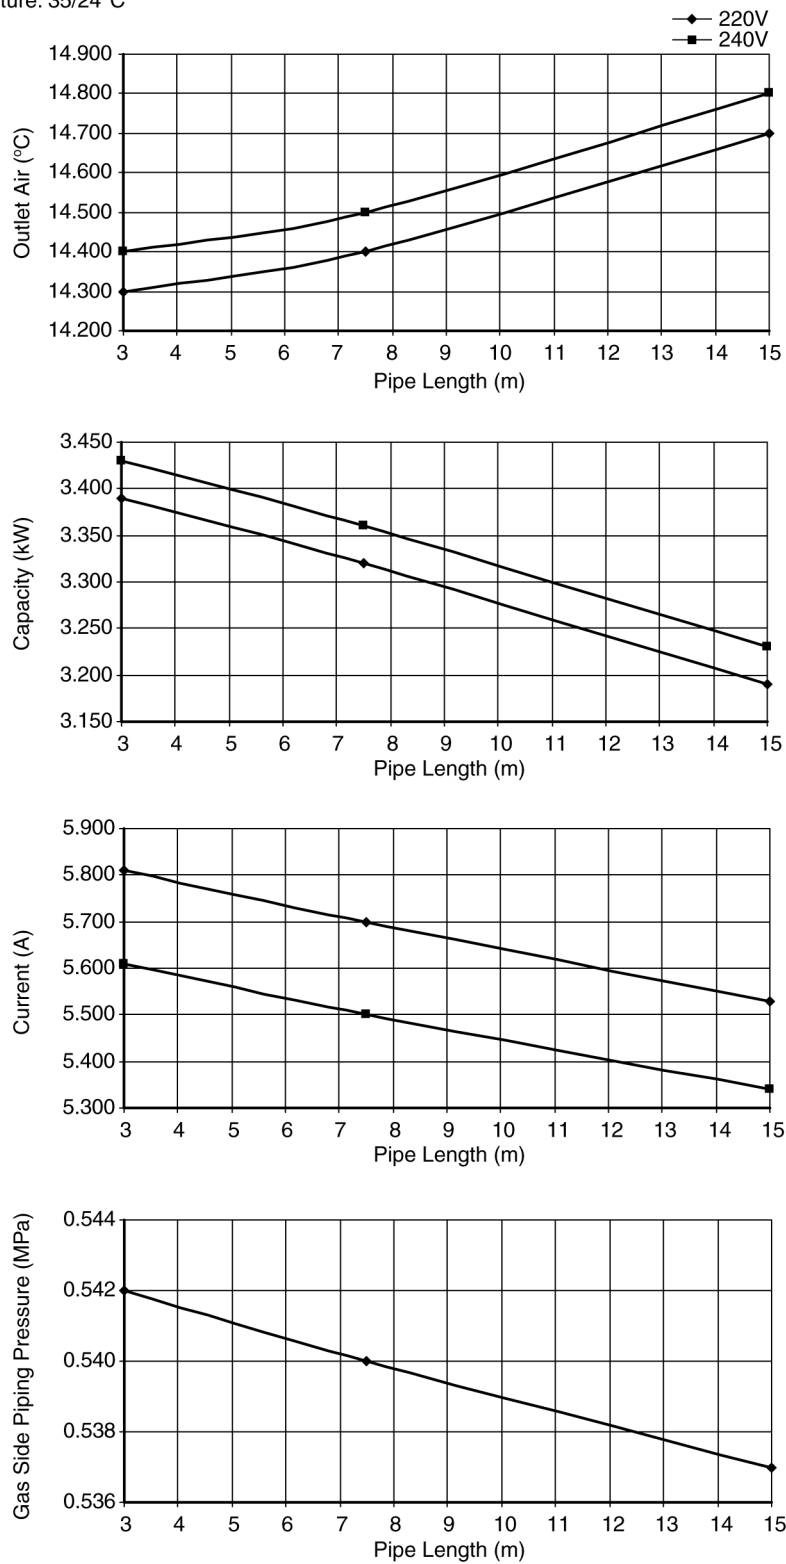

17.2.2. CS-PC18KKF-2 CU-PC18KKF-2





• Cooling Characteristic

[Condition] Room temperature: 27°C (DBT), 19°C (WBT)
Cooling condition: At High fan
Piping length: 7.5m

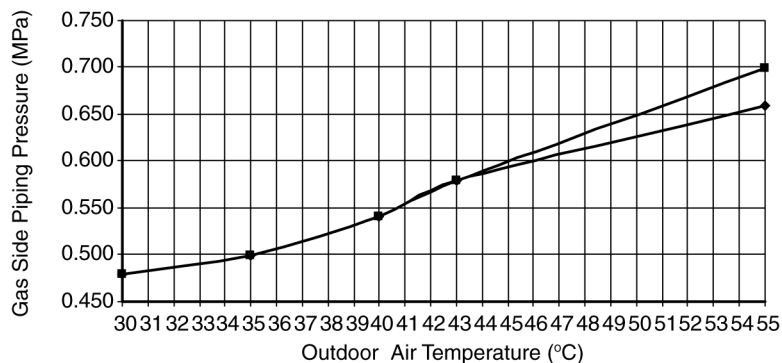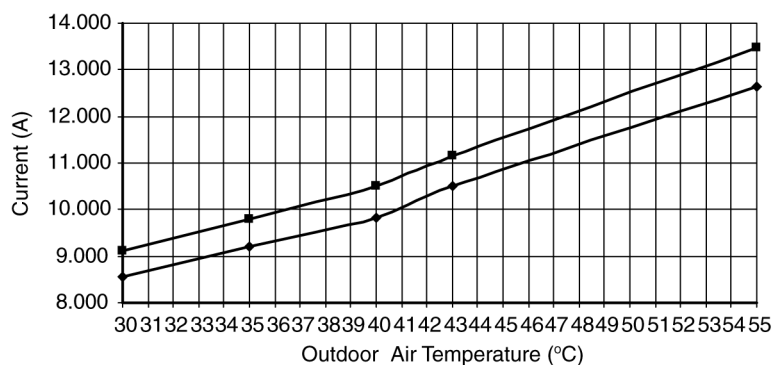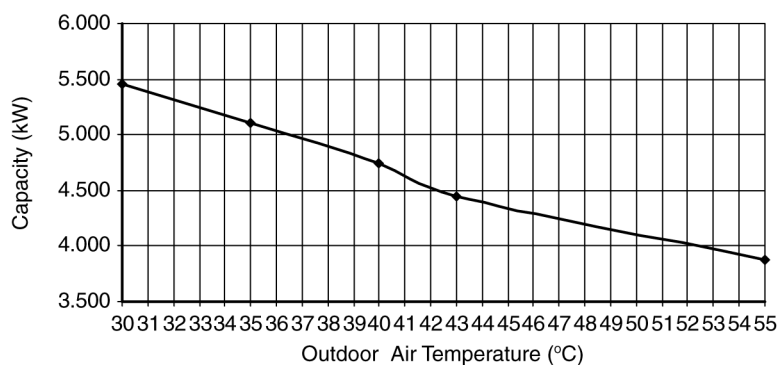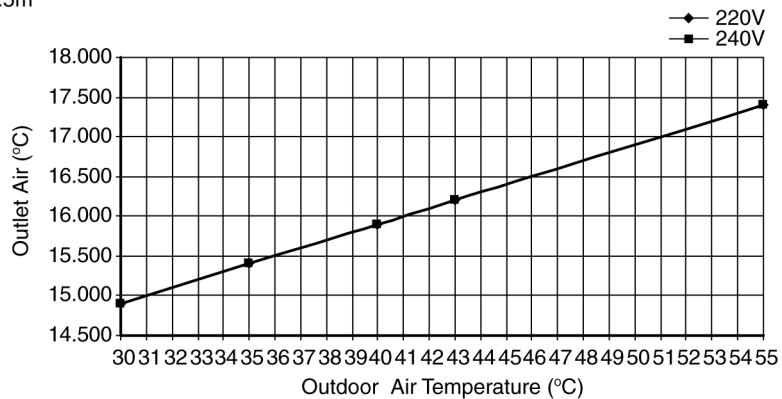

• Piping Length Characteristic


[Condition] Room temperature: 27°C (DBT), 19°C (WBT)
Cooling condition: At High fan
Outdoor temperature: 35/24°C

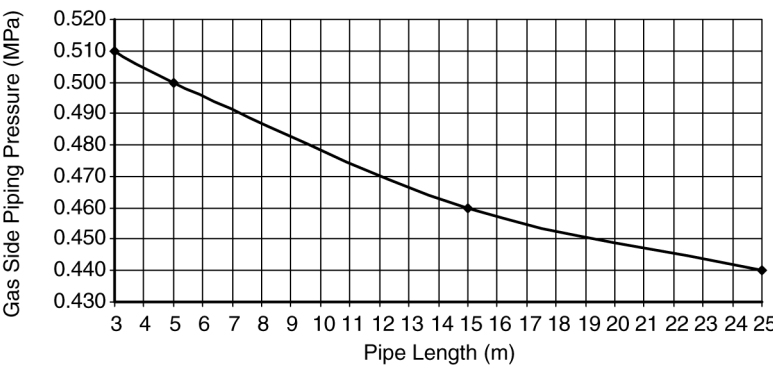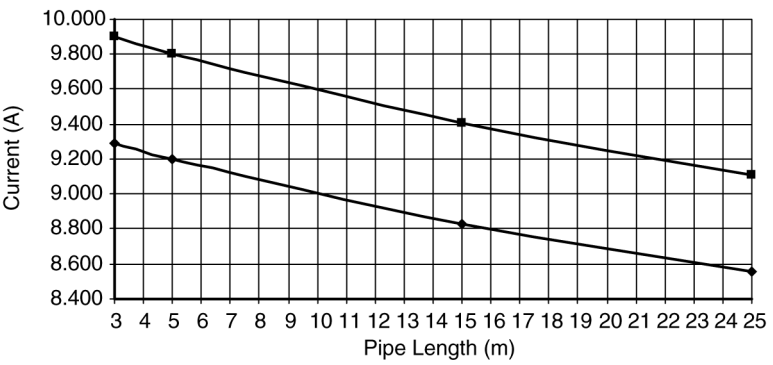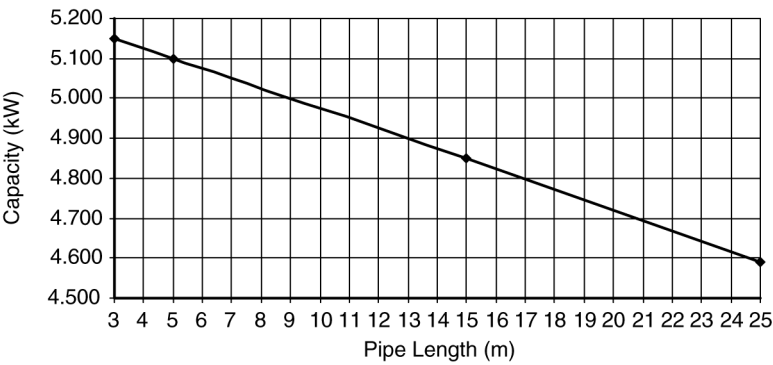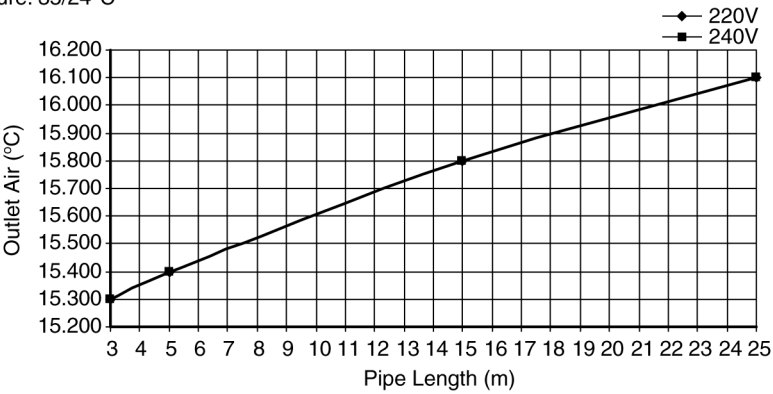

17.2.3. CS-PC24KKF-2 CU-PC24KKF-2


• Cooling Characteristic

[Condition] Room temperature: 27°C (DBT), 19°C (WBT)
Cooling condition: At High fan
Piping length: 7.5m

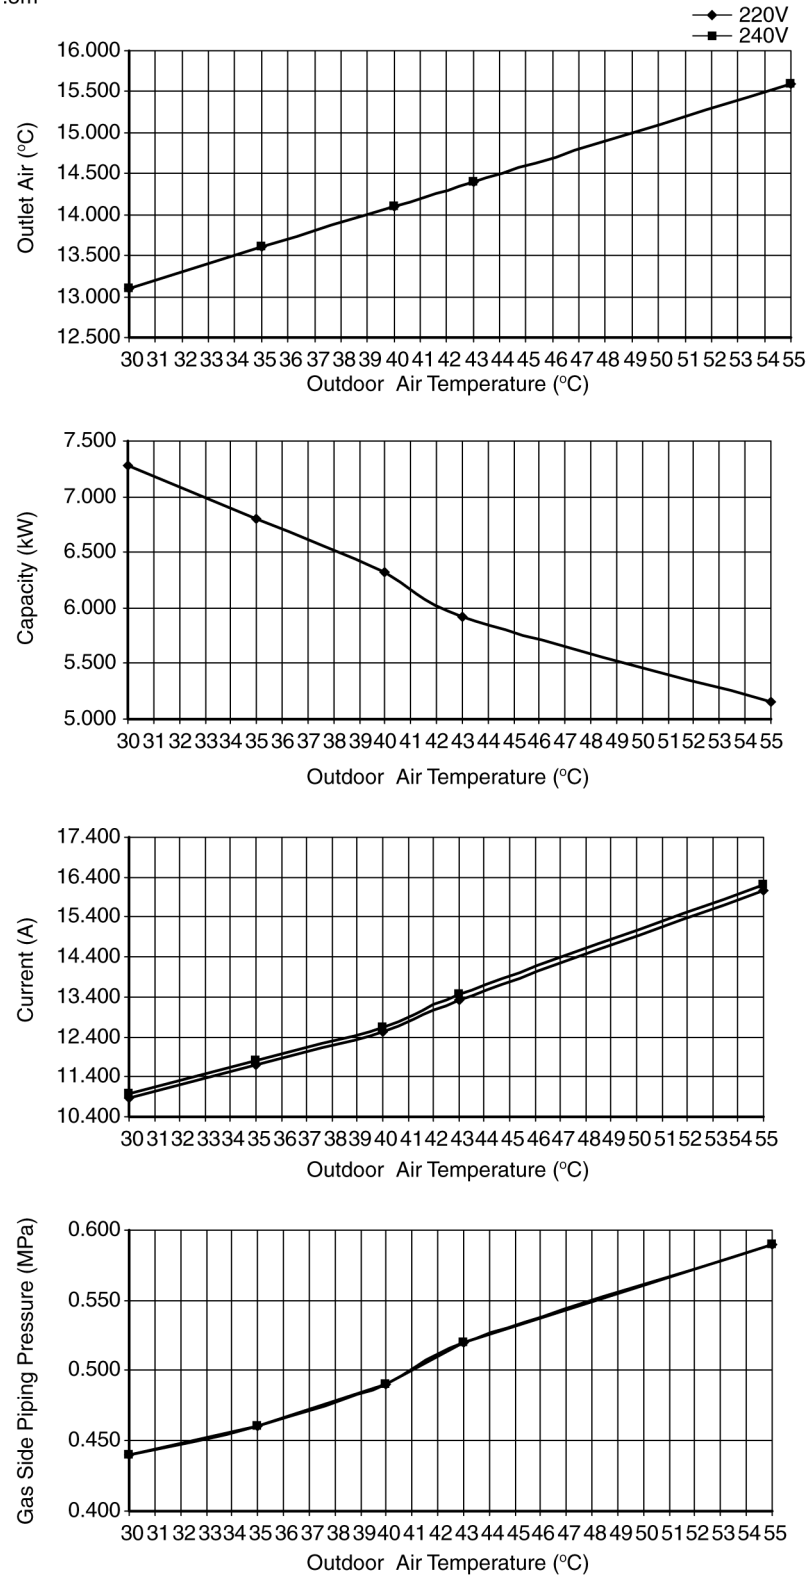

• Piping Length Characteristic

[Condition] Room temperature: 27°C (DBT), 19°C (WBT)
Cooling condition: At High fan
Outdoor temperature: 35/24°C

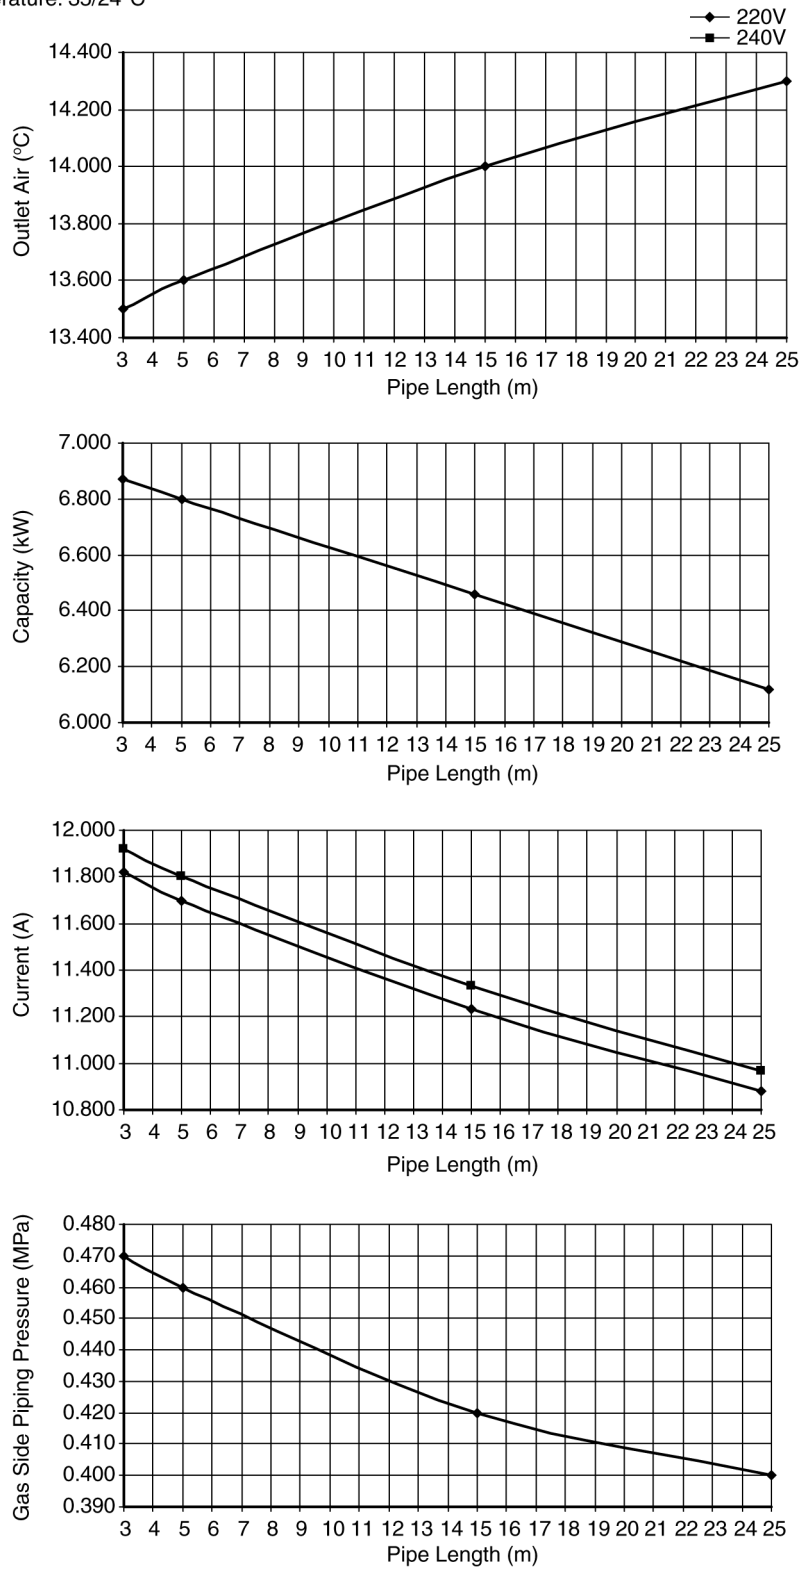

17.3. Fan Performance

CS-PC18KKF-2 CU-PC18KKF-2			Hi	Me	Lo
Indoor	Fan Speed	rpm	1280	1200	1120
	Air Flow	m ³ /min	16.9	15.8	14.8
		ft ³ /min	597	560	522
Outdoor	Fan Speed	rpm	860 - 890		
	Air Flow	m ³ /min	31.6 - 32.6		
		ft ³ /min	1115 - 1151		

CS-PC24KKF-2 CU-PC24KKF-2			Hi	Me	Lo
Indoor	Fan Speed	rpm	1390	1240	1150
	Air Flow	m ³ /min	18.1	16.1	15.0
		ft ³ /min	639	570	529
Outdoor	Fan Speed	rpm	860 - 890	—	440 - 500
	Air Flow	m ³ /min	52.0 - 54.0	—	26.6 - 30.2
		ft ³ /min	1810 - 1910	—	940 - 1071

17.4. Cooling Capacity Performance Data

CS/CU-PC12KKF-2 (220V)

CAPACITY		OUTDOOR TEMP. (DBT)																	
		25			30			35			40			43			55		
		Tc	SHc	Ipt	Tc	SHc	Ipt	Tc	SHc	Ipt	Tc	SHc	Ipt	Tc	SHc	Ipt	Tc	SHc	Ipt
23	17.0	3.6661	2.1947	0.9632	3.5200	2.2250	1.0454	3.3141	2.1539	1.1374	3.0652	2.0627	1.2487	2.8811	1.9969	1.3213	2.4587	1.6009	1.6193
	19.0	3.8720	1.8448	1.0212	3.7474	1.8600	1.1035	3.5580	1.8297	1.2052	3.3141	1.7688	1.3213	3.1462	1.7385	1.3988	2.7533	1.6079	1.7614
	22.0	4.2240	1.4242	1.1035	4.1103	1.4647	1.1955	3.9262	1.4700	1.3020	3.6717	1.4446	1.4278	3.4982	1.4393	1.5149	2.9948	1.4147	1.9886
25	17.0	3.6228	2.5900	0.9632	3.4820	2.5545	1.0406	3.2764	2.4682	1.1326	3.0381	2.3771	1.2390	2.8702	2.2957	1.3116	2.4872	1.8241	1.6095
	19.0	3.8720	2.2859	1.0261	3.7421	2.2757	1.1084	3.5362	2.2201	1.2052	3.2926	2.1437	1.3165	3.1247	2.0881	1.3988	2.7315	1.8628	1.7810
	22.0	4.2240	1.7987	1.1084	4.0941	1.8195	1.1955	3.8938	1.8044	1.3020	3.8628	1.7484	1.4230	3.4658	1.7332	1.5101	2.9895	1.6681	1.9834
27	17.0	3.5742	2.9800	0.9680	3.4387	2.9293	1.0406	3.2437	2.8230	1.1326	3.0163	2.7115	1.2294	2.8540	2.6456	1.3020	2.4841	2.1887	1.5997
	19.0	3.8773	2.6861	1.0309	3.7312	2.6558	1.1132	3.5200	2.5696	1.2100	3.2764	2.4834	1.3407	3.0976	2.4073	1.3939	2.6777	2.1074	1.6630
	22.0	4.2187	2.1743	1.1132	4.0779	2.1743	1.2003	3.8667	2.1338	1.3068	3.5904	1.8688	1.4181	3.4334	2.0222	1.5052	2.9712	1.8987	1.9782
29	17.0	3.5686	3.2740	0.9583	3.4387	3.1881	1.0406	3.2384	3.0307	1.1180	3.0434	2.8484	1.2003	2.8917	2.7065	1.2536	2.5495	2.0138	1.4770
	19.0	3.8720	3.0814	1.0261	3.7312	3.0409	1.1084	3.5200	2.9346	1.1955	3.2979	2.8280	1.2826	3.1356	2.7572	1.3358	2.7652	2.4689	1.6020
	22.0	4.2022	2.5745	1.1277	4.0614	2.5647	1.2245	3.8396	2.4985	1.3165	3.5957	2.4228	1.4133	3.4278	2.3771	1.4714	2.9392	2.1958	1.8247
32	17.0	3.5633	3.2690	0.9535	3.4387	3.2183	1.0358	3.0110	2.8181	1.1084	3.0596	2.8635	1.1810	2.9135	2.7266	1.2197	2.5854	2.0465	1.3889
	19.0	3.8667	3.5834	1.0212	3.7312	3.4918	1.1084	3.5200	3.2944	1.1858	3.3141	3.1018	1.2632	3.1627	2.9600	1.3020	2.8107	2.4330	1.5131
	22.0	4.1916	3.2183	1.1422	4.0508	3.1828	1.2390	3.8340	3.0867	1.3262	3.5957	2.9955	1.4084	3.4278	2.9191	1.4520	2.9392	2.6252	1.7485

TC : Cooling Capacitor (kW)

SHC : Sensible Heat Capacity (kW)

IPT : Cooling Power Consumption (kW)

CS/CU-PC12KKF-2 (240V)

CAPACITY		OUTDOOR TEMP. (DBT)																	
		25			30			35			40			43			55		
		Tc	SHc	Ipt	Tc	SHc	Ipt	Tc	SHc	Ipt	Tc	SHc	Ipt	Tc	SHc	Ipt	Tc	SHc	Ipt
23	17.0	3.6869	2.2072	2.9870	3.5400	2.2376	1.0714	3.3329	2.1661	1.1656	3.0826	2.0744	1.2797	2.8975	2.0082	1.3541	2.4727	1.6100	1.6595
	19.0	3.8940	1.8553	1.0466	3.7687	1.8705	1.1309	3.5782	1.8401	1.2350	3.3329	1.7789	1.3541	3.1641	1.7484	1.4334	2.7690	1.6171	1.8051
	22.0	4.2480	1.4323	1.1309	4.1337	1.4730	1.2251	3.9485	1.4783	1.3342	3.6926	1.4528	1.4632	3.5181	1.4475	1.5525	3.0118	1.4227	2.0379
25	17.0	3.6434	2.6047	0.9870	3.5018	2.5690	1.0664	3.2950	2.4822	1.1606	3.0554	2.3906	1.2698	2.8865	2.3088	1.3442	2.5014	1.8344	1.6494
	19.0	3.8940	2.2989	1.0515	3.7634	2.2886	1.1358	3.5563	2.2327	1.2350	3.3113	2.1559	1.3491	3.1425	2.0999	1.4334	2.7470	1.8734	1.8252
	22.0	4.2480	1.8089	1.1358	4.1174	1.8298	1.2251	3.9159	1.8146	1.3342	3.8848	1.7583	1.4582	3.4855	1.7431	1.5475	3.0065	1.6776	2.0326
27	17.0	3.5945	2.9970	0.9920	3.4582	2.9460	1.0664	3.2621	2.8391	1.1606	3.0334	2.7269	1.2598	2.8702	2.6607	1.3342	2.4982	2.2012	1.6394
	19.0	3.8993	2.7014	1.0565	3.7524	2.6709	1.1408	3.5400	2.5842	1.2400	3.2950	2.4975	1.3739	3.1152	2.4210	1.4285	2.6929	2.1194	1.7043
	22.0	4.2427	2.1867	1.1408	4.1011	2.1867	1.2301	3.8887	2.1459	1.3392	3.6108	1.8494	1.4533	3.4529	2.0337	1.5426	2.9881	1.9095	2.0273
29	17.0	3.5889	3.2926	0.9821	3.4582	3.2062	1.0664	3.2568	3.0479	1.1458	3.0607	2.8646	1.2301	2.9081	2.7219	1.2846	2.5640	2.0252	1.5137
	19.0	3.8940	3.0989	1.0515	3.7524	3.0582	1.1358	3.5400	2.9513	1.2251	3.3166	2.8440	1.3144	3.1534	2.7729	1.3690	2.7718	2.4830	1.6418
	22.0	4.2261	2.5892	1.1557	4.0845	2.5792	1.2549	3.8614	2.5127	1.3491	3.6161	2.4366	1.4483	3.4473	2.3906	1.5078	2.9559	2.2083	1.8699
32	17.0	3.5835	3.2876	0.9771	3.4582	3.2366	1.0614	3.0281	2.8341	1.1358	3.0770	2.8798	1.2102	2.9301	2.7421	1.2499	2.6001	2.0582	1.4244
	19.0	3.8887	3.6037	1.0466	3.7524	3.5117	1.1358	3.5400	3.3131	1.2152	3.3329	3.1194	1.2946	3.1807	2.9768	1.3342	2.8267	2.4468	1.5506
	22.0	4.2154	3.2366	1.1706	4.0738	3.2009	1.2698	3.8558	3.1042	1.3590	3.6161	3.0125	1.4434	3.4473	2.9357	1.4880	2.9559	2.6401	1.7918

TC : Cooling Capacitor (kW)

SHC : Sensible Heat Capacity (kW)

IPT : Cooling Power Consumption (kW)

CS/CU-PC18KKF-2 (220V)

Indoor intake air ambient temperature		Outdoor intake air ambient temperature (D.B./°C)																							
		25°C			30°C			35°C			40°C			43°C			52°C			55°C					
		TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT			
DB	WB	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW			
23	17.0	5.4993	3.6075	1.5522	5.2800	3.6575	1.6848	4.9713	3.5408	1.8330	4.5977	3.5180	2.0124	4.3215	3.4057	2.1294	3.8926	2.8204	2.5729	3.6879	2.7304	2.6632			
	19.0	5.0808	3.0326	1.6458	5.6212	3.0576	1.7784	5.3369	3.0076	1.9422	4.9713	3.0167	2.1294	4.7195	2.9648	2.2542	4.3594	2.7899	2.7987	4.1301	2.7419	2.8968			
	22.0	6.3360	2.3410	1.7784	6.1654	2.4078	1.9266	5.8892	2.4161	2.0982	5.5074	2.4635	2.3010	5.2475	2.4548	2.4414	4.7415	2.4209	3.1597	4.4921	2.4124	3.2706			
25	17.0	5.4343	4.2573	1.5522	5.2231	4.1990	1.6770	4.9145	4.0574	1.8252	4.5570	4.0539	1.9968	4.3052	3.9156	2.1138	3.9379	3.2209	2.5573	3.7308	3.1110	2.6471			
	19.0	5.8080	3.7574	1.6536	5.6130	3.7408	1.7862	5.3044	3.6491	1.9422	4.9388	3.6563	2.1216	4.6870	3.5612	2.2542	4.3248	3.2618	2.8298	4.0973	3.1770	2.9291			
	22.0	6.3360	2.9576	1.7862	6.1410	2.9910	1.9266	5.8405	2.9660	2.0982	5.7941	2.9821	2.2932	5.1988	2.9562	2.4336	4.7334	2.8701	3.1514	4.4844	2.8452	3.2620			
27	17.0	5.3612	4.8988	1.5600	5.1582	4.8155	1.6770	4.8657	4.6406	1.8252	4.5246	4.6244	1.9812	4.2809	4.5121	2.0982	3.9330	3.8258	2.5418	3.7261	3.7329	2.6310			
	19.0	5.8161	4.4156	1.6614	5.5968	4.3656	1.7940	5.2800	4.2240	1.9900	4.9145	4.2355	2.1606	4.6464	4.1058	2.2464	4.2393	3.7075	2.6423	4.0163	3.5940	2.7351			
	22.0	6.3279	3.5742	1.7940	6.1167	3.5742	1.9344	5.7999	3.5075	2.1060	5.3856	3.5007	2.2854	5.1500	3.4489	2.4258	4.7043	3.2868	3.1432	4.4568	3.2382	3.2535			
29	17.0	5.3531	5.3821	1.5444	5.1582	5.2404	1.6770	4.8576	4.9822	1.8018	4.5652	4.8578	1.9344	4.3377	4.6158	2.0202	4.0365	3.6146	2.3468	3.8242	3.4345	2.4292			
	19.0	5.8080	5.0655	1.6536	5.5968	4.9988	1.7862	5.2800	4.8239	1.9266	4.9470	4.8232	2.0670	4.7033	4.7022	2.1528	4.3635	4.3191	2.5454	4.1340	4.2107	2.6348			
	22.0	6.3035	4.2323	1.8174	6.0923	4.2157	1.9734	5.7593	4.1074	2.1216	5.3937	4.1317	2.2776	5.1419	4.0539	2.3712	4.6536	3.8164	2.8992	4.4088	3.7445	3.0009			
32	17.0	5.3450	5.3737	1.5366	5.1582	5.2904	1.6892	4.5164	4.6322	1.7862	4.5895	4.8837	1.9032	4.3702	4.6504	1.9556	4.0929	3.6651	2.2083	3.8780	3.4900	2.2859			
	19.0	5.7999	5.8903	1.6458	5.5968	5.7403	1.7862	5.2800	5.4154	1.9110	4.9713	5.2900	2.0358	4.7439	5.0480	2.0982	4.4501	4.3480	2.4041	4.2160	4.1491	2.4885			
	22.0	6.2873	5.2904	1.8408	6.0761	5.2321	1.9968	5.7511	5.0738	2.1372	5.3937	5.1085	2.2698	5.1419	4.9788	2.3400	4.6536	4.5938	2.7780	4.4088	4.4772	2.8756			

TC : Cooling Capacity (kW)

SHC : Sensible Capacity (kW)

IPT : Cooling Power Consumption (kW)


CS/CU-PC18KKF-2 (240V)


Indoor intake air ambient temperature		Outdoor intake air ambient temperature (D.B./°C)																				
		25°C			30°C			35°C			40°C			43°C			52°C			55°C		
		TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT
DB	WB	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW
23	17.0	5.4993	3.6075	1.5522	5.2800	3.6575	1.6848	4.9713	3.5408	1.8330	4.5977	3.5180	2.0124	4.3215	3.4057	2.1294	3.8926	2.8204	2.6504	3.6879	2.7304	2.7435
	19.0	5.0808	3.0326	1.6458	5.8212	3.0576	1.7784	5.3369	3.0076	1.9422	4.9713	3.0167	2.1294	4.7195	2.9648	2.2542	4.3594	2.7899	2.8831	4.1301	2.7419	2.9842
	22.0	6.3360	2.3410	1.7784	6.1654	2.4078	1.9266	5.8892	2.4161	2.0982	5.5074	2.4635	2.3010	5.2475	2.4548	2.4414	4.7415	2.4209	3.2550	4.4921	2.4124	3.3692
25	17.0	5.4343	4.2573	1.5522	5.2231	4.1990	1.6770	4.9145	4.0574	1.8252	4.5570	4.0539	1.9968	4.3052	3.9156	2.1138	3.9379	3.2209	2.6345	3.7308	3.1110	2.7269
	19.0	5.8080	3.7574	1.6536	5.6130	3.7408	1.7862	5.3044	3.6491	1.9422	4.9388	3.6563	2.1216	4.6870	3.5612	2.2542	4.3248	3.2618	2.9151	4.0973	3.1770	3.0174
	22.0	6.3360	2.9576	1.7862	6.1410	2.9910	1.9266	5.8405	2.9680	2.0982	5.7941	2.9821	2.2932	5.1988	2.9562	2.4336	4.7334	2.8701	3.2464	4.4844	2.8452	3.3604
27	17.0	5.3612	4.8988	1.5800	5.1582	4.8155	1.6770	4.8657	4.6406	1.8252	4.5246	4.6244	1.9812	4.2809	4.5121	2.0982	3.9330	3.8258	2.6185	3.7261	3.7329	2.7103
	19.0	5.8161	4.4156	1.6614	5.5968	4.3656	1.7940	5.2800	4.2240	2.0500	4.9145	4.2355	2.1606	4.6464	4.1058	2.2464	4.2393	3.7075	2.7220	4.0163	3.5940	2.8175
	22.0	6.3279	3.5742	1.7940	6.1167	3.5742	1.9344	5.7999	3.5075	2.1060	5.3856	3.5007	2.2854	5.1500	3.4489	2.4258	4.7043	3.2868	3.2380	4.4568	3.2382	3.3515
29	17.0	5.3531	5.3821	1.5444	5.1582	5.2404	1.6770	4.8576	4.9822	1.8018	4.5652	4.8578	1.9344	4.3377	4.6158	2.0202	4.0365	3.6146	2.4176	3.8242	3.4345	2.5024
	19.0	5.8080	5.0655	1.6536	5.5968	4.9988	1.7862	5.2800	4.8239	1.9266	4.9470	4.8232	2.0670	4.7033	4.7022	2.1528	4.3635	4.3191	2.6222	4.1340	4.2107	2.7142
	22.0	6.3035	4.2323	1.8174	6.0923	4.2157	1.9734	5.7593	4.1074	2.1216	5.3937	4.1317	2.2776	5.1419	4.0539	2.3712	4.6536	3.8164	2.9866	4.4088	3.7445	3.0914
32	17.0	5.3450	5.3737	1.5366	5.1582	5.2904	1.6692	4.5164	4.6322	1.7862	4.5895	4.8837	1.9032	4.3702	4.6504	1.9656	4.0929	3.6651	2.2749	3.8780	3.4900	2.3548
	19.0	5.7999	5.8903	1.6458	5.5968	5.7403	1.7862	5.2800	5.4154	1.9110	4.9713	5.2900	2.0358	4.7439	5.0480	2.0982	4.4501	4.3480	2.4766	4.2160	4.1491	2.5635
	22.0	6.2873	5.2904	1.8408	6.0761	5.2321	1.9968	5.7511	5.0738	2.1372	5.3937	5.1085	2.2698	5.1419	4.9788	2.3400	4.6536	4.5936	2.8618	4.4088	4.4772	2.9623

TC : Cooling Capacity (kW)

SHC : Sensible Capacity (kW)

IPT : Cooling Power Consumption (kW)

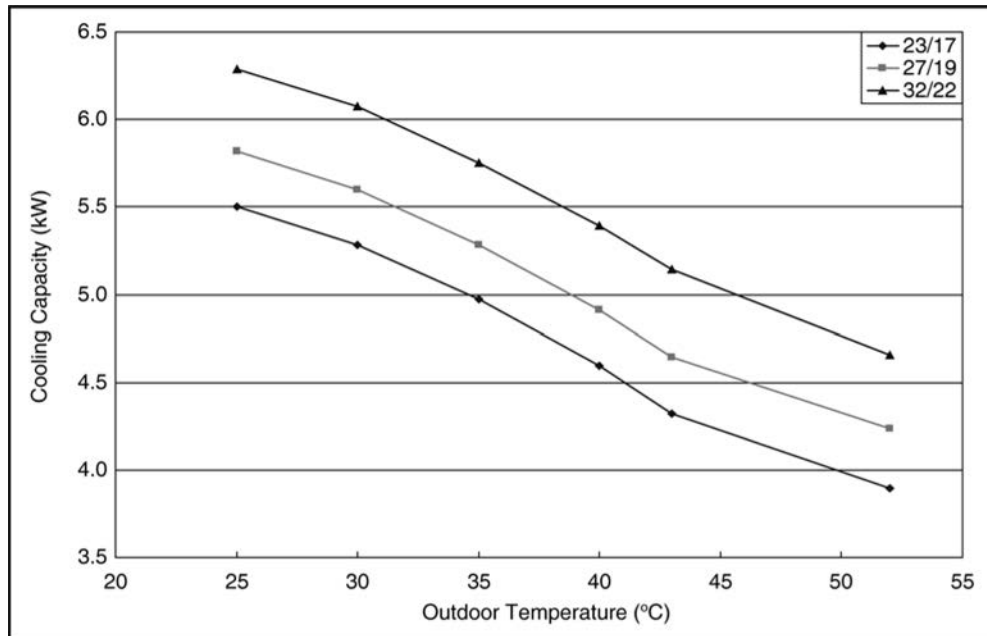

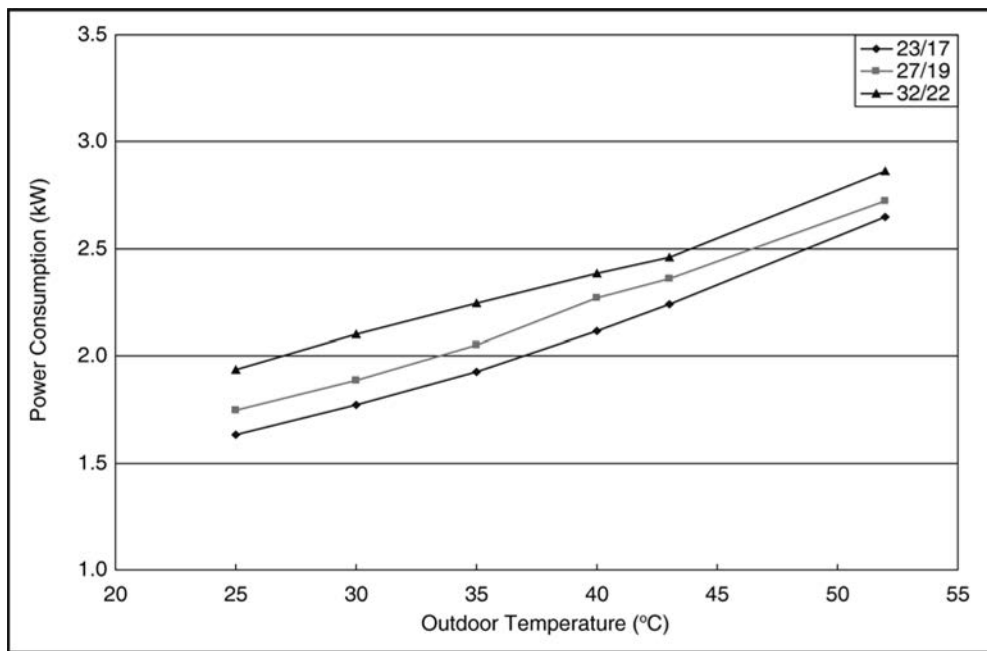

CS/CU-PC24KKF-2 (220V)

Indoor intake air ambient temperature		Outdoor intake air ambient temperature (D.B./°C)																							
		25°C			30°C			35°C			40°C			43°C			52°C			55°C					
		TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT			
DB	WB	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW			
23	17.0	7.3220	4.3829	2.1492	7.0300	4.4436	2.3328	6.6190	4.3019	2.5380	6.1215	4.1197	2.7864	5.7538	3.9881	2.9484	5.1828	3.3027	3.3228	4.9105	3.1972	3.4394			
	19.0	7.7330	3.6844	2.2788	7.4842	3.7148	2.4624	7.1057	3.6541	2.6892	6.6190	3.5326	2.9484	6.2837	3.4719	3.1212	5.8043	3.2671	3.6144	5.4989	3.2110	3.7411			
	22.0	8.4360	2.8443	2.4624	8.2089	2.9253	2.6676	7.8412	2.9354	2.9052	7.3328	2.8848	3.1860	6.9867	2.8747	3.3804	6.3130	2.8350	4.0808	5.9811	2.8251	4.2238			
25	17.0	7.2355	5.1724	2.1492	6.9543	5.1015	2.3220	6.5433	4.9295	2.5272	6.0874	4.7473	2.7648	5.7322	4.5853	2.9268	5.2430	3.7718	3.3027	4.9674	3.6431	3.4186			
	19.0	7.7330	4.5651	2.2896	7.4734	4.5448	2.4732	7.0624	4.4335	2.6892	6.5758	4.2816	2.9376	6.2405	4.1703	3.1212	5.7583	3.6197	3.6545	5.4553	3.7204	3.7828			
	22.0	8.4360	3.5933	2.4732	8.1764	3.6338	2.6676	7.7763	3.6035	2.9052	7.7145	3.4921	3.1752	6.9218	3.4618	3.3696	6.3022	3.3609	4.0699	5.9706	3.3317	4.2127			
27	17.0	7.1382	5.9518	2.1600	6.8678	5.8506	2.3220	6.4784	5.6380	2.5272	6.0242	5.4153	2.7432	5.6997	5.2837	2.9052	5.2365	4.4801	3.2827	4.9611	4.3712	3.3978			
	19.0	7.7438	5.3647	2.3004	7.4518	5.3040	2.4840	7.0300	5.1319	2.5700	6.5433	4.9598	2.9916	6.1864	4.8080	3.1104	5.6444	4.3416	3.4124	5.3477	4.2087	3.5322			
	22.0	8.4252	4.3424	2.4840	8.1440	4.3424	2.6784	7.7222	4.2614	2.9160	7.1706	4.0994	3.1644	6.8570	4.0387	3.3588	6.2634	3.8489	4.0593	5.9340	3.7919	4.2017			
29	17.0	7.1273	6.5389	2.1384	6.8678	6.3668	2.3220	6.4676	6.0530	2.4948	6.0782	5.6886	2.6784	5.7754	5.4052	2.7972	5.3743	4.2328	3.0308	5.0918	4.0219	3.1372			
	19.0	7.7330	6.1542	2.2896	7.4518	6.0733	2.4732	7.0300	5.8607	2.6676	6.5866	5.6481	2.8620	6.2621	5.5084	2.9808	5.8098	5.0577	3.2873	5.5045	4.9308	3.4027			
	22.0	8.3927	5.1420	2.5164	8.1115	5.1218	2.7324	7.6681	4.9902	2.9376	7.1814	4.8384	3.1536	6.8461	4.7473	3.2832	6.1959	4.4691	3.7442	5.8701	4.3850	3.8756			
32	17.0	7.1165	6.5287	2.1276	6.8678	6.4275	2.3112	6.0134	5.6279	2.4732	6.1107	5.7190	2.6352	5.8187	5.4457	2.7216	5.4494	4.2920	2.8519	5.1635	4.0869	2.9522			
	19.0	7.7222	7.1563	2.2788	7.4518	6.9741	2.4732	7.0300	6.5794	2.6460	6.6190	6.1947	2.8188	6.3162	5.9113	2.9052	5.9251	5.0917	3.1048	5.6135	4.8588	3.2138			
	22.0	8.3711	6.4275	2.5488	8.0899	6.3567	2.7648	7.6573	6.1644	2.9592	7.1814	5.9822	3.1428	6.8461	5.8303	3.2400	6.1959	5.3795	3.5877	5.8701	5.2429	3.7137			

TC : Cooling Capacity (kW)


SHC : Sensible Capacity (kW)


IPT : Cooling Power Consumption (kW)

CS/CU-PC24KKF-2 (240V)

Indoor intake air ambient temperature		Outdoor intake air ambient temperature (D.B./°C)																							
		25°C			30°C			35°C			40°C			43°C			52°C			55°C					
		TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT	TC	SHC	IPT			
DB	WB	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW	KW			
23	17.0	7.3220	4.3829	2.1492	7.0300	4.4436	2.3328	6.8190	4.3019	2.5380	6.1215	4.1197	2.7864	5.7538	3.9881	2.9484	5.1828	3.3027	3.4908	4.9105	3.1972	3.6134			
	19.0	7.7330	3.6844	2.2788	7.4842	3.7148	2.4624	7.1057	3.6541	2.6892	6.6190	3.5326	2.9484	6.2837	3.4719	3.1212	5.8043	3.2671	3.7973	5.4989	3.2110	3.9304			
	22.0	8.4360	2.8443	2.4624	8.2089	2.9253	2.6676	7.8412	2.9354	2.9052	7.3328	2.8848	3.1860	6.9867	2.8747	3.3804	6.3130	2.8350	4.2871	5.9811	2.8251	4.4375			
25	17.0	7.2355	5.1724	2.1492	6.9543	5.1015	2.3220	6.5433	4.9295	2.5272	6.0674	4.7473	2.7648	5.7322	4.5853	2.9268	5.2430	3.7718	3.4698	4.9674	3.6431	3.5915			
	19.0	7.7330	4.5651	2.2896	7.4734	4.5448	2.4732	7.0624	4.4335	2.6892	6.5758	4.2816	2.9376	6.2405	4.1703	3.1212	5.7583	3.8197	3.8394	5.4553	3.7204	3.9741			
	22.0	8.4360	3.5933	2.4732	8.1764	3.6338	2.6676	7.7763	3.6035	2.9052	7.7145	3.4921	3.1752	6.9218	3.4618	3.3696	6.3022	3.3609	4.2757	5.9706	3.3317	4.4258			
27	17.0	7.1382	5.9518	2.1600	6.8678	5.8506	2.3220	6.4784	5.6380	2.5272	6.0242	5.4153	2.7432	5.6997	5.2837	2.9052	5.2365	4.4801	3.4487	4.9611	4.3712	3.5697			
	19.0	7.7438	5.3647	2.3004	7.4518	5.3040	2.4840	7.0300	5.1319	2.7000	6.5433	4.9598	2.9916	6.1864	4.8080	3.1104	5.6444	4.3416	3.5851	5.3477	4.2087	3.7109			
	22.0	8.4252	4.3424	2.4840	8.1440	4.3424	2.6784	7.7222	4.2614	2.9160	7.1706	4.0994	3.1644	6.8570	4.0387	3.3588	6.2634	3.8489	4.2647	5.9340	3.7919	4.4142			
29	17.0	7.1273	6.5389	2.1384	6.8678	6.3668	2.3220	6.4676	6.0530	2.4948	6.0782	5.6886	2.6784	5.7754	5.4052	2.7972	5.3743	4.2328	3.1841	5.0918	4.0219	3.2959			
	19.0	7.7330	6.1542	2.2896	7.4518	6.0733	2.4732	7.0300	5.8607	2.6676	6.5866	5.6481	2.8620	6.2621	5.5064	2.9808	5.8098	5.0577	3.4536	5.5045	4.9308	3.5748			
	22.0	8.3927	5.1420	2.5164	8.1115	5.1218	2.7324	7.6681	4.9902	2.9376	7.1814	4.8384	3.1536	6.8461	4.7473	3.2832	6.1959	4.4691	3.9336	5.8701	4.3850	4.0716			
32	17.0	7.1165	6.5287	2.1276	6.8678	6.4275	2.3112	6.0134	5.6279	2.4732	6.1107	5.7190	2.6352	5.8187	5.4457	2.7216	5.4494	4.2920	2.9962	5.1635	4.0869	3.1015			
	19.0	7.7222	7.1563	2.2788	7.4518	6.9741	2.4732	7.0300	6.5794	2.6460	6.6190	6.1947	2.8188	6.3162	5.9113	2.9052	5.9251	5.0917	3.2619	5.6135	4.8588	3.3764			
	22.0	8.3711	6.4275	2.5488	8.0899	6.3567	2.7648	7.6573	6.1644	2.9592	7.1814	5.9822	3.1428	6.8461	5.8303	3.2400	6.1959	5.3795	3.7692	5.8701	5.2429	3.9015			


TC : Cooling Capacity (kW)
 SHC : Sensible Capacity (kW)
 IPT : Cooling Power Consumption (kW)

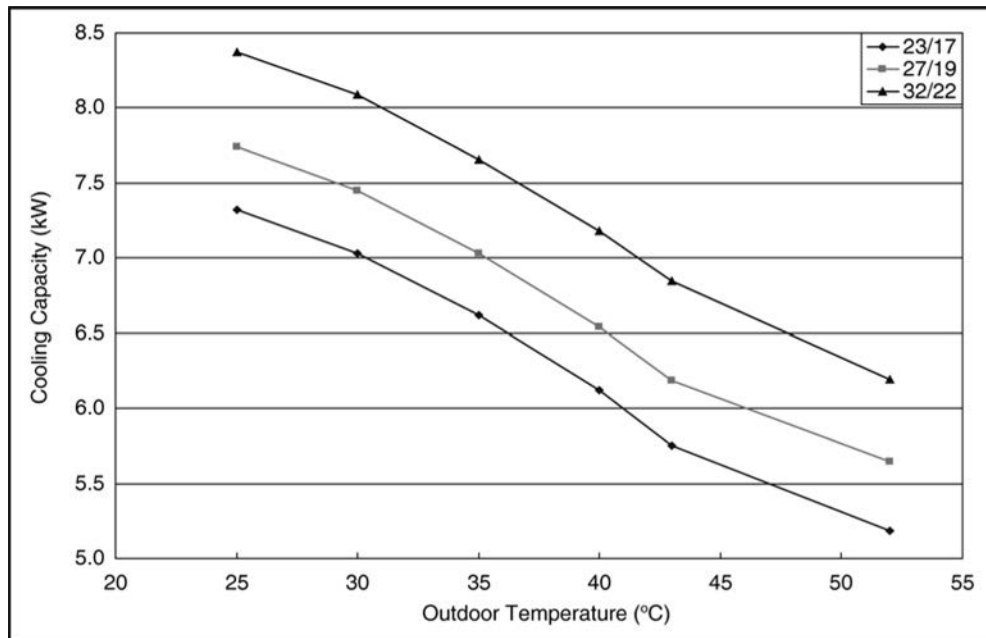


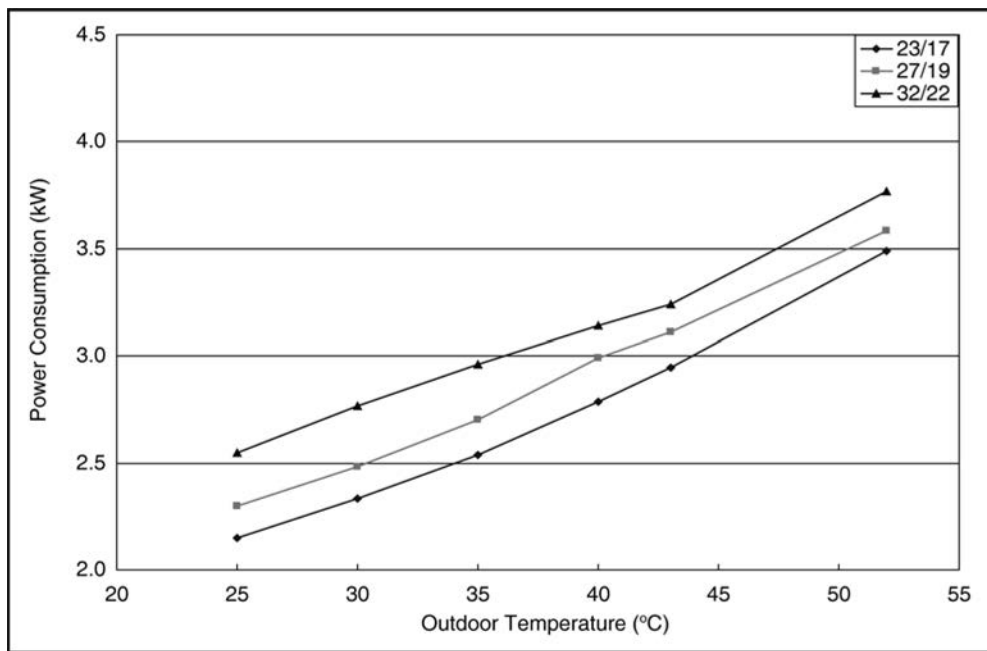

17.5. Sound Data

CS-PC18KKF-2

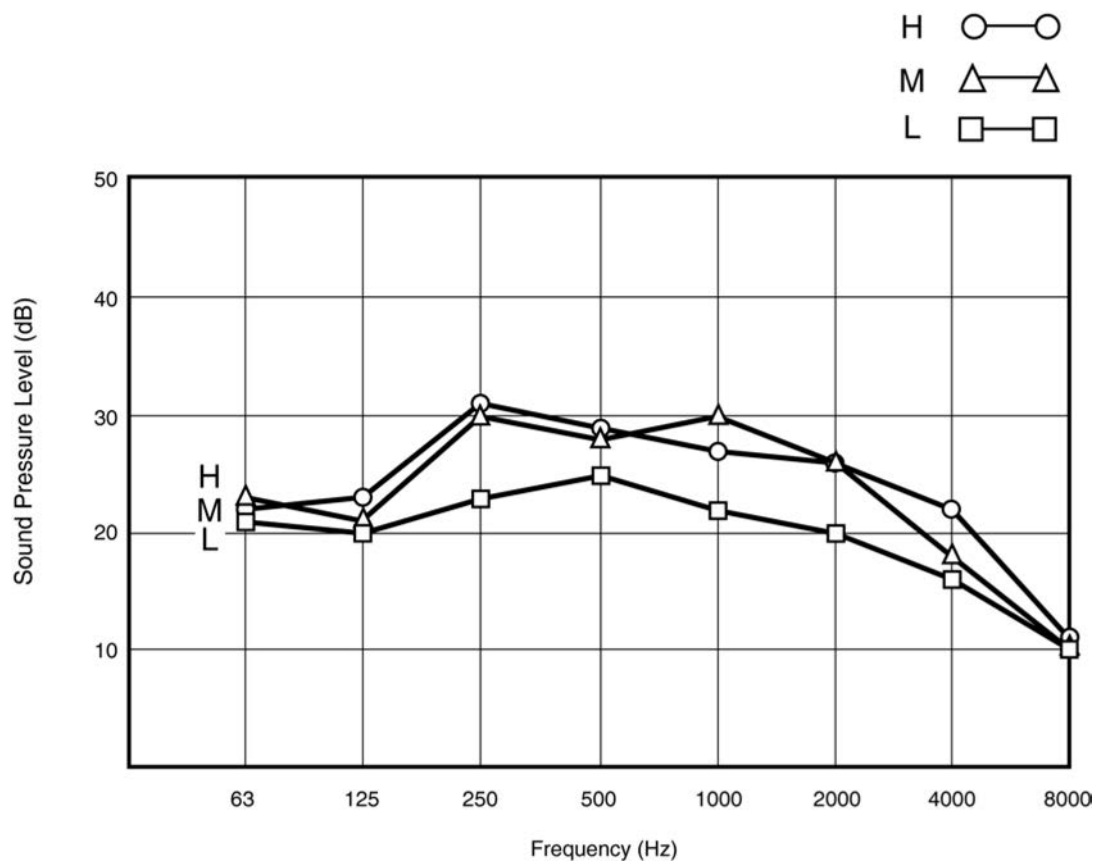


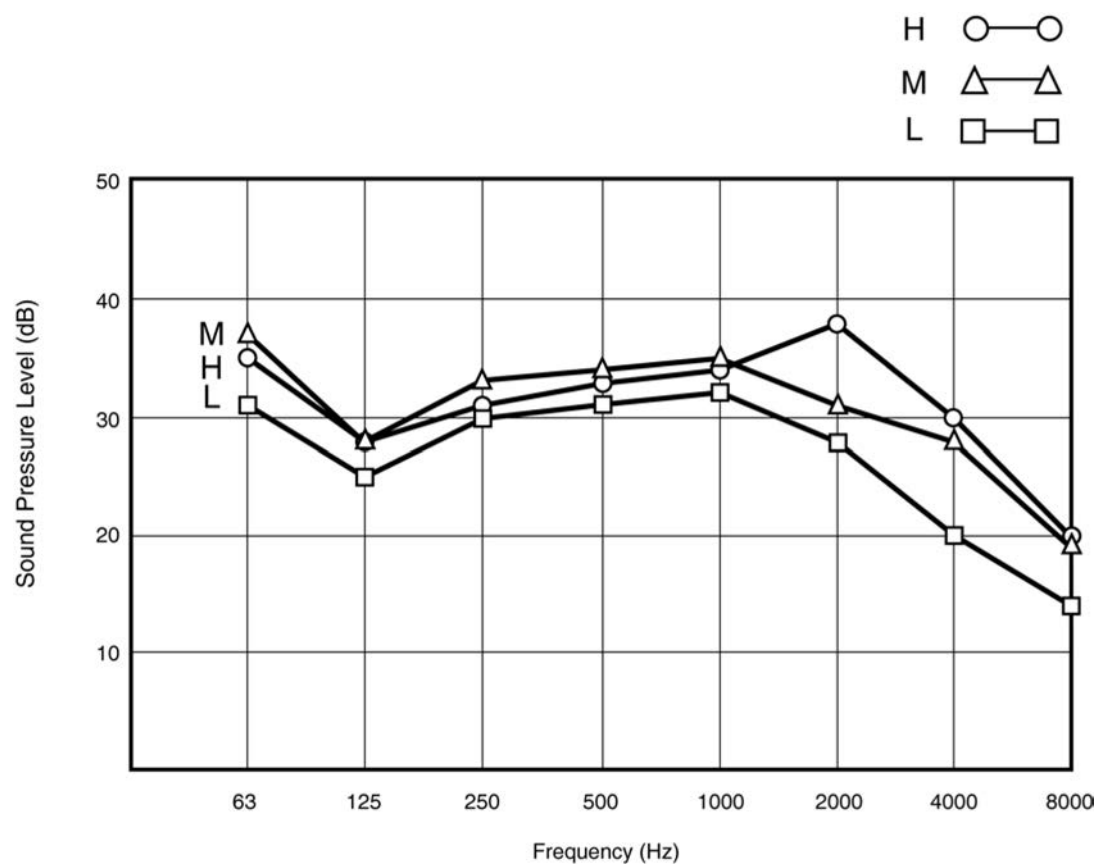

18 Exploded View and Replacement Parts List

18.1. Indoor Unit

18.1.1. CS-PC12KKF-2

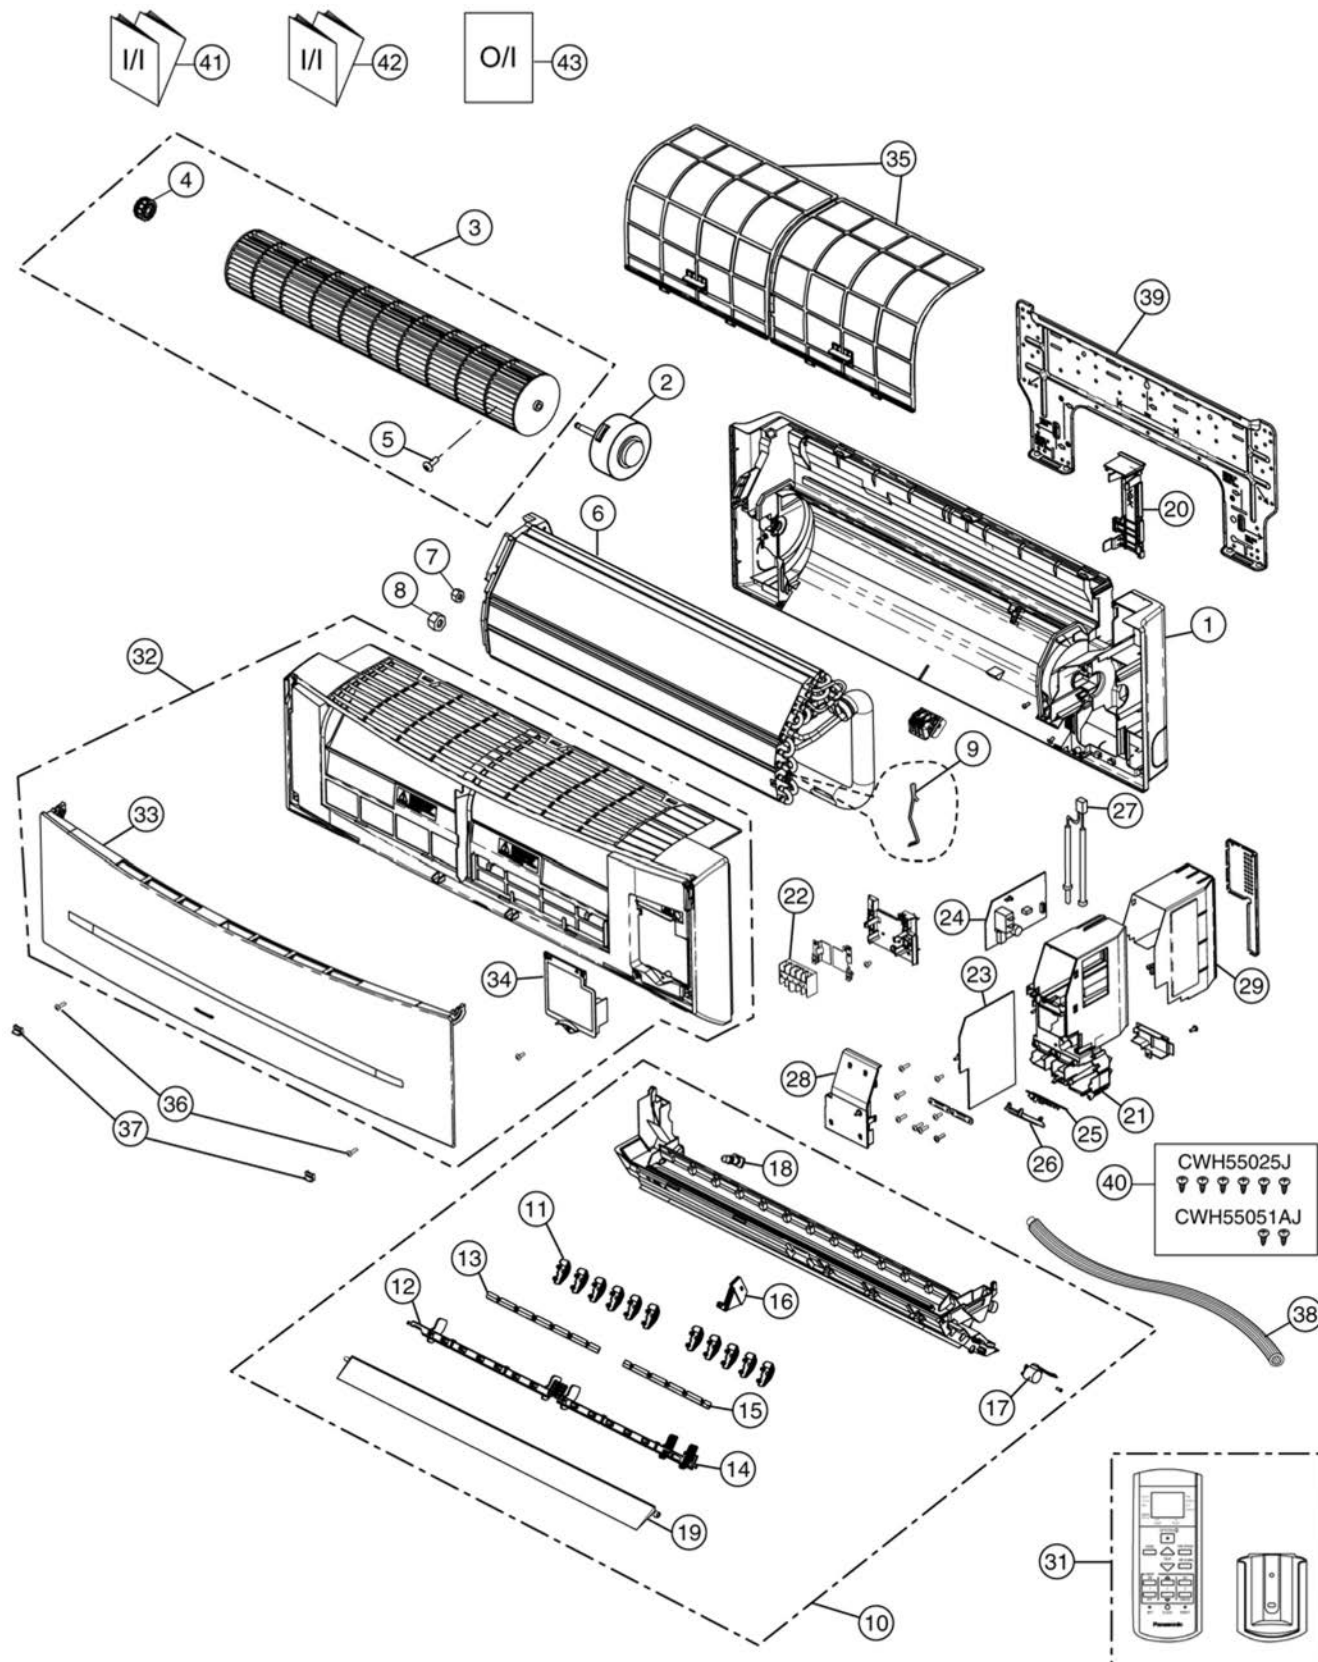

Note:

The above exploded view is for the purpose of parts disassembly and replacement.


The non-numbered parts are not kept as standard service parts.

REF. NO.	PART NAME & DESCRIPTION	QTY.	CS-PC12KKF-2	REMARK
1	CHASSY COMPLETE	1	CWD50C1653	
2	FAN MOTOR	1	CWA921409	O
3	CROSS FLOW FAN COMPLETE	1	CWH02C1076	
4	BEARING ASS'Y	1	CWH64K007	
5	SCREW - CROSS FLOW FAN	1	CWH551146	
6	EVAPORATOR	1	CWB30C2850	
7	FLARE NUT (LIQUID)	1	CWT251026	
8	FLARE NUT (GAS)	1	CWT251062	
9	HOLDER SENSOR	1	CWH32143	
10	DISCHARGE GRILLE COMPLETE	1	CWE20C3084	
11	VERTICAL VANE	11	CWE241287	
12	CONNECTING BAR	1	CWE261152	
13	CONNECTING BAR	1	CWE261153	
14	CONNECTING BAR	1	CWE261154	
15	CONNECTING BAR	1	CWE261155	
16	FULCRUM	1	CWH621102	
17	AIR SWING MOTOR	1	CWA981240	O
18	CAP - DRAIN TRAY	1	CWH521096	
19	HORIZONTAL VANE	1	CWE24C1268	
20	BACK COVER CHASSIS	1	CWD933233	
21	CONTROL BOARD CASING	1	CWH102370	
22	TERMINAL BOARD COMPLETE	1	CWA28C2397	O
23	ELECTRONIC CONTROLLER - MAIN	1	CWA73C4171	O
24	ELECTRONIC CONTROLLER - POWER	1	CWA745284	O
25	ELECTRONIC CONTROLLER - INDICATOR & RECEIVER	1	CWA745300	O
26	INDICATOR HOLDER	1	CWD933021	
27	SENSOR COMPLETE	1	CWA50C2401	O
28	CONTROL BOARD FRONT COVER	1	CWH13C1183	
29	CONTROL BOARD TOP COVER	1	CWH131350	
31	REMOTE CONTROL COMPLETE	1	CWA75C3623	O
32	FRONT GRILLE COMPLETE	1	CWE11C4099	O
33	INTAKE GRILLE COMPLETE	1	CWE22C1508	O
34	GRILLE DOOR	1	CWE14C1029	
35	E-ION FILTER	2	CWD001279	
36	SCREW - FRONT GRILLE	2	XTT4+16CFJ	
37	CAP - FRONT GRILLE	2	CWH521194	
38	DRAIN HOSE	1	CWH851173	
39	INSTALLATION PLATE	1	CWH361097	
40	BAG COMPLETE - INSTALLATION SCREW	1	CWH82C067	
41	INSTALLATION INSTRUCTION	1	CWF614116	
42	INSTALLATION INSTRUCTION	1	CWF614117	
43	OPERATING INSTRUCTION	1	CWF567469	

(Note)

- All parts are supplied from PHAAM, Malaysia (Vendor Code: 00029488).
- "O" marked parts are recommended to be kept in stock.

18.1.2. CS-PC18KKF-2 CS-PC24KKF-2

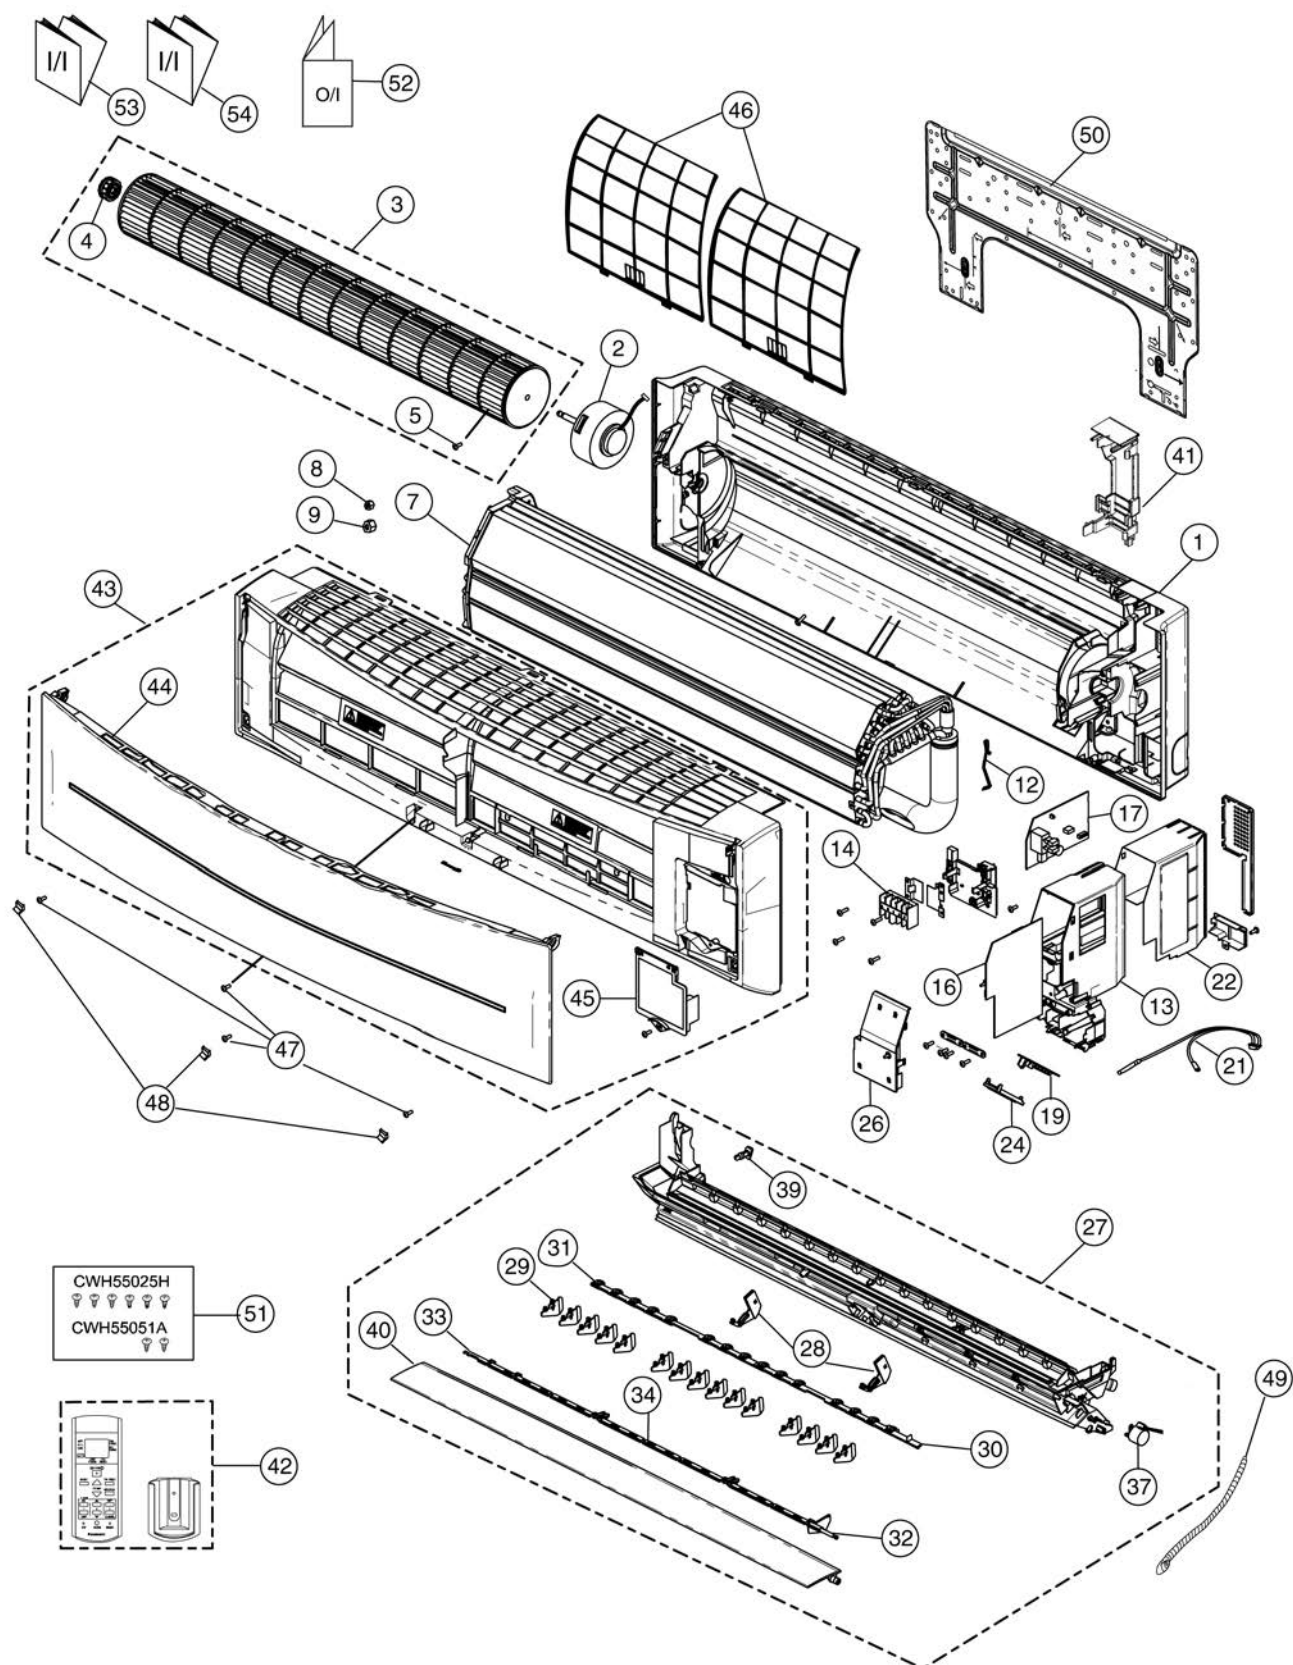

Note:

The above exploded view is for the purpose of parts disassembly and replacement.

The non-numbered parts are not kept as standard service parts.


REF. NO.	PART NAME & DESCRIPTION	QTY.	CS-PC18KKF-2	CS-PC24KKF-2	REMARK
1	CHASSY COMPLETE	1	CWD50C1654	←	
2	FAN MOTOR	1	L6CBYYYYL0037	L6CBYYYYL0039	O
3	CROSS FLOW FAN COMPLETE	1	CWH02C1077	←	
4	BEARING ASS'Y	1	CWH64K007	←	
5	SCREW - CROSS FLOW FAN	1	CWH551146	←	
7	EVAPORATOR	1	CWB30C2772	CWB30C2777	
8	FLARE NUT (LIQUID)	1	CWT251026	←	
9	FLARE NUT (GAS)	1	CWT251062	CWT251036	
12	HOLDER SENSOR	1	CWH32143	←	
13	CONTROL BOARD CASING	1	CWH102370	←	
14	TERMINAL BOARD COMPLETE	1	CWA28C2361	CWA28C2362	O
16	ELECTRONIC CONTROLLER - MAIN	1	CWA73C4211	CWA73C4206	O
17	ELECTRONIC CONTROLLER - POWER	1	CWA745303	←	O
19	ELECTRONIC CONTROLLER - INDICATOR & RECEIVER	1	CWA745300	←	O
21	SENSOR COMPLETE	1	CWA50C2401	←	O
22	CONTROL BOARD TOP COVER	1	CWH131350	←	
24	INDICATOR HOLDER	1	CWD933021	←	
26	CONTROL BOARD FRONT COVER	1	CWH13C1183	←	
27	DISCHARGE GRILLE COMPLETE	1	CWE20C3008	←	
28	FULCRUM	2	CWH621103	←	
29	VERTICAL VANE	15	CWE241289	←	
30	CONNECTING BAR	1	CWE261156	←	
31	CONNECTING BAR	1	CWE261158	←	
32	CONNECTING BAR	1	CWE261167	←	
33	CONNECTING BAR	1	CWE261159	←	
34	CONNECTING BAR	1	CWE261160	←	
37	A.S.MOTOR DC SINGLE 12V 300OHM	1	CWA981241	←	O
39	CAP - DRAIN TRAY	1	CWH521096	←	
40	HORIZONTAL VANE	1	CWE24C1295	←	
41	BACK COVER CHASSIS	1	CWD933031	←	
42	REMOTE CONTROL COMPLETE	1	CWA75C3623	←	O
43	FRONT GRILLE COMPLETE	1	CWE11C4161	CWE11C4139	O
44	INTAKE GRILLE COMPLETE	1	CWE22C1512	←	O
45	GRILLE DOOR	1	CWE14C1029	←	
46	AIR FILTER	2	CWD001283	←	
47	SCREW - FRONT GRILLE	4	XTT4+16CFJ	←	
48	CAP - FRONT GRILLE	3	CWH521194	←	
49	DRAIN HOSE	1	CWH851173	←	
50	INSTALLATION PLATE	1	CWH361098	←	
51	BAG COMPLETE - INSTALLATION SCREW	1	CWH82C1705	←	
52	OPERATING INSTRUCTION	1	CWF567469	←	
53	INSTALLATION INSTRUCTION	1	CWF614116	←	
54	INSTALLATION INSTRUCTION	1	CWF614117	←	

(Note)

- All parts are supplied from PHAAM, Malaysia (Vendor Code: 00029488).
- "O" marked parts are recommended to be kept in stock.

18.2. Outdoor Unit

18.2.1. CU-PC12KKF-2 CU-PC18KKF-2

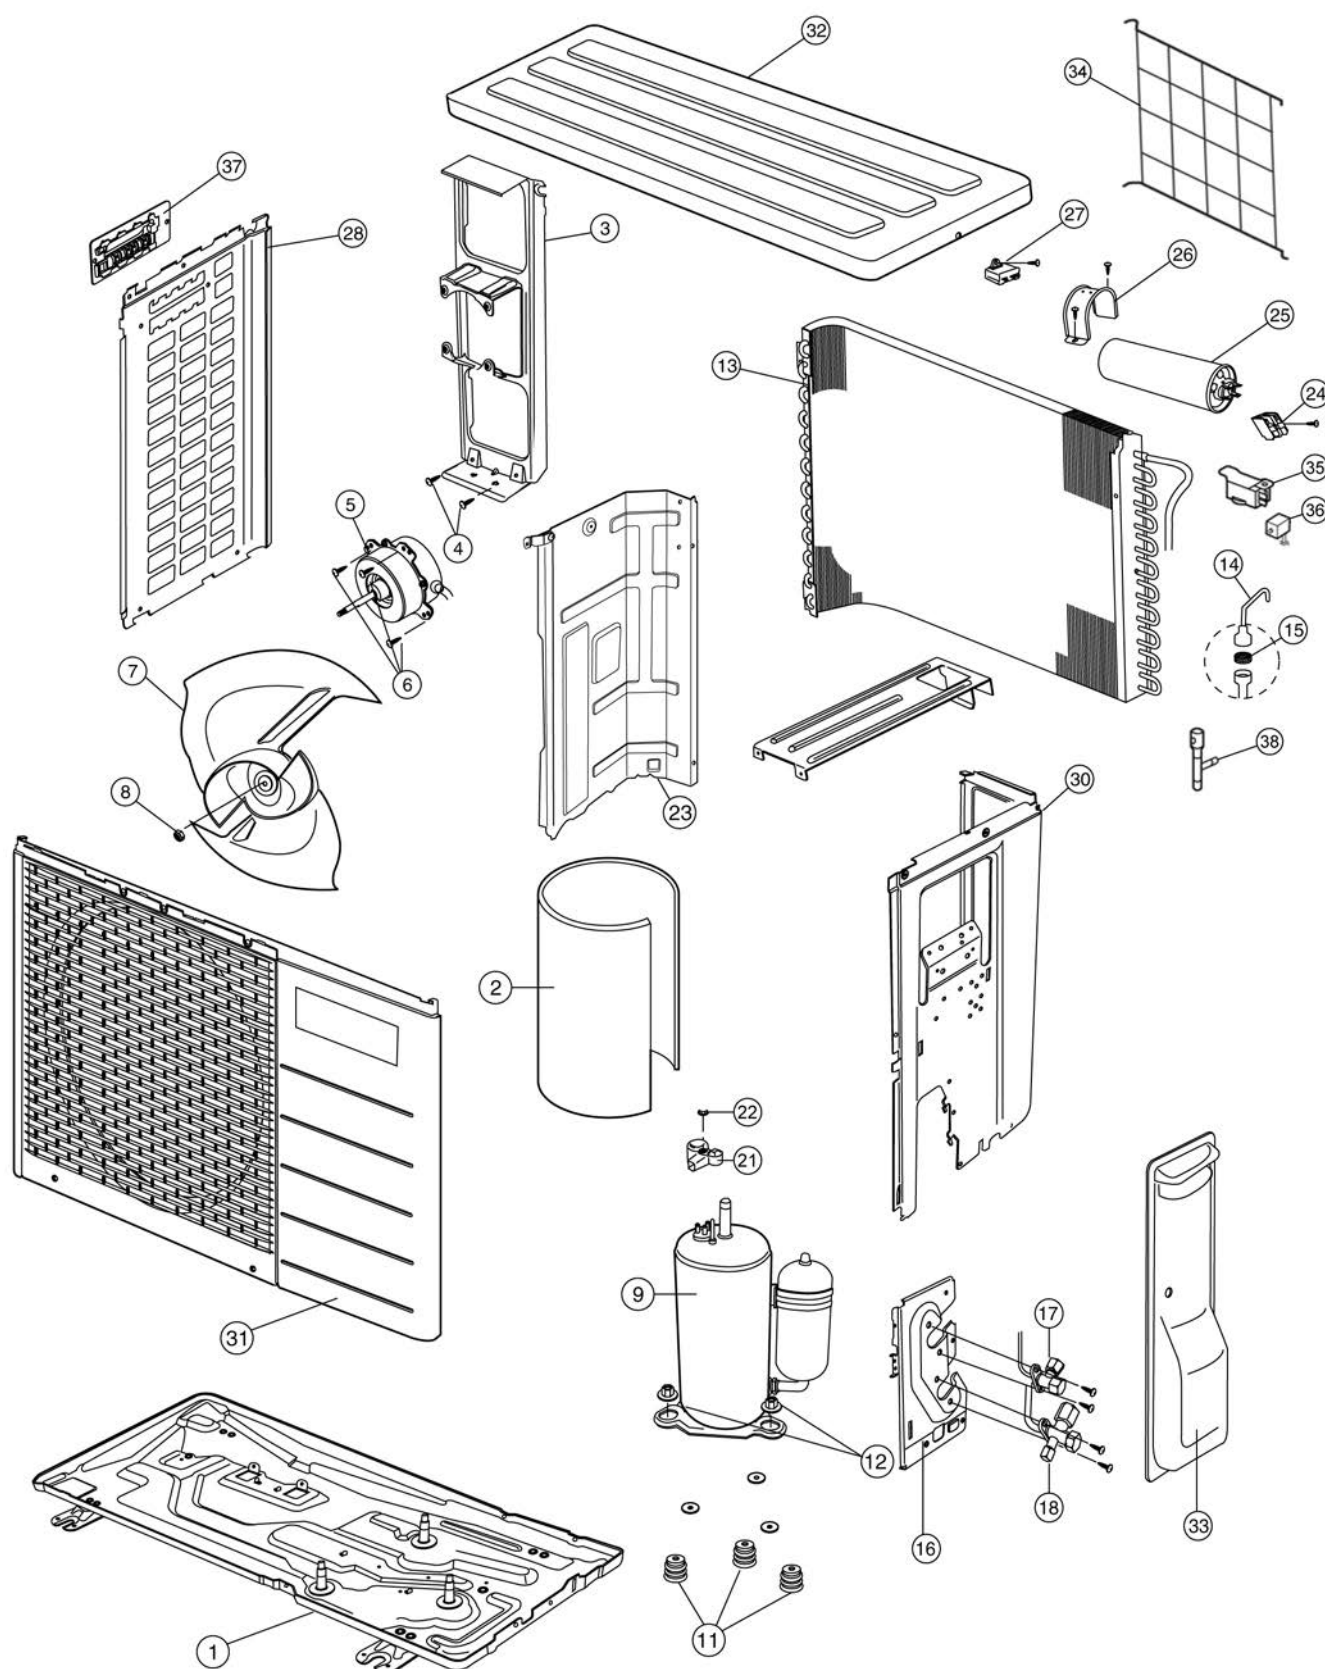

Note:


The above exploded view is for the purpose of parts disassembly and replacement.
The non-numbered parts are not kept as standard service parts.

REF. NO.	PART NAME & DESCRIPTION	QTY.	CU-PC12KKF-2	CU-PC18KKF-2	REMARK
1	CHASSY ASS'Y	1	CWD50K2088	←	
2	SOUND PROOF MATERIAL	1	CWG302110	-	
3	FAN MOTOR BRACKET	1	CWD541030	CWD541030B	
4	SCREW - FAN MOTOR BRACKET	2	CWH551217	←	
5	FAN MOTOR	1	CWA951676	←	O
6	SCREW - FAN MOTOR MOUNT	3	CWH55406J	←	
7	PROPELLER FAN ASS'Y	1	CWH03K1006	←	
8	NUT - PROPELLER FAN	1	CWH56053J	←	
9	COMPRESSOR	1	2KS210D5AA06	2KS324D5AA06	O
11	ANTI - VIBRATION BUSHING	3	CWH50055	←	
12	NUT - COMPRESSOR MOUNT	3	CWH561049	←	
13	CONDENSER	1	CWB32C2821	CWB32C2795	
14	CAPILLARY TUBE ASS'Y	1	CWB15K1165	CWB15K1208	
15	STRAINER	1	CWB111011	CWB11025	
16	HOLDER COUPLING	1	CWH351023	CWH351046	
17	2-WAY VALVE (LIQUID)	1	CWB021362	CWB021488	
18	3-WAY VALVE (GAS)	1	CWB011482	←	O
21	TERMINAL COVER	1	CWH171012	←	O
22	NUT - TERMINAL COVER	1	CWH7080300J	←	
23	SOUND PROOF BOARD	1	CWH151023	←	
24	TERMINAL BOARD ASS'Y	1	CWA28K1064J	CWA28K1033J	
25	CAPACITOR - COM.	1	F0GAH356A001	DS441456CPND	O
26	HOLDER CAPACITOR	1	CWH30060	CWH301054	O
27	CAPACITOR - F.M	1	DS441205NPQA	←	
28	CABINET SIDE PLATE	1	CWE041248A	←	O
30	CABINET SIDE PLATE COMPLETE	1	CWE04C1118	CWE04C1120	
31	CABINET FRONT PLATE ASS'Y	1	CWE06K1034	←	
32	CABINET TOP PLATE	1	CWE031014A	←	
33	CONTROL BOARD COVER COMP	1	CWH13C1064	←	
34	WIRE NET	1	CWD041111A	←	
35	THERMOSTAT	1	-	CWA151060	
36	V-COIL COMPLETE	1	-	CWA43C2282	
37	HANDLE	1	CWE161010	←	
38	2-WAYS VALVE	1	-	CWB021394	

(Note)

- All parts are supplied from PHAAM, Malaysia (Vendor Code: 00029488).
- "O" marked parts are recommended to be kept in stock.

18.2.2. CU-PC24KKF-2

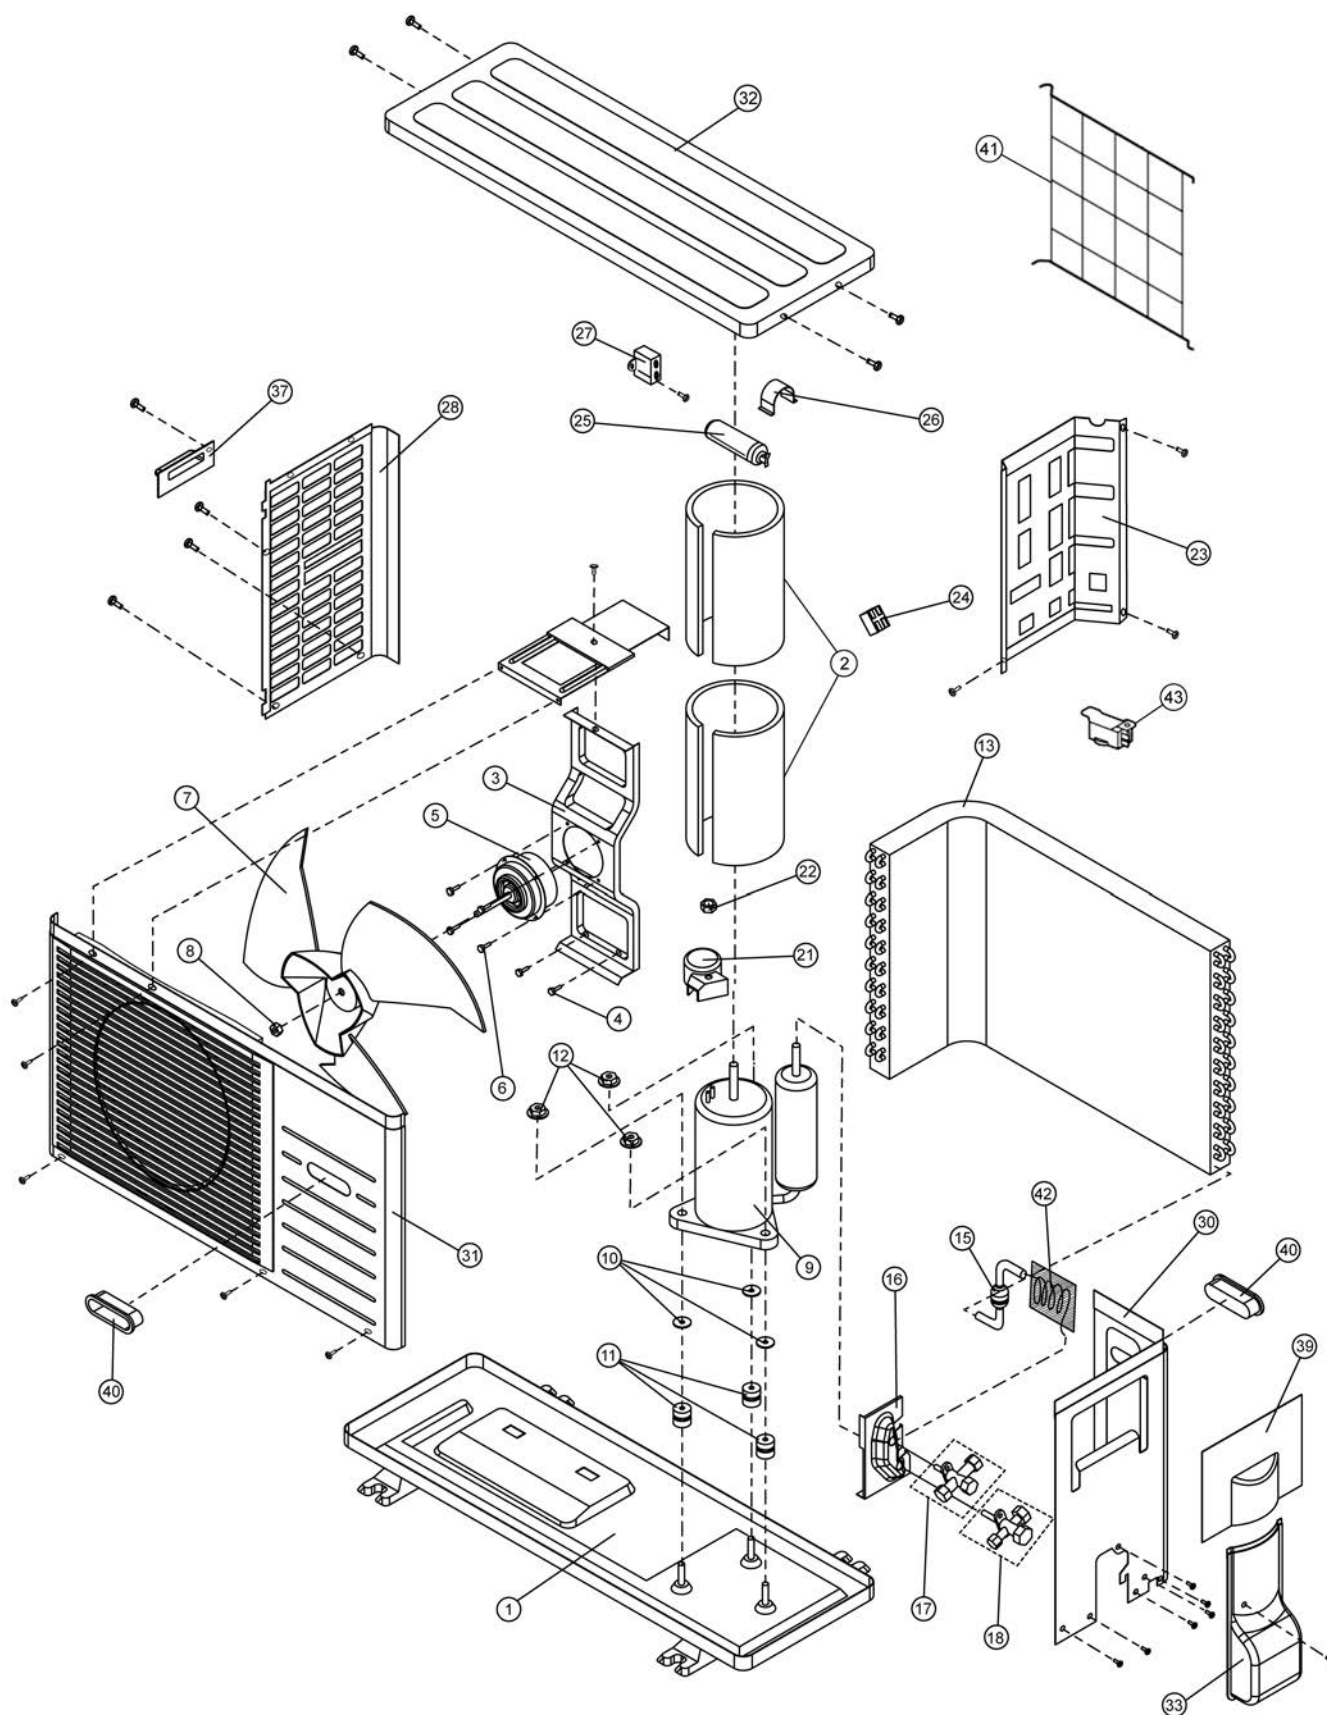

Note:

The above exploded view is for the purpose of parts disassembly and replacement.
The non-numbered parts are not kept as standard service parts.

REF. NO.	PART NAME & DESCRIPTION	QTY.	CU-PC24KKF-2	REMARK
1	CHASSY ASS'Y	1	CWD50K2100	
2	SOUND PROOF MATERIAL	2	CWG302230	
3	FAN MOTOR BRACKET	1	CWD541065	
4	SCREW - FAN MOTOR BRACKET	2	CWH551217	
5	FAN MOTOR	1	CWA951689	O
6	SCREW - FAN MOTOR MOUNT	4	CWH55252J	
7	PROPELLER FAN ASS'Y	1	CWH03K1017	
8	NUT - PROPELLER FAN	1	CWH561038J	
9	COMPRESSOR	1	2JS438D3CB04	O
10	PACKING	3	CWB81043	
11	ANTI - VIBRATION BUSHING	3	CWH50055	
12	NUT - COMPRESSOR MOUNT	3	CWH561049	
13	CONDENSER	1	CWB32C2695	
15	STRAINER	1	CWB11025	
16	HOLDER COUPLING	1	CWH351036	
17	2-WAY VALVE (LIQUID)	1	CWB021175	O
18	3-WAY VALVE (GAS)	1	CWB011484	O
21	TERMINAL COVER	1	CWH171012	
22	NUT - TERMINAL COVER	1	CWH7080300J	
23	SOUND PROOF BOARD	1	CWH151056	
24	TERMINAL BOARD ASS'Y	1	CWA28K1064J	
25	CAPACITOR - COM.	1	CWA312079	O
26	HOLDER CAPACITOR	1	CWH30060	
27	CAPACITOR - F.M	1	DS441505NPQB	O
28	CABINET SIDE PLATE	1	CWE041082A	
30	CABINET SIDE PLATE COMPLETE	1	CWE04C1127	
31	CABINET FRONT PLATE ASS'Y	1	CWE06K1045	
32	CABINET TOP PLATE	1	CWE03K1011A	
33	CONTROL BOARD COVER COMP	1	CWH131168	
37	HANDLE	1	CWE161010	
39	CONTROL BOARD COVER (RIGHT-TOP)	1	CWH131169A	
40	HANDLE	2	CWE16000E	
41	WIRE NET	1	CWD041041A	
42	CAPILLARY TUBE ASS'Y	1	CWB15K1256	
43	THERMOSTAT	1	CWA151061	

(Note)

- All parts are supplied from PHAAM, Malaysia (Vendor Code: 00029488).
- "O" marked parts are recommended to be kept in stock.